



**REPORT ON THE CERTIFICATION TESTING OF AN
SENNHEISER COMMUNICATIONS A/S
DW 10 HS
WITH RESPECT TO
FCC RULES CFR 47, PART 15D July 2008
INTENTIONAL RADIATOR SPECIFICATION
&
INDUSTRY CANADA
RADIO STANDARDS SPECIFICATION
RSS-213**



TEST REPORT NO: 8F1839WUS1
COPY NO: PDF
ISSUE NO: 2
FCC ID: DMOCDHDKB
IC NUMBER: 2099D –TDH1

**REPORT ON THE CERTIFICATION TESTING OF AN
SENNHEISER COMMUNICATIONS A/S
DW 10 HS
WITH RESPECT TO
FCC RULES CFR 47, PART 15D July 2008
INTENTIONAL RADIATOR SPECIFICATION
&
INDUSTRY CANADA
RADIO STANDARDS SPECIFICATION
RSS-213**



TEST DATE: 1st – 15th September 2009

TESTED BY: _____ D WINSTANLEY

APPROVED BY: _____ J CHARTERS
RADIO PRODUCT
MANAGER

DATE: 10th February 2010 _____

Distribution:

Sennheiser Communications A/S
TRaC Telecoms & Radio

THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE

The results herein relate only to the sample tested. Full results are contained in the relevant works order file.

UP HOLLAND

Moss View, Nipe Lane, Up Holland, West Lancashire, WN8 9PY, UK.
T +44 (0)1695 556666 F +44 (0)1695 557077 E test@tracglobal.com
www.tracglobal.com

CONTENTS

	PAGE
CERTIFICATE OF CONFORMITY & COMPLIANCE	4
APPLICANT'S SUMMARY	5
TESTS REQUIRED	6
EQUIPMENT TEST CONDITIONS	7
SYSTEM DESCRIPTION	7
TEST RESULTS	8 – 31
	ANNEX
PHOTOGRAPHS	A
PHOTOGRAPH No. 1: Radiated Test Setup	
PHOTOGRAPH No. 2: Top Overview	
PHOTOGRAPH No. 3: Bottom Overview	
	ANNEX
APPLICANT'S SUBMISSION OF DOCUMENTATION LIST	B
EMISSION BANDWIDTH	C
PEAK TRANSMIT POWER	D
POWER SPECTRAL DENSITY	E
ACKNOWLEDGEMENTS	F
EMISSIONS OUTSIDE THE SUB-BAND – CONDUCTED	G
EMISSIONS INSIDE THE SUB-BAND – CONDUCTED	H
SPURIOUS EMISSIONS – RADIATED	I
FRAME PERIOD	J
EQUIPMENT DETAILS & CALIBRATION	K
MEASUREMENT UNCERTAINTY	L
Notes:	
1. Component failure during test	YES [] NO [X]
2. If Yes, details of failure:	
3. The facilities used for the testing of the product contain in this report are FCC Listed.	
4. The contents of the attached applicants declarations and other supplied information are not covered by the scope of this laboratory's UKAS or FCC accreditations' and is provided in good faith.	



CERTIFICATE OF CONFORMITY & COMPLIANCE

FCC IDENTITY: DMOCDHDKB
IC NUMBER: 2099D –TDH1
PURPOSE OF TEST: Certification
TEST SPECIFICATION(s): FCC RULES CFR 47, Part 15D July 2008
RSS-213
TEST RESULT: Compliant to Specification
EQUIPMENT UNDER TEST: DW 10 HS
EQUIPMENT TYPE: UPCS Transceiver
PRODUCT USE: Personal communications
CARRIER POWER: 19.55 dBm (Conducted)
ANTENNA TYPE: Integral
ALTERNATIVE ANTENNA: Not Applicable
BAND OF OPERATION: 1920 MHz – 1930 MHz
CHANNEL SPACING: 1.728 MHz (starting at 1921.536 MHz – 1928.448MHz)
MAXIMUM NUMBER OF CHANNELS: 5 frequencies, 12 single time slots per frequency giving 60 channels
FREQUENCY GENERATION: SAW Resonator Crystal Synthesiser
MODULATION METHOD: Amplitude Digital Angle
POWER SOURCE(s): +3.7Vdc
TEST DATE(s): 1st – 15th September 2009
APPLICANT: Sennheiser Communications A/S
ADDRESS: Langager 6
DK-2680
Solrød Stand
Denmark

TESTED BY: _____ D WINSTANLEY

APPROVED BY: _____ J CHARTERS
RADIO PRODUCT
MANAGER

EQUIPMENT TEST / EXAMINATIONS REQUIRED

1.

TEST/EXAMINATION	Part 15	RSS-213	Applicable
Coordination with Fixed Microwave Service	15.307 (b)	2.1	No Note 1
Cross reference to Subpart B	15.309 (b)	N/A	Yes
Labelling Requirements	15.311 15.19 (a)(3)	RSS-GEN 5.2	Yes
Measurement Procedures	15.313	4.1	Yes
Antenna Requirement	15.317 15.203	4.1(e)	Yes
Modulation Techniques	15.319 (b)	4.3.1	Yes
Conducted AC Powerline	15.315 15.207	4.2	Yes Note 2
Emission Bandwidth	15.323 (a)	4.3.2.1	Yes
Peak Transmit Power	15.319 (c)	4.3.1	Yes
Power Spectral Density	15.319 (d)	4.3.2.1	Yes
Antenna Gain	15.319 (e)	4.1 (e)	Yes
Automatic Discontinuation of Transmission	15.319 (f)	4.3.4(a)	Yes
Radio Frequency Radiation Exposure	15.319 (i)	RSS-102	Yes
Monitoring Thresholds	15.323 (c)(2) 15.323 (c)(9)	4.3.4(b)(2)	Yes
Monitoring of Intended Transmit Window and Maximum Reaction Time	15.323 (c)(1)	4.3.4(b)(1)	Yes
Monitoring Bandwidth	15.323 (c)(7)	4.3.4(b)(7)	Yes
Access Criteria Functional Test	15.323 (c)(6)	4.3.4(b)(6)	No Note 2
Duration of Transmission	15.323 (c)(3)	4.3.4(b)(3)	Yes
Connection Acknowledgement	15.323 (c)(4)	4.3.4(b)(4)	Yes
Lower threshold Selected Channel, Power Accuracy, Segment Occupancy	15.323 (c)(5)	4.3.4(b)(5)	Yes
Monitoring Antenna	15.323 (c)(8)	4.3.4(b)(8)	Yes
Duplex Connections	15.323 (c)(10)	4.3.4(b)(10)	Yes
Alternative Monitoring Interval for Co-located Devices	15.323 (c)(11)	4.3.4(b)(11)	No Note 3
Fair Access to Spectrum Related to (c)(10) & (c)(11)	15.323 (c)(12)	4.3.4(b)(12)	Yes
Emission Inside and Outside the Sub-band	15.323 (d)	4.3.3	Yes
Frame Period	15.323 (e)	4.3.4(c)	Yes
Frequency Stability	15.323 (f)	6.2	Yes
Note:	1. Requirement removed April 4 th 2005 see public notice DX 05-1005. 2. The portable part connects indirectly via the fixed part see 8F1722WUS2 for results 3. The EUT does not transmit control and signalling information. 4. Not utilized by this EUT as devices will not be co-located within 1m of each other.		

2.	Product Use:	Personal Communications	
3.	Duty Cycle:		8.33%
4.	Transmitter bit or pulse rate and level:		2Mbps
5.	Temperatures:	Ambient (Tnom)	22°C
6.	Supply Voltages:	Vnom	+3.7Vdc

Note: Vnom voltages are as stated above unless otherwise shown on the test report page

7.	Equipment Category:	Single channel	<input type="checkbox"/>
		Two channel	<input type="checkbox"/>
		Multi-channel	<input checked="" type="checkbox"/>
8.	Channel spacing:	Narrowband	<input type="checkbox"/>
		Wideband	<input checked="" type="checkbox"/>
9.	System Description:		

The system is made up of two parts, a fixed part and a portable part. The portable part is a cordless headset device. The portable part is capable of operating on a maximum of 60 channels (time spectrum windows). The fixed part is a desktop transmitters connected to an exchange/personal computer.

The system operates in the 1920MHz -1930MHz band. The system use 5 different frequency channels 1.728MHz apart using MC/TDMA/TDD (Multi Carrier / Time Division Multiple Access / Time Division Duplex) using QPSK modulation.

The system employs a 10ms frame, divided into 24 equal timeslots, numbered 0-23. The Base station always transmits in the first half of the frame, and the Portable always transmits on the duplex mate in the second half of the frame.

The Portable is the initiating device. A physical bearer is composed of a transmit single-slot and a receive single-slot for narrowband communications or a transmit long-slot and a receive long-slot for wideband communications. The two halves of a given bearer are always exactly half a frame (5ms, 12 single slots) apart. When configured to operate using long slots the transmission extends in the next consecutive transmit/receive time slot.

The Fixed part is always capable of realising >40 channels when transmitting control and signalling information. The portable part is capable of realising >40 Channels in single-slot configuration and <40channels in long-slot configuration.

During the testing frequency administration was utilised to allow operation on only certain channels during the tests. The frequency administration was performed using a software interface. A portable part was supplied with a temporary antenna connector to allow conducted measurements where applicable.

CROSS REFERENCE TO SUBPART B

The unit contains digital circuitry, which is not directly related to the radio transmitter. See emissions outside the sub-band for results.

LABELLING INFORMATION

This information is contained in a separate document. See attached exhibit.

ANTENNA REQUIREMENTS

The unit employs an integral antenna arrangement.

MODULATION TECHNIQUES

The Sennheiser Communications A/S DW 10 HS is an isochronous device operating in the 1920 MHz – 1930 MHz frequency band.


The Sennheiser Communications A/S DW 10 HS modulation technique is based on DECT technology as described in European standards EN 300 175-2 and EN 300 175-3.

The Sennheiser Communications A/S DW 10 HS modulation techniques are MC/TDMA/TDD (Multi Carrier / Time Division Multiple Access / Time Division Duplex) using QPSK modulation.

TRANSMITTER EMISSION BANDWIDTH

The emission bandwidth is measured in accordance with ANSI C63.17 sub-clause 6.1.3 using the setup below

Test Setup 1:

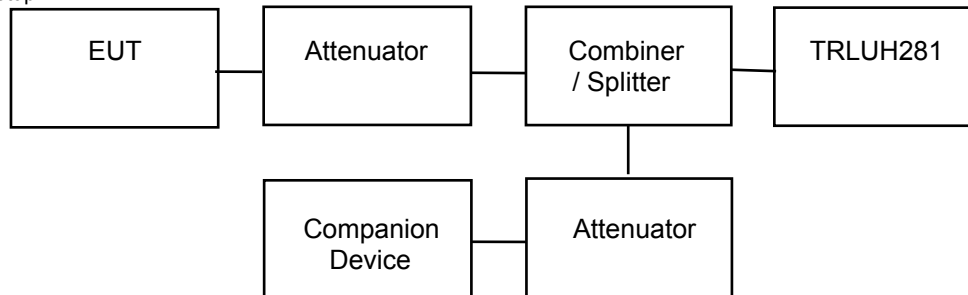

Single Slot Configuration

$f_x = 1921.536 \text{ MHz}$				
ΔP (dBc)	f_l (MHz)	f_h (MHz)	Δf (MHz)	Limit
-26	1920.834077	1922.257154	1.423	50kHz > Δf > 2.5MHz
-12	1920.954269	1922.127346	1.173	N/A
-6	1921.165808	1921.944654	0.778	N/A

$f_x = 1924.992 \text{ MHz}$				
ΔP (dBc)	f_l (MHz)	f_h (MHz)	Δf (MHz)	Limit
-26	1924.275654	1925.708346	1.433	50kHz > Δf > 2.5MHz
-12	1924.405462	1925.583346	1.177	N/A
-6	1924.592962	1925.429500	0.836	N/A

$f_x = 1928.448 \text{ MHz}$				
ΔP (dBc)	f_l (MHz)	f_h (MHz)	Δf (MHz)	Limit
-26	1927.727244	1929.181090	1.453	50kHz > Δf > 2.5MHz
-12	1927.857051	1929.039346	1.182	N/A
-6	1928.058974	1928.847038	0.788	N/A

Long Slot Configuration

$f_x = 1921.536$ MHz				
ΔP (dBc)	f_l (MHz)	f_h (MHz)	Δf (MHz)	Limit
-26	1920.824462	1922.261962	1.437	50kHz > Δf > 2.5MHz
-12	1920.949462	1922.127346	1.177	N/A
-6	1921.136962	1921.980231	0.843	N/A

$f_x = 1924.992$ MHz				
ΔP (dBc)	f_l (MHz)	f_h (MHz)	Δf (MHz)	Limit
-26	1924.280462	1925.703538	1.423	50kHz > Δf > 2.5MHz
-12	1924.410269	1925.583346	1.173	N/A
-6	1924.578538	1925.400654	0.822	N/A

$f_x = 1928.448$ MHz				
ΔP (dBc)	f_l (MHz)	f_h (MHz)	Δf (MHz)	Limit
-26	1927.773377	1929.164346	1.430	50kHz > Δf > 2.5MHz
-12	1927.863385	1929.039346	1.175	N/A
-6	1928.065308	1928.871077	0.805	N/A

- Notes:
- 1 See emission bandwidth plots in Annex D.
 - 2 Emission bandwidth rounded up.
 - 3 Highest emission bandwidth used for calculation of thresholds. and output power limit.

PEAK TRANSMIT POWER

The peak transmit power is measured in accordance with ANSI C63.17 sub-clause 6.1.2 using test setup 1 (page 9).

The limit for Peak Transmit Power (PTP) is calculated using the following formula:

$$PTP = 5 \text{ Log}_{10} \text{ EBW} - 10 \text{ dBm}$$

This limit must be corrected to take into account any gain of the antenna greater than 3dBi.
Where: EBW is the transmitter emission bandwidth in Hz as determined in the previous test.

Limit

$$\text{EBW} = 1.453 \text{ MHz}$$
$$\text{PTP} = 5 \text{ Log}_{10} 1.453\text{MHz} - 10 \text{ dBm}$$
$$\text{PTP} = 20.81 \text{ dBm}$$

Single Slot Results

Frequency (MHz)	Peak Transmit Power (dBm)	Limit (dBm)
1921.536	19.53	20.81
1924.992	19.55	20.81
1928.448	19.42	20.81

- Note:
1. Permanent antenna was replaced with temporary antenna connector to enable conducted measurement.
 2. Antenna gain < 3dBi and so correction of the limit is not required.
 3. See Annex E for Peak Transmit Power Plots.

Long Slot Results

Frequency (MHz)	Peak Transmit Power (dBm)	Limit (dBm)
1921.536	19.51	20.81
1924.992	19.52	20.81
1928.448	19.36	20.81

- Note:
1. Permanent antenna was replaced with temporary antenna connector to enable conducted measurement.
 2. Antenna gain < 3dBi and so correction of the limit is not required.
 3. See Annex E for Peak Transmit Power Plots.

POWER SPECTRAL DENSITY

The power spectral density is measured using test setup 1, (page 9).

Limit

The power spectral density shall not exceed 3mW in any 3 kHz bandwidth as measured with a spectrum analyser having a resolution bandwidth of 3 kHz.

Single Slot Results

Frequency (MHz)	Power Spectral Density (mW/3kHz)	Limit (mW/3kHz)
1921.536	0.39	3
1924.992	0.35	3
1928.448	0.32	3

Note: 1. See Annex F for Power Spectral Density Plots.

Long Slot Results

Frequency (MHz)	Power Spectral Density (mW/3kHz)	Limit (mW/3kHz)
1921.536	0.33	3
1924.992	0.30	3
1928.448	0.27	3

Note: 1. See Annex F for Power Spectral Density Plots.

ANTENNA GAIN

Any directional gain of the antenna exceeding 3dBi has an effect on the limit applied to the measurements taken for the peak transmit power test. If the directional gain of the antenna is less than 3dBi it is not required to be taken into account.

Frequency (MHz)	Conducted Peak Transmit Power (dBm)	Radiated Peak Transmit Power (dBm)	Antenna Gain (dBi)
1921.536	19.53	18.90	-0.63
1924.992	19.55	19.00	-0.55
1928.448	19.42	19.10	-0.32

Maximum Antenna Gain	Exceeds 3dBi by
<3dBi	N/A

AUTOMATIC DISCONTINUATION OF TRANSMISSION

Automatic discontinuation of transmission means break off of transmissions that are not control and signalling information.

This test is monitored using the test setup 1 (page 9) as per transmitter emission bandwidth and an active channel.

The TEOS HS 20 is a Portable part and as such does not transmit control and signalling information the counter part device is a fixed part device and does transmit control and signalling information.

Part	Transmits Control and Signaling Information	Equipment Under Test
Fixed Part	X	
Portable Part		X

Results

The following tests were performed after a connection had been established with the counter part device

Number	Test	Reaction of EUT	Pass / Fail
1	Power removed from EUT	C	Pass
2	EUT Powered Down	C	Pass
3	Power Removed From Companion Device	A	Pass
4	EUT Mounted on Companion device	C	Pass

A – Connection breakdown, Cease of all transmissions.

B – Connection breakdown, EUT transmits control and signalling information.

C – Connection breakdown, Counterpart transmits control and signalling information.

RADIO FREQUENCY RADIATION EXPOSURE

This information is contained in a separate document

MONITORING THRESHOLDS

The monitoring threshold calculations are carried out in accordance with ANSI C63.17 sub-clause 7.2.1 using the calculations laid out in ANSI C63.17 sub-clauses 4.3.3 and 4.3.4

Calculation of monitoring threshold limits for isochronous devices:

$$\text{Lower threshold: } T_L = -174 + 10\log_{10}B + M_U + P_{MAX} - P_{EUT} \text{ (dBm)}$$

$$\text{Upper threshold: } T_U = -174 + 10\log_{10}B + M_U + P_{MAX} - P_{EUT} \text{ (dBm)}$$

Where:

B = Emission bandwidth (Hz)

M_U = dBs the threshold may exceed thermal noise (30 for T_L & 50 for T_U)

P_{MAX} = Output Power Limit (dBm)


P_{EUT} = Transmitted power (dBm)

Monitor Threshold	B (MHz)	M_U (dB)	P_{MAX} (dBm)	P_{EUT} (dBm)	Threshold (dBm)
T_L	1.453	30	20.81	19.55	-81.0
T_U	1.453	50	20.81	19.55	-61.0

Note: 1. Threshold levels rounded up/down to nearest whole number

The monitoring threshold tests are carried out in accordance with ANSI C63.17 sub-clause 7.3 using the test setup 2. The lower threshold level was determined following the procedure as laid out in ANSI C63.17 sub-clause 7.3.2 (a) Frequency administration was used to allow operation on the carrier closest to the centre of the band.

Test Setup 2:

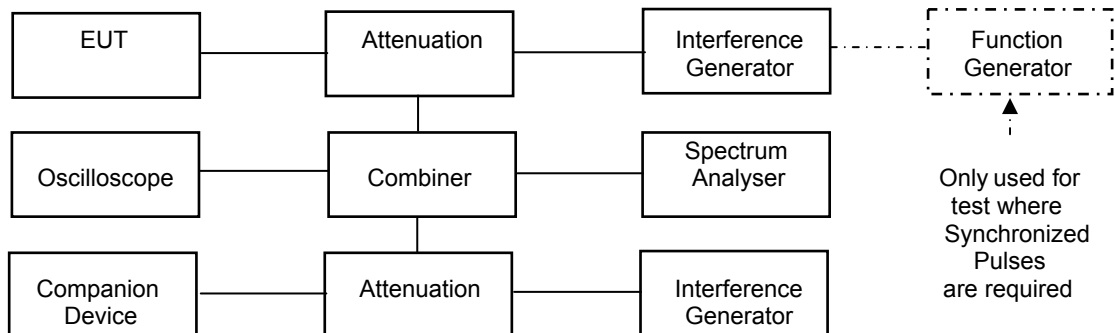

Limits

The EUT must not transmit until the interference level is less than or equal to:

$$\text{Single Slot Configuration - Measured Threshold Level} \leq T_U + U_M$$

$$\text{Long Slot Configuration - Measured Threshold Level} \leq T_L + U_M$$

Where:

T_U = Calculated Upper threshold level

T_L = Calculated Lower threshold level

U_M = Margin of uncertainty in threshold measurements (6dB)

Results

Monitor threshold	Measured Threshold Level	Limit	Pass/Fail
Lower Threshold (dBm)	-82 dBm	-75.0 dBm	Pass
Upper threshold (dBm)	-62 dBm	-55.0 dBm	Pass

MONITORING OF INTENDED TRANSMIT WINDOW AND MAXIMUM REACTION

The monitoring of intended transmit window was carried out in accordance with ANSI C63.17 sub-clause 7.5 using test setup 2 (page 12).

The EUT was frequency administered to only one operating frequency channel and only one of the interference generators in the test setup was utilized. The interference generator was fed pulses from the function generator to produce a pulsed carrier of the specified time length and the output of the interference generator was set to the required level. The pulse generator and companion device were synchronized so the position of the pulses corresponded to the time-slot pattern in the frame of the EUT. The test is performed with the unit frequency administered to operate only on bottom, middle or top frequency.

For each of the required tests the pulse width and interference level are as below:

Test c)

With the interference generator output set at the relevant calculated threshold level plus measurement uncertainty (U_M) and the width of the pulse interference exceeds the largest of $50\mu\text{s}$ and $50\sqrt{1.25/B}$ μs verify that the EUT does not establish a connection.

Test d)

With the interference generator output set at 6dB above the relevant calculated threshold level plus measurement uncertainty (U_M) and the width of the pulse interference exceeds the largest of $35\mu\text{s}$ and $35\sqrt{1.25/B}$ μs verify that the EUT does not establish a connection.

Where B = Emission bandwidth of the EUT in MHz

Results

Single Slot Configuration

Test Equation (μs)	Pulse Width (μs)	Interferer Level (dBm)	Connection Made	Pass/Fail
$50\sqrt{1.25/B}$	50	$T_U + U_m$	No	Pass
$35\sqrt{1.25/B}$	35	$T_U + U_m + 6$	No	Pass

- Notes:
- T_U is the calculated upper threshold.
 - U_M is Margin of uncertainty in threshold measurements (6dB).

Long Slot Configuration

Test Equation (μs)	Pulse Width (μs)	Interferer Level (dBm)	Connection Made	Pass/Fail
$50\sqrt{1.25/B}$	50	$T_L + U_m$	No	Pass
$35\sqrt{1.25/B}$	35	$T_L + U_m + 6$	No	Pass

- Notes:
- T_L is the calculated lower threshold.
 - U_M is Margin of uncertainty in threshold measurements (6dB).

MONITORING BANDWIDTH

The monitoring bandwidth test was carried out in accordance with ANSI C63.17 sub-clause 7.4.

ANSI C63.17 sub-clause 7.4 states that if the monitoring is made through the radio receiver used by the EUT for communication the intended bandwidth requirements for the monitoring system are met.

As declared by the manufacturer the EUT uses the radio receiver used for communication for monitoring therefore the intended bandwidth requirements for the monitoring system are met of ANSI C63.17 sub-clause 7.4 are met.

DURATION OF TRANSMISSION

The duration of transmission test was carried out in accordance with ANSI C63.17 sub-clause 8.2.2 using test setup 2.(page 12) (No interference generators were active during this test).

The time/spectrum window occupied by the connection was monitored using a spectrum analyzer for the spectrum window and an oscilloscope for the time slot. The connection was monitored over a period of time during which the access criteria was repeated several times.

Result

Repetition of Access Criteria	Maximum Transmission Time	Maximum Transmission Time Limit	Pass/Fail
Period	<3.25 Hours	<8 Hours	Pass

Notes: 1. The portable part is the initiating device that repeats the access criteria.

CONNECTION ACKNOWLEDGEMENT

The connection acknowledgement test was carried out in accordance with ANSI C63.17 sub-clause 8.2.1 using test setup 2. (Page 12)(No interference generators were active during this test).

The test was carried out in two parts. The first was to verify that with the companion device off the EUT does not transmit on the same time/spectrum window for more than the limit. The second was to verify that after a connection is broken the EUT terminates its transmission on the current communication channel within 30 seconds or less.

Result

Test	Time Taken (seconds)		Limit (seconds)	Pass/Fail
	Single Slot	Long Slot		
Transmission on communications channel no acknowledgement received (note 1)	0.452	0.452	1	Pass
Established communication channel termination, acknowledgements blocked during communication (note 1)	5.050	5.050	30	Pass

Note: 1. The companion device transmits a beacon signal when acknowledgements are blocked.
 2. The EUT does not transmit a control channel.
 3. See Annex G for Acknowledgement plots.

UPPER THRESHOLD SELECTED CHANNEL, POWER ACCURACY, SEGMENT OCCUPANCY

Least interfered Channel

The EUT utilizes more than 40 channels in single slot configuration; therefore the least interfered channel testing is applicable in this configuration. This test was carried out in accordance with ANSI C63.17 sub-clause 7.3.3 using test setup 2 (page 12).

The EUT was frequency administered to operating on two frequencies only, f1 and f2.

f1 = 1924.992 MHz
f2 = 1926.720 MHz

Test b)

Interference on f1 was set at $T_L + U_M + 7\text{dB}$ and at $T_L + U_M$ on f2. Initiate communication. The EUT should transmit on f2. Repeat 5 times. If the EUT transmits on f1 the test is failed.

Test c)

Interference on f1 was set at $T_L + U_M$ and at $T_L + U_M + 7\text{dB}$ on f2. Initiate communication. The EUT should transmit on f1. Repeat 5 times. If the EUT transmits on f2 the test is failed.

Test d)

Interference on f1 was set at $T_L + U_M + 1\text{dB}$ and at $T_L + U_M - 6\text{dB}$ on f2. Initiate communication. The EUT should transmit on f2. Repeat 5 times. If the EUT transmits on f1 the test is failed.

Test e)

Interference on f1 was set at $T_L + U_M - 6\text{dB}$ and at $T_L + U_M + 7\text{dB}$ on f2. Initiate communication. The EUT should transmit on f1. Repeat 5 times. If the EUT transmits on f2 the test is failed.

Result

Test	Transmit on f1	Transmit on f2	Wanted Transmit Channel	Pass/Fail
b	No	Yes	f2	Pass
c	Yes	No	f1	Pass
d	No	Yes	f2	Pass
e	Yes	No	f1	Pass

Note: 1. All tests were repeated 5 times.

Selected Channel Confirmation

This test was carried out in accordance with ANSI C63.17 sub-clause 7.3.4 using test setup 2 (page 12). The test is to ensure the EUT monitors the time/spectrum window immediately prior to transmission.

The EUT was frequency administered to operating on two frequencies only, f1 and f2.

f1 = 1924.992 MHz
f2 = 1923.264 MHz

Test a)

Interference is applied on f1 at a level of $T_U + U_M$. Verify a connection is established on f2.

Any connection is terminated.

Test b)

Interference is applied on f2 at a level of $T_U + U_M$ and immediately removed from f1 and the EUT is immediately caused to attempt transmission. In this case the EUT should transmit on f1

The test is applied in both single and long slot configurations.

Result

Test	Transmit on f1	Transmit on f2	Wanted Transmit Channel	Pass/Fail
a	No	Yes	f2	Pass
b	Yes	No	f1	Pass

Note: 1. Results in the above table are applicable for both single and long slot configurations.

Power Accuracy

The power measurement resolution for the previous comparison must be accurate to within 6dB. The monitoring threshold test covered in Part 15.323 (c)(2) automatically proves that this requirement is met.

Segment Occupancy

This section is not applicable as no units will be located within 1 metre of each other.

MONITORING ANTENNA

The antenna of the EUT used for transmitting is the same antenna that is used for monitoring.

DUPLEX CONNECTIONS

The tests laid out in this section verify that two devices communicating over a duplex connection meet the access criteria. For the purposes of this testing the EUT is the initiating device and the companion is the responding device. These tests are carried out in accordance with ANSI C63.17 sub-clause 8.3.1 for long slot configuration and ANSI C63.17 sub-clause 8.3.2 for long slot configuration using test setup 2 (page 12)

Before all tests are carried out any connection is terminated.

Test carried out in accordance with ANSI C63.17 sub-clause 8.3.1 for long slot configuration.

Test b)

The system is restricted to operation on one frequency (1924.992 MHz) using administration. Verify that a connection between the EUT and its companion device can be made.

Test c) & d)

Apply interference at a level $T_L + U_M$ to all receive time slots except one which has interference at least 10dB below T_L . Apply interference at a level $T_L + U_M$ to all transmit time slots except one which has interference at least 10dB below T_L . The interference free receive timeslot should not be the duplex mate of the interference free transmit timeslot. The EUT should not establish a connection.

Test e) & f)

Apply interference at a level $T_L + U_M$ to all transmit time slots except one which has interference at least 10dB below T_L . Apply interference at a level $T_L + U_M$ to all receive time slots except one which has interference at least 10dB below T_L . The interference free receive timeslot should not be the duplex mate of the interference free transmit timeslot. The EUT should not establish a connection.

Result

Test	Connection Made	Time Slot Selected	Required Time Slot	Pass/Fail
b	Yes	N/A	Any	Pass
c & d	Yes	No Connection Established	No Connection to be established	Pass
e & f	Yes	No Connection Established	No Connection to be established	Pass

Test carried out in accordance with ANSI C63.17 sub-clause 8.3.2 for single slot configuration.

Test b)

The system is restricted to operation on one frequency (1924.992 MHz) using administration. Verify that a connection between the EUT and its companion device can be made.

Test c) & d)

Apply interference at a level $T_L + U_M$ to all transmit time slots except one which has interference at least 10dB below T_L . Apply interference at a level $T_L + U_M + 10\text{dB}$ to all receive time slots except one which has interference at least 10dB below T_L . The interference free receive timeslot should not be the duplex mate of the interference free transmit timeslot. The EUT should establish a connection on the interference free receive slot and its duplex mate.

Test e) & f)

Apply interference at a level $T_L + U_M$ to all receive time slots except one which has interference at least 10dB below T_L . Apply interference at a level $T_L + U_M + 10\text{dB}$ to all transmit time slots except one which has interference at least 10dB below T_L . The interference free transmit timeslot should not be the duplex mate of the interference free receive timeslot. The EUT should establish a connection on the interference free transmit slot and its duplex mate.

Test g)

Apply interference at a level $T_U + U_M$ to all receive and transmit time slots except one which has interference at least 10dB below T_L . The interference free transmit and receive time slots shall not constitute a duplex pair. The EUT should not transmit or establish a connection.

Result

Test	Connection Made	Time Slot Selected	Required Time Slot	Pass/Fail
b	Yes	N/A	Any	Pass
c & d	Yes	Interference Free Receive Slot and Duplex Mate	Interference Free Receive Slot and Duplex Mate	Pass
e & f	Yes	Interference Free Transmit Slot and Duplex Mate	Interference Free Transmit Slot and Duplex Mate	Pass
g	No	None	None	Pass

ALTERNATIVE MONITORING INTERVAL FOR CO-LOCATED DEVICES

This test is carried out in accordance with ANSI C63.17 sub-clause 8.4.

The manufacturer declares that this provision is not utilized by the EUT.

FAIR ACCESS TO SPECTRUM

The provisions of (10) & (11) shall not be used to extend the range of spectrum occupied over space or time for the purposes of denying fair access to the spectrum to other devices.

The manufacturer declares that this device does not work in a mode, which denies fair access to the spectrum to others.

(10) Relates to part 15.323(c)(10) and 4.3.4(b)(10)

(11) Relates to part 15.323(c)(11) and 4.3.4(b)(11)

EMISSIONS INSIDE AND OUTSIDE THE SUB-BAND – CONDUCTED

RF carrier set to the lowest carrier defined by the EUT – Single Slot Configuration.

These measurements are carried out in accordance with ANSI C63.17 sub-clause 6.1.6.

Out-of-Band Emissions from UPCS bandedge	FREQ. (MHz)	MEAS. Rx. (dBm)	CABLE & ATTEN. LOSS (dB)	EMISSION LEVEL (dBm)	LIMIT (dBm)
> - 2.5MHz	Not Applicable, note 9				
- 1.25 MHz – 2.5 MHz	1918.570	-70.45	21.0	-49.45	-29.5
- 1.25 MHz				Note 10	-9.5
+ 1.25 MHz				Note 10	-9.5
+ 1.25 MHz – 2.5 MHz				Note 10	-29.5
> + 2.5MHz	Not Applicable, note 9				
Limits	Out-of-Band Emissions From UPCS bandedge			Attenuation (dB) required below Reference power of 112mW	
	± 1.25MHz			30	
	±1.25 MHz – 2.5 MHz			50	
	> ±2.5MHz			60	
	In band Emissions from centre of emission bandwidth			Attenuation (dB) required below permitted peak power for the EUT	
	1B – 2B			30	
	2B – 3B			50	
	3B – UPCS band edge			60	

- Notes:**
- 1 EUT fitted with temporary antenna connector.
 - 2 New / Fully Charged batteries used for battery powered products.
 - 3 See Annex H for out of band emissions compliance plots, offsets <2.5 MHz
 - 4 See Annex I for in band emissions compliance plots.
 - 5 Resolution bandwidth approximately 1% of emissions bandwidth.
 - 6 Video bandwidth 3 x Resolution bandwidth.
 - 7 Receiver detector = Peak detector, Max Hold Enabled.
 - 8 Only emissions within 20 dB of the limit are recorded.
 - 9 EUT utilises integral antenna, manufacturer declares radiated emission at offset >2.5MHz

- Test Method:**
- 1 The EUT was connected to a spectrum analyser via suitable attenuation or filter.
 - 2 The Spectrum analyser was tuned to upper and lower offsets in turn.
 - 3 Any emissions found were measured with the required analyser settings.

EMISSIONS INSIDE AND OUTSIDE THE SUB-BAND – CONDUCTED

RF carrier set to the lowest carrier defined by the EUT – Long Slot Configuration.

These measurements are carried out in accordance with ANSI C63.17 sub-clause 6.1.6.

Out-of-Band Emissions from UPCS bandedge	FREQ. (MHz)	MEAS. Rx. (dBm)	CABLE & ATTEN. LOSS (dB)	EMISSION LEVEL (dBm)	LIMIT (dBm)
> - 2.5MHz	Not Applicable, note 9				
- 1.25 MHz – 2.5 MHz	1918.705	-70.34	21.0	-49.34	-29.5
- 1.25 MHz				Note 10	-9.5
+ 1.25 MHz				Note 10	-9.5
+ 1.25 MHz – 2.5 MHz				Note 10	-29.5
> + 2.5MHz	Not Applicable, note 9				
Limits	Out-of-Band Emissions From UPCS bandedge			Attenuation (dB) required below Reference power of 112mW	
	± 1.25MHz			30	
	±1.25 MHz – 2.5 MHz			50	
	> ±2.5MHz			60	
	In band Emissions from centre of emission bandwidth			Attenuation (dB) required below permitted peak power for the EUT	
	1B – 2B			30	
	2B – 3B			50	
	3B – UPCS band edge			60	

- Notes:**
- 1 EUT fitted with temporary antenna connector.
 - 2 New / Fully Charged batteries used for battery powered products.
 - 3 See Annex H for out of band emissions compliance plots, offsets <2.5 MHz
 - 4 See Annex I for in band emissions compliance plots.
 - 5 Resolution bandwidth approximately 1% of emissions bandwidth.
 - 6 Video bandwidth 3 x Resolution bandwidth.
 - 7 Receiver detector = Peak detector, Max Hold Enabled.
 - 8 Only emissions within 20 dB of the limit are recorded.
 - 9 EUT utilises integral antenna, manufacturer declares radiated emission at offset >2.5MHz

- Test Method:**
- 1 The EUT was connected to a spectrum analyser via suitable attenuation or filter.
 - 2 The Spectrum analyser was tuned to upper and lower offsets in turn.
 - 3 Any emissions found were measured with the required analyser settings.

EMISSIONS INSIDE AND OUTSIDE THE SUB-BAND – CONDUCTED

RF carrier set to the highest carrier defined by the EUT – Single Slot Configuration.

These measurements are carried out in accordance with ANSI C63.17 sub-clause 6.1.6.

Out-of-Band Emissions from UPCS bandedge	FREQ. (MHz)	MEAS. Rx. (dBm)	CABLE & ATTEN. LOSS (dB)	EMISSION LEVEL (dBm)	LIMIT (dBm)
> - 2.5MHz	Not Applicable, note 9				
- 1.25 MHz – 2.5 MHz				Note 10	-29.5
- 1.25 MHz				Note 10	-9.5
+ 1.25 MHz				Note 10	-9.5
+ 1.25 MHz – 2.5 MHz	1931.564	-69.35	21.0	-48.35	-29.5
> + 2.5MHz	Not Applicable, note 9				
Limits	Out-of-Band Emissions From UPCS bandedge			Attenuation (dB) required below Reference power of 112mW	
	± 1.25MHz			30	
	±1.25 MHz – 2.5 MHz			50	
	> ±2.5MHz			60	
	In band Emissions from centre of emission bandwidth			Attenuation (dB) required below permitted peak power for the EUT	
	1B – 2B			30	
	2B – 3B			50	
	3B – UPCS band edge			60	

- Notes:**
- 1 EUT fitted with temporary antenna connector.
 - 2 New / Fully Charged batteries used for battery powered products.
 - 3 See Annex H for out of band emissions compliance plots, offsets <2.5 MHz
 - 4 See Annex I for in band emissions compliance plots.
 - 5 Resolution bandwidth approximately 1% of emissions bandwidth.
 - 6 Video bandwidth 3 x Resolution bandwidth.
 - 7 Receiver detector = Peak detector, Max Hold Enabled.
 - 8 Only emissions within 20 dB of the limit are recorded.
 - 9 EUT utilises integral antenna, manufacturer declares radiated emission at offset >2.5MHz

- Test Method:**
- 1 The EUT was connected to a spectrum analyser via suitable attenuation or filter.
 - 2 The Spectrum analyser was tuned to upper and lower offsets in turn.
 - 3 Any emissions found were measured with the required analyser settings.

EMISSIONS INSIDE AND OUTSIDE THE SUB-BAND – CONDUCTED

RF carrier set to the highest carrier defined by the EUT – Long Slot Configuration.

These measurements are carried out in accordance with ANSI C63.17 sub-clause 6.1.6.

Out-of-Band Emissions from UPCS bandedge	FREQ. (MHz)	MEAS. Rx. (dBm)	CABLE & ATTEN. LOSS (dB)	EMISSION LEVEL (dBm)	LIMIT (dBm)
> - 2.5MHz	Not Applicable, note 9				
- 1.25 MHz – 2.5 MHz				Note 10	-29.5
- 1.25 MHz				Note 10	-9.5
+ 1.25 MHz				Note 10	-9.5
+ 1.25 MHz – 2.5 MHz	1931.423	-69.68	21.0	-48.68	-29.5
> + 2.5MHz	Not Applicable, note 9				
Limits	Out-of-Band Emissions From UPCS bandedge			Attenuation (dB) required below Reference power of 112mW	
	± 1.25MHz			30	
	±1.25 MHz – 2.5 MHz			50	
	> ±2.5MHz			60	
	In band Emissions from centre of emission bandwidth			Attenuation (dB) required below permitted peak power for the EUT	
	1B – 2B			30	
	2B – 3B			50	
	3B – UPCS band edge			60	

- Notes:**
- 1 EUT fitted with temporary antenna connector.
 - 2 New / Fully Charged batteries used for battery powered products.
 - 3 See Annex H for out of band emissions compliance plots, offsets <2.5 MHz
 - 4 See Annex I for in band emissions compliance plots.
 - 5 Resolution bandwidth approximately 1% of emissions bandwidth.
 - 6 Video bandwidth 3 x Resolution bandwidth.
 - 7 Receiver detector = Peak detector, Max Hold Enabled.
 - 8 Only emissions within 20 dB of the limit are recorded.
 - 9 EUT utilises integral antenna, manufacturer declares radiated emission at offset >2.5MHz

- Test Method:**
- 1 The EUT was connected to a spectrum analyser via suitable attenuation or filter.
 - 2 The Spectrum analyser was tuned to upper and lower offsets in turn.
 - 3 Any emissions found were measured with the required analyser settings.

EMISSIONS OUTSIDE THE SUB-BAND – RADIATED

RF carrier set to the lowest carrier defined by the EUT – Single Slot Configuration.

These measurements are carried out in accordance with ANSI C63.17 sub-clause 6.1.6

	FREQ. (MHz)	MEAS. Rx. (dBµV)	CABLE LOSS (dB)	ANT FACTOR	PRE AMP (dB)	EXTRAP FACTOR	FIELD STRENGTH (dBµV/m)	FIELD STRENGTH (µV/m)	LIMIT (µV/m)
1.705MHz - 30MHz								Note 11	30
30MHz - 88MHz								Note 11	100
88MHz - 216MHz								Note 11	150
216MHz - 960MHz								Note 11	200
960MHz - 1GHz								Note 11	500
1GHz - 25GHz	11527.394	35.30	4.7	39.7	35.3	9.54	34.86	55.33	500
	13453.690	38.16	4.1	40.7	35.5	9.54	37.92	78.70	500
	15370.690	34.12	7.4	38.8	36.7	9.54	34.08	50.58	500
	17296.937	33.17	5.8	42.1	35.5	9.54	36.03	63.31	500
Limits	1.705MHz to 30MHz			30µV/m @ 30m					
	30MHz to 88MHz			100µV/m @ 3m					
	88MHz to 216MHz			150µV/m @ 3m					
	216MHz to 960MHz			200µV/m @ 3m					
	960MHz to 1GHz			500µV/m @ 3m					
	1GHz to 25GHz			500µV/m @ 3m					

Notes:

- 1 Emissions were searched to: 20,000MHz inclusive, as per Part 15.33a.
- 2 Emission due to digital circuitry not directly associated with the radio transmitter, see page 31.
- 3 Measurements >1GHz @ 3m as per Part 15.31f(1).
- 4 Measurements >3GHz @ 1m as per Part 15.31f(1).
- 5 1m to 3m extrapolation 9.5 dB as per Part 15.31f
- 6 Receiver detector <1GHz = CISPR, Quasi-Peak, 120kHz bandwidth.
- 7 Receiver detector >1GHz = Average & Peak Detector, 1MHz RBW, 10MHz VBW.
- 8 New / Fully Charged batteries used for battery powered products.
- 9 Only Average emissions within 20 dB of the limit are recorded.
- 10 See Annex J for scan plots
- 11 Peak emissions are within 20 dB of the average limit.

Test Method:

- 1 As per Radio – Noise Emissions, ANSI C63.4: 2003.
- 2 Measuring distances as Notes 1 to 4 above.
- 3 EUT 0.8 metre above ground plane.
- 4 Emissions maximised by rotation of EUT, on an automatic turntable.
Raising and lowering the receiver antenna between 1m & 4m.
Horizontal and vertical polarisations, of the receive antenna.
EUT orientation in three orthogonal planes.
Maximum results recorded.

EMISSIONS OUTSIDE THE SUB-BAND – RADIATED

RF carrier set to the lowest carrier defined by the EUT – Long Slot Configuration.

These measurements are carried out in accordance with ANSI C63.17 sub-clause 6.1.6

	FREQ. (MHz)	MEAS. Rx. (dBµV)	CABLE LOSS (dB)	ANT FACTOR	PRE AMP (dB)	EXTRAP FACTOR	FIELD STRENGTH (dBµV/m)	FIELD STRENGTH (µV/m)	LIMIT (µV/m)
1.705MHz - 30MHz								Note 11	30
30MHz - 88MHz								Note 11	100
88MHz - 216MHz								Note 11	150
216MHz - 960MHz								Note 11	200
960MHz - 1GHz								Note 11	500
1GHz - 25GHz	7684.781	41.47	3.3	37.2	35.6	9.54	36.83	69.42	500
	11572.148	34.86	4.7	39.7	35.3	9.54	34.42	52.60	500
	13448.380	37.84	4.1	40.7	35.5	9.54	37.60	75.85	500
	15370.028	35.68	7.4	38.8	36.7	9.54	35.64	60.53	500
	17290.731	32.63	5.8	42.1	35.5	9.54	35.39	58.81	500
Limits	1.705MHz to 30MHz				30µV/m @ 30m				
	30MHz to 88MHz				100µV/m @ 3m				
	88MHz to 216MHz				150µV/m @ 3m				
	216MHz to 960MHz				200µV/m @ 3m				
	960MHz to 1GHz				500µV/m @ 3m				
	1GHz to 25GHz				500µV/m @ 3m				

Notes:

- 1 Emissions were searched to: 20,000MHz inclusive, as per Part 15.33a.
- 2 Emission due to digital circuitry not directly associated with the radio transmitter, see page 31.
- 3 Measurements >1GHz @ 3m as per Part 15.31f(1).
- 4 Measurements >3GHz @ 1m as per Part 15.31f(1).
- 5 1m to 3m extrapolation 9.5 dB as per Part 15.31f
- 6 Receiver detector <1GHz = CISPR, Quasi-Peak, 120kHz bandwidth.
- 7 Receiver detector >1GHz = Average & Peak Detector, 1MHz RBW, 10MHz VBW.
- 8 New / Fully Charged batteries used for battery powered products.
- 9 Only Average emissions within 20 dB of the limit are recorded.
- 10 See Annex J for scan plots
- 11 Peak emissions are within 20 dB of the average limit.

Test Method:

- 1 As per Radio – Noise Emissions, ANSI C63.4: 2003.
- 2 Measuring distances as Notes 1 to 4 above.
- 3 EUT 0.8 metre above ground plane.
- 4 Emissions maximised by rotation of EUT, on an automatic turntable.
Raising and lowering the receiver antenna between 1m & 4m.
Horizontal and vertical polarisations, of the receive antenna.
EUT orientation in three orthogonal planes.
Maximum results recorded.

EMISSIONS OUTSIDE THE SUB-BAND – RADIATED

RF carrier set to the highest carrier defined by the EUT – Single Slot Configuration.

These measurements are carried out in accordance with ANSI C63.17 sub-clause 6.1.6

	FREQ. (MHz)	MEAS. Rx. (dBµV)	CABLE LOSS (dB)	ANT FACTOR	PRE AMP (dB)	EXTRAP FACTOR	FIELD STRENGTH (dBµV/m)	FIELD STRENGTH (µV/m)	LIMIT (µV/m)	
1.705MHz - 30MHz								Note 11	30	
30MHz - 88MHz								Note 11	100	
88MHz - 216MHz								Note 11	150	
216MHz - 960MHz								Note 11	200	
960MHz - 1GHz								Note 11	500	
1GHz - 25GHz	13469.738 17358.986	37.25 33.95	4.1 5.8	40.7 44.8	35.5 35.9	9.54 9.54	37.01 39.11	70.87 90.26	500 500	
Limits	1.705MHz to 30MHz				30µV/m @ 30m					
	30MHz to 88MHz				100µV/m @ 3m					
	88MHz to 216MHz				150µV/m @ 3m					
	216MHz to 960MHz				200µV/m @ 3m					
	960MHz to 1GHz				500µV/m @ 3m					
	1GHz to 25GHz				500µV/m @ 3m					

Notes:

- 1 Emissions were searched to: 20,000MHz inclusive, as per Part 15.33a.
- 2 Emission due to digital circuitry not directly associated with the radio transmitter, see page 31.
- 3 Measurements >1GHz @ 3m as per Part 15.31f(1).
- 4 Measurements >3GHz @ 1m as per Part 15.31f(1).
- 5 1m to 3m extrapolation 9.5 dB as per Part 15.31f
- 6 Receiver detector <1GHz = CISPR, Quasi-Peak, 120kHz bandwidth.
- 7 Receiver detector >1GHz = Average & Peak Detector, 1MHz RBW, 10MHz VBW.
- 8 New / Fully Charged batteries used for battery powered products.
- 9 Only Average emissions within 20 dB of the limit are recorded.
- 10 See Annex J for scan plots
- 11 Peak emissions are within 20 dB of the average limit.

Test Method:

- 1 As per Radio – Noise Emissions, ANSI C63.4: 2003.
- 2 Measuring distances as Notes 1 to 4 above.
- 3 EUT 0.8 metre above ground plane.
- 4 Emissions maximised by rotation of EUT, on an automatic turntable.
Raising and lowering the receiver antenna between 1m & 4m.
Horizontal and vertical polarisations, of the receive antenna.
EUT orientation in three orthogonal planes.
Maximum results recorded.

EMISSIONS OUTSIDE THE SUB-BAND – RADIATED

RF carrier set to the highest carrier defined by the EUT – Long Slot Configuration.

These measurements are carried out in accordance with ANSI C63.17 sub-clause 6.1.6


	FREQ. (MHz)	MEAS. Rx. (dBμV)	CABLE LOSS (dB)	ANT FACTOR	PRE AMP (dB)	EXTRAP FACTOR	FIELD STRENGTH (dBμV/m)	FIELD STRENGTH (μV/m)	LIMIT (μV/m)	
1.705MHz - 30MHz								Note 11	30	
30MHz - 88MHz								Note 11	100	
88MHz - 216MHz								Note 11	150	
216MHz - 960MHz								Note 11	200	
960MHz - 1GHz								Note 11	500	
1GHz - 25GHz	7712.774	38.98	3.3	37.2	35.6	9.54	34.34	52.12	500	
	13496.547	34.85	4.1	40.7	35.5	9.54	34.61	53.76	500	
	17535.147	33.14	5.8	44.8	35.9	9.54	38.30	82.22	500	
Limits	1.705MHz to 30MHz				30μV/m @ 30m					
	30MHz to 88MHz				100μV/m @ 3m					
	88MHz to 216MHz				150μV/m @ 3m					
	216MHz to 960MHz				200μV/m @ 3m					
	960MHz to 1GHz				500μV/m @ 3m					
	1GHz to 25GHz				500μV/m @ 3m					

- 2 Emission due to digital circuitry not directly associated with the radio transmitter, see page 31.
- 3 Measurements >1GHz @ 3m as per Part 15.31f(1).
- 4 Measurements >3GHz @ 1m as per Part 15.31f(1).
- 5 1m to 3m extrapolation 9.5 dB as per Part 15.31f
- 6 Receiver detector <1GHz = CISPR, Quasi-Peak, 120kHz bandwidth.
- 7 Receiver detector >1GHz = Average & Peak Detector, 1MHz RBW, 10MHz VBW.
- 8 New / Fully Charged batteries used for battery powered products.
- 9 Only Average emissions within 20 dB of the limit are recorded.
- 10 See Annex J for scan plots
- 11 Peak emissions are within 20 dB of the average limit.

- Test Method:**
- 1 As per Radio – Noise Emissions, ANSI C63.4: 2003.
 - 2 Measuring distances as Notes 1 to 4 above.
 - 3 EUT 0.8 metre above ground plane.
 - 4 Emissions maximised by rotation of EUT, on an automatic turntable.
Raising and lowering the receiver antenna between 1m & 4m.
Horizontal and vertical polarisations, of the receive antenna.
EUT orientation in three orthogonal planes.
Maximum results recorded.

FRAME PERIOD

Frame repetition stability is tested according with ANSI C63.17 sub-clause 6.2.2. Frame period and jitter are tested in accordance with ANSI C63.17 sub-clause 6.2.3. The test setup below is used for the above measurements.



Test Setup 3:

Frame Repetition Stability

This is the mean value of the frame repetition rate recorded over 1000 samples. For devices that divide access in time the repetition rate shall not exceed 10ppm.

Result

Frame Repetition Stability (ppm)	Limit (ppm)	Pass/Fail
0.09 ppm	10ppm	Pass

Frame Period and Jitter

Jitter is the difference in time between the rising edges of consecutive pulses.

Result

Maximum Jitter (µs)	3xSD Jitter (µs)	Frame period (ms)	Limit (µs)		Pass/Fail
			Frame Period (ms)	Jitter (µs)	
0.87	2.61	10.00261	2 or 10/X	12.5	Pass

Notes: 1. See Annex K for frame period plot.

FREQUENCY STABILITY

The frequency stability is tests are carried out according with ANSI C63.17 sub-clause 6.2.1 using test setup number 3(page 23). This testing is carried out with the following conditions over 5000 samples.

Results

Temperature (°C)	Voltage (Vdc)	Fc (MHz)	offset (kHz)	offset (ppm)	Limit (ppm)
+20	Vnom	1924.992	-3.0kHz	-1.55	±10ppm
-20	Vnom	1924.992	0kHz	0	±10ppm
+55	Vnom	1924.992	+1.0kHz	0.52	±10ppm

- Note:
1. The EUT is battery powered therefore voltage variations are not required.
 2. Frequency variation at Tnom relative to EUT operating Frequency.
 3. Frequency variation at Temperature extremes relative to frequency at Tnom.

UNINTENTIONAL RADIATED EMISSIONS

These measurements are carried out in accordance with ANSI C63.17 sub-clause 6.1.6

	FREQ. (MHz)	MEAS. Rx. (dBµV)	CABLE LOSS (dB)	PRE AMP (dB)	ANT FACTOR	FIELD STRENGTH (dBµV/m)	FIELD STRENGTH (µV/m)	LIMIT (µV/m)
	1.705MHz - 30MHz						Note 9	30
	30MHz - 88MHz						Note 9	100
	88MHz - 216MHz						Note 9	150
	216MHz - 960MHz						Note 9	200
	960MHz - 1GHz						Note 9	500
	1GHz - 20GHz						Note 9	500
Limits	1.705MHz to 30MHz			30µV/m @ 30m				
	30MHz to 88MHz			100µV/m @ 3m				
	88MHz to 216MHz			150µV/m @ 3m				
	216MHz to 960MHz			200µV/m @ 3m				
	960MHz to 1GHz			500µV/m @ 3m				
	1GHz to 20GHz			500µV/m @ 3m				

- Notes:**
- 1 Emissions were searched to: 2000MHz inclusive, as per Part 15.33a.
 - 2 Measurements <3GHz @ 3m as per Part 15.31f(1).
 - 3 Measurements >3GHz @ 1m as per Part 15.31f(1).
 - 4 1m to 3m extrapolation 9.5 dB as per Part 15.31f
 - 5 Receiver detector <1GHz = CISPR, Quasi-Peak, 120kHz bandwidth.
 - 6 Receiver detector >1GHz = Average & Peak Detector, 1MHz RBW, 10MHz VBW.
 - 7 New / Fully Charged batteries used for battery powered products.
 - 8 Peak emissions are within 20 dB of the average limit.
 - 9 Only average emissions within 20 dB of the limit are recorded.

- Test Method:**
- 1 As per Radio – Noise Emissions, ANSI C63.4: 2003.
 - 2 Measuring distances as Notes 1 to 4 above.
 - 3 EUT 0.8 metre above ground plane.
 - 4 Emissions maximised by rotation of EUT, on an automatic turntable.
Raising and lowering the receiver antenna between 1m & 4m.
Horizontal and vertical polarisations, of the receive antenna.
EUT orientation in three orthogonal planes.
Maximum results recorded.

ANNEX A
PHOTOGRAPHS








ANNEX B
APPLICANT'S SUBMISSION OF DOCUMENTATION LIST

APPLICANT'S SUBMISSION OF DOCUMENTATION LIST


a.	TCB	-	APPLICATION	[X]
		-	FEE	[X]
b.	AGENT'S LETTER OF AUTHORISATION	-		[X]
c.	MODEL(s) vs IDENTITY	-		[]
d.	ALTERNATIVE TRADE NAME DECLARATION(s)	-		[]
e.	LABELLING	-	PHOTOGRAPHS	[]
		-	DECLARATION	[]
		-	DRAWINGS	[X]
f.	TECHNICAL DESCRIPTION	-		[X]
g.	BLOCK DIAGRAMS	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
h.	CIRCUIT DIAGRAMS	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
i.	COMPONENT LOCATION	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
j.	PCB TRACK LAYOUT	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
k.	BILL OF MATERIALS	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
l.	USER INSTALLATION / OPERATING INSTRUCTIONS	-		[X]

ANNEX C
EMISSION BANDWIDTH


Single Slot Operation

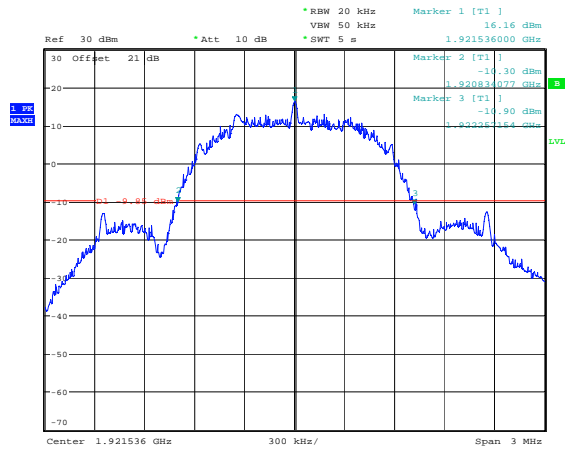

Date: 3.SEP.2009 09:08:39

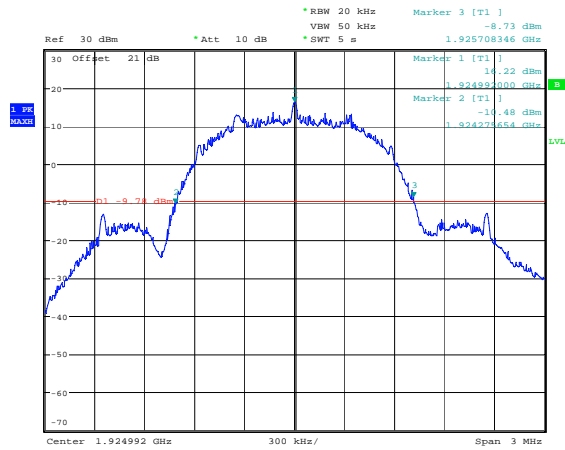


Date: 3.SEP.2009 08:43:08

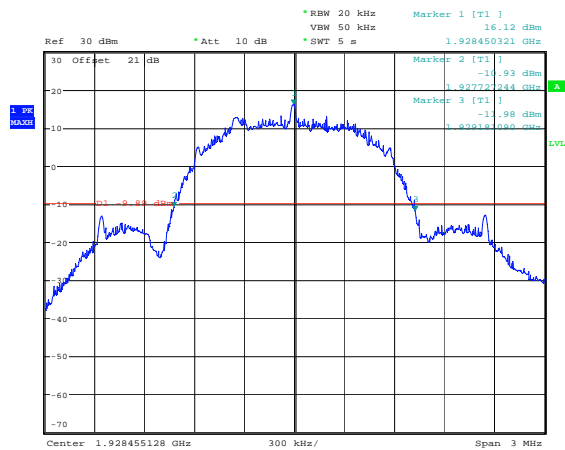


Date: 2.SEP.2009 16:17:24


Long Slot Operation

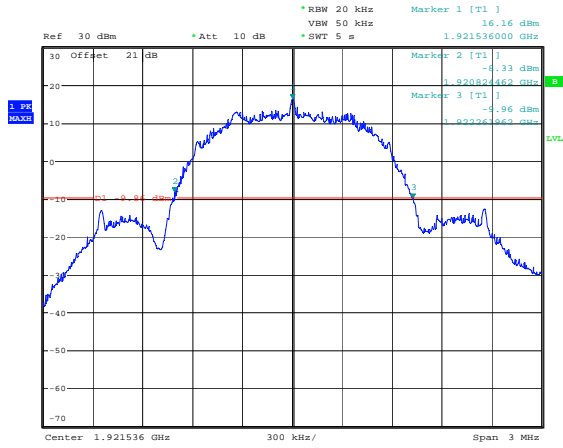

Date: 3.SEP.2009 08:59:09

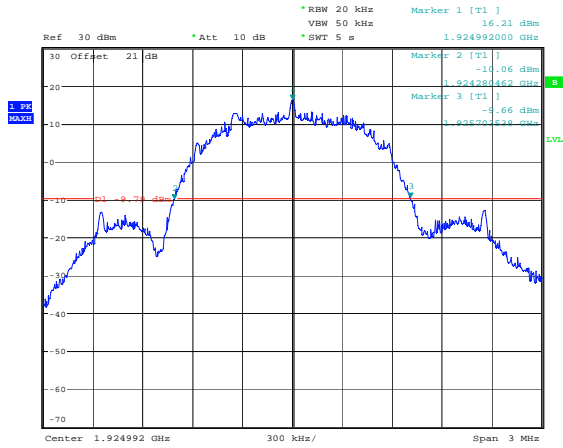


Date: 3.SEP.2009 08:50:56

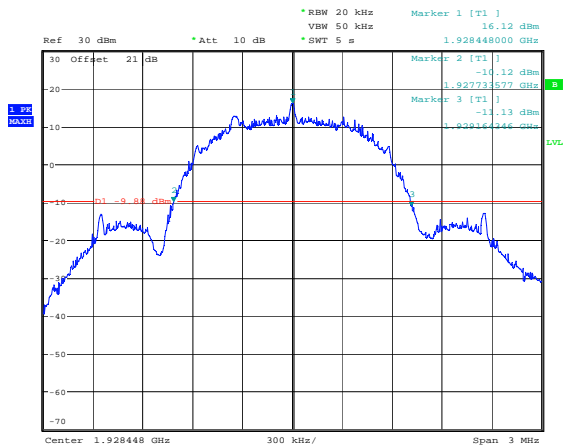


Date: 2.SEP.2009 16:33:02

ANNEX E
PEAK TRANSMIT POWER


Single Slot Operation

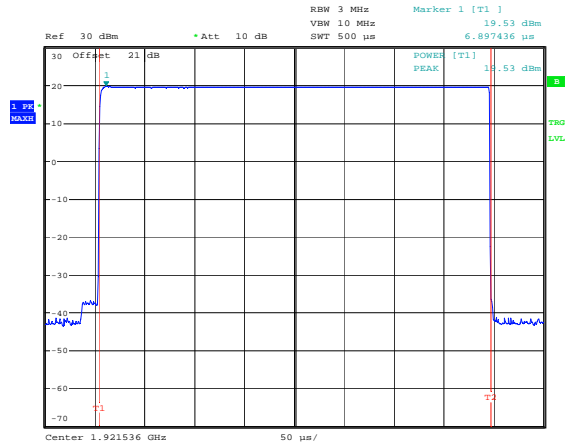

Date: 3.SEP.2009 09:06:57

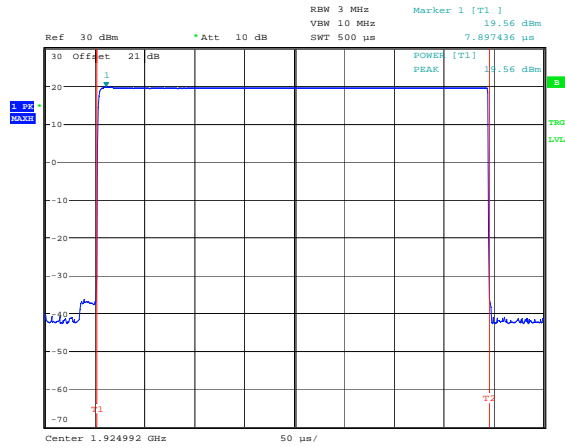


Date: 3.SEP.2009 08:39:53

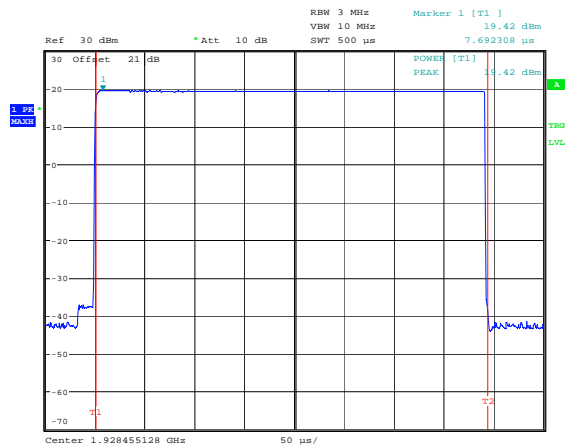


Date: 2.SEP.2009 16:10:16


Long Slot Operation

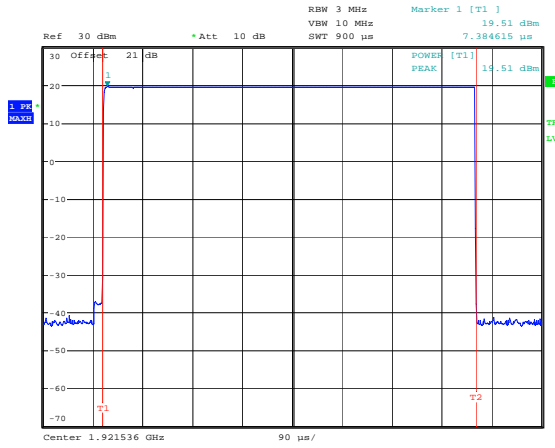

Date: 3.SEP.2009 09:03:32

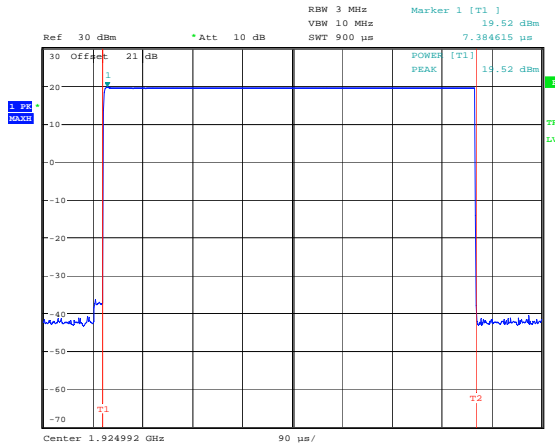


Date: 3.SEP.2009 08:49:22

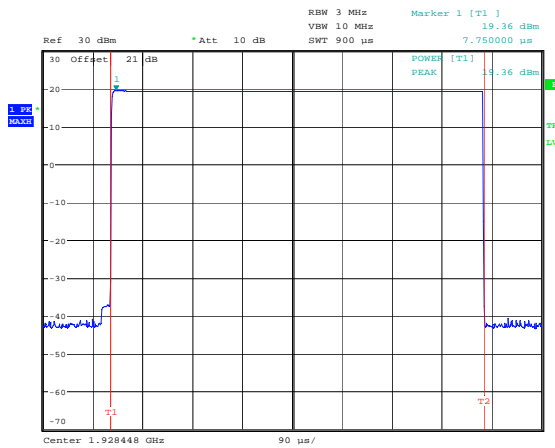


Date: 2.SEP.2009 16:45:48

ANNEX F
POWER SPECTRAL DENSITY


Single Slot Operation

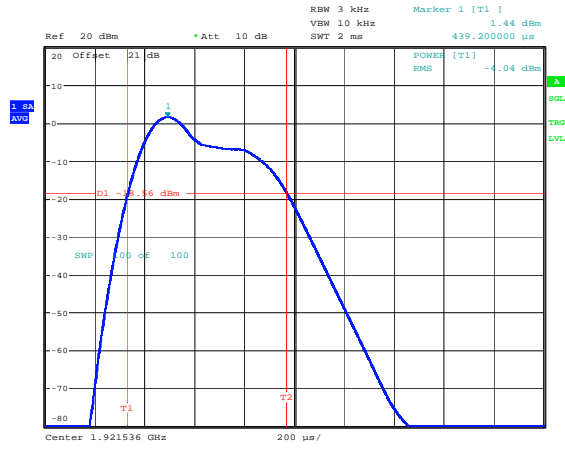

Date: 3.SEP.2009 09:11:41

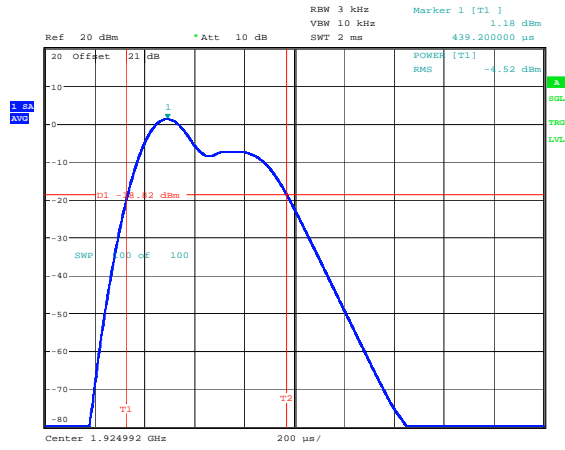


Date: 3.SEP.2009 08:46:39

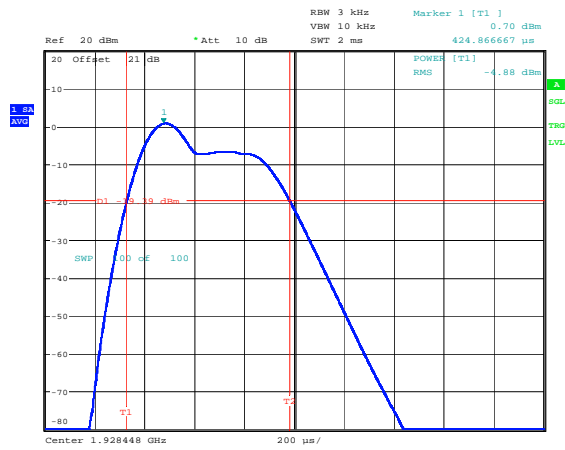


Date: 2.SEP.2009 16:48:10


Long Slot Operation

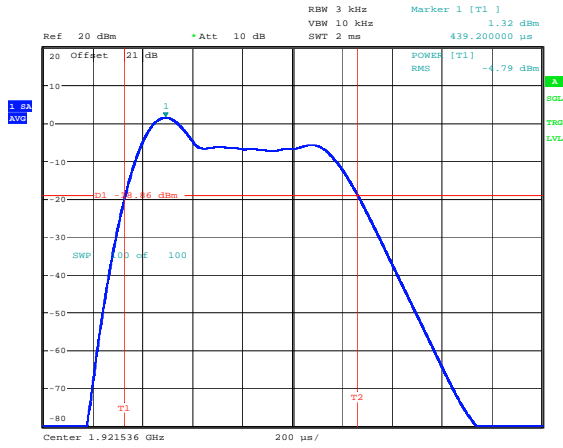

Date: 3.SEP.2009 09:13:09

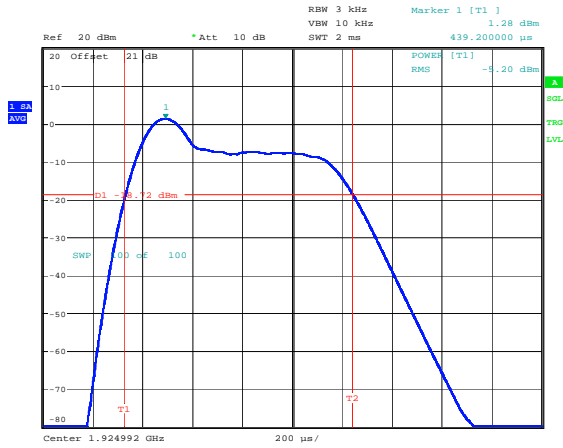


Date: 3.SEP.2009 08:54:24

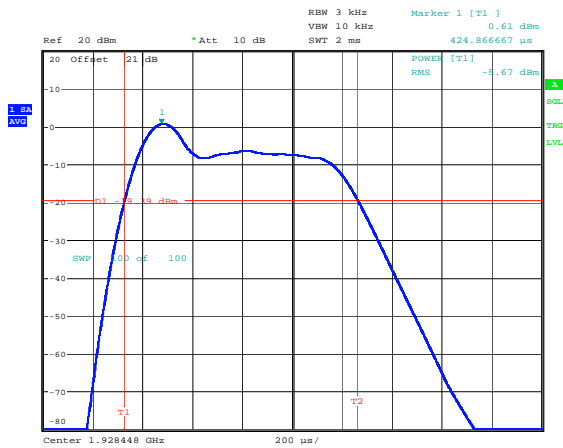

Date: 2.SEP.2009 16:44:30


ANNEX G
ACKNOWLEDGEMENTS

Transmissions on Communications Channel Initial Acknowledgement Not Received

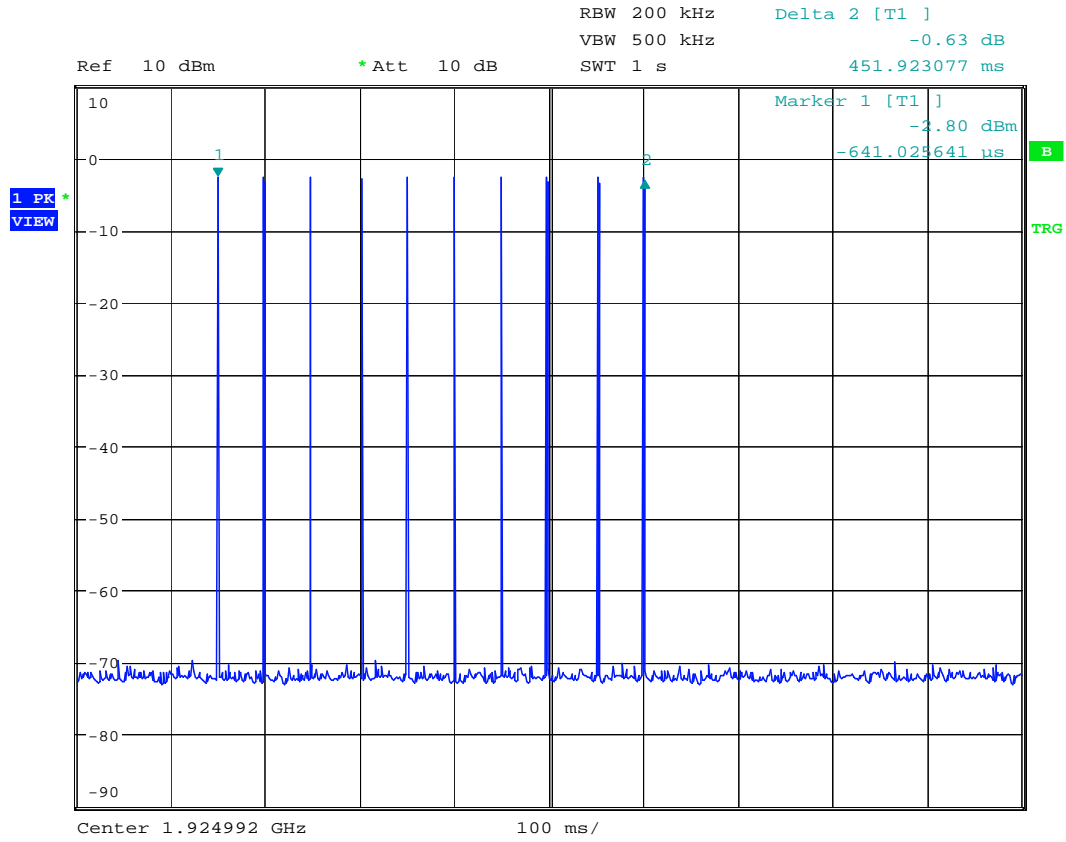

Date: 4.SEP.2009 15:12:44

Cease Of Transmissions on Communications Channel Acknowledgements Blocked

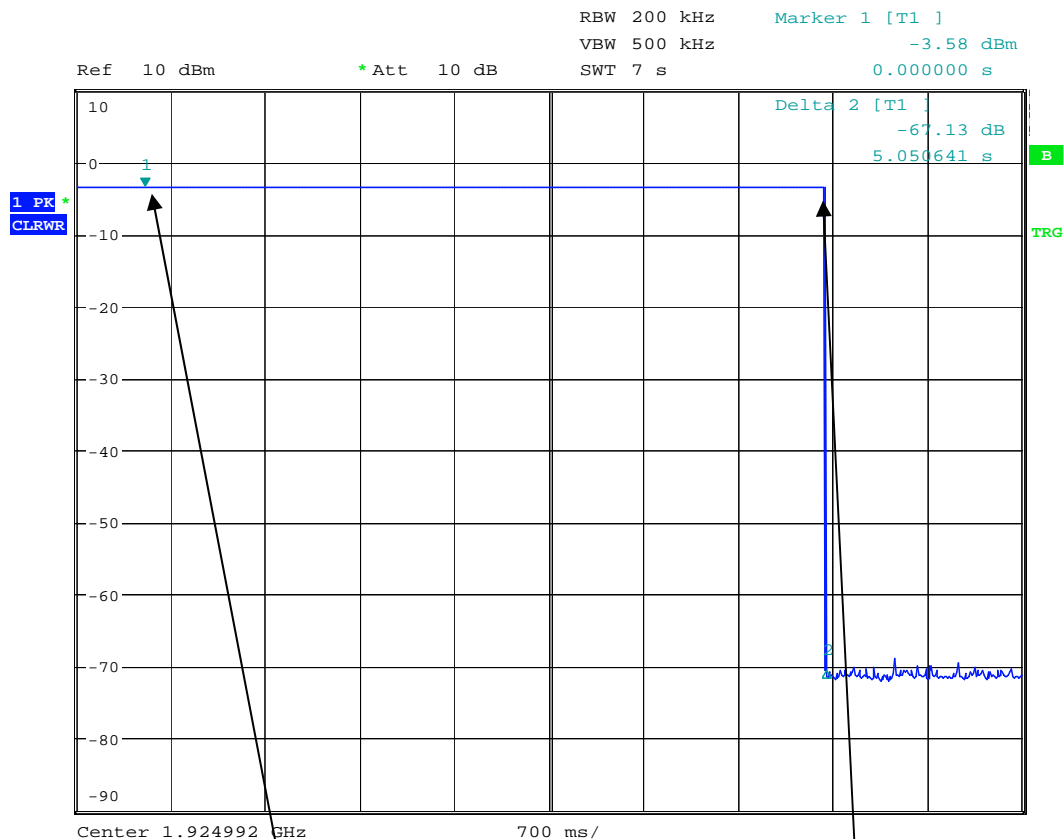


Date: 7.SEP.2009 10:02:32

**Acknowledgements
Blocked**

**Termination of
Communications
Channel**


ANNEX H
EMISSIONS OUTSIDE THE SUB-BAND

RF carrier set to the lowest carrier defined by the EUT – Single Slot Operation

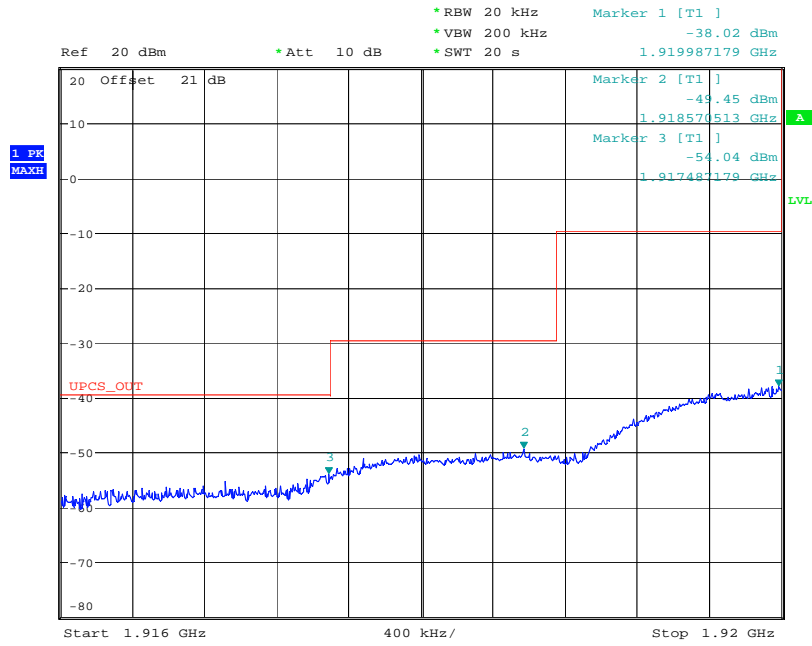

Date: 2.SEP.2009 13:11:18


Lower bandedge - > 2.5MHz

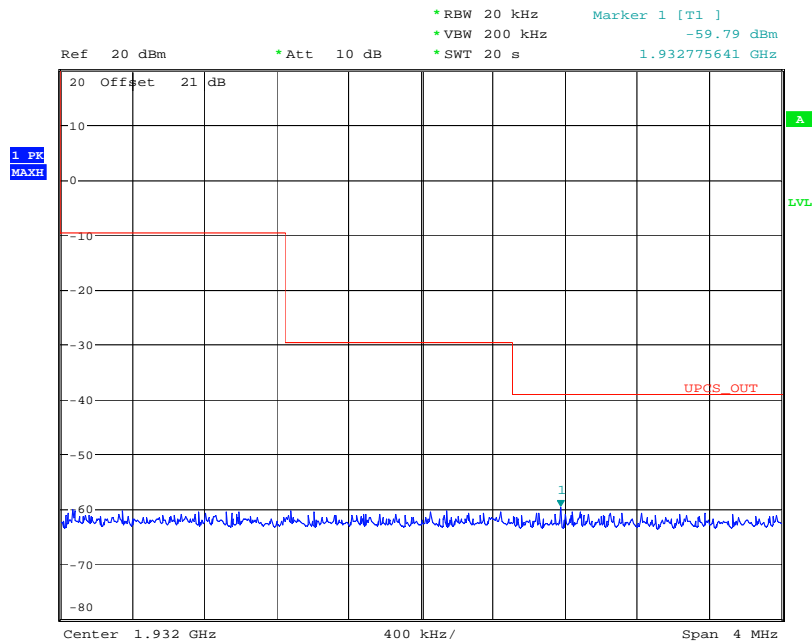

Date: 2.SEP.2009 13:12:13


Upper bandedge - > 2.5MHz

RF carrier set to the lowest carrier defined by the EUT – Long Slot Operation

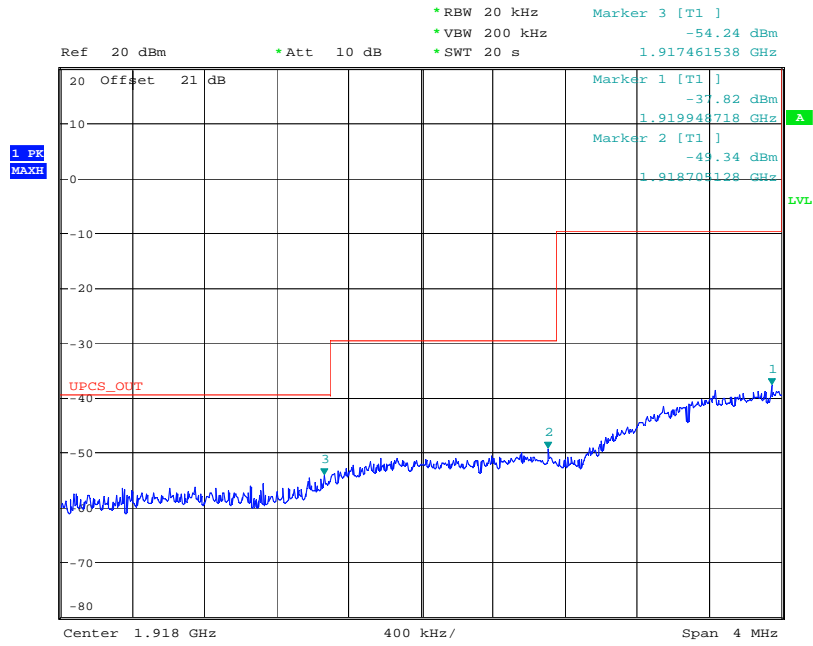

Date: 2.SEP.2009 14:12:52


Lower bandedge - > 2.5MHz

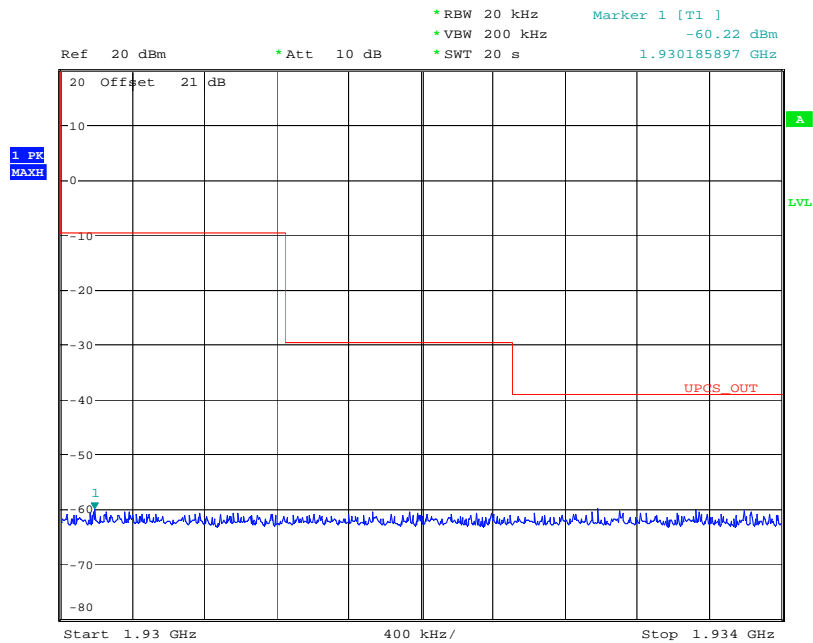

Date: 2.SEP.2009 14:10:49


Upper bandedge - > 2.5MHz

RF carrier set to the highest carrier defined by the EUT- Single Slot Operation

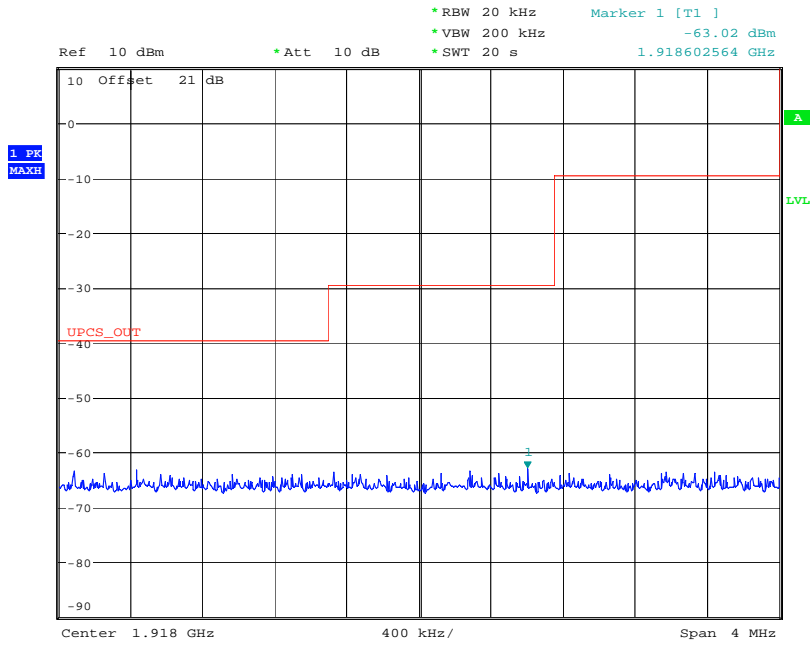

Date: 2.SEP.2009 16:03:55


Lower bandedge - > 2.5MHz

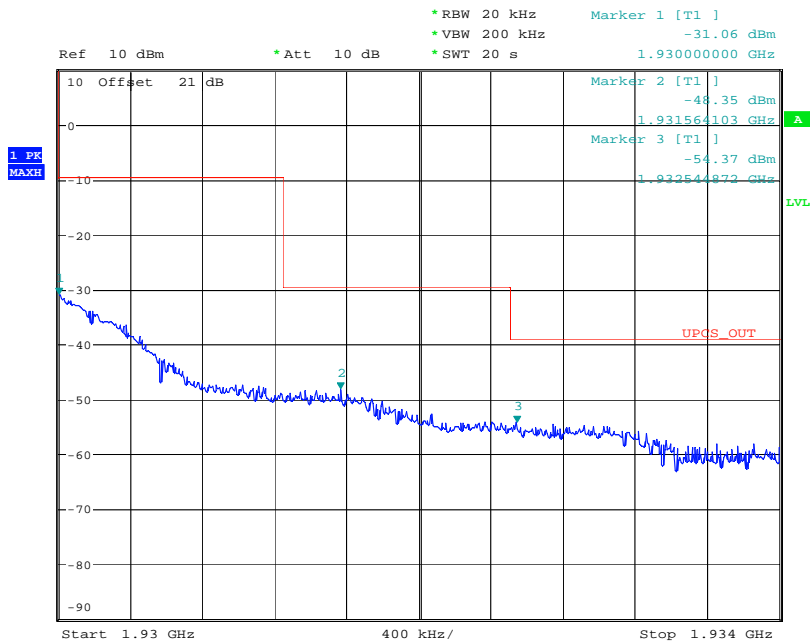

Date: 2.SEP.2009 16:02:38


Upper bandedge - > 2.5MHz

RF carrier set to the highest carrier defined by the EUT- Long Slot Operation

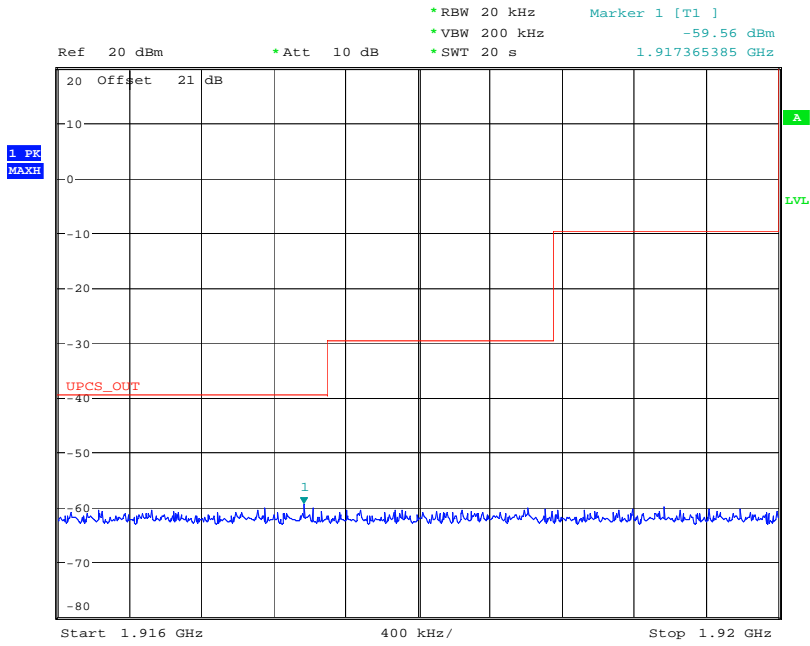

Date: 2.SEP.2009 14:35:29

Lower bandedge - > 2.5MHz

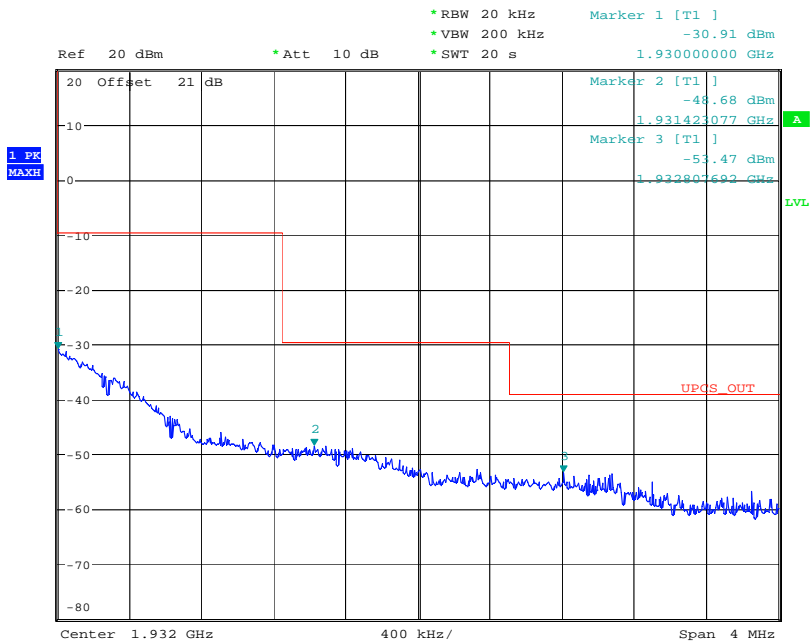


Date: 2.SEP.2009 14:37:11

Upper bandedge - > 2.5MHz

ANNEX I
EMISSIONS INSIDE THE SUB-BAND – CONDUCTED


RF carrier set to the lowest carrier defined by the EUT

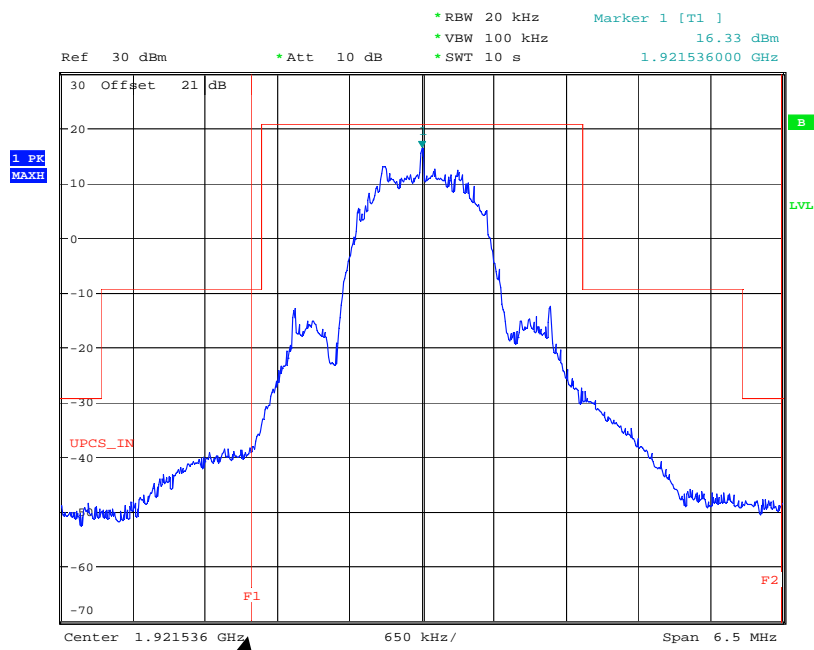

Date: 3.SEP.2009 10:45:06

Bandedge

Single Slot Operation

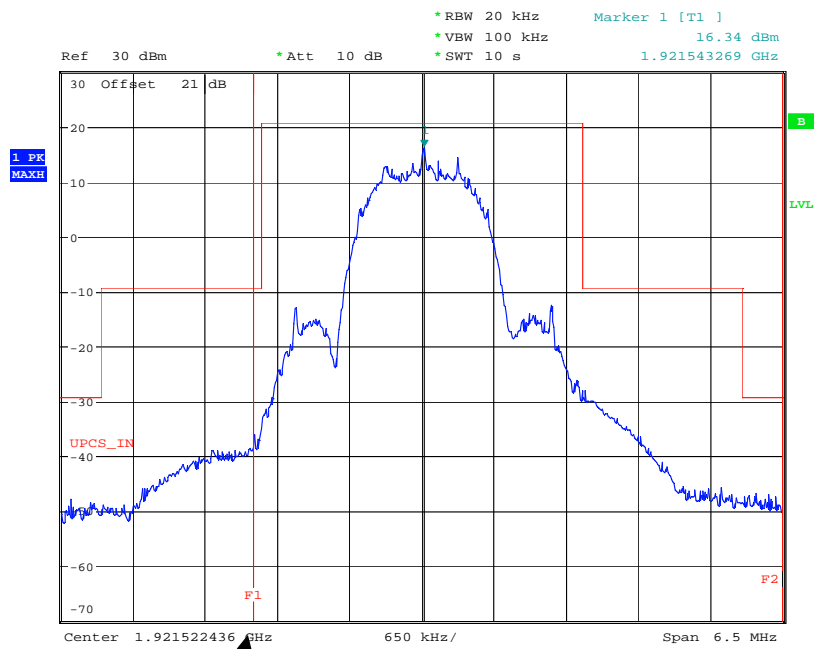


Date: 3.SEP.2009 10:40:53

Bandedge


Long Slot operation

RF carrier set to the highest carrier defined by the EUT

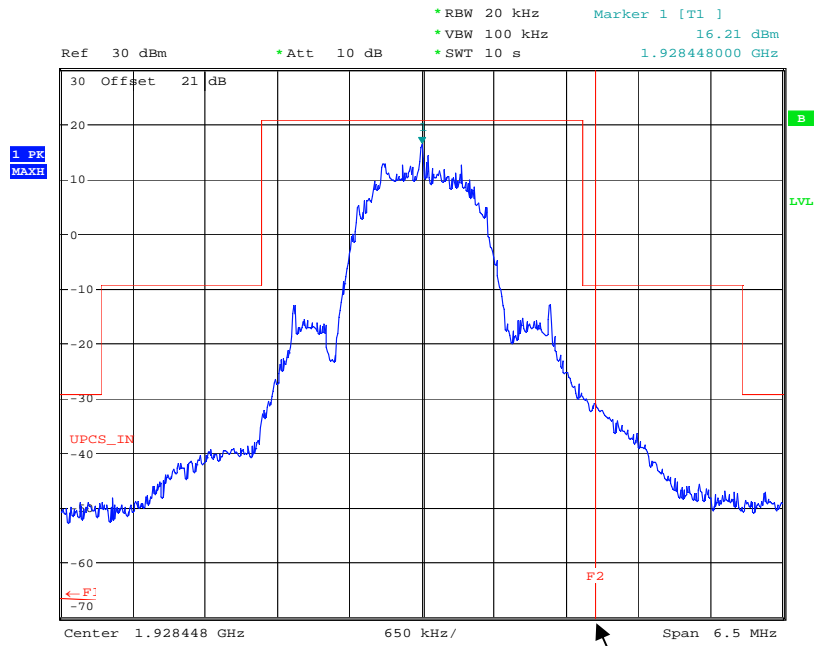

Date: 3.SEP.2009 11:03:27

Bandedge
Single Slot Operation


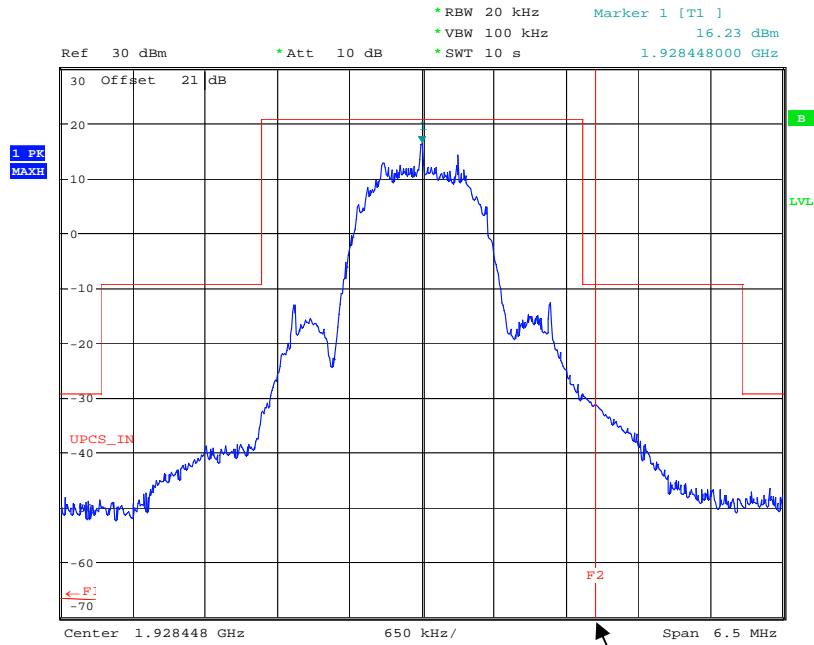


Date: 3.SEP.2009 10:56:08

Bandedge
Single Slot Operation


ANNEX J
SPURIOUS EMISSIONS – RADIATED

RF carrier set to the lowest carrier defined by the EUT – Single Slot Operation

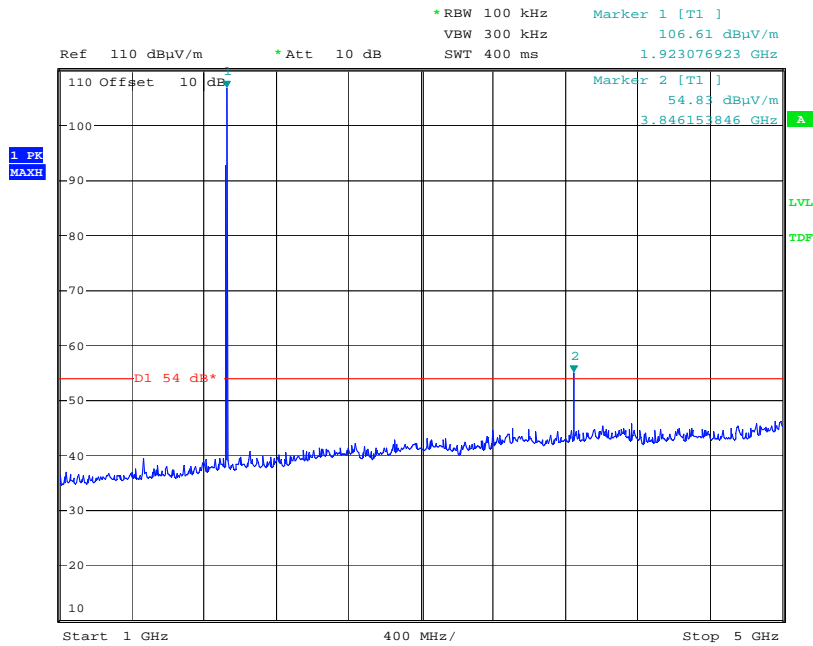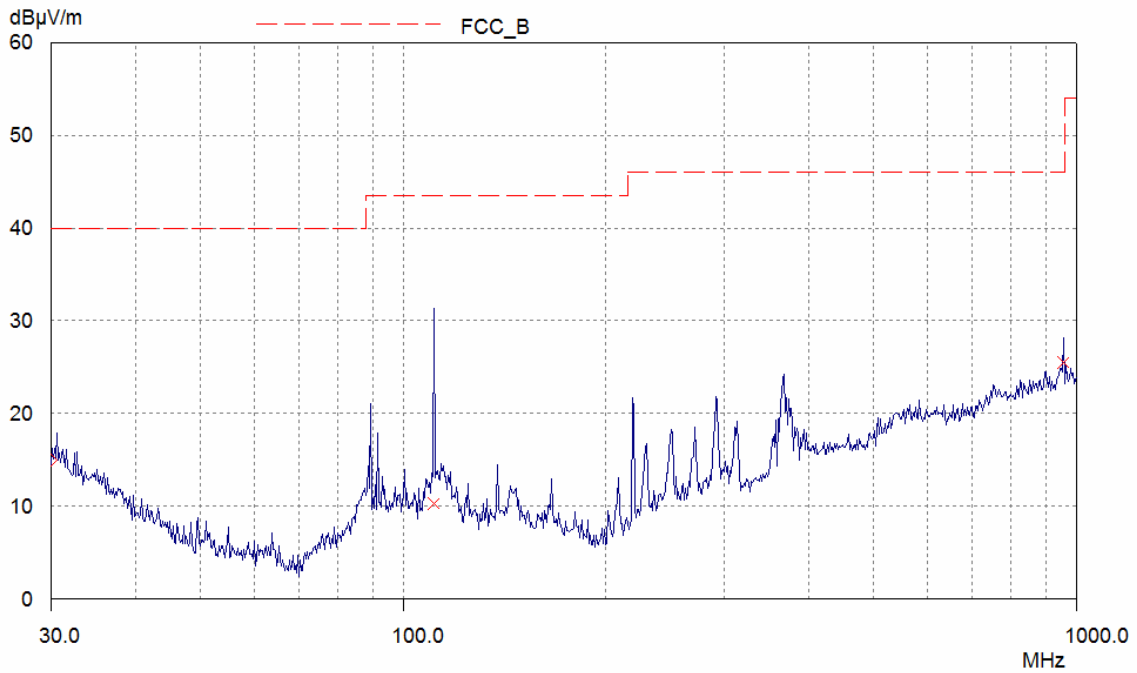


Date: 12.AUG.2009 16:02:47

RF carrier set to the lowest carrier defined by the EUT – Single Slot Operation

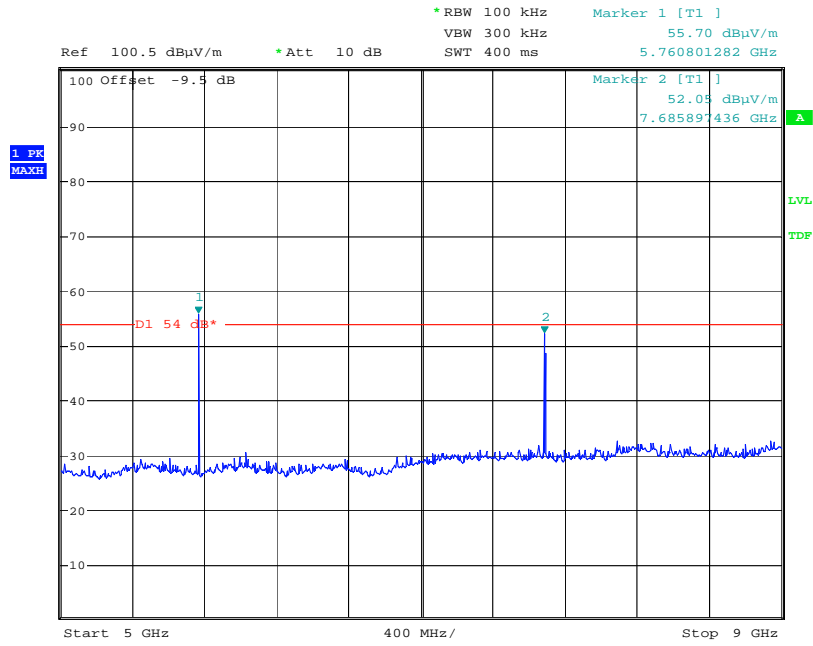


Date: 13.AUG.2009 10:26:48

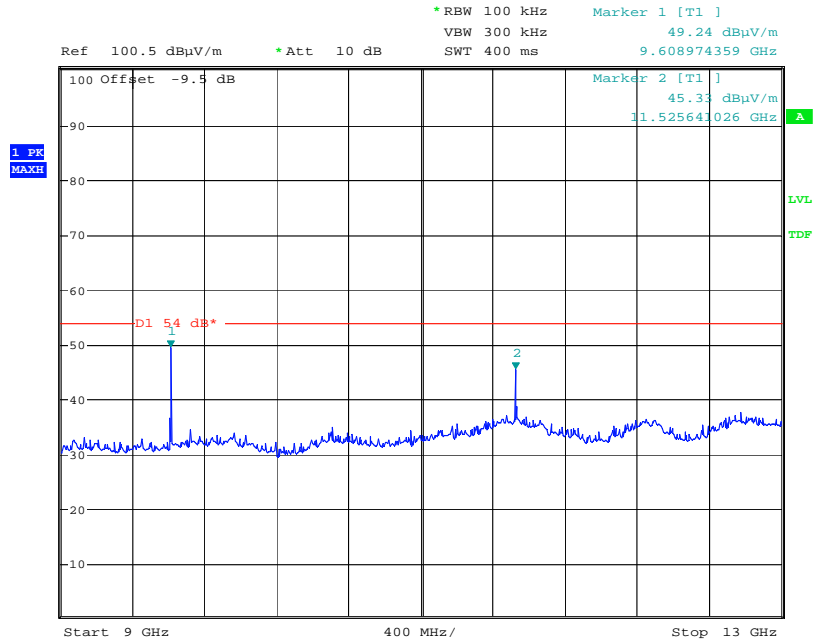


Date: 13.AUG.2009 10:29:29

RF carrier set to the lowest carrier defined by the EUT – Single Slot Operation


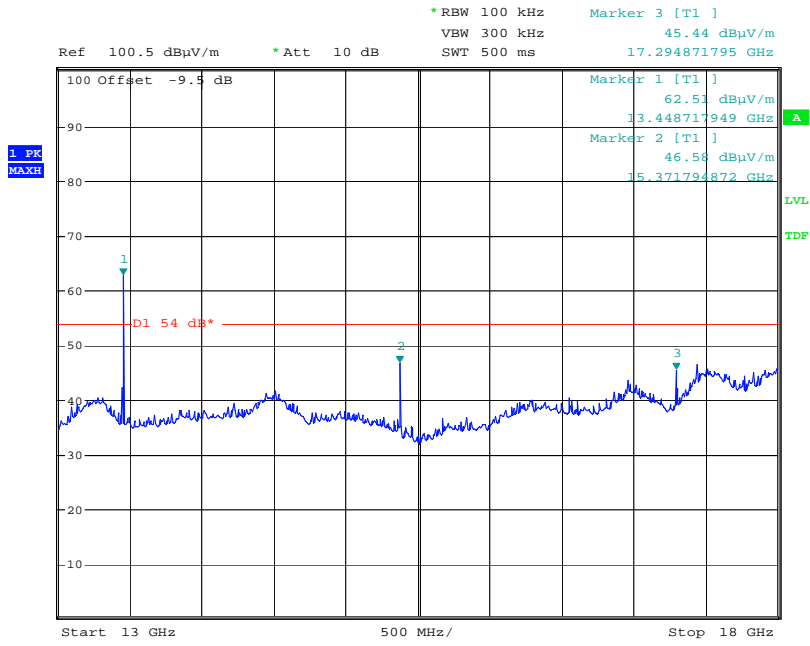


Date: 13.AUG.2009 10:27:53

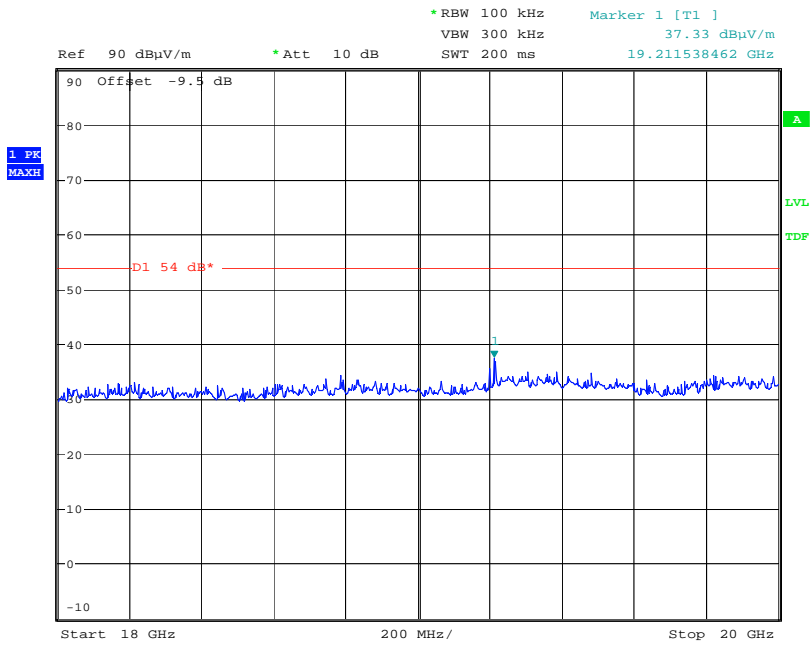


Date: 13.AUG.2009 11:07:38

RF carrier set to the lowest carrier defined by the EUT – Long Slot Operation

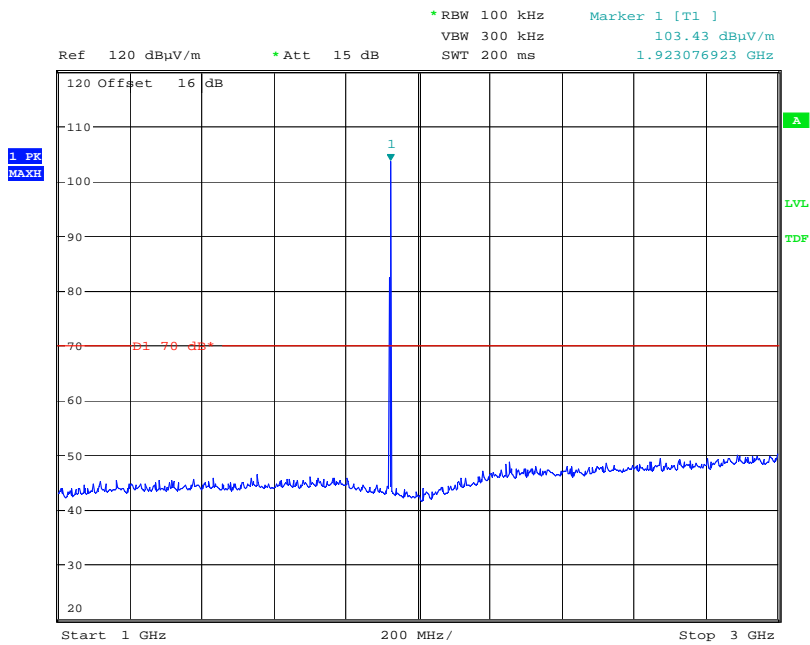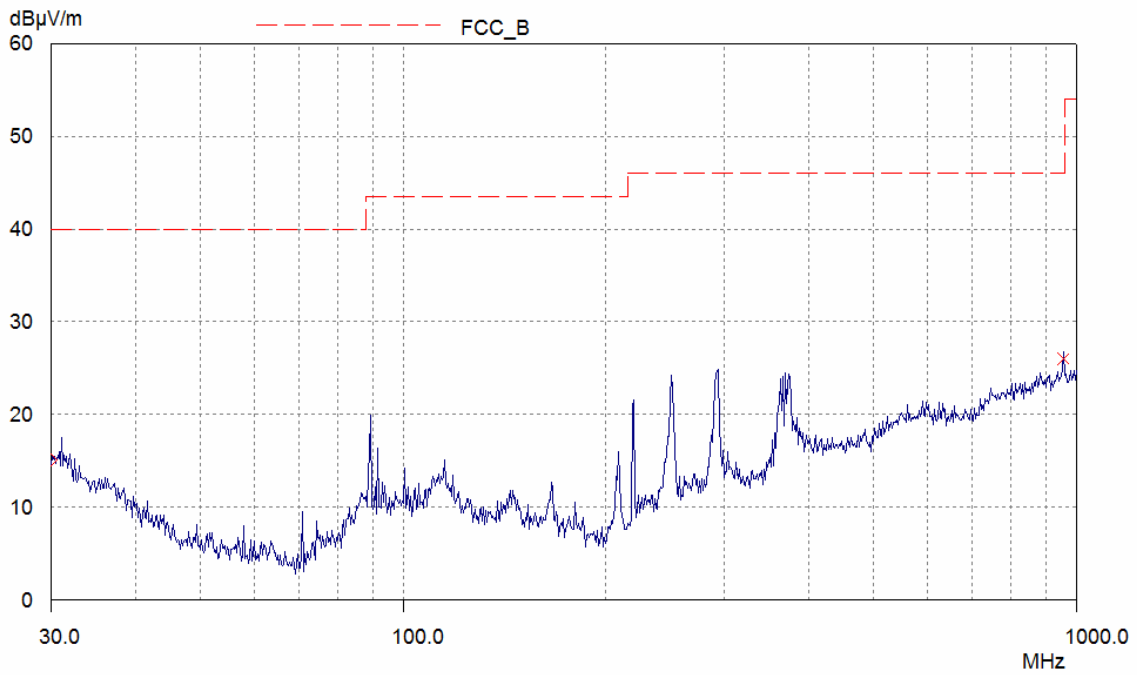


Date: 10.SEP.2009 16:16:06

RF carrier set to the lowest carrier defined by the EUT – Long Slot Operation

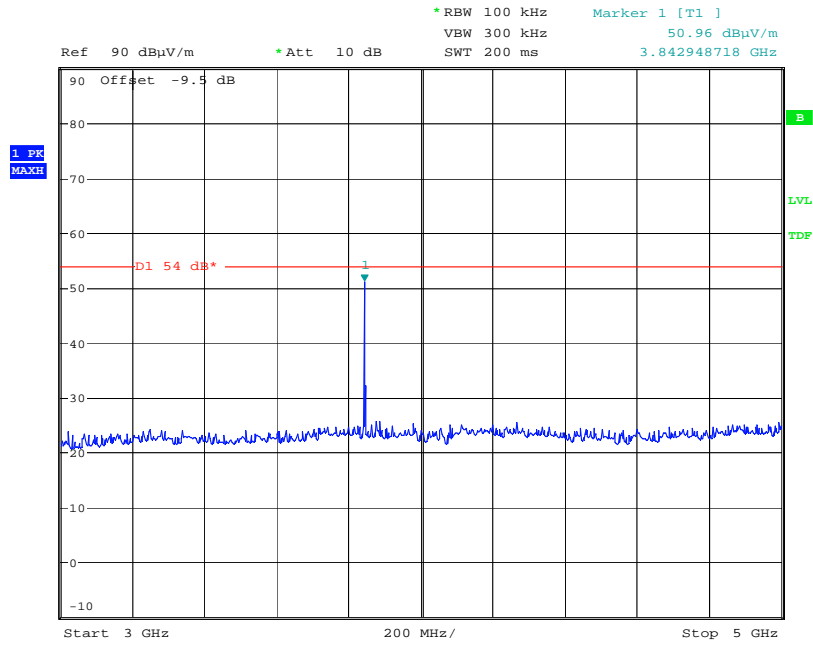


Date: 9.SEP.2009 10:12:11

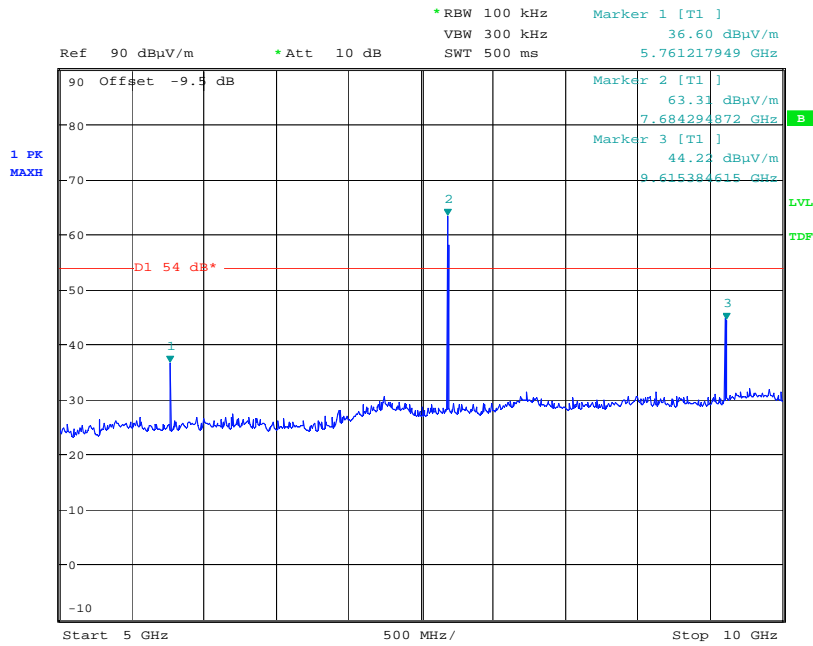


Date: 9.SEP.2009 10:12:42

RF carrier set to the lowest carrier defined by the EUT – Long Slot Operation

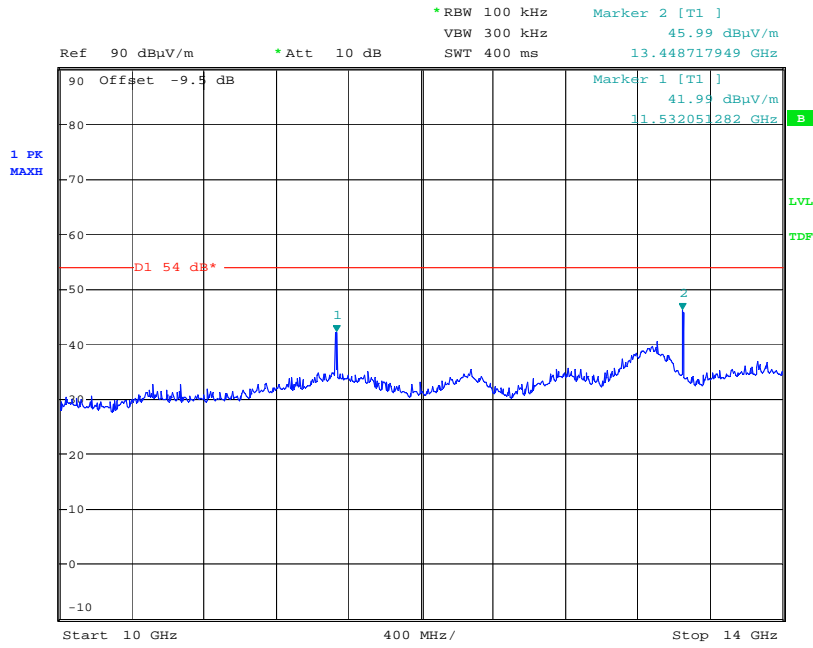


Date: 9.SEP.2009 10:13:11

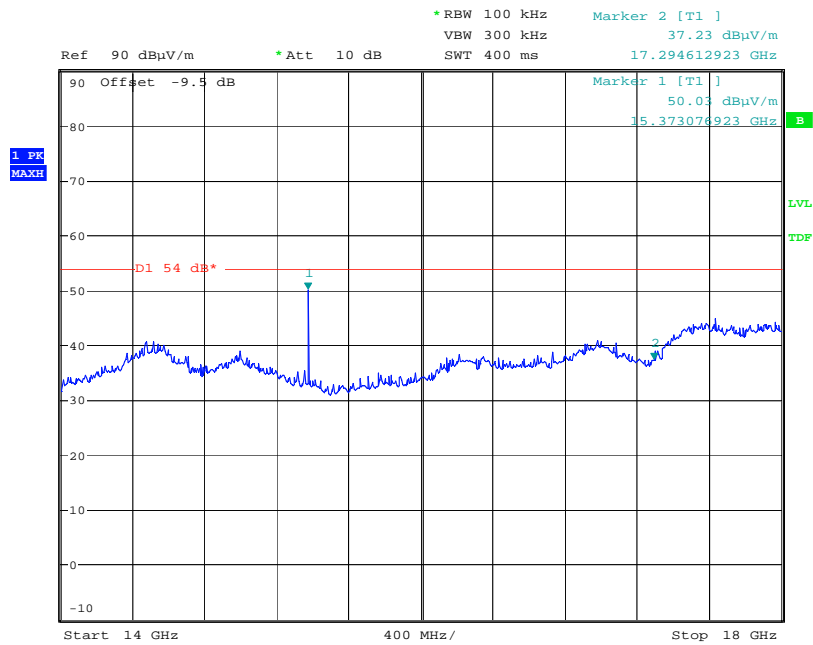



Date: 9.SEP.2009 10:14:34

RF carrier set to the lowest carrier defined by the EUT – Long Slot Operation

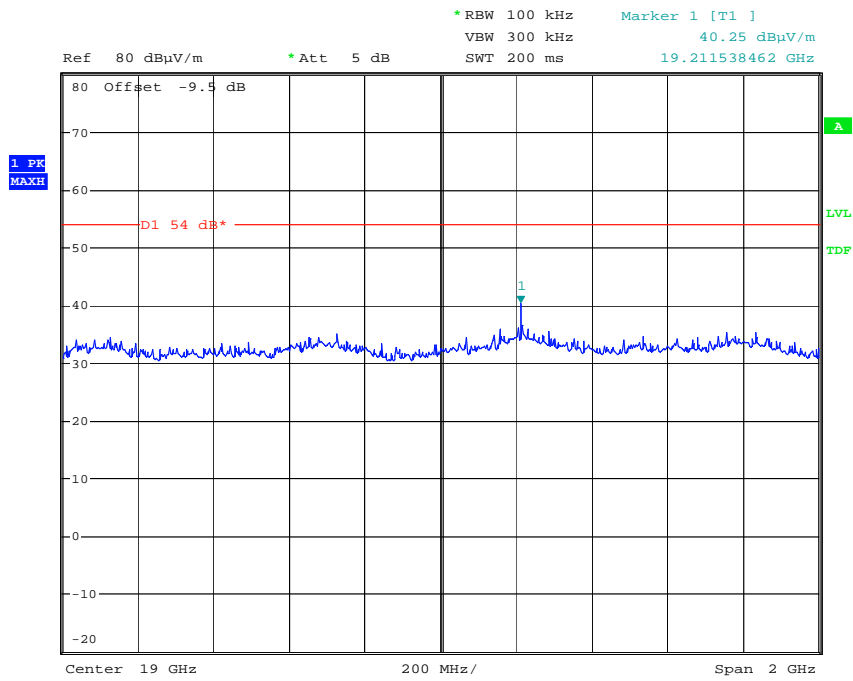


Date: 10.SEP.2009 15:53:13

RF carrier set to the highest carrier defined by the EUT – Single Slot Operation

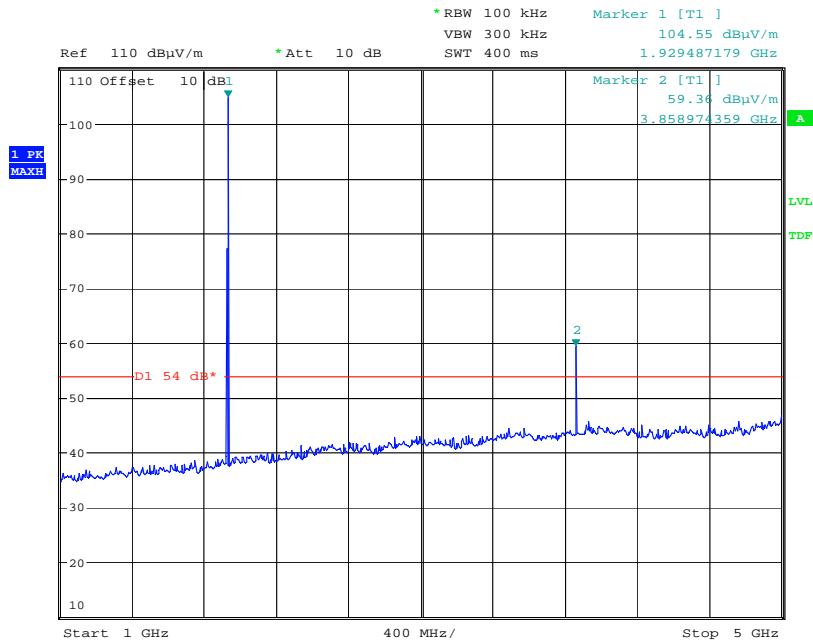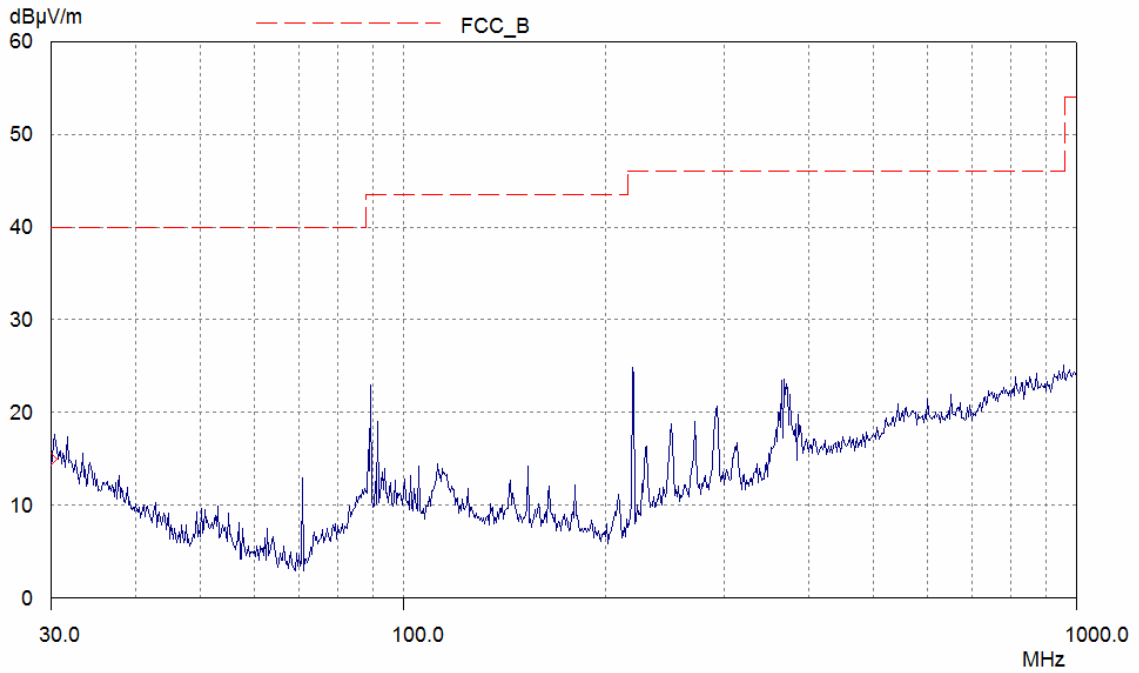


Date: 12.AUG.2009 16:00:49

RF carrier set to the highest carrier defined by the EUT – Single Slot Operation

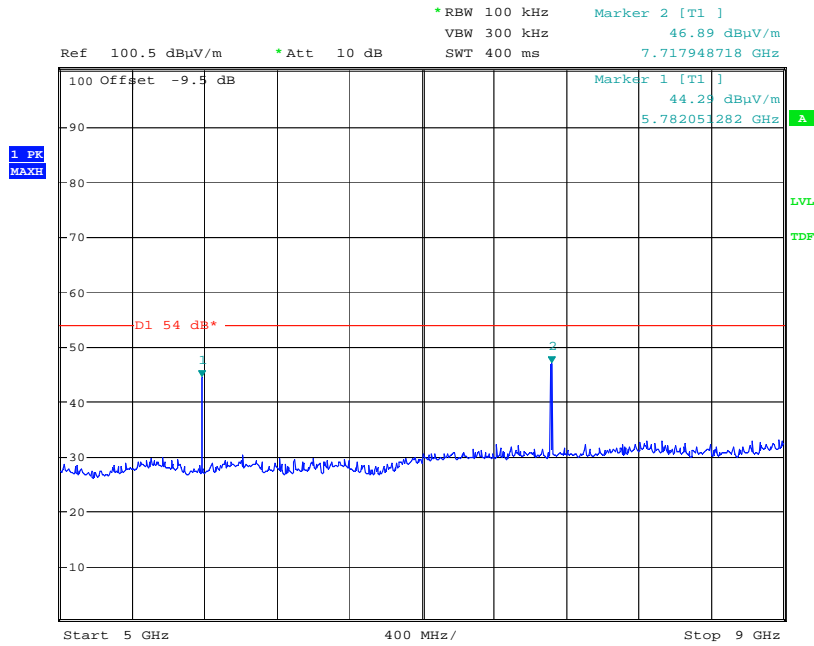


Date: 13.AUG.2009 10:18:42

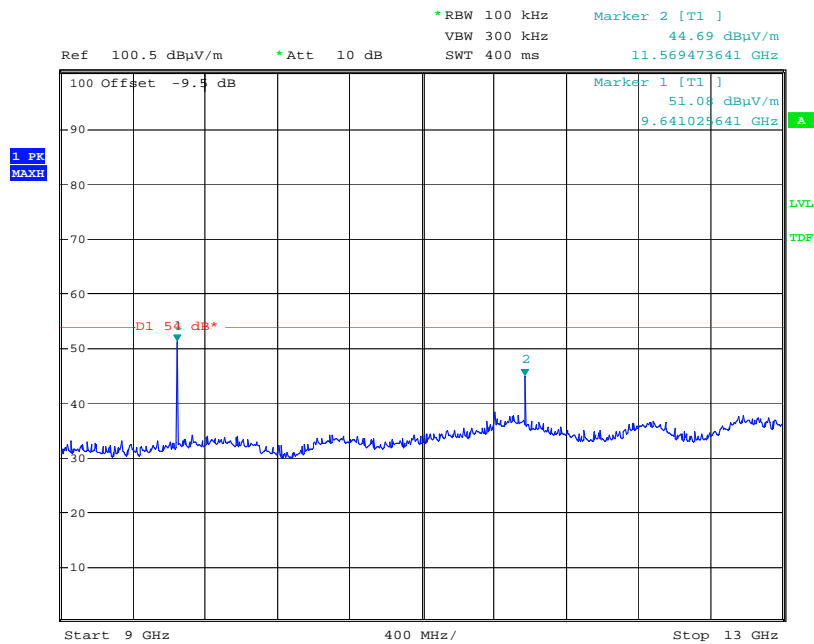


Date: 13.AUG.2009 10:19:37

RF carrier set to the highest carrier defined by the EUT – Single Slot Operation


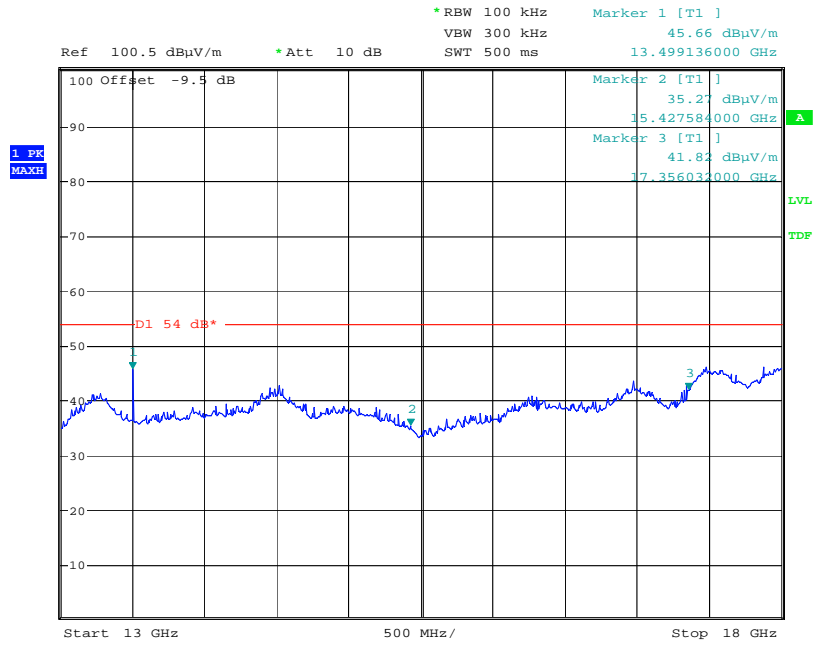


Date: 13.AUG.2009 10:21:22

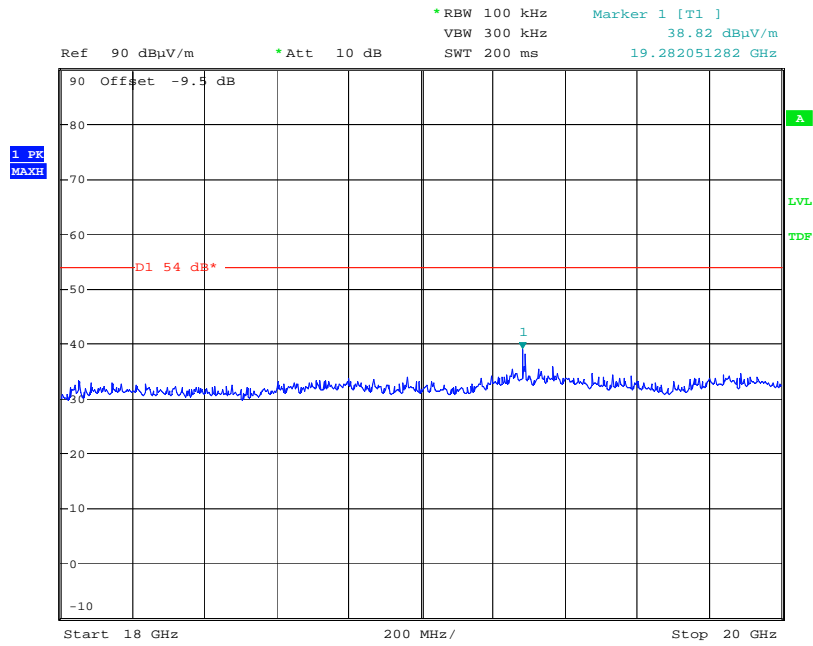


Date: 13.AUG.2009 11:09:44

RF carrier set to the highest carrier defined by the EUT – Long Slot Operation

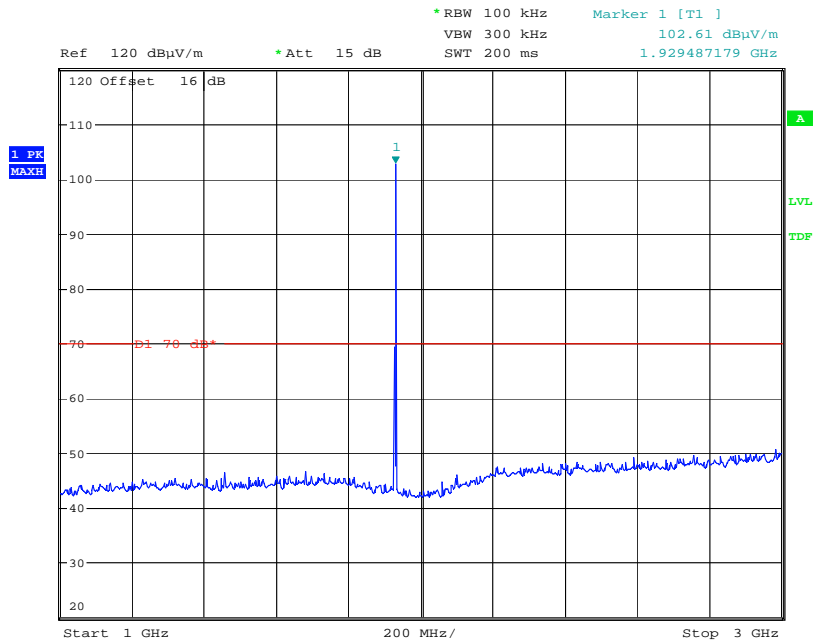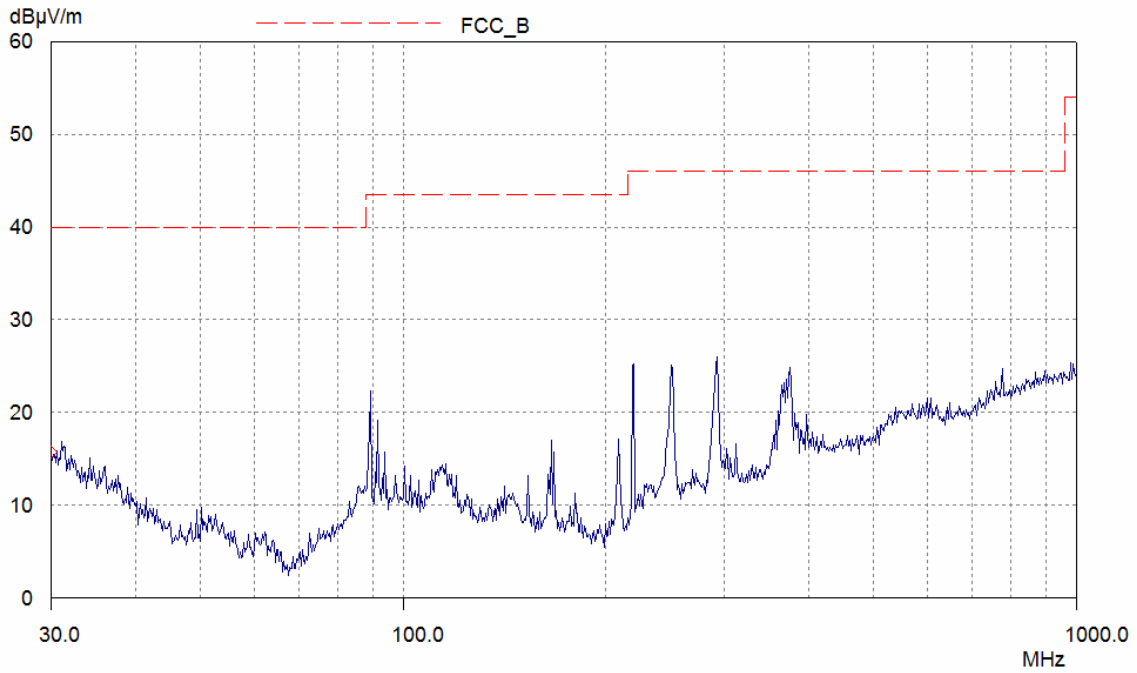


Date: 10.SEP.2009 16:17:42

RF carrier set to the highest carrier defined by the EUT – Long Slot Operation

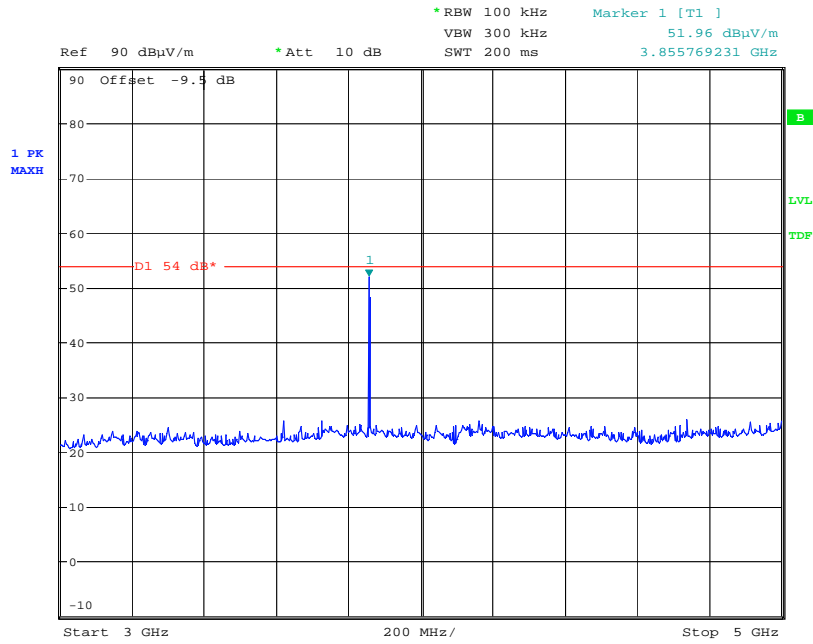


Date: 9.SEP.2009 09:28:23

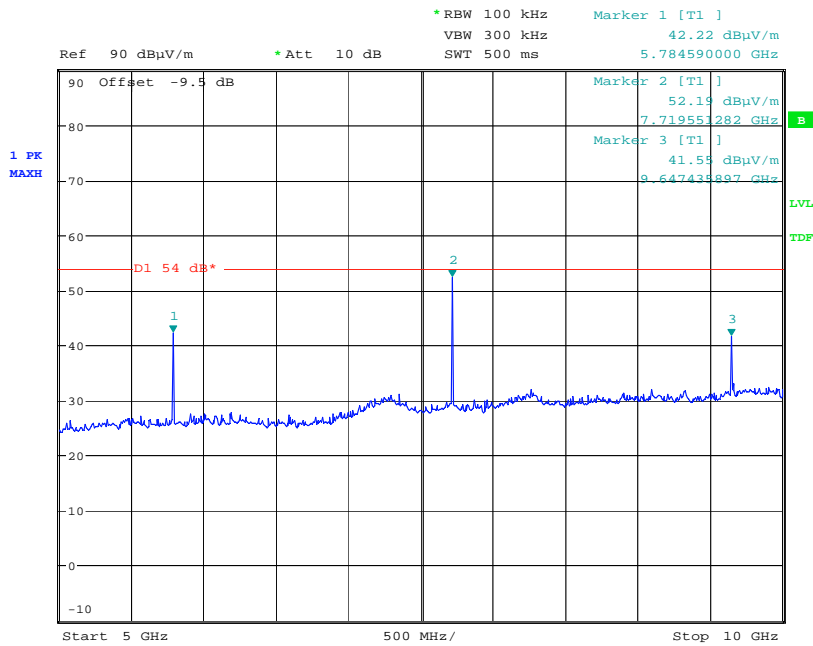


Date: 9.SEP.2009 09:30:18

RF carrier set to the highest carrier defined by the EUT – Long Slot Operation

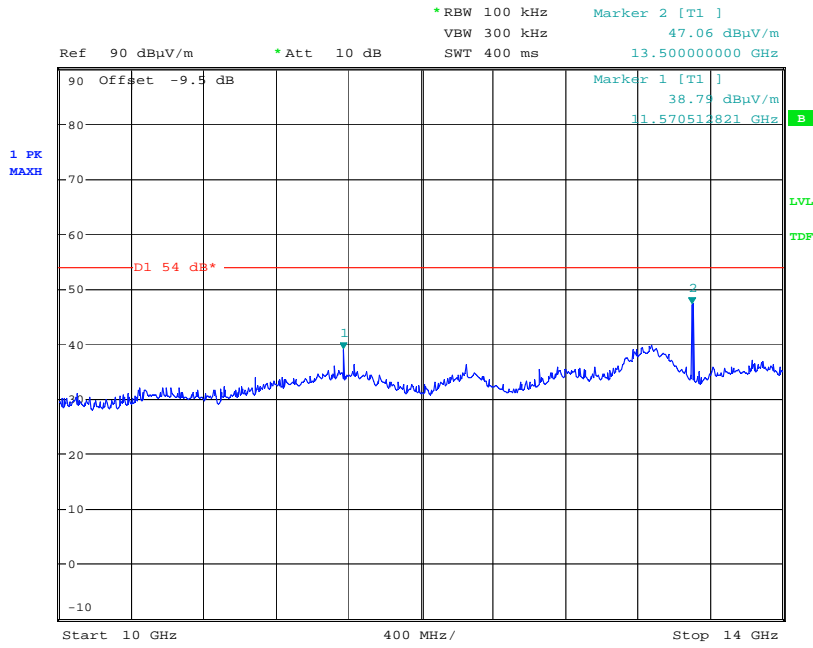


Date: 9.SEP.2009 09:31:30

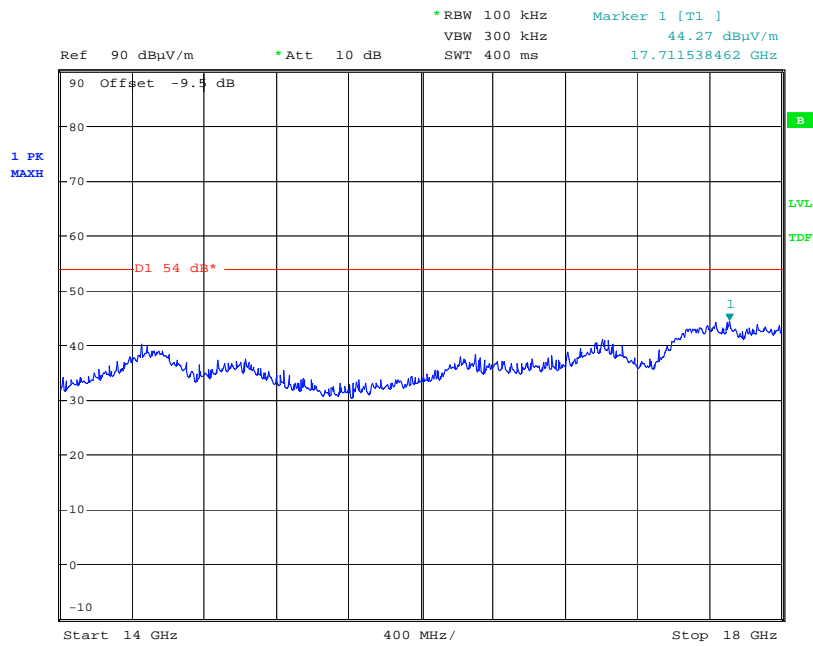

Date: 9.SEP.2009 09:32:25


RF carrier set to the highest carrier defined by the EUT – Long Slot Operation

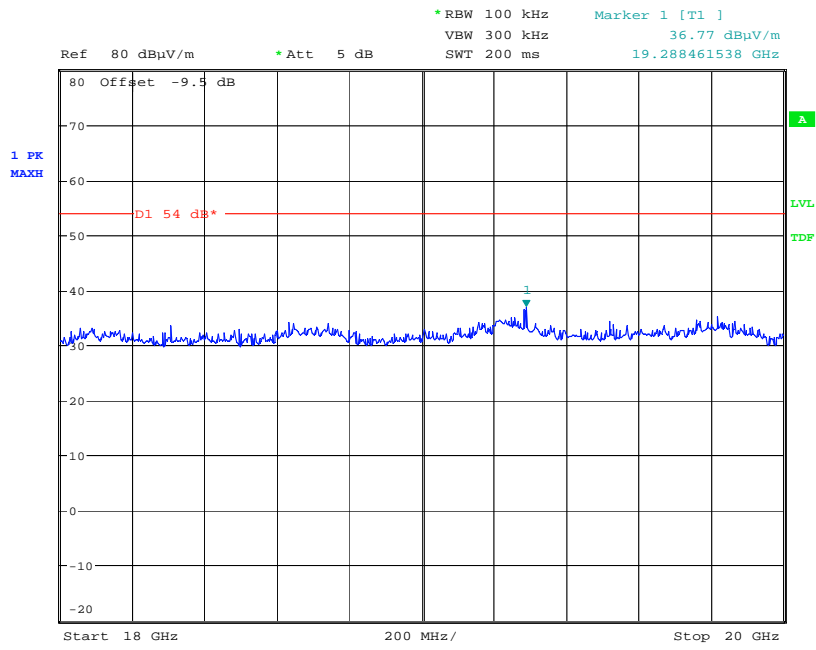

Date: 10.SEP.2009 15:45:36


ANNEX K
FRAME PERIOD

Single Slot Configuration

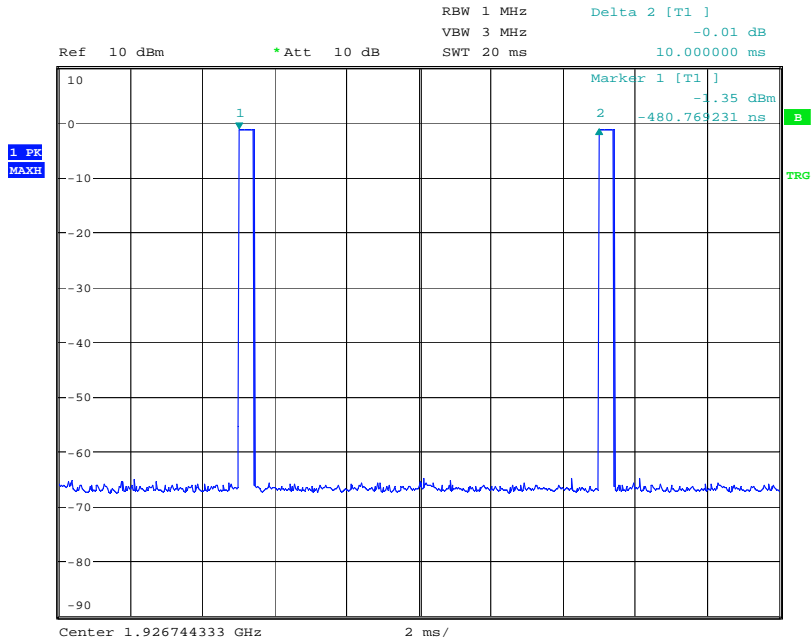

Date: 28.SEP.2009 14:45:26


$T_{Frame} = 10.0ms$

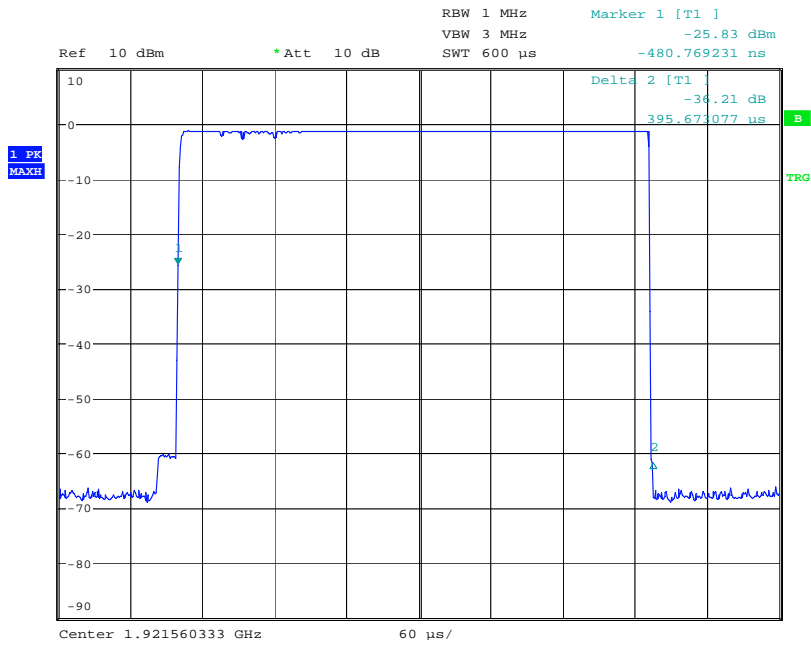

Date: 28.SEP.2009 14:43:48


$T_{on} = 395us$

Long Slot Configuration

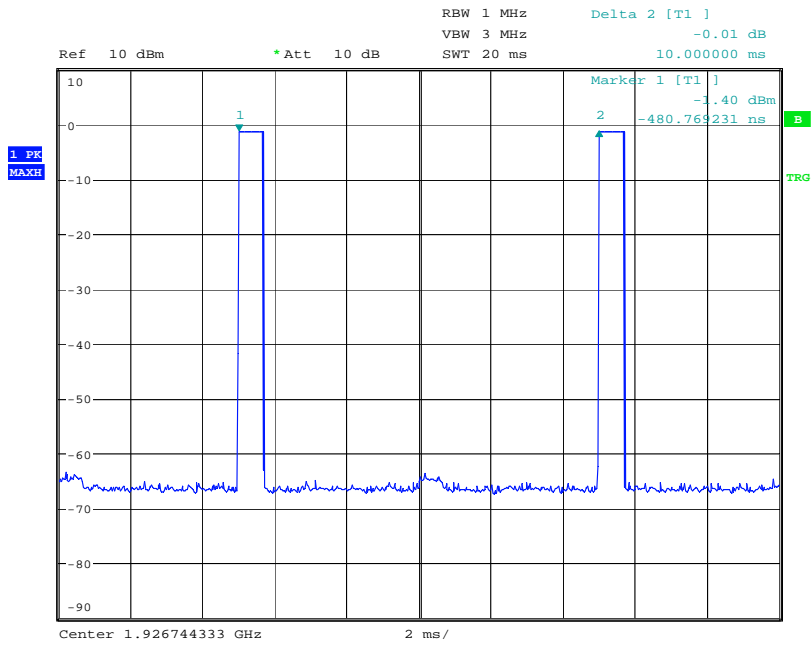

Date: 28.SEP.2009 14:45:07

$T_{\text{Frame}} = 10.0\text{ms}$

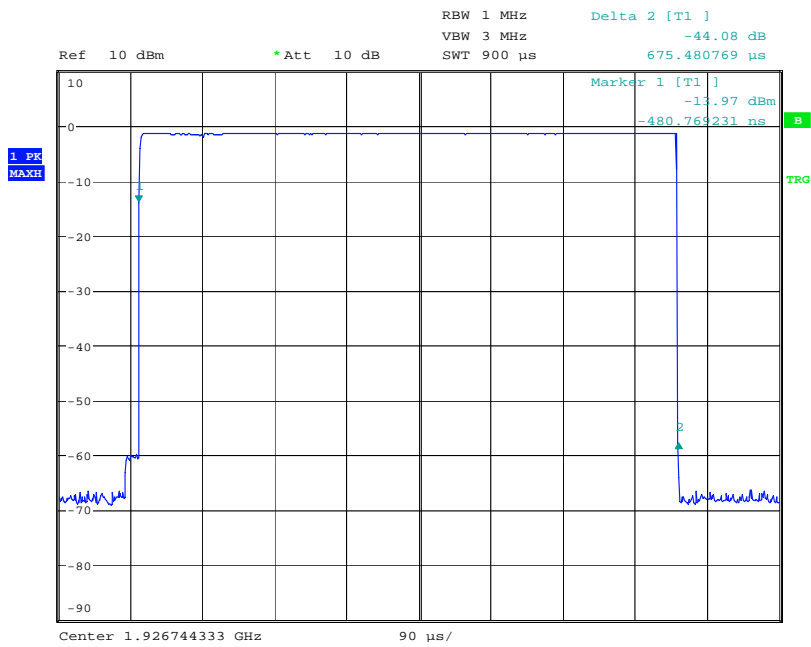

Date: 28.SEP.2009 14:44:18

$T_{\text{on}} = 675\mu\text{s}$

ANNEX L
EQUIPMENT DETAILS & CALIBRATION

TYPE OF EQUIPMENT	MAKER/SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
TEMPERATURE CHAMBER	SHARTREE	TCC 125-815P	CS 203	11	X
ATTENUATOR	BIRD	8302-060	N/A	106	X
ATTENUATOR	BIRD	8302-100	N/A	173	X
SIGNAL GENERATOR	MARCONI	2042	119388/080	176	X
ATTENUATOR	BIRD	8304-100-N	N/A	222	X
ATTENUATOR	BIRD	8304-0600-N	N/A	246	X
SIGNAL GENERATOR	MARCONI	2042	119562/021	254	X
TEMPERATURE INDICATOR	FLUKE	52 Series II	74700044	426	X
FUNCTION GENERATOR	WAVETEK	178	V644080	638	X
OSCILLOSCOPE	TEKTRONIX	TDS520B	B020491	UH122	X
FUNCTION GENERATOR	WAVETEK	271	C6841078	UH221	X
SPECTRUM ANALYSER	ROHDE & SCHWARZ	FSU 46	200034	UH281	X
POWER SPLITTER/COMBINER	HP	11667A	13723	UH303	X
POWER SPLITTER/COMBINER	HP	11667A	06690	UH305	X
POWER SPLITTER/COMBINER	HP	11667A	332	UH306	X
CRYSTAL DETECTOR	HP	8472A	1822A00897	UH307	X
ATTENUATOR	MIDWEST MICROWAVE	290-3dB	N/A	UH331	X
ATTENUATOR	RADIALL	R414706000	N/A	UH332	X
ATTENUATOR	NARDA	771-6	28	UH335	X
MODULATION ANALYSER	ROHDE & SCHWARZ	CMD 60	84934410002	RFG433	X
SIGNAL GENERATOR	AGILENT	E4438C	MY4509185000 5403406506	REF844	X
HIGH PASS FILTER	BCS FILTERS	SH4141	973501	RFG445	X

TRL Number	Equipment Type	Manufacturer	Last Cal Calibration	Calibration Period	Due For Calibration
L011	Temperature chamber	Shartree	Use Calibrated Temperature Indicator		
L106	Attenuator	Bird	Calibrate in use		
L173	Attenuator	Bird	Calibrate in use		
L176	Signal Generator	Marconi	23/06/2009	12	23/06/2010
L222	Attenuator	Bird	Calibrate in use		
L246	Attenuator	Bird	Calibrate in use		
L254	Signal Generator	Marconi	25/02/09	12	25/02/10
L426	Temperature Indicator	Fluke	21/01/2009	12	21/01/2010
L638	Function Generator	Wavetek	Use Calibrated oscilloscope		
UH122	Oscilloscope	Tektronix	10/12/2007	24	10/12/2009
UH221	Function Generator	Wavetek	Use Calibrated oscilloscope		
UH281	Spectrum Analyser	R&S	24/07/2006	12	24/07/2007
UH303	Power Splitter/Combiner	HP	Calibrate in use		
UH305	Power Splitter/Combiner	HP	Calibrate in use		
UH306	Power Splitter/Combiner	HP	Calibrate in use		
UH307	Crystal Detector	HP	For information only		
UH331	Attenuator	Midwest Microwave	Calibrate in use		
UH332	Attenuator	Radiall	Calibrate in use		
UH335	Attenuator	Narda	Calibrate in use		
RFG443	CMD 60	R&S	12/12/08	12	12/12/09
REF844	Signal Generator	Agilent	05/03/08	24	05/03/10
RFG445	High Pass Filter	BSC Filters	15/07/09	12	15/07/09

ANNEX M

MEASUREMENT UNCERTAINTY

Radio Testing – General Uncertainty Schedule

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95% confidence where no required test level exists.

[1] Adjacent Channel Power

Uncertainty in test result = **1.86dB**

[2] Carrier Power

Uncertainty in test result (Equipment - TRLUH120) = **2.18dB**

Uncertainty in test result (Equipment – TRL05) = **1.08dB**

Uncertainty in test result (Equipment – TRL479) = **2.48dB**

[3] Effective Radiated Power

Uncertainty in test result = **4.71dB**

[4] Spurious Emissions

Uncertainty in test result = **4.75dB**

[5] Maximum frequency error

Uncertainty in test result (Equipment - TRLUH120) = **119ppm**

Uncertainty in test result (Equipment – TRL05) = **0.113ppm**

Uncertainty in test result (Equipment – TRL479) = **0.265ppm**

[6] Radiated Emissions, field strength OATS 14kHz-18GHz Electric Field

Uncertainty in test result (14kHz – 30MHz) = **4.8dB**, Uncertainty in test result (30MHz – 1GHz) = **4.6dB**,

Uncertainty in test result (1GHz-18GHz) = **4.7dB**

[7] Frequency deviation

Uncertainty in test result = **3.2%**

[8] Magnetic Field Emissions

Uncertainty in test result = **2.3dB**

[9] Conducted Spurious

Uncertainty in test result (Equipment TRL479) Up to 8.1GHz = **3.31dB**

Uncertainty in test result (Equipment TRL479) 8.1GHz – 15.3GHz = **4.43dB**

Uncertainty in test result (Equipment TRL479) 15.3GHz – 21GHz = **5.34dB**

Uncertainty in test result (Equipment TRLUH120) Up to 26GHz = **3.14dB**

[10] Channel Bandwidth

Uncertainty in test result = **15.5%**

[11] Amplitude and Time Measurement – Oscilloscope

Uncertainty in overall test level = **2.1dB**, Uncertainty in time measurement = **0.59%**, Uncertainty in Amplitude measurement = **0.82%**

[11] Power Line Conduction

Uncertainty in test result = **3.4dB**

[12] Spectrum Mask Measurements

Uncertainty in test result = **2.59% (frequency)**
Uncertainty in test result = **1.32dB (amplitude)**

[13] Adjacent Sub Band Selectivity

Uncertainty in test result = **1.24dB**

[14] Receiver Blocking – Listen Mode, Radiated

Uncertainty in test result = **3.42dB**

[15] Receiver Blocking – Talk Mode, Radiated

Uncertainty in test result = **3.36dB**

[16] Receiver Blocking – Talk Mode, Conducted

Uncertainty in test result = **1.24dB**

[17] Receiver Threshold

Uncertainty in test result = **3.23dB**

[18] Transmission Time Measurement

Uncertainty in test result = **7.98%**