

## FCC Test Report

**Report No.:** RFBCEE-WTW-P21050412-3

**FCC ID:** DMOCXPLUSTW1R

**Model No.:** CXPLUSTW1 R

**Received Date:** May 13, 2021

**Test Date:** May 19 ~Jun. 29, 2021

**Issued Date:** Jul. 02, 2021

**Applicant:** Sennheiser electronic GmbH & Co. KG

**Address:** Am Labor 1, D-30900 Wedemark, Germany

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location (1):** No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, Taiwan

**Test Location (2):** B2F., No.215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231,  
Taiwan

**FCC Registration /** 788550 / TW0003

**Designation Number:** 427177 / TW0011



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record .....</b>	<b>4</b>
<b>1 Certificate of Conformity .....</b>	<b>5</b>
<b>2 Summary of Test Results.....</b>	<b>6</b>
2.1 Measurement Uncertainty.....	6
2.2 Modification Record .....	6
<b>3 General Information .....</b>	<b>7</b>
3.1 General Description of EUT .....	7
3.2 Description of Test Modes.....	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	9
3.3 Duty Cycle of Test Signal .....	12
3.4 Description of Support Units .....	13
3.4.1 Configuration of System under Test .....	13
3.5 General Description of Applied Standards and References .....	13
<b>4 Test Types and Results .....</b>	<b>14</b>
4.1 Radiated Emission and Bandedge Measurement .....	14
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	14
4.1.2 Test Instruments .....	15
4.1.3 Test Procedures.....	16
4.1.4 Deviation from Test Standard .....	16
4.1.5 Test Set Up .....	17
4.1.6 EUT Operating Conditions.....	18
4.1.7 Test Results .....	19
4.2 Conducted Emission Measurement.....	37
4.2.1 Limits of Conducted Emission Measurement .....	37
4.2.2 Test Instruments .....	37
4.2.3 Test Procedures.....	37
4.2.4 Deviation from Test Standard .....	38
4.2.5 Test Setup.....	38
4.2.6 EUT Operating Conditions.....	38
4.2.7 Test Results .....	39
4.3 6 dB Bandwidth Measurement.....	43
4.3.1 Limits of 6 dB Bandwidth Measurement.....	43
4.3.2 Test Setup.....	43
4.3.3 Test Instruments .....	43
4.3.4 Test Procedure .....	43
4.3.5 Deviation from Test Standard .....	43
4.3.6 EUT Operating Conditions.....	43
4.3.7 Test Results .....	44
4.4 Occupied Bandwidth Measurement.....	46
4.4.1 Test Setup.....	46
4.4.2 Test Instruments .....	46
4.4.3 Test Procedure .....	46
4.4.4 Deviation from Test Standard .....	46
4.4.5 EUT Operating Conditions.....	46
4.4.6 Test Results .....	47
4.5 Conducted Output Power Measurement .....	49
4.5.1 Limits of Conducted Output Power Measurement.....	49
4.5.2 Test Setup.....	49
4.5.3 Test Instruments .....	49
4.5.4 Test Procedures.....	49
4.5.5 Deviation from Test Standard .....	49
4.5.6 EUT Operating Conditions.....	49
4.5.7 Test Results .....	50

4.6	Power Spectral Density Measurement .....	51
4.6.1	Limits of Power Spectral Density Measurement.....	51
4.6.2	Test Setup.....	51
4.6.3	Test Instruments .....	51
4.6.4	Test Procedure .....	51
4.6.5	Deviation from Test Standard .....	51
4.6.6	EUT Operating Condition .....	51
4.6.7	Test Results .....	52
4.7	Conducted Out of Band Emission Measurement .....	54
4.7.1	Limits of Conducted Out of Band Emission Measurement.....	54
4.7.2	Test Setup.....	54
4.7.3	Test Instruments .....	54
4.7.4	Test Procedure .....	54
4.7.5	Deviation from Test Standard .....	54
4.7.6	EUT Operating Condition .....	54
4.7.7	Test Results .....	55
<b>5</b>	<b>Photographs of the Test Configuration.....</b>	<b>58</b>
<b>6</b>	<b>Construction Photos of EUT .....</b>	<b>59</b>
	<b>Annex A- Band Edge Measurement .....</b>	<b>60</b>
	<b>Appendix – Information of the Testing Laboratories .....</b>	<b>64</b>

### Release Control Record

Issue No.	Description	Date Issued
RFBCEE-WTW-P21050412-3	Original Release	Jul. 02, 2021

## 1 Certificate of Conformity

**Product Name:** CX Plus True Wireless (CXPLUSTW1)

**Brand Name:** SENNHEISER

**Model No.:** CXPLUSTW1 R

**Sample Status:** Engineering Sample

**Applicant:** Sennheiser electronic GmbH & Co. KG

**Test Date:** May 19 ~Jun. 29, 2021

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :** Lena Wang, **Date:** Jul. 02, 2021  
Lena Wang / Specialist

**Approved by :** Dylan Chiou, **Date:** Jul. 02, 2021  
Dylan Chiou / Senior Project Engineer

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -5.59 dB at 0.46280 MHz.
15.205 & 209	Radiated Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -8.67 dB at 2483.5 MHz.
15.247(d)	Band Edge Measurement	Pass	Meet the requirement of limit.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Reference only
15.247(b)	Conducted Power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

Note:

- For 2.4G band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.79 dB
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.0153 dB
	200 MHz ~ 1000 MHz	2.0224 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	1.0121 dB
	18 GHz ~ 40 GHz	1.1508 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

<b>Test Item Description</b>	True Wireless Earphones
<b>Product Name</b>	CX Plus True Wireless (CXPLUSTW1)
<b>Brand Name</b>	SENNHEISER
<b>Model No.</b>	CXPLUSTW1 R (refer to note for more details )
<b>Status of EUT</b>	Engineering Sample
<b>Power Ratings</b>	Left earbud& Right earbud: 3.7Vdc, 55mAh (from battery) Charging Case: 5Vdc, 600 mA (from Type-C USB interface) 3.7Vdc, 400-420mAh (from battery)
<b>Power Supply (Nominal &amp; Testing)</b>	5Vdc, 600 mA (from Type-C USB interface)
<b>Operating Temperature range</b>	0°C - +40°C
<b>Modulation Type</b>	GFSK
<b>Transmission Technology</b>	DTS
<b>Technology</b>	Bluetooth
<b>Operating Frequency</b>	2402 - 2480MHz (for Frequency Band: 2400-2483.5MHz)
<b>Channel Spacing</b>	2MHz
<b>Channel Bandwidth</b>	80MHz
<b>Data Transfer Rate</b>	LE 4.0: 1Mbps LE 5.2: 2Mbps
<b>Number of Channel</b>	40
<b>Maximum Output Power</b>	LE 4.0: 10.257 mW LE 5.2: 10.186 mW
<b>Antenna Type</b>	Monopole antenna
<b>Antenna Gain</b>	Max -0.65 dBi
<b>HW Version</b>	Earbuds: R1 Charging case: R1
<b>SW Version</b>	Earbuds: V1.3.20 Charging case: 1.4.0
<b>Antenna Connector</b>	N/A
<b>Cable Supplied</b>	0.2 m Shielded USB cable without core

Note:

- The EUT system CX Plus True Wireless (CXPLUSTW1), contain the following devices:

Item	Brand	Device Model No.
Right Earbud	SENNHEISER	CXPLUSTW1 R
Left Earbud	SENNHEISER	CXPLUSTW1 L
Charging Case	SENNHEISER	CXPLUSTW1 C

\* CXPLUSTW1 R and CXPLUSTW1 L with BT & BT LE TX/RX function

\* Charging case is solely used for charging CXPLUSTW1 R and CXPLUSTW1 L only

\* There are two appearance colors: Black, and White.

2. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.
3. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or User's Manual.

### 3.2 Description of Test Modes

40 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480



### 3.2.1 Test Mode Applicability and Tested Channel Detail

<LE 4.0>

EUT Configure Mode	Applicable To				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	√	√	-	√	EUT (Right Earbud)
B	-	√	√	-	EUT (Left Earbud + Right Earbud + Charging case (Main Battery))
C	-	√	√	-	EUT (Left Earbud + Right Earbud + Charging case (Alternative Battery))

Where **RE $\geq$ 1G**: Radiated Emission above 1 GHz      **RE<1G**: Radiated Emission below 1 GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

**Note:** The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane**.

**Note:** “-” means no effect.

#### **Radiated Emission Test (Above 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
A	0 to 39	0, 19, 39	GFSK	1

#### **Radiated Emission Test (Below 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
A, B, C	0 to 39	19	GFSK	1

#### **Power Line Conducted Emission Test:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
B, C	0 to 39	19	GFSK	1

**Antenna Port Conducted Measurement:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
A	0 to 39	0, 19, 39	GFSK	1

<LE 5.2>

EUT Configure Mode	Applicable To				Description
	RE $\geq$ 1G	RE $<$ 1G	PLC	APCM	
A	√	√	-	√	EUT (Right Earbud)
B	-	√	√	-	EUT (Left Earbud + Right Earbud + Charging case (Main Battery))
C	-	√	√	-	EUT (Left Earbud + Right Earbud + Charging case (Alternative Battery))

Where **RE $\geq$ 1G**: Radiated Emission above 1 GHz      **RE $<$ 1G**: Radiated Emission below 1 GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

**Note:** The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane**.  
**Note:** “-” means no effect.

**Radiated Emission Test (Above 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
A	0 to 39	0, 19, 39	GFSK	2

**Radiated Emission Test (Below 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
A, B, C	0 to 39	39	GFSK	2

**Power Line Conducted Emission Test:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
B, C	0 to 39	39	GFSK	2

**Antenna Port Conducted Measurement:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
A	0 to 39	0, 19, 39	GFSK	2


**Test Condition:**

Applicable To	Environmental Conditions	Input Power	Tested by
RE≥1G	25 deg. C, 65 % RH	3.7 Vdc	Charles Hsiao
RE<1G	25 deg. C, 65 % RH	3.7 Vdc, 120 Vac, 60Hz	Karl Lee
PLC	25 deg. C, 65 % RH	120 Vac, 60 Hz	Edison Lee
APCM	25 deg. C, 65 % RH	3.7 Vdc	Chris Lin

**3.3 Duty Cycle of Test Signal**


<LE 4.0>

Duty cycle = 0.383/0.622 = 0.616, Duty factor = 10 \* log(1/0.616) = 2.11

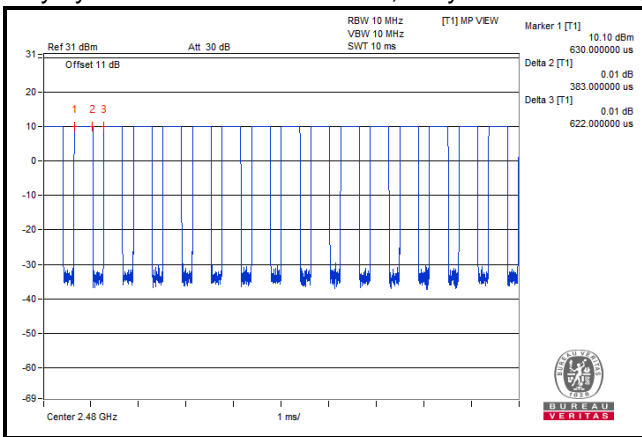

<LE 5.2>

Duty cycle = 0.202/0.627 = 0.322, Duty factor = 10 \* log(1/0.322) = 4.92

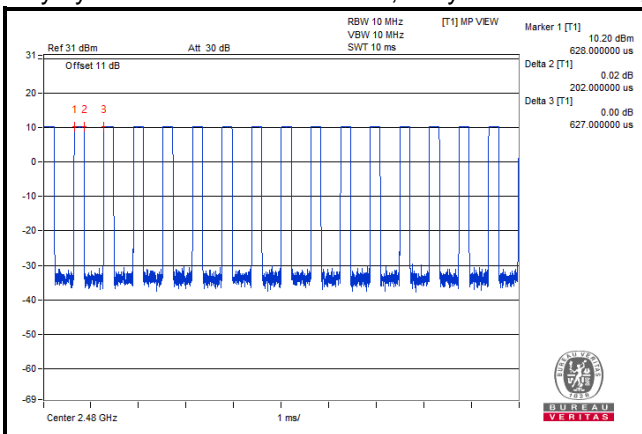

### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Adapter	ASUS	AD827M	NA	NA	-


No.	Cable Descriptions	Qty.	Length (m)	Shielded (Yes/ No)	Cores (Qty.)	Remark
1.	USB Cable	1	0.2	Y	0	Supplied by client

#### 3.4.1 Configuration of System under Test

Test Mode A



Test Mode B, C

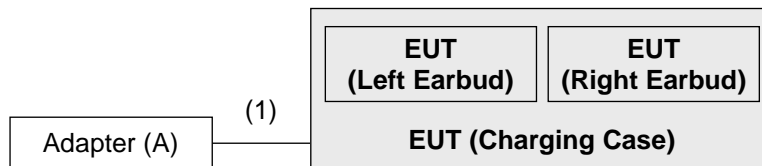

### 3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

**Test Standard:**

**FCC Part 15, Subpart C (15.247)**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

**References Test Guidance:**

**KDB 558074 D01 15.247 Meas Guidance v05r02**

All test items have been performed as a reference to the above KDB test guidance.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**Note:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

#### 4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent Technologies	N9038A	MY52260177	Aug. 24, 2020	Aug. 23, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Apr. 12, 2021	Apr. 11, 2022
HORN Antenna ETS-Lindgren	3117	00143293	Nov. 22, 2020	Nov. 21, 2021
BILOG Antenna SCHWARZBECK	VULB 9168	9168-616	Nov. 09, 2020	Nov. 08, 2021
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 13, 2021	Apr. 12, 2022
Loop Antenna	EM-6879	269	Sep. 17, 2020	Sep. 16, 2021
Preamplifier Agilent	310N	187226	Jun. 17, 2020	Jun. 16, 2021
			Jun. 17, 2021	Jun. 16, 2022
Preamplifier Agilent	83017A	MY39501357	Jun. 17, 2020	Jun. 16, 2021
			Jun. 17, 2021	Jun. 16, 2022
Preamplifier EMCI	EMC 184045	980116	Oct. 07, 2020	Oct. 06, 2021
Power Meter Anritsu	ML2495A	1012010	Sep. 01, 2020	Aug. 31, 2021
Power Sensor Anritsu	MA2411B	1315050	Sep. 01, 2020	Aug. 31, 2021
RF signal cable ETS-LINDGREN	5D-FB	Cable-CH1-01(RFC-SMS-100-SMS-120+RFC-SMS-100-SMS-400)	Jun. 17, 2020	Jun. 16, 2021
			Jun. 17, 2021	Jun. 16, 2022
RF signal cable ETS-LINDGREN	8D-FB	Cable-CH1-02(RFC-SMS-100-SMS-24)	Jun. 17, 2020	Jun. 16, 2021
			Jun. 17, 2021	Jun. 16, 2022
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 8.130425b	NA	NA	NA
Antenna Tower MF	NA	NA	NA	NA
Turn Table MF	NA	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HsinTien Chamber 1.

#### 4.1.3 Test Procedures

##### **For Radiated Emission below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### **Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.

##### **For Radiated Emission above 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

##### **Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98 %) or 10 Hz (Duty cycle  $\geq 98$  %) for Average detection (AV) at frequency above 1 GHz. (LE 4.0: RBW = 1 MHz, VBW = 3 kHz ; LE 5.2: RBW = 1 MHz, VBW = 5.1 kHz)
4. All modes of operation were investigated and the worst-case emissions are reported.


#### 4.1.4 Deviation from Test Standard

No deviation.




#### 4.1.5 Test Set Up


##### <Radiated Emission below 30 MHz>

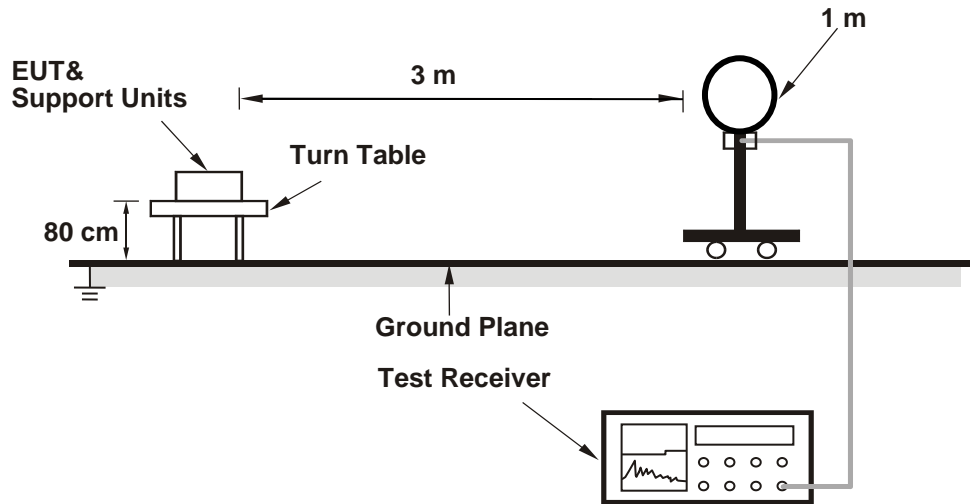

##### <Radiated Emission 30 MHz to 1 GHz>

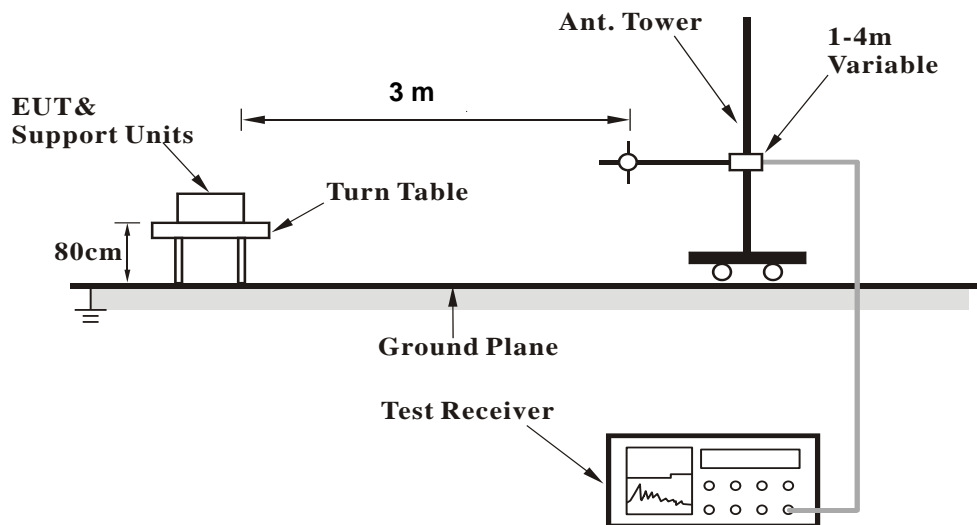

### <Radiated Emission above 1 GHz>

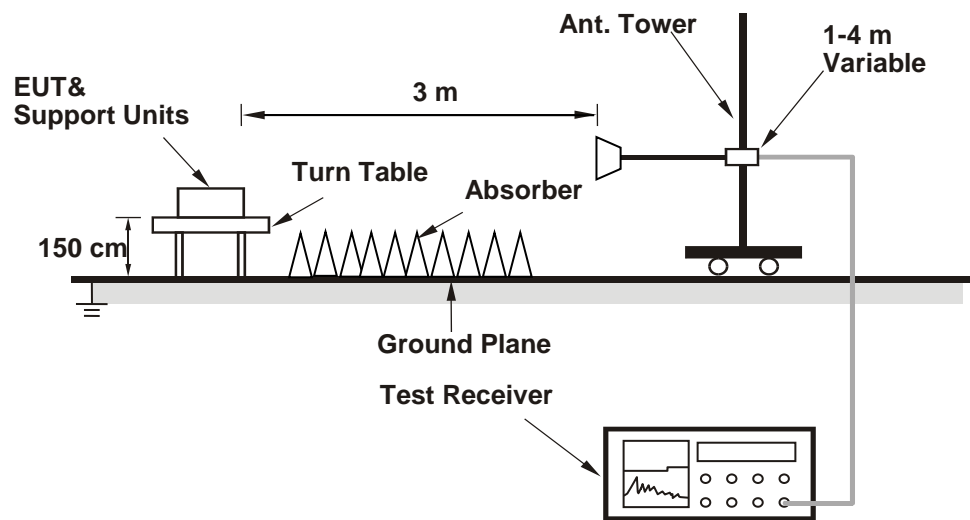

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Set the EUT under transmission condition continuously at specific channel frequency.

## 4.1.7 Test Results

## Above 1 GHz Data:

&lt;LE 4.0&gt;

EUT Test Condition		Measurement Detail	
Channel	Channel 0	Frequency Range	1 GHz ~ 25 GHz
Input Power	3.7 Vdc	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Charles Hsiao

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	41.21	36.71	4.5	54	-12.79	100	178	Average
2390	52.14	47.64	4.5	74	-21.86	100	178	Peak
2402	99.59	95.07	4.52			100	178	Average
2402	100.3	95.78	4.52			100	178	Peak
4804	41.46	31.11	10.35	54	-12.54	166	34	Average
4804	49.14	38.79	10.35	74	-24.86	166	34	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	41.32	36.82	4.5	54	-12.68	100	26	Average
2390	51.58	47.08	4.5	74	-22.42	100	26	Peak
2402	100.6	96.08	4.52			100	26	Average
2402	101.2	96.68	4.52			100	26	Peak
4804	41.63	31.28	10.35	54	-12.37	124	205	Average
4804	48.84	38.49	10.35	74	-25.16	124	205	Peak

## Remarks:

- Emission Level = Read Level + Factor  
 Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).  
 Margin value = Emission level – Limit value
- 2402 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 19	Frequency Range	1 GHz ~ 25 GHz
Input Power	3.7 Vdc	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Charles Hsiao

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	41.16	36.66	4.5	54	-12.84	100	178	Average
2390	51.4	46.9	4.5	74	-22.6	100	178	Peak
2440	98.87	94.28	4.59			100	178	Average
2440	99.34	94.75	4.59			100	178	Peak
2483.5	41.68	37.02	4.66	54	-12.32	100	178	Average
2483.5	52.21	47.55	4.66	74	-21.79	100	178	Peak
4880	41.45	31.24	10.21	54	-12.55	157	41	Average
4880	47.74	37.53	10.21	74	-26.26	157	41	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	41.31	36.81	4.5	54	-12.69	100	26	Average
2390	51.86	47.36	4.5	74	-22.14	100	26	Peak
2440	99.63	95.04	4.59			100	26	Average
2440	100.61	96.02	4.59			100	26	Peak
2483.5	41.62	36.96	4.66	54	-12.38	100	26	Average
2483.5	52.61	47.95	4.66	74	-21.39	100	26	Peak
4880	41.44	31.23	10.21	54	-12.56	124	208	Average
4880	49.23	39.02	10.21	74	-24.77	124	208	Peak

Remarks:

- Emission Level = Read Level + Factor  
Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).  
Margin value = Emission level – Limit value
- 2440 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 39	Frequency Range	1 GHz ~ 25 GHz
Input Power	3.7 Vdc	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Charles Hsiao

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2480	98.44	93.8	4.64			100	178	Average
2480	99.76	95.12	4.64			100	178	Peak
2483.5	41.95	37.29	4.66	54	-12.05	100	178	Average
2483.5	53.82	49.16	4.66	74	-20.18	100	178	Peak
4960	41.77	31.41	10.36	54	-12.23	165	5	Average
4960	48.73	38.37	10.36	74	-25.27	165	5	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2480	99.45	94.81	4.64			100	26	Average
2480	100.56	95.92	4.64			100	26	Peak
2483.5	41.87	37.21	4.66	54	-12.13	100	26	Average
2483.5	54.95	50.29	4.66	74	-19.05	100	26	Peak
4960	41.72	31.36	10.36	54	-12.28	141	157	Average
4960	47.11	36.75	10.36	74	-26.89	141	157	Peak

Remarks:

- Emission Level = Read Level + Factor  
Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).  
Margin value = Emission level – Limit value
- 2480 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

<LE 5.2>

EUT Test Condition		Measurement Detail	
Channel	Channel 0	Frequency Range	1 GHz ~ 25 GHz
Input Power	3.7 Vdc	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Charles Hsiao

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	41.51	37.01	4.5	54	-12.49	100	178	Average
2390	51.49	46.99	4.5	74	-22.51	100	178	Peak
2402	98.53	94.01	4.52			100	178	Average
2402	99.15	94.63	4.52			100	178	Peak
4804	41.55	31.2	10.35	54	-12.45	159	345	Average
4804	49.2	38.85	10.35	74	-24.8	159	345	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	41.4	36.9	4.5	54	-12.6	100	26	Average
2390	51.93	47.43	4.5	74	-22.07	100	26	Peak
2402	99.88	95.36	4.52			100	26	Average
2402	100.97	96.45	4.52			100	26	Peak
4804	41.61	31.26	10.35	54	-12.39	124	105	Average
4804	48.78	38.43	10.35	74	-25.22	124	105	Peak

Remarks:

- Emission Level = Read Level + Factor  
Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).  
Margin value = Emission level – Limit value
- 2402 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 19	Frequency Range	1 GHz ~ 25 GHz
Input Power	3.7 Vdc	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Charles Hsiao

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	41.18	36.68	4.5	54	-12.82	100	178	Average
2390	51.51	47.01	4.5	74	-22.49	100	178	Peak
2440	97.66	93.07	4.59			100	178	Average
2440	98.44	93.85	4.59			100	178	Peak
2483.5	41.66	37	4.66	54	-12.34	100	178	Average
2483.5	51.99	47.33	4.66	74	-22.01	100	178	Peak
4880	41.44	31.23	10.21	54	-12.56	140	44	Average
4880	47.8	37.59	10.21	74	-26.2	140	44	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	41.23	36.73	4.5	54	-12.77	100	50	Average
2390	51.88	47.38	4.5	74	-22.12	100	50	Peak
2440	98.64	94.05	4.59			100	50	Average
2440	99.72	95.13	4.59			100	50	Peak
2483.5	41.75	37.09	4.66	54	-12.25	100	50	Average
2483.5	51.84	47.18	4.66	74	-22.16	100	50	Peak
4880	41.49	31.28	10.21	54	-12.51	124	266	Average
4880	49.32	39.11	10.21	74	-24.68	124	266	Peak

Remarks:

- Emission Level = Read Level + Factor  
Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).  
Margin value = Emission level – Limit value
- 2440 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 39	Frequency Range	1 GHz ~ 25 GHz
Input Power	3.7 Vdc	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Charles Hsiao

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2480	97.48	92.84	4.64			100	178	Average
2480	98.09	93.45	4.64			100	178	Peak
2483.5	44.79	40.13	4.66	54	-9.21	100	178	Average
2483.5	53.97	49.31	4.66	74	-20.03	100	178	Peak
4960	41.64	31.28	10.36	54	-12.36	157	8	Average
4960	48.69	38.33	10.36	74	-25.31	157	8	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2480	98.53	93.89	4.64			100	26	Average
2480	99.29	94.65	4.64			100	26	Peak
2483.5	45.33	40.67	4.66	54	-8.67	100	26	Average
2483.5	54.52	49.86	4.66	74	-19.48	100	26	Peak
4960	41.69	31.33	10.36	54	-12.31	162	344	Average
4960	47.05	36.69	10.36	74	-26.95	162	344	Peak

Remarks:

- Emission Level = Read Level + Factor  
Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).  
Margin value = Emission level – Limit value
- 2480 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.



**9 kHz ~ 30 MHz Data:**

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.


**30 MHz ~ 1 GHz Worst-Case Data:**

Mode A


<LE 4.0>

EUT Test Condition		Measurement Detail	
Channel	Channel 19	Frequency Range	30 MHz ~ 1 GHz
Input Power	3.7 Vdc	Detector Function	Peak (PK) Quasi-peak (QP)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Karl Lee

**Horizontal**

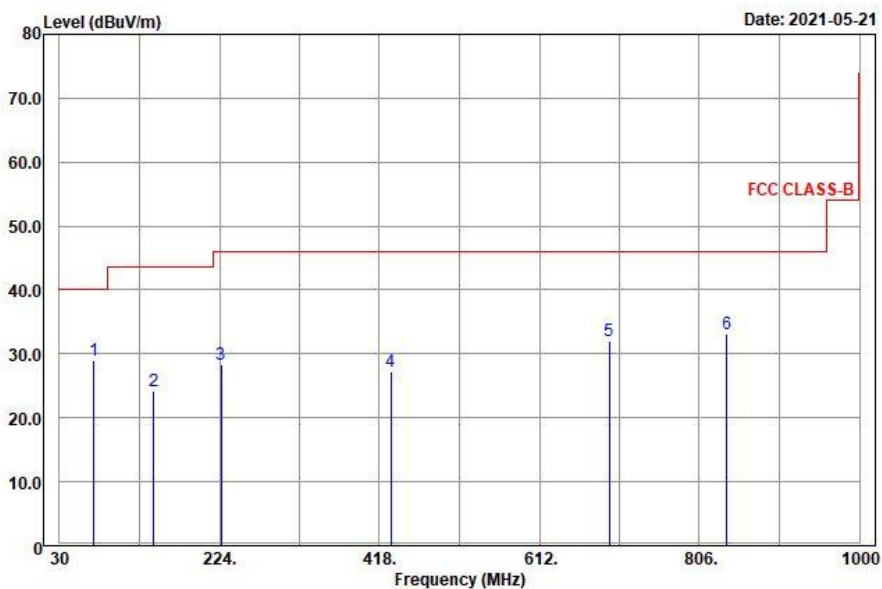

**Vertical**

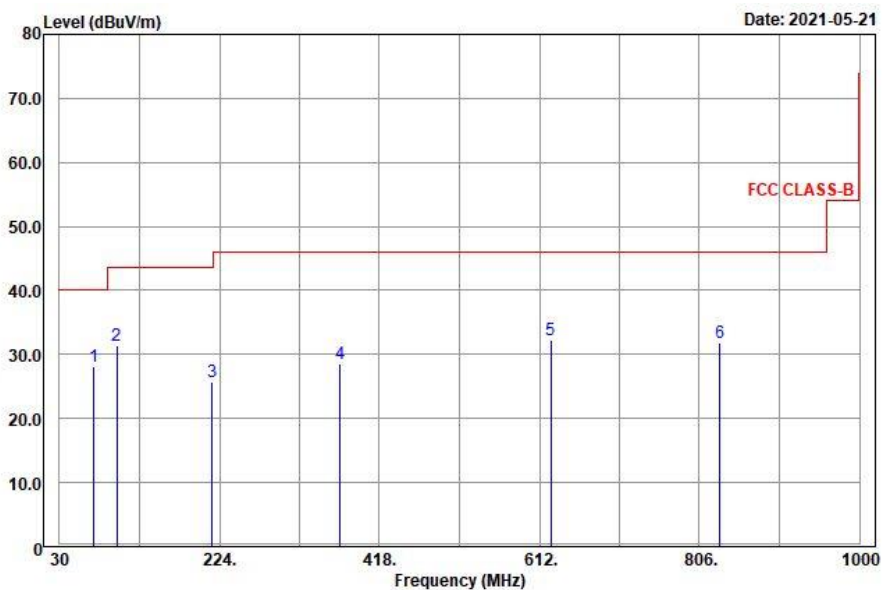

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
71.85	28.99	49.2	-20.21	40	-11.01	155	178	Peak
143.94	24.19	45.22	-21.03	43.5	-19.31	196	236	Peak
225.75	28.33	45.91	-17.58	46	-17.67	184	235	Peak
431.6	27.3	40.82	-13.52	46	-18.7	186	135	Peak
696.9	32.1	41.35	-9.25	46	-13.9	171	115	Peak
839	33.06	40.04	-6.98	46	-12.94	153	268	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
71.85	28.04	48.25	-20.21	40	-11.96	101	174	Peak
99.66	31.28	48.48	-17.2	43.5	-12.22	194	285	Peak
214.95	25.64	43.63	-17.99	43.5	-17.86	252	226	Peak
370.7	28.49	42.87	-14.38	46	-17.51	195	36	Peak
625.5	32.31	42.67	-10.36	46	-13.69	194	172	Peak
831.3	31.8	38.84	-7.04	46	-14.2	135	283	Peak


Remarks:

- Emission Level = Read Level + Factor  
 Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).  
 Margin value = Emission level – Limit value
- The emission levels of other frequencies were very low against the limit.


<LE 5.2>

EUT Test Condition		Measurement Detail	
Channel	Channel 39	Frequency Range	30 MHz ~ 1 GHz
Input Power	3.7 Vdc	Detector Function	Peak (PK) Quasi-peak (QP)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Karl Lee

Horizontal

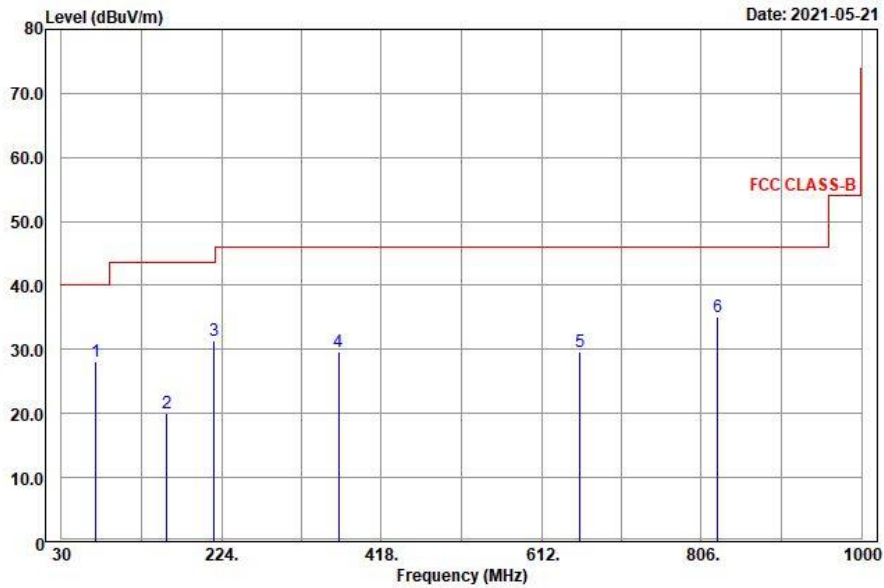

Vertical

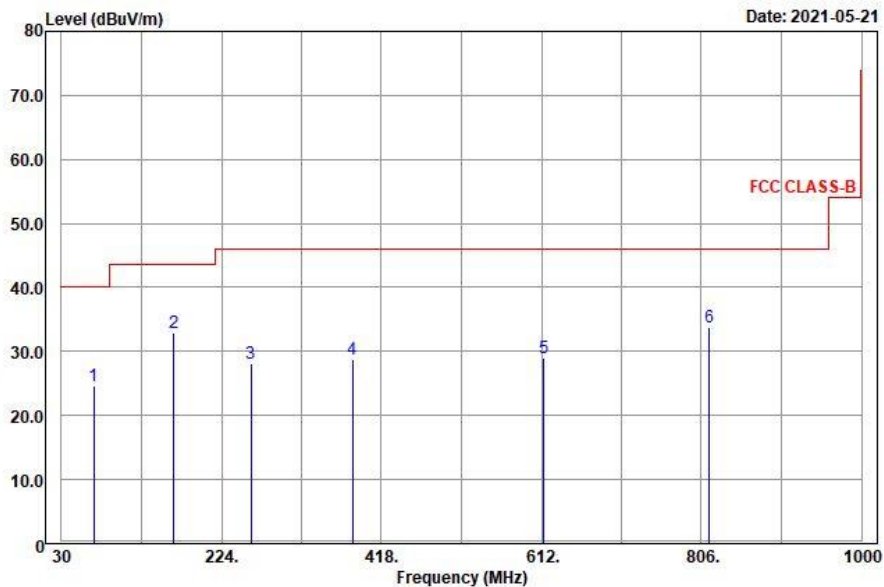

**Antenna Polarity & Test Distance: Horizontal at 3 m**

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
72.12	28.13	48.34	-20.21	40	-11.87	150	27	Peak
157.44	20.04	40.75	-20.71	43.5	-23.46	161	194	Peak
214.95	31.43	49.42	-17.99	43.5	-12.07	263	211	Peak
365.8	29.65	44.12	-14.47	46	-16.35	235	127	Peak
658.4	29.61	39.52	-9.91	46	-16.39	159	322	Peak
825.7	35.16	42.39	-7.23	46	-10.84	108	134	Peak

**Antenna Polarity & Test Distance: Vertical at 3 m**

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
69.42	24.73	44.28	-19.55	40	-15.27	149	125	Peak
166.62	32.99	53.39	-20.4	43.5	-10.51	192	143	Peak
259.77	28.13	44.81	-16.68	46	-17.87	172	114	Peak
383.3	28.76	42.95	-14.19	46	-17.24	258	128	Peak
615	29.02	39.37	-10.35	46	-16.98	125	72	Peak
815.9	33.83	41.26	-7.43	46	-12.17	131	181	Peak


Remarks:

- Emission Level = Read Level + Factor  
 Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).  
 Margin value = Emission level – Limit value
- The emission levels of other frequencies were very low against the limit.


**Mode B**  
**<LE 4.0>**

EUT Test Condition		Measurement Detail	
Channel	Channel 19	Frequency Range	30 MHz ~ 1 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Quasi-peak (QP)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Karl Lee

**Horizontal**

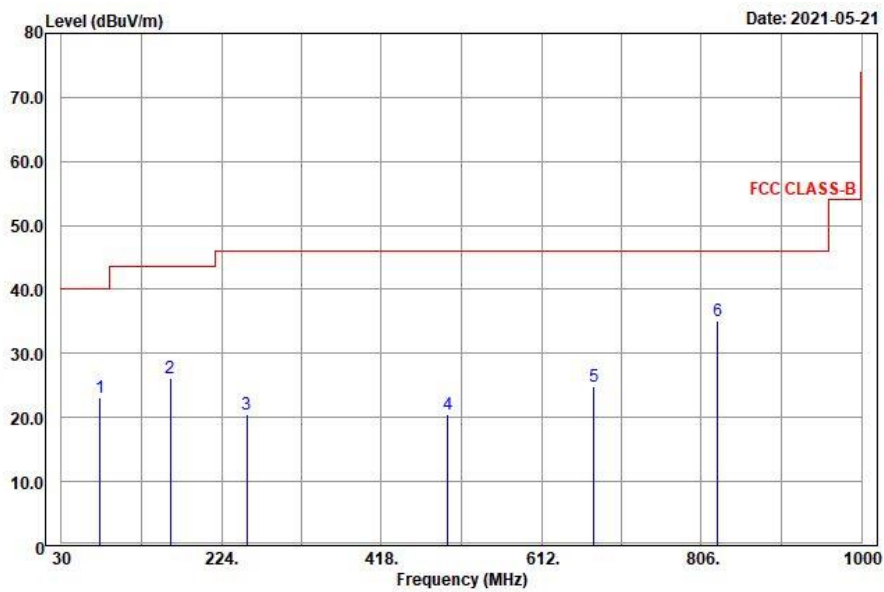

**Vertical**

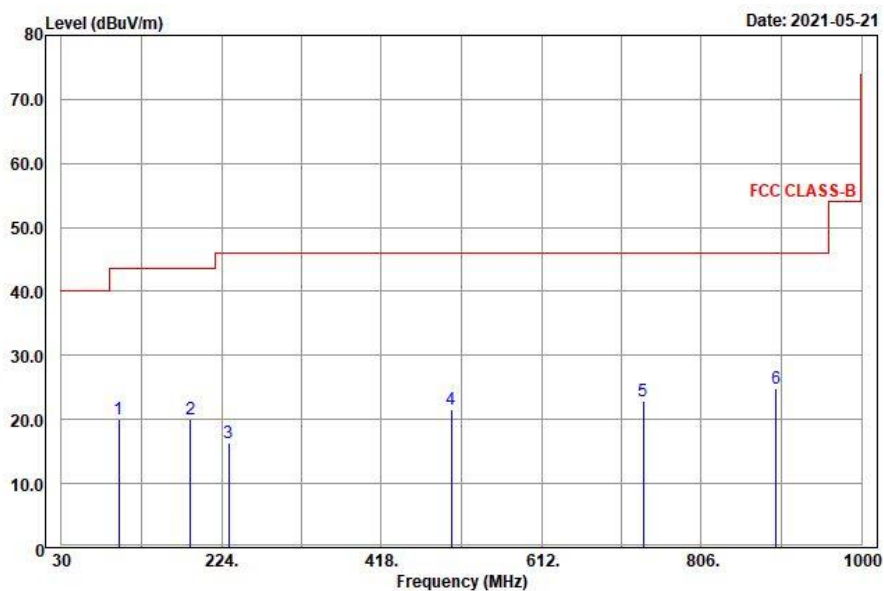

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
76.71	23.15	44.4	-21.25	40	-16.85	184	17	Peak
162.03	26.18	46.73	-20.55	43.5	-17.32	187	226	Peak
254.37	20.49	37.27	-16.78	46	-25.51	126	334	Peak
498.8	20.49	32.82	-12.33	46	-25.51	196	236	Peak
675.9	24.77	34.32	-9.55	46	-21.23	125	72	Peak
825.7	35	42.23	-7.23	46	-11	190	288	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
99.66	20.06	37.26	-17.2	43.5	-23.44	185	74	Peak
186.33	20.13	39.2	-19.07	43.5	-23.37	136	271	Peak
232.77	16.46	33.76	-17.3	46	-29.54	146	121	Peak
503	21.65	33.93	-12.28	46	-24.35	147	356	Peak
735.4	22.86	31.48	-8.62	46	-23.14	156	29	Peak
896.4	24.74	30.72	-5.98	46	-21.26	238	101	Peak

Remarks:

1. Emission Level = Read Level + Factor

Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).


Margin value = Emission level – Limit value

2. The emission levels of other frequencies were very low against the limit.


<LE 5.2>

EUT Test Condition		Measurement Detail	
Channel	Channel 39	Frequency Range	30 MHz ~ 1 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Quasi-peak (QP)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Karl Lee

Horizontal

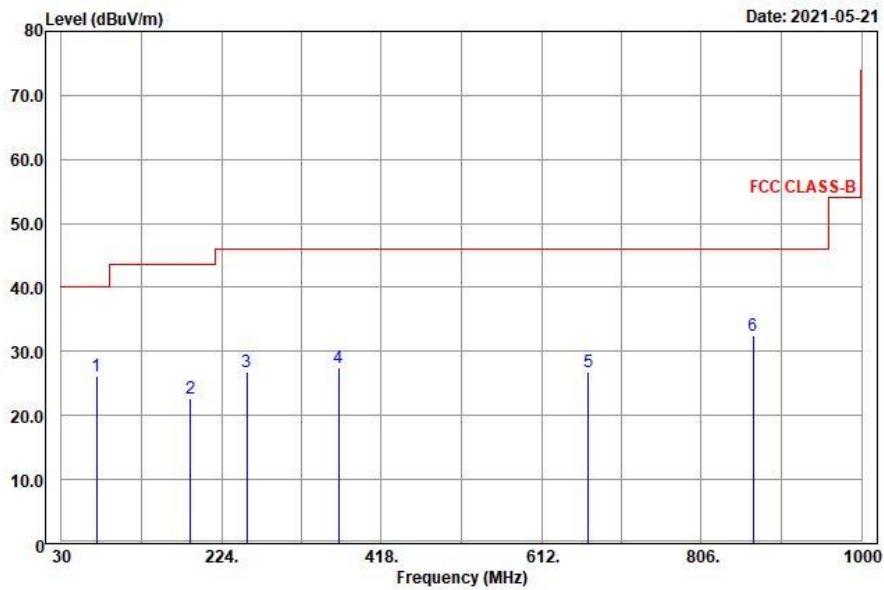

Vertical

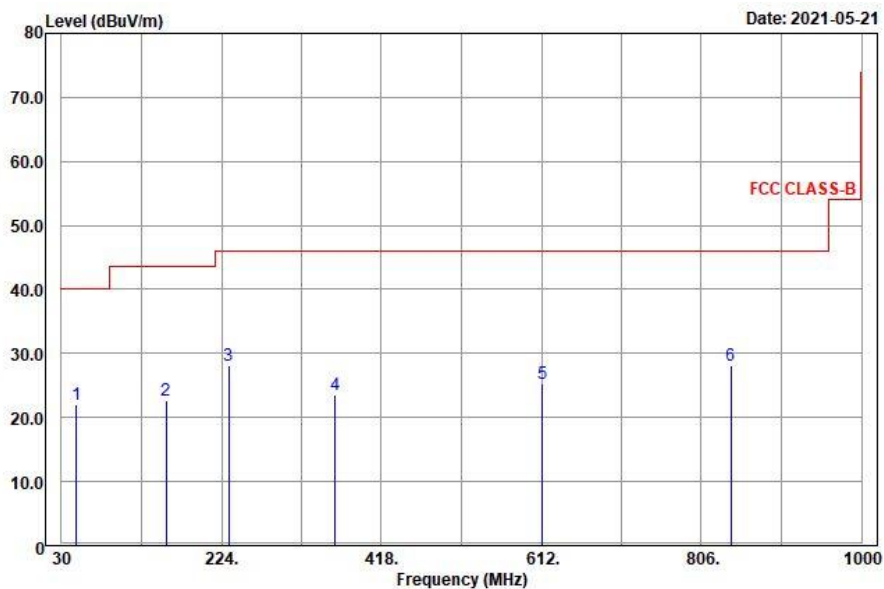

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
72.93	26.16	46.71	-20.55	40	-13.84	169	236	Peak
186.33	22.77	41.84	-19.07	43.5	-20.73	215	173	Peak
255.18	26.74	43.48	-16.74	46	-19.26	181	135	Peak
365.8	27.48	41.95	-14.47	46	-18.52	274	153	Peak
668.9	26.72	36.36	-9.64	46	-19.28	151	191	Peak
869.1	32.41	38.76	-6.35	46	-13.59	157	253	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
48.09	22.03	37.17	-15.14	40	-17.97	226	174	Peak
156.9	22.76	43.47	-20.71	43.5	-20.74	190	28	Peak
232.77	28.2	45.5	-17.3	46	-17.8	128	121	Peak
362.3	23.45	37.99	-14.54	46	-22.55	197	228	Peak
612.9	25.34	35.77	-10.43	46	-20.66	125	336	Peak
841.8	28.13	35.06	-6.93	46	-17.87	157	25	Peak

Remarks:

1. Emission Level = Read Level + Factor

Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).

Margin value = Emission level – Limit value


2. The emission levels of other frequencies were very low against the limit.




Mode C  
<LE 4.0>

EUT Test Condition		Measurement Detail	
Channel	Channel 19	Frequency Range	30 MHz ~ 1 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Quasi-peak (QP)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Karl Lee

Horizontal

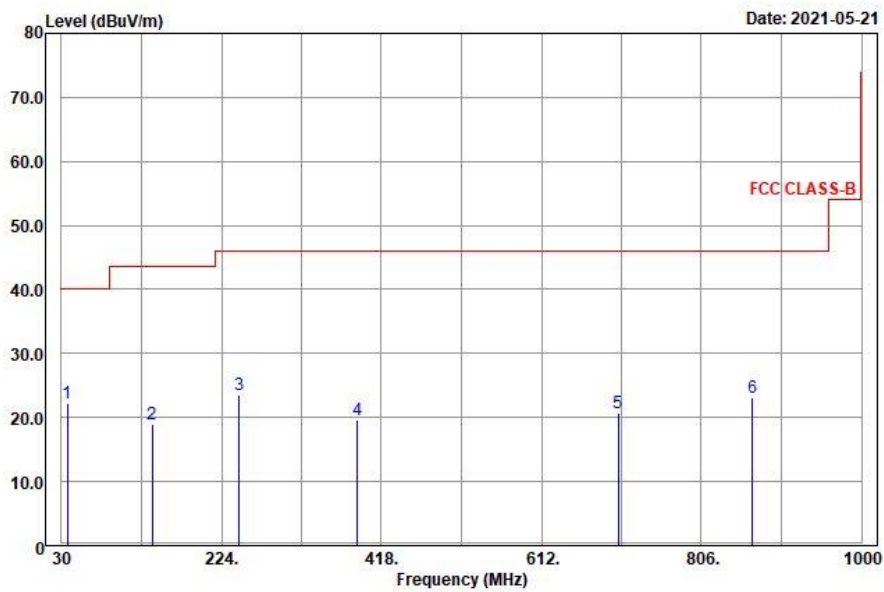

Vertical

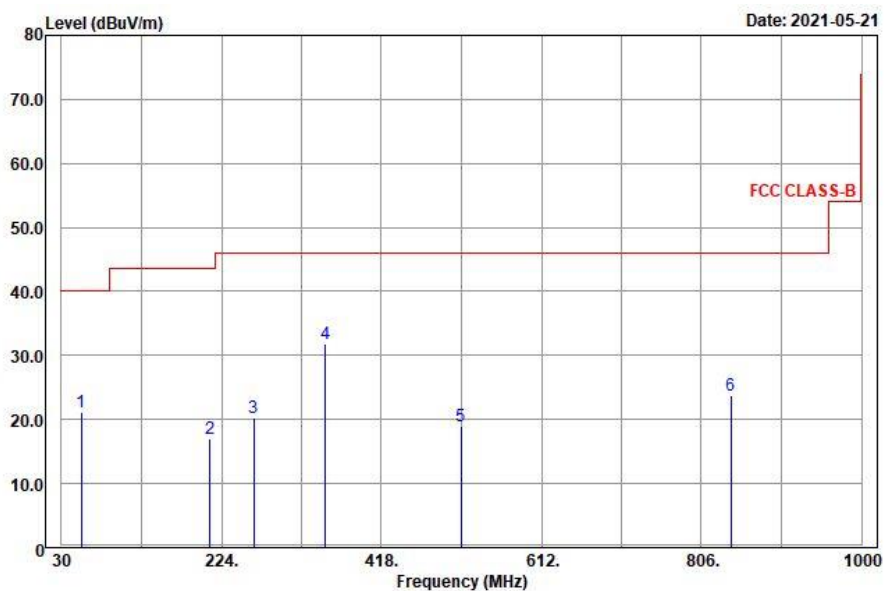

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
37.56	22.33	39.11	-16.78	40	-17.67	145	67	Peak
140.16	18.88	39.89	-21.01	43.5	-24.62	203	273	Peak
245.19	23.44	40.37	-16.93	46	-22.56	194	225	Peak
388.9	19.52	33.63	-14.11	46	-26.48	147	253	Peak
705.3	20.8	29.93	-9.13	46	-25.2	199	35	Peak
867.7	23.02	29.39	-6.37	46	-22.98	164	184	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
54.03	21.08	36.51	-15.43	40	-18.92	195	111	Peak
210.36	17.09	35.23	-18.14	43.5	-26.41	185	143	Peak
263.28	20.18	36.82	-16.64	46	-25.82	168	304	Peak
349.7	31.75	46.47	-14.72	46	-14.25	131	15	Peak
514.9	19.06	31.21	-12.15	46	-26.94	194	175	Peak
841.8	23.67	30.6	-6.93	46	-22.33	138	226	Peak


Remarks:

- Emission Level = Read Level + Factor  
Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).  
Margin value = Emission level – Limit value
- The emission levels of other frequencies were very low against the limit.


<LE 5.2>

EUT Test Condition		Measurement Detail	
Channel	Channel 39	Frequency Range	30 MHz ~ 1 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Quasi-peak (QP)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Karl Lee

Horizontal

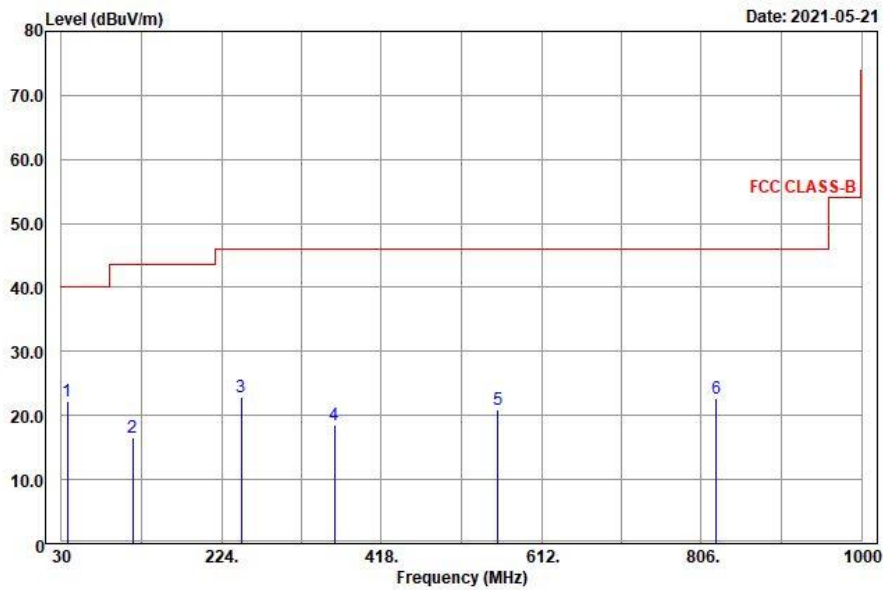

Vertical

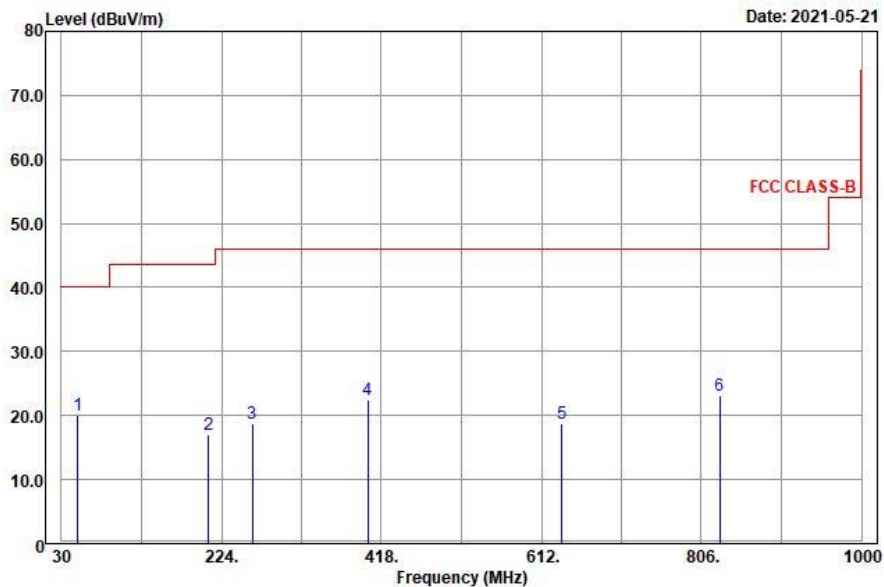

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
37.56	22.2	38.98	-16.78	40	-17.8	132	351	Peak
116.4	16.65	35.17	-18.52	43.5	-26.85	166	127	Peak
248.16	22.95	39.82	-16.87	46	-23.05	264	175	Peak
360.9	18.61	33.18	-14.57	46	-27.39	146	293	Peak
559.7	20.95	32.36	-11.41	46	-25.05	187	151	Peak
824.3	22.7	29.95	-7.25	46	-23.3	132	253	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
49.98	20.01	35.17	-15.16	40	-19.99	149	227	Peak
208.2	17	35.15	-18.15	43.5	-26.5	150	236	Peak
261.66	18.74	35.39	-16.65	46	-27.26	249	122	Peak
401.5	22.39	36.3	-13.91	46	-23.61	181	176	Peak
636.7	18.75	29.08	-10.33	46	-27.25	159	236	Peak
828.5	23.08	30.22	-7.14	46	-22.92	291	121	Peak

Remarks:

1. Emission Level = Read Level + Factor

Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).

Margin value = Emission level – Limit value

2. The emission levels of other frequencies were very low against the limit.

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note: 1. The lower limit shall apply at the transition frequencies.  
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

### 4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESR3	102783	Dec. 21, 2020	Dec. 20, 2021
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond2-01	Sep. 04, 2020	Sep. 03, 2021
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Jan. 28, 2021	Jan. 27, 2022
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Aug. 18, 2020	Aug. 17, 2021
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in HwaYa Shielded Room 2 (Conduction 2).  
 3. The VCCI Site Registration No. is C-12047.

### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

**Note:** The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz - 30 MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

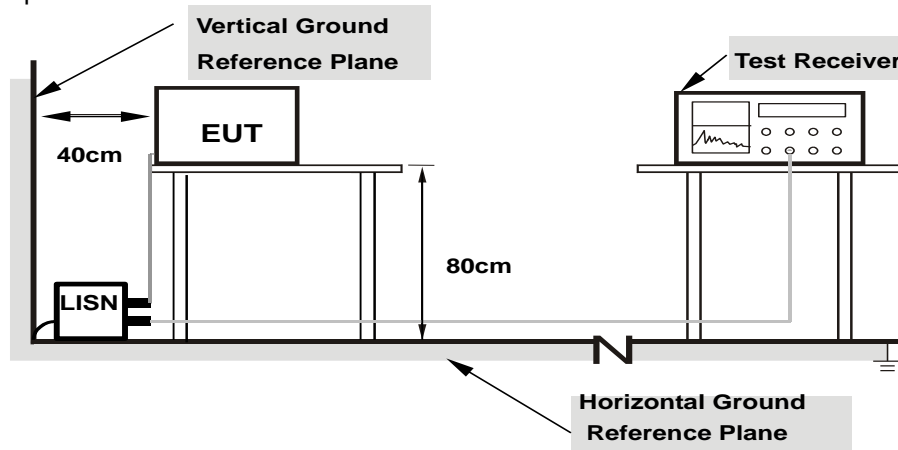

**Note: 1.Support units were connected to second LISN.  
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80  
from other units and other metal planes**

#### 4.2.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Set the EUT under transmission condition continuously at specific channel frequency.

4.2.7 Test Results

<LE 4.0> & <LE 5.2>


Mode B

<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	25°C, 75%RH
<b>Tested by</b>	Edison Lee	<b>Test Date</b>	2021/6/29

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16564	10.10	30.79	18.88	40.89	28.98	65.18	55.18	-24.29	-26.20
2	0.22820	10.13	28.03	5.96	38.16	16.09	62.51	52.51	-24.35	-36.42
3	0.46669	10.19	32.27	28.04	42.46	38.23	56.57	46.57	-14.11	-8.34
4	0.92809	10.25	20.87	15.41	31.12	25.66	56.00	46.00	-24.88	-20.34
5	4.16557	10.37	11.79	1.36	22.16	11.73	56.00	46.00	-33.84	-34.27
6	21.66673	10.62	18.22	4.59	28.84	15.21	60.00	50.00	-31.16	-34.79

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

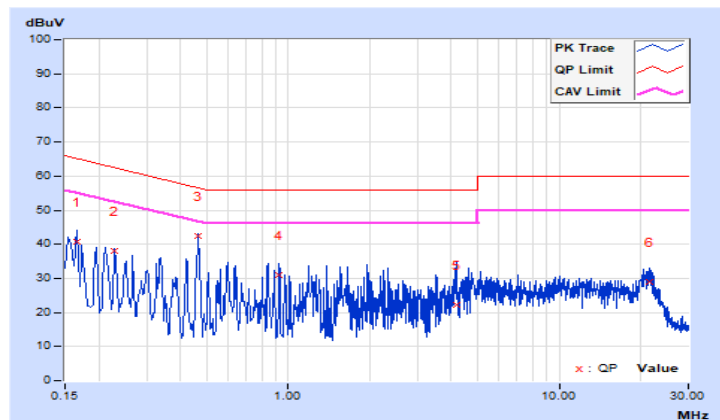


<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	25°C, 75%RH
<b>Tested by</b>	Edison Lee	<b>Test Date</b>	2021/6/29

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16955	10.10	30.83	25.26	40.93	35.36	64.98	54.98	-24.05	-19.62
2	0.21226	10.12	30.67	22.25	40.79	32.37	63.12	53.12	-22.33	-20.75
3	0.30249	10.16	22.95	12.22	33.11	22.38	60.17	50.17	-27.06	-27.79
4	0.46280	10.21	36.05	30.27	46.26	40.48	56.64	46.64	-10.38	-6.16
5	0.84207	10.26	24.60	19.09	34.86	29.35	56.00	46.00	-21.14	-16.65
6	1.69445	10.31	20.67	12.76	30.98	23.07	56.00	46.00	-25.02	-22.93

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

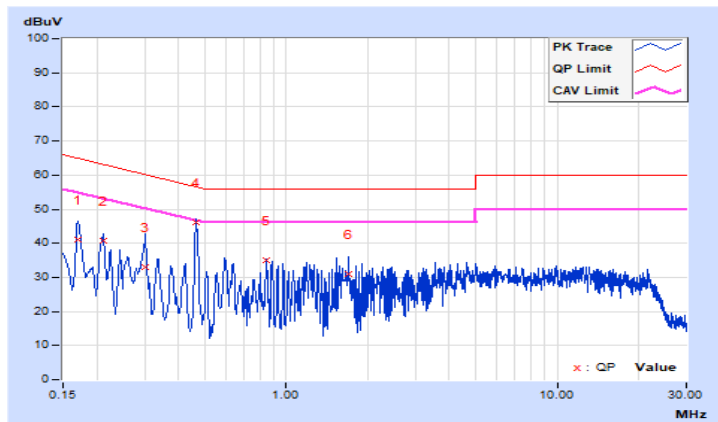




**Mode C**

<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	25°C, 75%RH
<b>Tested by</b>	Edison Lee	<b>Test Date</b>	2021/6/29

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18075	10.11	28.66	10.89	38.77	21.00	64.45	54.45	-25.68	-33.45
2	0.21256	10.12	30.69	17.42	40.81	27.54	63.10	53.10	-22.29	-25.56
3	0.46280	10.19	27.84	26.85	38.03	37.04	56.64	46.64	-18.61	-9.60
4	0.78342	10.23	19.54	2.01	29.77	12.24	56.00	46.00	-26.23	-33.76
5	1.30736	10.27	19.26	11.68	29.53	21.95	56.00	46.00	-26.47	-24.05
6	3.83713	10.36	16.33	3.14	26.69	13.50	56.00	46.00	-29.31	-32.50

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

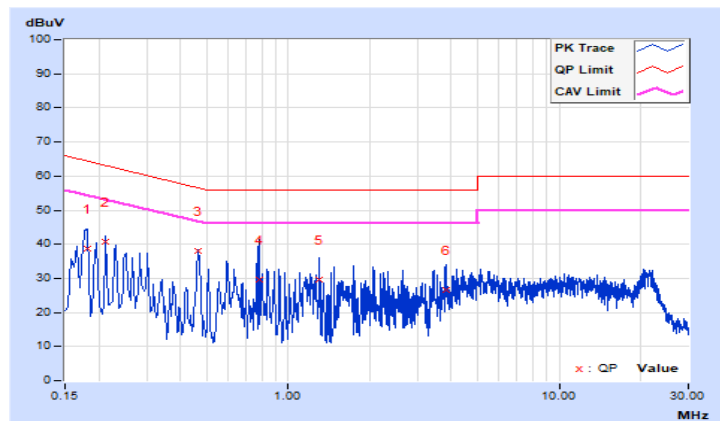


<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	25°C, 75%RH
<b>Tested by</b>	Edison Lee	<b>Test Date</b>	2021/6/29

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16955	10.10	30.58	23.30	40.68	33.40	64.98	54.98	-24.30	-21.58
<b>2</b>	<b>0.46280</b>	<b>10.21</b>	<b>35.87</b>	<b>30.84</b>	<b>46.08</b>	<b>41.05</b>	<b>56.64</b>	<b>46.64</b>	<b>-10.56</b>	<b>-5.59</b>
3	0.60356	10.23	22.86	11.63	33.09	21.86	56.00	46.00	-22.91	-24.14
4	0.83425	10.26	23.27	13.02	33.53	23.28	56.00	46.00	-22.47	-22.72
5	2.02680	10.32	19.62	11.37	29.94	21.69	56.00	46.00	-26.06	-24.31
6	2.82835	10.37	20.10	12.14	30.47	22.51	56.00	46.00	-25.53	-23.49

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

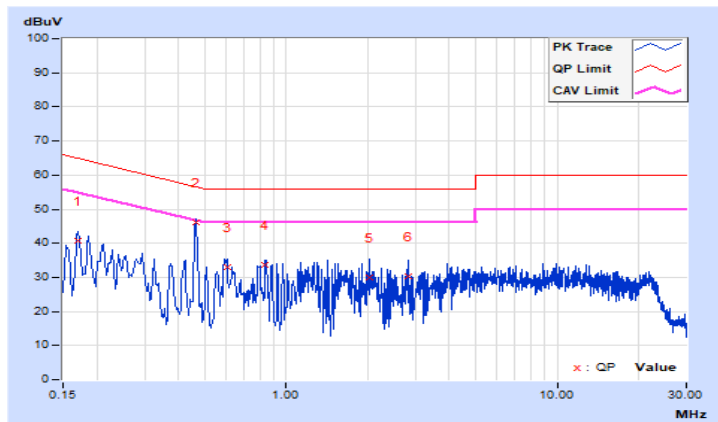


### 4.3 6 dB Bandwidth Measurement

#### 4.3.1 Limits of 6 dB Bandwidth Measurement

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 Test Setup

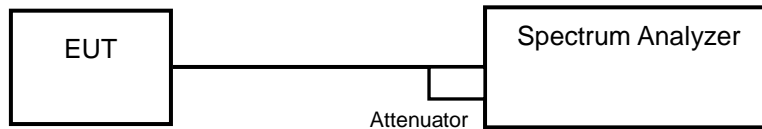

#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 4.3.5 Deviation from Test Standard

No deviation.


#### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Results


<LE 4.0>

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	0.72	0.5	Pass
19	2440	0.72	0.5	Pass
39	2480	0.71	0.5	Pass

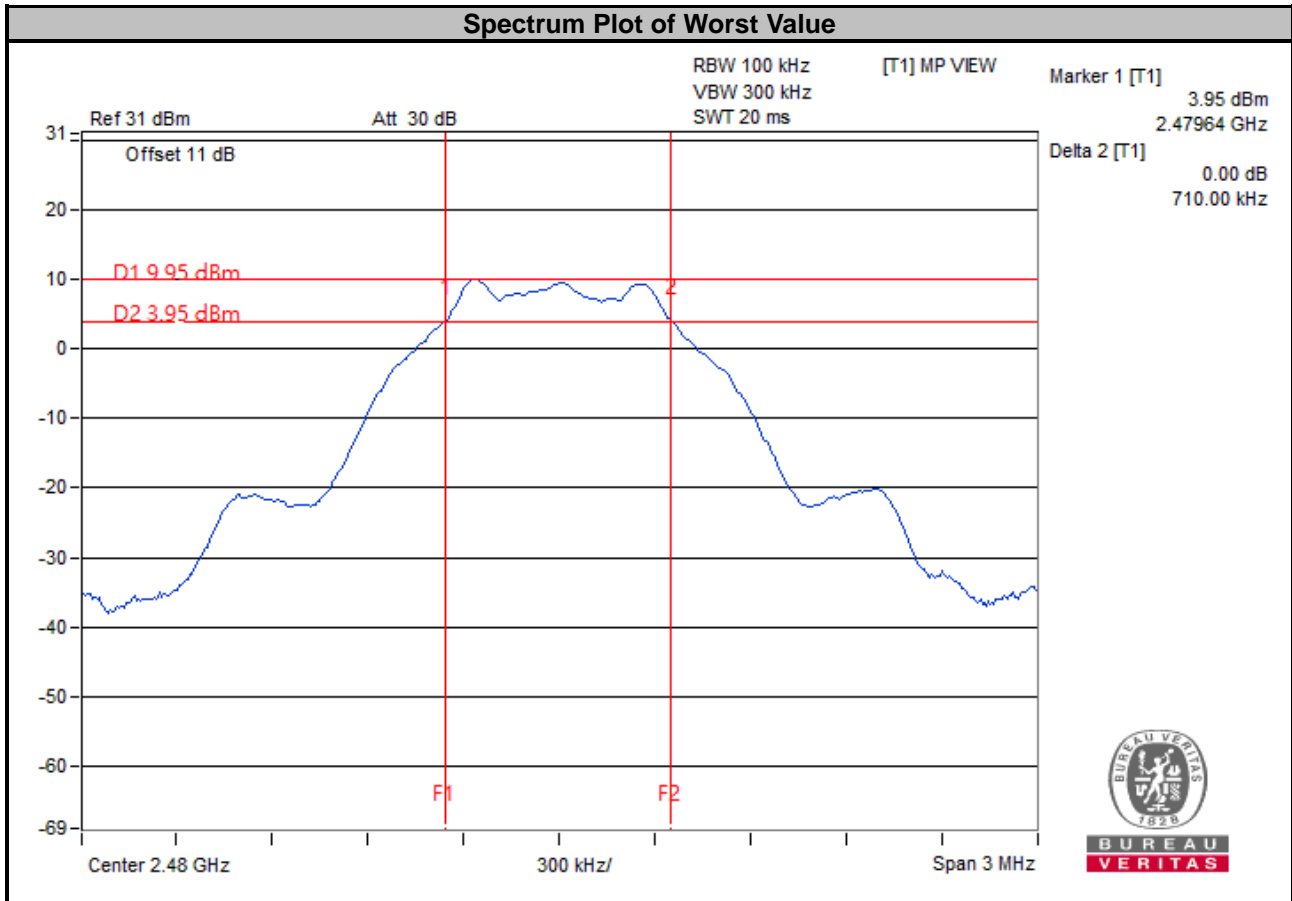


<LE 5.2>

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	1.26	0.5	Pass
19	2440	1.26	0.5	Pass
39	2480	1.26	0.5	Pass

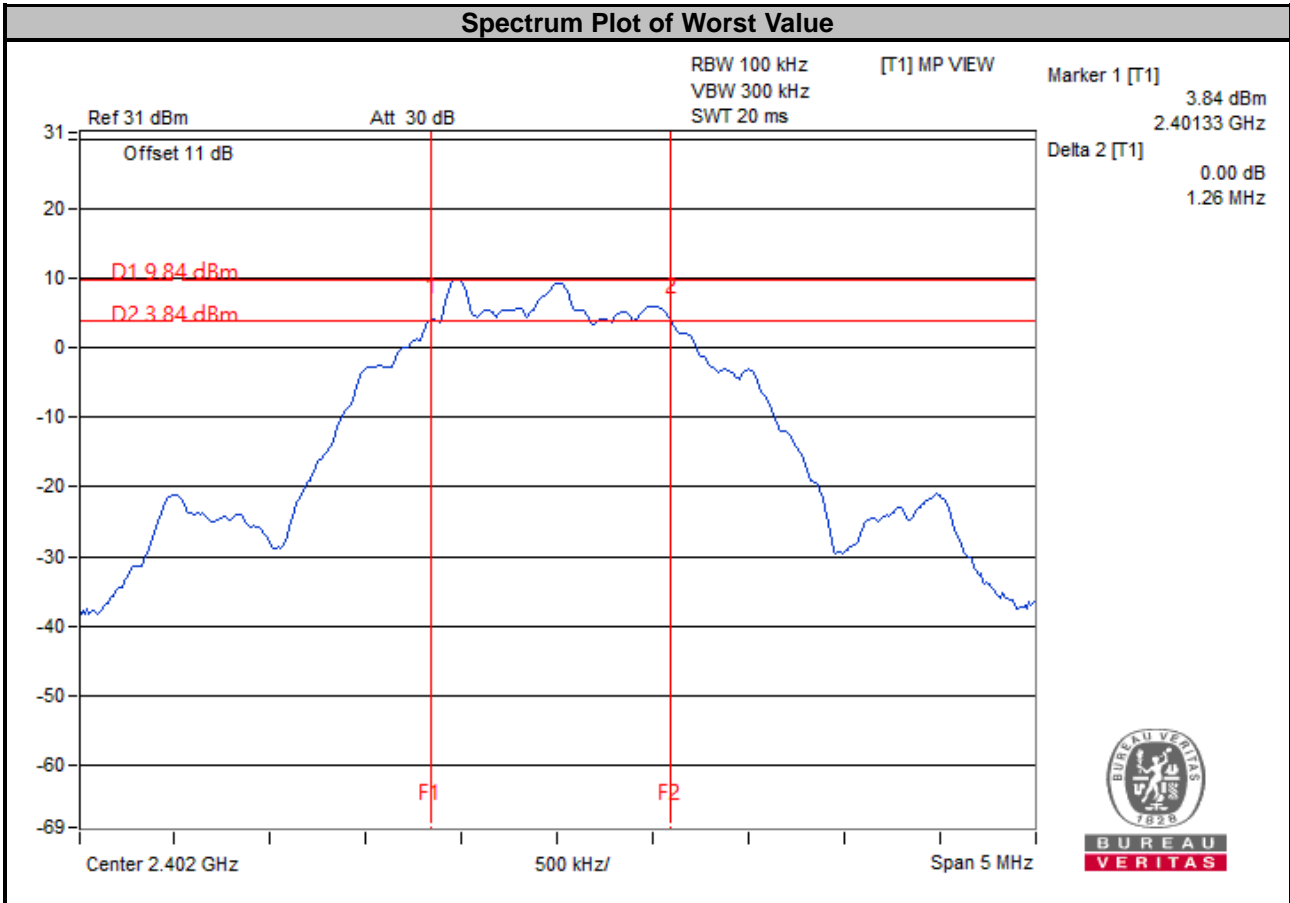

## 4.4 Occupied Bandwidth Measurement

### 4.4.1 Test Setup

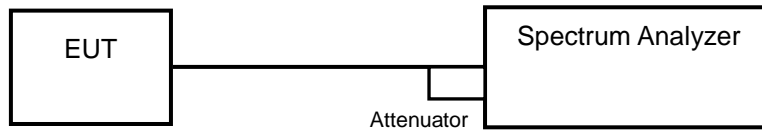

### 4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1 % to 5 % of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

### 4.4.4 Deviation from Test Standard

No deviation.


### 4.4.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.4.6 Test Results

<LE 4.0>

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Pass / Fail
0	2402	1.03	Pass
19	2440	1.04	Pass
39	2480	1.04	Pass

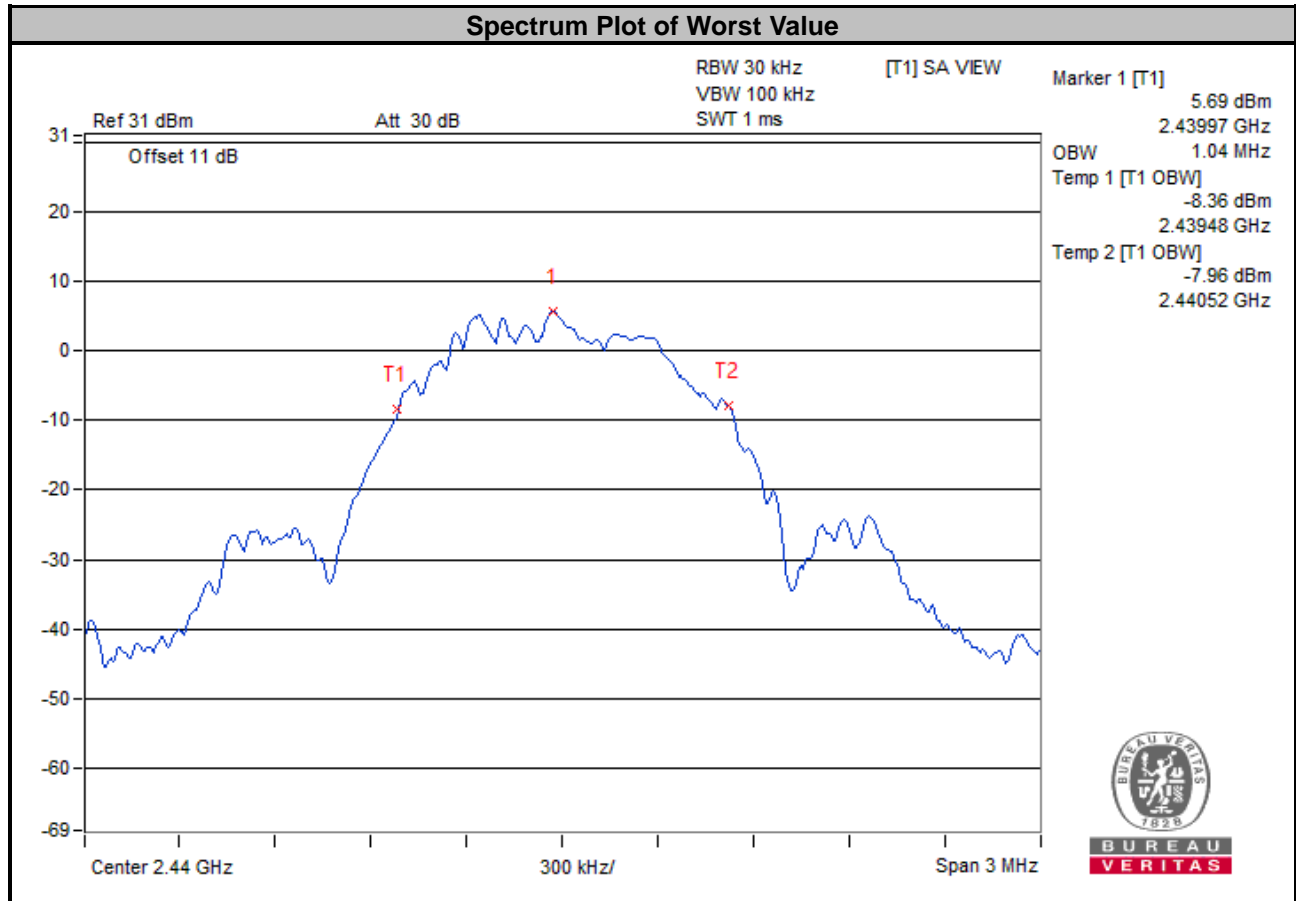






## 4.5 Conducted Output Power Measurement

### 4.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

### 4.5.2 Test Setup

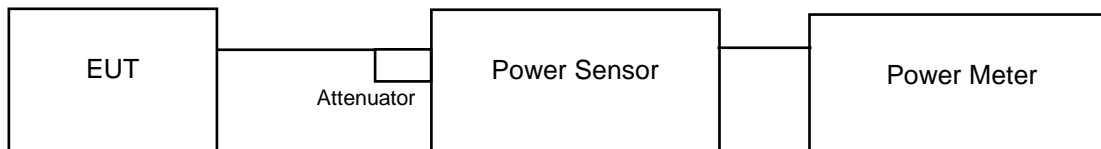

### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

### 4.5.5 Deviation from Test Standard

No deviation.

### 4.5.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.5.7 Test Results

##### <LE 4.0>

Channel	Freq. (MHz)	Peak Power		Average Power		Power Limit (dBm)	Pass / Fail
		(mW)	(dBm)	(mW)	(dBm)		
0	2402	10.233	10.10	10.046	10.02	30	Pass
19	2440	10.257	10.11	10.139	10.06	30	Pass
39	2480	10.186	10.08	10.093	10.04	30	Pass

##### <LE 5.2>


Channel	Freq. (MHz)	Peak Power		Average Power		Power Limit (dBm)	Pass / Fail
		(mW)	(dBm)	(mW)	(dBm)		
0	2402	10.116	10.05	9.84	9.93	30	Pass
19	2440	10.186	10.08	9.931	9.97	30	Pass
39	2480	10.093	10.04	9.863	9.94	30	Pass

## 4.6 Power Spectral Density Measurement

### 4.6.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 4.6.2 Test Setup

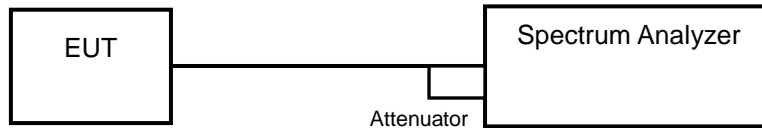

### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set the VBW  $\geq 3 \times \text{RBW}$ .
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

### 4.6.5 Deviation from Test Standard

No deviation.


### 4.6.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.6.7 Test Results


<LE 4.0>

Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	2402	-5.68	8	Pass
19	2440	-5.56	8	Pass
39	2480	-5.64	8	Pass

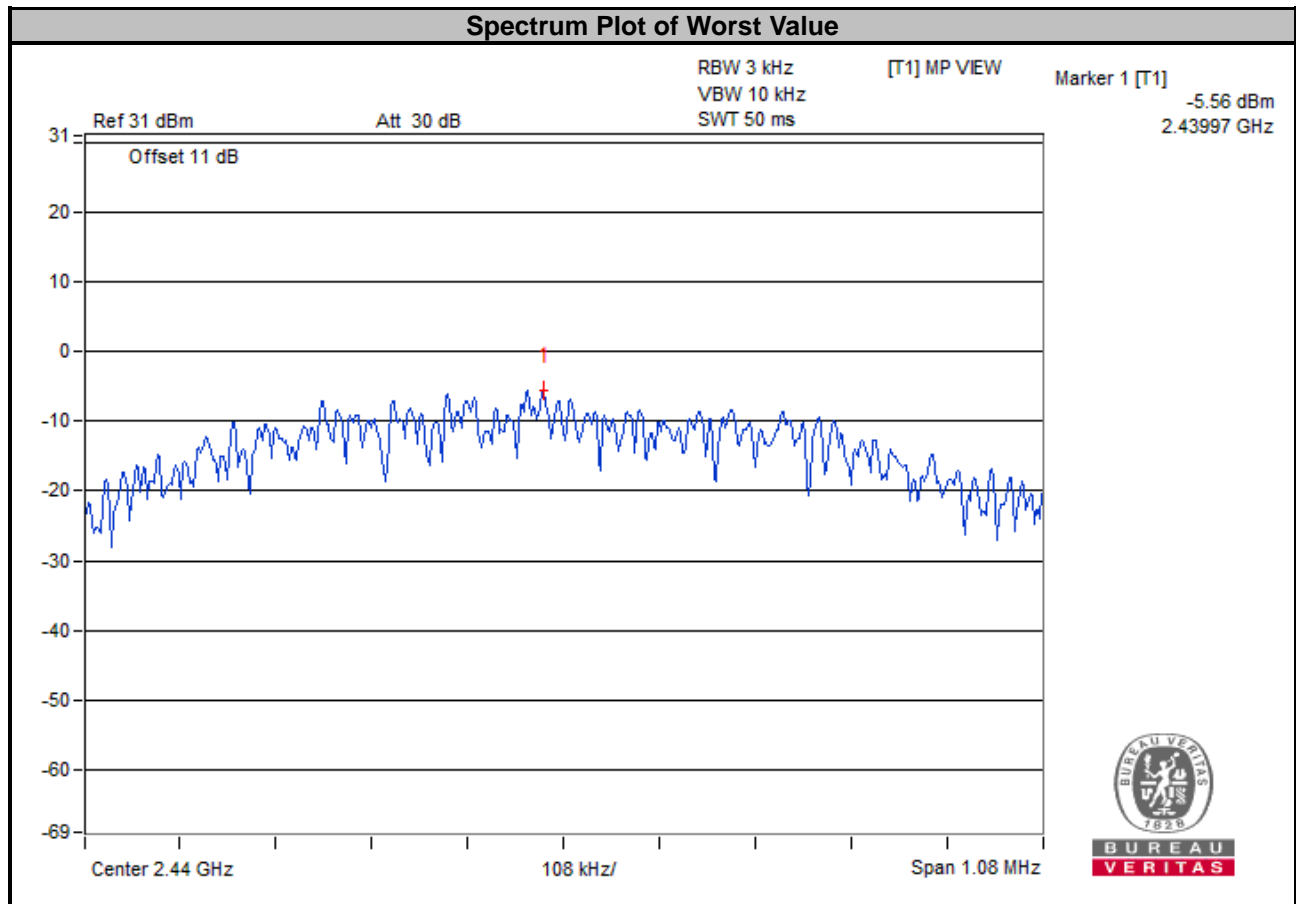

<LE 5.2>

Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	2402	-9.15	8	Pass
19	2440	-8.87	8	Pass
39	2480	-9.03	8	Pass

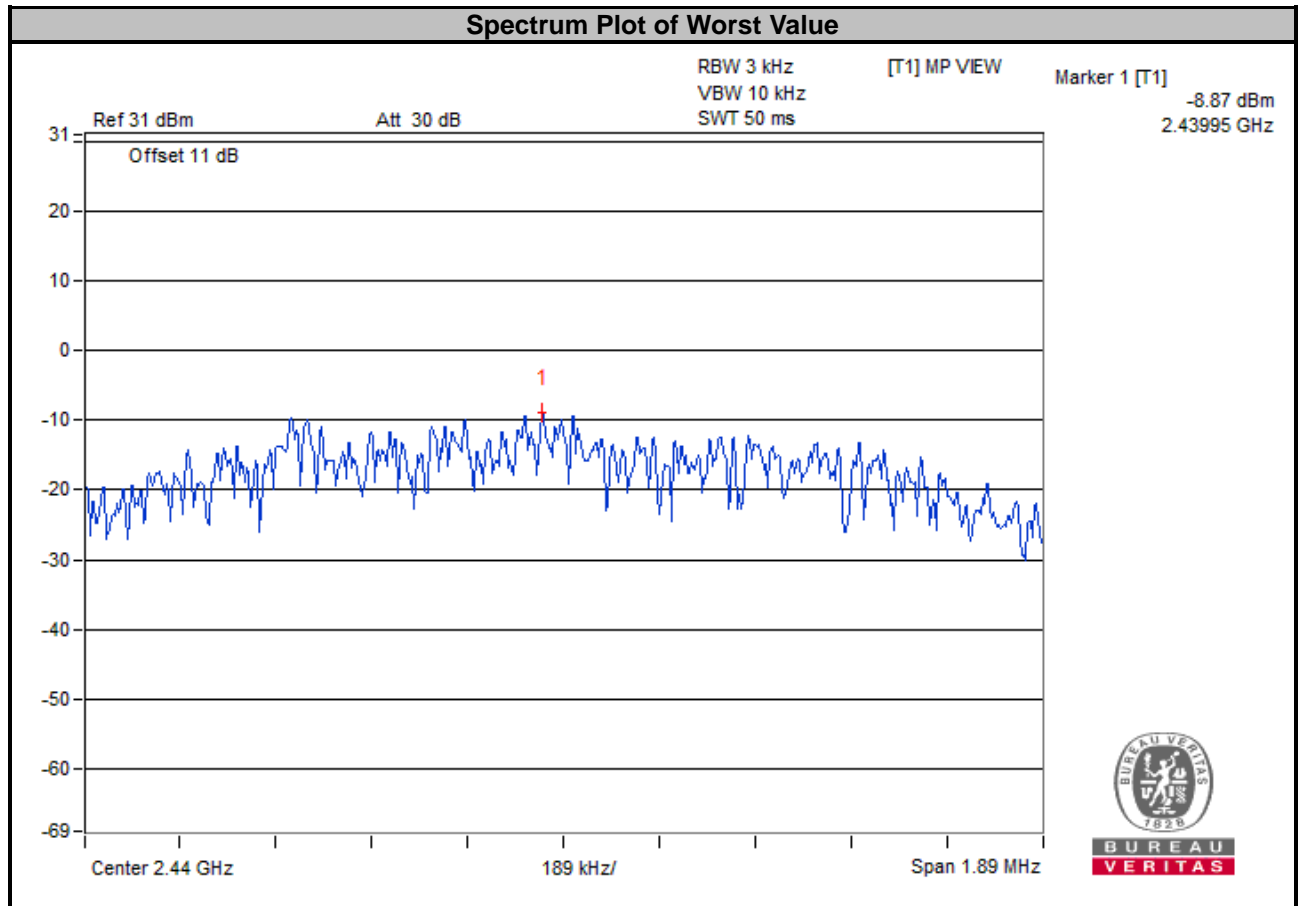

## 4.7 Conducted Out of Band Emission Measurement

### 4.7.1 Limits of Conducted Out of Band Emission Measurement

Below  $-20$  dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

### 4.7.2 Test Setup



### 4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.7.4 Test Procedure

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

#### MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

### 4.7.5 Deviation from Test Standard

No deviation.


### 4.7.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


### 4.7.7 Test Results

The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20 dB offset below D1. It shows compliance with the requirement.


<LE 4.0>

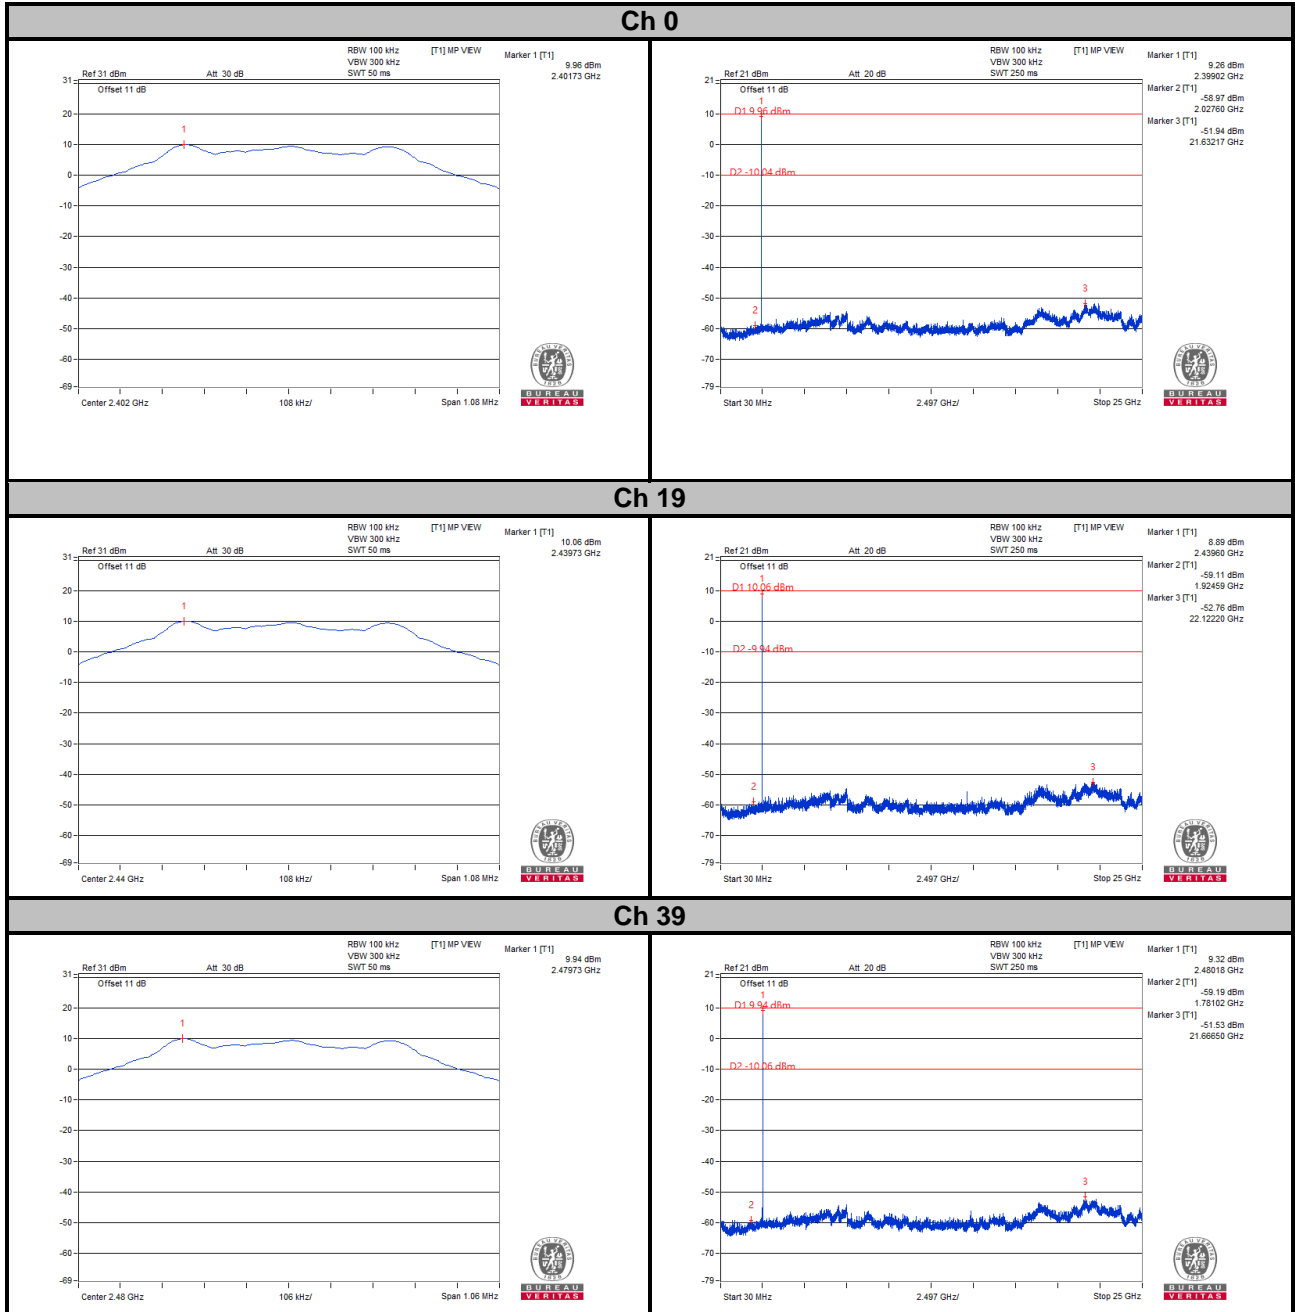

### Ch 0 Band Edge

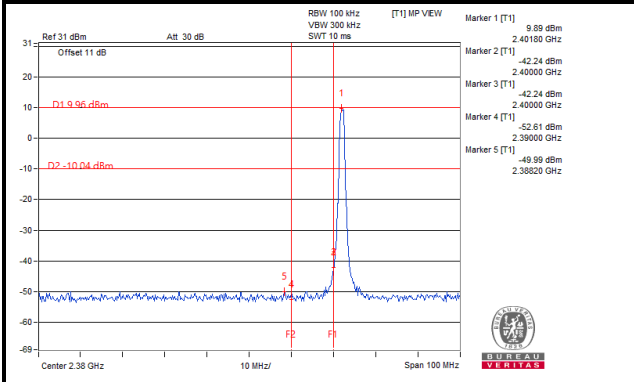



### Ch 39 Band Edge

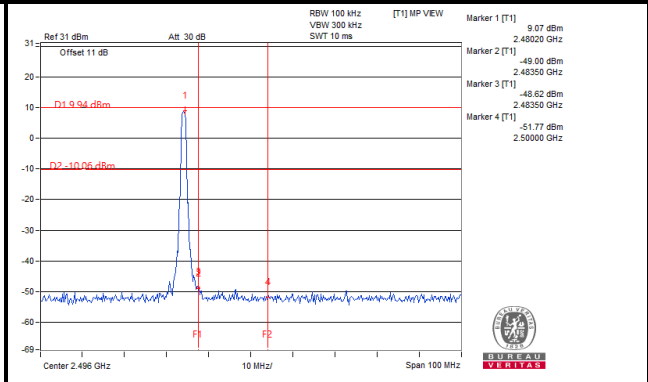





<LE 5.2>



### Ch 0

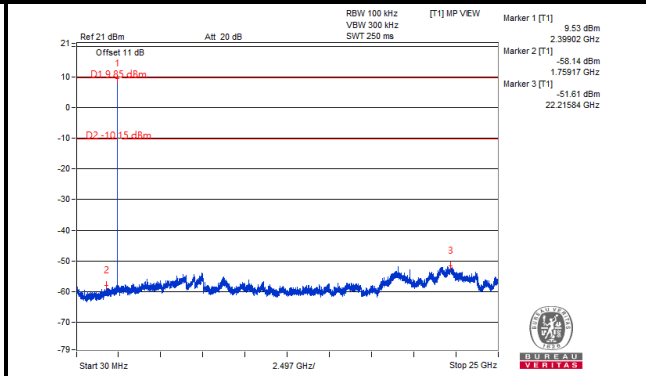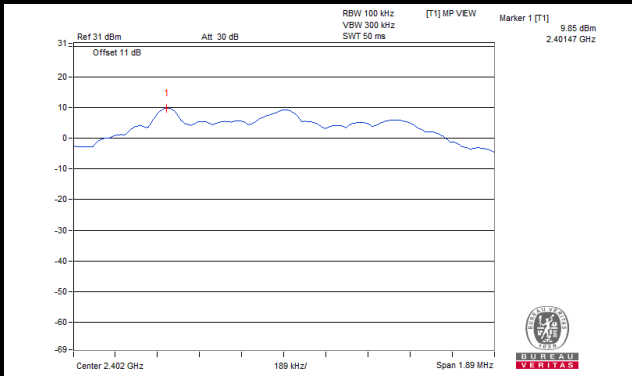


### Ch 19

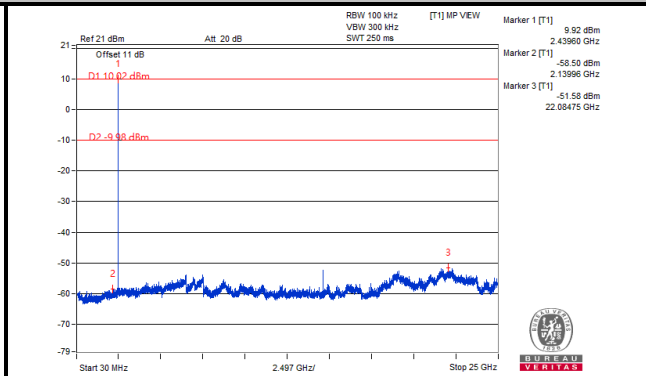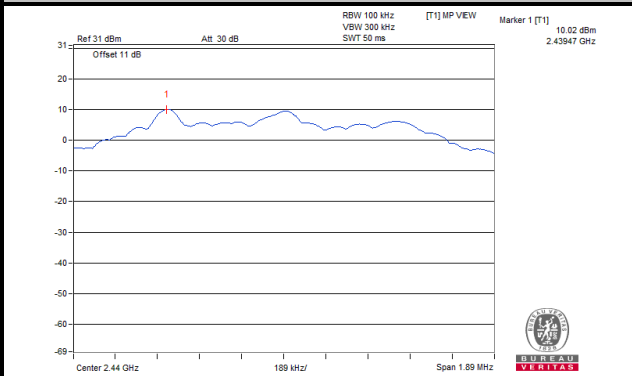


### Ch 39

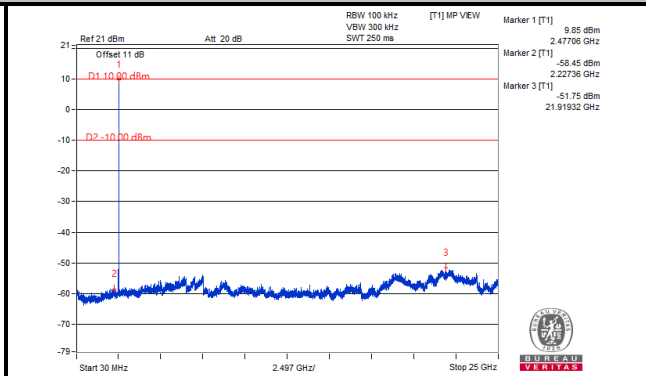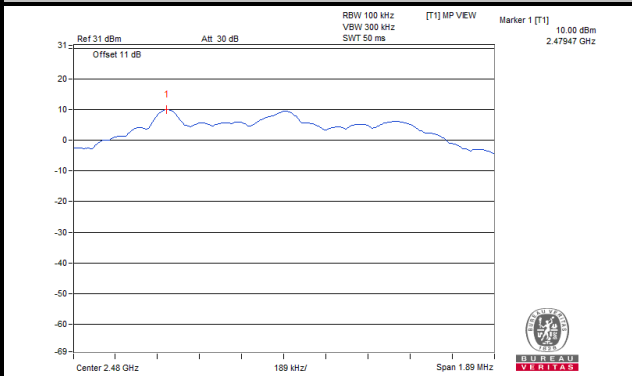

### Ch 0 Band Edge

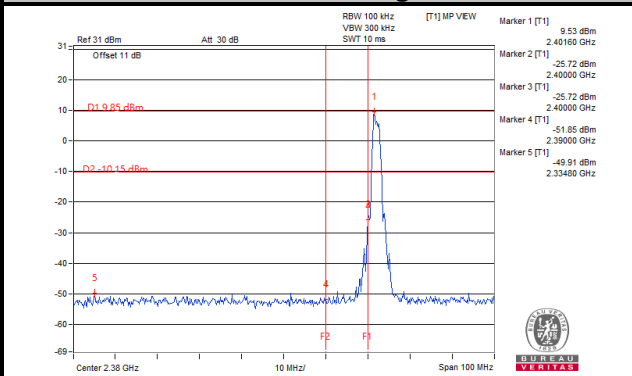

### Ch 39 Band Edge

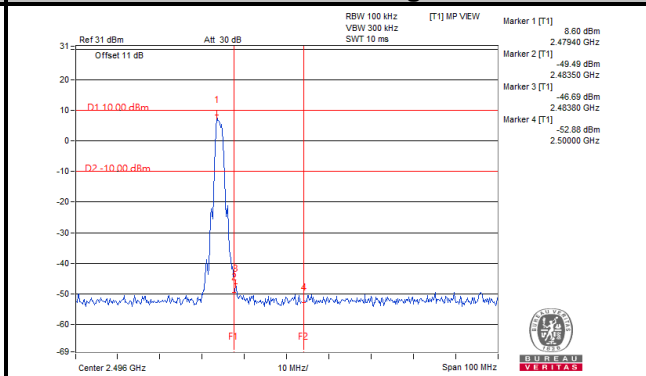

## 5 Photographs of the Test Configuration

Please refer to the attached file (Reference no.: RFBCEE-WTW-P21050412-1 (TSup photo\_right earbud)).

## 6 Construction Photos of EUT


Please refer to the attached file (BCEE-WTW-P21050412 (EUT photo)).

# Annex A- Band Edge Measurement


<LE 4.0>

## BT\_LE-1M Channel 0


**Horizontal (Peak)**

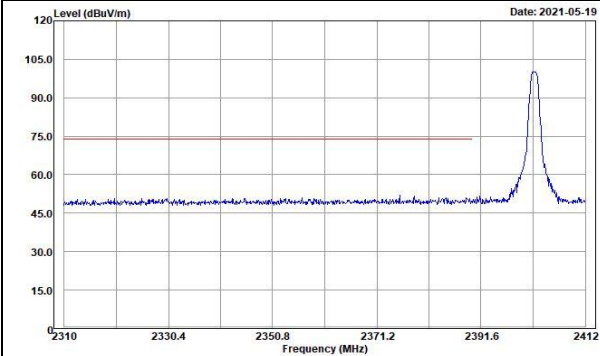


**Horizontal (Average)**

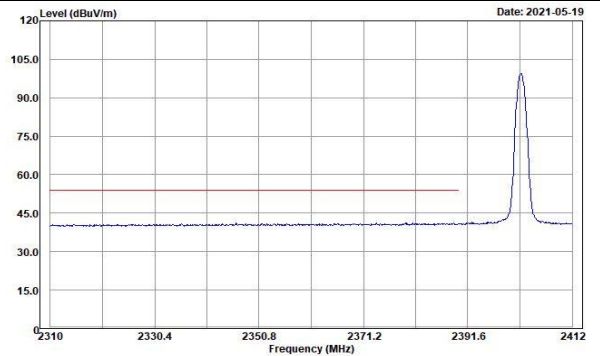

**Vertical (Peak)**

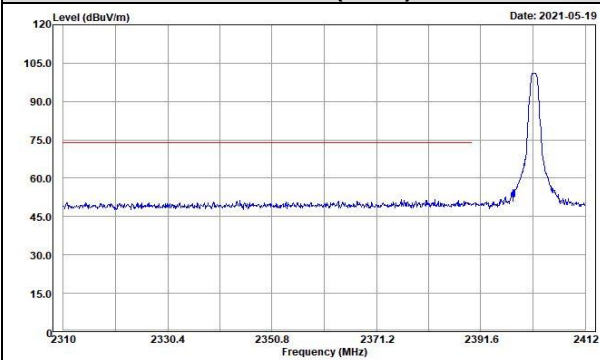


**Vertical (Average)**

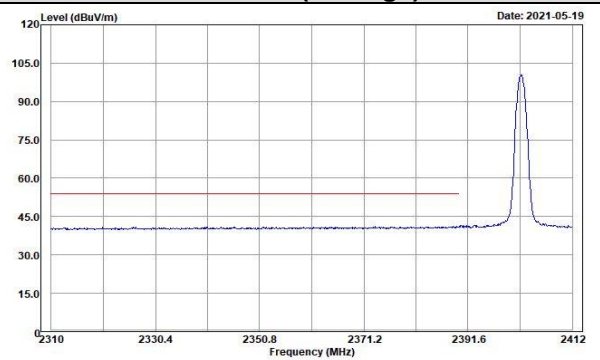


## BT\_LE-1M Channel 19


**Horizontal (Peak)**

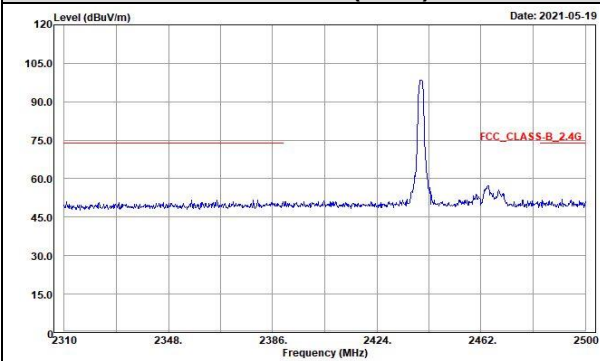


**Horizontal (Average)**

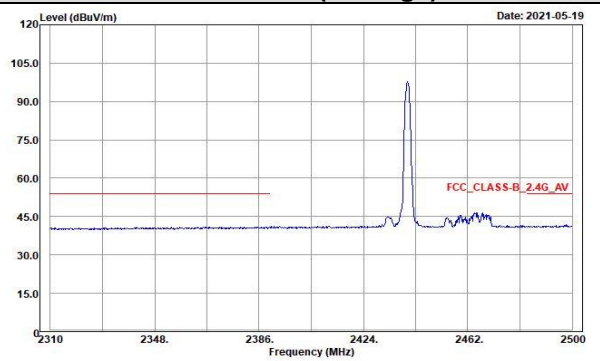

**Vertical (Peak)**

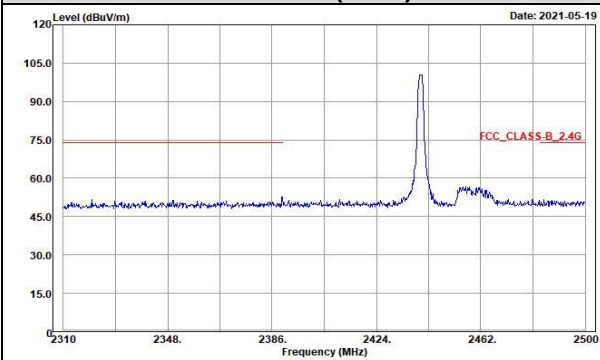


**Vertical (Average)**

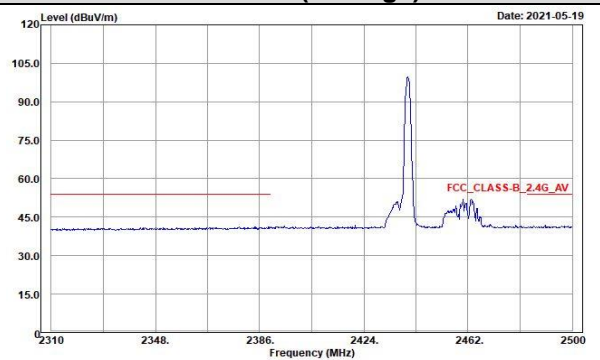


### BT\_LE-1M Channel 39


**Horizontal (Peak)**

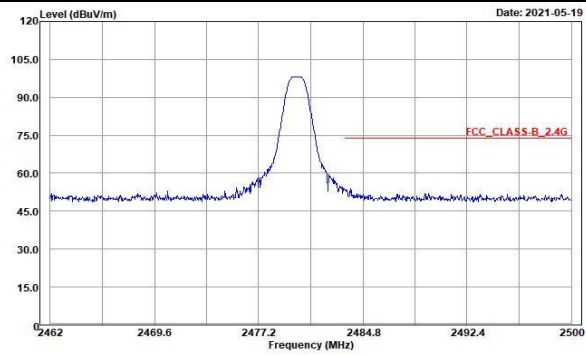


**Horizontal (Average)**

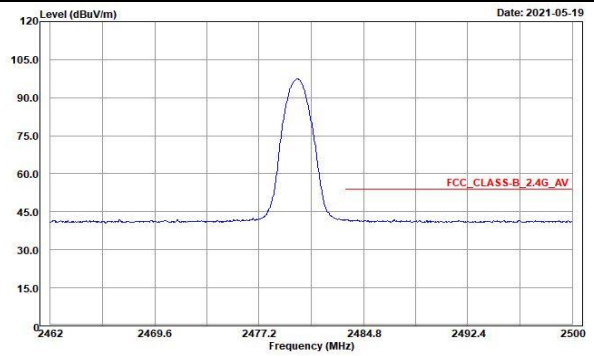

**Vertical (Peak)**


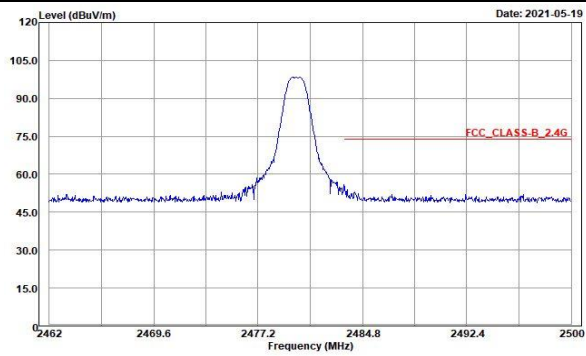


**Vertical (Average)**


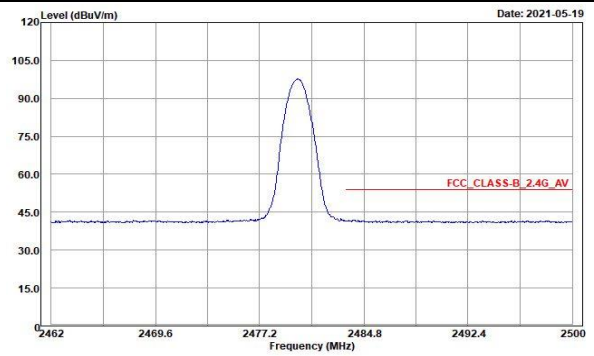


<LE 5.2>

**BT\_LE-2M Channel 0**

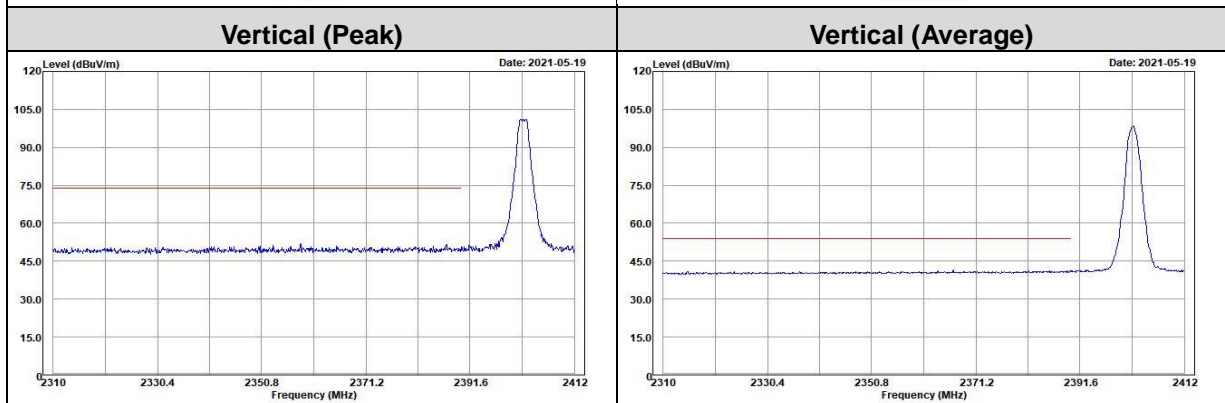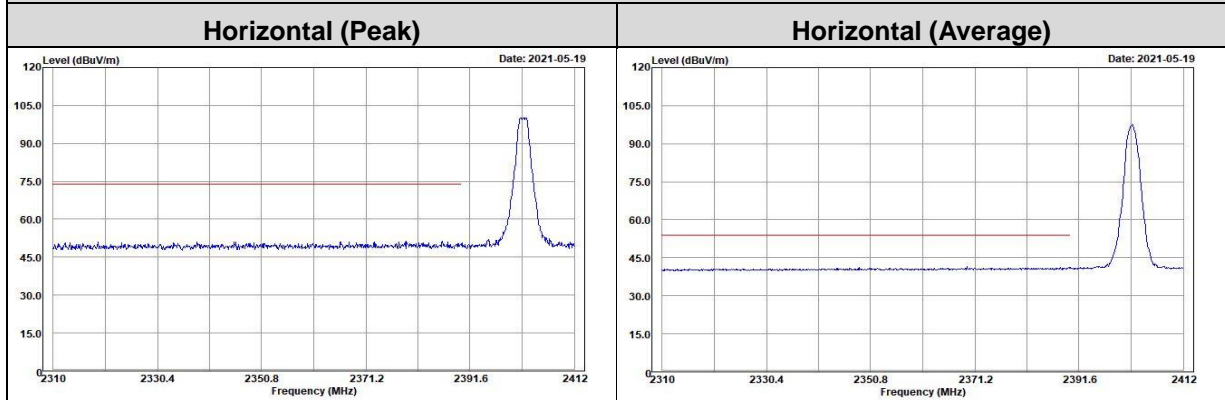


**BT\_LE-2M Channel 19**

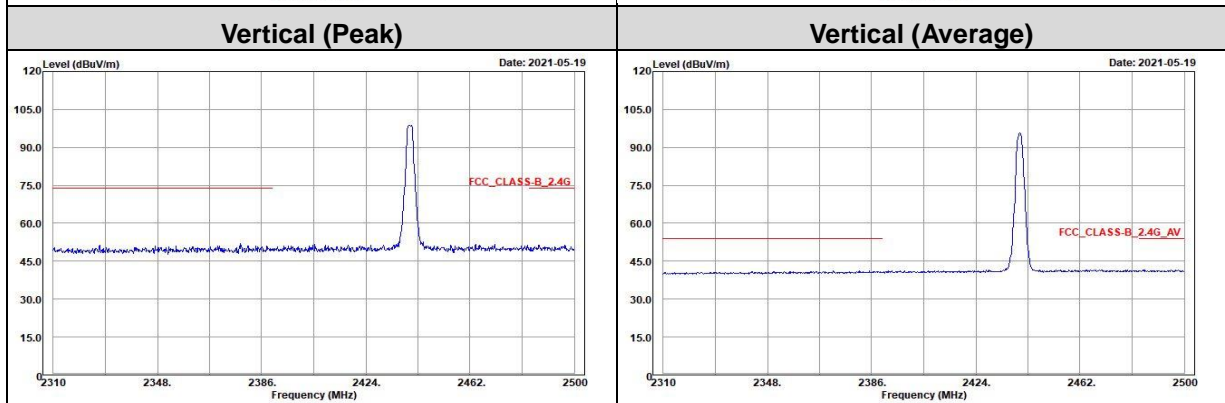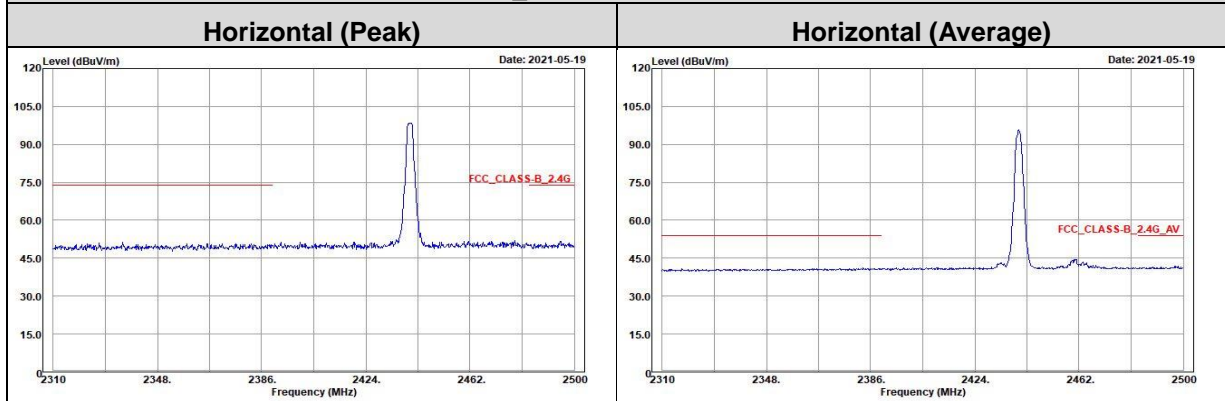


### BT\_LE-1M Channel 39


**Horizontal (Peak)**

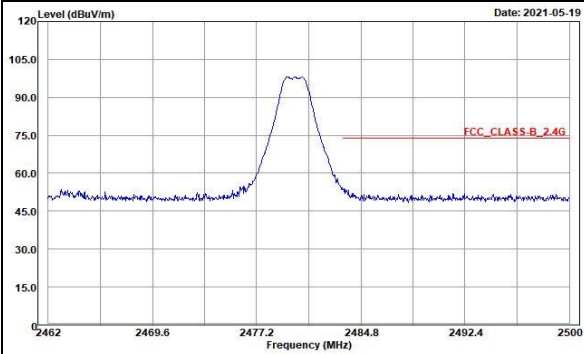


**Horizontal (Average)**

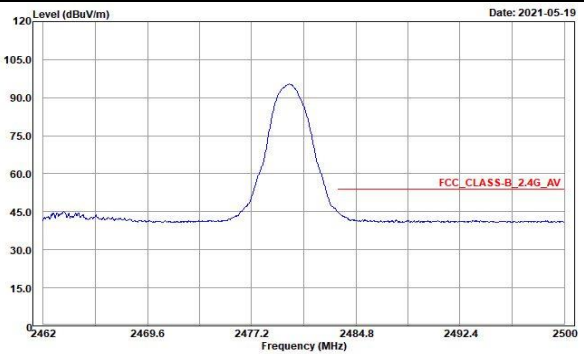

**Vertical (Peak)**

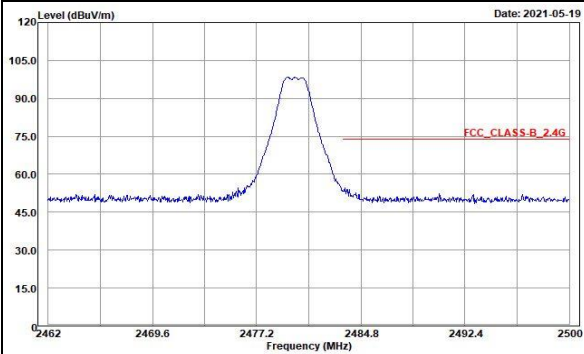

**Vertical (Average)**

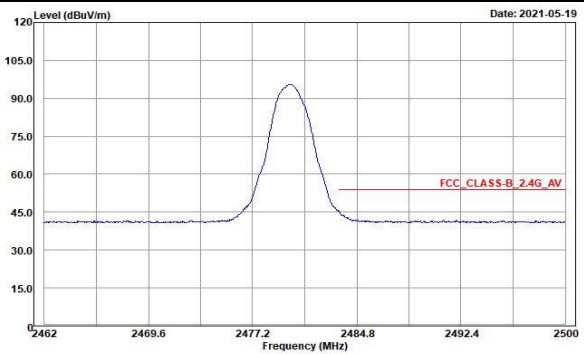

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---