

FCC Part 15 EMI TEST REPORT

of

E.U.T. : XS WIRELESS
MODEL : EM-XSW1
FCC ID. : DMOEMXSW1
Frequency Range : 2433MHz~2473MHz

for

APPLICANT : Sennheiser Electric Corp.
ADDRESS : 1 Enterprise Drive, Old Lyme, CT 06371, USA

Test Performed by

ELECTRONICS TESTING CENTER, TAIWAN
NO. 34. LIN 5, DINGFU VIL., LINKOU DIST.,
NEW TAIPEI CITY, TAIWAN, 24442, R.O.C.
TEL : (02)26023052 FAX: (02)26010910

[http : // www.etc.org.tw](http://www.etc.org.tw); e-mail : emc@etc.org.tw

Report Number : 16-08-RBF-015-06

TEST REPORT CERTIFICATION

Applicant : Sennheiser Electric Corp.
 1 Enterprise Drive, Old Lyme, CT 06371, USA

Manufacturer : MASCOT ELECTRIC CO., LTD
 NO. 85, CHANGXING 1ST ST., RENDE DIST., TAINAN CITY 717,
 TAIWAN

Description of EUT

a) Type of EUT : XS WIRELESS

b) Trade Name : SENNHEISER

c) Model No. : SK-XSW

d) Power Supply : AC/DC Adapter
 (1) Model: FW8002/16
 I/P: AC100-240V, 50-60Hz, 110mA
 O/P: 12Vdc, 400mA
 (2) Model: NT12-5CW
 I/P: AC100-240V, 50/60Hz, 0.2A
 O/P: 12Vdc, 0.5A, 6W

e) Frequency Range : 2433MHz~2473MHz

Regulation Applied : FCC Rules and Regulations Part 15 Subpart C

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.10-2013, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relate only to the item tested.
 2. The testing report shall not be reproduced expect in full, without the written approval of ETC.

Summary of Tests

Test	Results
Radiated Emission	Pass
Conducted Emission	Pass
Band Edge Requirement	Pass
Duty Cycle	N.A.
20dB Bandwidth	Pass

Date Test Item Received : Aug. 09, 2016

Date Test Campaign Completed : Sep. 07, 2016

Date of Issue : Sep. 22, 2016

Test Engineer : Brian Huang
(Brian Huang, Engineer)

Approve & Authorized Signer : S. S. Liou
S. S. Liou, Section Manager
EMC Dept. II of ELECTRONICS
TESTING CENTER, TAIWAN



Table of Contents	Page
Cover Page.....	I
TEST REPORT CERTIFICATION.....	II
Table of Contents.....	IV
1 GENERAL INFORMATION	1
1.1 Product Description.....	1
1.2 Characteristics of Device	1
1.3 Test Methodology	1
1.4 Test Facility.....	1
2 PROVISIONS APPLICABLE	2
2.1 Definition	2
2.2 Requirement for Compliance	3
2.3 Restricted Bands of Operation	5
2.4 Labeling Requirement.....	5
2.5 User Information	6
3. SYSTEM TEST CONFIGURATION	7
3.1 Justification	7
3.2 Devices for Tested System.....	7
4 RADIATED EMISSION MEASUREMENT.....	8
4.1 Applicable Standard.....	8
4.2 Measurement Procedure.....	8
4.3 Measuring Instrument	10
4.4 Radiated Emission Data	11
4.4.1 RF Portion.....	11
4.4.2 Other Emissions	17
4.5 Field Strength Calculation	21
4.6 Photos of Radiation Measuring Setup.....	22
5 CONDUCTED EMISSION MEASUREMENT	24
5.1 Standard Applicable	24
5.2 Measurement Procedure.....	24
5.3 Conducted Emission Data	25
5.4 Result Data Calculation	29
5.5 Conducted Measurement Equipment	29
5.6 Photos of Conduction Measuring Setup.....	30
6 ANTENNA REQUIREMENT	31
6.1 Standard Applicable	31

6.2 Antenna Construction..... 31

7 BAND EDGES MEASUREMENT 32

7.1 Standard Applicable 32

7.2 Measurement Procedure..... 32

7.3 Measurement Equipment 33

7.4 Measurement Data 33

8. DUTY CYCLE..... 36

8.1 Standard Applicable 36

8.2 Measurement Equipment 36

8.3 Measurement Data 36

9. BANDWIDTH OF EMISSION..... 38

9.1 Applicable Standard 38

9.2 Measurement Procedure..... 38

9.3 Measurement Equipment 39

9.4 Measurement Data 39

1 GENERAL INFORMATION

1.1 Product Description

- a) Type of EUT : XS WIRELESS
- b) Trade Name : SENNHEISER
- c) Model No. : EM-XSW1
- d) Power Supply : AC/DC Adapter
 (1) Model: FW8002/16
 I/P: AC100-240V, 50-60Hz, 110mA
 O/P: 12Vdc, 400mA
 (2) Model: NT12-5CW
 I/P: AC100-240V, 50/60Hz, 0.2A
 O/P: 12Vdc, 0.5A, 6W
- e) Frequency Range : 2433MHz~2473MHz

1.2 Characteristics of Device

The EUT is a Wireless Microphone Receiver with 2.4GHz SYNC function.

1.3 Test Methodology

Both conducted and radiated emissions were performed according to the procedures illustrated in ANSI C63.10-2013. Other required measurements were illustrated in separate sections of this test report for details.

Instead of 0.8m EUT height above 1GHz, 1.5m was allowed by FCC December 2014 TCB Conference call.

Measurement Software

Software	Version	Note
e3	Version 6.100618b	Radiated Emission Test
e3	Version 6.100421	Conducted Emission Test

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the roof top of Building at No.34, Lin 5, Dingfu Vil., Linkou Dist., New Taipei City, Taiwan 24442, R.O.C.

This site is FCC 2.948 listed and accepted in a letter dated Jan. 29, 2014.

Registration Number: 90589

2 PROVISIONS APPLICABLE

2.1 Definition

Unintentional radiator:

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

Class B Digital Device :

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business of industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

Intentional radiator:

A device that intentionally generates and emits radio frequency energy by radiation or induction.

2.2 Requirement for Compliance

(1) Conducted Emission Requirement

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50MH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency MHz	Quasi Peak dB μ V	Average dB μ V
0.15 - 0.5	66-56	56-46
0.5 - 5.0	56	46
5.0 - 30.0	60	50

(2) Radiated Emission Requirement

For unintentional device, according to §15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency MHz	Distance Meters	Radiated dB μ V/m	Radiated μ V/m
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

For intentional radiator device, per §15.249(a), the field strength of emissions shall comply with the following :

Frequency MHz	Distance Meters	Fundamental		Harmonic	
		dBµV/m	mV/m	dBµV/m	µV/m
902 - 928	3	94	50	54	500
2400 - 2483.5	3	94	50	54	500
5725 - 5875	3	94	50	54	500
24000 - 24250	3	108	250	68	2500

In accordance with §15.249(e), limits shown in above table are based on average limits for frequencies above 1000 MHz, and frequencies below 1000 MHz are based on quasi peak. However, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20 dB.

(3) Spurious in Out Band Requirement

For intentional device, according to §15.249 (d), emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of fundamental or to the general radiated emission limits in §15.209.

(4) Antenna Requirement

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.25
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3360-4400	Above 38.6
13.36-13.41			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

3. SYSTEM TEST CONFIGURATION

3.1 Justification

For both radiated and conducted emissions, the system was configured for testing in a typical fashion as a customer would normally use it. The peripherals other than EUT were connected in normally standing by situation.

All measurement were intentional to maximum the emissions from EUT by varying the connection cables(if applicable), therefore, the test result is sure to meet the applicable requirement.

3.2 Devices for Tested System

Device	Manufacturer	Model / FCC ID	Description
XS WIRELESS*	MASCOT ELECTRIC CO., LTD	SK-XSW / DMOSKXSW	---

Remark “*” means equipment under test.

4 RADIATED EMISSION MEASUREMENT

4.1 Applicable Standard

For intentional radiators, according to §15.249 (a), the fundamental field strength shall not exceed 94 dB μ V/m and the harmonics shall not exceed 54 dB μ V/m. For out band emission except for harmonics shall be comply with §15.209 or at least attenuated by 50 dB below the level of the fundamental.

4.2 Measurement Procedure

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Check the three frequencies of highest emission with varying the placement of cables associated with EUT to obtain the worse case and record the result.

Figure 1 : Frequencies measured below 1 GHz configuration


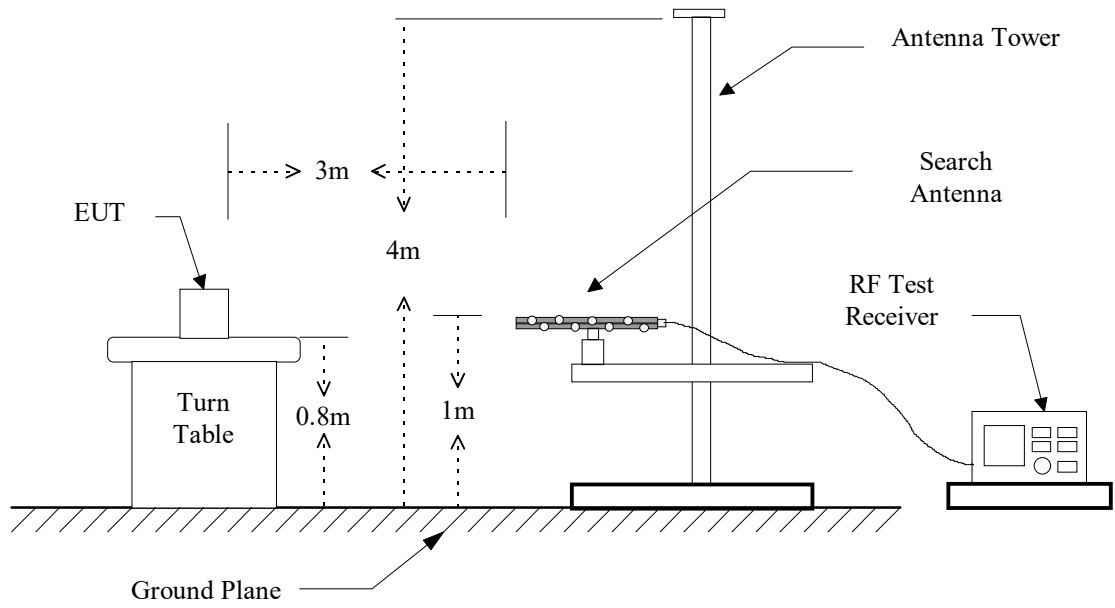


Figure 2 : Frequencies measured above 1 GHz configuration

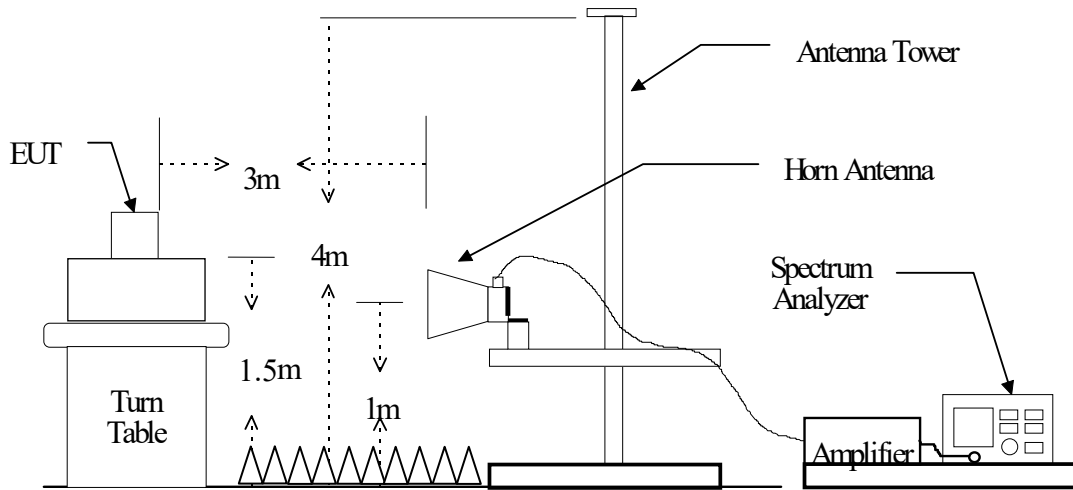

4.3 Measuring Instrument

The following instrument are used for radiated emissions measurement:

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Test Receiver	Rohde & Schwarz	ESVS30	2015/12/05	2016/12/04
EMI Test Receiver	Rohde & Schwarz	ESL	2016/03/26	2017/03/25
Bi-Log Antenna	ETC	MCTD 2786	2016/07/15	2017/07/14
Log-periodic Antenna	EMCO	3146	2015/11/17	2016/11/16
Double Ridged Guide Horn Antenna	EMCO	3116	2015/10/12	2016/10/11
Biconical Antenna	EMCO	3110	2015/11/17	2016/11/16
Double Ridged Antenna	EMCO	3115	2015/10/08	2016/10/07
Double Ridged Antenna	EMCO	3115	2015/10/06	2016/10/05
Amplifier	HP	8449B	2016/07/18	2017/07/17
Amplifier	HP	83051A	2015/12/17	2016/12/16
Amplifier	HP	8447D	2015/10/07	2016/10/06
EMI Test Receiver	Rohde & Schwarz	ESU 40	2015/12/05	2016/12/04
LOOP Antenna	EMCO	6512	2015/10/01	2016/09/30

Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi-Peak	120 kHz	N/A
	Spectrum Analyzer	Peak	100 kHz	100 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	10 Hz or $\geq 1/T$ (Note 1)


Note 1:

VBW = 10 Hz, when the duty cycle is no less than 98%.

VBW $\geq 1/T$, when duty cycle is less than 98% where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

4.4 Radiated Emission Data

4.4.1 RF Portion

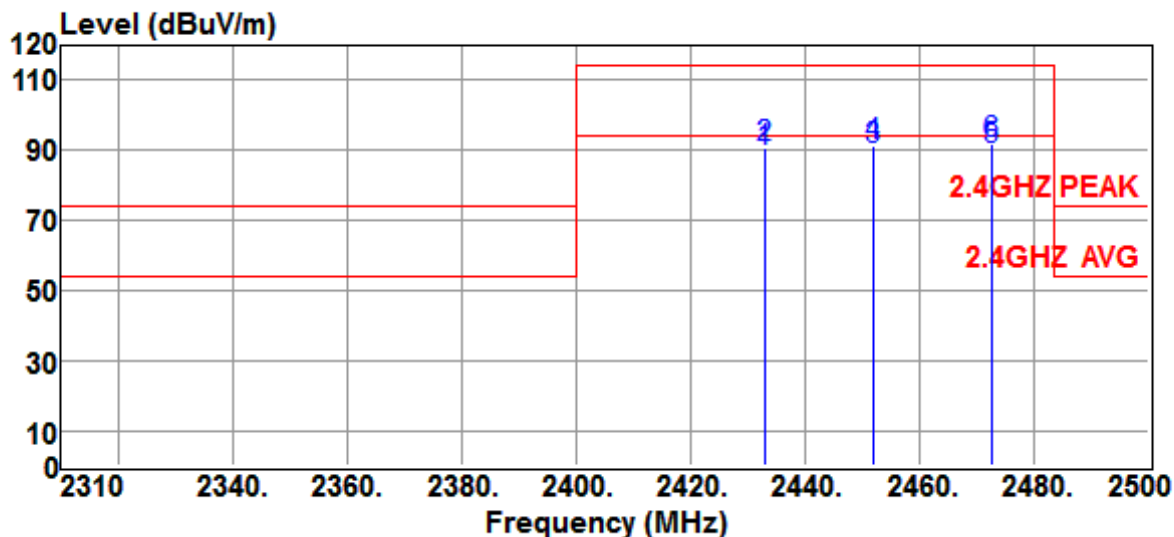


Site	:CHAMBER #2	Date	:2016-08-23
Limit	:2.4GHZ PEAK	Ant. Pol.	:HORIZONTAL
EUT	:XS WIRELESS	Model	:EM-XSW1
Power Rating	:AC120V/60Hz	Temp.	:25°C
Engineer	:Brian Huang	Humi.	:68 %
Test Mode	:TX -LO 2433 - MI 2452 - HI 2472.8MHz		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits dBμV/m	Over limit dB	Detector
2433.0000	95.4	-5.8	89.6	94.0	-4.4	Average
2433.0000	96.6	-5.8	90.8	114.0	-23.2	Peak
2452.0000	95.9	-5.8	90.1	94.0	-3.9	Average
2452.0000	97.1	-5.8	91.3	114.0	-22.7	Peak
2472.8000	96.1	-5.7	90.4	94.0	-3.6	Average
2472.8000	97.4	-5.7	91.7	114.0	-22.3	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. The expanded uncertainty of the radiated emission tests is 3.53 dB.

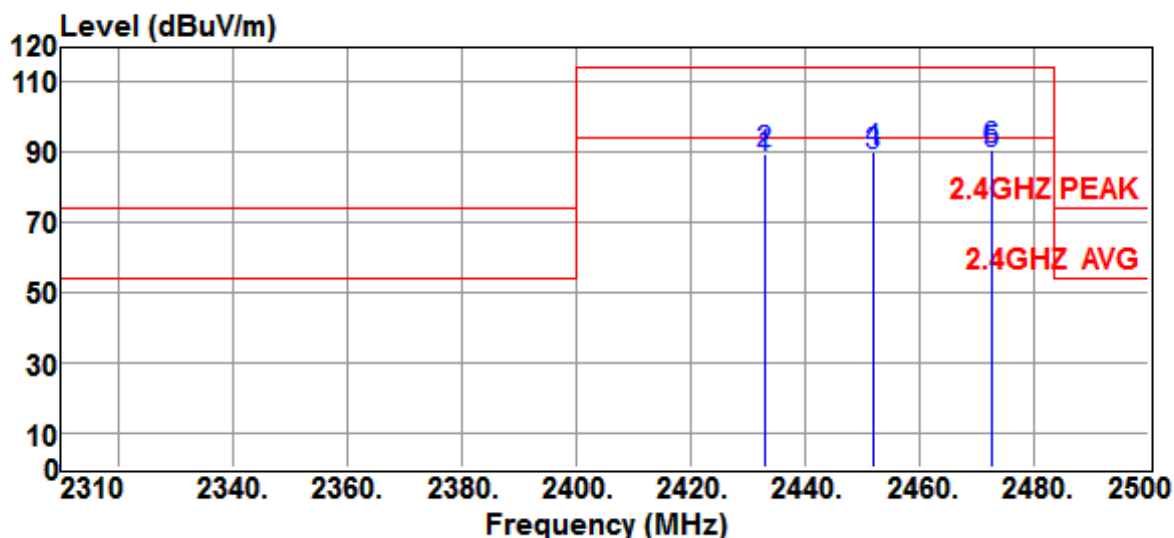


Site	:CHAMBER #2	Date	:2016-08-23
Limit	:2.4GHZ PEAK	Ant. Pol.	:VERTICAL
EUT	:XS WIRELESS	Model	:EM-XSW1
Power Rating	:AC120V/60Hz	Temp.	:25°C
Engineer	:Brian Huang	Humi.	:68 %
Test Mode	:TX -LO 2433 - MI 2452 - HI 2472.8MHz		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits dBμV/m	Over limit dB	Detector
2433.0000	94.5	-5.8	88.7	94.0	-5.3	Average
2433.0000	95.6	-5.8	89.8	114.0	-24.2	Peak
2452.0000	94.8	-5.8	89.0	94.0	-5.0	Average
2452.0000	96.0	-5.8	90.2	114.0	-23.8	Peak
2472.8000	95.4	-5.7	89.7	94.0	-4.3	Average
2472.8000	96.5	-5.7	90.8	114.0	-23.2	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. The expanded uncertainty of the radiated emission tests is 3.53 dB.

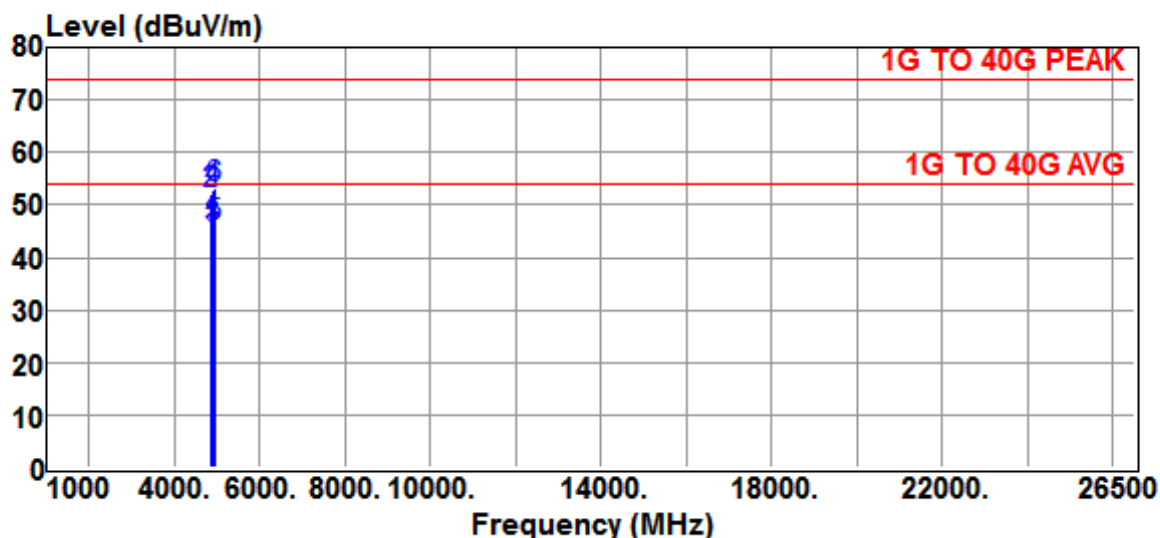


Site	:CHAMBER #2	Date	:2016-08-23
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:XS WIRELESS	Model	:EM-XSW1
Power Rating	:AC120V/60Hz	Temp.	:25°C
Engineer	:Brian Huang	Humi.	:68 %
Test Mode	:TX -LO 2433 - MI 2452 - HI 2472.8MHz		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits dBμV/m	Over limit dB	Detector
4866.0000	43.7	1.4	45.1	54.0	-8.9	Average
4866.0000	50.8	1.4	52.2	74.0	-21.8	Peak
4904.0000	44.1	1.5	45.6	54.0	-8.4	Average
4904.0000	51.2	1.5	52.7	74.0	-21.3	Peak
4945.6000	44.3	1.6	45.9	54.0	-8.1	Average
4945.6000	51.5	1.6	53.1	74.0	-20.9	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. The expanded uncertainty of the radiated emission tests is 3.53 dB.

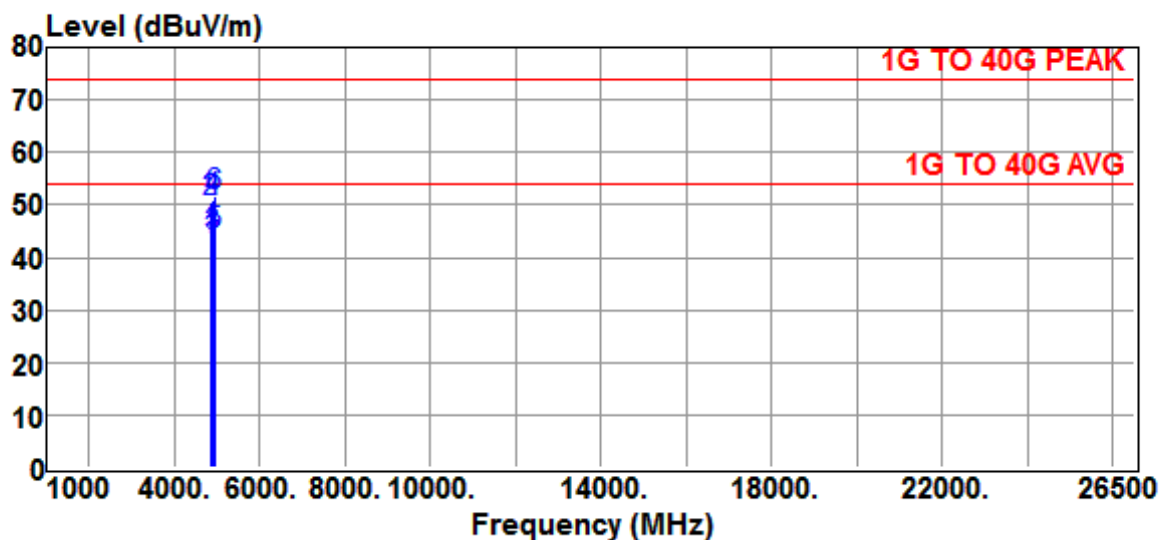


Site :CHAMBER #2 Date :2016-08-23
 Limit :1G TO 40G PEAK Ant. Pol. :VERTICAL
 EUT :XS WIRELESS Model :EM-XSW1
 Power Rating :AC120V/60Hz Temp. :25°C
 Engineer :Brian Huang Humi. :68 %
 Test Mode :TX -LO 2433 - MI 2452 - HI 2472.8MHz

Freq MHz	Reading dBµV	Correction Factor dB	Result dBµV/m	Limits dBµV/m	Over limit dB	Detector
4866.0000	42.0	1.4	43.4	54.0	-10.6	Average
4866.0000	49.1	1.4	50.5	74.0	-23.5	Peak
4904.0000	42.4	1.5	43.9	54.0	-10.1	Average
4904.0000	49.5	1.5	51.0	74.0	-23.0	Peak
4945.6000	42.7	1.6	44.3	54.0	-9.7	Average
4945.6000	49.9	1.6	51.5	74.0	-22.5	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. The expanded uncertainty of the radiated emission tests is 3.53 dB.

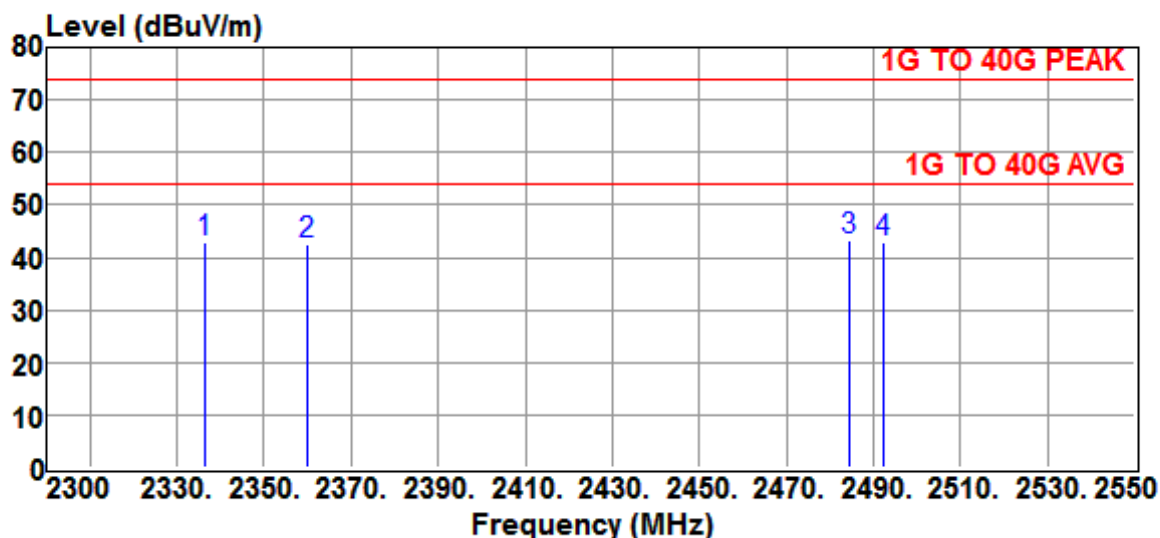


Site	:CHAMBER #2	Date	:2016-08-23
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:XS WIRELESS	Model	:EM-XSW1
Power Rating	:AC120V/60Hz	Temp.	:25°C
Engineer	:Brian Huang	Humi.	:68 %
Test Mode	:CH LO & HI - Restricted Bands		
Test Mode	:OPERATION MODE		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits (AVG) dBμV/m	Over limit dB	Detector
2336.5000	48.8	-5.9	42.9	74.0	-31.1	Peak
2360.0000	48.4	-5.9	42.5	74.0	-31.5	Peak
2484.5000	49.0	-5.7	43.3	74.0	-30.7	Peak
2492.5000	48.4	-5.7	42.7	74.0	-31.3	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.
5. The expanded uncertainty of the radiated emission tests is 3.53 dB.

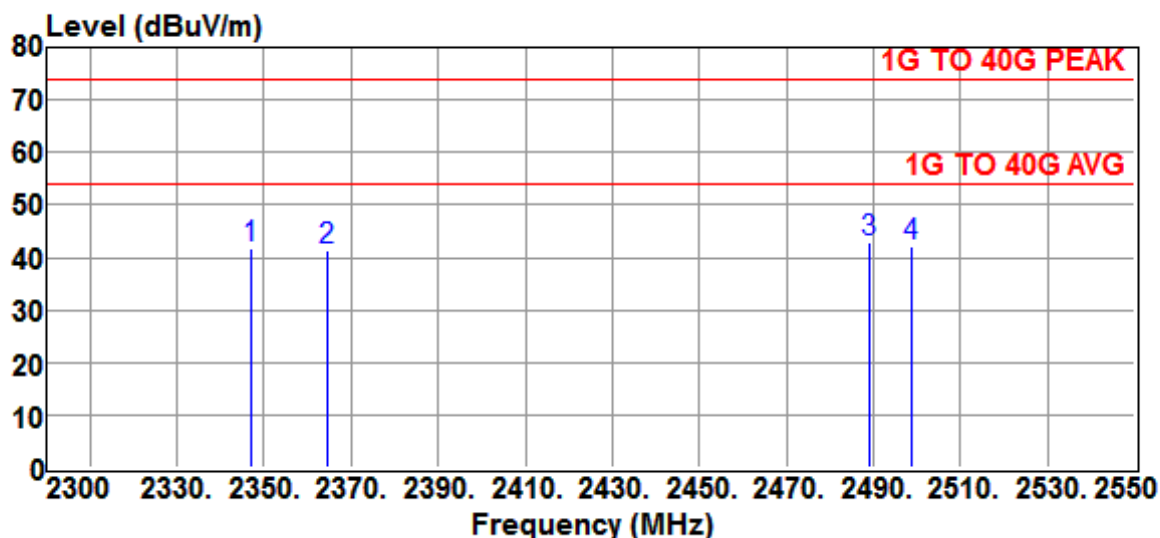

Site	:CHAMBER #2	Date	:2016-08-23
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:XS WIRELESS	Model	:EM-XSW1
Power Rating	:AC120V/60Hz	Temp.	:25°C
Engineer	:Brian Huang	Humi.	:68 %
Test Mode	:CH LO & HI - Restricted Bands		
Test Mode	:OPERATION MODE		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits (AVG) dBμV/m	Over limit dB	Detector
2347.0000	47.8	-6.0	41.8	74.0	-32.2	Peak
2364.5000	47.1	-5.9	41.2	74.0	-32.8	Peak
2489.0000	48.7	-5.7	43.0	74.0	-31.0	Peak
2499.0000	47.7	-5.7	42.0	74.0	-32.0	Peak

Note :


1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.
5. The expanded uncertainty of the radiated emission tests is 3.53 dB.

4.4.2 Other Emissions

a) Emission frequencies below 1 GHz

Operation Mode : Operation

Test Date : Aug. 25, 2016 Temperature : 25 °C Humidity : 53 %

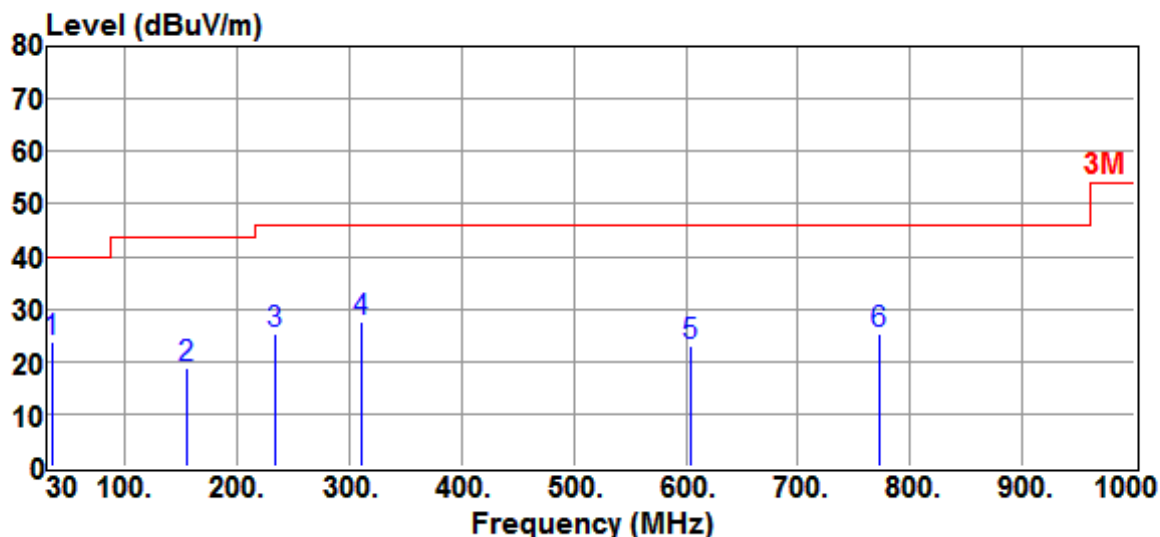


Site	:CHAMBER#2	Date	:2016-08-25
Limit	:3M	Ant. Pol.	:HORIZONTAL
EUT	:XS WIRELESS	Model	:EM-XSW1
Power Rating	:AC120V/60Hz	Temp.	:25°C
Engineer	:Brian Huang	Humi.	:53 %
Test Mode	:OPERATION MODE (AD1#FW8006/12)		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits dBμV/m	Over limit dB	Detector
34.8500	33.7	-10.0	23.7	40.0	-16.3	QP
155.1300	32.1	-13.4	18.7	43.5	-24.8	QP
233.7000	38.7	-13.5	25.2	46.0	-20.8	QP
311.3000	36.7	-9.1	27.6	46.0	-18.4	QP
605.2100	28.4	-5.2	23.2	46.0	-22.8	QP
773.0200	27.9	-2.8	25.1	46.0	-20.9	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. The expanded uncertainty of the radiated emission tests is 3.53 dB.

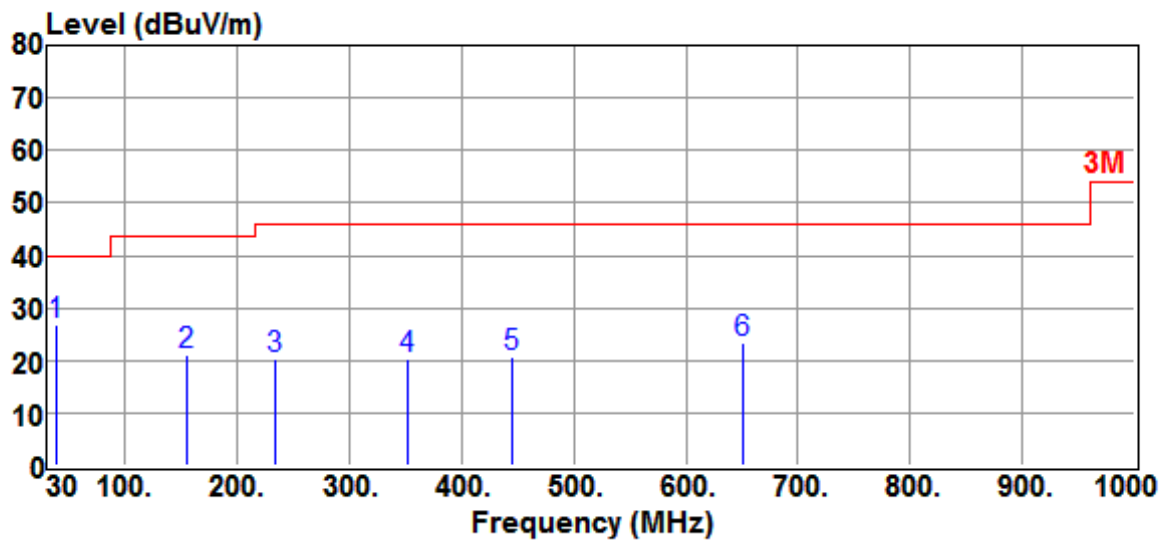


Site	:CHAMBER#2	Date	:2016-08-25
Limit	:3M	Ant. Pol.	:VERTICAL
EUT	:XS WIRELESS	Model	:EM-XSW1
Power Rating	:AC120V/60Hz	Temp.	:25°C
Engineer	:Brian Huang	Humi.	:53 %
Test Mode	:OPERATION MODE (AD1#FW8006/12)		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits dBμV/m	Over limit dB	Detector
39.7000	38.8	-12.2	26.6	40.0	-13.4	QP
155.1300	34.4	-13.4	21.0	43.5	-22.5	QP
233.7000	33.8	-13.5	20.3	46.0	-25.7	QP
352.0400	28.3	-7.9	20.4	46.0	-25.6	QP
445.1600	27.8	-7.3	20.5	46.0	-25.5	QP
651.7700	27.6	-4.3	23.3	46.0	-22.7	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. The expanded uncertainty of the radiated emission tests is 3.53 dB.

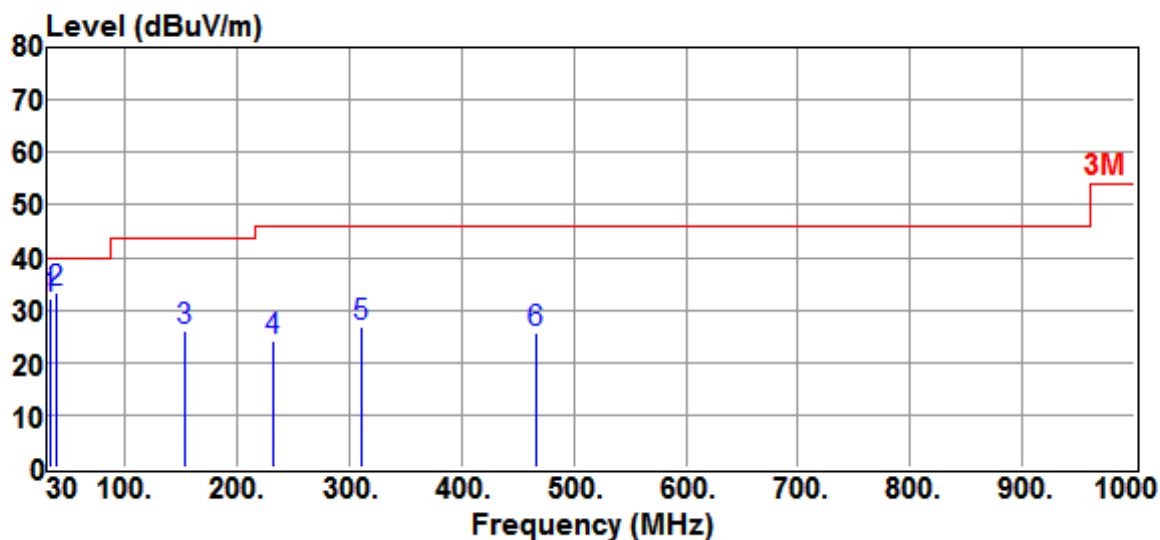


Site	:CHAMBER#2	Date	:2016-08-25
Limit	:3M	Ant. Pol.	:HORIZONTAL
EUT	:XS WIRELESS	Model	:EM-XSW1
Power Rating	:AC120V/60Hz	Temp.	:25°C
Engineer	:Brian Huang	Humi.	:53 %
Test Mode	:OPERATION MODE (AD2# NT12-5CW)		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits dBμV/m	Over limit dB	Detector
33.8800	41.6	-9.6	32.0	40.0	-8.0	QP
39.7000	45.5	-12.2	33.3	40.0	-6.7	QP
154.1600	39.2	-13.3	25.9	43.5	-17.6	QP
231.7600	38.0	-13.7	24.3	46.0	-21.7	QP
311.3000	35.9	-9.1	26.8	46.0	-19.2	QP
466.5000	32.6	-7.1	25.5	46.0	-20.5	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. The expanded uncertainty of the radiated emission tests is 3.53 dB.

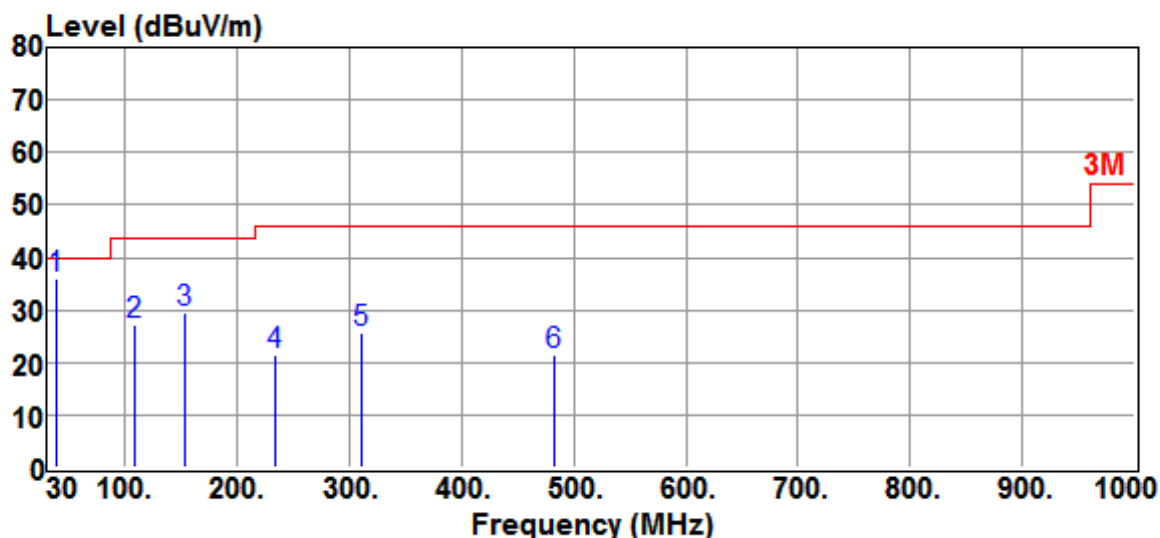

Site	:CHAMBER#2	Date	:2016-08-25
Limit	:3M	Ant. Pol.	:VERTICAL
EUT	:XS WIRELESS	Model	:EM-XSW1
Power Rating	:AC120V/60Hz	Temp.	:25°C
Engineer	:Brian Huang	Humi.	:53 %
Test Mode	:OPERATION MODE (AD2# NT12-5CW)		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits dBμV/m	Over limit dB	Detector
39.7000	48.1	-12.2	35.9	40.0	-4.1	QP
109.5400	42.5	-15.2	27.3	43.5	-16.2	QP
154.1600	42.7	-13.3	29.4	43.5	-14.1	QP
233.7000	35.0	-13.5	21.5	46.0	-24.5	QP
311.3000	34.8	-9.1	25.7	46.0	-20.3	QP
482.0200	28.2	-6.9	21.3	46.0	-24.7	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. The expanded uncertainty of the radiated emission tests is 3.53 dB.

b) Emission frequencies above 1 GHz

Radiated emission frequencies above 1 GHz to 26.5 GHz were too low to be measured with a pre-amplifier of 35 dB.

c) Emission frequencies below 30MHz (9kHz - 30MHz)

According to exploratory test no any obvious emission were detected from 9kHz to 30MHz.

4.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss(if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:


$$\mathbf{Result = Reading + Corrected Factor}$$

where Corrected Factor

$$= \text{Antenna FACTOR} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

4.6 Photos of Radiation Measuring Setup



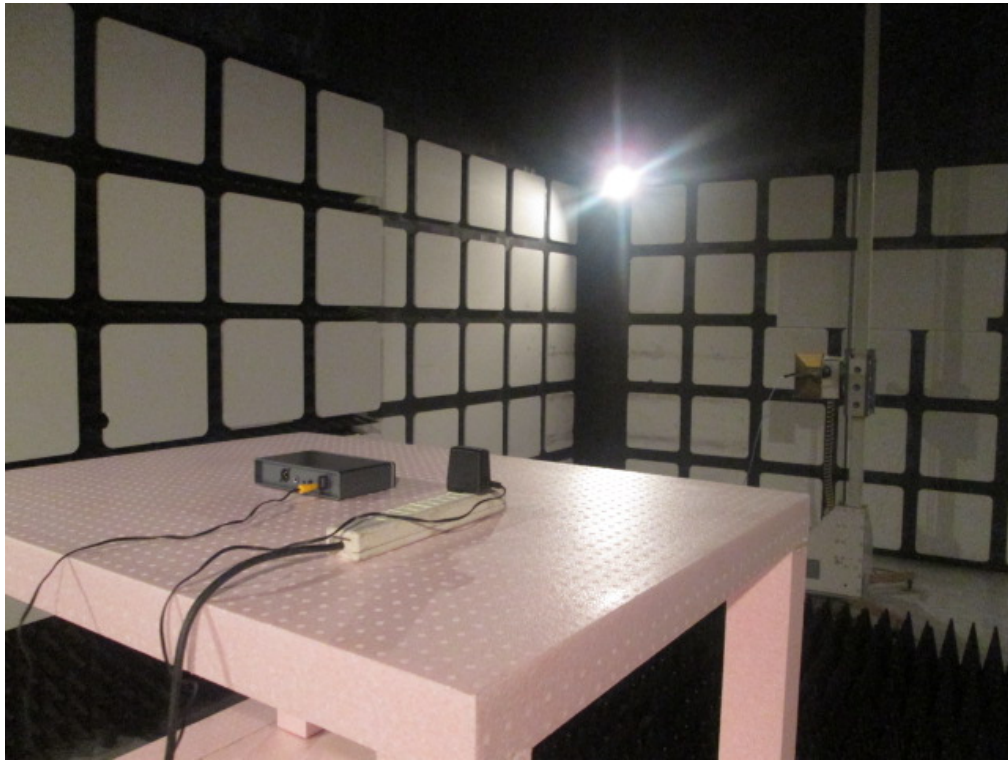

5 CONDUCTED EMISSION MEASUREMENT


5.1 Standard Applicable

For unintentional and intentional device, Line Conducted Emission Limits are in accordance to §15.107(a) and §15.207(a) respectively. Both Limits are identical specification.


5.2 Measurement Procedure

1. Setup the configuration per figure 3.
2. A preliminary scan with a spectrum monitor is performed to identify the frequency of emission that has the highest amplitude relative to the limit by operating the EUT in selected modes of operation, typical cable positions, and with a typical system configuration.
3. Record the 6 or 8 highest emissions relative to the limit.
4. Measure each frequency obtained from step 3 by a test receiver set on quasi peak detector function, and then record the accuracy frequency and emission level. If all emissions measured in the specified band are attenuated more than 20 dB from the limit, this step would be ignored, and the peak detector function would be used.
5. Confirm the highest three emissions with variation of the EUT cable configuration and record the final data.
6. Repeat all above procedures on measuring each operation mode of EUT.

Figure 3 : Conducted emissions measurement configuration

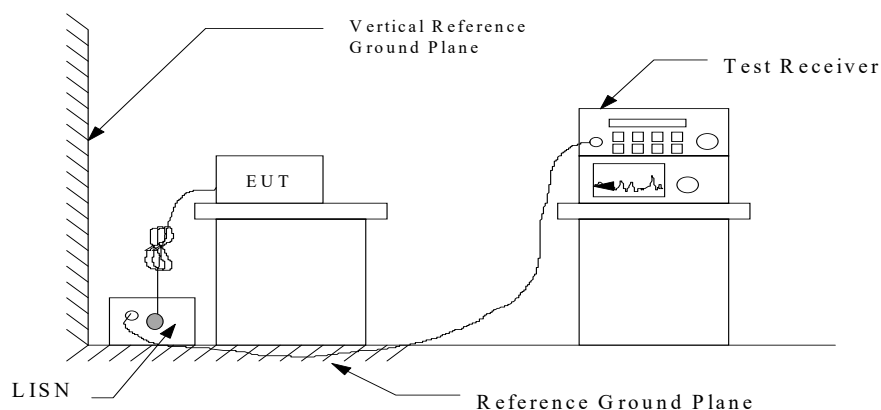

5.3 Conducted Emission Data

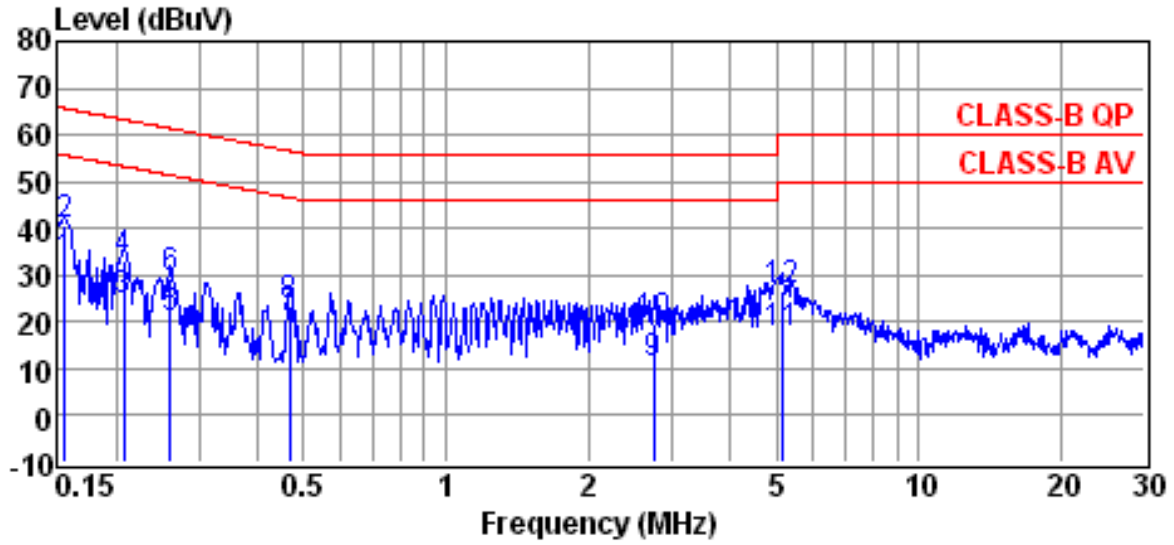


Site : conducted #1 Date : 08-25-2016
 Condition : CLASS-B QP LISN : NEUTRAL
 Tem / Hum : 25 °C / 52% Test Mode : Operation Mode
 EUT : XS WIRELESS Power Rating : AC 120V60Hz
 Memo : AD1#FW8006/12

Freq (MHz)	Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Remark
0.1557	22.15	10.19	32.34	55.69	-23.35	Average
0.1557	30.39	10.19	40.58	65.69	-25.11	QP
0.2083	14.52	10.19	24.71	53.27	-28.56	Average
0.2083	23.13	10.19	33.32	63.27	-29.95	QP
0.2616	10.58	10.20	20.78	51.38	-30.60	Average
0.2616	18.96	10.20	29.16	61.38	-32.22	QP
0.4661	10.30	10.23	20.53	46.58	-26.05	Average
0.4661	13.24	10.23	23.47	56.58	-33.11	QP
2.7500	0.69	10.35	11.04	46.00	-34.96	Average
2.7500	9.43	10.35	19.78	56.00	-36.22	QP
5.1660	6.99	10.47	17.46	50.00	-32.54	Average
5.1660	16.19	10.47	26.66	60.00	-33.34	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

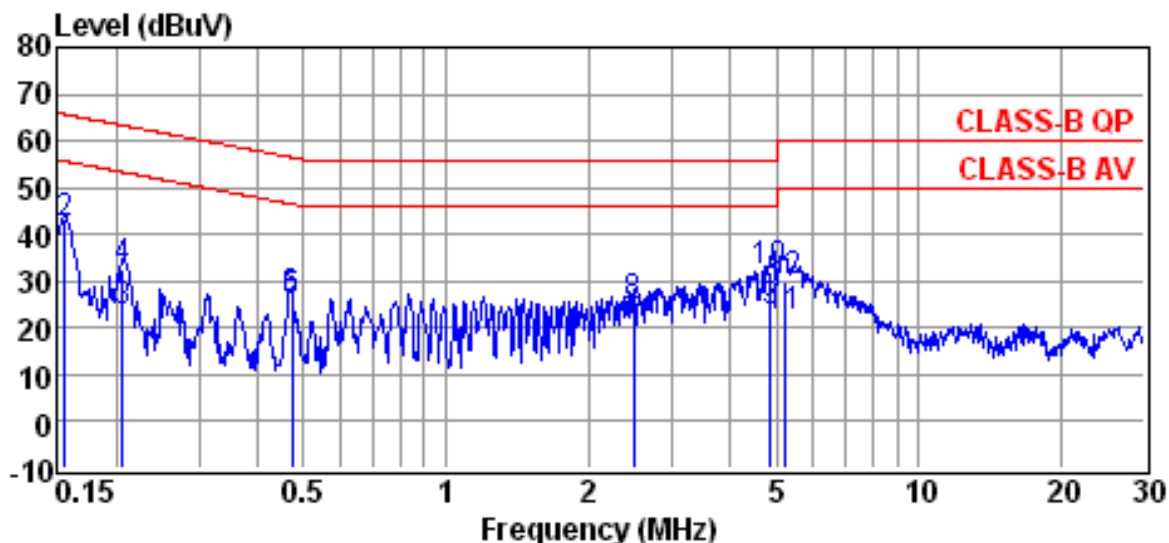


Site : conducted #1 Date : 08-25-2016
 Condition : CLASS-B QP LISN : LINE
 Tem / Hum : 25 °C / 52% Test Mode : Operation Mode
 EUT : XS WIRELESS Power Rating : AC 120V60Hz
 Memo : AD1#FW8006/12

Freq (MHz)	Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Remark
0.1565	25.93	10.19	36.12	55.65	-19.53	Average
0.1565	32.10	10.19	42.29	65.65	-23.36	QP
0.2072	13.40	10.20	23.60	53.32	-29.72	Average
0.2072	22.12	10.20	32.32	63.32	-31.00	QP
0.4711	15.60	10.24	25.84	46.49	-20.65	Average
0.4711	16.05	10.24	26.29	56.49	-30.20	QP
2.5000	10.09	10.35	20.44	46.00	-25.56	Average
2.5000	14.44	10.35	24.79	56.00	-31.21	QP
4.8480	12.97	10.47	23.44	46.00	-22.56	Average
4.8480	21.50	10.47	31.97	56.00	-24.03	QP
5.2210	11.86	10.49	22.35	50.00	-27.65	Average
5.2210	19.32	10.49	29.81	60.00	-30.19	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

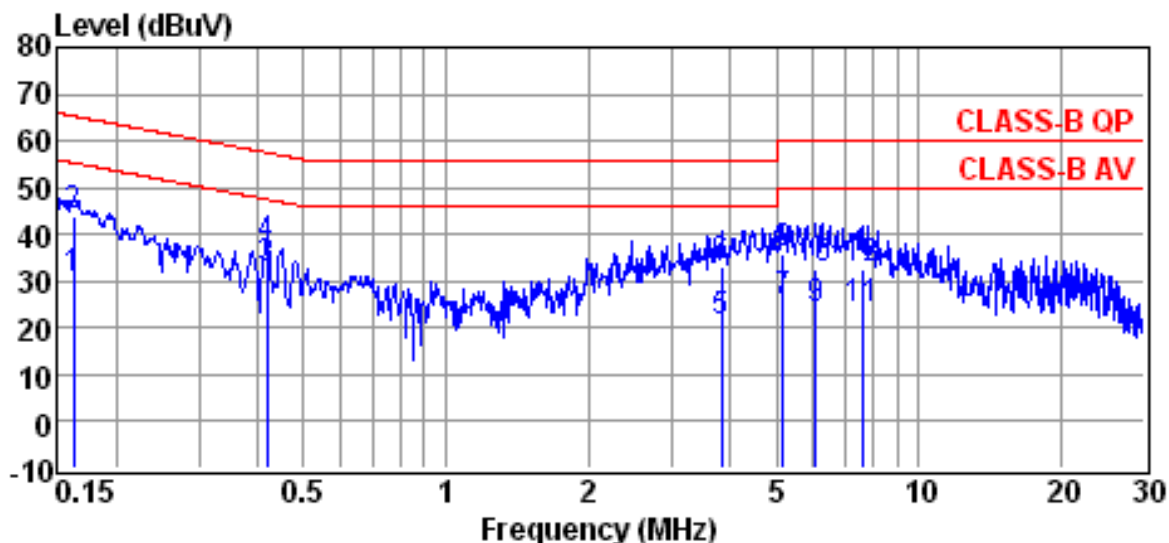


Site : conducted #1 Date : 08-25-2016
 Condition : CLASS-B QP LISN : NEUTRAL
 Tem / Hum : 25 °C / 52% Test Mode : Operation Mode
 EUT : XS WIRELESS Power Rating : AC 120V60Hz
 Memo : AD2# NT12-5CW

Freq (MHz)	Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Remark
0.1633	20.42	10.19	30.61	55.30	-24.69	Average
0.1633	33.93	10.19	44.12	65.30	-21.18	QP
0.4171	22.54	10.22	32.76	47.51	-14.75	Average
0.4171	27.09	10.22	37.31	57.51	-20.20	QP
3.8200	10.87	10.40	21.27	46.00	-24.73	Average
3.8200	22.63	10.40	33.03	56.00	-22.97	QP
5.1660	15.23	10.47	25.70	50.00	-24.30	Average
5.1660	25.21	10.47	35.68	60.00	-24.32	QP
6.0560	13.49	10.51	24.00	50.00	-26.00	Average
6.0560	22.17	10.51	32.68	60.00	-27.32	QP
7.6060	13.41	10.59	24.00	50.00	-26.00	Average
7.6060	21.90	10.59	32.49	60.00	-27.51	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

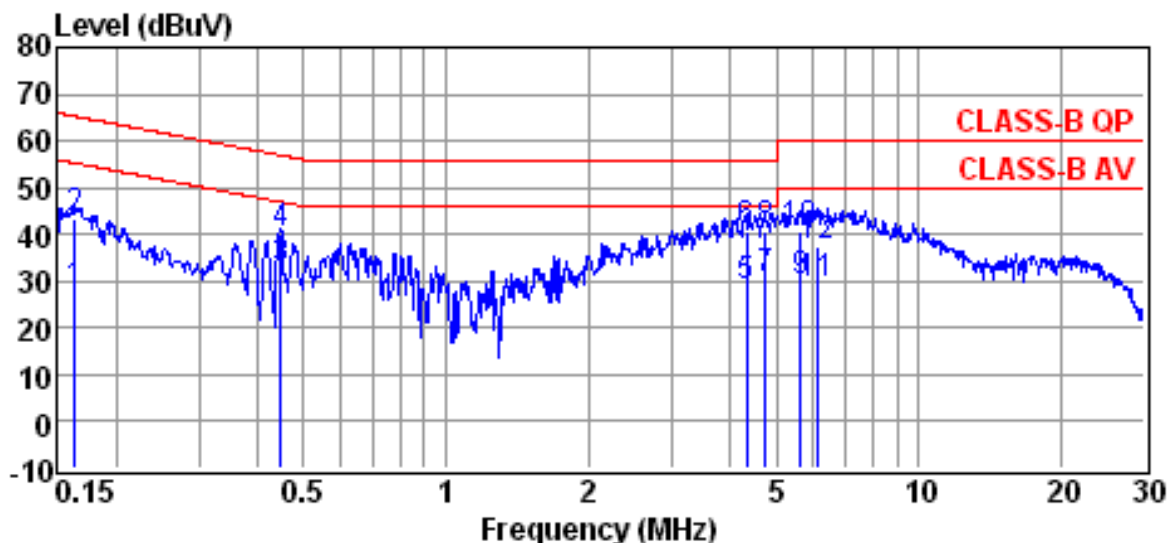

Site : conducted #1 Date : 08-25-2016
 Condition : CLASS-B QP LISN : LINE
 Tem / Hum : 25 °C / 52% Test Mode : Operation Mode
 EUT : XS WIRELESS Power Rating : AC 120V60Hz
 Memo : AD2# NT12-5CW

Freq (MHz)	Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Remark
0.1641	17.75	10.19	27.94	55.25	-27.31	Average
0.1641	33.16	10.19	43.35	65.25	-21.90	QP
0.4468	22.51	10.23	32.74	46.93	-14.19	Average
0.4468	29.67	10.23	39.90	56.93	-17.03	QP
4.3380	18.15	10.44	28.59	46.00	-17.41	Average
4.3380	30.23	10.44	40.67	56.00	-15.33	QP
4.7460	19.92	10.46	30.38	46.00	-15.62	Average
4.7460	30.23	10.46	40.69	56.00	-15.31	QP
5.6230	19.29	10.52	29.81	50.00	-20.19	Average
5.6230	30.38	10.52	40.90	60.00	-19.10	QP
6.1210	18.92	10.54	29.46	50.00	-20.54	Average
6.1210	27.06	10.54	37.60	60.00	-22.40	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

5.4 Result Data Calculation

The result data is calculated by adding the LISN Factor to the measured reading. The basic equation with a sample calculation is as follows:

$$\mathbf{RESULT = READING + LISN FACTOR}$$

Assume a receiver reading of 22.5 dB μ V is obtained, and LISN Factor is 0.1 dB, then the total of disturbance voltage is 22.6 dB μ V.

$$\text{RESULT} = 22.5 + 0.1 = 22.6 \text{ dB}\mu\text{V}$$


$$\begin{aligned} \text{Level in } \mu\text{V} &= \text{Common Antilogarithm}[(22.6 \text{ dB}\mu\text{V})/20] \\ &= 13.48 \mu\text{V} \end{aligned}$$

5.5 Conducted Measurement Equipment

The following test equipment are used during the conducted test .

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	ESCI	2015/12/05	2016/12/04
LISN	EMCO	3625/2	2015/10/28	2016/10/26
LISN	Rohde & Schwarz	ESH2-Z5	2016/05/05	2017/05/04

5.6 Photos of Conduction Measuring Setup

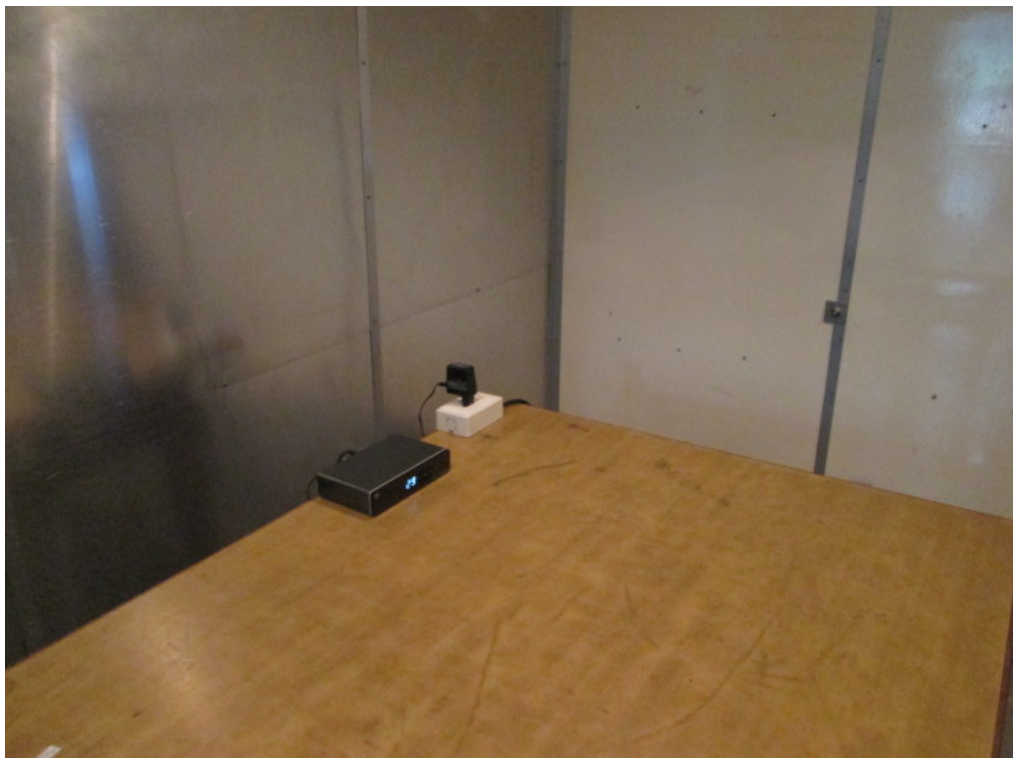

6 ANTENNA REQUIREMENT

6.1 Standard Applicable

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.2 Antenna Construction

The device is equipped with the permanently attached on-board PCB antenna. No consideration of replacement. Please refer to the construction Photo for details.

7 BAND EDGES MEASUREMENT

7.1 Standard Applicable

According to 15.249(d), out band emission except for harmonics shall be comply with §15.209 or at least attenuated by 50 dB below the level of the fundamental.

7.2 Measurement Procedure

A) 50 dB attenuation method

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
4. Repeat above procedures until all measured frequencies were complete.

B) Radiated Emission method

1. Following the measurement procedures in section 4.2 with the EUT set to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
2. Measure the highest amplitude appearing on spectral displayed.
3. Repeat above procedures until all measured frequencies were complete.

Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi-Peak	120 kHz	N/A
	Spectrum Analyzer	Peak	100 kHz	100 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	10 Hz or $\geq 1/T$ (Note 1)

Note 1:

VBW = 10 Hz, when the duty cycle is no less than 98%.

VBW \geq 1/T, when duty cycle is less than 98% where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

7.3 Measurement Equipment

A) 50 dB attenuation method

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	ESU 40	2015/10/07	2016/10/06

B) Radiated Emission method


Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Test Receiver	Rohde & Schwarz	ESCI	2015/12/05	2016/12/04
EMI Test Receiver	Rohde & Schwarz	ESL	2016/03/26	2017/03/25
Bi-Log Antenna	ETC	MCTD 2786	2016/07/15	2017/07/14
Log-periodic Antenna	EMCO	3146	2015/11/17	2016/11/16
Double Ridged Guide Horn Antenna	EMCO	3116	2015/10/12	2016/10/11
Biconical Antenna	EMCO	3110	2015/11/17	2016/11/16
Double Ridged Antenna	EMCO	3115	2015/10/08	2016/10/07
Amplifier	HP	8449B	2015/10/06	2016/10/05
Amplifier	HP	83051A	2016/07/18	2017/07/17
Amplifier	HP	8447D	2015/12/17	2016/12/16
EMI Test Receiver	Rohde & Schwarz	ESU 40	2015/10/07	2016/10/06

7.4 Measurement Data

Test Result: (Radiated Emission method)

The radiated emission test results of the lower and the upper band edges were comply with §15.209. Please refer to the following pages for test results.

Radiated Emission Test Results of the Band Edges

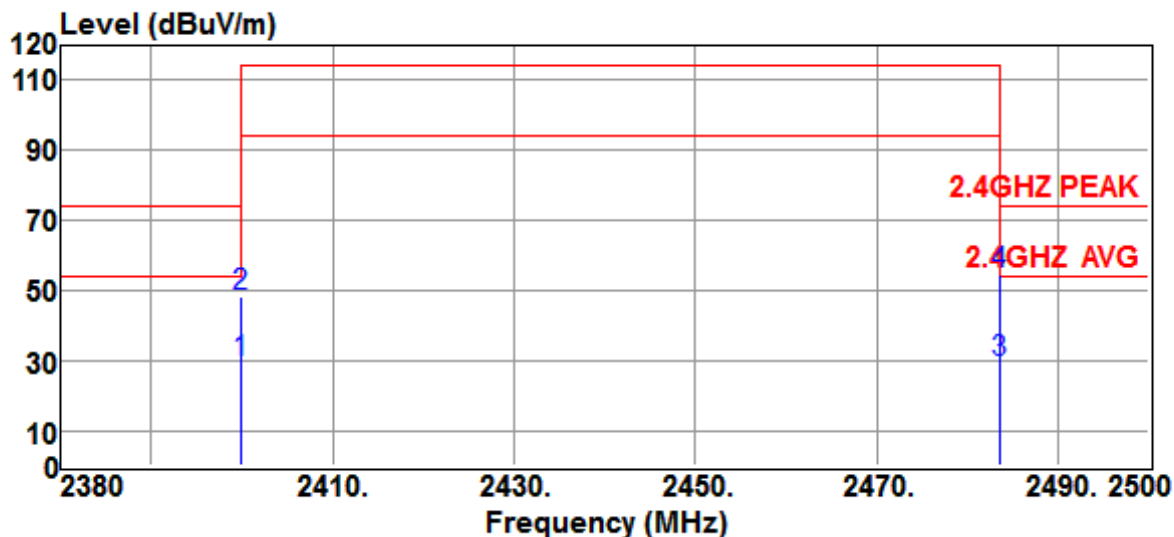


Site	:CHAMBER #2	Date	:2016-08-23
Limit	:2.4GHZ PEAK	Ant. Pol.	:HORIZONTAL
EUT	:XS WIRELESS	Model	:EM-XSW1
Power Rating	:AC120V/60Hz	Temp.	:25°C
Engineer	:Brian Huang	Humi.	:68 %
Test Mode	:CH LO & HI - BANDEDGE		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits dBμV/m	Over limit dB	Detector
2400.0000	35.0	-5.8	29.2	54.0	-24.8	Average
2400.0000	53.8	-5.8	48.0	74.0	-26.0	Peak
2483.5000	35.1	-5.7	29.4	54.0	-24.6	Average
2483.5000	60.4	-5.7	54.7	74.0	-19.3	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. The expanded uncertainty of the radiated emission tests is 3.53 dB.

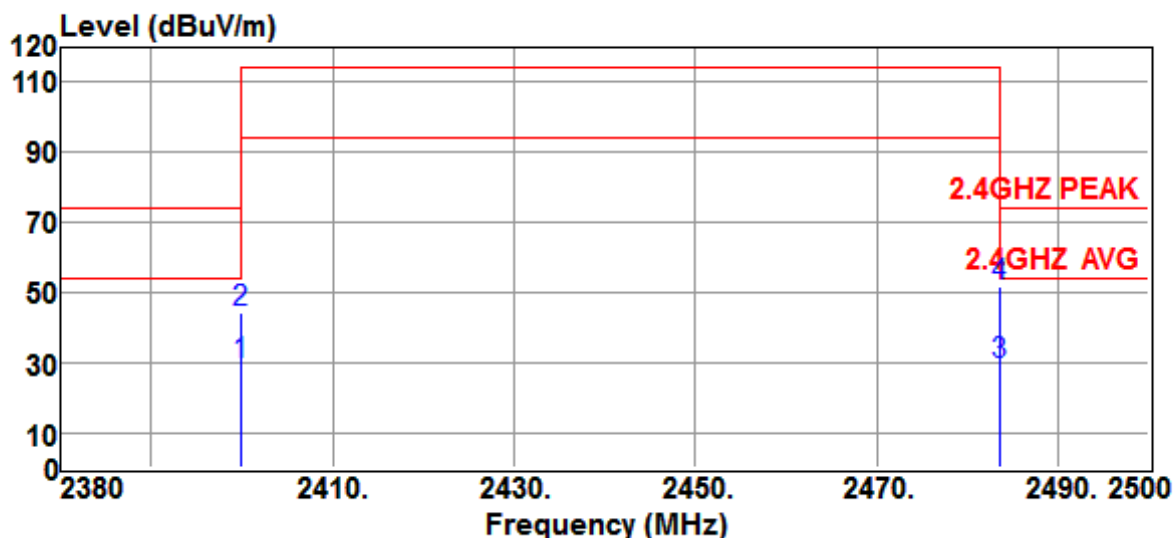

Site	:CHAMBER #2	Date	:2016-08-23
Limit	:2.4GHZ PEAK	Ant. Pol.	:VERTICAL
EUT	:XS WIRELESS	Model	:EM-XSW1
Power Rating	:AC120V/60Hz	Temp.	:25°C
Engineer	:Brian Huang	Humi.	:68 %
Test Mode	:CH LO & HI - BANDEDGE		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits dBμV/m	Over limit dB	Detector
2400.0000	34.9	-5.8	29.1	54.0	-24.9	Average
2400.0000	50.3	-5.8	44.5	74.0	-29.5	Peak
2483.5000	35.0	-5.7	29.3	54.0	-24.7	Average
2483.5000	57.6	-5.7	51.9	74.0	-22.1	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. The expanded uncertainty of the radiated emission tests is 3.53 dB.

8. DUTY CYCLE

8.1 Standard Applicable

None. Reference only.

8.2 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	ESU 40	2015/10/07	2016/10/06

8.3 Measurement Data

Test Date : Aug. 23, 2016 Temperature : 25 °C Humidity : 68 %

Duty Cycle Calculation

Period = 6.736410ms

Transmission duration (T) = 1.576154ms + 2.403846ms = 3.98ms

Duty Cycle (%) = (3.98 / 6.736410) * 100 % = 59.1 %


The duty cycle is less than 98%. For the average measurement of the radiated emission test, the VBW setting is $>1/T$ where the T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

$1/T = 1 / 1.576154\text{ms} = 634.5 \text{ Hz}$



Hence the VBW setting for the average measurement is 1kHz.

Refer to the following page for data plots..

Period

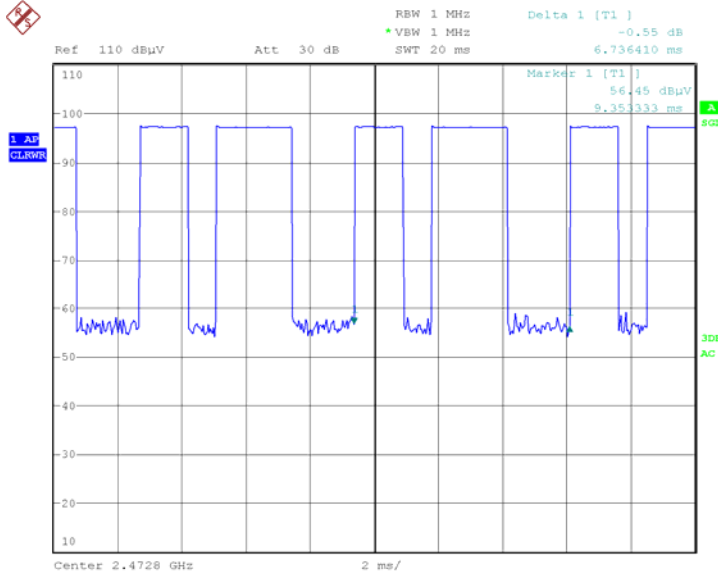

Transmission duration (T)

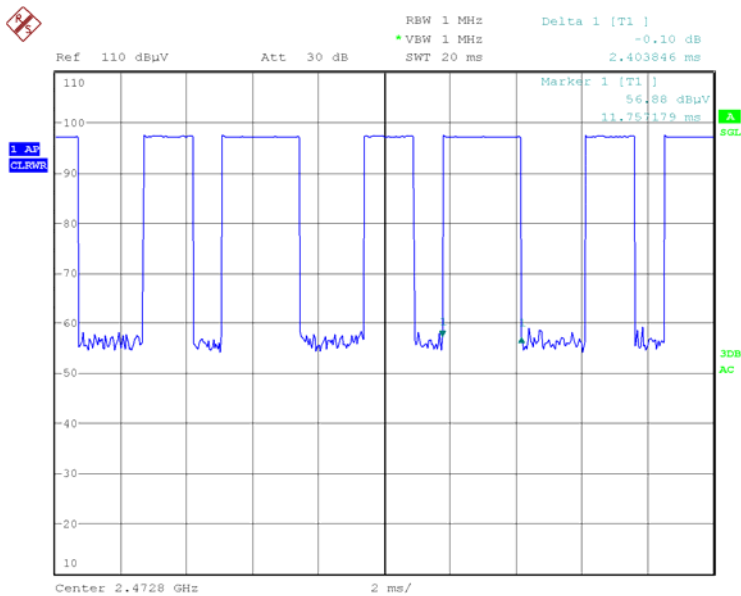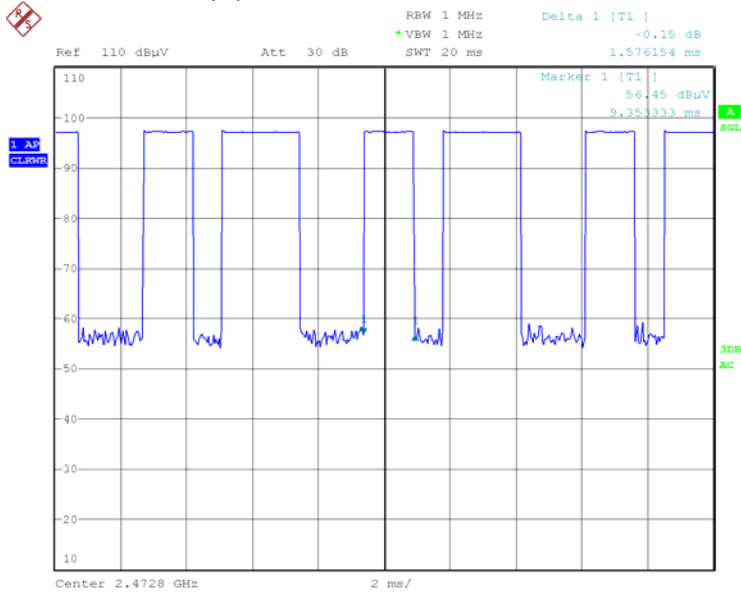

9. BANDWIDTH OF EMISSION

9.1 Applicable Standard

Per FCC rule §15.215(c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. The settings of spectrum analyzer is as followings.
 - 1) Set RBW in the range of 1% to 5% of the OBW.
 - 2) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - 3) Detector = Peak.
 - 4) Trace mode = max hold.
 - 5) Sweep = auto couple.
 - 6) Allow the trace to stabilize.
 - 7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission. Alternatively, use the -20 dB bandwidth function of the spectrum analyzer.
3. Repeat above procedures until all frequencies measured were complete.

Figure 4: Emission bandwidth measurement configuration.



9.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	ESU 40	2015/10/07	2016/10/06


9.4 Measurement Data

Test Date : Aug. 23, 2016 Temperature : 25 °C Humidity : 68 %

- a) Lower Band Edge : The 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section 15.249.
- b) Upper Band Edge : The 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section 15.249.


Note : The expanded uncertainty: frequency $\times 1.65 \times 10^{-6}$ (1 GHz $< f \leq 18$ GHz).

Lower band edge / -20dB BW plot of the lowest channel

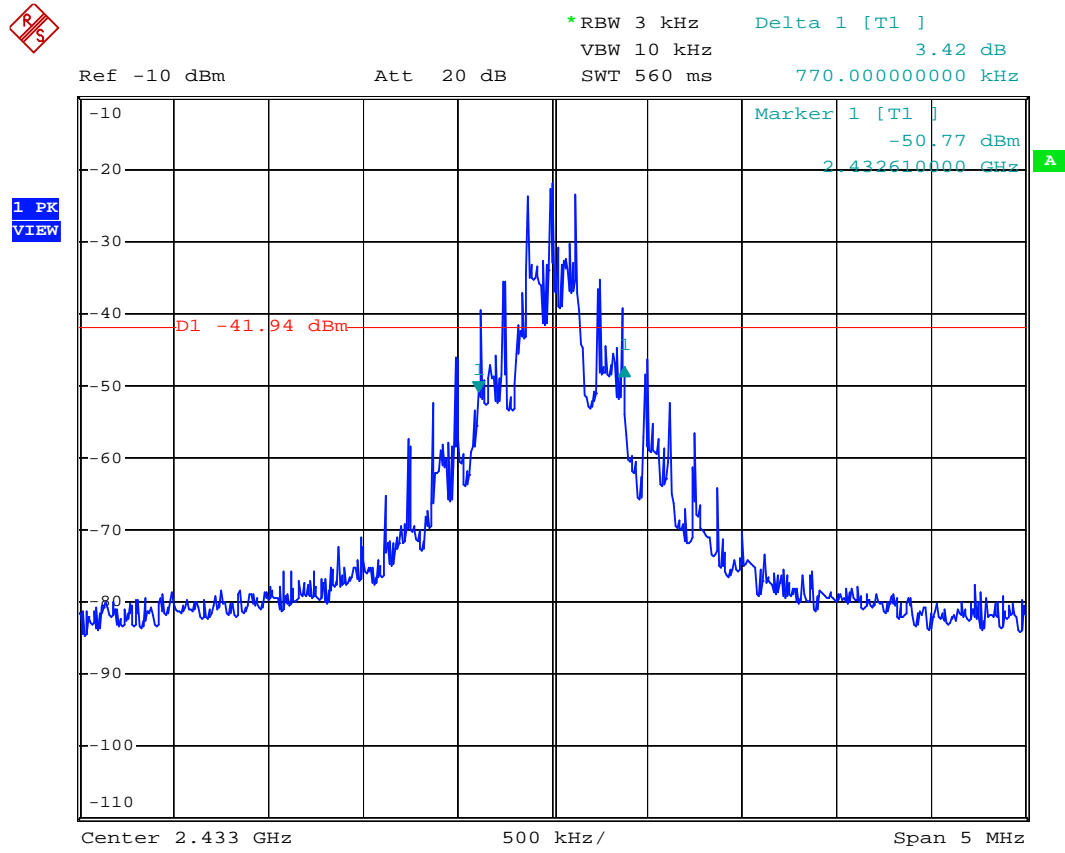

The 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section 15.249.

Upper band edge / -20dB BW plot of the highest channel

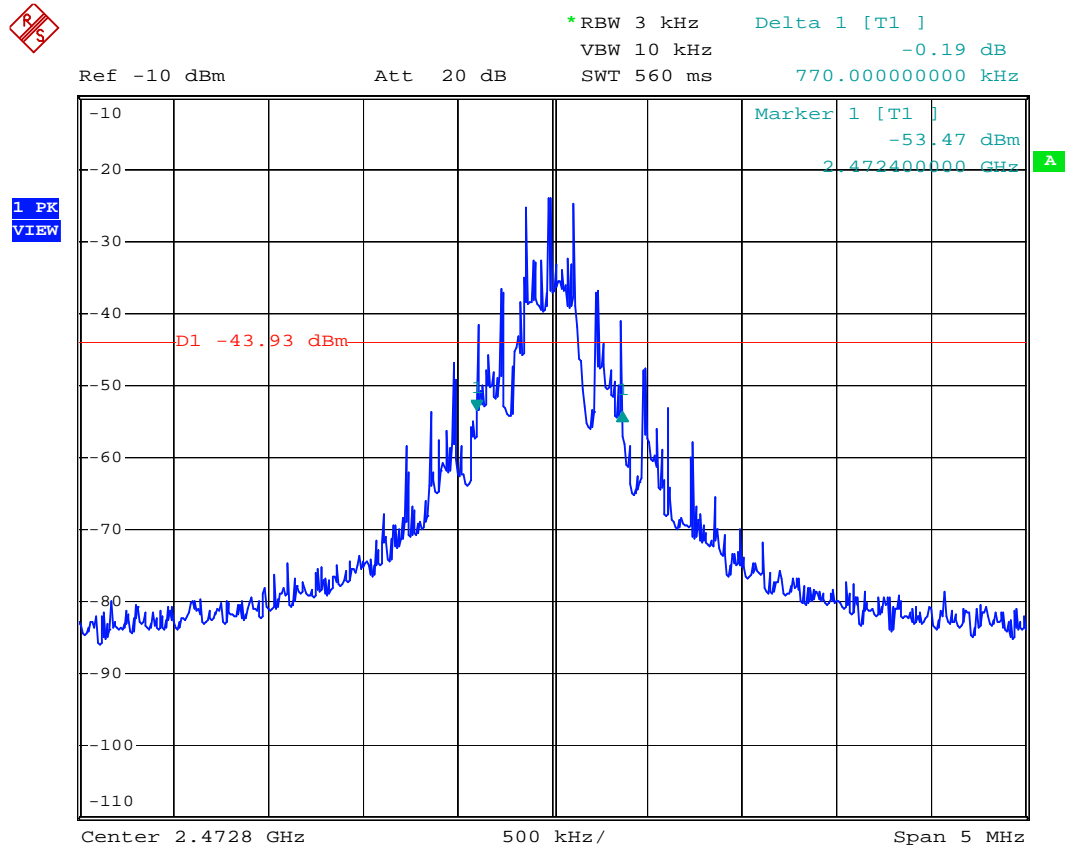

The 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section 15.249.