



FCC TEST REPORT

REPORT NO.: RF980717L11

MODEL NO.: HDR160

RECEIVED: Jul. 17, 2009

TESTED: Jul. 22 ~ Jul. 29, 2009

ISSUED: Aug. 24, 2009

APPLICANT: Sennheiser electronic GmbH & Co.KG

ADDRESS: Am Labor 1, D-30900 Wedemark Postfach 100
264, D-30892 Wedemark, Germany

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

This test report consists of 38 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3.	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	7
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	8
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	9
3.4	DESCRIPTION OF SUPPORT UNITS	9
4.	TEST TYPES AND RESULTS	10
4.1	RADIATED EMISSION MEASUREMENT	10
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT	10
4.1.2	TEST INSTRUMENTS	11
4.1.3	TEST PROCEDURES	12
4.1.4	DEVIATION FROM TEST STANDARD	12
4.1.5	TEST SETUP	13
4.1.6	EUT OPERATING CONDITIONS	13
4.1.7	TEST RESULTS	14
4.2	6dB BANDWIDTH MEASUREMENT	20
4.2.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	20
4.2.2	TEST INSTRUMENTS	20
4.2.3	TEST PROCEDURE	20
4.2.4	DEVIATION FROM TEST STANDARD	20
4.2.5	TEST SETUP	21
4.2.6	EUT OPERATING CONDITIONS	21
4.2.7	TEST RESULTS	22
4.3	MAXIMUM PEAK OUTPUT POWER	24
4.3.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	24
4.3.2	INSTRUMENTS	24
4.4.3	TEST PROCEDURES	24
4.4.4	DEVIATION FROM TEST STANDARD	24
4.4.5	TEST SETUP	25



A D T

4.4.6	EUT OPERATING CONDITIONS.....	25
4.4.7	TEST RESULTS.....	25
4.4	POWER SPECTRAL DENSITY MEASUREMENT.....	26
4.4.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	26
4.4.2	TEST INSTRUMENTS.....	26
4.4.3	TEST PROCEDURE.....	26
4.4.4	DEVIATION FROM TEST STANDARD.....	26
4.4.5	TEST SETUP.....	27
4.4.6	EUT OPERATING CONDITION.....	27
4.4.7	TEST RESULTS.....	28
4.5	BAND EDGES MEASUREMENT.....	30
4.5.1	LIMITS OF BAND EDGES MEASUREMENT.....	30
4.5.2	TEST INSTRUMENTS.....	30
4.5.3	TEST PROCEDURE.....	30
4.5.4	DEVIATION FROM TEST STANDARD.....	30
4.5.5	EUT OPERATING CONDITION.....	30
4.5.6	TEST RESULTS.....	31
4.6	ANTENNA REQUIREMENT.....	35
4.6.1	STANDARD APPLICABLE.....	35
4.6.2	ANTENNA CONNECTED CONSTRUCTION.....	35
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	36
6.	INFORMATION ON THE TESTING LABORATORIES.....	37
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	38



1. CERTIFICATION

PRODUCT: Digital Wireless Headphone System (RS160)
MODEL: HDR160
BRAND: SENNHEISER
APPLICANT: Sennheiser electronic GmbH & Co.KG
TESTED: Jul. 22 ~ Jul. 29, 2009
TEST SAMPLE: MASS-PRODUCTION
STANDARDS: FCC Part 15, Subpart C (Section 15.247)
ANSI C63.4-2003

The above equipment (model: HDR160) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Polly Chien , **DATE** : Aug. 24, 2009
Polly Chien / Specialist

TECHNICAL ACCEPTANCE : Long Chen , **DATE** : Aug. 24, 2009
Responsible for RF Long Chen / Senior Engineer

APPROVED BY : Gary Chang , **DATE** : Aug. 24, 2009
Gary Chang / Assistant Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	NA	Power supply is 2.4Vdc from battery.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -8.18dB at 2400.00MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Digital Wireless Headphone System (RS160)
MODEL NO.	HDR160
FCC ID	DMOHDR160
POWER SUPPLY	5Vdc from adapter 2.4Vdc from battery
MODULATION TYPE	MSK
TRANSFER RATE	2.37Mb/s
OPERATING FREQUENCY	2403MHz ~ 2478MHz
NUMBER OF CHANNEL	16
MAXIMUM OUTPUT POWER	1.71mW
ANTENNA TYPE	Refer to NOTE 1 for more details
DATA CABLE	NA
I/O PORTS	NA
ACCESSORY DEVICES	Adapter, battery

NOTE:

1. The antennas used in this EUT are listed as below table:

NO.	TYPE	CONNECTOR	GAIN (dBi)
1	Inverted F	NA	2.79
2	Inverted F	NA	3.97

* Antenna 2 was chosen for final test.

2. The EUT was powered by the following adapter:

BRAND	SENNHEISER
MODEL	SSA-4P 5050F
INPUT POWER	100-240Vac, 50-60Hz, 0.2A
OUTPUT POWER	5Vdc, 500mA
POWER LINE	DC:1.8 m non-shielded cable without core


3. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES

16 channels are provided to this EUT

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
0	2403 MHz	8	2443 MHz
1	2408 MHz	9	2448 MHz
2	2413 MHz	10	2453 MHz
3	2418 MHz	11	2458 MHz
4	2423 MHz	12	2463 MHz
5	2428 MHz	13	2468 MHz
6	2433 MHz	14	2473 MHz
7	2438 MHz	15	2478 MHz

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

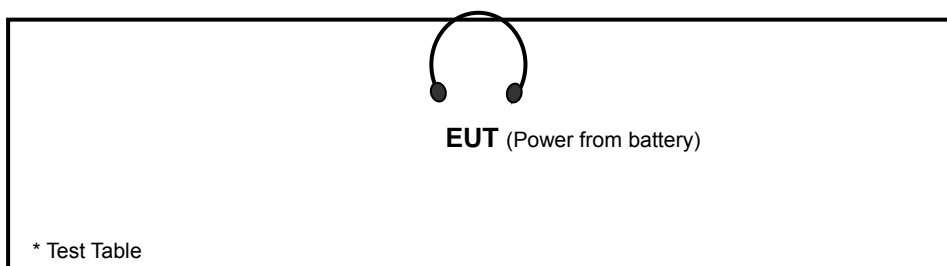



3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	NOTE	√	-

Where **PLC**: Power Line Conducted Emission **RE<1G**: Radiated Emission below 1GHz
RE≥1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	AXIS
-	0 to 15	0, 8, 15	MSK	Y

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	AXIS
-	0 to 15	0	MSK	Y

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	0 to 15	0, 15	MSK

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	0 to 15	0, 8, 15	MSK

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit.

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400 / F(kHz)	300
0.490 ~ 1.705	24000 / F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100212	May 25, 2009	May 24, 2010
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Aug. 08, 2008	Aug. 07, 2009
BILOG Antenna SCHWARZBECK	VULB9168	9168-156	Apr. 30, 2009	Apr. 29, 2010
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-563	Aug. 06, 2008	Aug. 05, 2009
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 06, 2009	Jan. 05, 2010
Preamplifier Agilent	8449B	3008A01911	Sep. 10, 2008	Sep. 09, 2009
Preamplifier Agilent	8447D	2944A10638	Dec. 26, 2008	Dec. 25, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218190/4 231241/4	May 13, 2009	May 12, 2010
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 09, 2008	Aug. 08, 2009
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn TableController EMCO	2090	NA	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 9.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 460141.
 5. The IC Site Registration No. is IC 7450F-4.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

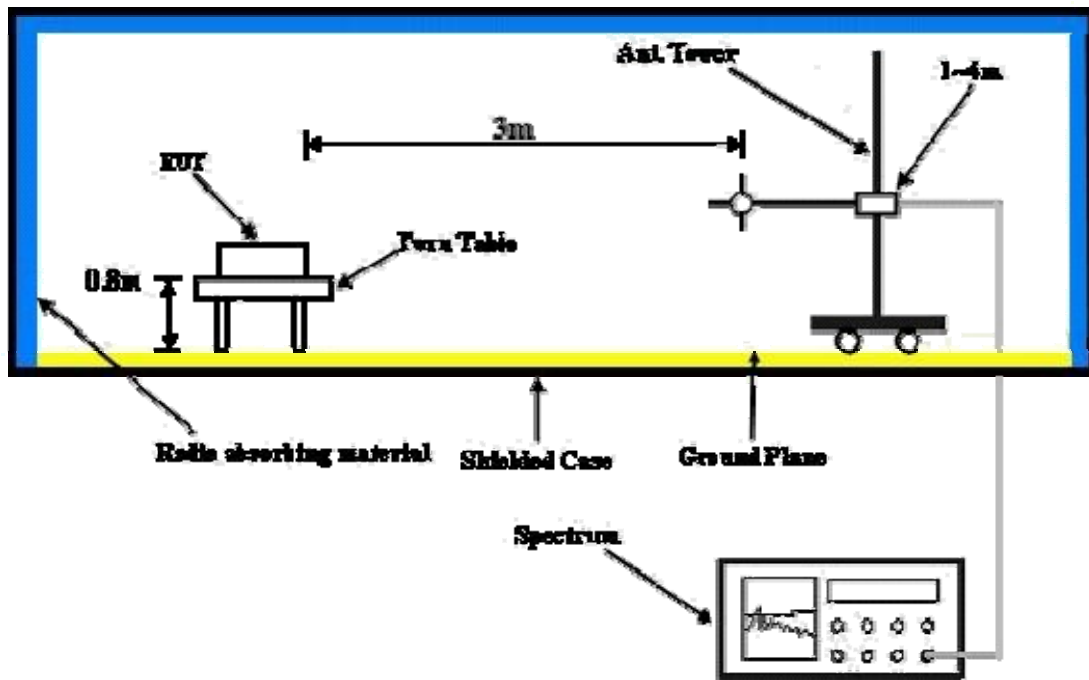

For the actual test configuration, please refer to the attached file (Test Setup Photo)

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Set the EUT under transmitting function.

4.1.7 TEST RESULTS

ABOVE 1GHz DATA

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000 hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	49.94 PK	74.00	-24.06	1.40 H	70	17.72	32.22
2	2390.00	40.80 AV	54.00	-13.20	1.40 H	70	8.58	32.22
3	#2400.00	76.02 PK	84.39	-8.37	1.41 H	71	43.76	32.26
4	#2400.00	37.89 AV	46.26	-8.37	1.41 H	71	5.63	32.26
5	*2403.00	104.39 PK			1.41 H	71	72.12	32.27
6	*2403.00	66.26 AV			1.41 H	71	33.99	32.27
7	4806.00	56.27 PK	74.00	-17.73	1.00 H	20	17.97	38.30
8	4806.00	9.96 AV	54.00	-44.04	1.00 H	20	-28.34	38.30
9	#9612.00	59.91 PK	84.39	-24.48	1.15 H	111	12.57	47.34
10	#9612.00	12.47 AV	46.26	-33.79	1.15 H	111	-34.87	47.34

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency
 6. “#”:The radiated frequency is out the restricted band.
 7. The average value of fundamental frequency and harmonics is calculated by using formula as below

$$\text{Average} = \text{Reading value of RBW=1MHz and VBW=10Hz} + 20 \log (\text{duty cycle})$$

$$20 \log (\text{Duty cycle}) = 20 \log (1.68 \text{ ms} / 100 \text{ ms}) = -35.49 \text{ dB}$$

Therefore
Average=Reading value of RBW=1MHz and VBW=10Hz -35.49 dB

Please see page 19 for plotted duty.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000 hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	44.92 PK	74.00	-29.08	1.02 V	129	12.69	32.22
2	2390.00	33.84 AV	54.00	-20.16	1.02 V	129	1.61	32.22
3	#2400.00	66.13 PK	74.31	-8.18	1.03 V	130	33.87	32.26
4	#2400.00	27.96 AV	36.14	-8.18	1.03 V	130	-4.30	32.26
5	*2403.00	94.31 PK			1.03 V	130	62.04	32.27
6	*2403.00	56.14 AV			1.03 V	130	23.87	32.27
7	4806.00	51.27 PK	74.00	-22.73	1.22 V	256	12.97	38.30
8	4806.00	4.03 AV	54.00	-49.97	1.22 V	256	-34.27	38.30
9	#9612.00	60.16 PK	74.31	-14.15	1.41 V	112	12.82	47.34
10	#9612.00	12.21 AV	36.14	-23.93	1.41 V	112	-35.13	47.34

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency
6. “#”:The radiated frequency is out the restricted band.
7. The average value of fundamental frequency and harmonics is calculated by using formula as below

$$\text{Average} = \text{Reading value of RBW=1MHz and VBW=10Hz} + 20 \log (\text{duty cycle})$$

$$20 \log (\text{Duty cycle}) = 20 \log (1.68 \text{ ms} / 100 \text{ ms}) = -35.49 \text{ dB}$$

Therefore

$$\text{Average} = \text{Reading value of RBW=1MHz and VBW=10Hz} - 35.49 \text{ dB}$$

Please see page 19 for plotted duty.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 8	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000 hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2443.00	104.09 PK			1.36 H	75	71.68	32.41
2	*2443.00	66.03 AV			1.36 H	75	33.62	32.41
3	4886.00	62.16 PK	74.00	-11.84	1.00 H	47	23.74	38.43
4	4886.00	16.84 AV	54.00	-37.16	1.00 H	47	-21.58	38.43
5	#9772.00	58.37 PK	84.09	-25.72	1.41 H	300	10.83	47.53
6	#9772.00	9.38 AV	46.03	-36.65	1.41 H	300	-38.16	47.53
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2443.00	94.10 PK			1.05 V	110	61.69	32.41
2	*2443.00	55.98 AV			1.05 V	110	23.57	32.41
3	4886.00	52.64 PK	74.00	-21.36	1.20 V	266	14.21	38.43
4	4886.00	5.17 AV	54.00	-48.83	1.20 V	266	-33.26	38.43
5	#9772.00	59.94 PK	74.10	-14.16	1.39 V	120	12.41	47.53
6	#9772.00	12.18 AV	35.98	-23.80	1.39 V	120	-35.35	47.53

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency
6. “ # “: The radiated frequency is out the restricted band.
7. The average value of fundamental frequency and harmonics is calculated by using formula as below

$$\text{Average} = \text{Reading value of RBW=1MHz and VBW=10Hz} + 20 \log (\text{duty cycle})$$

$$20 \log (\text{Duty cycle}) = 20 \log (1.68 \text{ ms} / 100 \text{ ms}) = -35.49 \text{ dB}$$

Therefore

$$\text{Average} = \text{Reading value of RBW=1MHz and VBW=10Hz} - 35.49 \text{ dB}$$

Please see page 19 for plotted duty.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 15	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000 hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2478.00	103.85 PK			1.34 H	79	71.31	32.54
2	*2478.00	65.72 AV			1.34 H	79	33.18	32.54
3	2483.50	62.77 PK	74.00	-11.23	1.34 H	66	30.21	32.56
4	2483.50	30.23 AV	54.00	-23.77	1.34 H	66	-2.33	32.56
5	4956.00	61.35 PK	74.00	-12.65	1.00 H	47	22.75	38.60
6	4956.00	15.76 AV	54.00	-38.24	1.00 H	47	-22.84	38.60
7	#9912.00	57.84 PK	83.85	-26.01	1.02 H	298	10.08	47.75
8	#9912.00	9.13 AV	45.72	-36.59	1.02 H	298	-38.63	47.75
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2478.00	93.76 PK			1.51 V	110	61.22	32.54
2	*2478.00	55.80 AV			1.51 V	110	23.26	32.54
3	2483.50	52.47 PK	74.00	-21.53	1.51 V	110	19.91	32.56
4	2483.50	14.51 AV	54.00	-39.49	1.51 V	110	-18.05	32.56
5	4956.00	59.99 PK	74.00	-14.01	1.13 V	89	21.39	38.60
6	4956.00	14.49 AV	54.00	-39.51	1.13 V	89	-24.11	38.60
7	#9912.00	59.27 PK	73.76	-14.49	1.07 V	86	11.51	47.75
8	#9912.00	12.71 AV	35.80	-23.09	1.07 V	86	-35.04	47.75

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency
 6. “#”:The radiated frequency is out the restricted band.
 7. The average value of fundamental frequency and harmonics is calculated by using formula as below
 Average = Reading value of RBW=1MHz and VBW=10Hz + 20 log (duty cycle)
 20 log (Duty cycle) = 20 log (1.68 ms / 100 ms) = -35.49 dB
 Therefore
 Average=Reading value of RBW=1MHz and VBW=10Hz -35.49 dB
 Please see page 19 for plotted duty.

BELOW 1GHz WORST-CASE DATA



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 999 hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	543.19	26.91 QP	46.00	-19.09	1.00 H	184	6.36	20.56
2	794.01	25.38 QP	46.00	-20.62	1.00 H	10	0.22	25.16
3	850.39	25.77 QP	46.00	-20.23	1.00 H	283	0.14	25.63
4	904.83	25.57 QP	46.00	-20.43	1.00 H	49	-0.58	26.15
5	918.44	25.76 QP	46.00	-20.24	1.00 H	37	-0.49	26.25
6	949.55	30.23 QP	46.00	-15.77	2.00 H	295	3.74	26.49
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	543.19	27.07 QP	46.00	-18.93	1.25 V	352	6.52	20.56
2	811.50	25.72 QP	46.00	-20.28	1.25 V	22	0.33	25.39
3	860.11	25.86 QP	46.00	-20.14	1.50 V	304	0.13	25.73
4	895.11	26.36 QP	46.00	-19.64	1.00 V	34	0.29	26.06
5	932.05	27.02 QP	46.00	-18.98	1.25 V	85	0.66	26.35
6	945.66	29.12 QP	46.00	-16.88	1.25 V	214	2.67	26.46

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

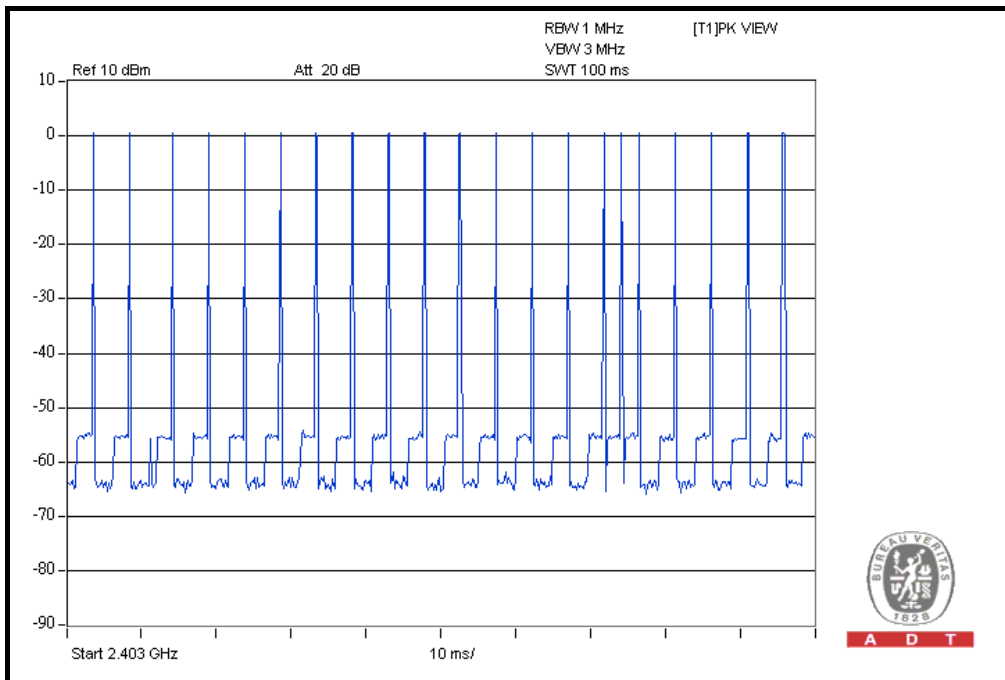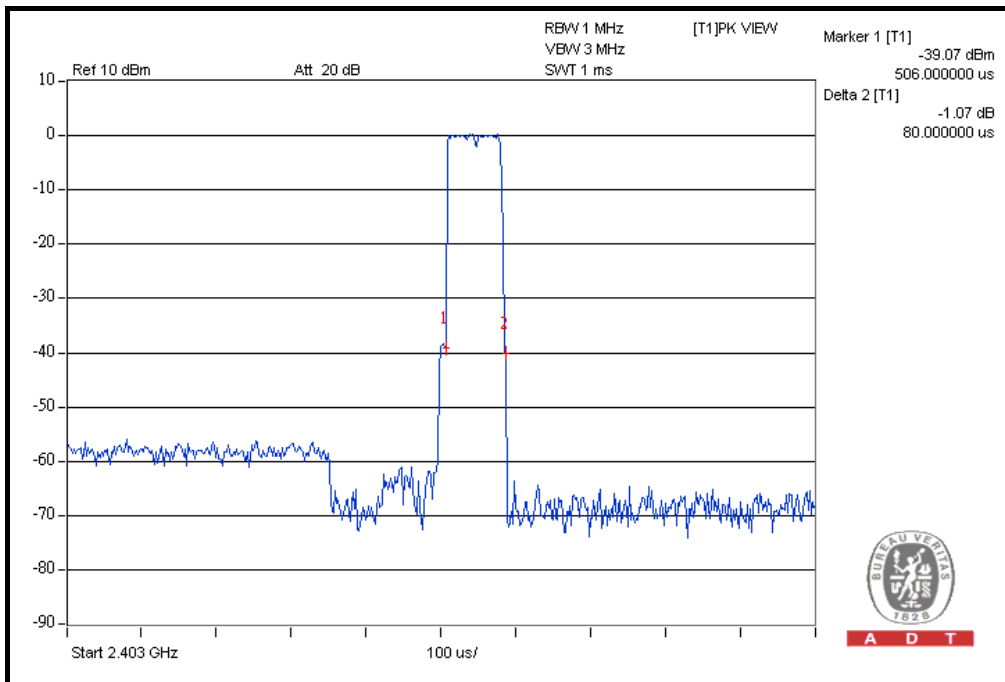

$$20 \log (\text{Duty cycle}) = 20 \log (0.08 \cdot 21 \text{ ms} / 100 \text{ ms}) = -35.49 \text{ dB}$$

4.2 6dB BANDWIDTH MEASUREMENT

4.2.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Jul. 07, 2009	Jul. 06, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.2.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP



4.2.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




A D T

4.2.7 TEST RESULTS

MODULATION TYPE	MSK	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Brad Wu

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2403	1.85	0.5	PASS
8	2443	1.83	0.5	PASS
15	2478	1.78	0.5	PASS

CH 0

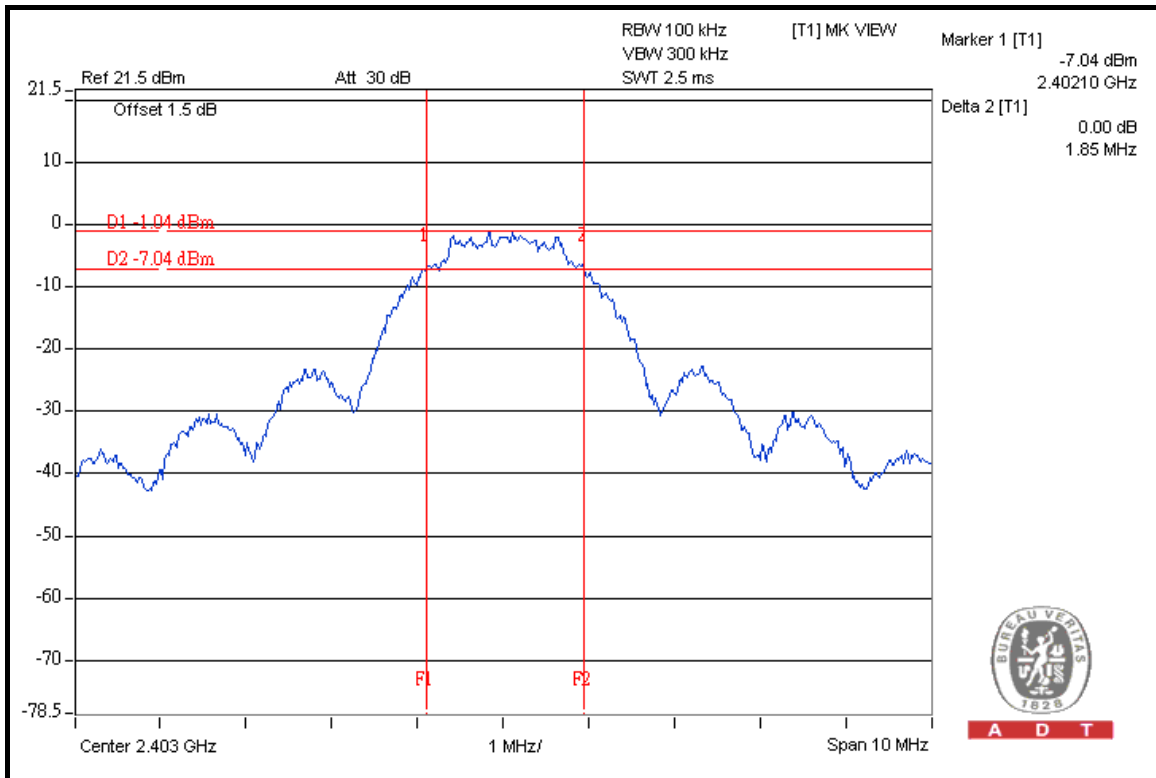


A D T




A D T

CH 8

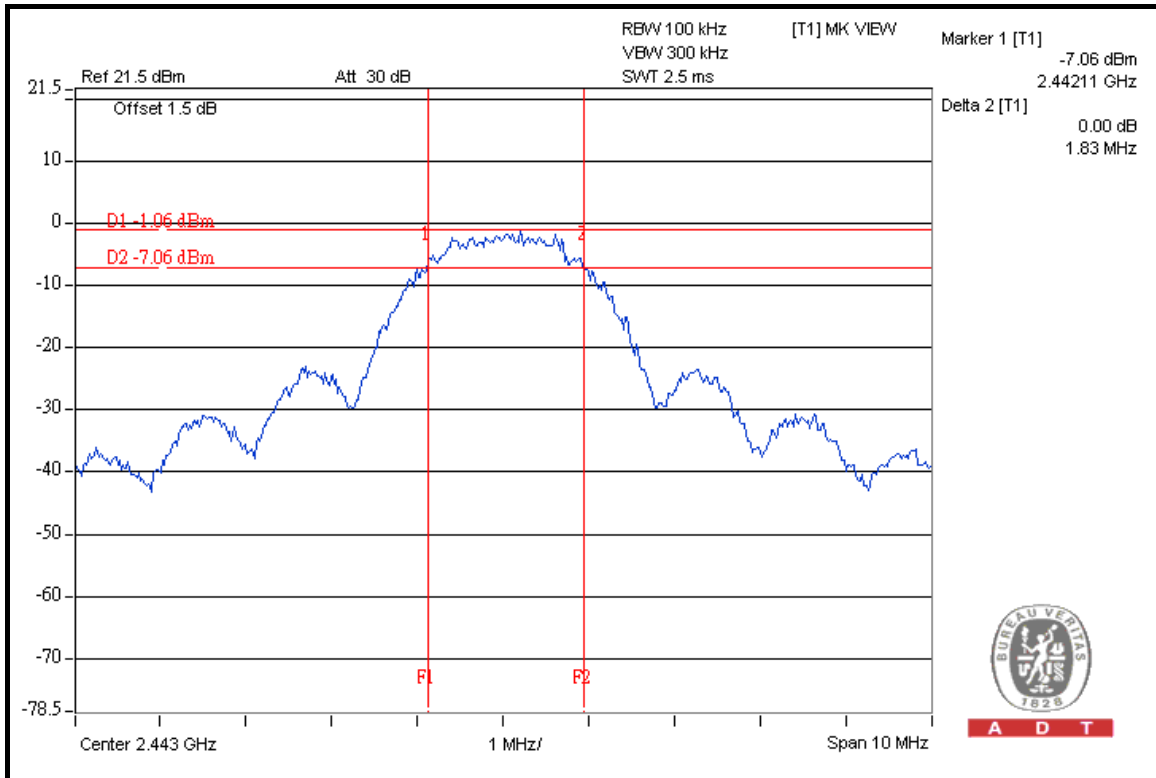

CH 15

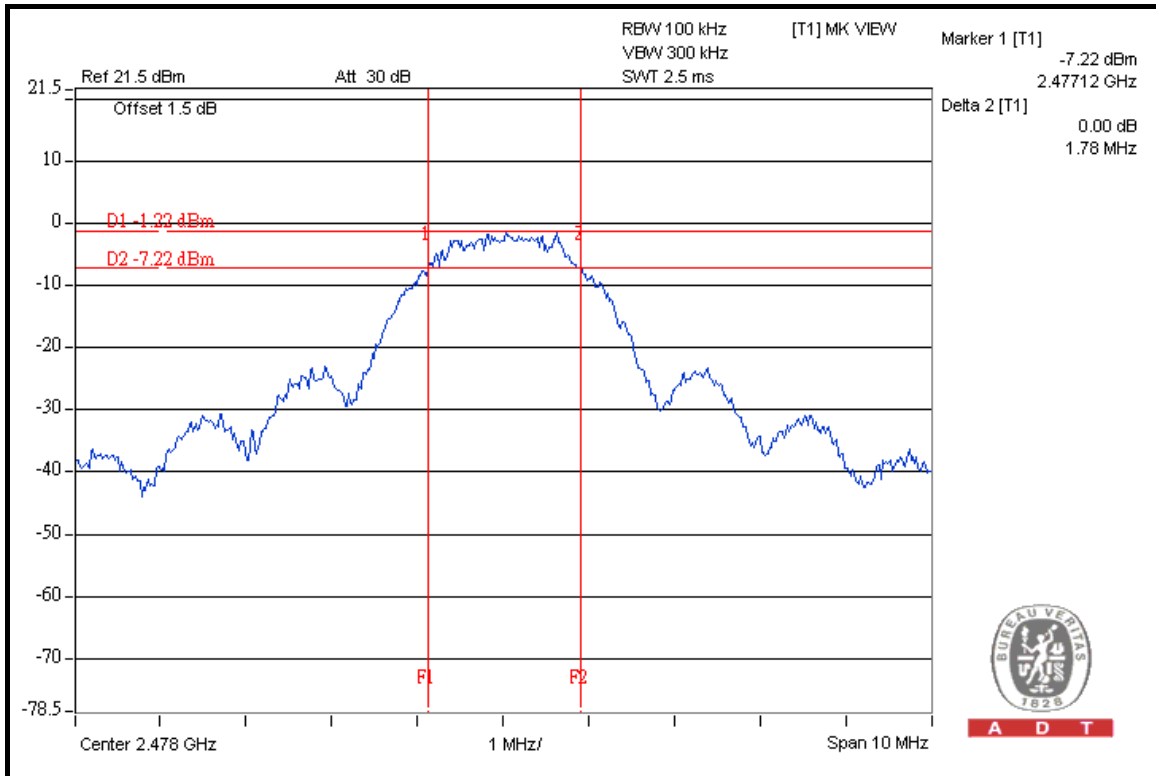

4.3 MAXIMUM PEAK OUTPUT POWER

4.3.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.3.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	CALIBRATED UNTIL
High Speed Peak Power Meter	ML2495A	0824012	Aug. 04, 2008	Aug. 03, 2009
Power Sensor	MA2411B	0738138	Aug. 04, 2008	Aug. 03, 2009

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Measurement Bandwidth of ML2495A is 65MHz greater than 6dB bandwidth of emission.


4.4.3 TEST PROCEDURES

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP

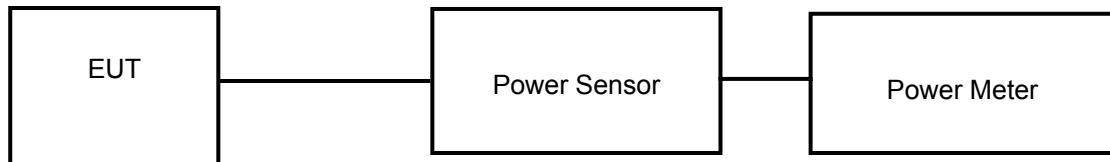

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.

4.4.7 TEST RESULTS

MODULATION TYPE	MSK	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Brad Wu

CHAN	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
0	2403	1.71	2.33	30	PASS
8	2443	1.63	2.12	30	PASS
15	2478	1.58	1.98	30	PASS



4.4 POWER SPECTRAL DENSITY MEASUREMENT

4.4.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Jul. 07, 2009	Jul. 06, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITION


Same as Item 4.3.6.

4.4.7 TEST RESULTS

MODULATION TYPE	MSK	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Brad Wu

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
0	2403	-14.03	8	PASS
8	2443	-14.14	8	PASS
15	2478	-14.14	8	PASS


CH 0

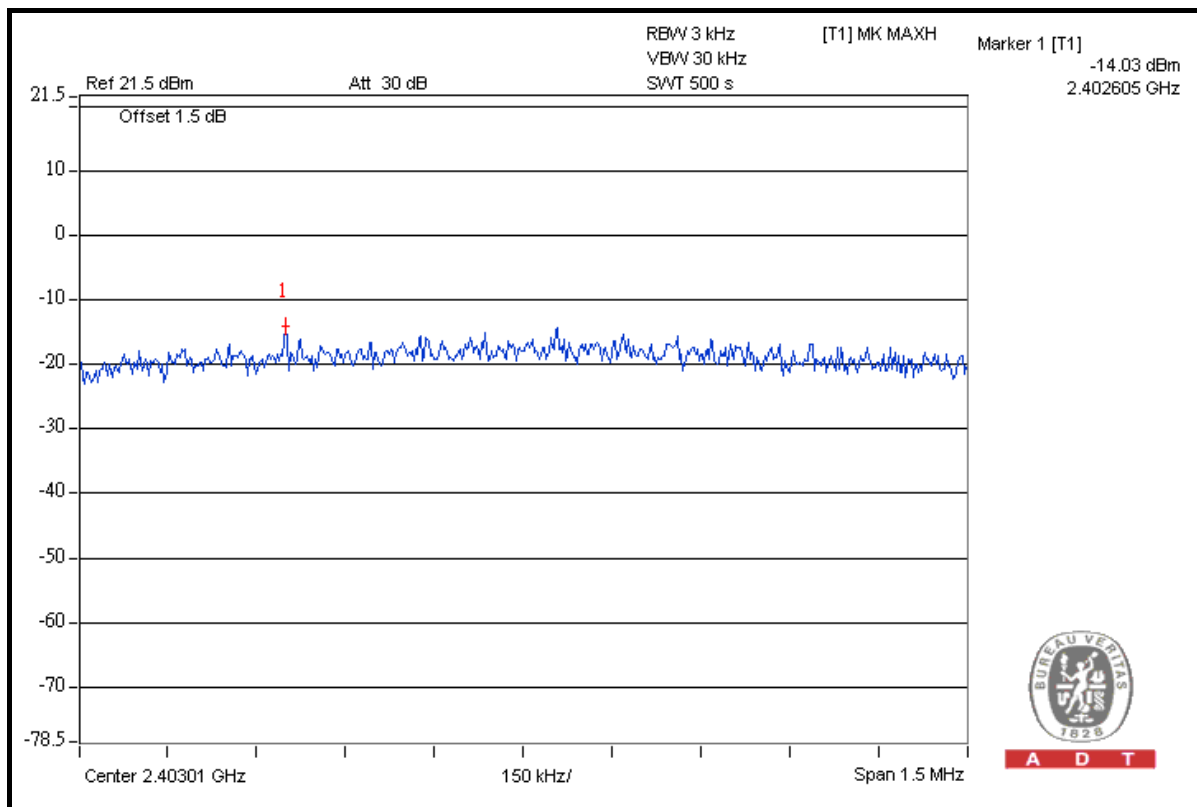




A D T

CH 8

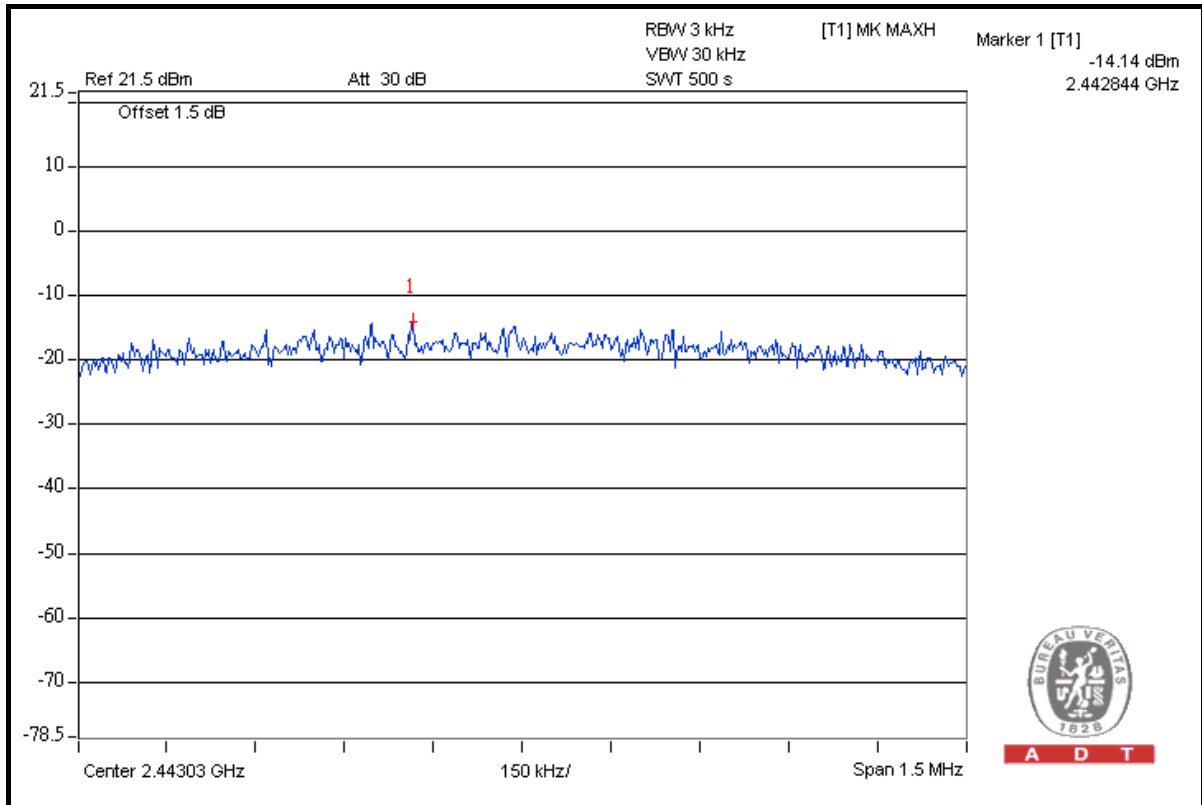

CH 15

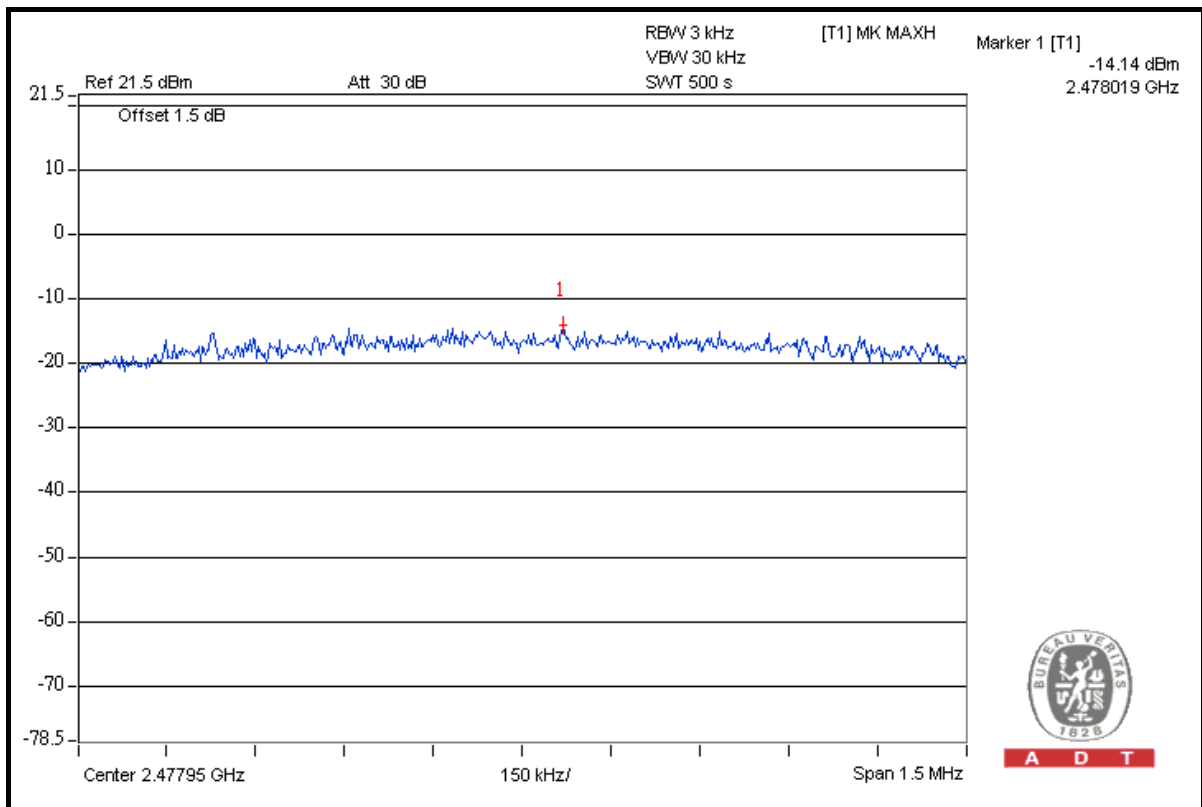

4.5 BAND EDGES MEASUREMENT

4.5.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Jul. 07, 2009	Jul. 06, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW = 100kHz, VBW = 300kHz; Average RBW = 1MHz, VBW = 10Hz) are attached on the following pages.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

4.5.5 EUT OPERATING CONDITION

Same as Item 4.3.6.

4.5.6 TEST RESULTS

The spectrum plots are attached on the following 6 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

NOTE 1: The band edge emission plot on the next second page shows 45.53dBc between carrier maximum power and local maximum emission in restrict band (2.3446GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.1.7 is 104.39dBuV/m (Peak), so the maximum field strength in restrict band is $104.39 - 45.53 = 58.86$ dBuV/m which is under 74dBuV/m limit.


The band edge emission plot on the next second page shows 58.01dBc between carrier maximum power and local maximum emission in restrict band (2.3802GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.1.7 is 66.26dBuV/m (Average), so the maximum field strength in restrict band is $66.26 - 58.01 = 8.25$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next third page shows 40.78dBc between carrier maximum power and local maximum emission in restrict band (2.4838GHz). The emission of carrier strength list in the test result of channel 15 at the item 4.1.7 is 103.85dBuV/m (Peak), so the maximum field strength in restrict band is $103.85 - 40.78 = 63.07$ dBuV/m which is under 74dBuV/m limit.


The band edge emission plot on the next fourth page shows 41.91dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 15 at the item 4.1.7 is 65.72dBuV/m (Average), so the maximum field strength in restrict band is $65.72 - 41.91 = 23.81$ dBuV/m which is under 54dBuV/m limit.



A D T

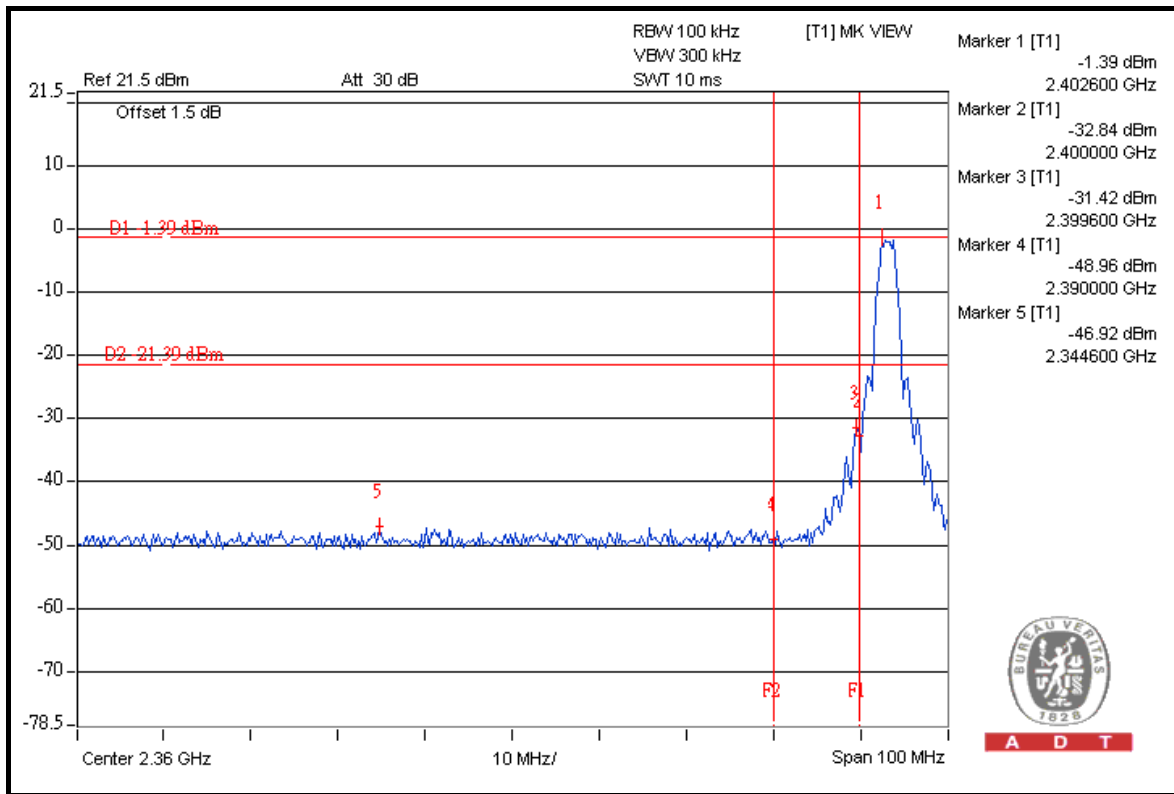



A D T

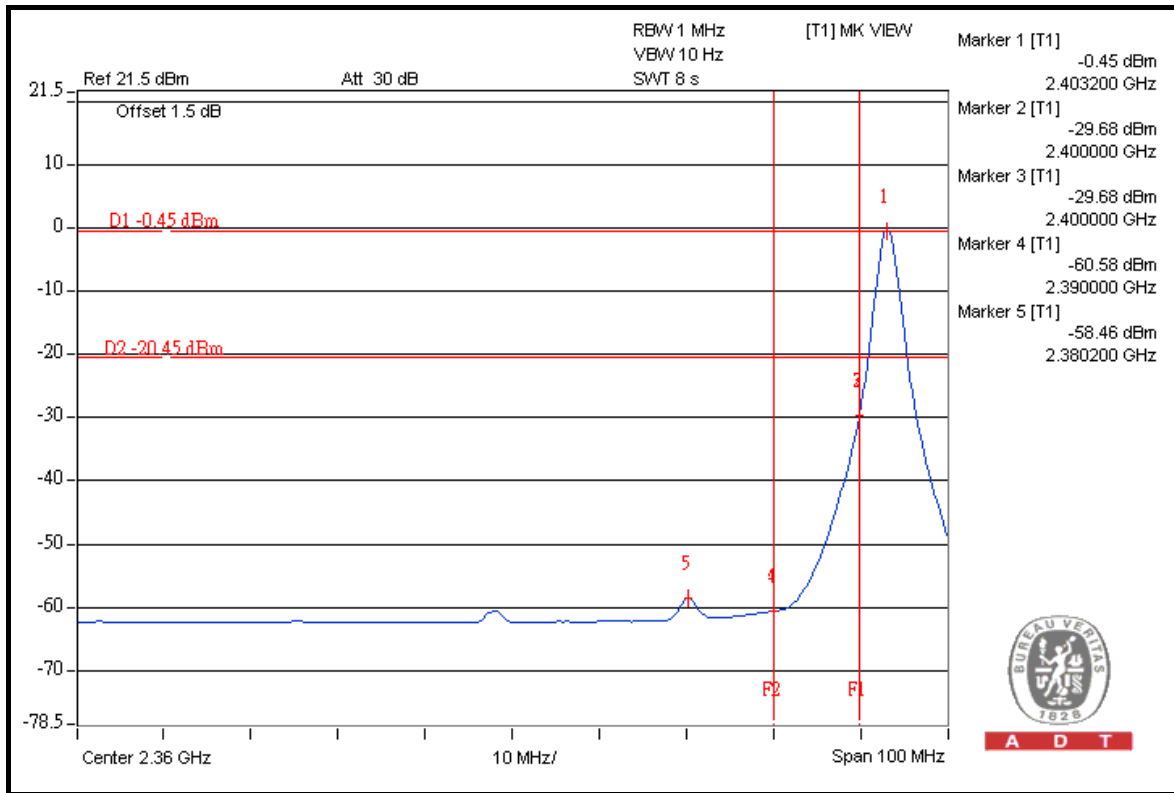

A D T





A D T

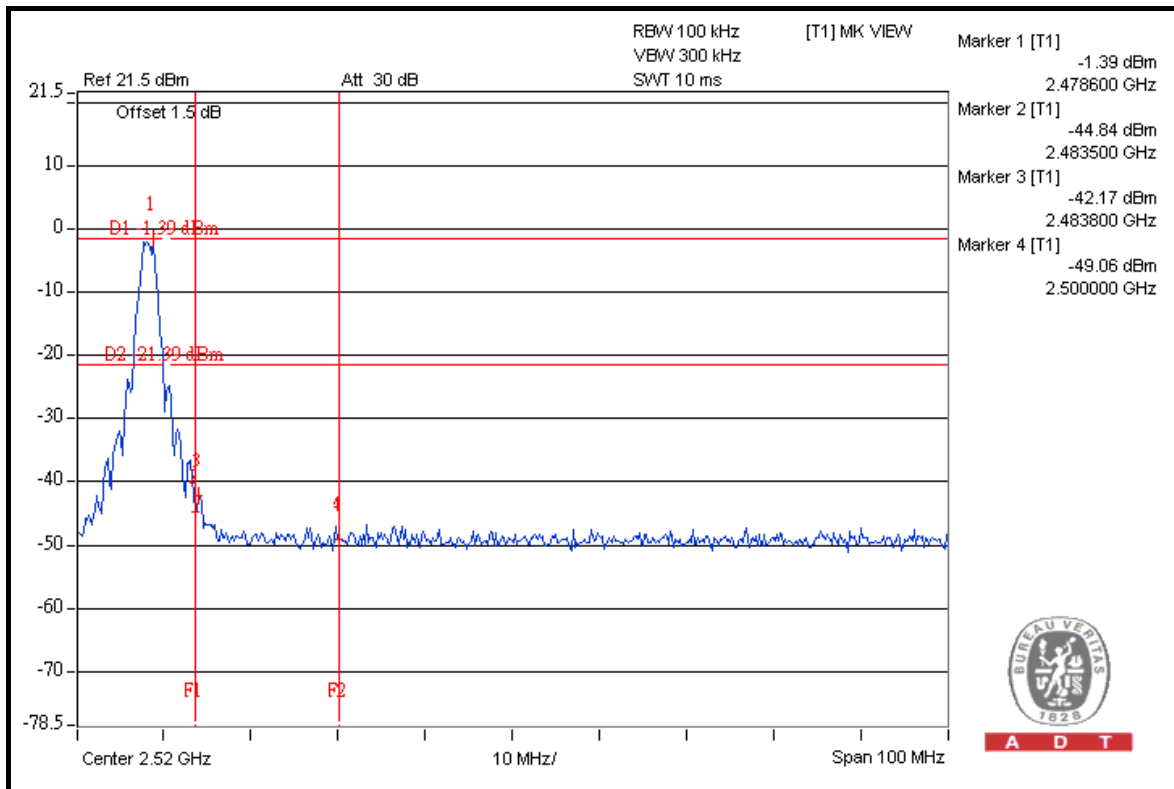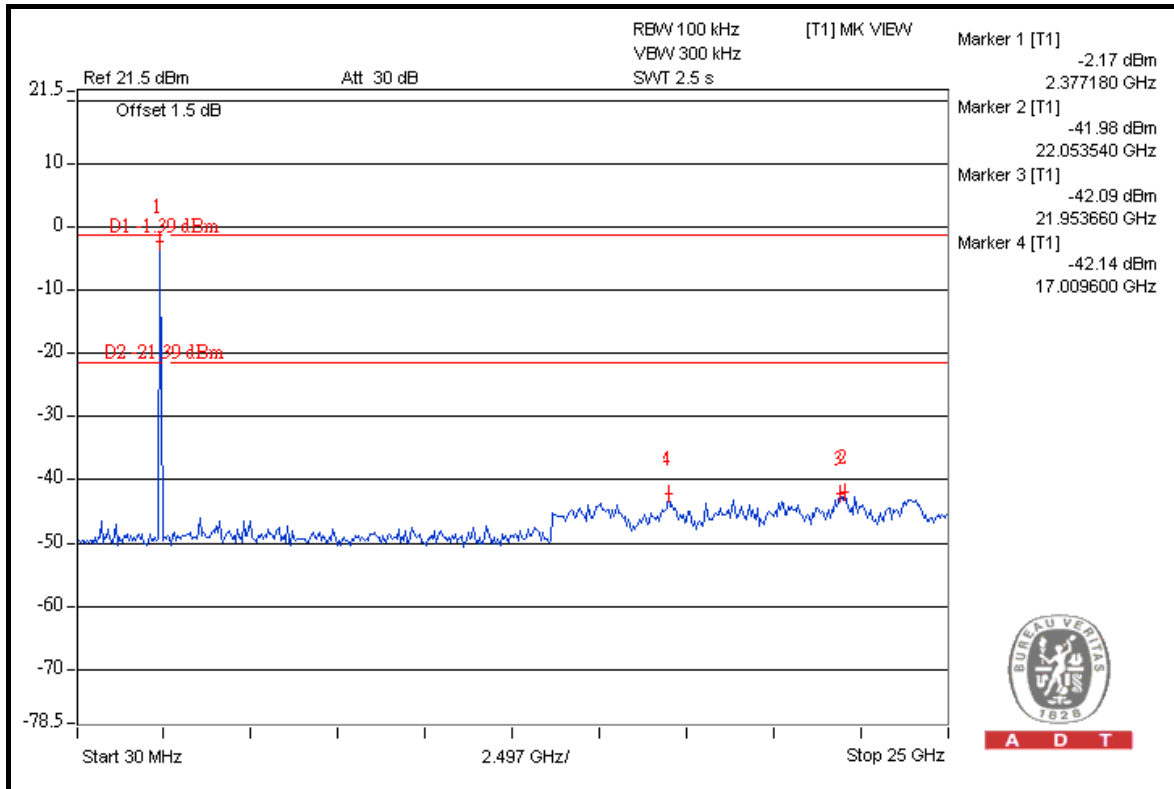



A D T

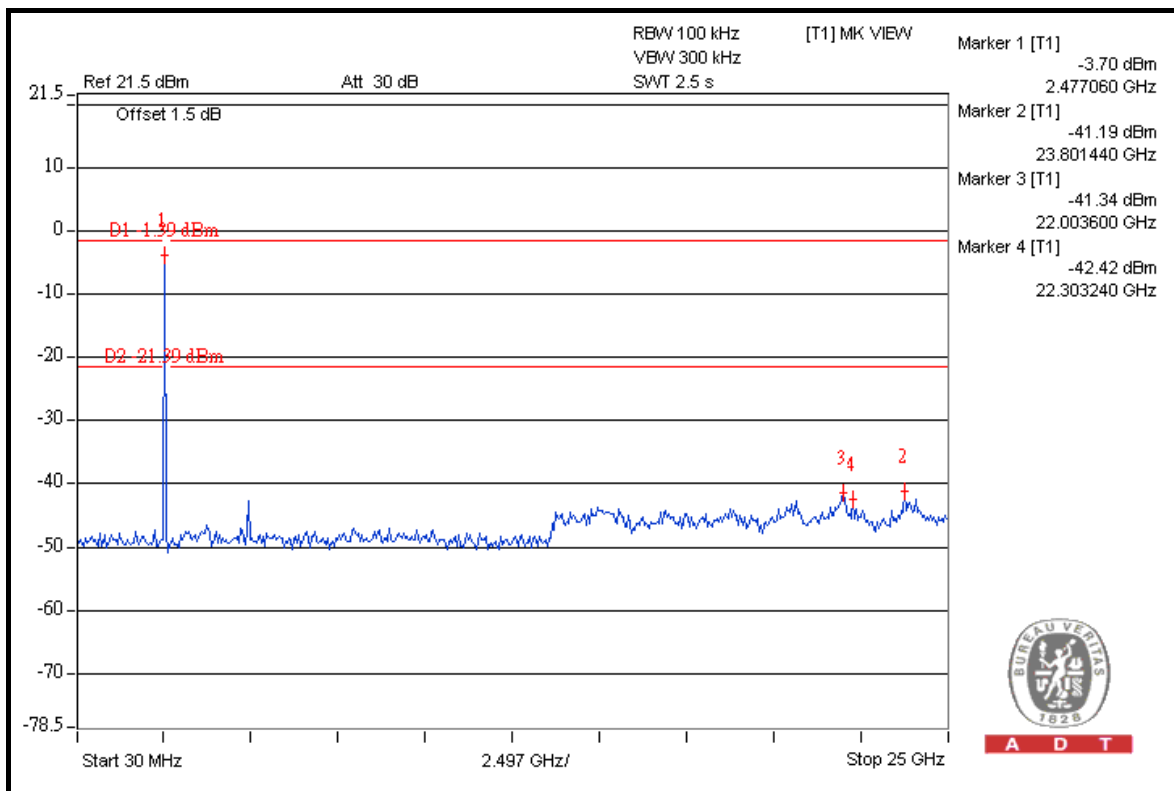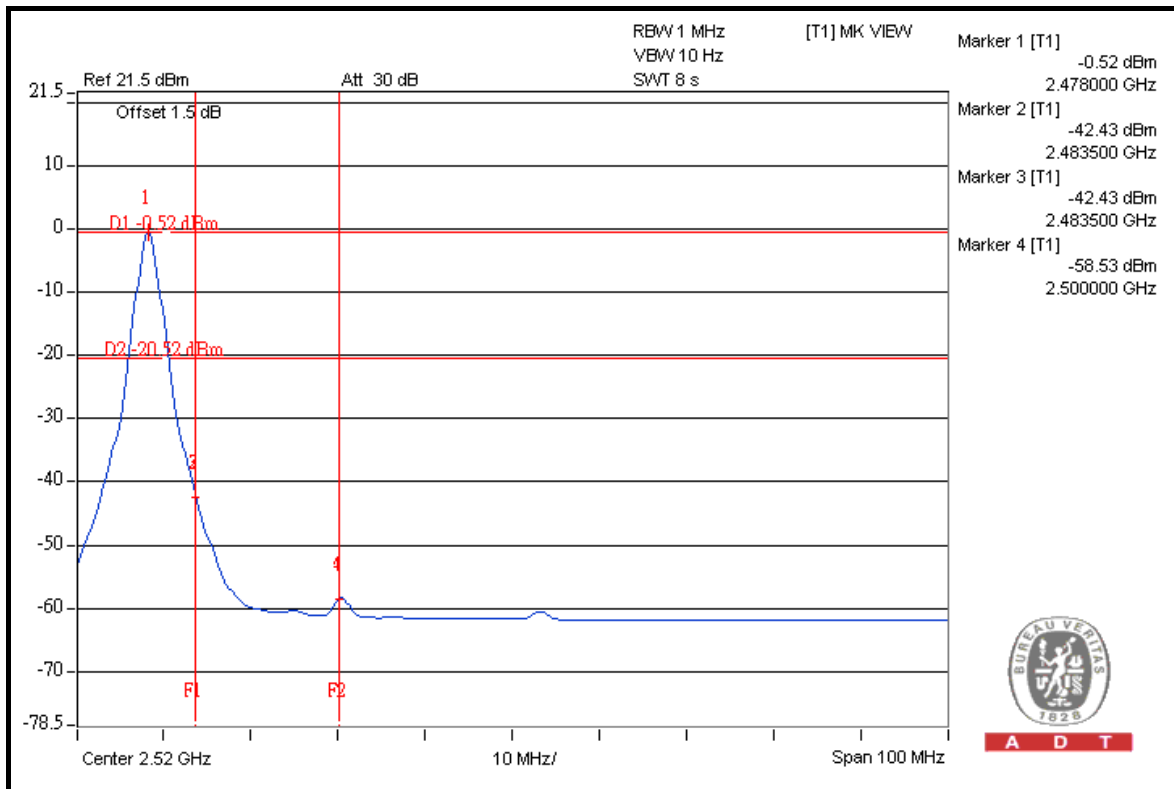

4.6 ANTENNA REQUIREMENT

4.6.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.6.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Inverted F antenna without antenna connector. The maximum Gain of the antenna is 3.97dBi.

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---