


FCC Test Report

FCC ID : DMOSCBT6
Equipment : HD 4.40BT
HD 4.50BTNC
Model No. : SCBT6
SCBT7
(Refer to item 1.1.1 for more details)
Brand Name : Sennheiser
Applicant : Sennheiser Communications A/S
Address : Industriparken 27, Ballerup 2750, Denmark
Standard : 47 CFR FCC Part 15.247
Received Date : Aug. 29, 2016
Tested Date : Aug. 31 ~ Sep. 21, 2016

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:



Along Chen / Assistant Manager

Approved by:



Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List.....	8
1.3	Test Setup Chart.....	8
1.4	The Equipment List	9
1.5	Test Standards	10
1.6	Measurement Uncertainty	10
2	TEST CONFIGURATION.....	11
2.1	Testing Condition	11
2.2	The Worst Test Modes and Channel Details.....	11
3	TRANSMITTER TEST RESULTS	12
3.1	Conducted Emissions	12
3.2	Unwanted Emissions into Restricted Frequency Bands	17
3.3	Unwanted Emissions into Non-Restricted Frequency Bands.....	39
3.4	Conducted Output Power	44
3.5	Number of Hopping Frequency.....	46
3.6	20dB and Occupied Bandwidth	48
3.7	Channel Separation	50
3.8	Number of Dwell Time.....	52
4	TEST LABORATORY INFORMATION	55

Release Record

Report No.	Version	Description	Issued Date
FR682901AD	Rev. 01	Initial issue	Oct. 20, 2016
FR682901AD	Rev. 02	Add 20dB and Occupied Bandwidth in section 2.2	Nov. 01, 2016

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.369MHz 39.33 (Margin -9.19dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 798.24MHz 40.07 (Margin -5.93dB) - PK	Pass
15.247(d)	Band Edge	Meet the requirement of limit	Pass
15.247(b)(1)	Conducted Output Power	Power [dBm]: 9.55	Pass
15.247(a)(1)(iii)	Number of Hopping Channels	Meet the requirement of limit	Pass
15.247(a)(1)	Hopping Channel Separation	Meet the requirement of limit	Pass
15.247(a)(1)(iii)	Dwell Time	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

1 General Description

1.1 Information

1.1.1 Product Details

The following models are provided to this EUT.

Brand Name	Model Name	Product Name	Description
Sennheiser	SCBT6	HD 4.40BT	---
	SCBT7	HD 4.50BTNC	Having components for Active Noise Cancellation

1.1.2 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number	Data Rate
2400-2483.5	BR	2402-2480	0-78 [79]	1 Mbps
2400-2483.5	EDR	2402-2480	0-78 [79]	2 Mbps
2400-2483.5	EDR	2402-2480	0-78 [79]	3 Mbps

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.
 Note 2: Bluetooth BR uses a GFSK.
 Note 3: Bluetooth EDR uses a combination of $\pi/4$ -DQPSK and 8DPSK.

1.1.3 Antenna Details

Ant. No.	Type	Gain (dBi)	Connector	Remark
1	PIFA	2	---	---

1.1.4 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	5Vdc from host 3.7Vdc from battery
-------------------	---------------------------------------

1.1.5 Accessories

Accessories		
No.	Equipment	Description
1	Battery	Brand Name: SYnergy ScienTech Corp. Model Name: AHB622540PCT-02 Power Rating: Typical Voltage: 3.7Vdc, 630mAh Charging Voltage: 4.2Vdc, 262mAh
2	Audio cable	1.4m non-shielded without core
3	USB cable (for charging use)	1.07m shielded cable without core.

1.1.6 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	---	---

1.1.7 Test Tool and Duty Cycle

Test Tool	Blue Tool, version 2.5
------------------	------------------------



1.1.8 Power Setting

Modulation Mode	Test Frequency (MHz)		
	2402	2441	2480
GFSK/1Mbps	Default	Default	Default
$\pi/4$ -DQPSK /2Mbps	Default	Default	Default
8DPSK/3Mbps	Default	Default	Default

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	Latitude E6430	DoC	USB, 1.07m shielded.

1.3 Test Setup Chart

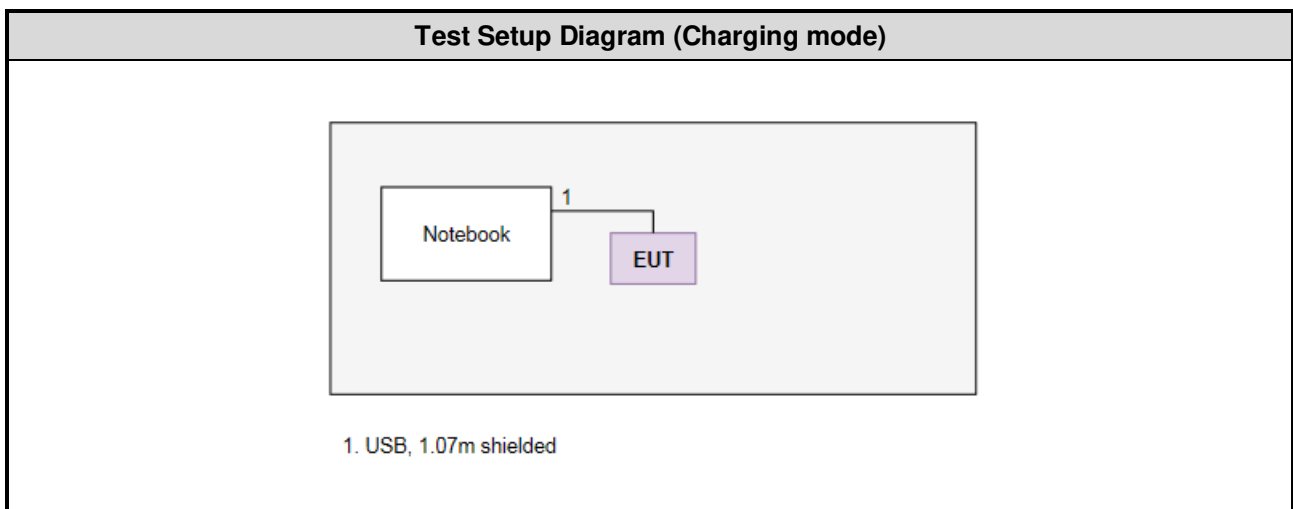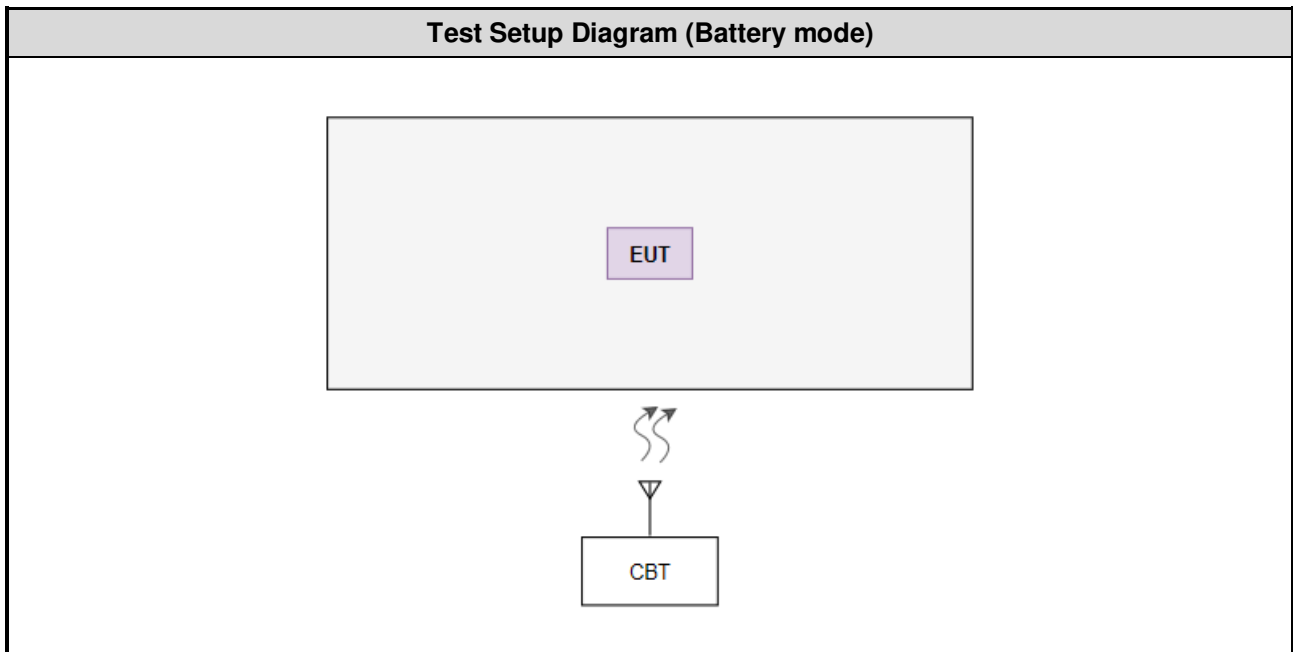

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
EMC Receiver	R&S	ESCS 30	100169	Oct. 21, 2015	Oct. 20, 2016
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 13, 2015	Nov. 12, 2016
RF Cable-CON	EMC	EMCCFD300-BM-BM-6000	50821	Dec. 21, 2015	Dec. 20, 2016
Measurement Software	AUDIX	e3	6.120210k	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	Radiated Emission				
Test Site	966 chamber 3 / (03CH03-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Dec. 13, 2015	Dec. 12, 2016
Receiver	Agilent	N9038A	MY53290044	Oct. 14, 2015	Oct. 13, 2016
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Apr. 26, 2016	Apr. 25, 2017
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Feb. 24, 2016	Feb. 23, 2017
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 04, 2015	Nov. 03, 2016
Preamplifier	EMC	EMC02325	980225	Aug. 05, 2016	Aug. 04, 2017
Preamplifier	Agilent	83017A	MY53270014	Aug. 22, 2016	Aug. 21, 2017
Preamplifier	EMC	EMC184045B	980192	Aug. 24, 2016	Aug. 23, 2017
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Feb. 05, 2016	Feb. 04, 2017
RF cable-8M	HUBER+SUHNER	SUCOFLEX104	MY22600/4	Feb. 05, 2016	Feb. 04, 2017
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Feb. 05, 2016	Feb. 04, 2017
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Feb. 05, 2016	Feb. 04, 2017
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Feb. 05, 2016	Feb. 04, 2017
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Feb. 05, 2016	Feb. 04, 2017
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 16, 2015	Nov. 15, 2016
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Bluetooth Tester	ROHDE&SCHWARZ	CBT	100959	Mar. 02, 2016	Mar. 02, 2017
Spectrum Analyzer	R&S	FSV40	101063	Feb. 17, 2016	Feb. 16, 2017
Power Meter	Anritsu	ML2495A	1218007	Oct. 14, 2015	Oct. 13, 2016
Power Sensor	Anritsu	MA2411B	1207367	Oct. 14, 2015	Oct. 13, 2016
DC POWER SOURCE	GW INSTRON	GPC-3060D	EM884797	Oct. 20, 2015	Oct. 19, 2016
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2013

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.134 Hz
Conducted power	±0.808 dB
Power density	±0.463 dB
Conducted emission	±2.670 dB
AC conducted emission	±2.90 dB
Radiated emission ≤ 1GHz	±3.66 dB
Radiated emission > 1GHz	±5.37 dB

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	25°C / 55%	Howard Huang
Radiated Emissions	03CH03-WS	23-24°C / 60-66%	Vincent Yeh Aska Huang
RF Conducted	TH01-WS	23°C / 65%	Brad Wu

➤ FCC site registration No.: 207696

➤ IC site registration No.: 10807C-1

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate (Mbps)	Test Configuration
Conducted Emissions	Charging	---	---	2, 4
Radiated Emissions ≤ 1GHz	GFSK Charging	2480 ---	1Mbps ---	1, 3 2, 4
Radiated Emissions > 1GHz	GFSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480	1Mbps 3Mbps	3
Conducted Output Power	GFSK π/4 QDPSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480 2402, 2441, 2480	1Mbps 2Mbps 3Mbps	3
Number of Hopping Channels	GFSK 8DPSK	2402~2480 2402~2480	1Mbps 3Mbps	3
Hopping Channel Separation 20dB and Occupied Bandwidth	GFSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480	1Mbps 3Mbps	3
Dwell Time	GFSK 8DPSK	2402 2402	1Mbps 3Mbps	3

NOTE:

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Y-plane** results were found as the worst case and were shown in this report.
2. The EUT had been tested by following test configurations.
 - 1) Configuration 1: Model SCBT6, Battery mode
 - 2) Configuration 2: Model SCBT6, Charging mode
 - 3) Configuration 3: Model SCBT7, Battery mode
 - 4) Configuration 4: Model SCBT7, Charging mode

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

3.1.3 Test Setup

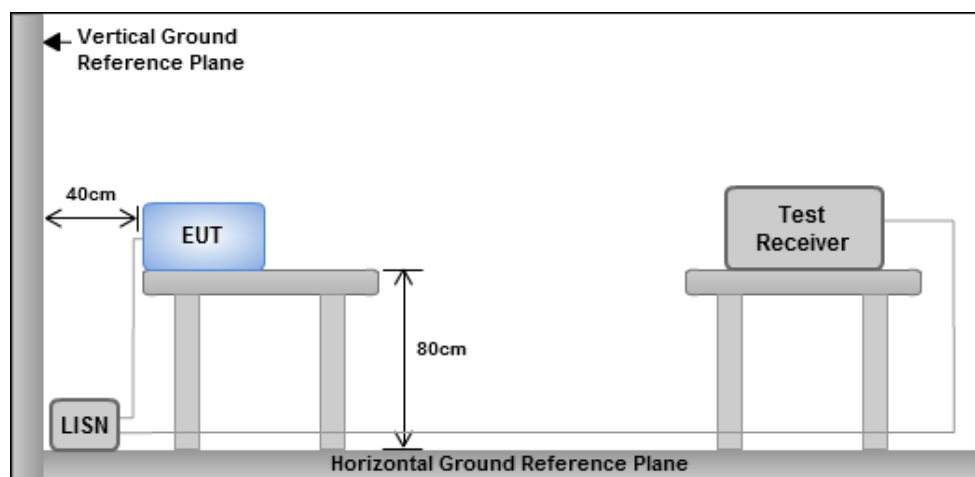


Note: 1. Support units were connected to second LISN.


2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Configuration 2: Model SCBT6, Charging mode

3.1.4 Test Result of Conducted Emissions

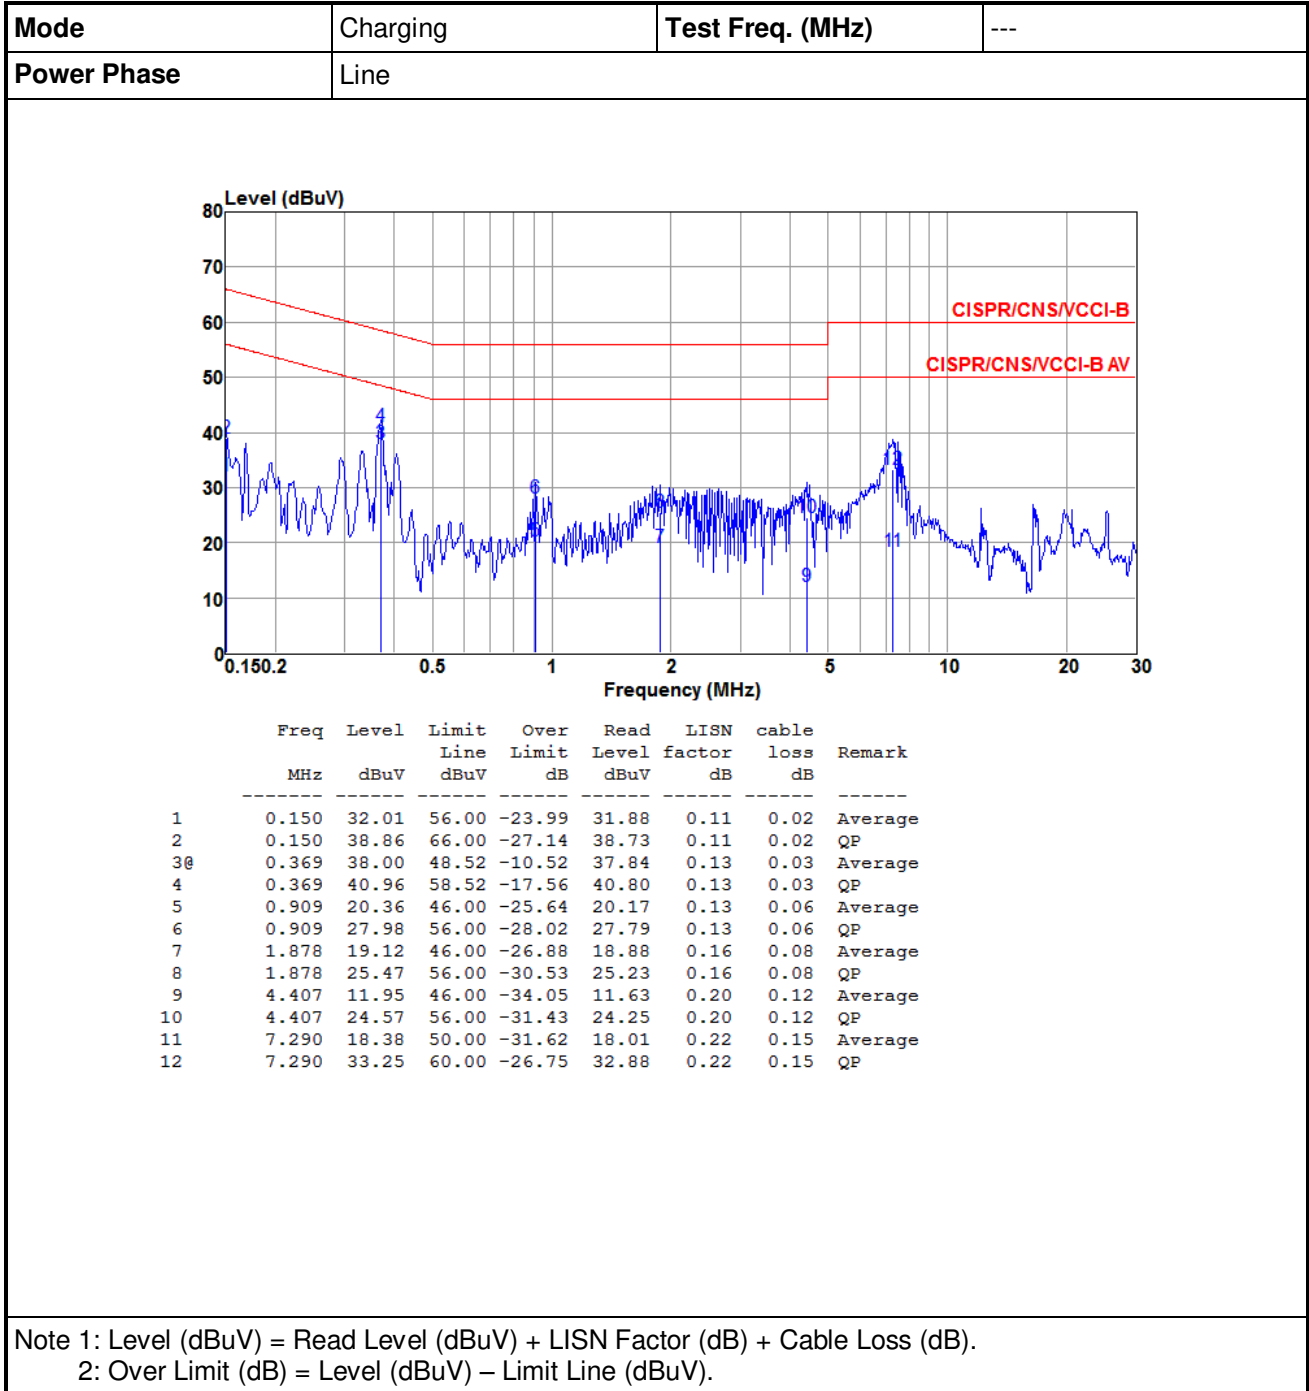

Mode	Charging	Test Freq. (MHz)	---
Power Phase	Neutral		

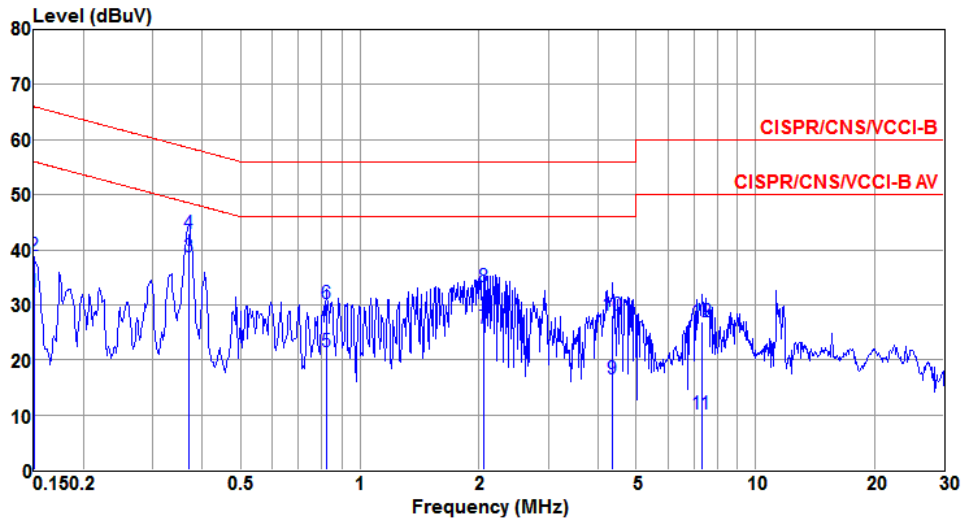


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.150	32.23	56.00	-23.77	32.08	0.13	0.02	Average
2	0.150	38.84	66.00	-27.16	38.69	0.13	0.02	QP
3	0.369	38.59	48.52	-9.93	38.42	0.14	0.03	Average
4	0.369	42.92	58.52	-15.60	42.75	0.14	0.03	QP
5	0.822	21.53	46.00	-24.47	21.35	0.13	0.05	Average
6	0.822	30.20	56.00	-25.80	30.02	0.13	0.05	QP
7	2.055	25.82	46.00	-20.18	25.57	0.17	0.08	Average
8	2.055	33.20	56.00	-22.80	32.95	0.17	0.08	QP
9	4.361	16.43	46.00	-29.57	16.13	0.18	0.12	Average
10	4.361	28.14	56.00	-27.86	27.84	0.18	0.12	QP
11	7.329	10.04	50.00	-39.96	9.65	0.24	0.15	Average
12	7.329	26.94	60.00	-33.06	26.55	0.24	0.15	QP


Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Configuration 4: Model SCBT7, Charging mode

3.1.5 Test Result of Conducted Emissions

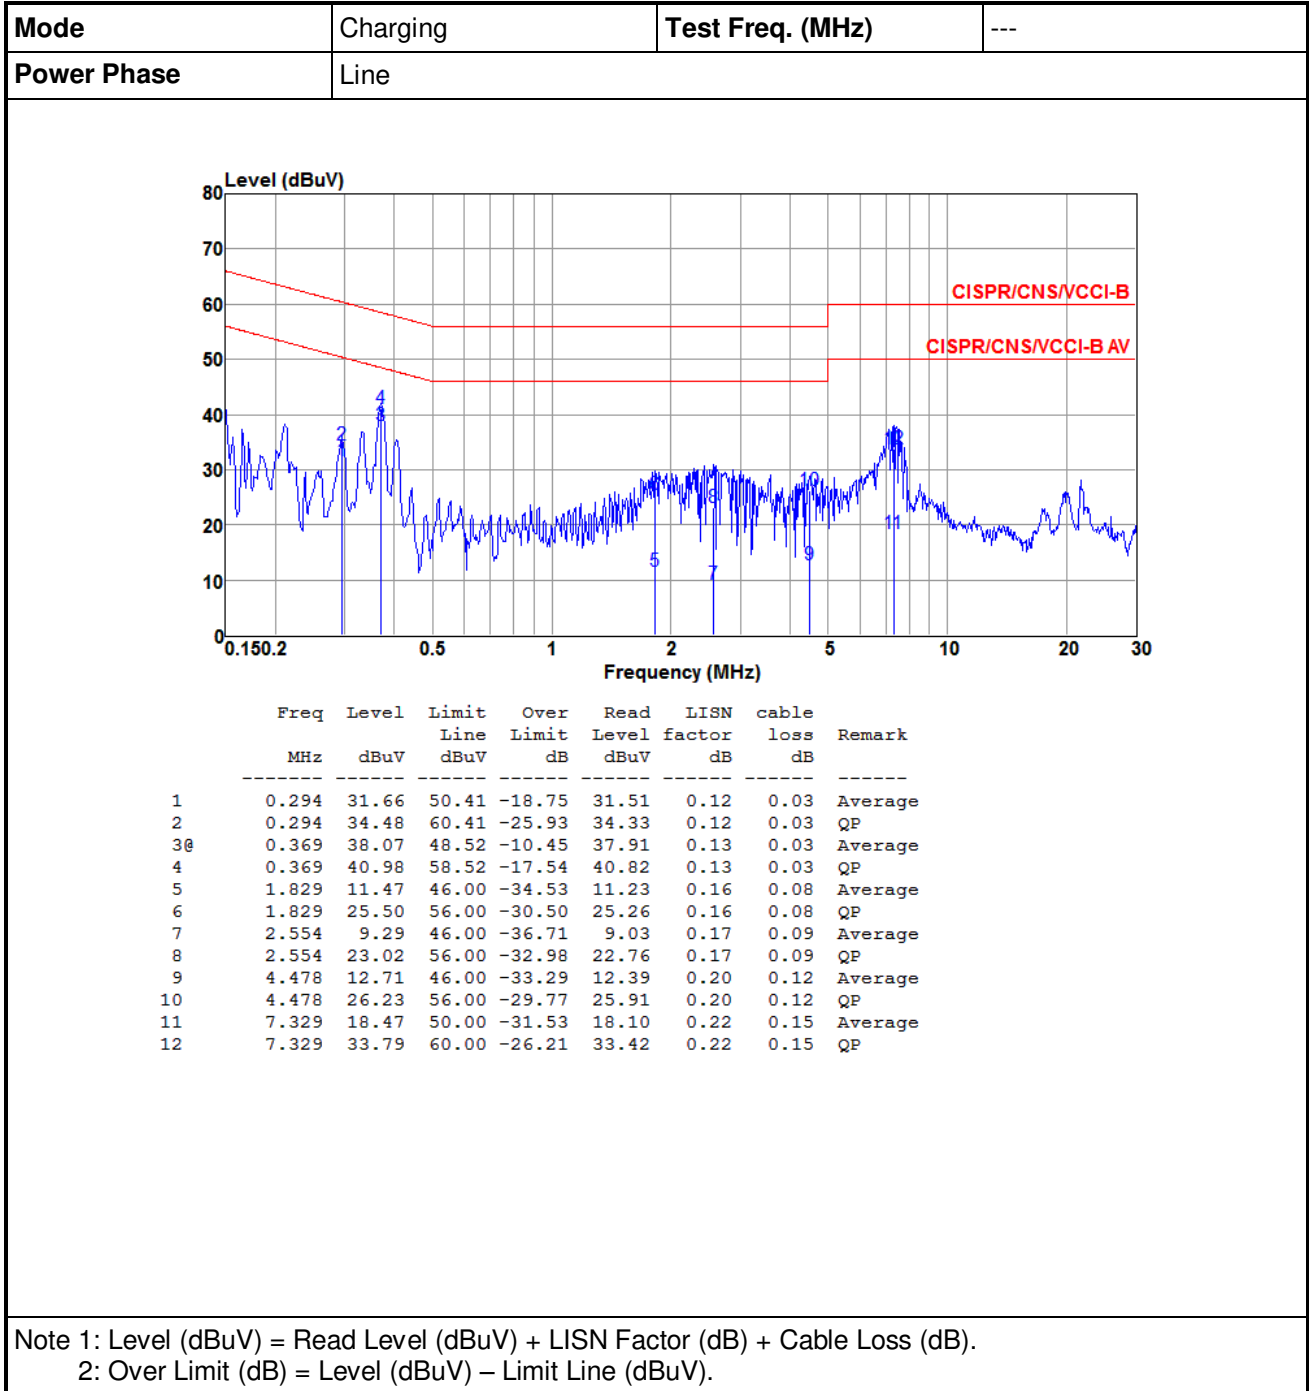

Mode	Charging	Test Freq. (MHz)	---
Power Phase	Neutral		

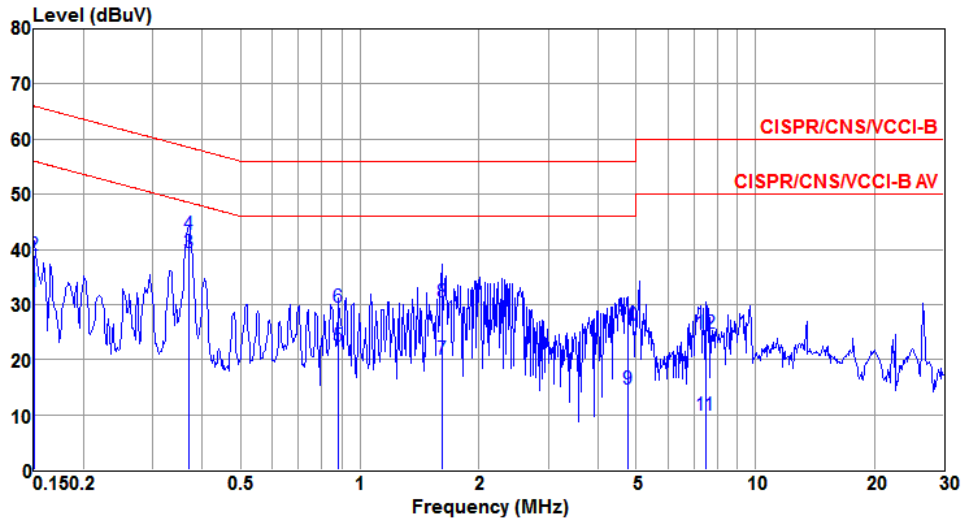

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.150	32.31	56.00	-23.69	32.16	0.13	0.02	Average
2	0.150	38.90	66.00	-27.10	38.75	0.13	0.02	QP
3	0.369	39.33	48.52	-9.19	39.16	0.14	0.03	Average
4	0.369	42.82	58.52	-15.70	42.65	0.14	0.03	QP
5	0.885	22.54	46.00	-23.46	22.35	0.13	0.06	Average
6	0.885	29.52	56.00	-26.48	29.33	0.13	0.06	QP
7	1.610	20.04	46.00	-25.96	19.81	0.16	0.07	Average
8	1.610	30.38	56.00	-25.62	30.15	0.16	0.07	QP
9	4.746	14.60	46.00	-31.40	14.28	0.19	0.13	Average
10	4.746	26.27	56.00	-29.73	25.95	0.19	0.13	QP
11	7.486	9.92	50.00	-40.08	9.53	0.24	0.15	Average
12	7.486	24.79	60.00	-35.21	24.40	0.24	0.15	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

3.2 Unwanted Emissions into Restricted Frequency Bands

3.2.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.2.2 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


Note:

1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. Radiated emission above 1GHz / Peak value
RBW=1MHz, VBW=3MHz and Peak detector


Radiated emission above 1GHz / Average value for harmonics
The average value is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula for DH5 packet type which has worst duty factor:
3.
$$20\log(\text{Duty cycle}) = 20\log \frac{1\text{s} / 1600 * 5}{100 \text{ ms}} = -30.1\text{dB}$$
4. Radiated emission above 1GHz / Average value for other emissions
RBW=1MHz, VBW=1/T and Peak detector

3.2.3 Test Setup

Radiated Emissions below 1 GHz

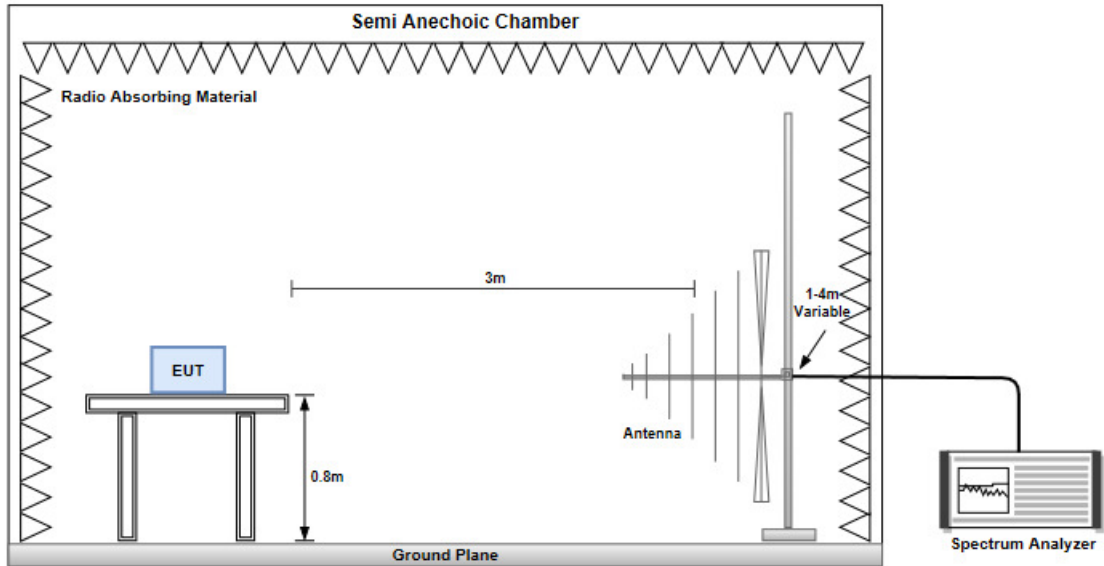


Radiated Emissions above 1 GHz

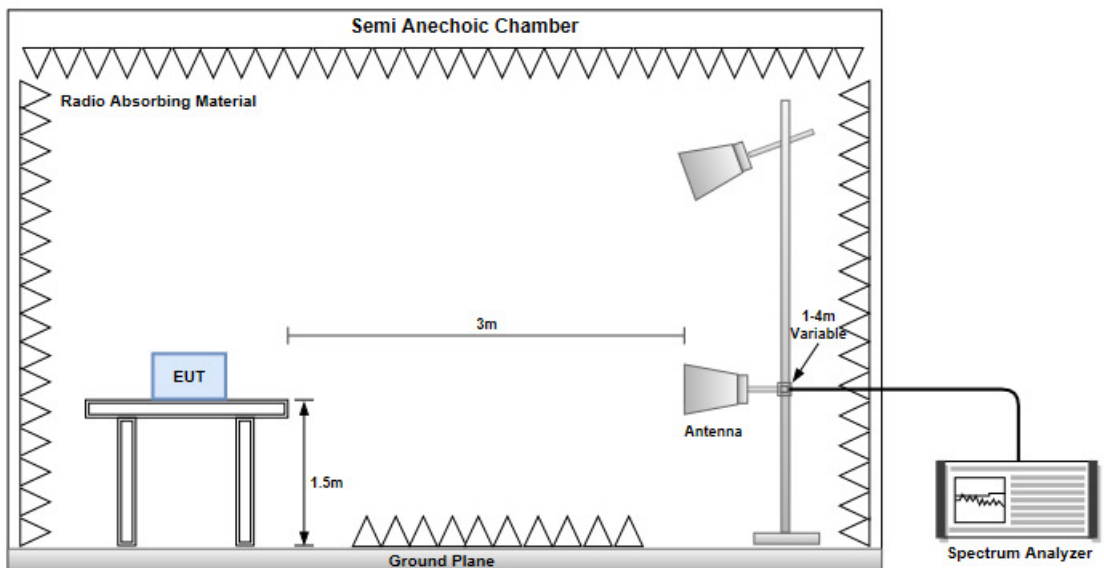


Configuration 1: Model SCBT6, Battery mode

3.2.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

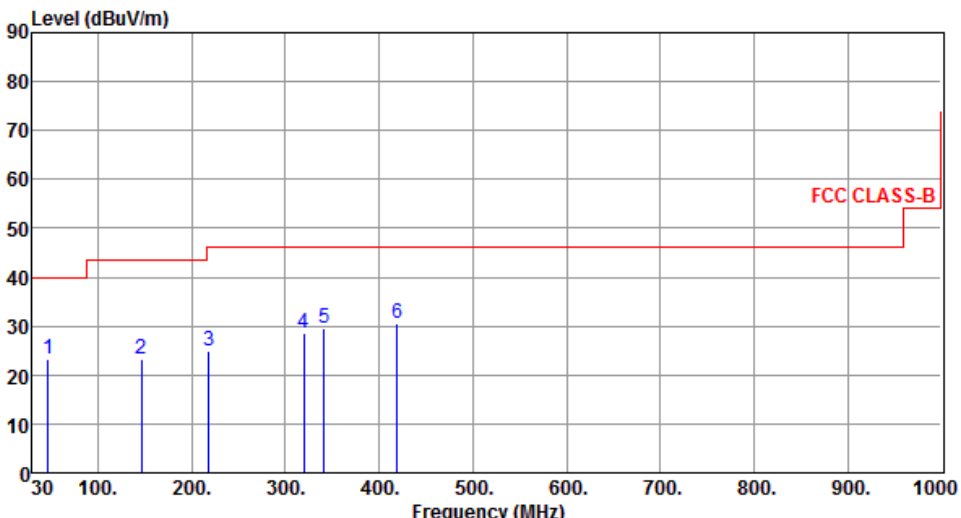Modulation	GFSK	Test Freq. (MHz)	2480																																																															
Polarization	Horizontal	Test Configuration	1																																																															
 <p>The graph displays the radiated unwanted emissions for the transmitter. The y-axis represents the emission level in dBuV/m, ranging from 0 to 90. The x-axis represents the frequency in MHz, ranging from 30 to 1000. A red line indicates the FCC CLASS-B limit, which is constant at 40 dBuV/m from 30 MHz to 100 MHz, then steps up to 45 dBuV/m from 100 MHz to 200 MHz, and finally to 55 dBuV/m from 200 MHz to 1000 MHz. Six blue vertical lines represent the measured emission peaks at various frequencies, labeled 1 through 6. The peak levels are significantly below the FCC CLASS-B limit.</p>																																																																		
	<table border="1"> <thead> <tr> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>46.49</td> <td>40.00</td> <td>-16.83</td> <td>31.23</td> <td>-8.06</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>2</td> <td>146.40</td> <td>43.50</td> <td>-20.37</td> <td>31.47</td> <td>-8.34</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>3</td> <td>218.18</td> <td>46.00</td> <td>-21.05</td> <td>35.86</td> <td>-10.91</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>4</td> <td>320.03</td> <td>46.00</td> <td>-17.52</td> <td>35.80</td> <td>-7.32</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>5</td> <td>341.37</td> <td>46.00</td> <td>-16.51</td> <td>36.19</td> <td>-6.70</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>6</td> <td>418.97</td> <td>46.00</td> <td>-15.55</td> <td>35.08</td> <td>-4.63</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> </tbody> </table>	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	46.49	40.00	-16.83	31.23	-8.06	Peak	---	---	2	146.40	43.50	-20.37	31.47	-8.34	Peak	---	---	3	218.18	46.00	-21.05	35.86	-10.91	Peak	---	---	4	320.03	46.00	-17.52	35.80	-7.32	Peak	---	---	5	341.37	46.00	-16.51	36.19	-6.70	Peak	---	---	6	418.97	46.00	-15.55	35.08	-4.63	Peak	---	---		
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																										
1	46.49	40.00	-16.83	31.23	-8.06	Peak	---	---																																																										
2	146.40	43.50	-20.37	31.47	-8.34	Peak	---	---																																																										
3	218.18	46.00	-21.05	35.86	-10.91	Peak	---	---																																																										
4	320.03	46.00	-17.52	35.80	-7.32	Peak	---	---																																																										
5	341.37	46.00	-16.51	36.19	-6.70	Peak	---	---																																																										
6	418.97	46.00	-15.55	35.08	-4.63	Peak	---	---																																																										
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>																																																																		

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical	Test Configuration	1

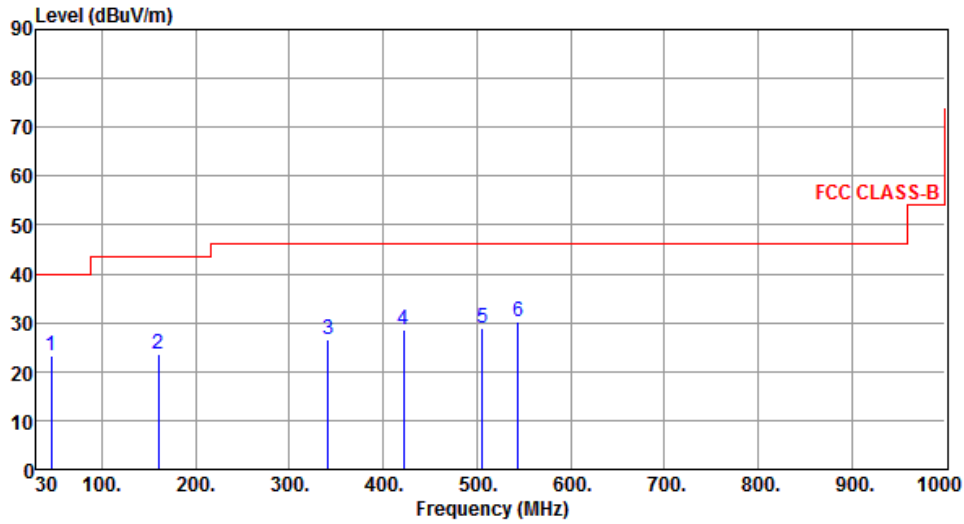

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	45.52	23.12	40.00	-16.88	31.21	-8.09	Peak	---	---
2	159.98	23.66	43.50	-19.84	31.73	-8.07	Peak	---	---
3	341.37	26.52	46.00	-19.48	33.22	-6.70	Peak	---	---
4	421.88	28.41	46.00	-17.59	32.95	-4.54	Peak	---	---
5	506.27	29.04	46.00	-16.96	32.03	-2.99	Peak	---	---
6	544.10	30.32	46.00	-15.68	32.55	-2.23	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Configuration 2: Model SCBT6, Charging mode

3.2.5 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Mode	Charging	Test Freq. (MHz)	---
Polarization	Horizontal	Test Configuration	2

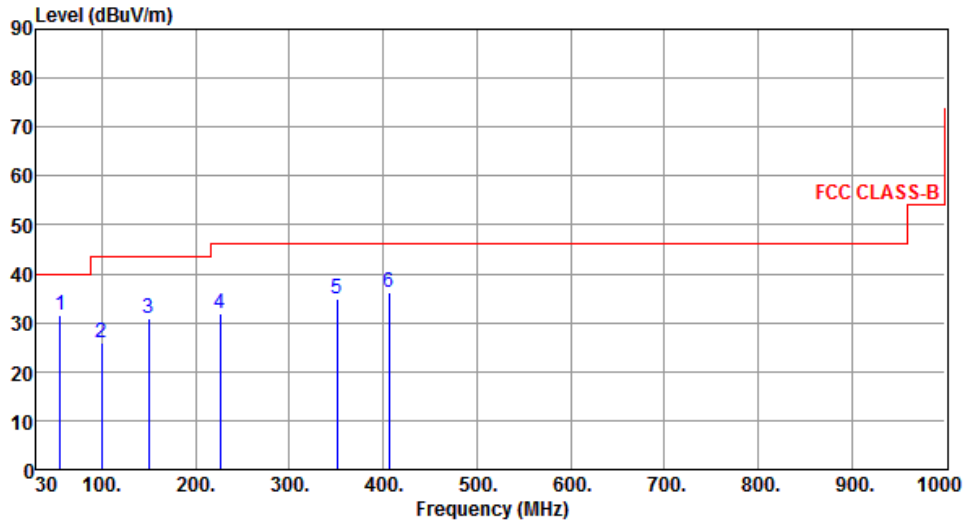

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	55.22	31.65	40.00	-8.35	40.03	-8.38	Peak	---	---
2	99.84	25.96	43.50	-17.54	39.40	-13.44	Peak	---	---
3	150.28	30.91	43.50	-12.59	39.12	-8.21	Peak	---	---
4	225.94	31.79	46.00	-14.21	42.35	-10.56	Peak	---	---
5	351.07	34.87	46.00	-11.13	41.29	-6.42	Peak	---	---
6	406.36	36.16	46.00	-9.84	41.15	-4.99	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Mode	Charging	Test Freq. (MHz)	---
Polarization	Vertical	Test Configuration	2

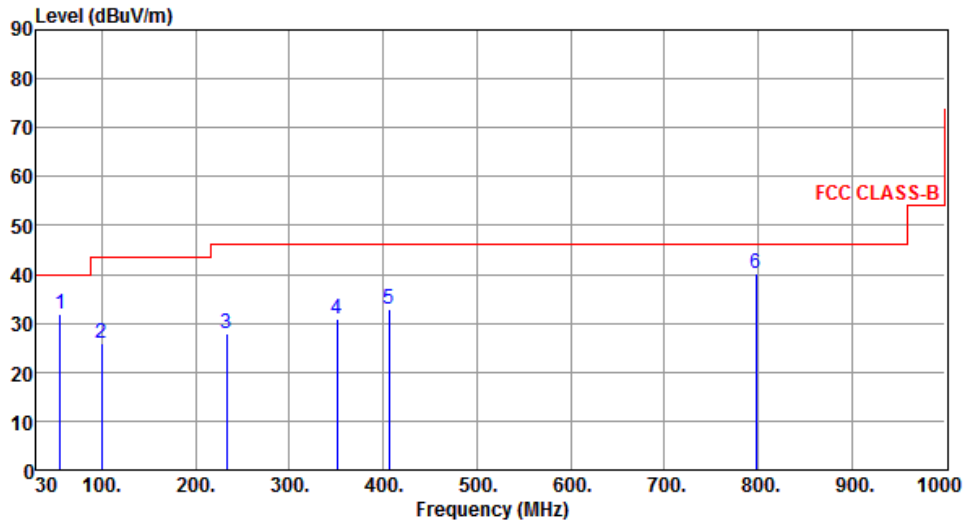

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	55.22	31.77	40.00	-8.23	40.15	-8.38	Peak	---	---
2	99.84	25.99	43.50	-17.51	39.43	-13.44	Peak	---	---
3	232.73	28.05	46.00	-17.95	38.20	-10.15	Peak	---	---
4	351.07	30.83	46.00	-15.17	37.25	-6.42	Peak	---	---
5	406.36	32.85	46.00	-13.15	37.84	-4.99	Peak	---	---
6	798.24	40.07	46.00	-5.93	37.85	2.22	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Configuration 3: Model SCBT7, Battery mode

3.2.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Horizontal	Test Configuration	3

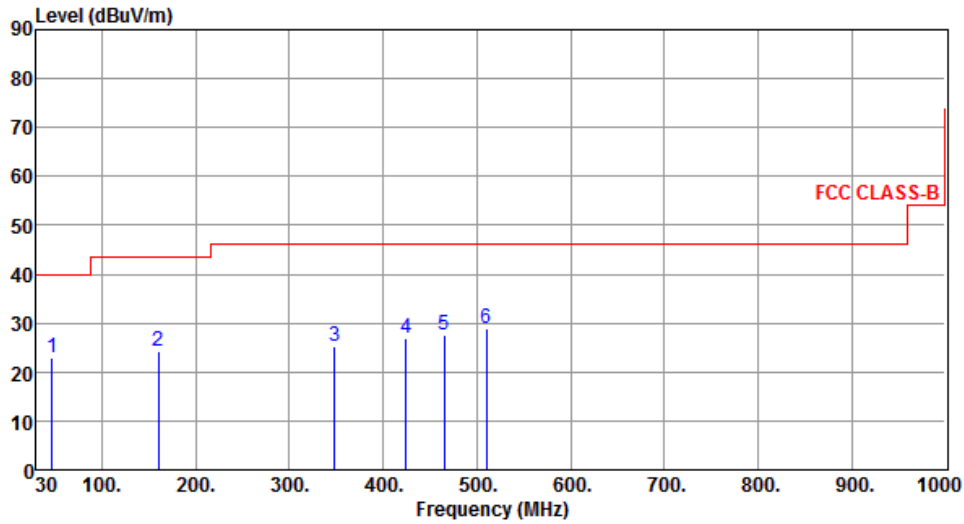

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	46.49	23.04	40.00	-16.96	31.10	-8.06	Peak	---	---
2	159.98	24.19	43.50	-19.31	32.26	-8.07	Peak	---	---
3	348.16	25.40	46.00	-20.60	31.90	-6.50	Peak	---	---
4	424.79	27.03	46.00	-18.97	31.51	-4.48	Peak	---	---
5	465.53	27.41	46.00	-18.59	30.97	-3.56	Peak	---	---
6	510.15	28.80	46.00	-17.20	31.72	-2.92	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical	Test Configuration	3

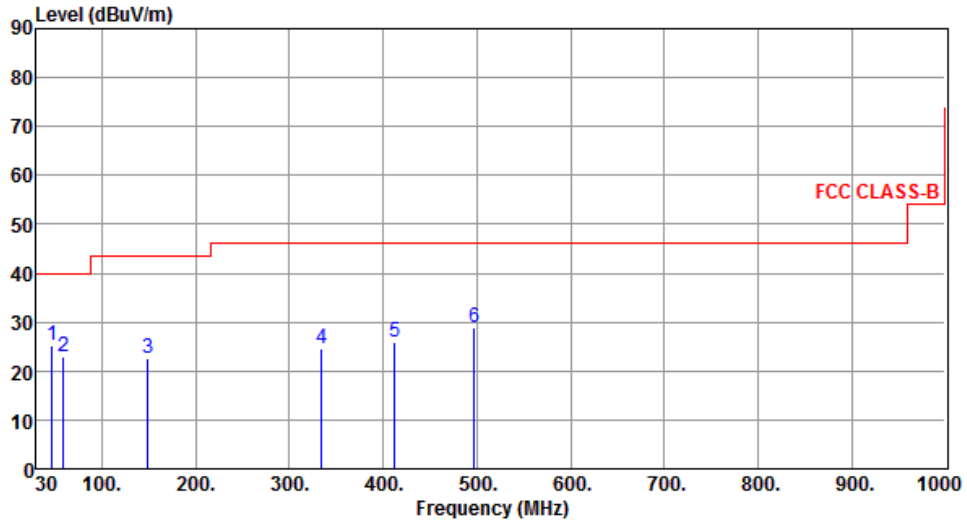

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	46.49	25.09	40.00	-14.91	33.15	-8.06	Peak	---	---
2	59.10	22.95	40.00	-17.05	31.58	-8.63	Peak	---	---
3	149.31	22.64	43.50	-20.86	30.88	-8.24	Peak	---	---
4	334.58	24.53	46.00	-21.47	31.43	-6.90	Peak	---	---
5	412.18	25.89	46.00	-20.11	30.71	-4.82	Peak	---	---
6	497.54	28.78	46.00	-17.22	31.93	-3.15	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.2.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Horizontal	Test Configuration	3

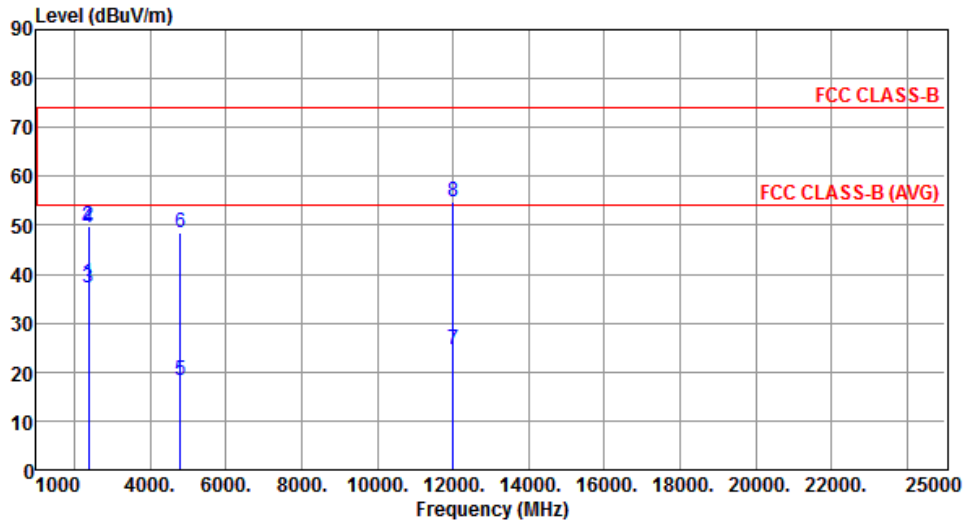


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2376.00	38.08	54.00	-15.92	39.25	-1.17	Average	203	87
2	2376.00	49.79	74.00	-24.21	50.96	-1.17	Peak	203	87
3	2390.00	37.23	54.00	-16.77	38.34	-1.11	Average	256	81
4	2390.00	49.59	74.00	-24.41	50.70	-1.11	Peak	256	81
5	4804.00	18.38	54.00	-35.62	13.12	5.26	Average	184	87
6	4804.00	48.48	74.00	-25.52	43.22	5.26	Peak	184	87
7	12010.00	24.64	54.00	-29.36	9.57	15.07	Average	100	162
8	12010.00	54.74	74.00	-19.26	39.67	15.07	Peak	100	162

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical	Test Configuration	3

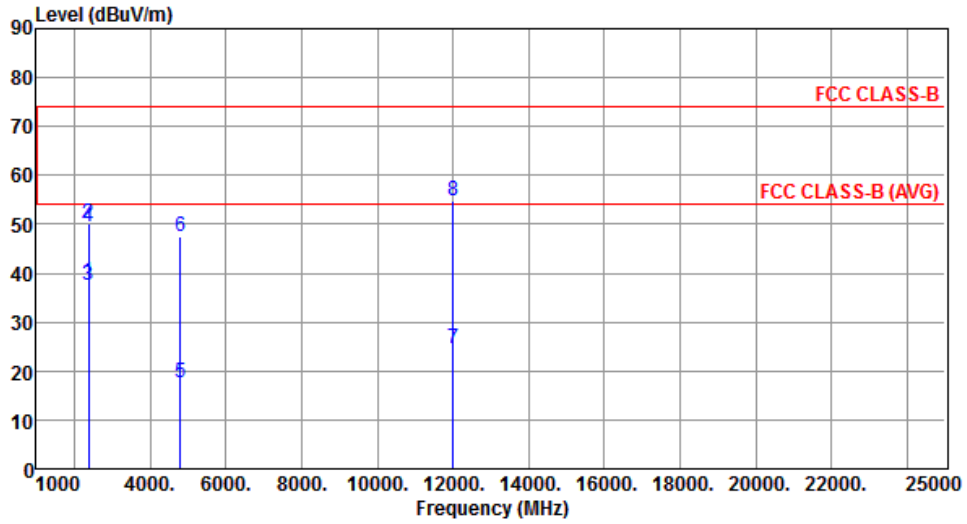


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2376.00	38.22	54.00	-15.78	39.39	-1.17	Average	181	201
2	2376.00	50.00	74.00	-24.00	51.17	-1.17	Peak	181	201
3	2390.00	37.43	54.00	-16.57	38.54	-1.11	Average	176	197
4	2390.00	49.41	74.00	-24.59	50.52	-1.11	Peak	176	197
5	4804.00	17.46	54.00	-36.54	12.20	5.26	Average	339	100
6	4804.00	47.56	74.00	-26.44	42.30	5.26	Peak	339	100
7	12010.00	24.65	54.00	-29.35	9.58	15.07	Average	100	246
8	12010.00	54.75	74.00	-19.25	39.68	15.07	Peak	100	246

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Horizontal	Test Configuration	3

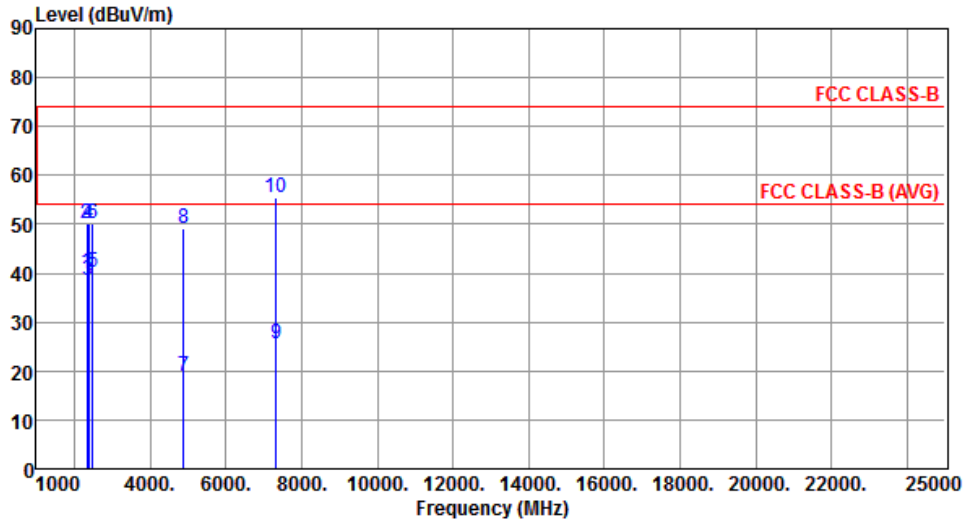


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2336.00	40.14	54.00	-13.86	41.51	-1.37	Average	242	85
2	2336.00	50.29	74.00	-23.71	51.66	-1.37	Peak	242	85
3	2390.00	38.43	54.00	-15.57	39.54	-1.11	Average	290	85
4	2390.00	50.23	74.00	-23.77	51.34	-1.11	Peak	290	85
5	2483.50	40.28	54.00	-13.72	40.90	-0.62	Average	290	85
6	2483.50	50.02	74.00	-23.98	50.64	-0.62	Peak	290	85
7	4882.00	18.90	54.00	-35.10	13.45	5.45	Average	164	82
8	4882.00	49.00	74.00	-25.00	43.55	5.45	Peak	164	82
9	7323.00	25.51	54.00	-28.49	15.23	10.28	Average	186	52
10	7323.00	55.61	74.00	-18.39	45.33	10.28	Peak	186	52

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	3

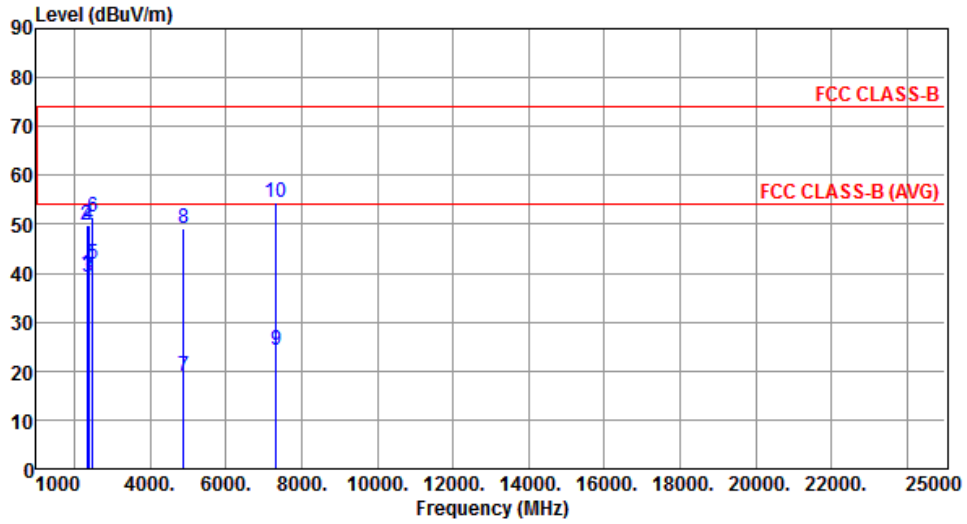


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2336.00	39.72	54.00	-14.28	41.09	-1.37	Average	199	200
2	2336.00	49.85	74.00	-24.15	51.22	-1.37	Peak	199	200
3	2390.00	39.17	54.00	-14.83	40.28	-1.11	Average	147	197
4	2390.00	49.70	74.00	-24.30	50.81	-1.11	Peak	147	197
5	2483.50	41.95	54.00	-12.05	42.57	-0.62	Average	147	197
6	2483.50	51.49	74.00	-22.51	52.11	-0.62	Peak	147	197
7	4882.00	18.98	54.00	-35.02	13.53	5.45	Average	396	100
8	4882.00	49.08	74.00	-24.92	43.63	5.45	Peak	396	100
9	7323.00	24.37	54.00	-29.63	14.09	10.28	Average	105	312
10	7323.00	54.47	74.00	-19.53	44.19	10.28	Peak	105	312

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Horizontal	Test Configuration	3

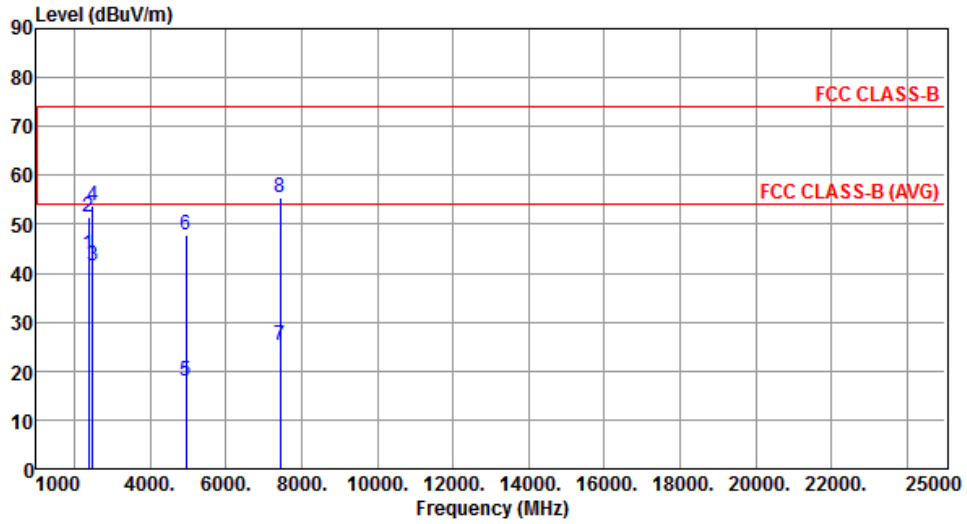


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2376.00	43.79	54.00	-10.21	44.96	-1.17	Average	267	84
2	2376.00	51.50	74.00	-22.50	52.67	-1.17	Peak	267	84
3	2483.50	41.61	54.00	-12.39	42.23	-0.62	Average	246	84
4	2483.50	53.67	74.00	-20.33	54.29	-0.62	Peak	246	84
5	4960.00	17.83	54.00	-36.17	12.19	5.64	Average	175	115
6	4960.00	47.93	74.00	-26.07	42.29	5.64	Peak	175	115
7	7440.00	25.35	54.00	-28.65	14.80	10.55	Average	176	50
8	7440.00	55.45	74.00	-18.55	44.90	10.55	Peak	176	50

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical	Test Configuration	3

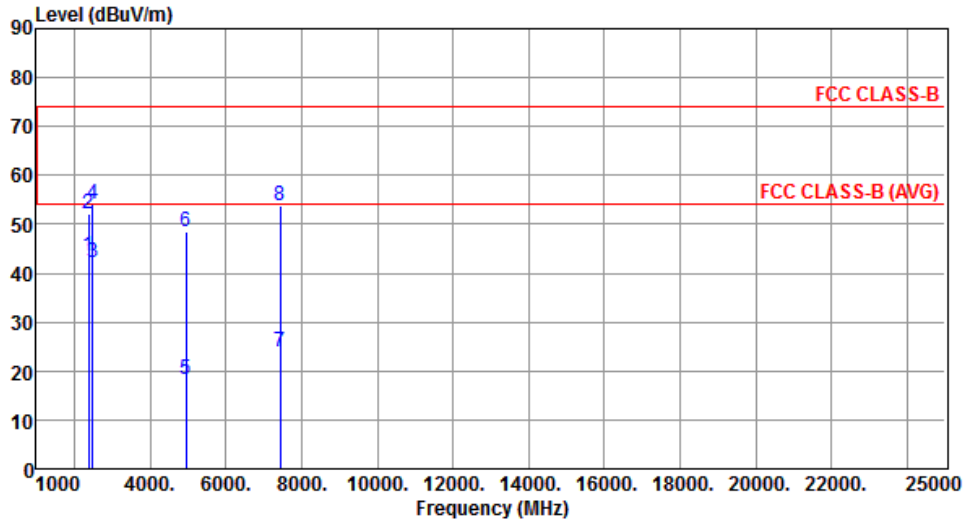

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2376.00	43.57	54.00	-10.43	44.74	-1.17	Average	134	190
2	2376.00	52.01	74.00	-21.99	53.18	-1.17	Peak	134	190
3	2483.50	42.23	54.00	-11.77	42.85	-0.62	Average	143	203
4	2483.50	54.29	74.00	-19.71	54.91	-0.62	Peak	143	203
5	4960.00	18.27	54.00	-35.73	12.63	5.64	Average	377	98
6	4960.00	48.37	74.00	-25.63	42.73	5.64	Peak	377	98
7	7440.00	23.76	54.00	-30.24	13.21	10.55	Average	176	321
8	7440.00	53.86	74.00	-20.14	43.31	10.55	Peak	176	321


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.2.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 8DPSK

Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Horizontal	Test Configuration	3

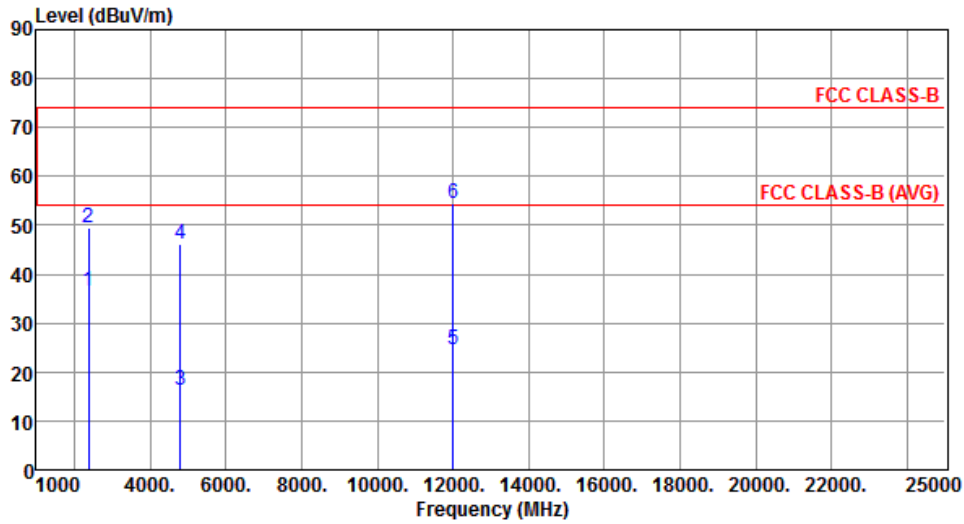


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	36.41	54.00	-17.59	37.52	-1.11	Average	259	84
2	2390.00	49.32	74.00	-24.68	50.43	-1.11	Peak	259	84
3	4804.00	16.23	54.00	-37.77	10.97	5.26	Average	194	86
4	4804.00	46.33	74.00	-27.67	41.07	5.26	Peak	194	86
5	12010.00	24.43	54.00	-29.57	9.36	15.07	Average	100	157
6	12010.00	54.53	74.00	-19.47	39.46	15.07	Peak	100	157

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Vertical	Test Configuration	3

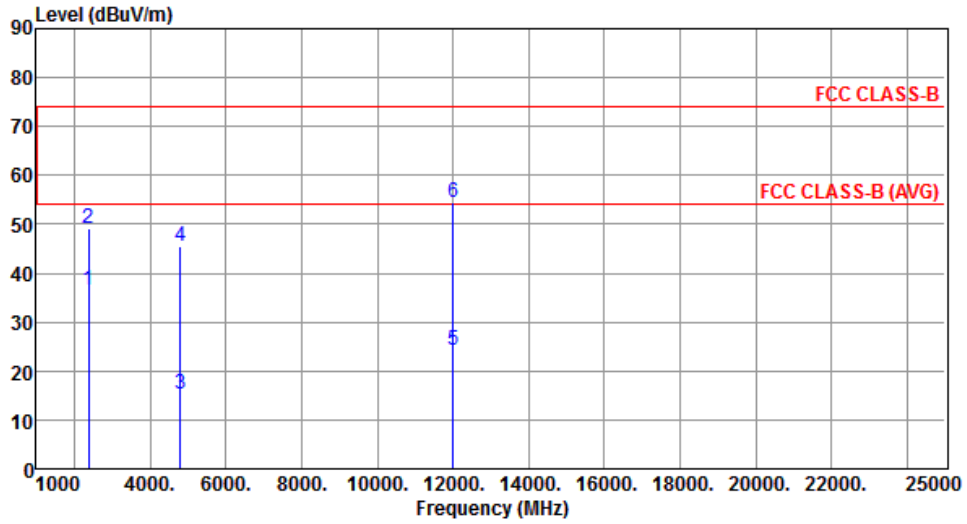


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	36.44	54.00	-17.56	37.55	-1.11	Average	177	198
2	2390.00	49.15	74.00	-24.85	50.26	-1.11	Peak	177	198
3	4804.00	15.39	54.00	-38.61	10.13	5.26	Average	383	100
4	4804.00	45.49	74.00	-28.51	40.23	5.26	Peak	383	100
5	12010.00	24.22	54.00	-29.78	9.15	15.07	Average	100	241
6	12010.00	54.32	74.00	-19.68	39.25	15.07	Peak	100	241

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Horizontal	Test Configuration	3

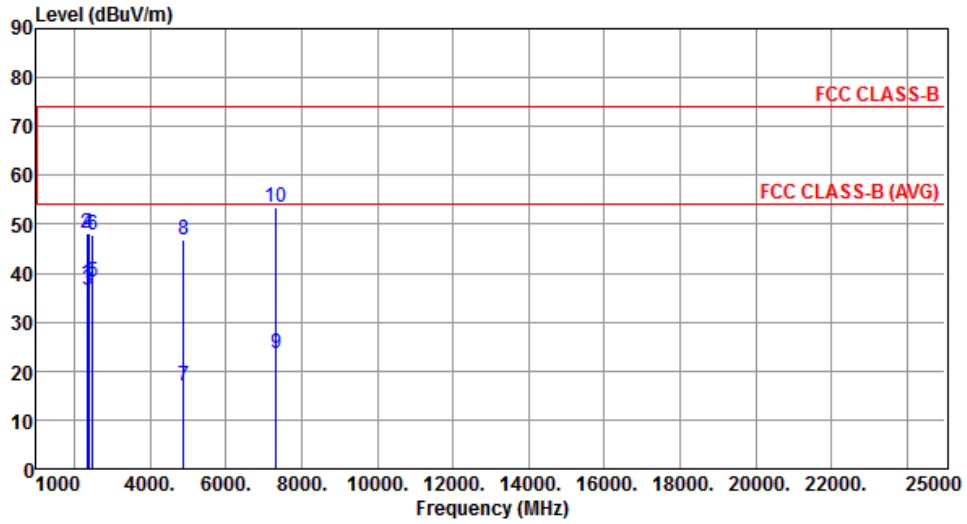


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2336.00	37.96	54.00	-16.04	39.33	-1.37	Average	240	87
2	2336.00	48.19	74.00	-25.81	49.56	-1.37	Peak	240	87
3	2390.00	36.37	54.00	-17.63	37.48	-1.11	Average	287	85
4	2390.00	48.18	74.00	-25.82	49.29	-1.11	Peak	287	85
5	2483.50	38.22	54.00	-15.78	38.84	-0.62	Average	287	85
6	2483.50	47.96	74.00	-26.04	48.58	-0.62	Peak	287	85
7	4882.00	16.77	54.00	-37.23	11.32	5.45	Average	164	80
8	4882.00	46.87	74.00	-27.13	41.42	5.45	Peak	164	80
9	7323.00	23.48	54.00	-30.52	13.20	10.28	Average	185	51
10	7323.00	53.58	74.00	-20.42	43.30	10.28	Peak	185	51

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	3

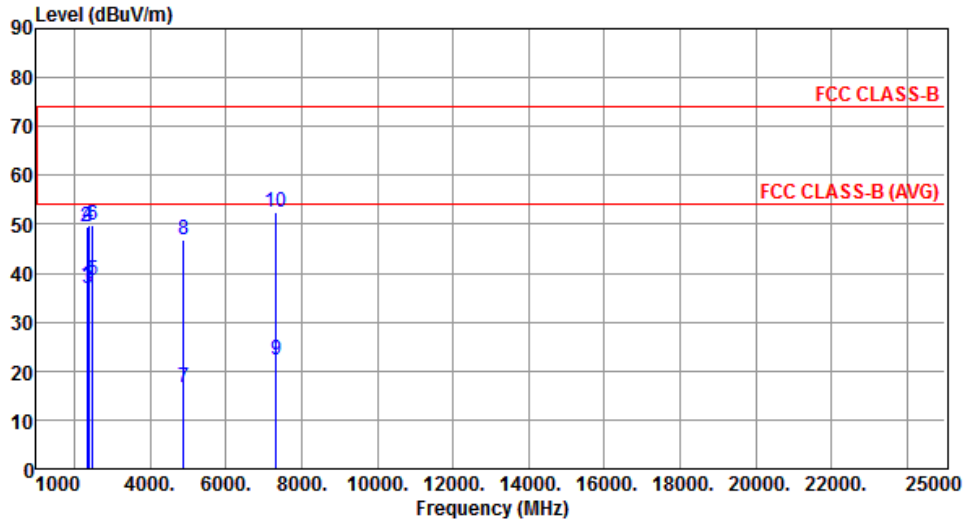


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2336.00	37.52	54.00	-16.48	38.89	-1.37	Average	201	200
2	2336.00	49.61	74.00	-24.39	50.98	-1.37	Peak	201	200
3	2390.00	36.71	54.00	-17.29	37.82	-1.11	Average	186	205
4	2390.00	49.69	74.00	-24.31	50.80	-1.11	Peak	186	205
5	2483.50	38.63	54.00	-15.37	39.25	-0.62	Average	186	205
6	2483.50	49.87	74.00	-24.13	50.49	-0.62	Peak	186	205
7	4882.00	16.72	54.00	-37.28	11.27	5.45	Average	393	99
8	4882.00	46.82	74.00	-27.18	41.37	5.45	Peak	393	99
9	7323.00	22.25	54.00	-31.75	11.97	10.28	Average	100	310
10	7323.00	52.35	74.00	-21.65	42.07	10.28	Peak	100	310

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Horizontal	Test Configuration	3

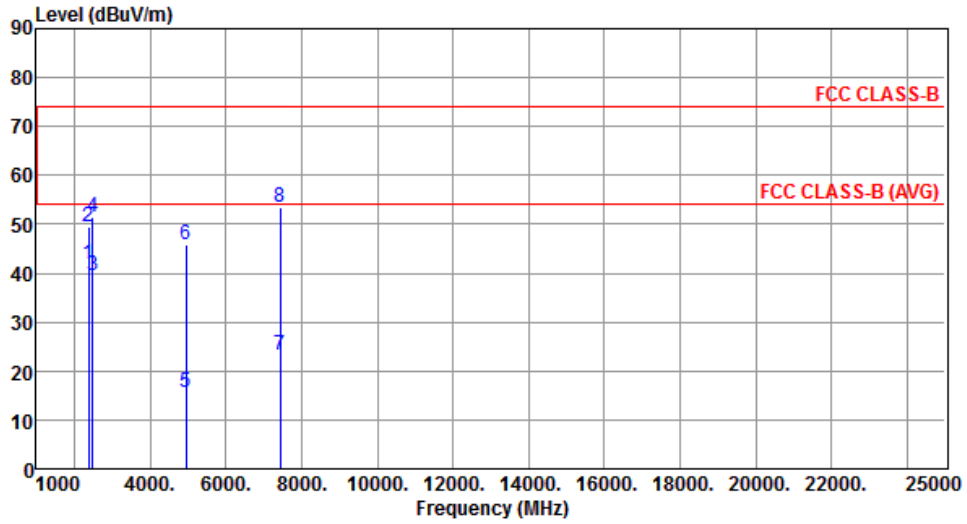


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2376.00	41.77	54.00	-12.23	42.94	-1.17	Average	265	82
2	2376.00	49.48	74.00	-24.52	50.65	-1.17	Peak	265	82
3	2483.50	39.53	54.00	-14.47	40.15	-0.62	Average	244	86
4	2483.50	51.59	74.00	-22.41	52.21	-0.62	Peak	244	86
5	4960.00	15.72	54.00	-38.28	10.08	5.64	Average	171	112
6	4960.00	45.82	74.00	-28.18	40.18	5.64	Peak	171	112
7	7440.00	23.33	54.00	-30.67	12.78	10.55	Average	172	54
8	7440.00	53.43	74.00	-20.57	42.88	10.55	Peak	172	54

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Vertical	Test Configuration	3

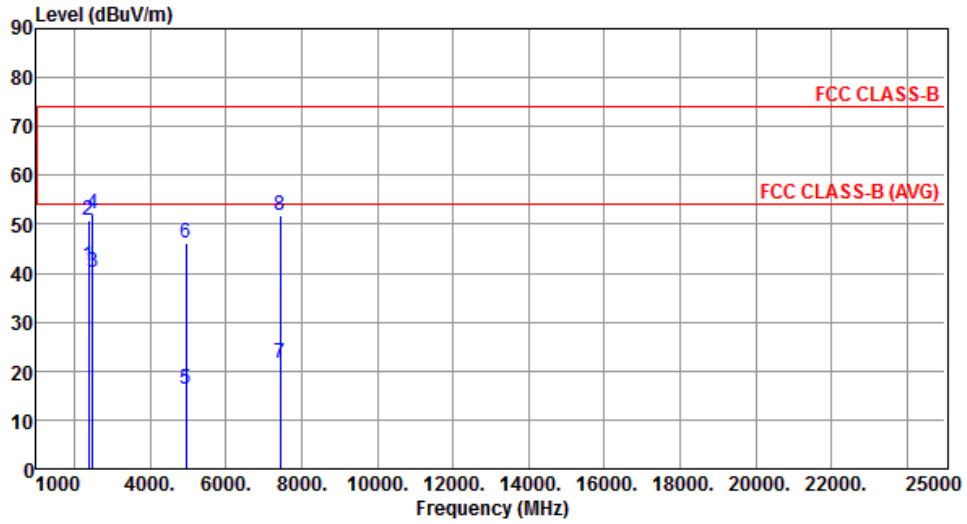

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2376.00	41.54	54.00	-12.46	42.71	-1.17	Average	136	189
2	2376.00	50.76	74.00	-23.24	51.93	-1.17	Peak	136	189
3	2483.50	40.11	54.00	-13.89	40.73	-0.62	Average	145	202
4	2483.50	52.18	74.00	-21.82	52.80	-0.62	Peak	145	202
5	4960.00	16.16	54.00	-37.84	10.52	5.64	Average	368	98
6	4960.00	46.26	74.00	-27.74	40.62	5.64	Peak	368	98
7	7440.00	21.63	54.00	-32.37	11.08	10.55	Average	176	320
8	7440.00	51.73	74.00	-22.27	41.18	10.55	Peak	176	320

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Configuration 4: Model SCBT7, Charging mode

3.2.9 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Mode	Charging	Test Freq. (MHz)	---
Polarization	Horizontal	Test Configuration	4

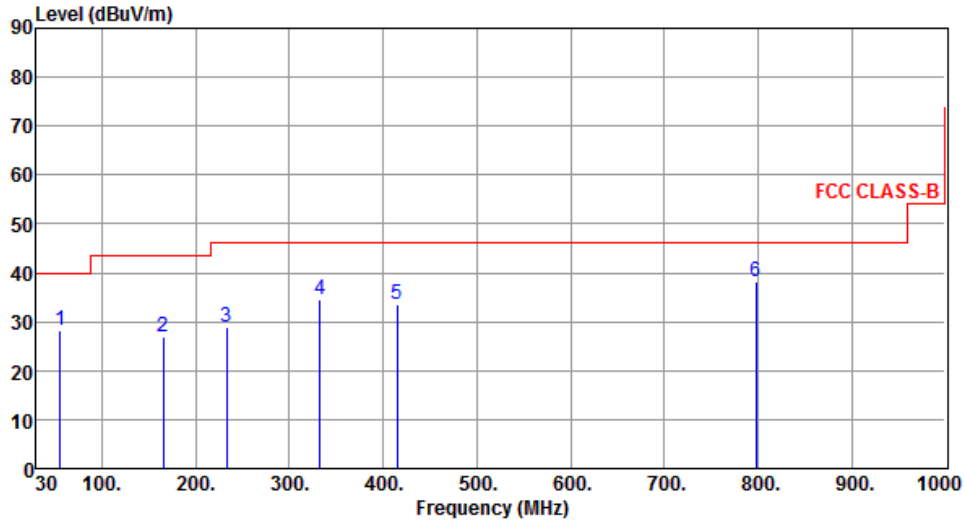

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	55.22	28.29	40.00	-11.71	36.67	-8.38	Peak	---	---
2	165.80	27.03	43.50	-16.47	35.34	-8.31	Peak	---	---
3	232.73	28.77	46.00	-17.23	38.92	-10.15	Peak	---	---
4	332.64	34.65	46.00	-11.35	41.61	-6.96	Peak	---	---
5	415.09	33.57	46.00	-12.43	38.31	-4.74	Peak	---	---
6	798.24	38.36	46.00	-7.64	36.14	2.22	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Mode	Charging	Test Freq. (MHz)	---
Polarization	Vertical	Test Configuration	4

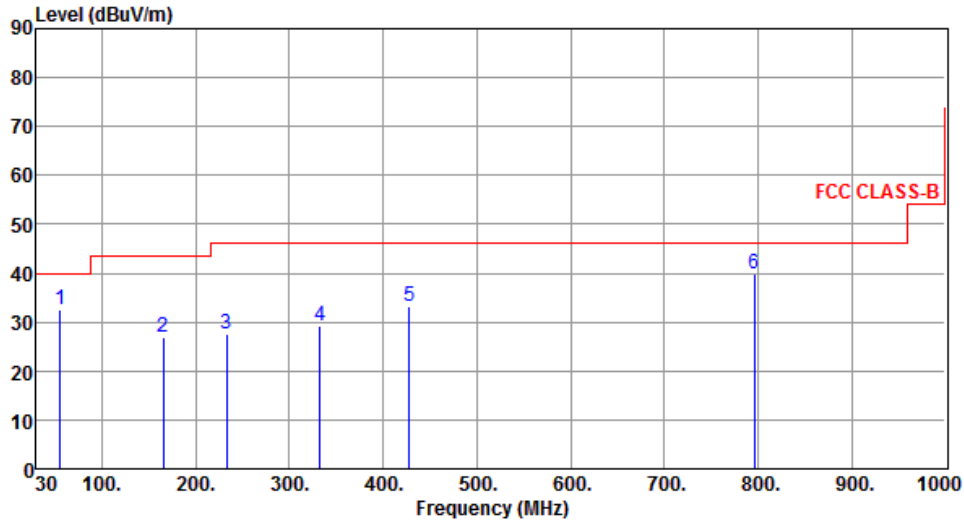

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	55.22	32.46	40.00	-7.54	40.84	-8.38	Peak	---	---
2	165.80	26.77	43.50	-16.73	35.08	-8.31	Peak	---	---
3	232.73	27.69	46.00	-18.31	37.84	-10.15	Peak	---	---
4	332.64	29.37	46.00	-16.63	36.33	-6.96	Peak	---	---
5	427.70	33.25	46.00	-12.75	37.64	-4.39	Peak	---	---
6	796.30	39.76	46.00	-6.24	37.58	2.18	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.3 Unwanted Emissions into Non-Restricted Frequency Bands

3.3.1 Limit of Unwanted Emissions into Non-Restricted Frequency Bands

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.3.2 Test Procedures


Reference Level Measurement

1. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
2. Set Sweep time = auto couple, Trace mode = max hold.
3. Allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

Unwanted Emissions Level Measurement


1. Set RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
2. Trace Mode = max hold, Sweep = auto couple.
3. Allow the trace to stabilize.
4. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.


3.3.3 Test Setup




3.3.4 Unwanted Emissions into Non-Restricted Frequency Bands


GFSK

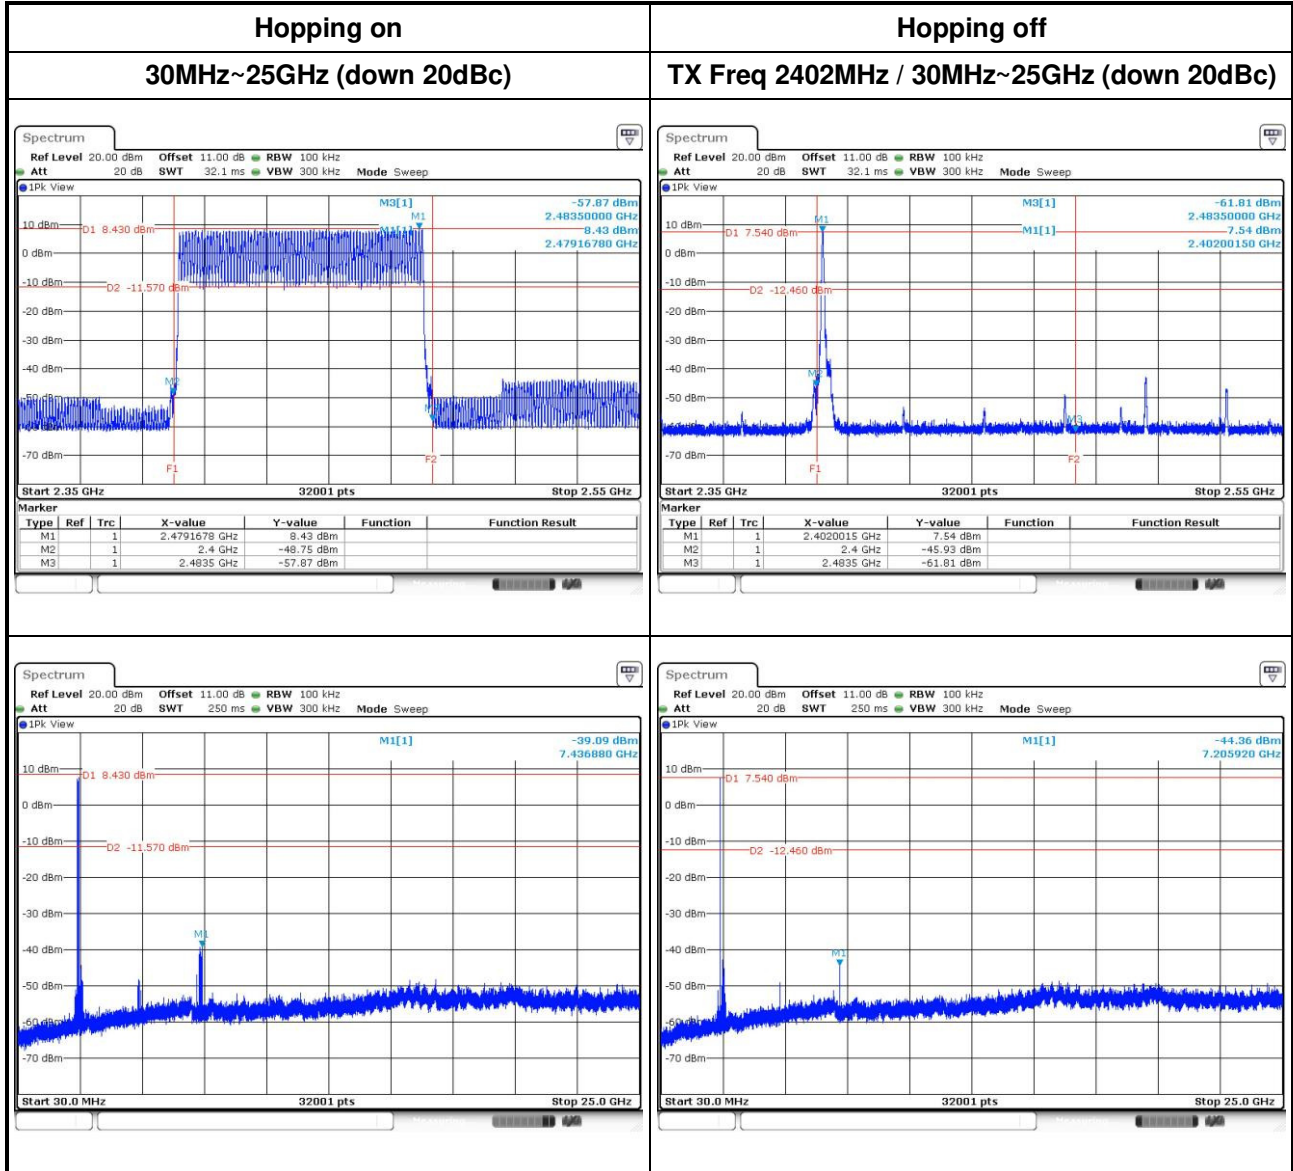

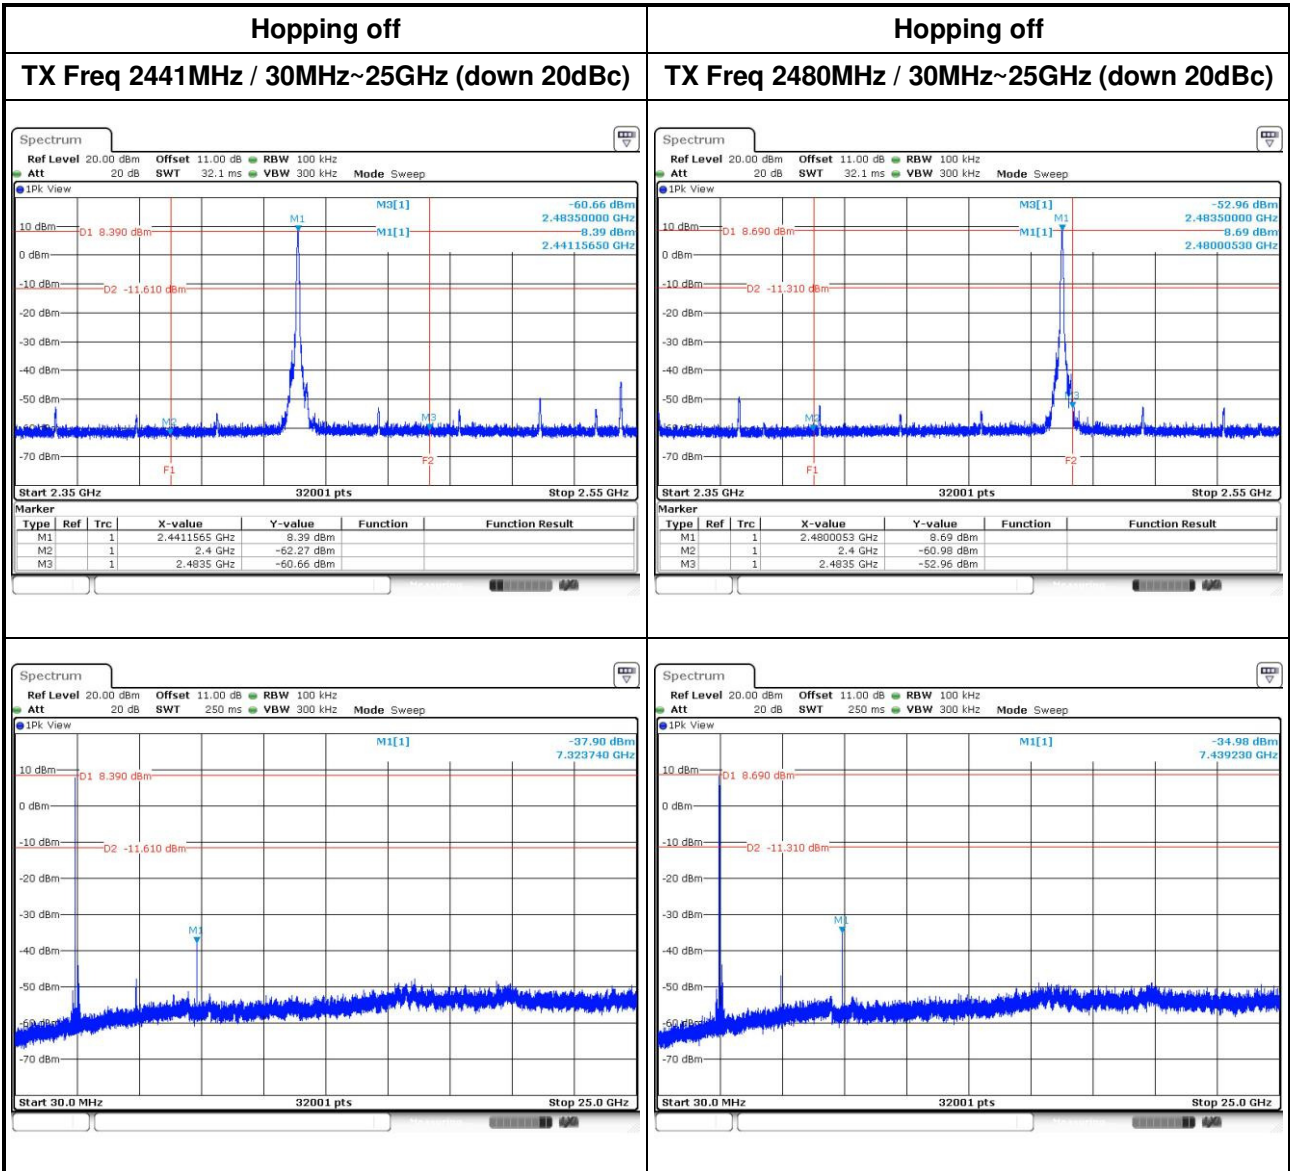

8DPSK

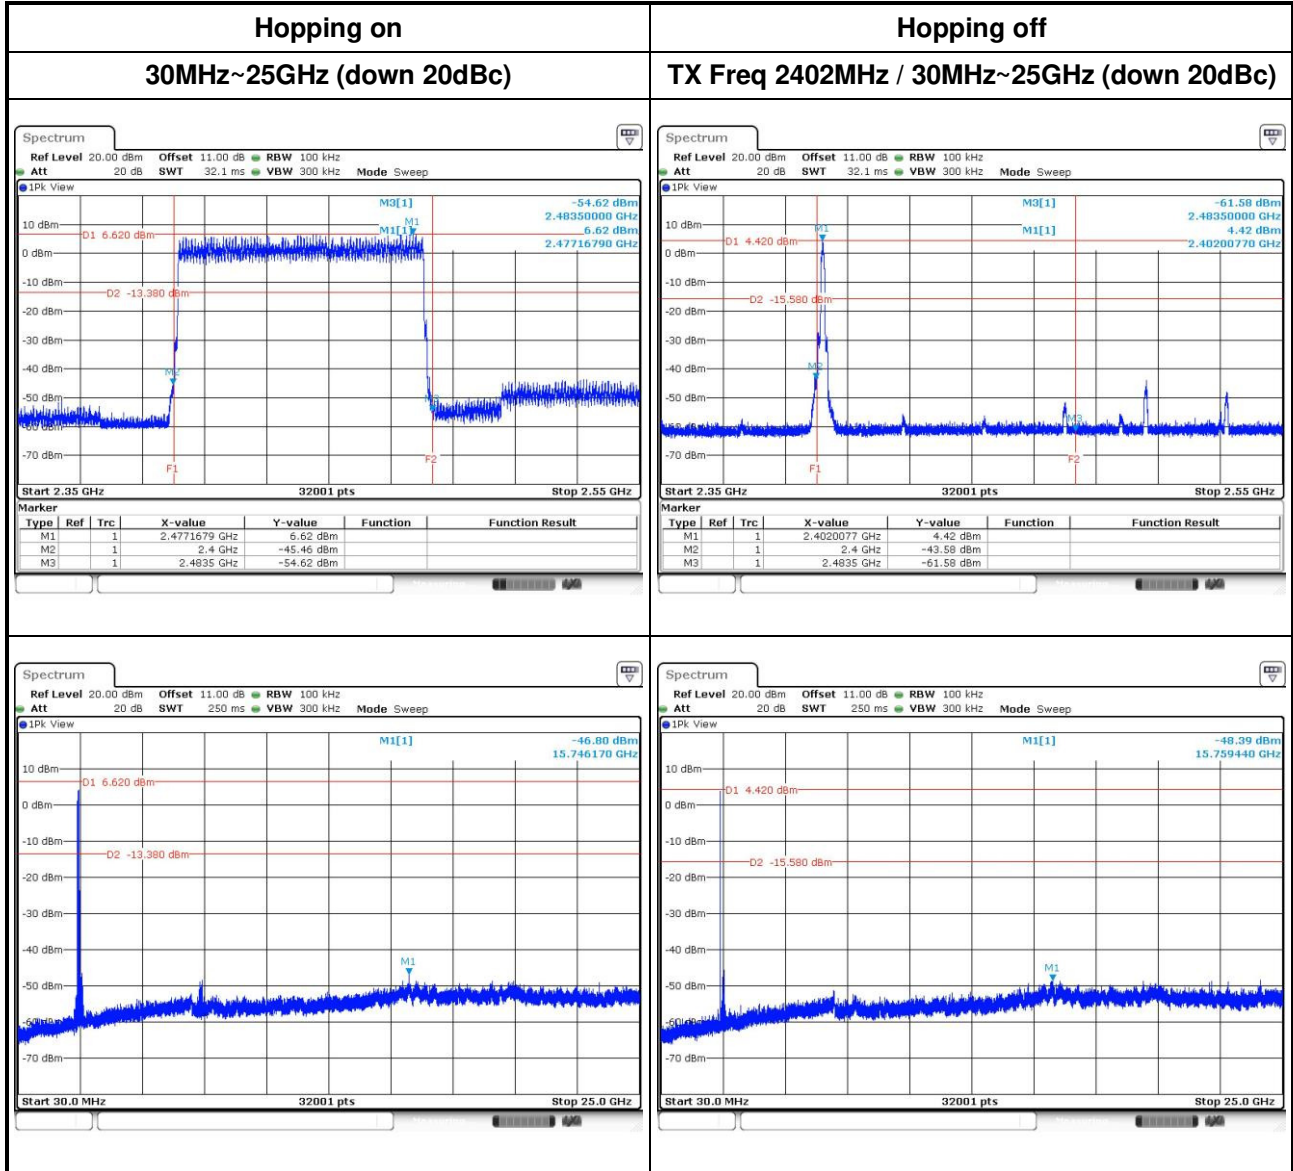

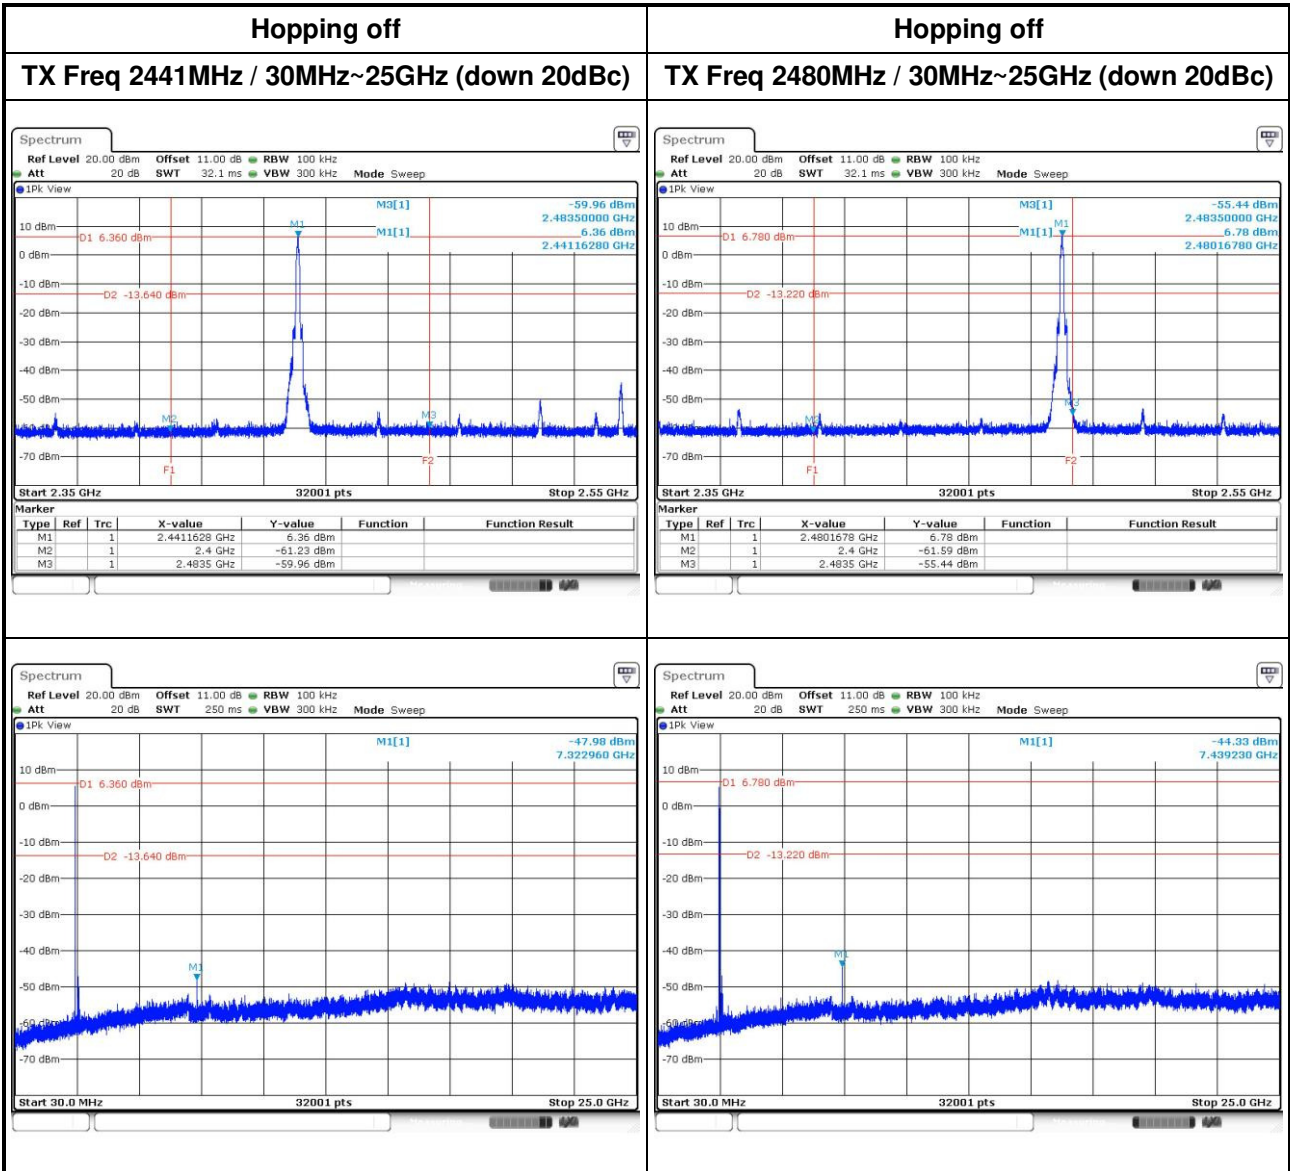

3.4 Conducted Output Power


3.4.1 Limit of Conducted Output Power

- 1 Watt
For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band.
- 0.125 Watt
For all other frequency hopping systems in the 2400–2483.5 MHz band.
- 0.125 Watt
For Frequency hopping systems operating in the 2400–2483.5 MHz band have hopping channel carrier frequencies that are separated by two-thirds of the 20 dB bandwidth of the hopping channel.

3.4.2 Test Procedures

1. A wideband power meter is used for power measurement. Bandwidth of power sensor and meter is 50MHz
2. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power

3.4.3 Test Setup



3.4.4 Test Result of Conducted Output Power

Modulation Mode	Freq. (MHz)	Output Power (mW)	Output Power (dBm)	Limit (mW)
GFSK	2402	7.05	8.48	125
GFSK	2441	8.55	9.32	125
GFSK	2480	9.02	9.55	125
π/4 DQPSK	2402	4.09	6.12	125
π/4 DQPSK	2441	5.97	7.76	125
π/4 DQPSK	2480	6.56	8.17	125
8DPSK	2402	4.35	6.38	125
8DPSK	2441	6.22	7.94	125
8DPSK	2480	6.84	8.35	125

Modulation Mode	Freq. (MHz)	AV Output Power (mW)	AV Output Power (dBm)
GFSK	2402	6.73	8.28
GFSK	2441	8.26	9.17
GFSK	2480	8.79	9.44
π/4 DQPSK	2402	2.77	4.42
π/4 DQPSK	2441	4.18	6.21
π/4 DQPSK	2480	4.70	6.72
8DPSK	2402	2.79	4.45
8DPSK	2441	4.20	6.23
8DPSK	2480	4.68	6.70

Note: Average power is for reference only.

3.5 Number of Hopping Frequency


3.5.1 Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.


3.5.2 Test Procedures

1. Set RBW = 100kHz, VBW = 300kHz, Sweep time = Auto, Detector = Peak Trace max hold.
2. Allow trace to stabilize.

3.5.3 Test Setup

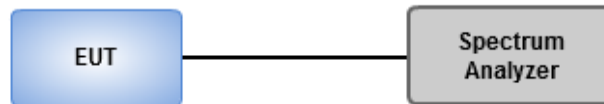

3.5.4 Test Result of Number of Hopping Frequency

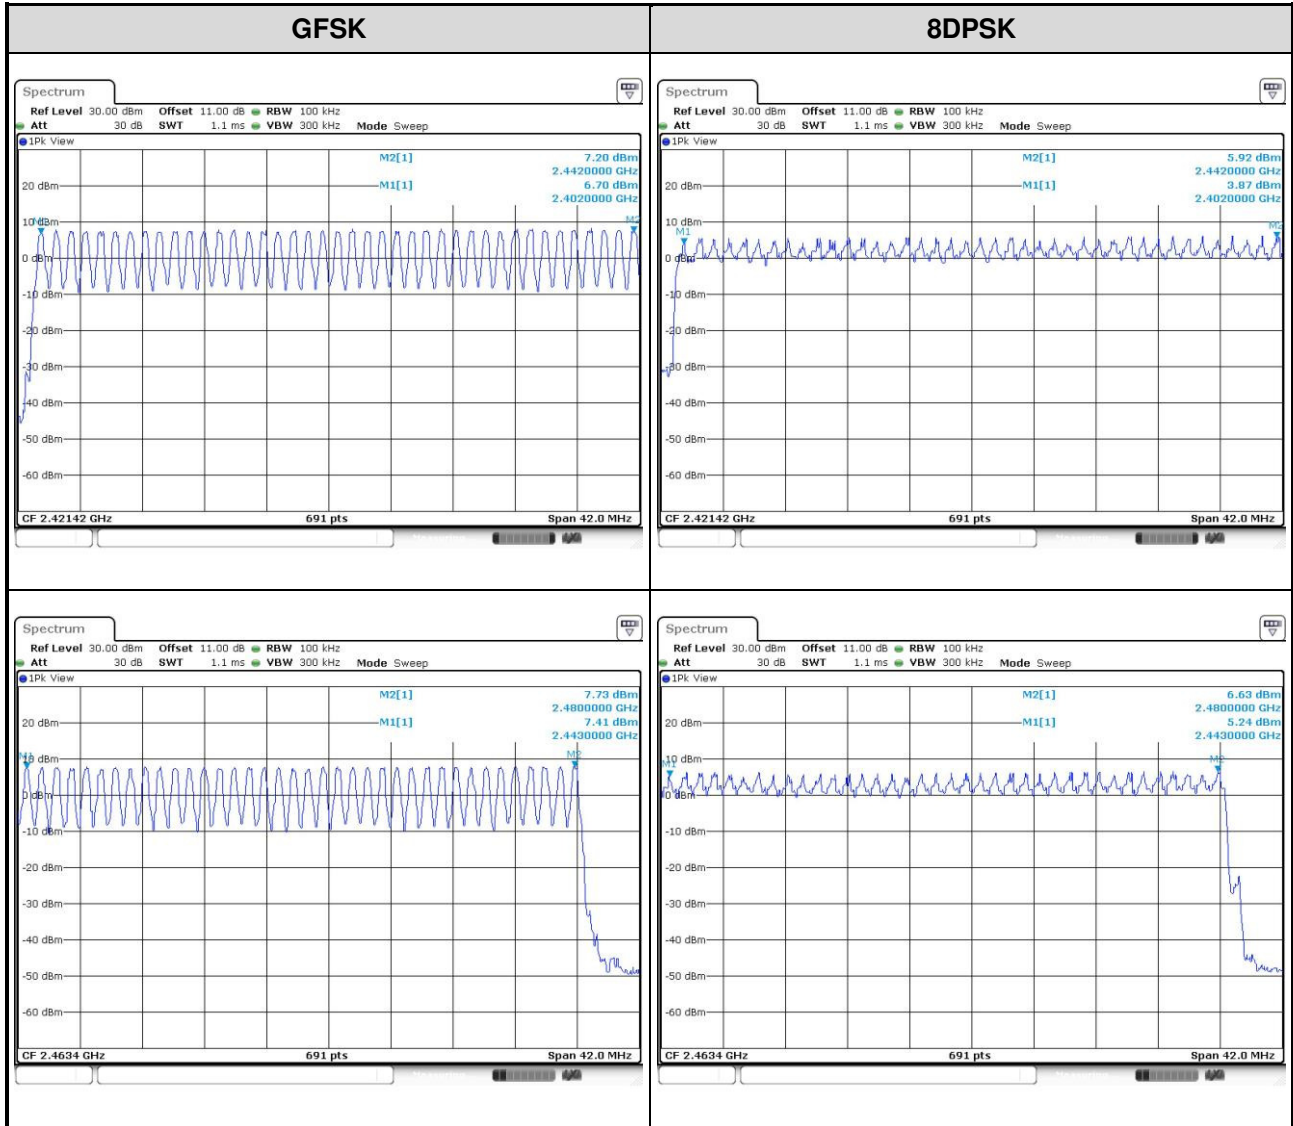

3.6 20dB and Occupied Bandwidth

3.6.1 Test Procedures


20dB Bandwidth

1. Set RBW=30kHz, VBW=100kHz, Sweep time = Auto, Detector=Peak, Trace max hold
2. Allow trace to stabilize
3. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth


1. Set RBW=30kHz, VBW=100kHz, Sweep time = Auto, Detector=Sample, Trace max hold
2. Allow trace to stabilize
3. Use Occupied bandwidth function of spectrum analyzer to measuring 99% occupied bandwidth

3.6.2 Test Setup



3.6.3 Test result of 20dB and Occupied Bandwidth

Modulation Mode	Freq. (MHz)	20dB Bandwidth (MHz)	Occupied Bandwidth (MHz)
GFSK	2402	0.952	0.879
GFSK	2441	0.943	0.875
GFSK	2480	0.943	0.874
8DPSK	2402	1.265	1.179
8DPSK	2441	1.265	1.194
8DPSK	2480	1.265	1.202

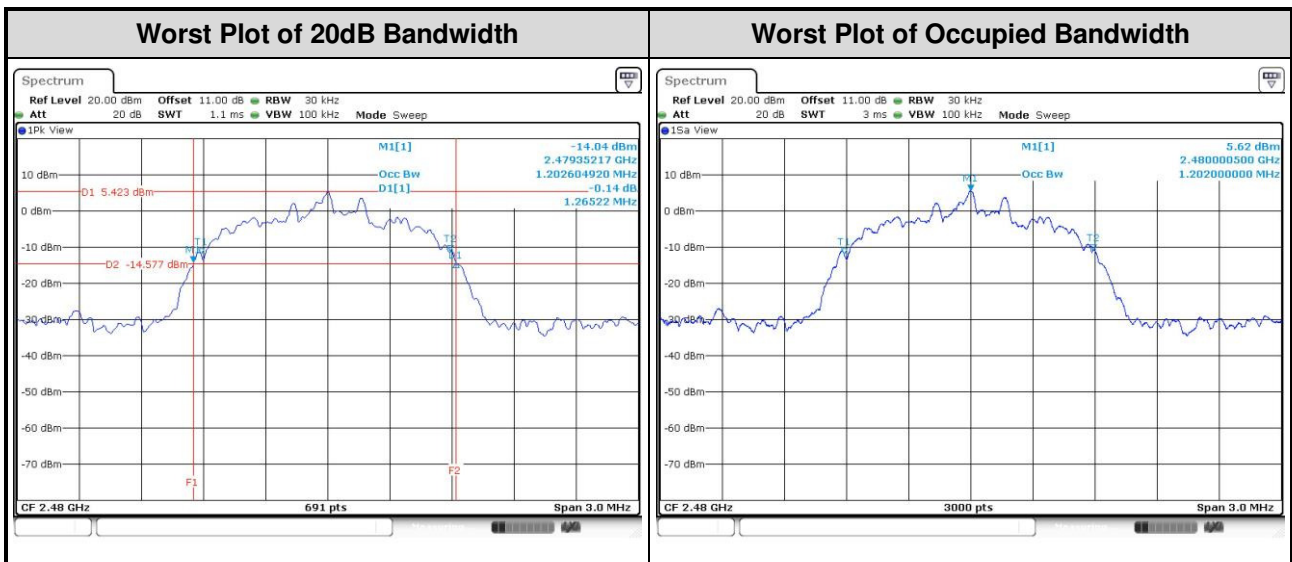

3.7 Channel Separation


3.7.1 Limit of Channel Separation

- Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
- Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

3.7.2 Test Procedures


1. Set RBW=100kHz, VBW=300kHz, Sweep time = Auto, Detector=Peak Trace max hold
2. Allow trace to stabilize
3. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The EUT shall show compliance with the appropriate regulatory limit

3.7.3 Test Setup

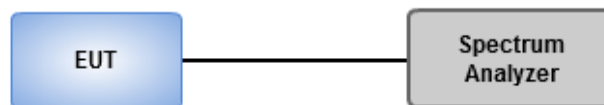

3.7.4 Test result of Channel Separation

Modulation Mode	Freq. (MHz)	Channel Separation (MHz)	20dB Bandwidth (MHz)	Minimum Limit (MHz)
GFSK	2402	1.003	0.952	0.635
GFSK	2441	1.003	0.943	0.629
GFSK	2480	1.003	0.943	0.629
8DPSK	2402	1.003	1.265	0.843
8DPSK	2441	1.003	1.265	0.843
8DPSK	2480	1.003	1.265	0.843

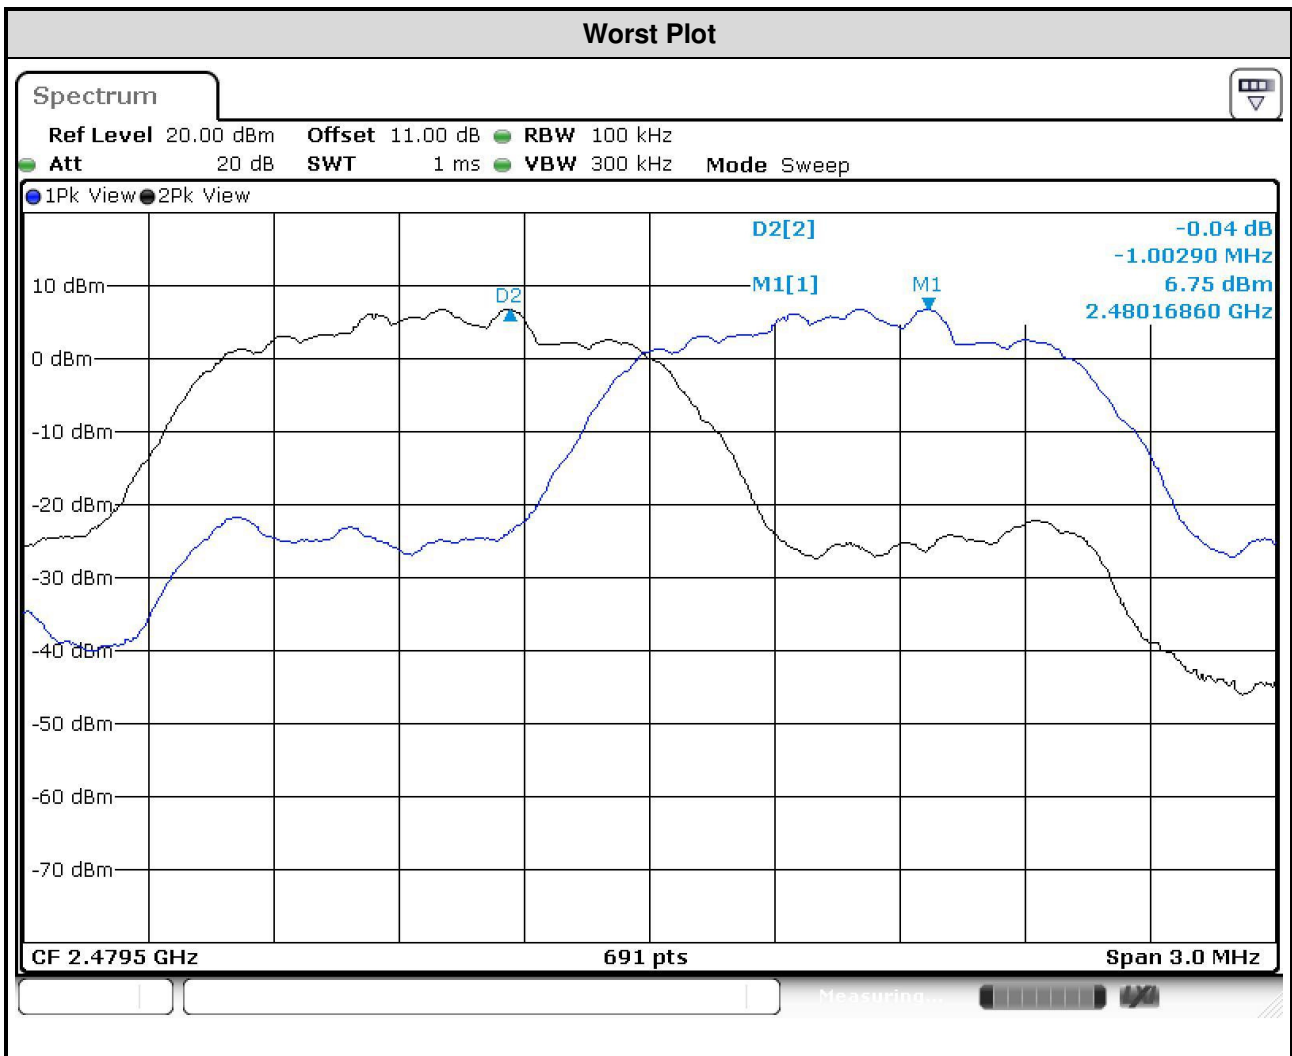

3.8 Number of Dwell Time


3.8.1 Limit of Dwell time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.8.2 Test Procedures


1. Set RBW=100kHz,VBW=300kHz,Sweep time = 500us(DH1),2ms(DH3),4ms(DH5), Detector=Peak, Span=0Hz,Trace max hold
2. Enable gating and trigger function of spectrum analyzer to measure burst on time.
3. The DH1 packet can cover a single time slot. A maximum length packet has duration of 1 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 1/1600 seconds, or 0.625ms. DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.
4. The DH3 packet can cover up to 3 time slots. A maximum length packet has duration of 3 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 3/1600 seconds, or 1.875ms. DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
5. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds


3.8.3 Test Setup



3.8.4 Test Result of Dwell Time

Modulation Mode	Freq. (MHz)	Length of Transmission Time (msec)	Number of Transmission in a 31.6 (79 Hopping*0.4)	Result (s)	Limit (s)
GFSK-DH1	2402	0.46667	320	0.149	0.4
GFSK-DH3	2402	1.78551	160	0.286	0.4
GFSK-DH5	2402	2.99710	106.6	0.319	0.4
8DPSK-DH1	2402	0.46522	320	0.149	0.4
8DPSK-DH3	2402	1.73333	160	0.277	0.4
8DPSK-DH5	2402	2.98841	106.6	0.319	0.4

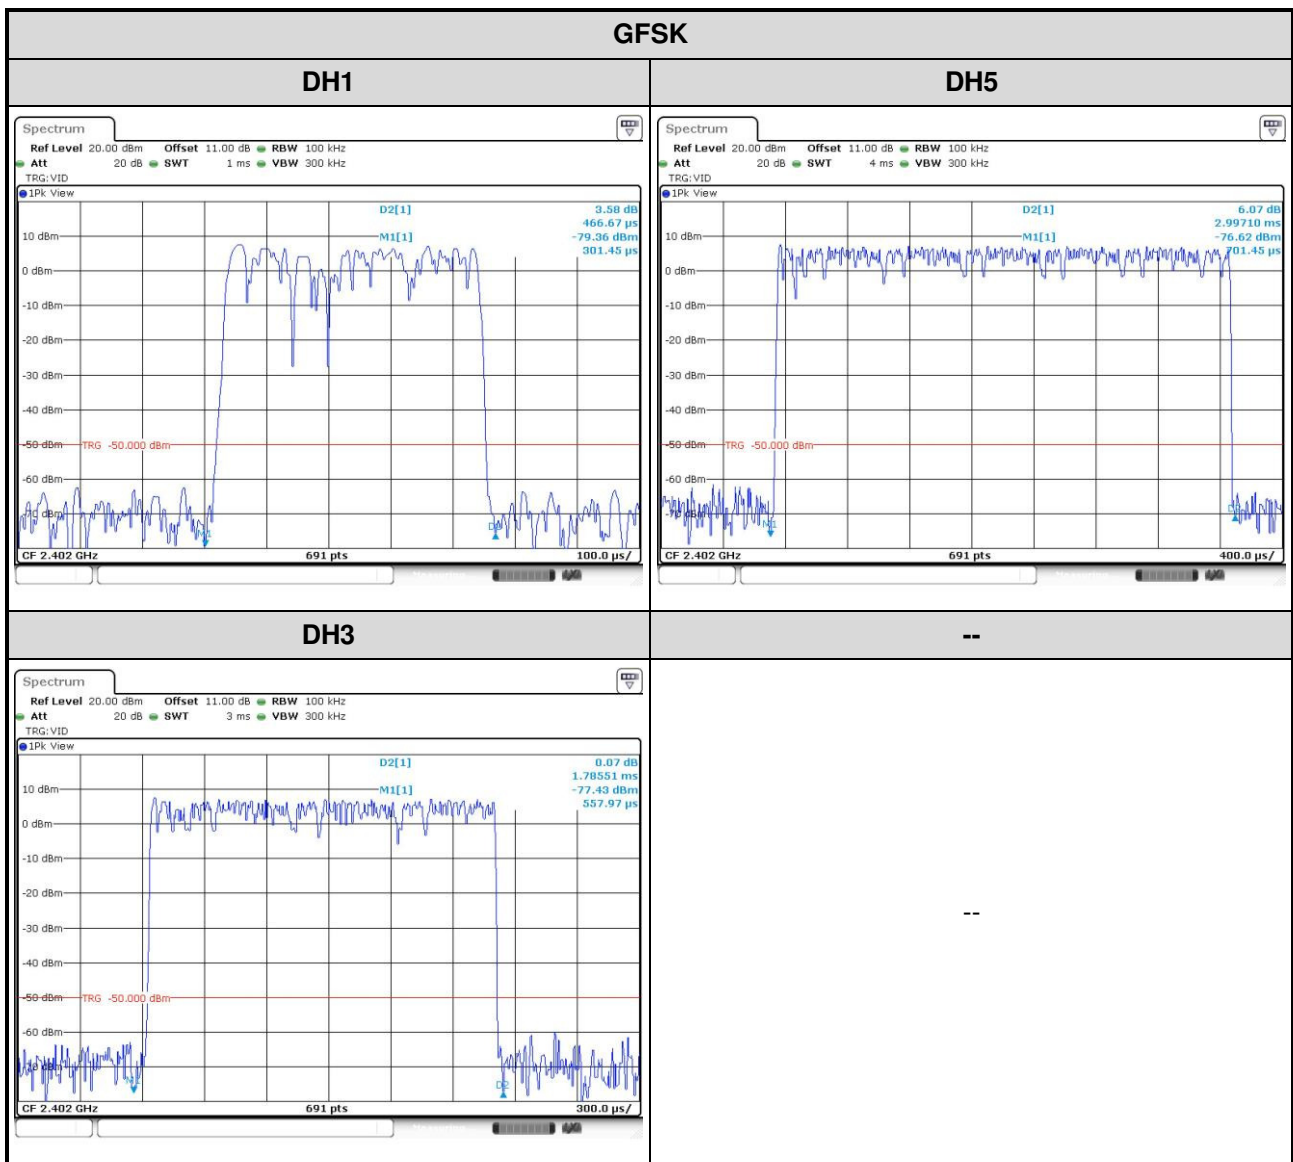

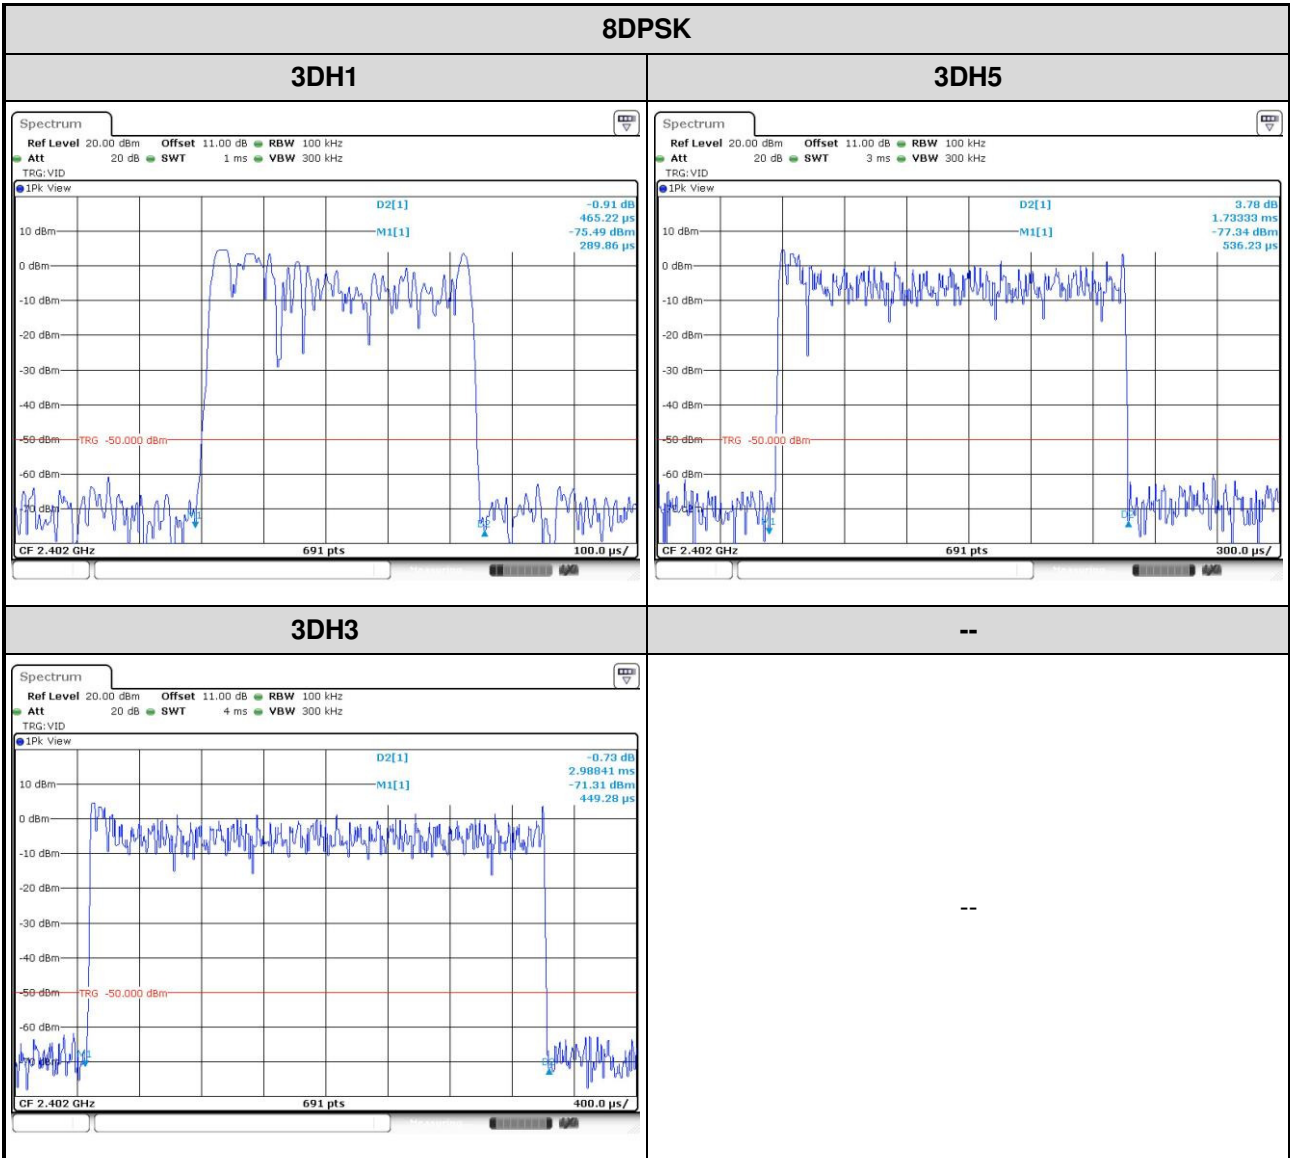

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin
Kou District, New Taipei City,
Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,
Kwei Shan District, Tao Yuan City
333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==