

SK 2250 US Variant


Amendments to the SK 2000 instruction manual

Delivery includes

The SK 2250 is supplied with a separate antenna.

Frequency bank system

The bodypack transmitter is available in 2 UHF frequency ranges with up to 3,000 transmission frequencies per frequency range:

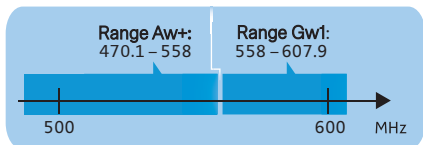

RF Power menu item

This menu item is not available.

Firmware

A firmware update is not possible.

Specifications

RF output power at 50 Ω : 250 mW

Antenna socket

The SK 2250 has an antenna socket.

- ▶ Screw the supplied antenna to the antenna socket.

Approved by

USA	Canada
FCC-Part 74	Industry Canada RSS 210
FCC-ID: DMOSK2250	IC: 2099A-SK2250
limited to 608 MHz	limited to 608 MHz

Sennheiser electronic GmbH & Co. KG

Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com

Printed in Germany, Publ. 06/12