

## FCC Part 24E Transmitter Certification

### Test Report

**FCC ID: DNY008MCELL1900**

**FCC Rule Part: CFR 47 Part 24 Subpart E**

**ACS Report Number: 06-0458-24E**

Manufacturer: EMS Wireless  
Equipment Type: PCS Bi-Directional Repeater  
Tradename: MirrorCell® II  
Model: CDM1912-739


Test Begin Date: November 29, 2006


Test End Date: December 22, 2006

Report Issue Date: January 8, 2007



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code 200612

Prepared by:   
**J. Kirby Munroe**  
Manager Wireless Certifications  
ACS, Inc.

Reviewed by:   
**R. Sam Wismer**  
Engineering Manager  
ACS, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.  
This report contains **23** pages

# Table of Contents

---

<b>1.0 General</b>	3
1.1 Purpose	3
1.2 Product Description	3
1.2.1 General	3
1.3 Test Methodology and Considerations	3
<b>2.0 Test Facilities</b>	4
2.1 Location	4
2.2 Laboratory Accreditations/Recognitions/Certifications	4
2.3 Radiated Emissions Test Site Description	4
2.3.1 Semi-Anechoic Chamber Test Site	5
2.3.2 Open Area Tests Site (OATS)	6
2.4 Conducted Emissions Test Site Description	7
<b>3.0 Applicable Standards and References</b>	7
<b>4.0 List of Test Equipment</b>	8
<b>5.0 Support Equipment and Accessories</b>	9
<b>6.0 EUT Setup and Block Diagram</b>	9
<b>7.0 Summary of Tests</b>	10
7.1 RF Power Output	10
7.1.1 Measurement Procedure	10
7.1.2 Measurement Results	10
7.2 Occupied Bandwidth (Emission Limits)	11
7.2.1 Measurement Procedure	11
7.2.2 Measurement Results	11
7.3 Spurious Emissions at Antenna Terminals and Inter-modulation Products	12
7.3.1 Measurement Procedure	12
7.3.2 Measurement Results	12
7.4 Band-edge Compliance	14
7.4.1 Measurement Procedure	14
7.4.2 Measurement Results	14
7.5 Field Strength of Spurious Emissions	15
7.5.1 Measurement Procedure	15
7.5.2 Measurement Results	15
7.6 Frequency Response	16
7.5.1 Measurement Procedure	16
7.5.2 Measurement Results	16
7.7 Radiated Emissions (Unintentional Radiators)	17
7.7.1 Measurement Procedure	17
7.7.2 Measurement Results	17
7.8 Frequency Stability	18
7.8.1 Measurement Procedure	18
7.8.2 Measurement Results	18

## **Additional Exhibits Included In Filing**

Internal Photographs

Test Setup Photographs

RF Exposure – MPE Calculations

Theory of Operation

System Block Diagram

Schematics

External Photographs

Product Labeling

Installation/Users Guide

Parts List

Tune-up Procedure

## **1.0 GENERAL**

### **1.1 Purpose**

The purpose of this report is to demonstrate compliance with Part 2 Subpart J and Part 24 Subpart E of the FCC's Code of Federal Regulations.

### **1.2 Product Description**

#### **1.2.1 General**

The MirrorCell® II model CDM1912-739 is a RF repeater utilizing the Part 24 Subpart E PCS frequency band and is used improve or increase signal strength in areas such as highways, tunnels, larger indoor applications and problem terrain situations such as mountains, valleys and buildings. This fully featured repeater is designed primarily for large outdoor use (several miles radius of coverage, depending on terrain), or for indoor use with medium sized buildings (100,000 to 200,000+ square feet [10,000 to 20,000 square meters]). The repeater is contained in a weatherproof outdoor NEMA 4 enclosure. It may be used as a simple and inexpensive alternative to a base station (BTS).

For indoor applications, the MirrorCell II makes great economic sense for buildings that are too large for the other repeaters, but too small to justify a fiber optic DAS (Distributed Antenna System). One MirrorCell II can cover most typical buildings up to approximately 200,000 square feet using ½" coax and several power dividers feeding approximately eight indoor server antennas.

Manufacturer Information:

EMS Wireless

2805 Colonnades Court, NW

Norcross, GA 30071

Detailed photographs of the EUT are filed separately with this filing.

### **1.3 Test Methodology and Considerations**

The EUT was configured and tested utilizing the maximum input drive level resulting in maximum gain conditions for all tests. If the maximum input drive level is exceeded, internal attenuators are activated to produce a level RF output and eliminate the device from operating beyond the maximum RF output power that is below the saturated RF output power.

For unintentional radiated emissions measurements the EUT was configured with one port loaded with a 50 Ohm non-radiating load and the other port loaded with a representative antenna. Both ports could not be loaded with representative antennas within the test environment due to the isolation required between antennas and the fact the device would receive and transmit any received signals via the antennas. Both the uplink and downlink ports were evaluated with antennas attached and the worst case provided in this report.

## 2.0 TEST FACILITIES

### 2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions  
5015 B.U. Bowman Drive  
Buford, GA 30518  
Phone: (770) 831-8048  
Fax: (770) 831-8598

### 2.2 Laboratory Accreditations/Recognitions/Certifications

The Semi-Anechoic Chamber Test Site, Open Area Test Site (OATS) and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC, Industry Canada and the Japanese Voluntary Control Council for Interference by information technology equipment. In addition, ACS is compliant to ISO 17025 as certified by the National Institute of Standards and Technology under their National Voluntary Laboratory Accreditation Program. The following certification numbers have been issued in recognition of these accreditations and certifications:

FCC Registration Number: 89450

Industry Canada Lab Code: IC 4175

VCCI Member Number: 1831

- VCCI OATS Registration Number R-1526
- VCCI Conducted Emissions Site Registration Number: C-1608

NVLAP Lab Code: 200612-0

## 2.3 Radiated Emissions Test Site Description

### 2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 101 x 101 x 19mm thick and weighs approximately 550 grams. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 - 4" PVC chases from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

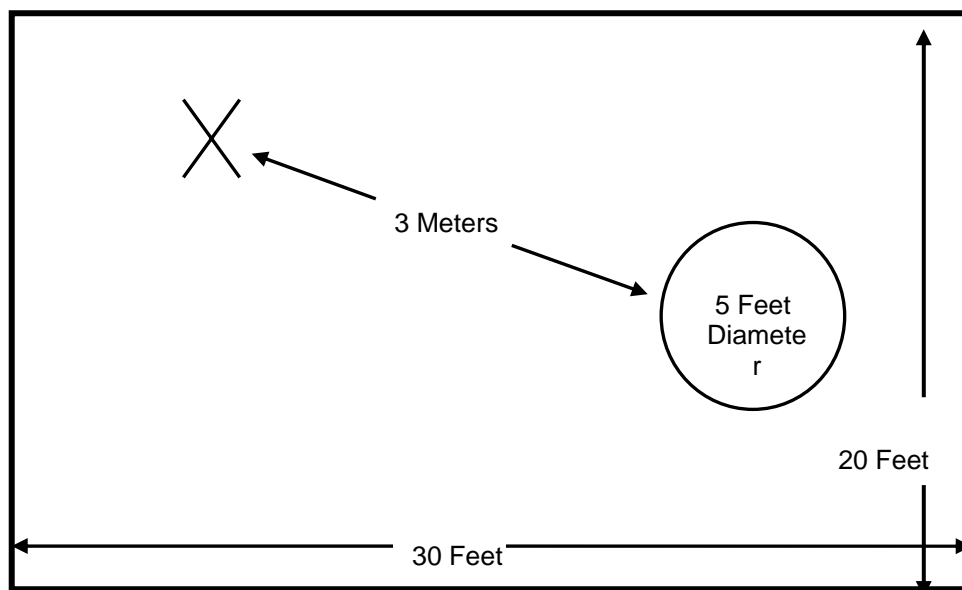


Figure 2.3-1: Semi-Anechoic Chamber Test Site

### 2.3.2 Open Area Tests Site (OATS)

The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 - 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 - 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style reinforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 2.3-2 below:

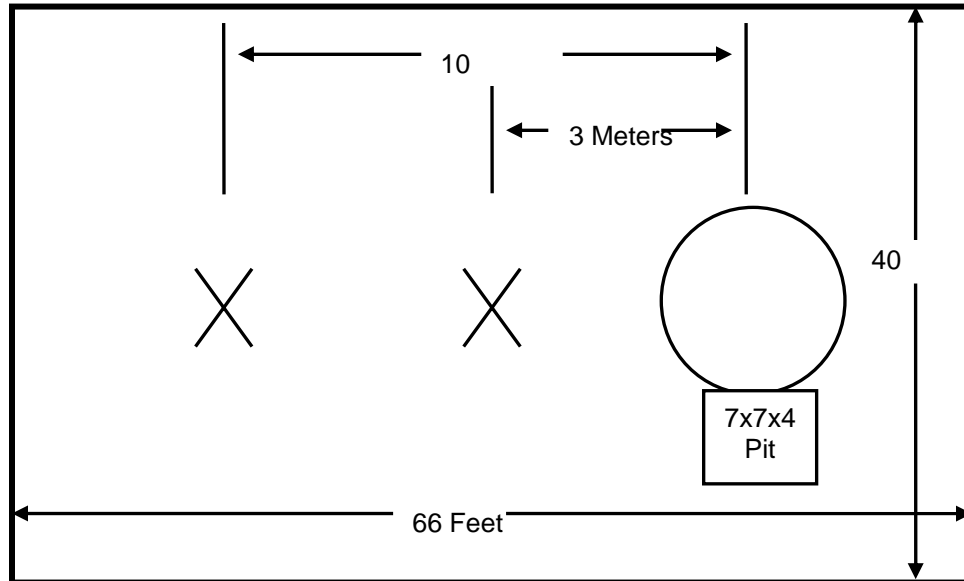


Figure 2.3-2: Open Area Test Site

## 2.4 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 8' solid aluminum horizontal ground plane (GRP) bonded every 3" to an 8' X 8' vertical ground plane.

The site is of sufficient size to test table top and floor standing equipment in accordance with section 6.1.4 of ANSI C63.4.

A diagram of the room is shown below in figure 4.1.3-1:

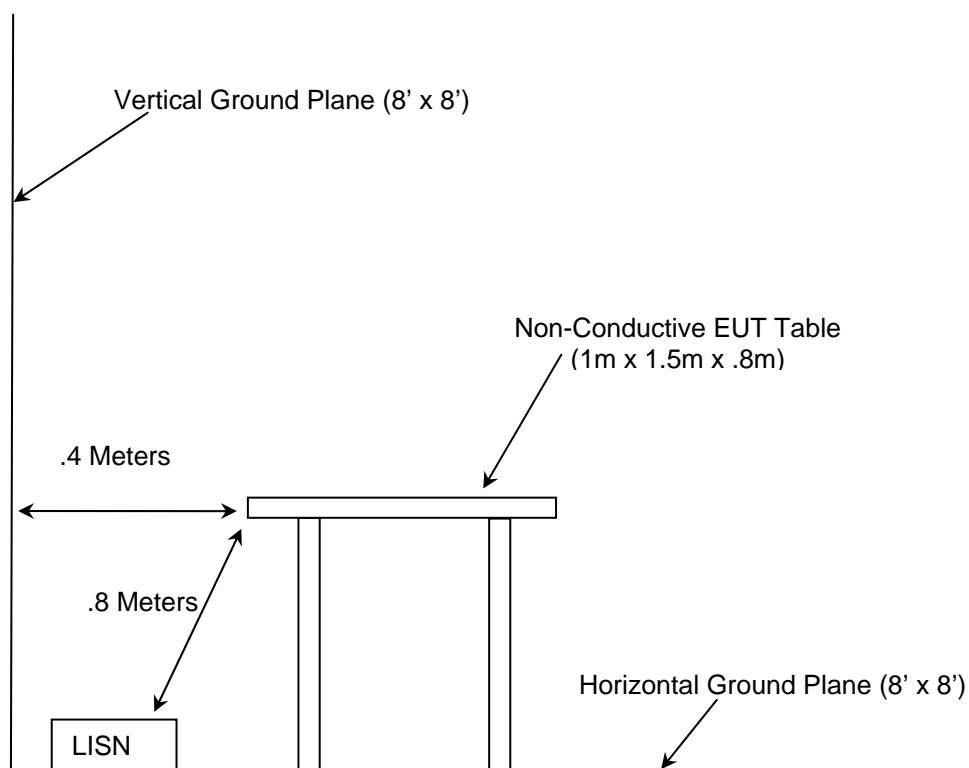


Figure 2.4-1: AC Mains Conducted EMI Site

## 3.0 APPLICABLE STANDARD REFERENCES

The following standards were used:

- 1 - ANSI C63.4-2003: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9KHz to 40GHz
- 2 - US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures (October 2005)
- 3 - US Code of Federal Regulations (CFR): Title 47, Part 24, Subpart E: Cellular Radiotelephone Service (October 2005)

## 4.0 LIST OF TEST EQUIPMENT

All test equipment used for regulatory testing is calibrated yearly or according to manufacturer's specifications.

**Table 4-1: Test Equipment**

Equipment Calibration Information					
ACS#	Mfg.	Eq. type	Model	S/N	Cal. Due
<input checked="" type="checkbox"/> 25	Chase	Bi-Log Antenna	CBL6111	1043	5/30/07
<input checked="" type="checkbox"/> 041	ElectroMetrics	Bi-Con Antenna	BIA-25	2925	5/25/07
<input checked="" type="checkbox"/> 090	ElectroMetrics	LPA Antenna	LPA-25	1476	5/25/07
<input checked="" type="checkbox"/> 22	Agilent	Pre-Amplifier	8449B	3008A00526	5/06/07
<input checked="" type="checkbox"/> 73	Agilent	Pre-Amplifier	8447D	272A05624	5/18/07
<input checked="" type="checkbox"/> 30	Spectrum Technologies	Horn Antenna	DRH-0118	970102	5/12/07
<input checked="" type="checkbox"/> 329	A.H.Systems	Horn Antenna	SAS-571	721	8/24/2007
<input checked="" type="checkbox"/> 282	Microwave Circuits	High Pass Filter	H3G020G4	74541 DC0608	03/10/07
<input checked="" type="checkbox"/> 1	Rohde & Schwarz	Receiver Display	804.8932.52	833771/007	3/01/07
<input checked="" type="checkbox"/> 2	Rohde & Schwarz	ESMI Receiver	1032.5640.53	839587/003	3/01/07
<input checked="" type="checkbox"/> 3	Rohde & Schwarz	Receiver Display	804.8932.52	839379/011	10/24/07
<input checked="" type="checkbox"/> 4	Rohde & Schwarz	ESMI Receiver	1032.5640.53	833827/003	10/24/07
<input checked="" type="checkbox"/> 283	Rohde & Schwarz	Spectrum Analyzer	FSP-40	1000033	3/24/07
<input checked="" type="checkbox"/> 167	ACS	Chamber EMI Cable Set	RG6	167	1/7/07
<input checked="" type="checkbox"/> 290	Florida RF Labs	HF RF Cable	SMSE-200-72.0-SMRE	NA	5/08/07
<input checked="" type="checkbox"/> 291	Florida RF Labs	HF RF Cable	SMRE-200W-12.0-SMRE	NA	5/08/07
<input checked="" type="checkbox"/> 292	Florida RF Labs	HF RF Cable	SMR-280AW-480.0-SMR	NA	5/24/07
<input checked="" type="checkbox"/> 237	Gigatronics	Signal Generator	900	282706	1/10/2007
<input checked="" type="checkbox"/> 176	Weinschel	30 dB Attenuator	46-30-34	BN4922	1/11/2007
<input checked="" type="checkbox"/> NA	Termaline	Coaxial Resistor 50W	8085	13328	N/A
<input checked="" type="checkbox"/> N/A	Termaline	Coaxial Resistor 100W	8164	7655	N/A
<input checked="" type="checkbox"/> N/A	Agilent	Signal Generator	E4437B	MY41000179	08/14/08
<input checked="" type="checkbox"/> 215	Sorensen	DC Power Supply	DCS60-50	0024B1130	N/A

## 5.0 SUPPORT EQUIPMENT AND ACCESSORIES

Table 5-1: Support Equipment and Accessories

Diagram #	Manufacturer	Equipment Type	Model Number	Serial Number	FCC ID
1	Sorensen	DC Power Supply	DCS60-50	0024B1130	NA
2	Agilent	Signal Generator	E4437B	MY41000179	NA

## 6.0 EQUIPMENT UNDER TEST SETUP AND BLOCK DIAGRAM

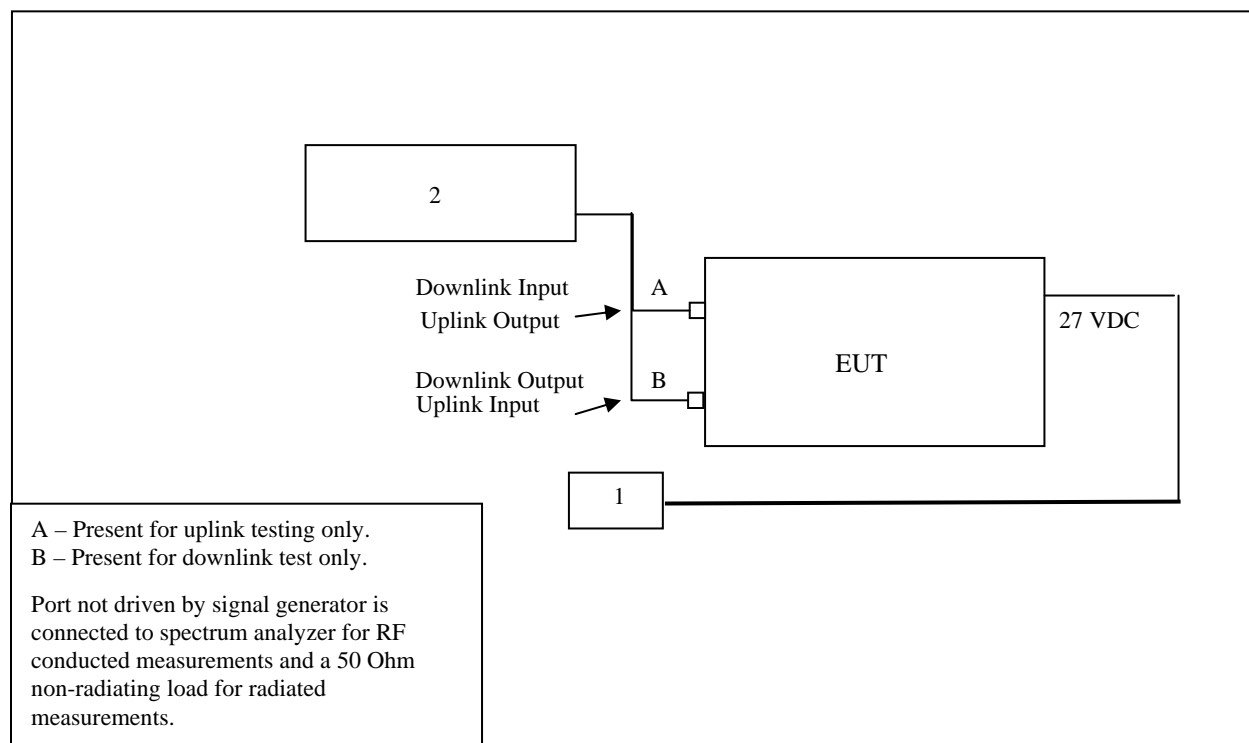


Figure 6-1: EUT Test Setup

## 7.0 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document. Data plots can be found in the test report appendix 06-0458-24E-A.

### 7.1 RF Power Output

#### 7.1.1 Measurement Procedure

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer. The resolution and video bandwidths of the spectrum analyzer were set at sufficient levels, >> emission bandwidth, to produce accurate results. Results for uplink and downlink configurations are shown below in Table 7.1-1.

#### 7.1.2 Measurement Results

**Table 7.1-1: Peak Output Power**

Configuration	Modulation	Channel	Frequency (MHz)	RF Power Output (dBm)
Uplink	CDMA	Low	1851.25	26.17
Uplink	CDMA	Middle	1880.00	25.03
Uplink	CDMA	High	1908.75	26.13
Uplink	TDMA	Low	1850.04	26.04
Uplink	TDMA	Middle	1879.98	25.23
Uplink	TDMA	High	1909.92	24.54
Uplink	GSM	Low	1850.20	25.10
Uplink	GSM	Middle	1880.00	26.39
Uplink	GSM	High	1909.80	24.60
Downlink	CDMA	Low	1931.25	42.07
Downlink	CDMA	Middle	1960.00	42.39
Downlink	CDMA	High	1988.75	41.97
Downlink	TDMA	Low	1930.04	40.64
Downlink	TDMA	Middle	1959.98	42.20
Downlink	TDMA	High	1989.92	41.99
Downlink	GSM	Low	1930.20	40.11
Downlink	GSM	Middle	1960.00	39.34
Downlink	GSM	High	1989.80	40.34

## 7.2 Occupied Bandwidth (Emission Limits)

### 7.2.1 Measurement Procedure

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer. The spectrum analyzer resolution and video bandwidths were set to 1% the emission bandwidth. The analyzer was set for Max Hold using a peak detector. Both the input and output bandwidths were evaluated to show similar characteristics of the emissions. Results for uplink and downlink configurations are shown below in Table 7.2-1.

### 7.2.2 Measurement Results

Occupied bandwidth plots are listed below and are supplied in the test report appendix 06-0458-24E-A.

**Table 7.2-1: Occupied Bandwidth**

Configuration	Modulation	Channel	Frequency (MHz)	Plot Reference
Uplink	CDMA	Low	1851.25	Figure 1.
Uplink	CDMA	Middle	1880.00	Figure 2.
Uplink	CDMA	High	1908.75	Figure 3.
Uplink	TDMA	Low	1850.04	Figure 4.
Uplink	TDMA	Middle	1879.98	Figure 5.
Uplink	TDMA	High	1909.92	Figure 6.
Uplink	GSM	Low	1850.20	Figure 7.
Uplink	GSM	Middle	1880.00	Figure 8.
Uplink	GSM	High	1909.80	Figure 9.
Downlink	CDMA	Low	1931.25	Figure 10.
Downlink	CDMA	Middle	1960.00	Figure 11.
Downlink	CDMA	High	1988.75	Figure 12.
Downlink	TDMA	Low	1930.04	Figure 13.
Downlink	TDMA	Middle	1959.98	Figure 14.
Downlink	TDMA	High	1989.92	Figure 15.
Downlink	GSM	Low	1930.20	Figure 16.
Downlink	GSM	Middle	1960.00	Figure 17.
Downlink	GSM	High	1989.80	Figure 18.

## 7.3 Spurious Emissions at Antenna Terminals and Inter-modulation Products

### 7.3.1 Measurement Procedure

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer. For inter-modulation products the two tone two test method was used with the device operating at maximum drive levels. Two tones were placed at the lower band-edge and upper band-edge. Inter-modulation products were tested using TDMA, CDMA, and CW signals. CW covers FM (GSM and F1D) for inter-modulation products. The spectrum analyzer resolution and video bandwidths were set to 1% the emission bandwidth

For out of band spurious emissions the spectrum analyzer resolution and video bandwidths were set to 1 MHz according to Section 24.238. The spectrum was investigated for the 30 MHz to 20 GHz in accordance to CFR 47 Part 2.1057. The analyzer was set for Max Hold using a peak detector. Spurious emissions were evaluated for all modulation modes.

### 7.3.2 Measurement Results

Emission plots are listed below in Table 7.3-1 and Table 7.3-2 and plots are supplied in the test report appendix 06-0458-24E-A.

**Table 7.3-1: Spurious Emissions - Uplink**

Configuration	Modulation	Channel	Frequency Range (MHz)	Plot Reference
Uplink	CDMA	Low	IM - In Band	Figure 19.
Uplink	CDMA	Low	IM - 30 - 2000	Figure 20.
Uplink	CDMA	Low	IM - 2000 - 20000	Figure 21.
Uplink	CDMA	Middle	30 – 2200	Figure 22.
Uplink	CDMA	Middle	2200 - 20000	Figure 23.
Uplink	CDMA	High	IM - In Band	Figure 24.
Uplink	CDMA	High	IM - 30 - 2000	Figure 25.
Uplink	CDMA	High	IM - 2000 - 20000	Figure 26.
Uplink	TDMA	Low	IM - In Band	Figure 27.
Uplink	TDMA	Low	IM - 30 - 2000	Figure 28.
Uplink	TDMA	Low	IM - 2000 - 20000	Figure 29.
Uplink	TDMA	Middle	30 - 2200	Figure 30.
Uplink	TDMA	Middle	2200 - 20000	Figure 31.
Uplink	TDMA	High	IM - In Band	Figure 32.
Uplink	TDMA	High	IM - 30 - 2000	Figure 33.
Uplink	TDMA	High	IM - 2000 - 20000	Figure 34.
Uplink	CW	Low	IM - In Band	Figure 35.
Uplink	CW	Low	IM - 30 - 2000	Figure 36.
Uplink	CW	Low	IM - 2000 - 20000	Figure 37.
Uplink	CW	High	IM - In Band	Figure 38.
Uplink	CW	High	IM - 30 - 2000	Figure 39.
Uplink	CW	High	IM - 2000 - 20000	Figure 40.
Uplink	GSM	Low	30 - 2200	Figure 41.
Uplink	GSM	Low	2200 - 20000	Figure 42.
Uplink	GSM	Middle	30 - 2200	Figure 43.
Uplink	GSM	Middle	2200 - 20000	Figure 44.
Uplink	GSM	High	30 - 2200	Figure 45.
Uplink	GSM	High	2200 - 20000	Figure 46.

Table 7.3-1: Spurious Emissions - Downlink

Configuration	Modulation	Channel	Frequency Range (MHz)	Plot Reference
Downlink	CDMA	Low	IM - In Band	Figure 47.
Downlink	CDMA	Low	IM - 30 - 2000	Figure 48.
Downlink	CDMA	Low	IM - 2000 - 20000	Figure 49.
Downlink	CDMA	Middle	30 - 2200	Figure 50.
Downlink	CDMA	Middle	2200 - 20000	Figure 51.
Downlink	CDMA	High	IM - In Band	Figure 52.
Downlink	CDMA	High	IM - 30 - 2000	Figure 53.
Downlink	CDMA	High	IM - 2000 - 20000	Figure 54.
Downlink	TDMA	Low	IM - In Band	Figure 55.
Downlink	TDMA	Low	IM - 30 - 2000	Figure 56.
Downlink	TDMA	Low	IM - 2000 - 20000	Figure 57.
Downlink	TDMA	Middle	30 - 2200	Figure 58.
Downlink	TDMA	Middle	2200 - 20000	Figure 59.
Downlink	TDMA	High	IM - In Band	Figure 60.
Downlink	TDMA	High	IM - 30 - 2000	Figure 61.
Downlink	TDMA	High	IM - 2000 - 20000	Figure 62.
Downlink	CW	Low	IM - In Band	Figure 63.
Downlink	CW	Low	IM - 30 - 2000	Figure 64.
Downlink	CW	Low	IM - 2000 - 20000	Figure 65.
Downlink	CW	High	IM - In Band	Figure 66.
Downlink	CW	High	IM - 30 - 2000	Figure 67.
Downlink	CW	High	IM - 2000 - 20000	Figure 68.
Downlink	GSM	Low	30 - 2200	Figure 69.
Downlink	GSM	Low	2200 - 20000	Figure 70.
Downlink	GSM	Middle	30 - 2200	Figure 71.
Downlink	GSM	Middle	2200 - 20000	Figure 72.
Downlink	GSM	High	30 - 2200	Figure 73.
Downlink	GSM	High	2200 - 20000	Figure 74.

## 7.4 Band-edge Compliance

### 7.4.1 Measurement Procedure

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer. The spectrum analyzer resolution and video bandwidths were set to 1% the emission bandwidth. The center frequency was set to both the upper and lower cellular frequency block edges. Band-edge compliance was evaluated for all modulation modes.

### 7.4.2 Measurement Results

Band-edge plots in are listed in Table 7.4-1 below and are supplied in the test report appendix 06-0458-24E-A.

**Table 7.4-1: Band-edge**

Configuration	Modulation	Channel	Frequency (MHz)	Plot Reference
Uplink	CDMA	Low	1851.25	Figure 75.
Uplink	CDMA	High	1908.75	Figure 76.
Uplink	TDMA	Low	1850.04	Figure 77.
Uplink	TDMA	High	1909.92	Figure 78.
Uplink	GSM	Low	1850.20	Figure 79.
Uplink	GSM	High	1909.80	Figure 80.
Downlink	CDMA	Low	1931.25	Figure 81.
Downlink	CDMA	High	1988.75	Figure 82.
Downlink	TDMA	Low	1930.04	Figure 83.
Downlink	TDMA	High	1989.92	Figure 84.
Downlink	GSM	Low	1930.20	Figure 85.
Downlink	GSM	High	1989.80	Figure 86.

## 7.5 Field Strength of Spurious Emissions

### 7.5.1 Measurement Procedure

The equipment under test is placed on the Open Area Test Site (described in section 2.1) on a wooden table at the turntable center. For each spurious emission, the antenna mast is raised and lowered from one (1) to four (4) meters and the turntable is rotated 360° and the maximum reading on the spectrum analyzer is recorded. This repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. The signal generator's frequency is set to that of the spurious emission recorded from the equipment under test. The antenna mast is raised and lowered from one (1) to four (4) meters to obtain a maximum reading on the spectrum analyzer. The output of the signal generator is then adjusted until the reading on the spectrum analyzer matches that obtained from the equipment under test. The signal generator level is recorded.

The power in dBm of each spurious emission is calculated by correcting the signal generator level for the cable loss and gain of the substitution antenna referenced to a dipole. The spectrum was investigated in accordance to CFR 47 Part 2.1057. A CW was used for both uplink and downlink for low, middle and high channels. The worst case emissions are reported of both uplink and downlink configurations. All emissions not reported were below the noise floor of the measurement equipment.

Results of the test are shown below in Table 7.5-1.

### 7.5.2 Measurement Results

**Table 7.5.-1: Field Strength of Spurious Emissions**

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
<b>Uplink</b>							
No spurious emissions were detected above the noise floor of the measurement equipment.							
<b>Downlink</b>							
<b>Low Channel</b>							
3860.08	-46.13	-42.00	H	5.76	-36.24	-13.00	23.24
3860.08	-47.96	-44	V	5.62	-38.38	-13.00	25.38
5790.12	-54.99	-55	H	5.95	-49.05	-13.00	36.05
5790.12	-53.52	-51	V	5.81	-45.19	-13.00	32.19
7720.16	-55.42	-55	H	5.36	-49.64	-13.00	36.64
7720.16	-55.25	-52	V	5.42	-46.58	-13.00	33.58
<b>Mid Channel</b>							
3920	-51.31	-51.00	H	5.73	-45.27	-13.00	32.27
3920	-53.8	-54	V	5.56	-48.44	-13.00	35.44
5880	-56.49	-56	H	6.01	-49.99	-13.00	36.99
5880	-55.91	-56	V	5.89	-50.11	-13.00	37.11
7840	-55.86	-51	H	5.46	-45.54	-13.00	32.54
7840	-53.93	-50	V	5.49	-44.51	-13.00	31.51
<b>High Channel</b>							
3979.94	-51.46	-52.00	H	5.69	-46.31	-13.00	33.31
3979.94	-51.46	-54	V	5.50	-48.50	-13.00	35.50
5969.91	-57.56	-60	H	6.08	-53.92	-13.00	40.92
5969.91	-57.46	-56	V	5.97	-50.03	-13.00	37.03
7959.88	-55.63	-57	H	5.55	-51.45	-13.00	38.45
7959.88	-54.89	-57	V	5.56	-51.44	-13.00	38.44
9949.85	-55.98	-59	H	6.19	-52.81	-13.00	39.81
9949.85	-56.72	-58	V	6.09	-51.91	-13.00	38.91

## 7.6 Frequency Response

### 7.6.1 Measurement Procedure

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer. The spectrum analyzer resolution and video bandwidths were set to 3 MHz and 10MHz respectively. The analyzer was set for Max Hold using a peak detector. Using a signal generator, both the uplink and downlink ports were driven with a CW signal. The frequency of the signal generator was sweep across the entire range of operation. Results of the test are shown below in and Figure 7.6-1 through 7.6-2.

### 7.6.2 Measurement Results

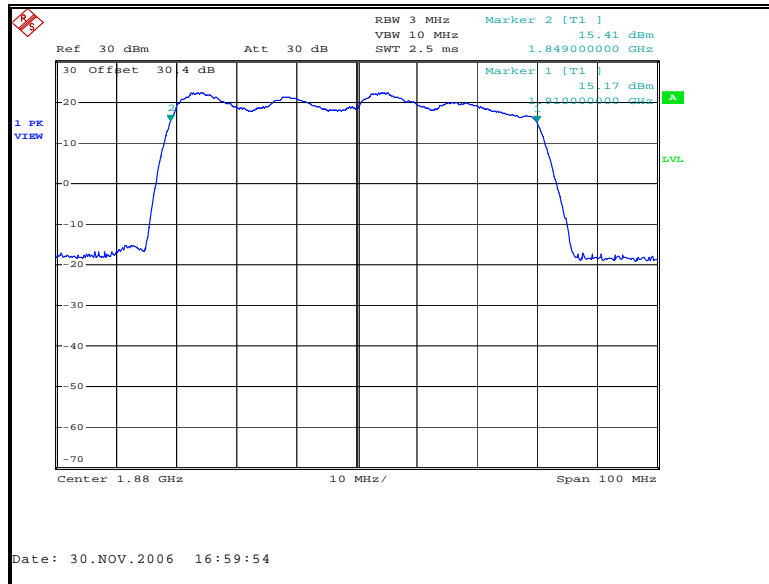


Figure 7.6-1: Frequency Response Uplink

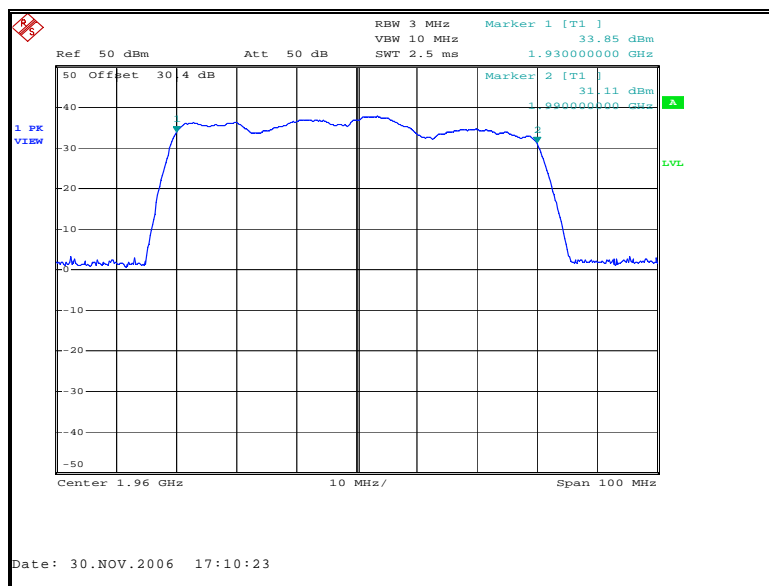


Figure 7.6-2: Frequency Response Downlink

## 7.7 Radiated Emissions (Unintentional Radiators) - FCC Section 15.109

### 7.7.1 Measurement Procedure

The equipment under test is placed on the Open Area Test Site (described in section 2.1) on a wooden table at the turntable center. For each radiated emission, the antenna mast is raised and lowered from one (1) to four (4) meters and the turntable is rotated 360° to obtain a maximum peak reading on the spectrum analyzer. The radiated emissions are then measured using an EMI receiver employing a CISPR quasi-peak detector for frequencies below 1000 MHz and an Average detector function for frequencies above 1000 MHz. This repeated for both horizontal and vertical polarizations of the receive antenna.

The field strength of each radiated emission is calculated by correcting the EMI receiver level for cable loss, amplifier gain, and antenna correction factors.

Field Strength (dBuV/m) = EMI Receiver Level (dBuV) + Cable Loss (dB) – Amplifier Gain (dB) + Antenna Correction Factor (1/m)

Results of the test are shown below in Table 7.7.-1.

### 7.7.2 Measurement Results

**Table 7.7-1: Radiated Emissions Tabulated Data**

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Spurious Emissions										
30.0		38.75	v	-8.50	-----	30.25	-----	40.0	-----	9.75
59.1		47.76	v	-19.75	-----	28.01	-----	40.0	-----	11.99
62.3		42.74	v	-20.23	-----	22.51	-----	40.0	-----	17.49
86.0		37.76	v	-17.23	-----	20.53	-----	40.0	-----	19.47
96.8		27.80	v	-14.71	-----	13.09	-----	43.5	-----	30.41
102.2		37.43	v	-14.02	-----	23.41	-----	43.5	-----	20.09
135.6		38.34	v	-12.91	-----	25.43	-----	43.5	-----	18.07
156.1		37.96	v	-14.07	-----	23.89	-----	43.5	-----	19.61
591.5		37.71	v	-4.25	-----	33.46	-----	46.0	-----	12.54
841.6		22.50	v	-0.03	-----	22.47	-----	46.0	-----	23.53
1842.0		57.91	v	-5.83	-----	52.08	74.0	54.0	-----	1.92

## 7.8 Frequency Stability

### 7.8.1 Measurement Procedure

The equipment under test is placed inside an environmental chamber. The RF output is directly coupled to the input of the measurement equipment and a power supply is attached to the primary supply voltage.

Frequency measurements were made at the extremes of the of temperature range -30° C to +50° C and at intervals of 10° C at normal supply voltage. A period of time sufficient to stabilize all components of the equipment was allowed at each frequency measurement. At a temperature 20° C the supply voltage was varied from 85% to 115% from the normal. The maximum variation of frequency was recorded.

Data was collected at the low, middle, and high frequencies for both uplink and downlink. Results of the test are shown below in Figures 7.8-1 through 7.8-6.

### 7.8.2 Measurement Results

The test results conclude the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block as according to CFR 47 Part 24.235.

#### Uplink

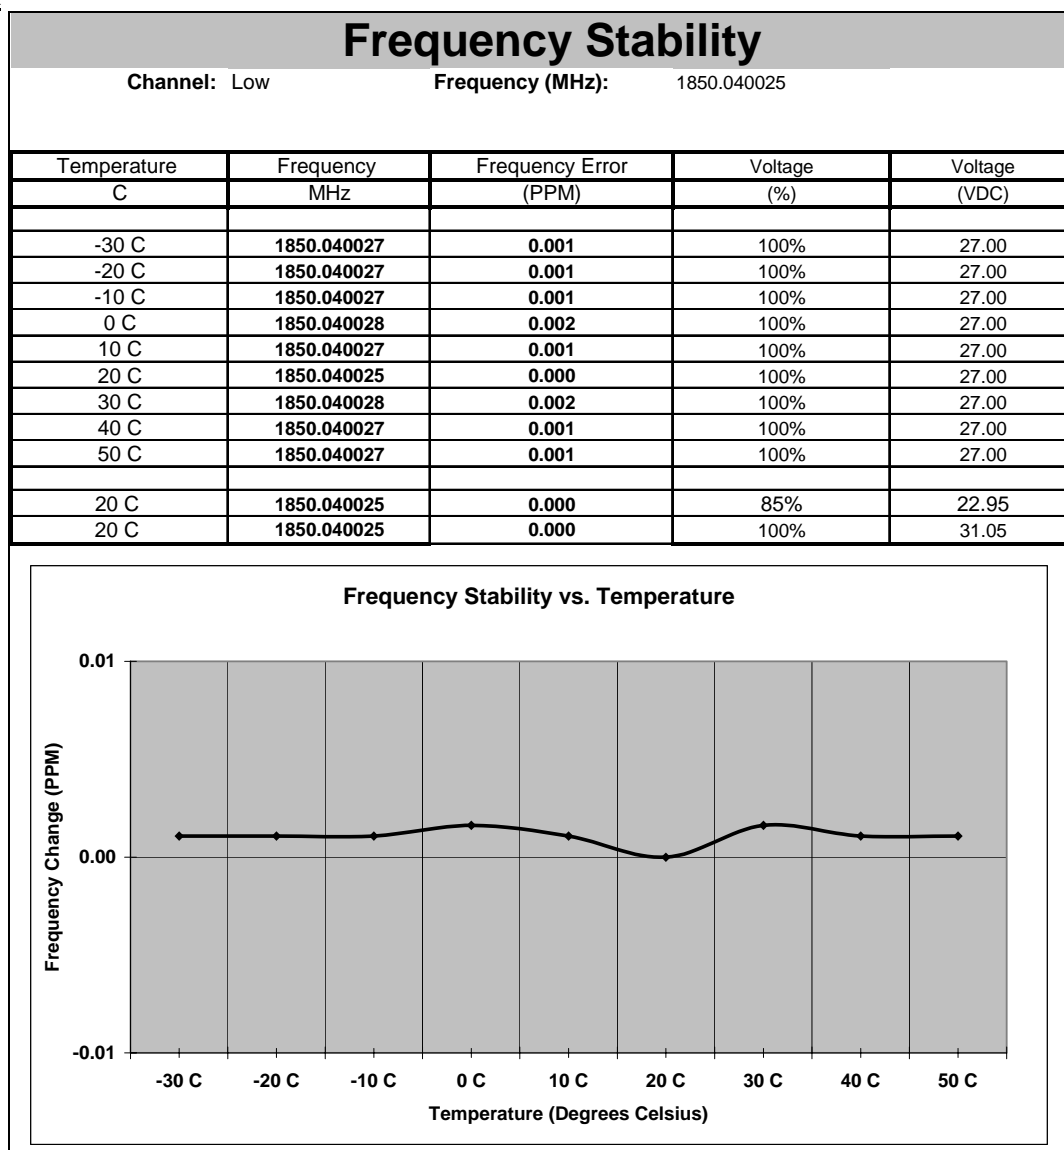


Figure 7.8-1: Frequency Stability Uplink – Low Channel

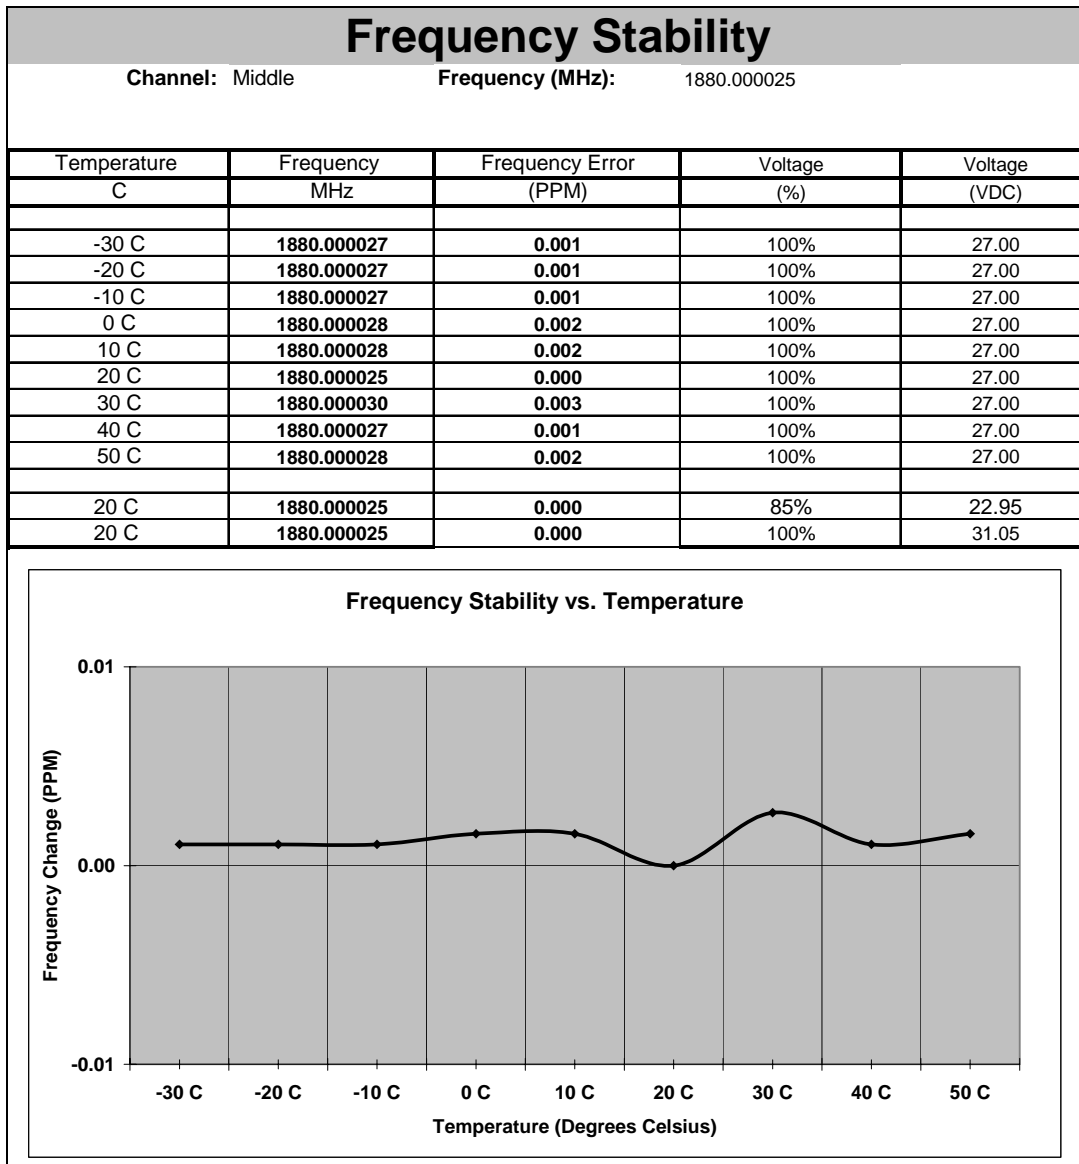


Figure 7.8-2: Frequency Stability Uplink – Middle Channel

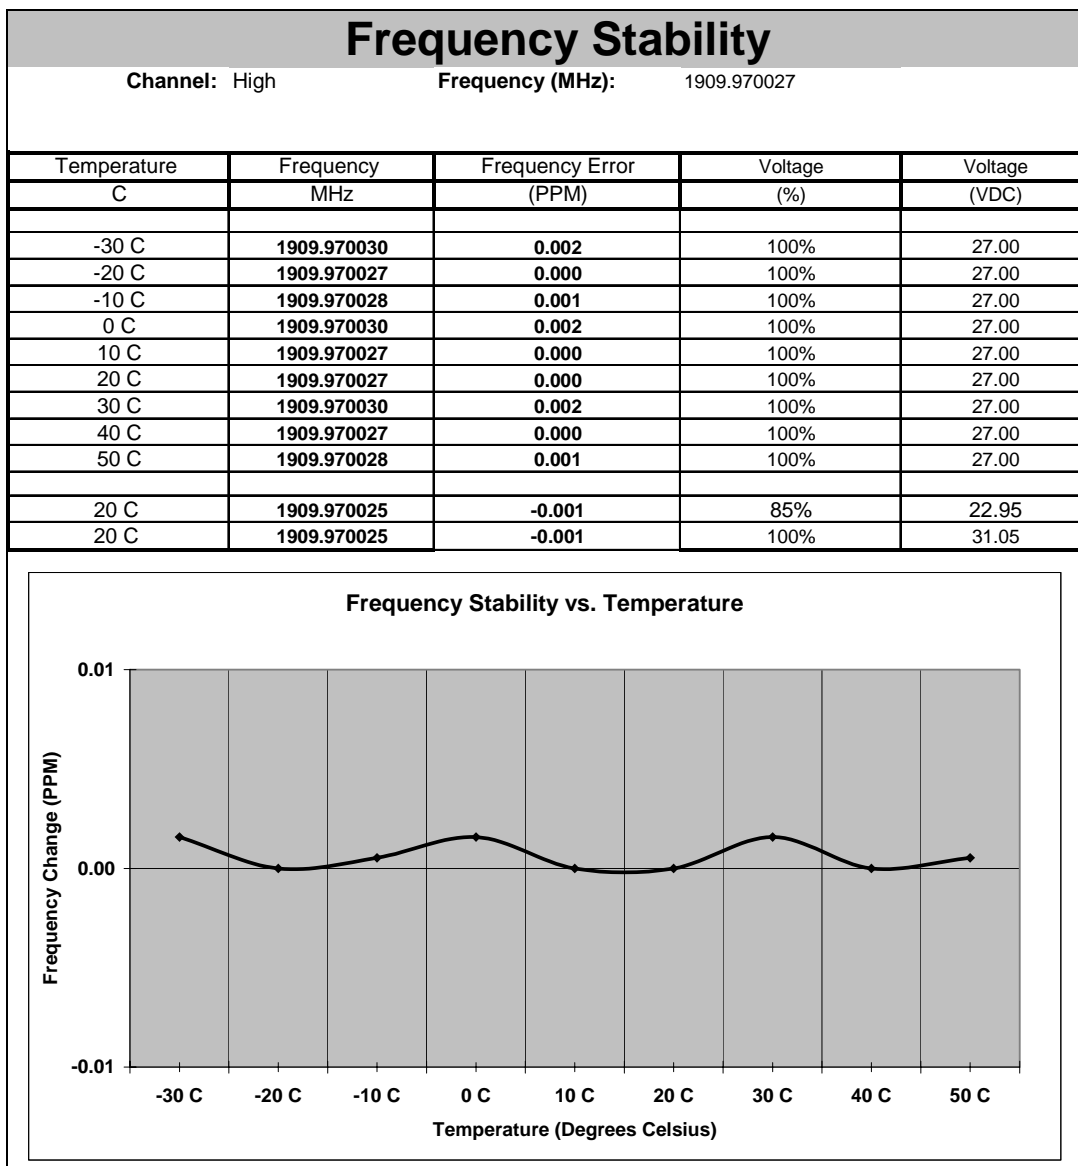


Figure 7.8-3: Frequency Stability Uplink – High Channel

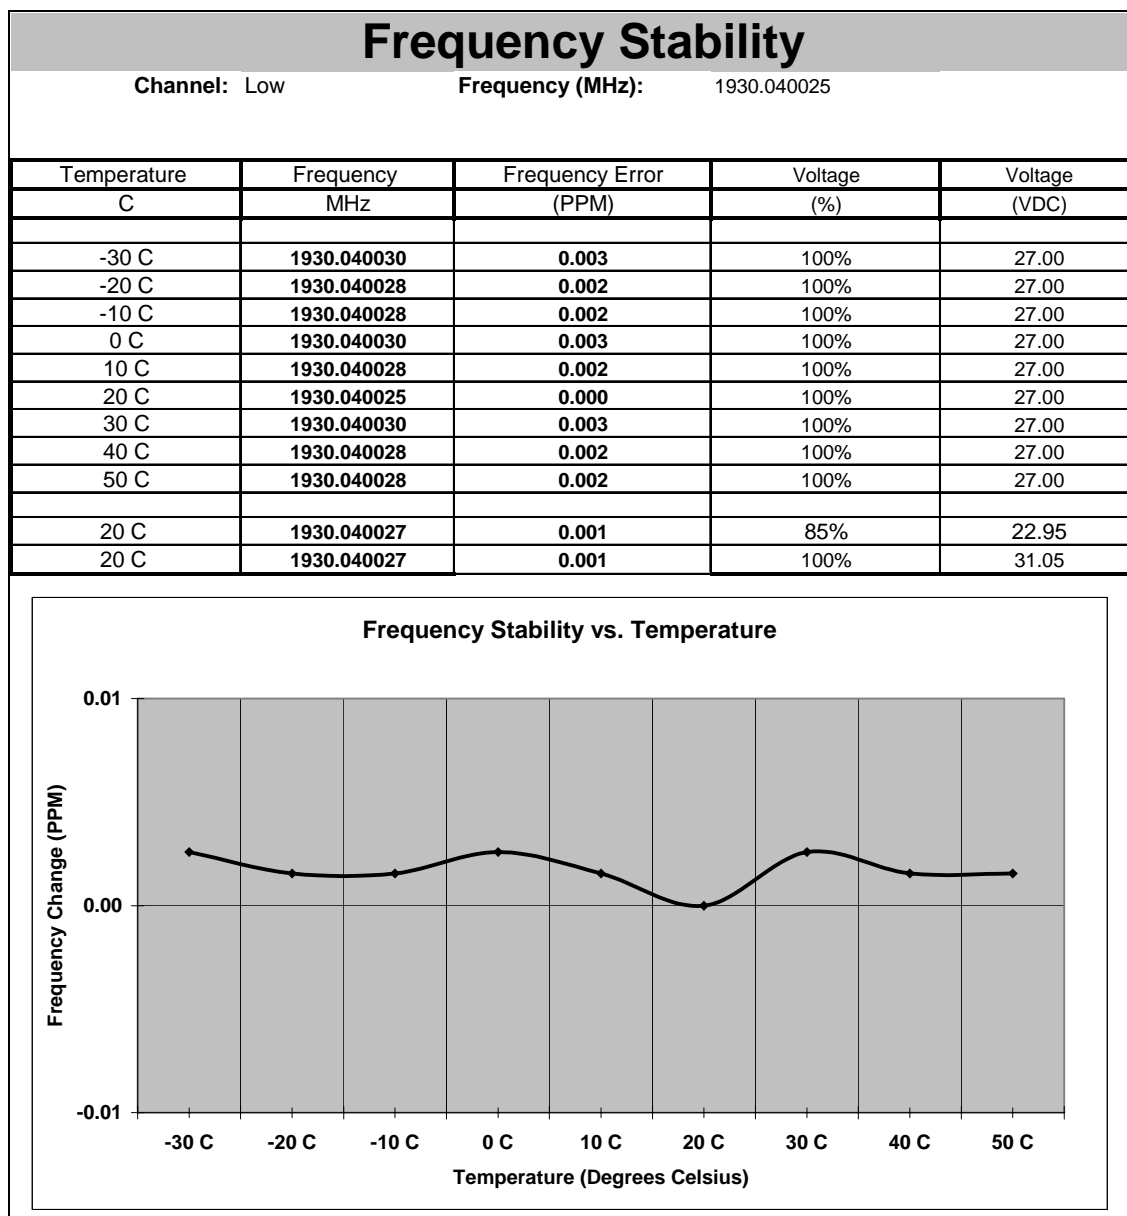
Downlink

Figure 7.8-4: Frequency Stability Downlink – Low Channel

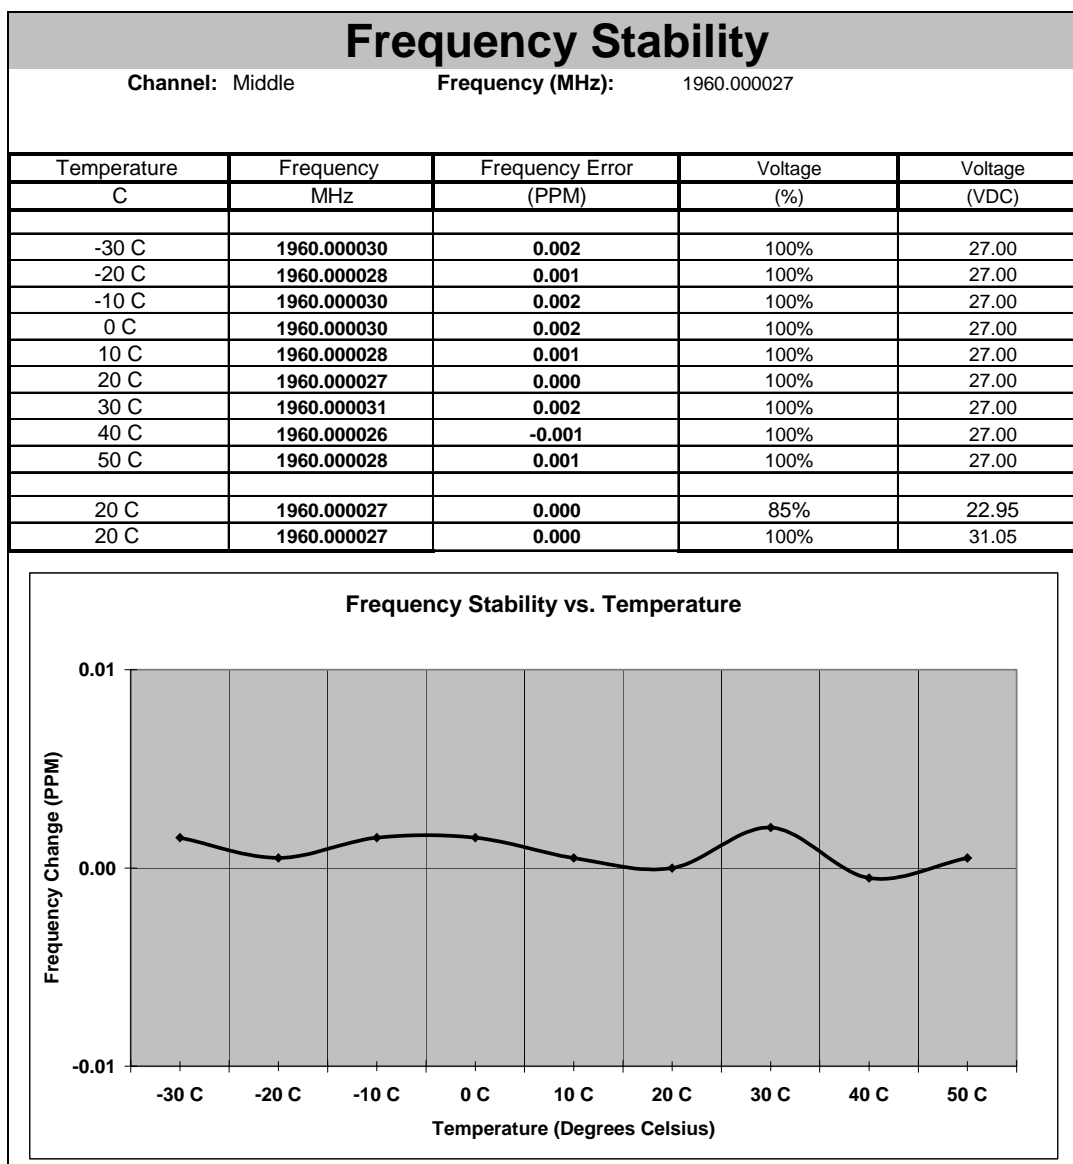


Figure 7.8-5: Frequency Stability Downlink – Middle Channel

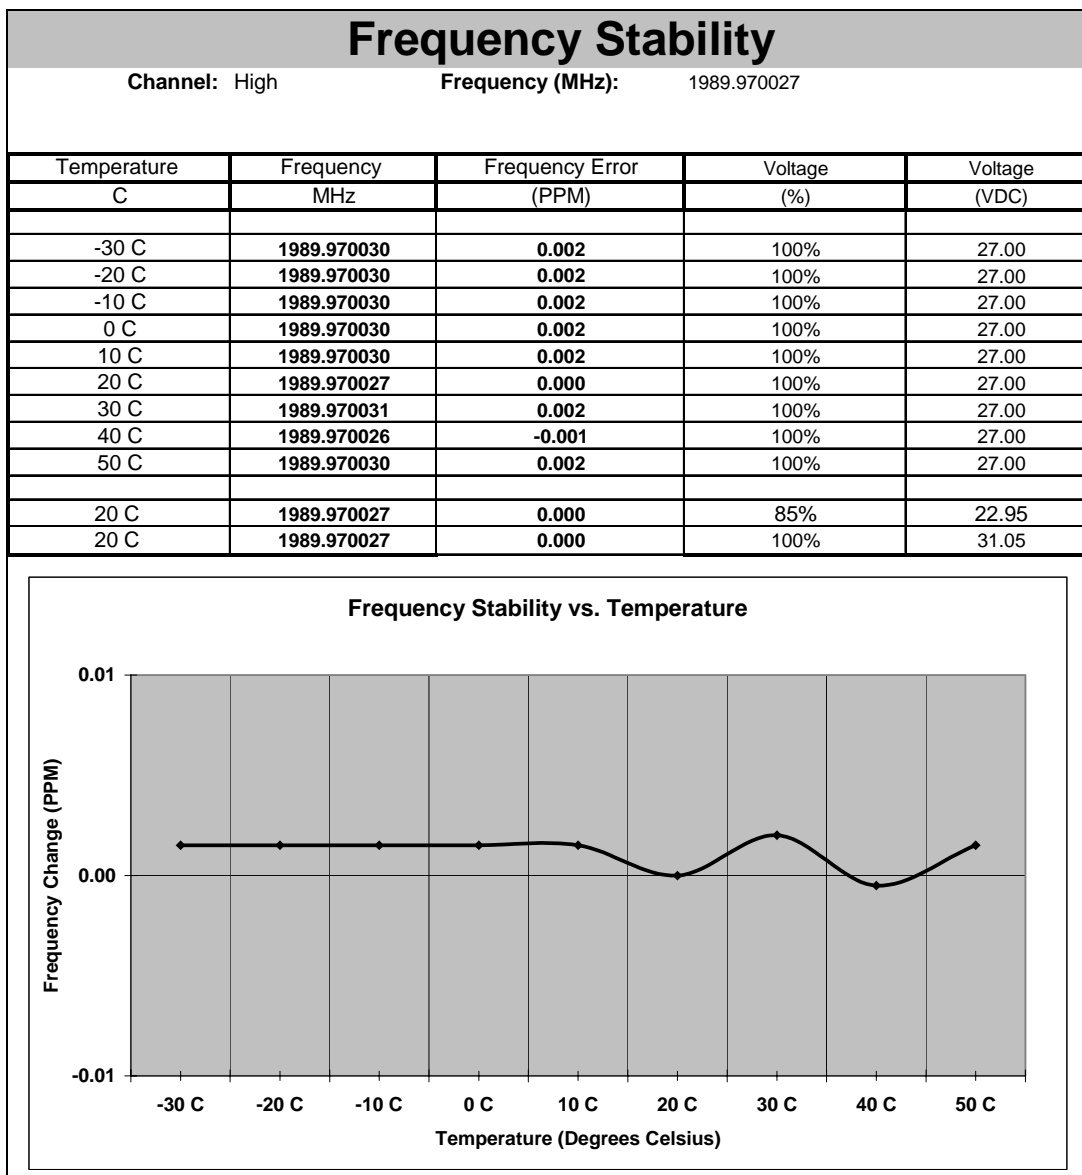


Figure 7.8-6: Frequency Stability Downlink – High Channel

**END Report**