



Prüfbericht - Nr.: 15032924 001		Seite 1 von 19	
<i>Test Report No.:</i>		<i>Page 1 of 19</i>	
Auftraggeber: Checkpoint Systems Inc			
<i>Client:</i>		101 Wolf Drive, P.O. Box 188, Thorofare, NJ 08086, United States	
Gegenstand der Prüfung: Electronic Article Surveillance Deactivation System			
<i>Test item:</i>			
Bezeichnung: EVOLVE D11		Serien-Nr.: N/A	
<i>Identification:</i>		<i>Serial No.:</i>	
Wareneingangs-Nr.: 153122586		Eingangsdatum: 10.06.2009	
<i>Receipt No.:</i>		<i>Date of receipt:</i>	
Prüfört: Refer to section 1.1			
<i>Testing location:</i>			
Prüfgrundlage: FCC Part 15:2008			
<i>Test specification:</i>		RSS-210 (Issue 7):2007	
		RSS-Gen (Issue 2):2007	
Prüfergebnis: Der Prüfgegenstand entspricht oben genannter Prüfgrundlage(n).			
<i>Test Result:</i>		<i>The test item passed the test specification(s).</i>	
Prüflaboratorium: TÜV Rheinland (Shanghai) Co., Ltd.			
<i>Testing Laboratory:</i>			
geprüft/ tested by:		kontrolliert/ reviewed by:	
17.07.2009 Gu Weikang/PE 		17.07.2009 Lu Xinhua/TC 	
<i>Datum</i>	<i>Name/Stellung</i>	<i>Unterschrift</i>	<i>Datum</i>
<i>Date</i>	<i>Name/Position</i>	<i>Signature</i>	<i>Date</i>
Sonstiges/ Other Aspects:			
FCC ID: DO4CP11			
IC: 3356B-CP11			
<p>This report is for FCC class II permissive change. The difference compared with original design is that alternative loop antenna with different dimension was added, which will mainly affect the performance of conducted and radiated emission of the product. In this report, new tests of conducted emission and radiated emission were performed on new sample with new antenna and one of the AC adaptors which is the same as original product.</p>			
Abkürzungen: P(ass) = entspricht Prüfgrundlage		Abbreviations: P(ass) = passed	
F(ail) = entspricht nicht Prüfgrundlage		F(ail) = failed	
N/A = nicht anwendbar		N/A = not applicable	
N/T = nicht getestet		N/T = not tested	
<p>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</p> <p><i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i></p>			

TEST SUMMARY

4.1.1 CONDUCTED EMISSION

Result:

Passed

4.1.2 RADIATED EMISSION UP TO 30MHZ

Result:

Passed

4.2.1 RADIATED EMISSION ABOVE 30MHZ

Result:

Passed

Contents

1	TEST SITES	4
1.1	TEST FACILITIES	4
1.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	4
2	GENERAL PRODUCT INFORMATION	5
2.1	PRODUCT FUNCTION AND INTENDED USE.....	5
2.2	RATINGS AND SYSTEM DETAILS	5
2.3	OPERATION IN RESTRICTED BANDS	6
2.4	INDEPENDENT OPERATION MODES	7
2.5	SUBMITTED DOCUMENTS.....	7
2.6	RELATED SUBMITTAL(S) GRANTS	7
3	TEST SET-UP AND OPERATION MODES	8
3.1	PRINCIPLE OF CONFIGURATION SELECTION	8
3.2	TEST OPERATION AND TEST SOFTWARE	8
3.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	8
3.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	8
4	TEST RESULT	9
4.1	EMISSION IN THE FREQUENCY RANGE UP TO 30 MHz	9
4.1.1	Conducted Emission.....	9
4.1.2	Radiated Emission up to 30MHz.....	12
4.2	EMISSION IN THE FREQUENCY RANGE ABOVE 30 MHz.....	14
4.2.1	Radiated Emission above 30MHz.....	14
5	PHOTOGRAPHS OF THE SAMPLE AND TEST SET-UP.....	15
6	LIST OF TABLES.....	19
7	LIST OF FIGURES.....	19
8	LIST OF PHOTOGRAPHS	19

1 Test Sites

1.1 Test Facilities

Laboratory 1: TÜV Rheinland (Shanghai) Co., Ltd.

Address: 10-15/F, Huatsing Building, No. 88, Lane 777, West Guangzhong Road, Zhabei District, Shanghai 200072, P.R. China

(FCC registration No.: 657274; IC site No.: 2932F-1)

Laboratory 2: Shanghai Institute of Measurement and Testing Technology

Address: No. 716, Yi Shan Road, Shanghai 200233, P. R. China

(FCC registration No.: 142171; IC site No.: 6625A)

The used test equipments are in accordance with CISPR 16-1 series standards for measurement of radio interference. Part of the tests was conducted by “Shanghai Institute of Measurement and Testing Technology” under supervision of TÜV Rheinland’s engineer.

1.2 List of Test and Measurement Instruments

Table 1: List of test and measurement equipment

No.	Equipment	Model	Serial no.	Cal. due date
Lab 1:				
1.	EMI test receiver	ESIB26	100227	10.06.2010
2.	Artificial mains network	NNB 42	04/10048	25.02.2010
3.	3m modified semi-anechoic chamber	SAC	N/A	25.04.2011
4.	EMI test receiver	ESCI	100280	03.12.2009
5.	Broadband antenna	BTA-H	040005H	11.03.2010
Lab 2:				
6.	EMI test receiver	ESI 26	Rong-001-01	24.12.2009
7.	Loop Field Strength Measuring System	FMZB 1516	Rong-001-07	01.12.2009

2 General Product Information

2.1 Product Function and Intended Use

The EVOLVE D11 is part of Checkpoint Systems, Inc. EAS (Electronic Article Surveillance) System. The device utilizes RF energy to deactivate security tags attached to merchandise. The EVOLVE D11 is used at POS (Point of Sale) locations during purchase. An active tag will be detected by antenna installed at exit and sound an alarm.

The EVOLVE D11 sweeps frequencies between 7.4 MHz and 10 MHz by emitting a narrow six-microsecond pulse. The L/C tuned circuit in the security tags react to the pulse by resonating when exposed to the EVOLVE D11 pad antenna.

2.2 Ratings and System Details

System input	:	AC 100-240V, 50/60Hz
Rated input current	:	1.6A
Protection class	:	I
Type of antenna	:	Loop antenna
Antenna info	:	Model name: Apparel Market Deactivation Antenna Antenna dimension: 17.3" * 17.3"
Adaptor info	:	Trade name: GlobTek Model name: GT-2S5024D-R Input: AC 100-240V, 50-60Hz Output: DC 24V, 2.1A

2.3 Operation in Restricted Bands

The EUT is a digital swept frequency hopping transmitter. The EUT hops on discrete frequencies. The discrete frequencies that can be transmitted by the EUT are as follows:

Frequency Table 0 (7.8 - 8.6 MHz)							
7.790E+06	7.845E+06	7.899E+06	7.954E+06	8.009E+06	8.063E+06	8.118E+06	8.173E+06
8.227E+06	8.282E+06	8.337E+06	8.391E+06	8.446E+06	8.500E+06	8.555E+06	8.610E+06

Frequency Table 1 (8.2 - 9.0 MHz)							
8.170E+06	8.227E+06	8.285E+06	8.342E+06	8.399E+06	8.457E+06	8.514E+06	8.571E+06
8.629E+06	8.686E+06	8.743E+06	8.801E+06	8.858E+06	8.915E+06	8.973E+06	9.030E+06

Frequency Table 2 (9.0 - 10.0 MHz)							
9.020E+06	9.084E+06	9.148E+06	9.212E+06	9.276E+06	9.340E+06	9.404E+06	9.468E+06
9.532E+06	9.596E+06	9.660E+06	9.724E+06	9.788E+06	9.852E+06	9.916E+06	9.980E+06

Frequency Table 3 (7.9 - 8.5 MHz / 8.9 - 9.5 MHz)							
7.900E+06	7.986E+06	8.071E+06	8.157E+06	8.243E+06	8.329E+06	8.414E+06	8.500E+06
8.900E+06	8.986E+06	9.071E+06	9.157E+06	9.243E+06	9.329E+06	9.404E+06	9.500E+06

The restricted frequency bands (per FCC Part 15 Clause 15.205) in the operating frequency band of the EUT are as follows:

- 8.291 – 8.294MHz
- 8.362 – 8.366MHz
- 8.37625 – 8.38675MHz
- 8.41425 – 8.41475MHz

The transmitter is not capable of hopping into, or operating, in the restricted frequency bands and therefore, complies with the restriction.

2.4 Independent Operation Modes

The EVOLVE D11 was operated in two conditions, with and without a security tag in the field of the antenna. It was determined that higher signal levels were exhibited without the security tag in the field. All emissions were recorded in this condition. The antenna pad of the EVOLVE D11 was laid flat on the wooden table. This is the normal method of antenna installation.

2.5 Submitted Documents

The submitted documents are listed as follow:

- Circuit diagram
- Block diagram
- User manual
- Label artwork

2.6 Related Submittal(s) Grants

This is an application of class II permissive change based on original certification.

3 Test Set-up and Operation Modes

3.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible emission level. The test conditions were adapted accordingly in reference to the instructions for use.

Refer to the related paragraph of this report.

3.2 Test Operation and Test Software

Test operation should refer to test methodology.
- There was no special software to exercise the device.

3.3 Special Accessories and Auxiliary Equipment

None.

3.4 Countermeasures to achieve EMC Compliance

The test sample, which has been tested, contained the noise suppression parts as described in the circuit diagram or the Technical Construction File. No additional measures were employed to achieve compliance.

4 Test Result

4.1 Emission in the Frequency Range up to 30 MHz

4.1.1 Conducted Emission

Result:	Passed
----------------	---------------

Date of testing	: 09.07.2009
Test specification	: FCC Part 15 Section 15.207; RSS-GEN 7.2.2
Test method	: ANSI 63.4-2003
Measurement location	: Shielded room
Detector	: Quasi-peak, Average
Measurement BW	: 9 kHz
Supply voltage	: AC 120V, 60Hz
Measuring frequency range	: 0.15-30MHz
Ambient condition	: Temperature: 23°C; Relative humidity: 37%
Operational mode	: Continuous sweep


Limit Section 15.207 & RSS-GEN 7.2.2,

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

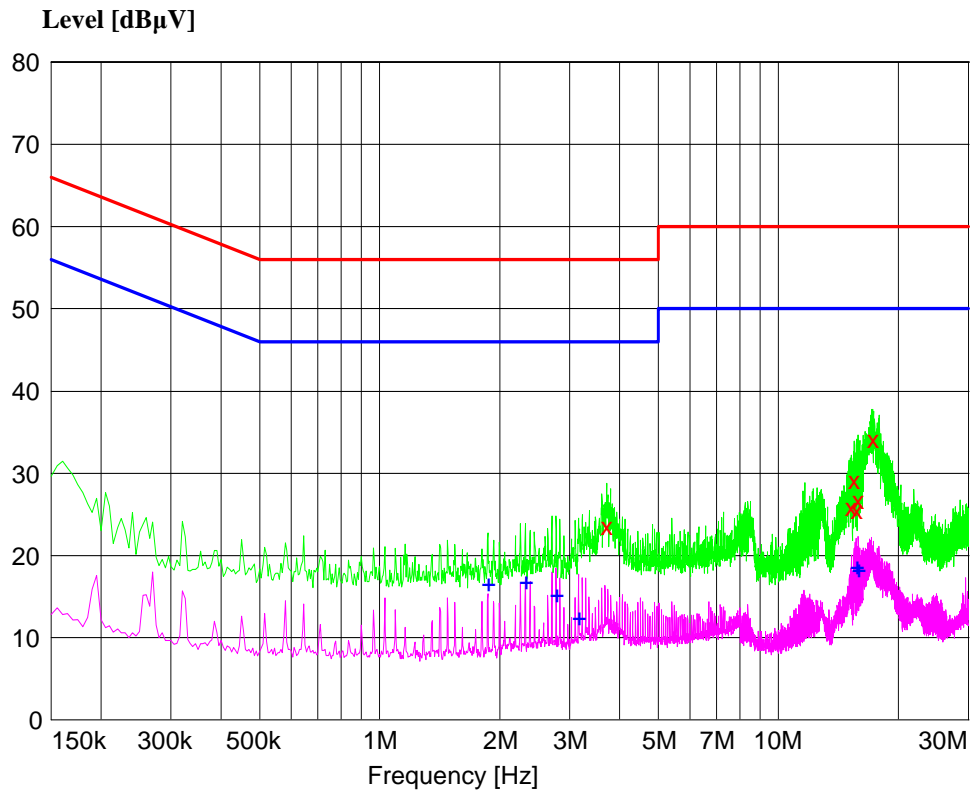* Decreases with the logarithm of the frequency.

Pre-scan has been performed for mode 4/6 & mode 5, and the worst case was found for mode 6 and final test results were shown as follows.

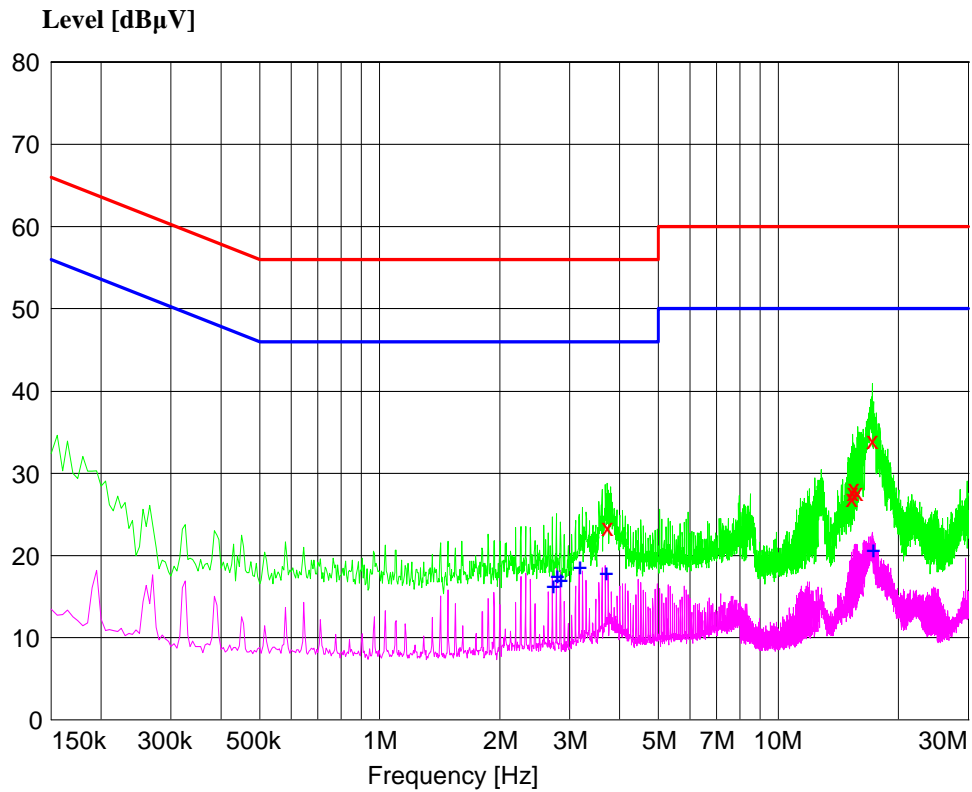
The following figures and tables were those measured by an automatic measuring system. Both quasi-peak and average values were measured. Quasi-peak and average values were measured and listed respectively where they had a maximum in previous scanning survey. In the following figures, “×” means quasi-peak result and “+” means average result which was measured in final measurement.

Figure 1: Spectral diagram, conducted emission, 150kHz - 30MHz, L

Final quasi-peak measurement results:

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line
3.710000	23.60	20.5	56.0	32.4	L1
15.235000	25.90	20.9	60.0	34.1	L1
15.480000	29.20	20.9	60.0	30.8	L1
15.725000	25.50	20.9	60.0	34.5	L1
15.855000	26.80	20.9	60.0	33.2	L1
17.245000	34.20	21.1	60.0	25.8	L1

Final average measurement results:

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line
1.870000	16.60	20.4	46.0	29.4	L1
2.320000	16.90	20.4	46.0	29.1	L1
2.770000	15.30	20.5	46.0	30.7	L1
3.155000	12.50	20.5	46.0	33.5	L1
15.665000	18.70	20.9	50.0	31.3	L1
15.855000	18.40	20.9	50.0	31.6	L1

Figure 2: Spectral diagram, conducted emission, 150kHz - 30MHz, N

Final quasi-peak measurement results:

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line
3.725000	23.50	20.4	56.0	32.5	N
15.300000	27.00	21.2	60.0	33.0	N
15.350000	27.70	21.2	60.0	32.3	N
15.435000	28.20	21.2	60.0	31.8	N
15.820000	27.70	21.2	60.0	32.3	N
17.240000	34.00	21.1	60.0	26.0	N

Final average measurement results:

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line
2.710000	16.40	20.2	46.0	29.6	N
2.775000	17.70	20.2	46.0	28.3	N
2.840000	17.10	20.2	46.0	28.9	N
3.165000	18.70	20.3	46.0	27.3	N
3.680000	18.00	20.4	46.0	28.0	N
17.240000	20.80	21.1	50.0	29.2	N

Table 2: Radiated emission results, 9kHz - 30MHz, Peak

Frequency (MHz)	Peak level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna height (cm)	Polarization
8.28	61.57	79.08	17.51	100	X
8.27	61.61	79.08	17.47	100	Y
8.20	50.15	79.08	28.93	100	Z

Remark: Polarization of antenna to ground plane: X - along measurement axis, Y - vertical axis, Z - horizontal axis.

4.2 Emission in the Frequency Range above 30 MHz

4.2.1 Radiated Emission above 30MHz

Result:
Passed

Date of testing : 09.07.2009
 Test specification : FCC Part 15 Section 15.223(b) & RSS-210 A2.3
 Test method : ANSI 63.4-2003
 Measurement location : Semi anechoic chamber
 Measurement distance : 3m
 Detector : Quasi-peak
 Measurement BW : 120 kHz
 Supply voltage : AC 120V, 60Hz
 Measuring frequency range : 30 - 1000MHz
 Ambient condition : Temperature: 23°C; Relative humidity: 37%

Limit Section 15.223(b) & RSS-210 A2.3,

(b) The field strength of emissions outside of the band 1.705-10.0 MHz shall not exceed the general radiated emission limits in Section 15.209.

Frequency (MHz)	Field strength (microvolt/meter)	Field strength (dB μ V/m)	Measurement distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

The radiated emission measurement was made at 3m. The EUT was placed on a nonconductive turntable 0.8m above the ground plane. The spectrum was examined from 30 - 1000MHz. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 m in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

Table 3: Radiated emission results, 30MHz - 1GHz, Quasi-peak


Frequency (MHz)	QP level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna height (cm)	Angle (deg)	Polarization
559.94	31.2	46.0	14.8	150.0	0.0	H
560.00	28.4	46.0	17.6	100.0	-90.0	V
799.99	30.6	46.0	15.4	100.0	145.0	V

5 Photographs of the Sample and Test Set-Up

Photograph 1: Photographs of the 17.3 inches antenna



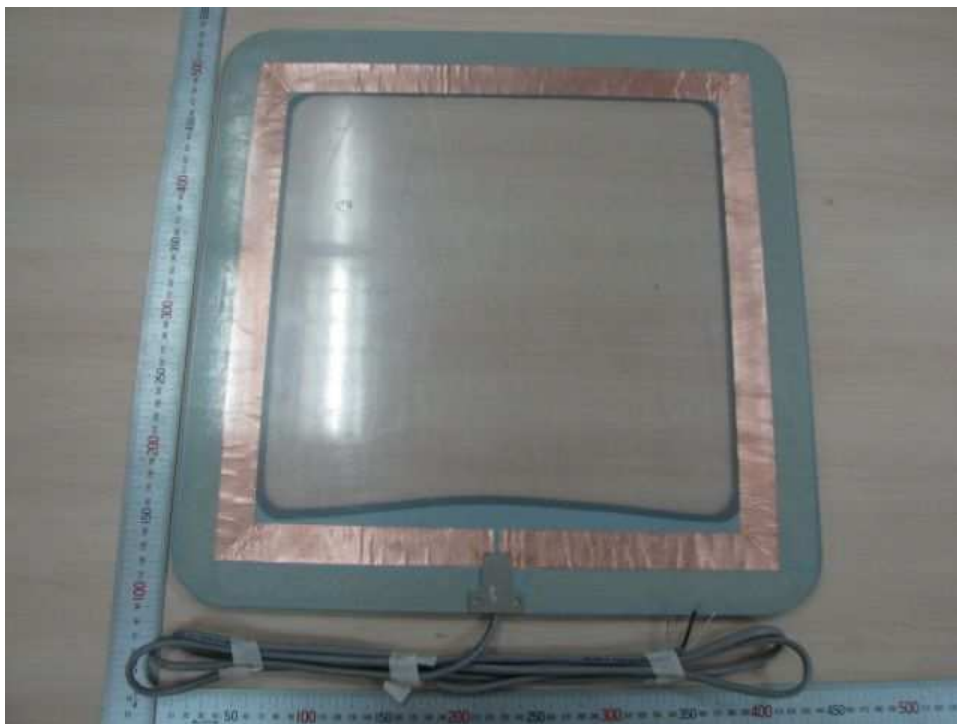Top view



Bottom view


Photograph 2: Photograph of the adaptor



Photograph 3: Set-up for conducted emission




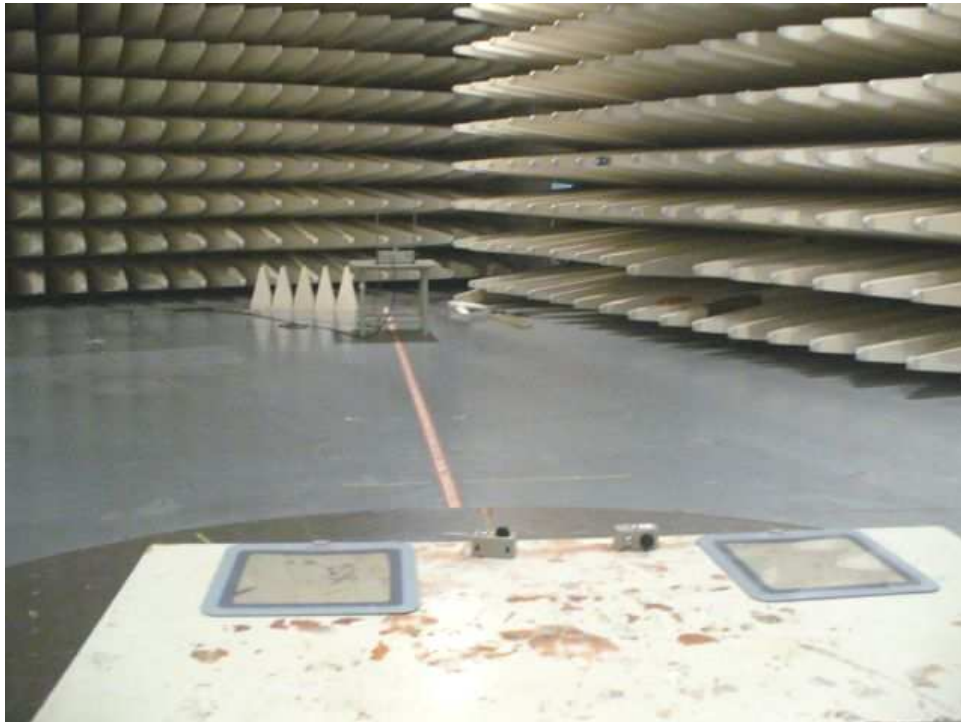Photograph 4: Set-up for radiated emission (9kHz - 30MHz)



9kHz - 30MHz

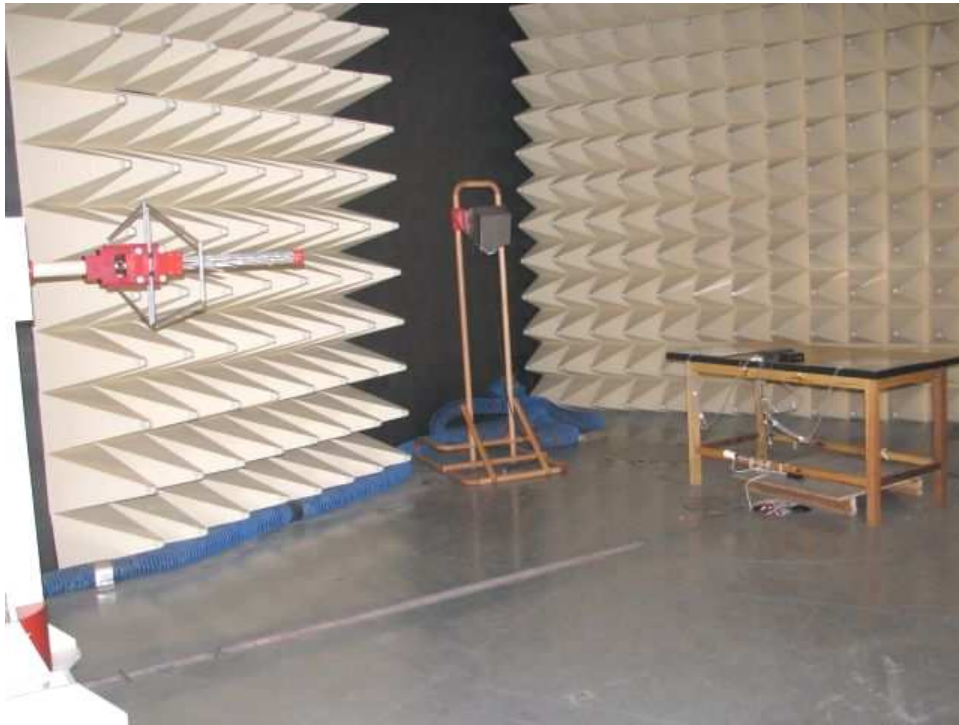Photograph 5: Set-up for radiated emission (30 - 1000MHz)



6 List of Tables

Table 1: List of test and measurement equipment.....	4
Table 2: Radiated emission results, 9kHz - 30MHz, Peak	13
Table 3: Radiated emission results, 30MHz - 1GHz, Quasi-peak.....	14

7 List of Figures

Figure 1: Spectral diagram, conducted emission, 150kHz - 30MHz, L	10
Figure 2: Spectral diagram, conducted emission, 150kHz - 30MHz, N.....	11

8 List of Photographs

Photograph 1: Photographs of the 17.3 inches antenna.....	15
Photograph 2: Photograph of the adaptor.....	16
Photograph 3: Set-up for conducted emission.....	16
Photograph 4: Set-up for radiated emission (9kHz - 30MHz)	17
Photograph 5: Set-up for radiated emission (30 - 1000MHz)	18