



FCC TEST REPORT

REPORT NO.: RF901211R04

MODEL NO.: TR-11AV

T-11AV

R-11AV

RECEIVED: Dec. 11, 2001

TESTED: Dec. 28, 2001 ~ Jan. 4, 2002

APPLICANT: JEBSEE ELECTRONICS CO., LTD.

ADDRESS: 24-3, Sin-Lo Road, P.O. Box 57, Tainan Taiwan

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chia Pau Tsuen, Linkou Hsiang, Taipei, Taiwan, R.O.C.

This test report consists of 30 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by NVLAP or any U.S. government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA

NVLAP®

Lab Code: 200102-0

Table of Contents

1	CERTIFICATION	3
2	SUMMARY OF TEST RESULTS.....	4
3	GENERAL INFORMATION	5
3.1	GENERAL DESCRIPTION OF EUT	5
3.2	DESCRIPTION OF TEST MODES	6
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	6
3.4	DESCRIPTION OF SUPPORT UNITS	6
4	TEST PROCEDURE AND RESULT	7
4.1	CONDUCTED EMISSION MEASUREMENT.....	7
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	7
4.1.2	TEST INSTRUMENTS.....	7
4.1.3	TEST PROCEDURES	7
4.1.4	TEST SETUP.....	8
4.1.5	EUT OPERATING CONDITIONS	9
4.1.6	TEST RESULTS	10
4.2	RADIATED EMISSION MEASUREMENT	16
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	16
4.2.2	TEST INSTRUMENT	17
4.2.3	TEST PROCEDURE.....	18
4.2.4	TEST SETUP.....	19
4.2.5	EUT OPERATING CONDITION.....	19
4.2.6	TEST RESULT	20
5.1	BAND EDGES MEASUREMENT	24
5.1.1	LIMITS OF BAND EDGES MEASUREMENT	24
5.1.2	TEST INSTRUMENTS.....	24
5.1.3	TEST PROCEDURE.....	24
5.1.4	EUT OPERATING CONDITION.....	25
5.1.5	TEST RESULTS	25
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	28
6	INFORMATION ON THE TESTING LABORATORIES	30



1 CERTIFICATION

PRODUCT : 2.4 GHz Wireless A/V Sender
BRAND NAME : JEBSEE
MODEL NO : TR-11AV
T-11AV
R-11AV
APPLICANT : JEBSEE ELECTRONICS CO., LTD.
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.249),
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Dec. 28, 2001 to Jan. 4, 2002. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

TESTED BY: Gary Chang, DATE: Jan. 8, 2002
Gary Chang

CHECKED BY: Demi Chen, DATE: Jan. 8, 2002
Demi Chen

APPROVED BY: Alan Lane, DATE: Jan. 8, 2002
Dr. Alan Lane
Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
STANDARD PARAGRAPH	TEST TYPE	RESULT	REMARK
15.207	Conducted Emission Test	PASS	Minimum passing margin is -17.32 dBuV at 25.361 MHz
15.209	Radiated Emission Test	PASS	Minimum passing margin is -3.40 dBuV at 7296.00 MHz
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

NOTE: The receiver part to communicate with the EUT has been verified to comply with FCC Part 15, Subpart B, Class B (DoC). The test report can be provided upon request.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	2.4 GHz Wireless A/V Sender
MODEL NO.	TR-11AV (for system model no.) T-11AV (for the set with 2.4GHz Tx and 433MHz Rx) R-11AV (for the set with 2.4GHz Rx and 433MHz Tx)
TESTING MODE	T-11AV
POWER SUPPLY	9VDC from power adapter
MODULATION TYPE	ASK
CARRIER FREQUENCY OF EACH CHANNEL	2414, 2432, 2450, 2468MHz
BANDWIDTH OF EACH CHANNEL	18MHz
NUMBER OF CHANNEL	4
ANTENNA TYPE	Inverted-F antenna
DATA CABLE	1.8m (Nonshielded)
I/O PORTS	AV port

NOTE:

1. The EUT (2.4GHz Wireless A/V Sender) include Transmitter part and Receiver part. The model no.: T-11AV is for transmitter which includes Tx of 2.4GHz application used for video signal transmitting and Rx of 433MHz application used for control signal transmitting and model no.: R-11AV is for receiver which includes Rx of 2.4GHz application and Tx of 433MHz application.
2. This test report is only for model: T-11AV.
3. The EUT was operated with the power adapter as following.

Brand Name :	DVE
Model No. :	DV-9300S
Input Power :	120VAC ~ 60Hz, 6W
Output Power :	9VDC, 300mA

4. For more detailed features description of the EUT, please refer to the manufacturer's specifications or the User's Manual.

3.2 DESCRIPTION OF TEST MODES

All channels are listed in the following table:

Channel	Frequency	Channel	Frequency
1	2414 MHz	2	2432 MHz
3	2450 MHz	4	2468 MHz

NOTE:

1. Below 1 GHz, the channel 1, 2, and 4 were pre-tested in chamber. Channel 1, the worst case, was chosen for the final test.
2. Above 1 GHz, the channel 1, 2, and 4 were tested individually.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is the transmitter part of a 2.4 GHz Wireless A/V Sender. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR 47 Part 15, Subpart C. (15.249)

ANSI C63.4 : 1992

All tests have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	COLOR VIDEO MONITOR	Matsushita	BT-H1390Y	EM9642280	VERIFICATION
2	VIDEO CASSETTE RECORDER	MITSUBISHI DIGITAL ELECTRONICS AMERICA, Inc	HS-U775	017552M	BGBHS-U795

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA

NOTE: All power cords of the above support units are non shielded (1.8m).

4 TEST PROCEDURE AND RESULT

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class B (dBuV)	
	Quasi-peak	Average
0.45 – 30	48	-

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	July 4, 2002
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	839135/006	July 3, 2002
* ROHDE & SCHWARZ 4-wire ISN	ENY41	838119/028	Dec. 2, 2002
* ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Dec. 2, 2002
EMCO-L.I.S.N. (for peripheral)	3825/2	9204-1964	July 3, 2002
Software	Cond-V2J	NA	NA
RF cable (JYEBAO)	RG-58A/U	Cable-C02.01	July 5, 2002
HP Terminator (For EMCO LISN)	11593A	E1-01-298	Feb. 20, 2002
HP Terminator (For EMCO LISN)	11593A	E1-01-299	Feb. 20, 2002
Shielded Room	Site 2	ADT-C02	NA
VCCI Site Registration No.	Site 2	C-240	NA

NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. **: These equipment are used for conducted telecom port test only (if tested).


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room

with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.

- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 450 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 TEST SETUP

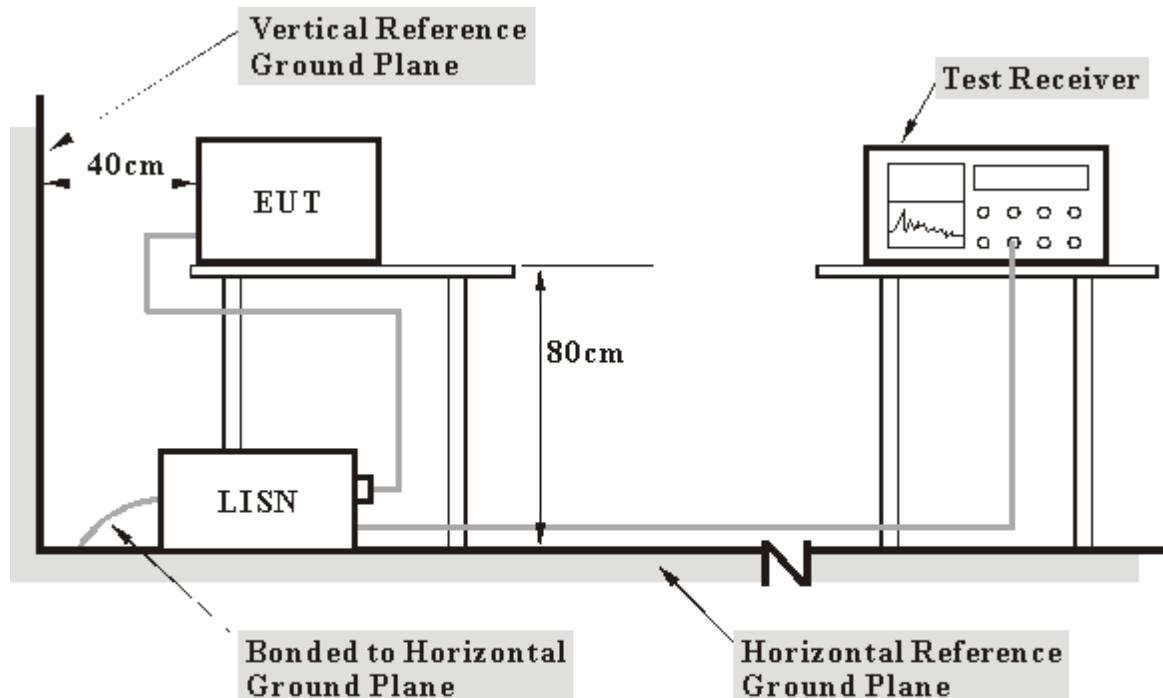

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.5 EUT OPERATING CONDITIONS

- a. Connected the EUT with a Video Cassette Recorder on the test report via A/V cable.
- b. Checked if the transmitter and the EUT were set at the same channel.
- c. The EUT received the signal from transmitter at specific channel and sent message to TV monitor.


4.1.6 TEST RESULTS

EUT	2.4 GHz Wireless A/V Sender	MODEL	TR-11AV
MODE	Channel 1	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60%RH, 1005 hPa		TESTED BY: James Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.461	0.10	26.10	-	26.20	-	48.00	-	-21.80	-
2	0.802	0.10	25.88	-	25.98	-	48.00	-	-22.02	-
3	1.881	0.10	13.80	-	13.90	-	48.00	-	-34.10	-
4	11.036	0.56	11.61	-	12.17	-	48.00	-	-35.83	-
5	25.361	1.11	29.57	-	30.68	-	48.00	-	-17.32	-
6	26.615	1.13	18.44	-	19.57	-	48.00	-	-28.43	-

NOTE:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

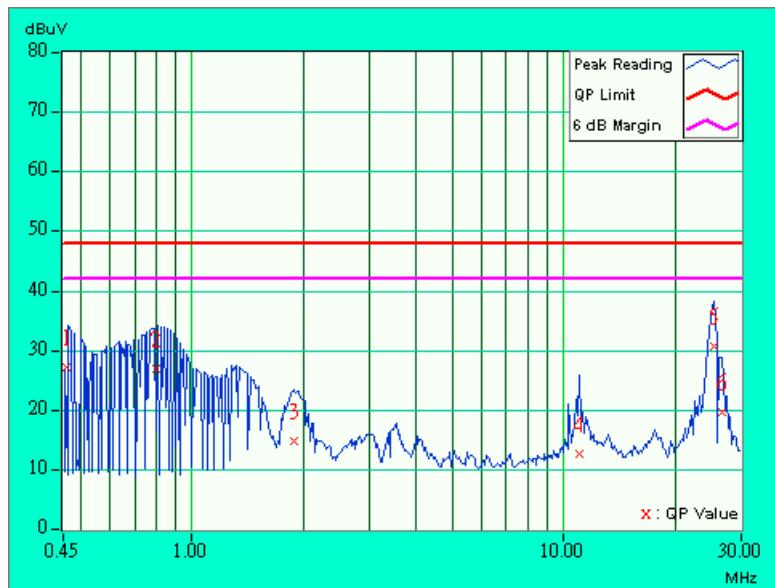


EUT	2.4 GHz Wireless A/V Sender	MODEL	TR-11AV
MODE	Channel 1	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60%RH, 1005 hPa		TESTED BY: James Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.468	0.10	19.99	-	20.09	-	48.00	-	-27.91	-
2	1.347	0.10	15.27	-	15.37	-	48.00	-	-32.63	-
3	1.834	0.10	9.08	-	9.18	-	48.00	-	-38.82	-
4	10.883	0.44	9.62	-	10.06	-	48.00	-	-37.94	-
5	25.667	0.91	28.29	-	29.20	-	48.00	-	-18.80	-
6	26.009	0.92	24.76	-	25.68	-	48.00	-	-22.32	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

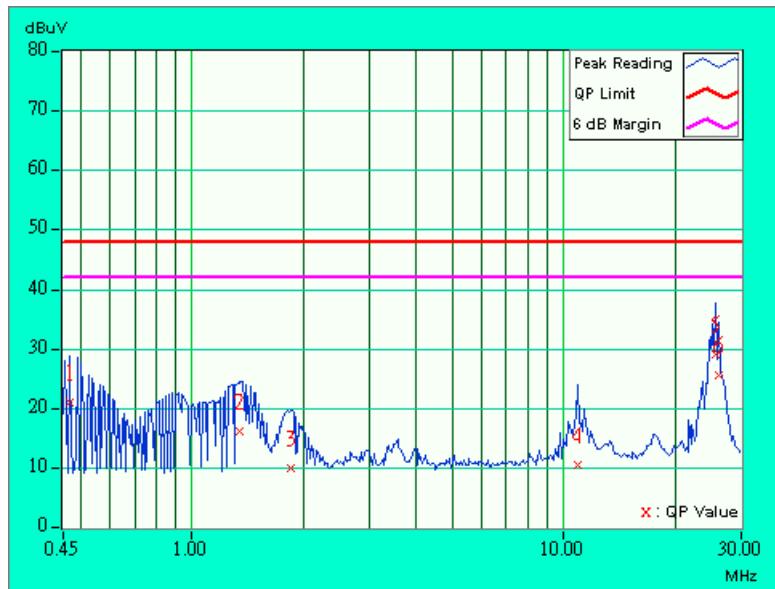


EUT	2.4 GHz Wireless A/V Sender	MODEL	TR-11AV
MODE	Channel 2	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60%RH, 1005 hPa		TESTED BY: James Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.450	0.10	26.20	-	26.30	-	48.00	-	-21.70	-
2	0.795	0.10	26.63	-	26.73	-	48.00	-	-21.27	-
3	1.335	0.10	18.31	-	18.41	-	48.00	-	-29.59	-
4	3.578	0.26	17.91	-	18.17	-	48.00	-	-29.83	-
5	10.685	0.54	11.14	-	11.68	-	48.00	-	-36.32	-
6	25.474	1.11	27.71	-	28.82	-	48.00	-	-19.18	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

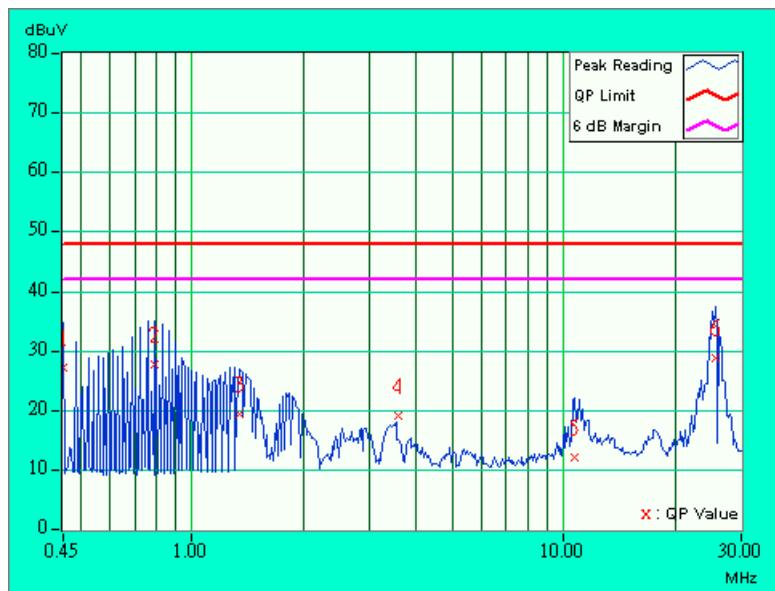


EUT	2.4 GHz Wireless A/V Sender	MODEL	TR-11AV
MODE	Channel 2	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60%RH, 1005 hPa		TESTED BY: James Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (Uv)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.474	0.10	20.05	-	20.15	-	48.00	-	-27.85	-
2	1.347	0.10	15.21	-	15.31	-	48.00	-	-32.69	-
3	1.707	0.10	8.17	-	8.27	-	48.00	-	-39.73	-
4	11.117	0.44	10.26	-	10.70	-	48.00	-	-37.30	-
5	25.691	0.91	28.94	-	29.85	-	48.00	-	-18.15	-
6	26.010	0.92	22.56	-	23.48	-	48.00	-	-24.52	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

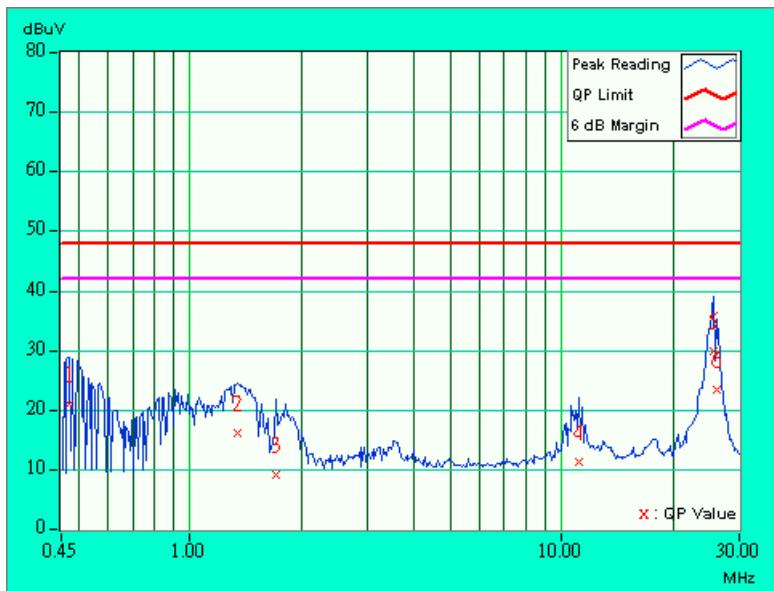


EUT	2.4 GHz Wireless A/V Sender	MODEL	TR-11AV
MODE	Channel 4	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60%RH, 1005 hPa		TESTED BY: James Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.465	0.10	24.45	-	24.55	-	48.00	-	-23.45	-
2	0.786	0.10	26.89	-	26.99	-	48.00	-	-21.01	-
3	1.290	0.10	18.50	-	18.60	-	48.00	-	-29.40	-
4	11.127	0.57	11.35	-	11.92	-	48.00	-	-36.08	-
5	25.472	1.11	30.94	-	32.05	-	48.00	-	-15.95	-
6	26.252	1.13	25.02	-	26.15	-	48.00	-	-21.85	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

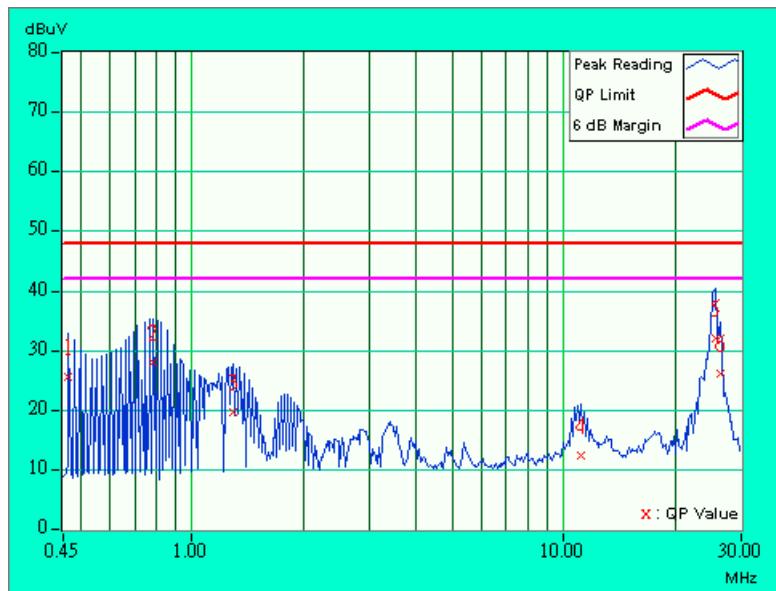


EUT	2.4 GHz Wireless A/V Sender	MODEL	TR-11AV
MODE	Channel 4	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60%RH, 1005 hPa		TESTED BY: James Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.471	0.10	19.55	-	19.65	-	48.00	-	-28.35	-
2	0.813	0.10	13.21	-	13.31	-	48.00	-	-34.69	-
3	1.347	0.10	15.37	-	15.47	-	48.00	-	-32.53	-
4	11.276	0.45	7.22	-	7.67	-	48.00	-	-40.33	-
5	24.704	0.89	25.15	-	26.04	-	48.00	-	-21.96	-
6	25.856	0.92	24.90	-	25.82	-	48.00	-	-22.18	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

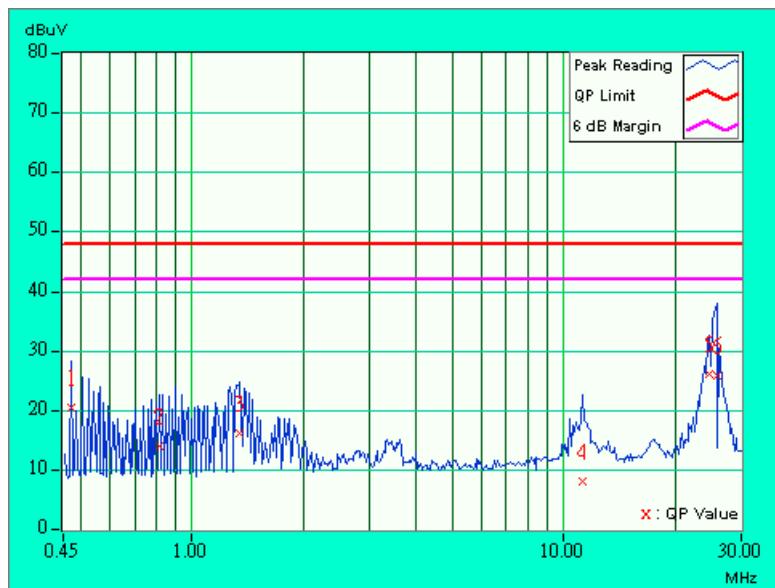

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

According to 15.249 the field strength of emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBuV/m)	
	Peak	Average
2400 – 2483.5	114	94

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Other Frequencies (MHz)	Field Strength of Fundamental	
	uV/meter	dBuV/meter
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENT

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8590L	3544A01176	May 7, 2002
* HP Preamplifier	8447D	2944A08485	May 7, 2002
* HP Preamplifier	8449B	3008A01201	Dec. 6, 2002
* HP Preamplifier	8449B	3008A01292	Aug. 21, 2002
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Jan. 25, 2002
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 23, 2002
* CHASE BILOG Antenna	CBL6112A	2221	Aug. 2, 2002
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	July 6, 2002
* EMCO Horn Antenna	3115	9312-4192	April 15, 2002
* EMCO Turn Table	1060	1115	NA
* SHOSHIN Tower	AP-4701	A6Y005	NA
* Software	AS61D4	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Aug. 2, 2002
* TIMES RF cable	LMR-600	CABLE-ST5-01	Aug. 2, 2002
* Antenna (Horn)	BBHA9120-D	D130	July 10, 2002
Open Field Test Site	Site 5	ADT-R05	July 28, 2002
VCCI Site Registration No.	Site 5	R-1039	NA
Site Registration No.	FCC: 90422 Canada IC: IC 3789 VCCI : R-1039		

NOTE:

1. The measurement uncertainty is less than +/- 3.0dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
3. “*” = These equipment are used for the final measurement.
4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz.


4.2.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

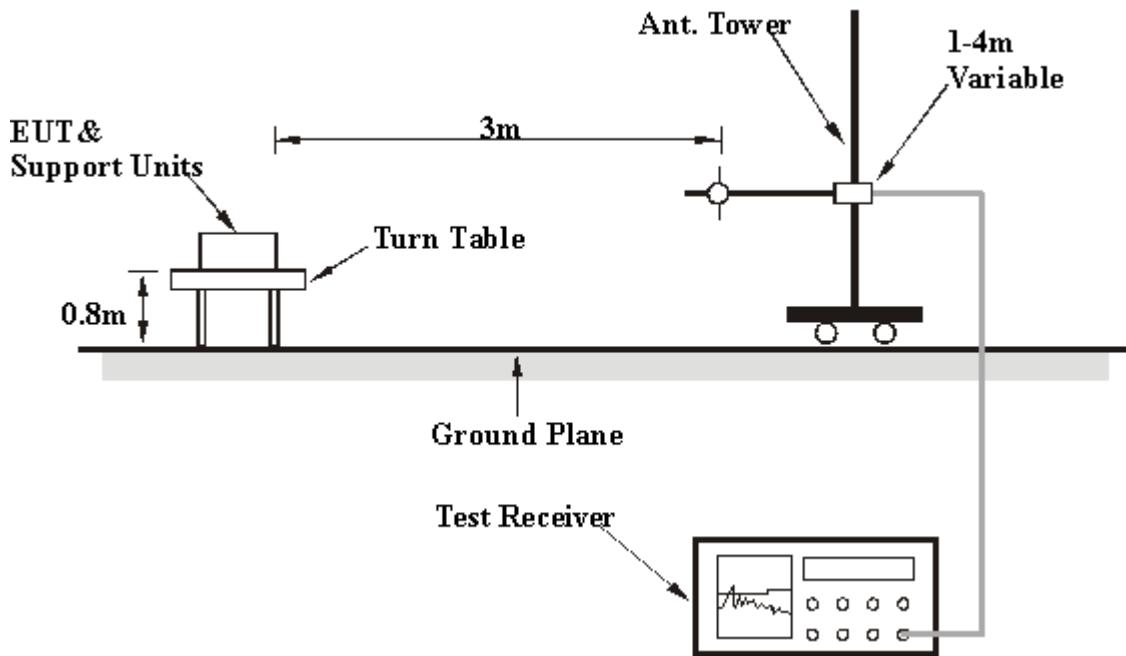

For the actual test configuration, please refer to the related item in this test report - Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITION

Same as item 4.1.5

4.2.6 TEST RESULT

EUT	2.4 GHz Wireless A/V Sender	MODEL	TR-11AV
FREQUENCY RANGE	30 – 1000 MHz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	TESTED BY: Gary Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	134.70	30.4 QP	43.50	-13.10	1.14H	117	18.20	11.06	1.14	0.00	-12.19
2	151.60	28.4 QP	43.50	-15.10	1.26H	175	17.00	10.16	1.22	0.00	-11.38
3	168.20	28.8 QP	43.50	-14.70	1.34H	226	18.20	9.35	1.30	0.00	-10.66
4	195.60	27.4 QP	43.50	-16.10	1.11H	289	17.00	8.96	1.40	0.00	-10.37
5	243.50	31.2 QP	46.00	-14.80	1.06H	340	18.00	11.56	1.63	0.00	-13.19
6	272.50	32.4 QP	46.00	-13.60	1.27H	323	18.10	12.53	1.72	0.00	-14.26

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	121.40	29.7 QP	43.50	-13.80	1.69V	171	17.00	11.58	1.09	0.00	-12.67
2	160.40	28.9 QP	43.50	-14.60	1.47V	249	18.00	9.62	1.26	0.00	-10.90
3	195.40	29.4 QP	43.50	-14.10	1.08V	136	19.00	8.96	1.40	0.00	-10.37
4	213.40	29.5 QP	43.50	-14.00	1.09V	280	18.20	9.83	1.49	0.00	-11.33
5	244.70	30.3 QP	46.00	-15.70	1.34V	316	17.00	11.70	1.64	0.00	-13.34
6	256.70	31.0 QP	46.00	-15.00	1.15V	200	16.80	12.56	1.68	0.00	-14.23

NOTE:

1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
2. Correction Factor(dB) = Pre-Amplifier Factor (dB) - Antenna Factor (dB) - Cable Factor (dB)
3. Pre-Amplifier Factor (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
4. The other emission levels were very low against the limit.
5. Margin value = Emission level – Limit value.

EUT		2.4 GHz Wireless A/V Sender	MODEL	TR-11AV
			FREQUENCY RANGE	Above 1 GHz
MODE		Channel 1	DETECTOR FUNCTION	Peak / Average
ENVIRONMENTAL CONDITIONS		20 deg. C, 70 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2415.00	87.2 PK	114.00	-26.80	1.59H	44	55.00	27.11	5.10	0.00	-32.21
2	*2415.00	86.8 AV	94.00	-7.20	1.59H	44	54.60	27.11	5.10	0.00	-32.21
3	4828.00	52.7 PK	74.00	-21.30	2.24H	309	48.70	31.43	7.23	34.63	-4.02
4	7242.00	50.4 AV	54.00	-3.60	1.74H	31	39.80	36.09	9.24	34.70	-10.64
5	7242.00	55.6 PK	74.00	-18.40	1.74H	31	45.00	36.09	9.24	34.70	-10.64.

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2415.00	91.0 PK	114.00	-23.00	1.02V	358	58.80	27.11	5.10	0.00	-32.21
2	*2415.00	90.4 AV	94.00	-3.60	1.02V	358	58.16	27.11	5.10	0.00	-32.21
3	4828.00	48.0 PK	74.00	-26.00	1.66V	5	44.00	31.43	7.23	34.63	-4.02
4	7242.00	50.4 AV	54.00	-3.60	1.25V	344	39.80	36.09	9.24	34.70	-10.64
5	7242.00	54.6 PK	74.00	-19.40	1.66V	236	44.00	36.09	9.24	34.70	-10.64.

NOTE:

1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
2. Correction Factor(dB) = Pre-Amplifier Factor (dB) - Antenna Factor (dB) - Cable Factor (dB)
3. Pre-Amplifier Factor (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
4. The other emission levels were very low against the limit.
5. Margin value = Emission level – Limit value.
6. “*” = Fundamental frequency

EUT		2.4 GHz Wireless A/V Sender	MODEL	TR-11AV
			FREQUENCY RANGE	Above 1 GHz
MODE		Channel 2	DETECTOR FUNCTION	Peak / Average
ENVIRONMENTAL CONDITIONS		20 deg. C, 70 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2432.10	86.7 PK	114.00	-27.30	1.61H	66	54.30	27.33	5.08	0.00	-32.40
2	*2432.10	86.2 AV	94.00	-7.80	1.61H	66	53.80	27.33	5.08	0.00	-32.40
3	4864.00	51.1 PK	74.00	-22.90	1.63H	200	47.00	31.47	7.21	34.63	-4.05
4	7296.00	54.4 PK	74.00	-19.60	1.63H	47	43.70	36.18	9.28	34.72	-10.75
5	7296.00	49.4 AV	54.00	-4.60	1.63H	47	38.70	36.18	9.28	34.72	-10.75

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2432.10	89.4 PK	114.00	-24.60	1.05V	323	57.00	27.33	5.08	0.00	-32.40
2	*2432.10	89.0 AV	94.00	-5.00	1.05V	323	56.63	27.33	5.08	0.00	-32.40
3	4864.00	51.5 PK	74.00	-22.50	1.00V	8	47.40	31.47	7.21	34.63	-4.05
4	7296.00	54.1 PK	74.00	-19.90	1.46V	354	43.40	36.18	9.28	34.72	-10.75
5	7296.00	50.6 AV	54.00	-3.40	1.46V	354	39.86	36.18	9.28	34.72	-10.75

NOTE:

1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
2. Correction Factor(dB) = Pre-Amplifier Factor (dB) - Antenna Factor (dB) - Cable Factor (dB)
3. Pre-Amplifier Factor (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
4. The other emission levels were very low against the limit.
5. Margin value = Emission level – Limit value.
6. “*” = Fundamental frequency

EUT		2.4 GHz Wireless A/V Sender		MODEL		TR-11AV			
MODE		Channel 4		FREQUENCY RANGE		Above 1 GHz			
ENVIRONMENTAL CONDITIONS		20 deg. C, 70 % RH, 1050 hPa		TESTED BY: Gary Chang					

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2468.10	86.5 PK	114.00	-27.50	1.12H	355	53.90	27.54	5.06	0.00	-32.59
2	*2468.10	86.1 AV	94.00	-7.90	1.12H	355	53.50	27.54	5.06	0.00	-32.59
3	4936.20	53.2 PK	54.00	-20.80	1.78H	35	49.00	31.55	7.26	34.61	-4.21
4	4936.20	46.3 AV	54.00	-7.70	1.78H	35	42.12	31.55	7.26	34.61	-4.21
5	7404.00	51.9 PK	74.00	-22.10	1.60H	357	41.00	36.43	9.28	34.77	-10.95
6	7404.00	47.1 AV	54.00	-6.90	1.60H	357	36.20	36.43	9.28	34.77	-10.95

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2468.10	88.8 PK	114.00	-25.20	1.01V	60	56.20	27.54	5.06	0.00	-32.59
2	*2468.10	88.4 AV	94.00	-5.60	1.01V	60	55.80	27.54	5.06	0.00	-32.59
3	4936.00	52.2 PK	74.00	-21.80	1.32V	319	48.00	31.55	7.26	34.61	-4.21
4	7404.00	54.5 PK	74.00	-19.50	1.42V	19	43.60	36.43	9.28	34.77	-10.95
5	7404.00	49.3 AV	54.00	-4.70	1.42V	19	38.40	36.43	9.28	34.77	-10.95

NOTE:

1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
2. Correction Factor(dB) = Pre-Amplifier Factor (dB) - Antenna Factor (dB) - Cable Factor (dB)
3. Pre-Amplifier Factor (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
4. The other emission levels were very low against the limit.
5. Margin value = Emission level – Limit value.
6. “*” = Fundamental frequency



5.1 BAND EDGES MEASUREMENT

5.1.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

5.1.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 17, 2002

NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.1.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.


5.1.4 EUT OPERATING CONDITION

Same as Item 3.4.5

5.1.5 TEST RESULTS

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.249(C).

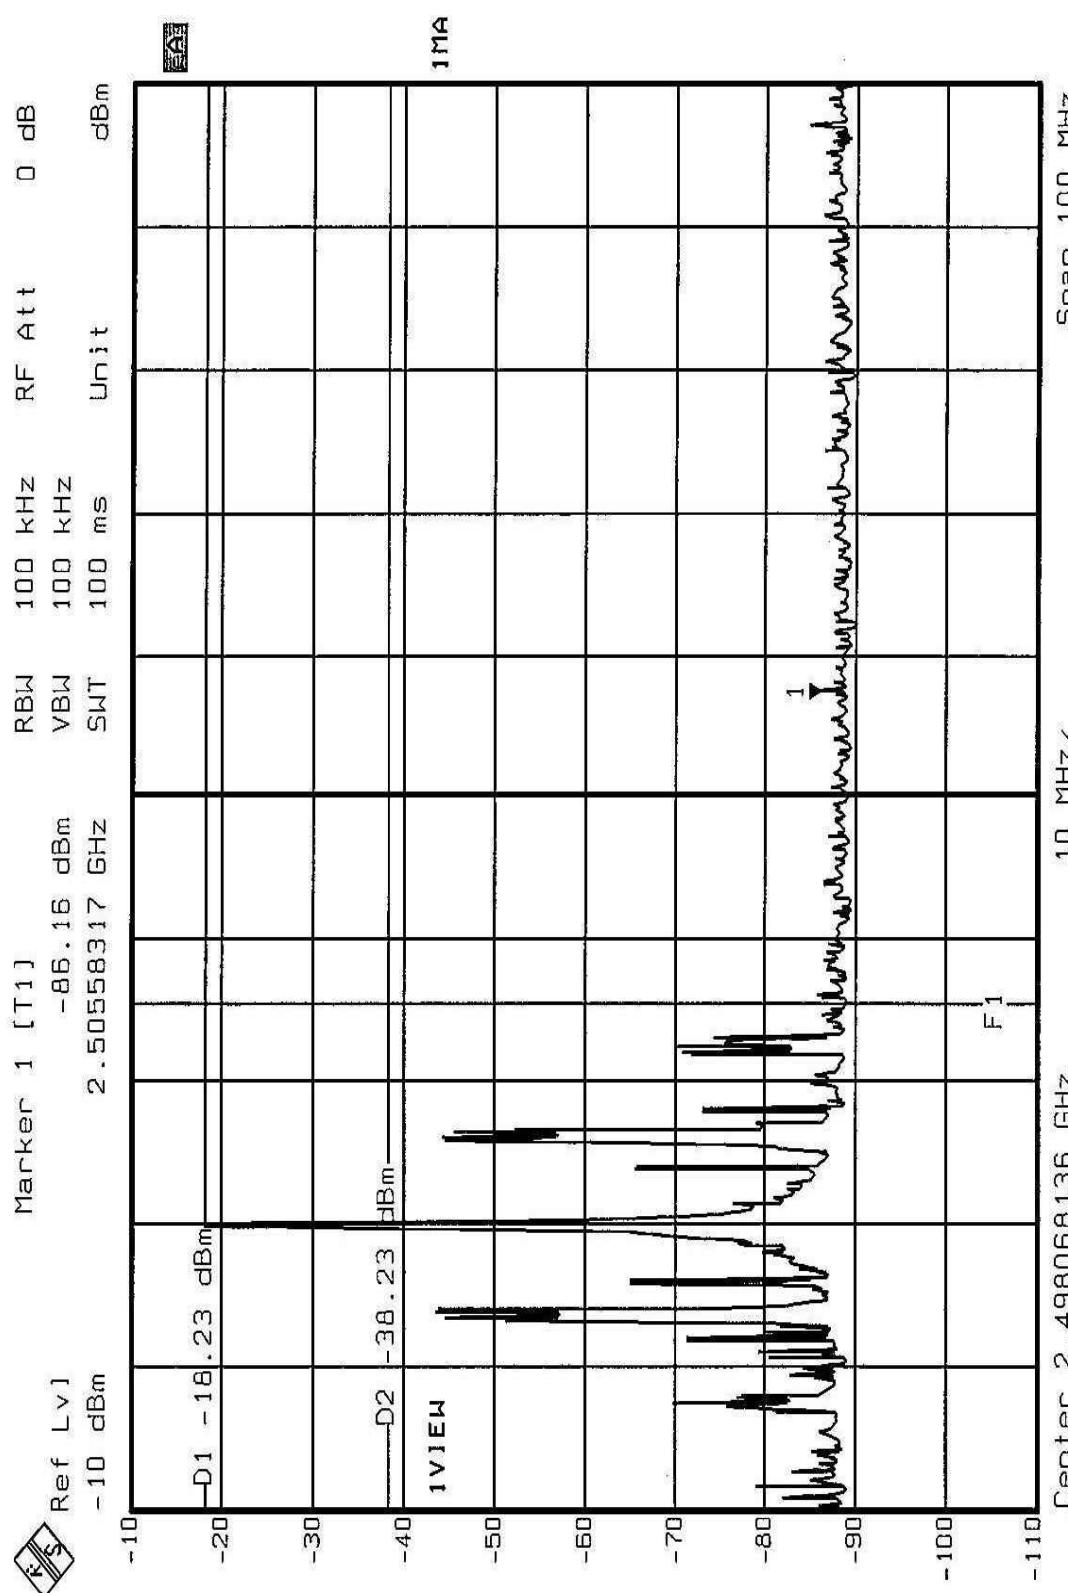

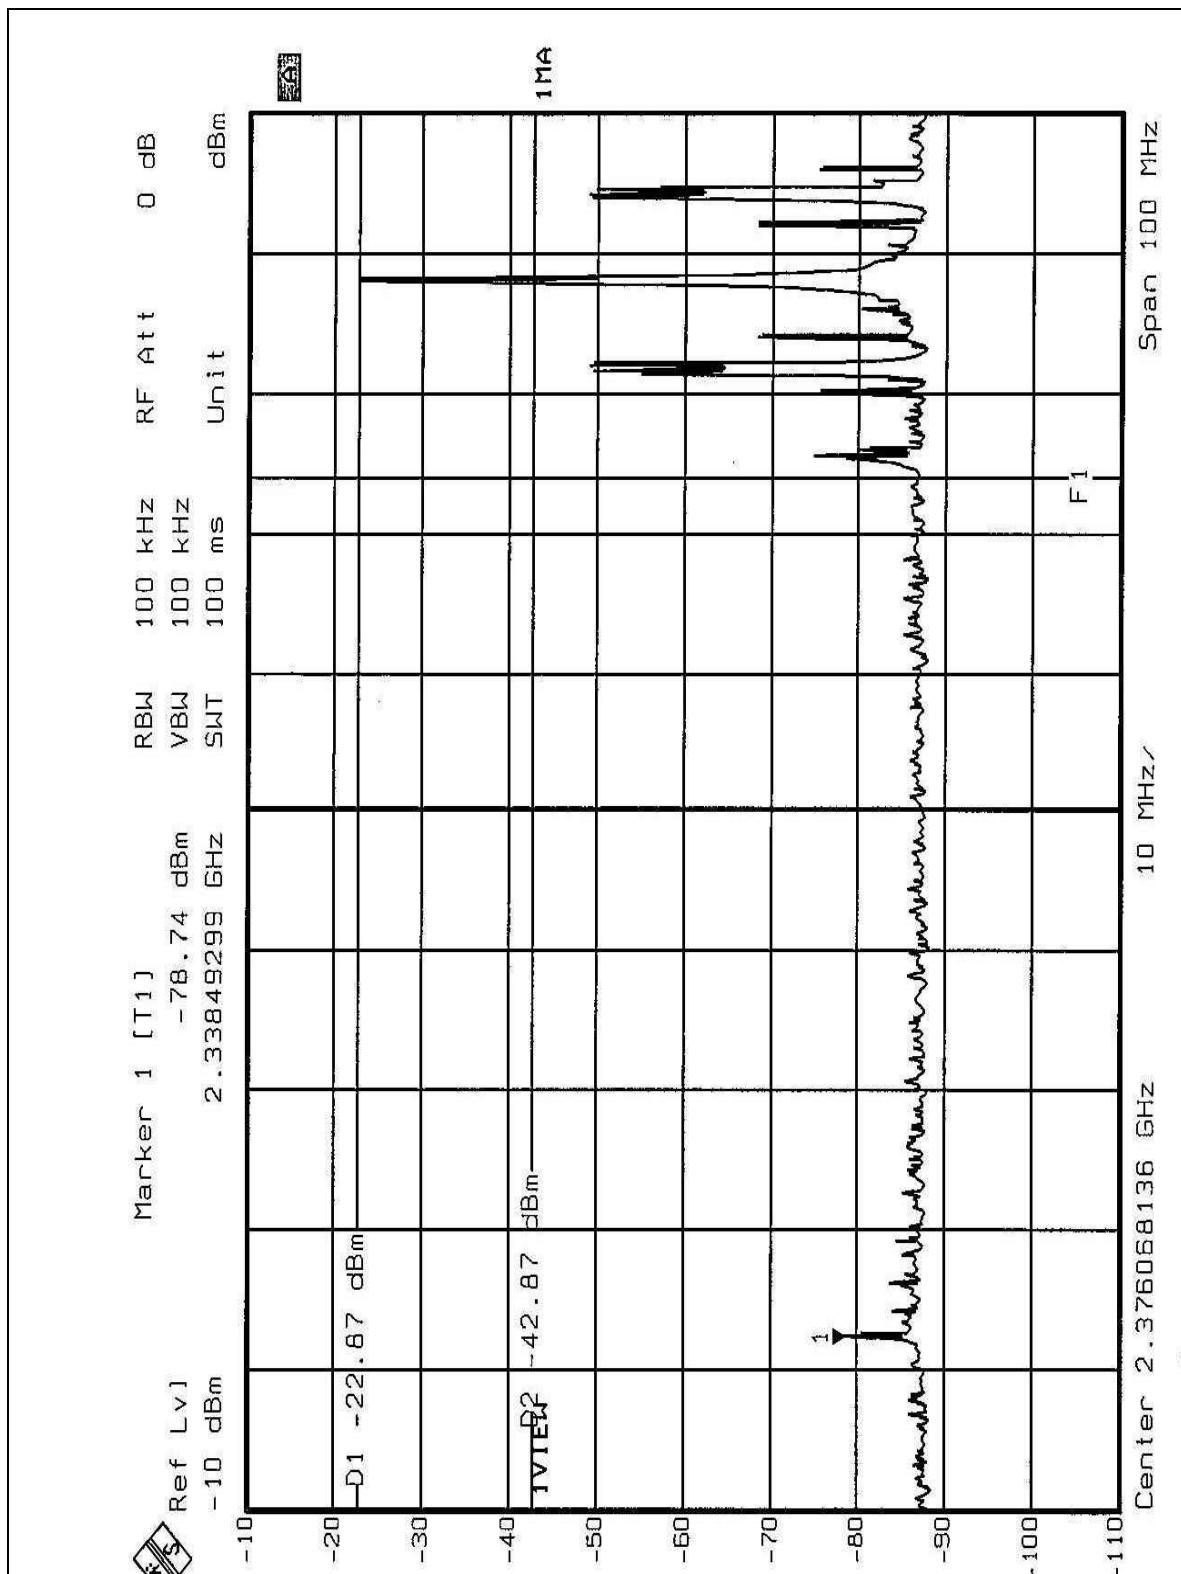

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST





6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:
Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC Lab:
Tel: 886-35-935343
Fax: 886-35-935342

Lin Kou Safety Lab:
Tel: 886-2-26093195
Fax: 886-2-26093184

Lin Kou RF&Telecom Lab:
Tel: 886-3-3270910
Fax: 886-3-3270892

Email: service@mail.adt.com.tw
Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.