

5

10

15

20

25

PART NO:

REV

REF

DESCRIPTION

AUTH

DATE

A

7. 附菲林

8. 承認時,須附供應商環保材質測試證明.

a) 銅版紙、印刷油墨、透明龍

下述四種禁用物質含量必須<100ppm

- 1) 鎘、鎘化合物 Cadmium and cadmium compounds
- 2) 鉛、鉛化合物 Lead and lead compounds
- 3) 梅、汞化合物 Mercury and mercury compounds
- 4) 六價鉻化合物 Hexavalent chromium compounds

b) 透明龍下述兩種禁用物質

請依禁用物質管理作業程序 E3101 要求標準檢測

- 1) 多溴聯苯 Polybrominated biphenyls (PBB)
- 2) 多溴二苯醚 Polybrominated diphenylethers (PBDE)

7. 需做高低溫測試:


溫+65°C ± 2°C、低溫-20°C ± 2°C、濕度90%~95%各8小時,
 執行一個循環,測試結束,須在室溫中放置1小時後,油墨不會脫落、
 標貼材質不會起泡、變形、邊緣翹起,背膠須平貼於膠盒強黏性.
 測試時,溫度、溼度必須在上述標準值內取一固定值去測試.

6. 請注意標貼黏貼處表面,不可有油質、灰塵、水、

脫模劑等其他污染,均必須事先用溶劑,擦拭並清除

乾淨,以確保背膠須平貼於膠盒強黏性.

1. 文字內容編排方式如圖所示

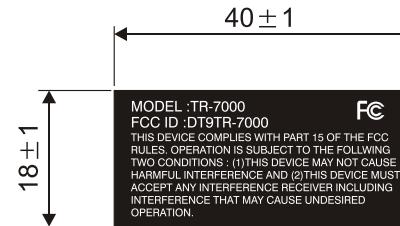

B

C

1. Marked "◎" must be recorded SPC. & MSA. and CPK. ≥ 1.67 is required. 2. Marked "*" must be recorded DR. (Dimension Result) 3. Without any marked is not required records.	STANDARD TOLERANCE LIMITS UNLESS OTHER SPECIFIED.			NAME	DATE	MATERIAL	THIRD ANGLE PROJECTION	JEBSEE ELECTRONICS CO., LTD.			
	RANGE	TOLERANCE	DRN BY	蔡佩宜	2006/02/22						
		A ✓ B	DSN BY								
	> 0~6	± 0.08	± 0.14			FINISH	UNIT:m / m	CAVITY			
	> 6~30	± 0.1	± 0.2	CHK BY							
	> 30~120	± 0.2	± 0.3								
	> 120~300	± 0.3	± 0.4	APPD BY							
	> 300~600	± 0.4	± 0.5	TITLE					FCC標貼		
	> 600~1200	± 0.5	± 0.6	REV					1		

1. Do not scale print

2. Must submit samples for approval before proceeding with production.

