

This drawing shall not be used, reproduced or passed on in any way, in full or in part, without SOMFY written approval. All rights reserved

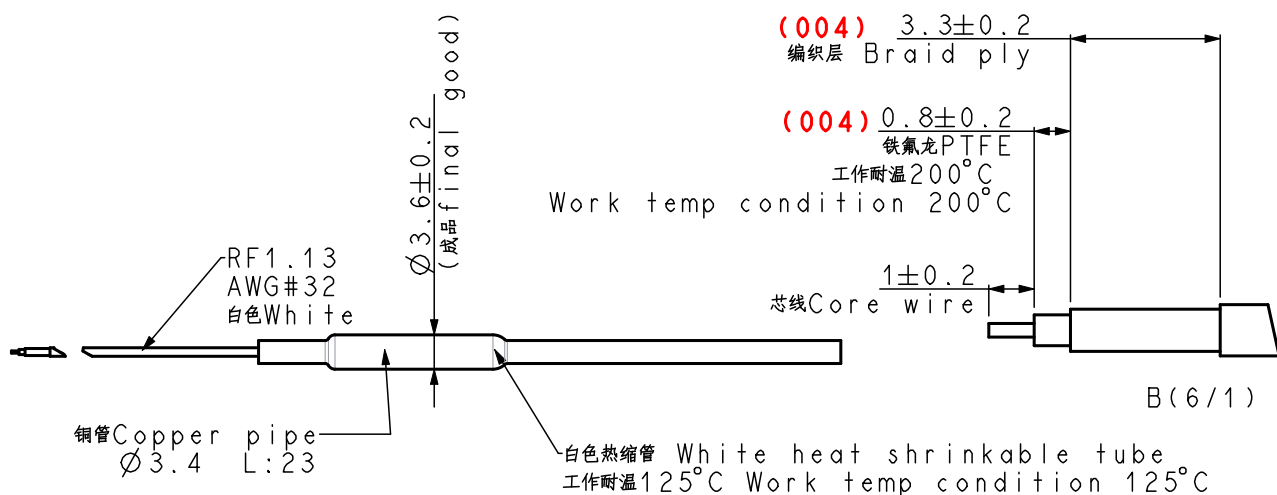
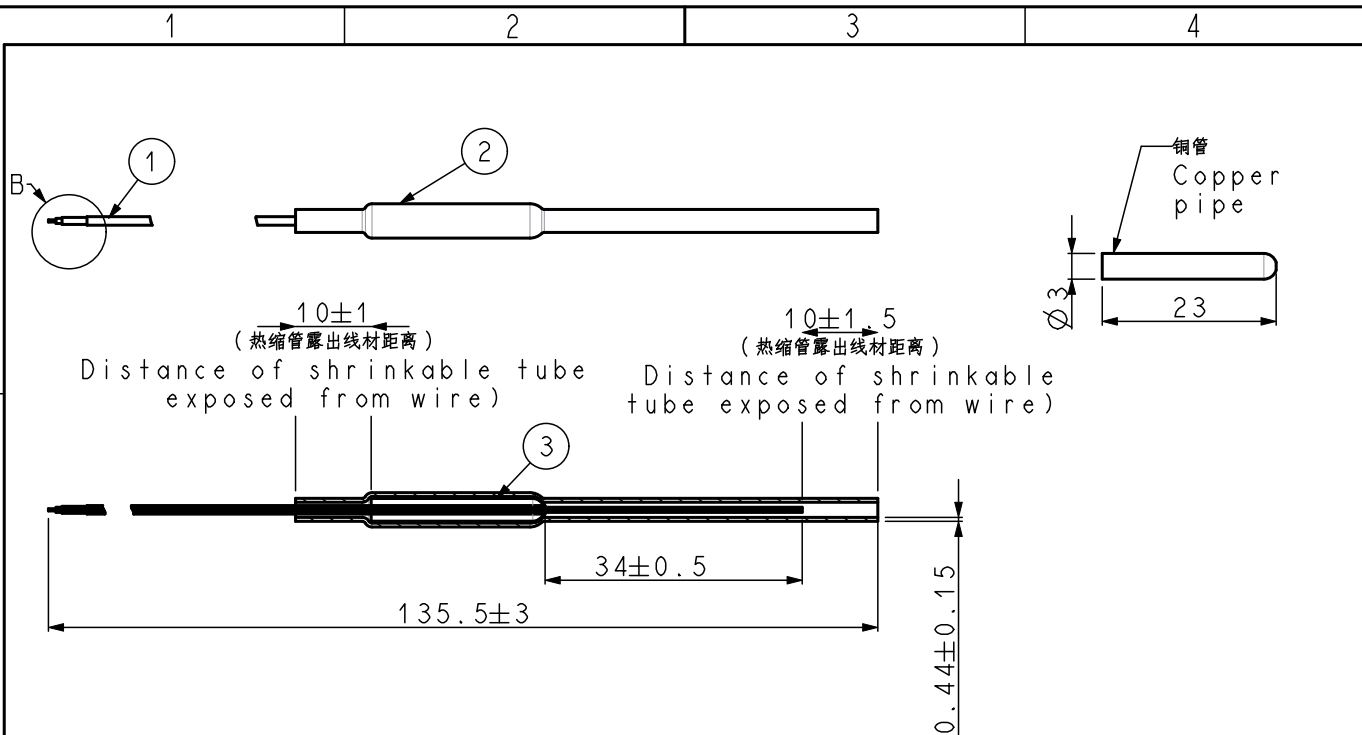


Table-Electrical parameters
Ta=25°C unless otherwise specified

| Symbol | Parameter/Description | Conditions | Minimum | Typical | Maximum | Unit |
|--------|-----------------------------|------------|---------|---------|---------|------|
| Frq | Frequency | NA | 2400 | 2400 | 2483 | MHz |
| Gain | Antenna gain | NA | 1 | 1.5 | 2 | dBi |
| VSWR | Voltage Standing Wave Ratio | NA | 1 | 1.5 | 2 | NA |

The part shall not contain restricted substances according to the relevant European ROHS Directive

MISH : -

MATERIAL:

somfy

GENERAL AND GEOMETRIC TOLERANCES
IN ACCORDANCE WITH ISO 8015 ; ISO 1101 ;



Modified By:
LU Jun (luju01)

| REV | MODIFICATION DESCRIPTION | DATE | NAME |
|-----|---|----------|------|
| 004 | Modify 1to0.8,2to3.3 | 19/10/22 | LJ |
| 003 | Modify5 to 10±1.5, add34,0.44, cancel38,5±0.2to10 ± | 12/10/22 | LJ |
| 002 | Drawing standardization | 03/09/21 | LJ |
| 001 | change the antenna length 220 to 130 | 06/07/21 | LJ |

ARTICLE:

antenna@TLW25 zigbee

Scale: 1/5 GEO177513
N°: 5075083 A 004