



- REQUIREMENT NOTES:-**
1. ALL VOLTAGES ARE TYPICAL
  2. DC VOLTAGES SHOWN & ARE IN THE 10% TOLERANCE
  3. USE AN EARTH AS CL AND EXCESS PROBE
  4. ALL MEASUREMENTS F
  5. DC VOLTAGES SHOWN 125μ REP TUD TIME

- COMPONENTS:**
- RAUC2 14464
  - BC017
  - BC863
  - BC107
  - BC108
  - BC177
  - BC238
  - BC856
  - BC107
  - BC108
  - BC177
  - BC238
  - BC856

**RLL TOP VIEWS**



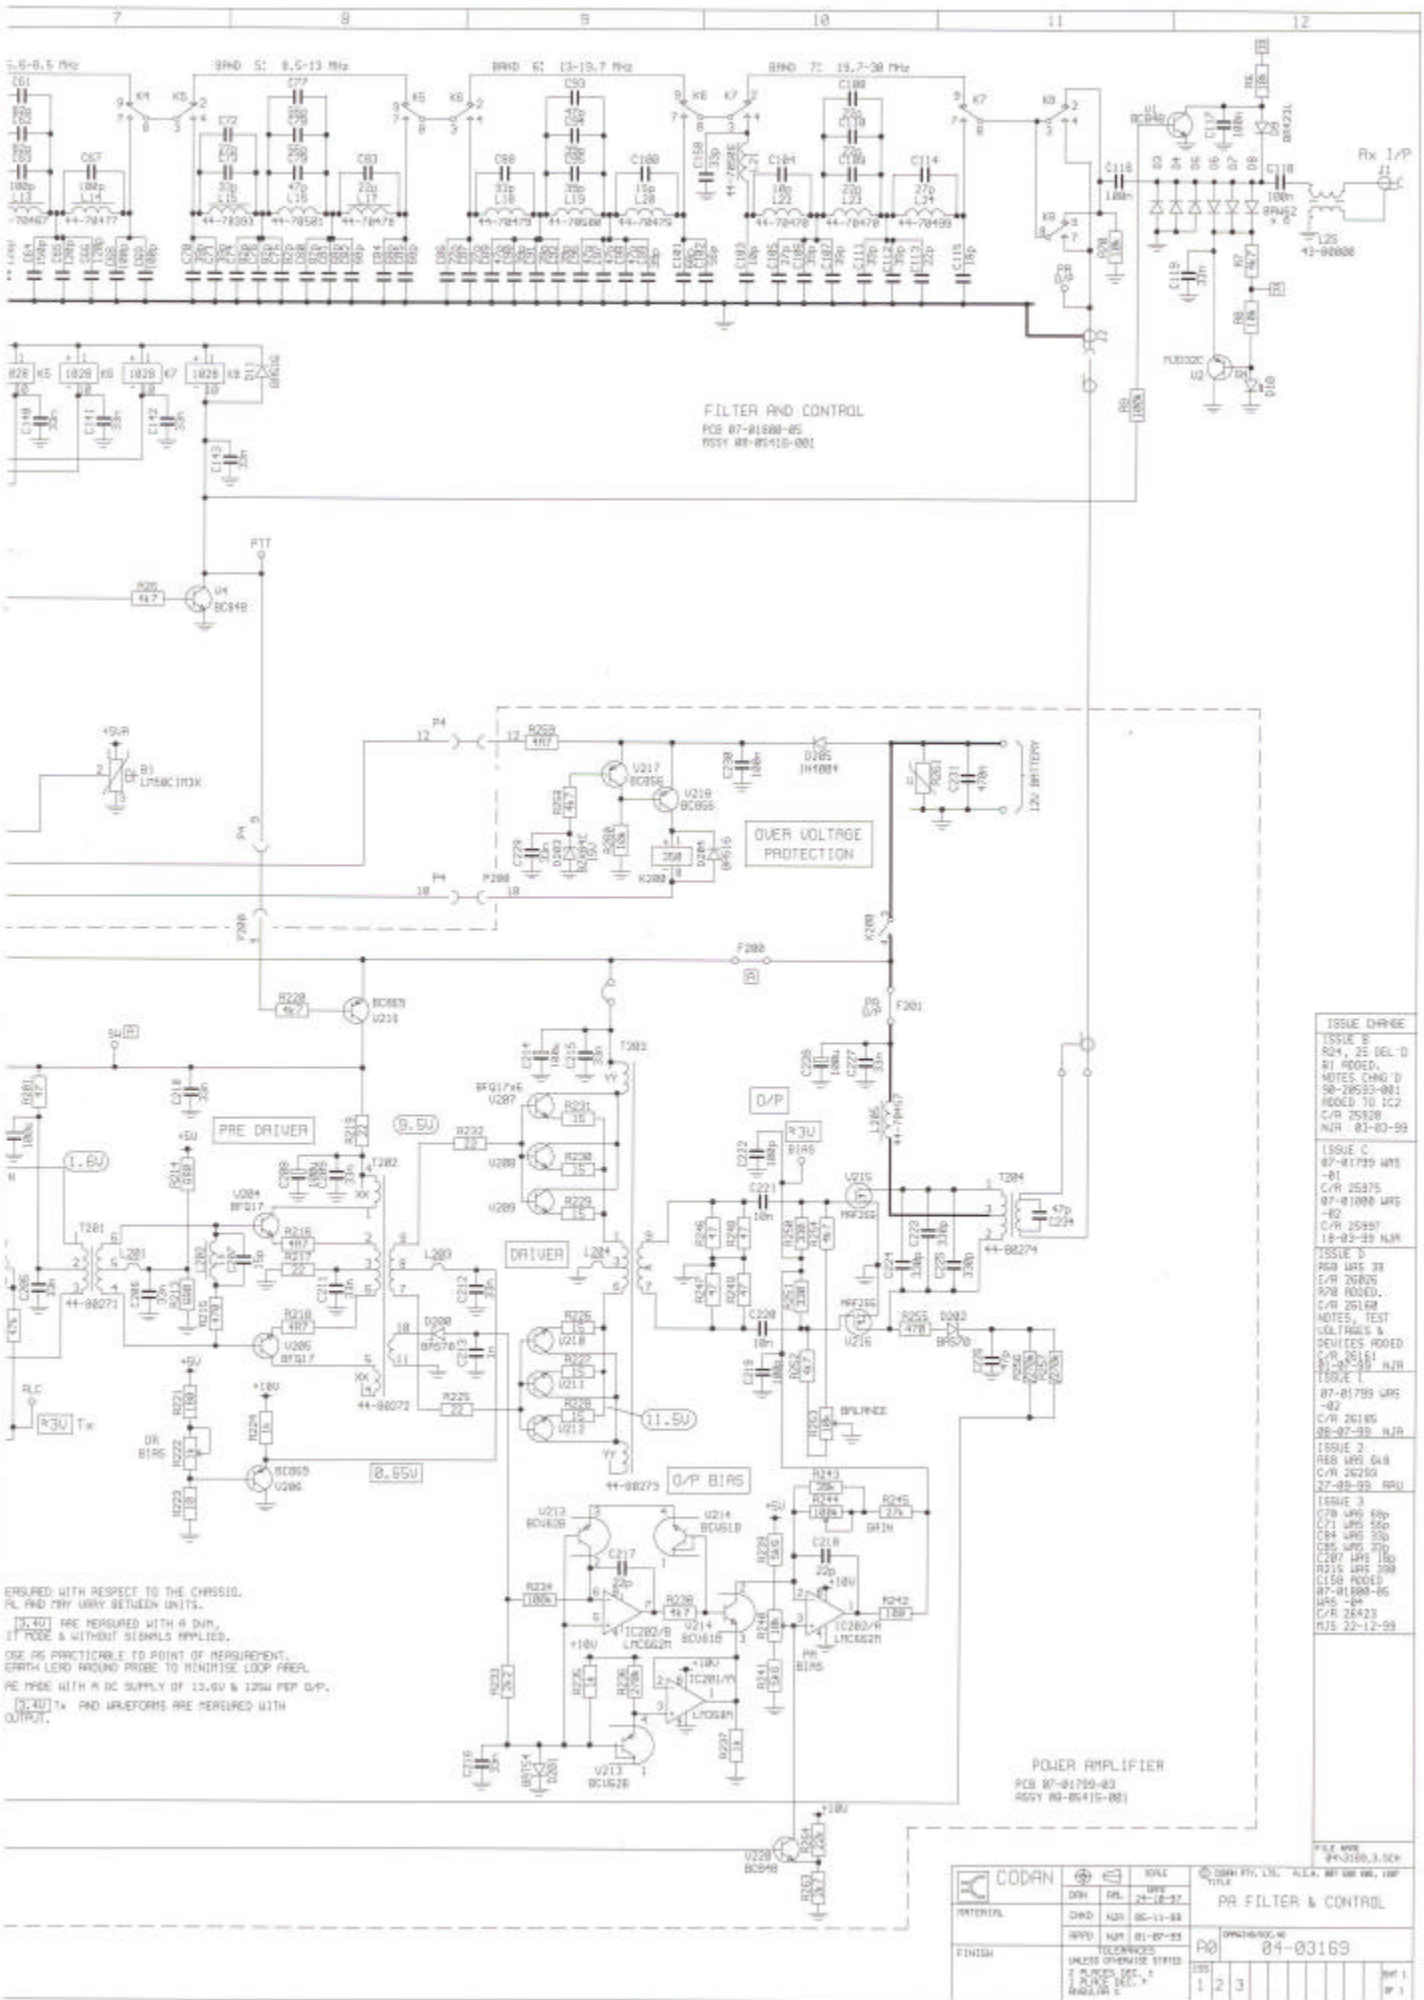

ENSURED WITH RESPECT TO THE CHASSIS.  
 RL AND RFL WARY BETWEEN UNITS.  
 [IC201] ARE REQUIRED WITH A DVM,  
 AT POWER & WITHOUT SIGNALS APPLIED.  
 USE AS PRACTICABLE TO POINT OF MEASUREMENT.  
 EARTH LEAD INCLUDING PROBE TO MINIMISE LOOP AREA.  
 RE POWER WITH A DC SUPPLY OF 13.5V & 125mA PEP DVP.  
 [IC201] AND WAVEFORMS ARE REQUIRED WITH  
 OUTPUT.

ISSUE B	R24, 25 DEL'D
R1	RODED.
NOTES	C40 TO
98-18535-81	RODED TO IC2
C/R	25828
N/R	81-80-99
ISSUE C	87-81739 WRS
-81	C/R 25875
87-81088 WRS	-82
C/R 25887	18-83-99 N/R
44-88274	
ISSUE D	R63 WRS TR
C/R 26026	R78 RODED.
C/R 26168	C/R 26168
NOTES, TEST	DEFINITIONS &
SERVICES RODED	C/R 26181
81-81-89 N/R	
ISSUE E	87-81739 WRS
-82	C/R 26185
88-87-99 N/R	
ISSUE F	R63 WRS 848
C/R 26256	27-82-99 88U
ISSUE G	C78 WRS 88p
C71 WRS 88p	
C84 WRS 330	
C85 WRS 330	
C87 WRS 180	
R115 WRS 330	
C158 RODED	
87-81888-85	
WRS -84	
C/R 26423	
R15 22-12-99	

		DATE 21-12-97	FILE NO 84-03169
PARTIAL REV 1	DATE 06-11-88	TITLE PA FILTER & CONTROL	REV 1
FINISH 1	REV 2	PARTIAL 3	REV 1