

Test Report

for

Electromagnetic Interference

of

E.U.T.: Wireless with Pots Adapter System

Trade Name: LOGITECH

Model Number: 5701

Prepared for

LOGITECH INC.

6505 Kaiser Dr. Fremont, CA 94555 USA

TEL: +1 (360) 8962000

FAX: +1 (360) 8962020

Prepared by

Interocean EMC Technology Corp.

No.5-2, Lin 1, Tin-Fu Tsun, Lin-Kou Hsiang,

Taipei County, Taiwan, R.O.C.

TEL. : +886 2 2600 6861

FAX. : +886 2 2600 6859

NVLAP LAB. Code: 200458-0

Caution :

1. This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.
2. No Single part of this report may be reproduced without written permission from Interocean EMC Technology Corp.
3. This test data is traceable to National or International Standards.

Table of Contents

1	General Information	5
1.1	Description of Equipment Under Test	5
1.2	Tested Supporting System Detail	6
1.3	Test Facility	7
2	Power Line Conducted Emission Measurement	8
2.1	Instrument	8
2.2	Block Diagram of Test Configuration	8
2.3	Conducted Limit	9
2.4	Instrument configuration	9
2.5	Measured Mode	9
2.6	Configuration of Measurement	9
2.7	Configuration of EUT	9
2.8	Test Result	10
3	Radiated Emission Measurement	15
3.1	Instrument (OATS 1)	15
3.2	Block Diagram of Test Configuration	15
3.3	Radiated Limit	16
3.4	Instrument configuration	16
3.5	Measured Mode	16
3.6	Configuration of Measurement	16
3.7	Configuration of EUT	16
3.8	Test Result	17
4	Frequency Measurements	22
4.1	Instrument	22
4.2	Measurement Operating Frequency	22
4.3	Measurement Frequency Stability vs. Temperature	22
4.4	Measurement Frequency Stability vs. Voltage	22
5	Occupied Bandwidth Measurements	24
5.1	Instrument	24
5.2	Instrument configuration	24
5.3	Result	24
6	Photographs of Measurement	26
6.1	Power Line Conducted Emission Measurement	26
6.2	Radiated Emission Measurement	27
7	Photographs of EUT	28

Appendix 1 – Power Line Conducted Test Data	34
Appendix 2 – Radiated Emission Test Data	36


Certification of Compliance

Applicant : LOGITECH INC.
Manufacturer : HONOR TONE LTD
EUT Description : Wireless with Pots Adapter System
Model No. : 5701
Serial No. : N/A
Tested Power Supply : 120Vac
Date of Final Test : August 09, 2001
Measurement Procedures and Standards Used :


- CFR 47, Part 15, Subpart C
- ANSI C63.4: 1992

The device described above was tested by Interocean EMC Technology Corporation to determine the maximum emission levels emanated from the device and severity levels of the device endure and its performance criterion. The measurement results are contained in this test report and Interocean EMC Technology Corp assumes full responsibility for the accuracy and completeness of these measurements. This report shows the EUT is technically compliant with the Part 15 subpart C and ANSI C63.4 official requirements. This report applies to the above sample only and shall not be reproduced in part without written approval of Interocean EMC Technology Corporation.

Report Issued: 2001-8-21

Test Engineer:  0821
2001
 Jason Wu

Checked:  0821
2001
 Tomy Hu

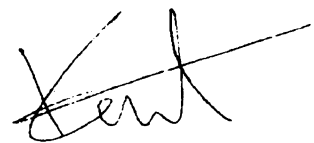Approved: 
 Kent J.K. Hsu

1 General Information

1.1 Description of Equipment Under Test

- Equipment Under Test** : Wireless with Pots Adapter System
- Model Number** : 5701
- Serial Number** : N/A
- Type of Sample Tested** : Proto-type, Pre-production, Mass Production
- Applicant** : LOGITECH INC.
6505 KAISER DR FREMONT, CA 94555, USA
- Manufacturer** : HONOR TONE LTD
Tung Mun Industrial Zone, Dan Shuizhen, Dongguan, Hui Yang Hsien,
Guangdong 516211, China
- Power Supply** : AC/DC Adapter, M/N: U090035D
Input: 120Vac, 60Hz, 8W
Output: 9Vdc, 350mA, Cable: Non-Shielded, Un-detachable, 1.8m
- Data Cable** : Signal Line & Audio Output, Non-Shielded, Un-detachable, 2m
- Date of Receipt of Sample** : July 20, 2001
- Date of Test** : July 31~August 09, 2001
- Description of E.U.T.** : The EUT is a cordless with Pots Adapter System. It is can be used to connect with both telephone and computer. It is can be free your hands. The cordless handset can make you without any limitation by the wire within the extended transmission range of the system. There are 10 free channels store in the EEPROM of the base unit. The channel frequency description as following:

Channel	Base Unit (MHz)
1	902.20
2	902.50
3	902.80
4	903.10
5	903.40
6	903.70
7	904.00
8	904.30
9	904.60
10	904.90

1.2 Tested Supporting System Detail

1.2.1 Walkman

Model Number : WP45
Serial Number : N/A
EMC Approved : N/A
Manufacturer : FRISTLINE

1.2.2 Speaker

Model Number : JS-5510
Serial Number : N/A
EMC Approved : FCC DoC, BSMI, CE EMC
Manufacturer : J-S

1.2.3 MIC/EARphone

Model Number : 126162
Serial Number : N/A
EMC Approved : N/A
Manufacturer : N/A

1.2.4 Telephone Set

Model Number : N/A
Serial Number : N/A
EMC Approved : N/A
Manufacturer : N/A

1.2.5 Remote Unit

Model Number : 8701
Serial Number : N/A
EMC Approved : FCC ID: DZL8701-1
Manufacturer : LOGITECH

1.3 Test Facility

- Site Description** : OATS 1 OATS 2
- Name of Firm** : Interocean EMC Technology Corp.
- Site Location** : No.5-2, Lin 1, Tin-Fu Tsun, Lin-Kou Hsiang,
Taipei County, Taiwan, R.O.C.
- Site Filing** :
 - Federal Communication Commissions – USA
Registration No.: 96399
 - Voluntary Control Council for Interference by Information Technology
Equipment (VCCI) – Japan
Registration No. (Conducted Room): C-1094
Registration No. (OATS 1): R-1040
Registration No. (OATS 2): R-1041
- Site Accreditation** :
 - Bureau of Standards and Metrology and Inspection (BSMI) – Taiwan, R.O.C.
Accreditation No.:
SL2-IN-E-0026 for CNS13438 / CISPR22
SL2-A1-E-0026 for CNS13783-1 / CISPR14
 - National Voluntary Laboratory Accreditation Program (NVLAP) - USA
Lab Code: 200458-0
 - NEMKO
ELA 181

1.3.1 Test Methodology

Both conducted and Radiated Emission Measurement was performed according to the procedures in ANSI C63.4-1992 and Part 15 subpart C. Radiated Emission Measurement was performed at 3 meters distance from antenna to EUT.

1.3.2 Measurement Uncertainty

The uncertainty is calculated in accordance with NAMAS document NIS 81.

Conducted Uncertainty $U_c = \pm 2.96\text{dB}$.

Radiated Uncertainty $U_c = \pm 3.67\text{dB}$.

2 Power Line Conducted Emission Measurement


2.1 Instrument

Instrument	Manufacturer	Model	Serial No.	Last Calibration
EMI Test Receiver	Rohde & Schwarz	ESCS 30	830245/027	2001/07/26
L.I.S.N.	Schwarzbeck	NNLK8121	8121417	2000/09/08
L.I.S.N.	Rohde & Schwarz	ESH3-Z5	829996/016	2001/06/15
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	830836/026	2001/07/29
RF Cable	IETC	CBL04	N/A	2000/10/11


Note: All instrument upon which need to calibrated are with calibration period of 1 year.

2.2 Block Diagram of Test Configuration

Configuration of Testing Setup

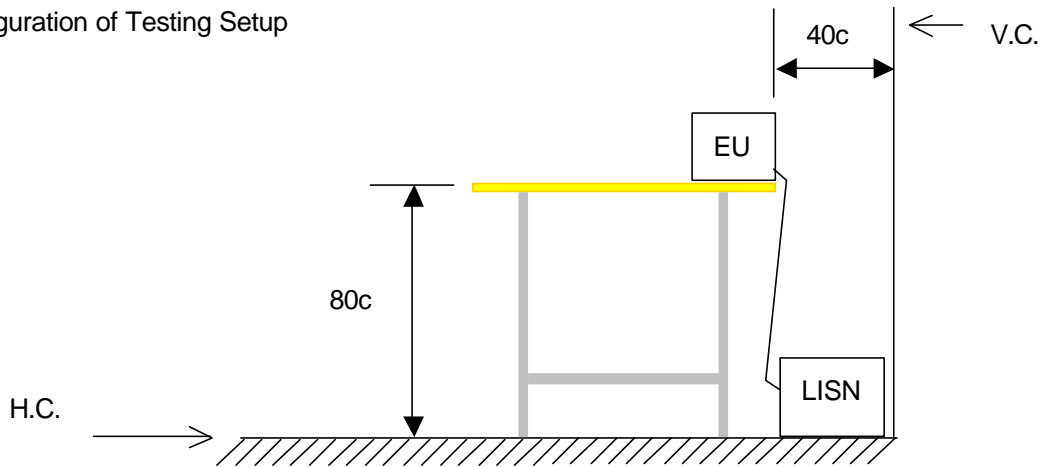

Configuration of EUT Setup

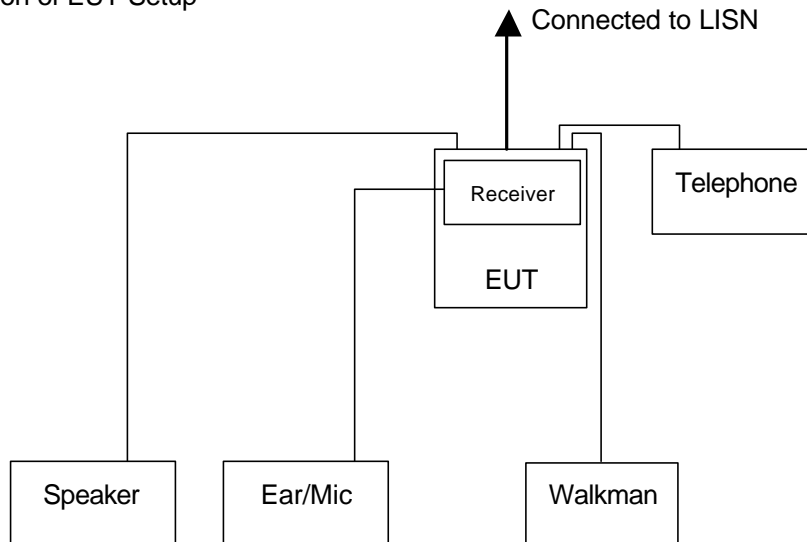

2.3 Conducted Limit

FCC Part 15

Frequency (MHz)	<input checked="" type="checkbox"/> Class B	
	uV	dBuV
0.45 ~ 1.705	250	48
1.705 ~ 30	250	48

2.4 Instrument configuration

- 2.4.1 The EMI test receiver frequency range set from 450 KHz to 30 MHz.
 2.4.2 The EMI test receiver bandwidth set at 9kHz.
 2.4.3 The EMI test receiver detector set as Quasi-Peak (Q.P.).

2.5 Measured Mode

- 2.5.1 The test mode for final as following:
 Mode 1: Charge mode
 Mode 2: Walkman Play (Transmit)

2.6 Configuration of Measurement

- 2.6.1 The EUT was place on a non-conductive table whose total height equaled 80cm and vertical conducting plane located 40cm to the rear of the EUT.
 2.6.2 The EUT was connected to the main power through Line Impedance Stabilization Networks (LISN). This setup provided a 50ohm/50μH coupling impedance for the measuring equipment. The auxiliary equipment was also connected to the main power through a LISN that provided a 50ohm/50μH coupling impedance with 50ohm termination. (Refer to the block diagram of the test setup and photographs.)
 2.6.3 The conducted disturbance was measured between the phase lead and the reference ground, and between the neutral lead and reference ground. The initial testing identified the frequency that has the highest disturbance relative to the limit while operating the EUT in typical modes of operation and cable positions in a test setup representative of typical system configuration.
 2.6.4 The identification of the frequency of highest disturbance with respect to the limit was found by investigating disturbances at a number of significant frequencies. The probable frequency of maximum disturbance had been found and that the associated cable and EUT configuration and mode of operation had been identified.

2.7 Configuration of EUT

- 2.7.1 Setup the EUT and simulators as shown section 2.2.
 2.7.2 Turn on the power of all equipment.
 2.7.3 Transmit Mode
 2.7.3.1 Press the "Test Mode" button first, the offer 9Vdc to the base unit, the base unit will go into test mode.
 2.7.3.2 As the base unit goes into test mode, the default channel is channel one. And used "CH

UP” and “CH DOWN” button to sequence selects all of the channels.

2.7.3.3 There is a cable connects with the base unit and two plugs. The Walkman connected with green one (Signal In), and connected the speaker with blue one (Audio Output).

2.7.4 Charge Mode

Insert the battery into the battery slot to offer power to Handset remote unit, and put it to base unit to charge.

2.8 Test Result

PASS

The final tests data as shown on following page.

Power Line Conducted Test Data

Date of Tested : 2001-8-2 Power Line : Line
 Temperature : 23 Humidity : 60%
 Tested Mode : Charge Mode

Frequency (MHz)	Factor (dB)	Meter Reading (dBuV)		Emission Level (dBuV)		Limits (dBuV/m)		Margin (dB)	
		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
7.130	1.36	7.12	--	8.48	--	48.00	--	-39.52	--
9.545	1.41	21.02	--	22.43	--	48.00	--	-25.57	--
11.802	1.37	27.30	--	28.67	--	48.00	--	-19.33	--
13.623	1.44	30.43	--	31.87	--	48.00	--	-16.13	--
15.615	1.50	22.08	--	23.58	--	48.00	--	-24.42	--
24.576	1.70	11.79	--	13.49	--	48.00	--	-34.51	--
28.638	2.00	18.20	--	20.20	--	48.00	--	-27.80	--

Remark :

1. All readings are Quasi-Peak values.
2. Factor = Insertion Loss + Cable Loss
3. "*" Means emission level un-detectable.
4. "--" Means do not need detect.

Power Line Conducted Test Data

Date of Tested : 2001-8-2 Power Line : Neutral
 Temperature : 23 Humidity : 60%
 Tested Mode : Charge Mode

Frequency (MHz)	Factor (dB)	Meter Reading (dBuV)		Emission Level (dBuV)		Limits (dBuV/m)		Margin (dB)	
		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
6.216	1.35	9.15	--	10.50	--	48.00	--	-37.50	--
7.279	1.38	15.60	--	16.98	--	48.00	--	-31.02	--
9.548	1.41	20.70	--	22.11	--	48.00	--	-25.89	--
11.806	1.37	29.67	--	31.04	--	48.00	--	-16.96	--
13.627	1.45	26.64	--	28.09	--	48.00	--	-19.91	--
15.361	1.50	24.81	--	26.31	--	48.00	--	-21.69	--
28.638	2.00	20.93	--	22.93	--	48.00	--	-25.07	--

Remark :

1. All readings are Quasi-Peak values.
2. Factor = Insertion Loss + Cable Loss
3. "*" Means emission level un-detectable.
4. "--" Means do not need detect.

Power Line Conducted Test Data

Date of Tested : 2001-8-2 Power Line : Line
 Temperature : 23 Humidity : 60%
 Tested Mode : Walkman Play

Frequency (MHz)	Factor (dB)	Meter Reading (dBuV)		Emission Level (dBuV)		Limits (dBuV/m)		Margin (dB)	
		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
7.455	1.45	15.73	--	17.18	--	48.00	--	-30.82	--
9.545	1.41	16.89	--	18.30	--	48.00	--	-29.70	--
11.802	1.37	34.37	--	35.74	--	48.00	--	-12.26	--
13.627	1.45	24.67	--	26.12	--	48.00	--	-21.88	--
15.291	1.50	13.62	--	15.12	--	48.00	--	-32.88	--
28.638	2.00	17.98	--	19.98	--	48.00	--	-28.02	--

Remark :

- 1 All readings are Quasi-Peak values.
- 2 Factor = Insertion Loss + Cable Loss
- 3 "*" Means emission level un-detectable.
- 4 "--" Means do not need detect.

Power Line Conducted Test Data

Date of Tested : 2001-8-2	Power Line : Neutral
Temperature : 23	Humidity : 60%
Tested Mode : Walkman Play	

Frequenc (MHz)	Factor (dB)	Meter Reading (dBuV)		Emission Level (dBuV)		Limits (dBuV/m)		Margin (dB)	
		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
7.283	1.38	14.83	--	16.21	--	48.00	--	-31.79	--
9.545	1.41	25.72	--	27.13	--	48.00	--	-20.87	--
11.802	1.37	26.02	--	27.39	--	48.00	--	-20.61	--
13.623	1.44	29.05	--	30.49	--	48.00	--	-17.51	--
15.615	1.50	20.60	--	22.10	--	48.00	--	-25.90	--
28.638	2.00	20.15	--	22.15	--	48.00	--	-25.85	--

Remark :

- 1 All readings are Quasi-Peak values.
- 2 Factor = Insertion Loss + Cable Loss
- 3 "*" Means emission level un-detectable.
- 4 "--" Means do not need detect.

3 Radiated Emission Measurement


3.1 Instrument (OATS 1)

Instrument	Manufacturer	Model	Serial No.	Last Calibration
EMI Test Receiver	Rohde & Schwarz	ESI 07	830154/002	2001/07/28
Bi-Log Antenna	Schaffner	CBL6112B	2610	2001/06/28
Pre-Amplifier	Schaffner	CPA9231A	3351	2000/11/13
RF Cable	IETC	CBL01	N/A	2000/10/11
Horn Antenna	Com-Power	AH-118	10081	2000/09/15
Pre-Amplifier	Agilent Technologies	8449B	3008A01434	2000/09/19
RF Cable	Insulated Wire	NPS-2251-7880-NPR	CBL06	2000/10/19


Note: All instrument upon which need to calibrated are with calibration period of 1 year.

3.2 Block Diagram of Test Configuration

Configuration of Testing Setup

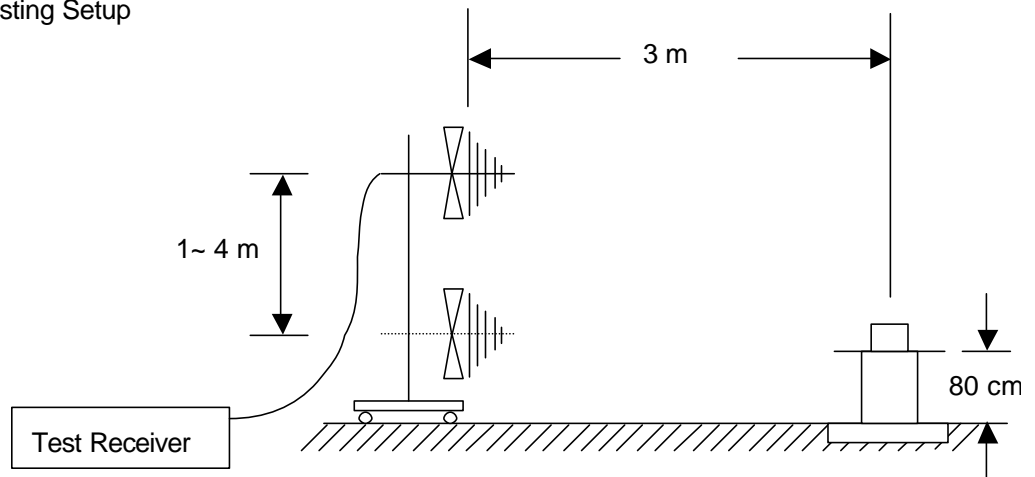

Configuration of EUT Setup

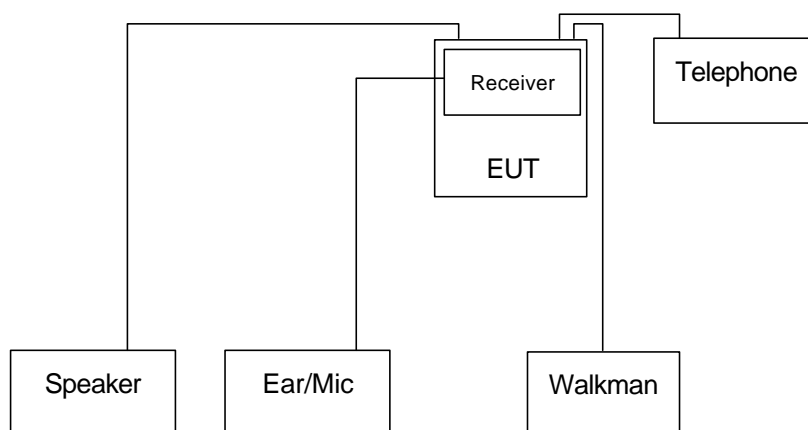

3.3 Radiated Limit

FCC Part 15 (30~1000 MHz)

Frequency (MHz)	<input type="checkbox"/> Class A (10m)		<input checked="" type="checkbox"/> Class B (3m)	
	Field Strength (uV/m)	Quasi-Peak (dBuV/m)	Field Strength (uV/m)	Quasi-Peak (dBuV/m)
30 ~ 88	90	39.08	100	40.00
88 ~ 216	150	43.52	150	43.52
216 ~ 960	210	46.44	200	46.02
960 above	300	49.54	500	53.98

FCC Part 15 (Section 15.249)

Frequency (MHz)	Fundamental		Harmonics	
	mv/m	dBuV/m	uV/m	dBuV/m
902~928	50	93.98	500	53.98

3.4 Instrument configuration

- 3.4.1 The EMI test receiver frequency range set from 30 MHz to 1000 MHz.
- 3.4.2 The EMI test receiver bandwidth set at 120 kHz.
- 3.4.3 The EMI test receiver detector set as Quasi-Peak (Q.P.).
- 3.4.4 The Spectrum frequency range set to fundamental and harmonics.

3.5 Measured Mode

- 3.5.1 The test mode for final as following:
 Mode 1: Charge mode
 Mode 2: Walkman Play (Transmit)

3.6 Configuration of Measurement

- 3.6.1 The EUT was place on a non-conductive table whose total height equaled 80cm. The turntable can rotate 360 degree to determine the position of the maximum emission level.
- 3.6.2 The EUT was set 10 meters away from the receiving antenna that was mounted on a non-conductive mast. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level.
- 3.6.3 The initial testing identified the frequency that has the highest disturbance relative to the limit while operating the EUT in typical modes of operation and cable positions in a test setup representative of typical system configuration.
- 3.6.4 The identification of the frequency of highest emission with respect to the limit was found by investigating emissions at a number of significant frequencies. The probable frequency of maximum emission had been found and that the associated cable and EUT configuration and mode of operation had been identified.

3.7 Configuration of EUT

- 3.7.1 Setup the EUT and simulators as shown section 3.2.
- 3.7.2 Turn on the power of all equipment.

3.7.3 Transmit Mode

3.7.3.1 Press the “Test Mode” button first, then offer 9Vdc to the base unit, the base unit will go into test mode.

3.7.3.2 As the base unit goes into test mode, the default channel is channel one. And use “CH UP” and “CH DOWN” button to sequentially select all of the channels.

3.7.3.3 There is a cable that connects with the base unit and two plugs. The Walkman is connected with the green one (Signal In), and connect the speaker with the blue one (Audio Output).

3.7.4 Charge Mode

Insert the battery into the battery slot to offer power to the Handset remote unit, and put it to the base unit to charge.

3.8 Test Result

PASS.

The final test data as shown on the following page.

Radiated Emission Measurement Data

Date of Tested	: 2001-7-31	Polarization	: Horizontal
Temperature	: 24	Humidity	: 61%
Tested Mode	: Walkman Play		

Frequency (MHz)	Factor (dB)	Meter Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV/m)	Margin (dB)
30.000	-25.34	56.56	31.22	40.00	-8.78
59.100	-15.24	43.61	28.37	40.00	-11.63
102.750	-14.88	35.61	20.73	43.50	-22.77
146.400	-11.90	38.31	26.41	43.50	-17.09
638.675	-1.89	34.43	32.54	46.00	-13.46
890.075	-5.86	40.59	34.73	46.00	-11.27
902.200 +	-6.65	90.73	84.08	93.98	-9.90
914.325	-6.25	46.07	39.82	46.00	-6.18
1804.400 *	-29.03	54.25	25.22	73.98	-48.76
2706.600 *	-27.88	51.03	23.15	73.98	-50.83
3608.800 *	-26.31	50.16	23.85	73.98	-50.13
4511.000 *	-24.53	48.99	24.46	73.98	-49.52
5413.200 *	-23.37	46.04	22.67	73.98	-51.31
6315.400 *	-21.09	40.57	19.48	73.98	-54.50
7217.600 *	-20.00	42.99	22.99	73.98	-50.99

Remark :

- 1 All readings are Quasi-Peak values.
- 2 "+" Means Fundamental Frequency.
- 3 "*" Means Peak Value. Peak Limit = Average + 20 dB.
- 4 Factor = Antenna Factor + Cable Loss – Pre-amplifier

Radiated Emission Measurement Data

Date of Tested	: 2001-7-31	Polarization	: Vertical
Temperature	: 24	Humidity	: 61%
Tested Mode	: Walkman Play		

Frequency (MHz)	Factor (dB)	Meter Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV/m)	Margin (dB)
59.100	-15.48	42.33	26.85	40.00	-13.15
90.625	-19.99	43.43	23.44	43.50	-20.06
110.025	-16.65	38.39	21.74	43.50	-21.76
146.400	-12.42	38.36	25.94	43.50	-17.56
471.350	0.00	32.90	32.90	46.00	-13.10
890.075	-5.43	37.75	32.32	46.00	-13.68
902.200 +	-5.18	86.71	81.53	93.98	-12.45
914.325	-5.14	43.03	37.89	46.00	-8.11
1804.400 *	-29.03	56.49	27.46	73.98	-46.52
2706.600 *	-27.88	51.01	23.13	73.98	-50.85
3608.800 *	-26.31	50.89	24.58	73.98	-49.40
4511.000 *	-24.53	48.57	24.04	73.98	-49.94
5413.200 *	-23.37	46.51	23.14	73.98	-50.84
6315.400 *	-21.09	41.18	20.09	73.98	-53.89
7217.600 *	-20.00	42.94	22.94	73.98	-51.04

Remark :

- 1 All readings are Quasi-Peak values.
- 2 "+" Means Fundamental Frequency.
- 3 "*" Means Peak values. Peak Limit = Average + 20 dB.
- 4 Factor = Antenna Factor + Cable Loss – Pre-amplifier

4 Frequency Measurements

4.1 Instrument

Instrument	Manufacturer	Model	Serial No.	Last Calibration
EMI Test Receiver	Rohde & Schwarz	ESI 07	830154/002	2001/07/28
Temperature Chamber	KATO	SSE47BLA	N/A	2000/08/23

Note: All instrument upon which need to calibrated are with calibration period of 1 year.

4.2 Measurement Operating Frequency

- 4.2.1 Test Condition: Temperature: 27 .
- 4.2.2 Supplied the EUT with 120Vac.
- 4.2.3 The EUT frequency ranges over 1MHz, so operate on top frequency (902.20MHz) and bottom frequency (904.90MHz) in during test.
- 4.2.4 Turn the EUT on and measure the EUT operating frequency at the start-up, and two, five, and ten minutes after startup.
- 4.2.5 Result:

Timing	902.20 MHz	904.90 MHz
Start-Up	902.20	904.90
2 min.	902.20	904.90
5 min.	902.20	904.90
10 min.	902.20	904.90

4.3 Measurement Frequency Stability vs. Temperature

- 4.3.1 Set the environmental temperature test chamber to temperature of 20 .
- 4.3.2 Supplied the EUT with 120Vac.
- 4.3.3 The EUT frequency ranges over 1MHz, so operate on top frequency (902.20MHz) and bottom frequency (904.90MHz) in during test.
- 4.3.4 Turn the environmental temperature test chamber on and wait the temperature of the chamber to stabilize.
- 4.3.5 While maintaining a constant temperature inside the environmental chamber, turn the EUT on and measure the EUT operating frequency at the start-up, and two, five, and ten minutes after startup.
- 4.3.6 Result:

Timing	902.20 MHz	904.90 MHz
Start-Up	902.200	904.900
2 min.	902.200	904.900
5 min.	902.198	904.896
10 min.	902.198	904.896

4.4 Measurement Frequency Stability vs. Voltage

- 4.4.1 Set the environmental temperature test chamber to temperature of 20 .
- 4.4.2 Supplied the EUT with 102 & 138Vac.

- 4.4.3 The EUT frequency ranges over 1MHz, so operate on top frequency (902.20MHz) and bottom frequency (904.90MHz) in during test.
- 4.4.4 Turn the environmental temperature test chamber on and wait the temperature of the chamber to stabilize.
- 4.4.5 While maintaining a constant temperature inside the environmental chamber, turn the EUT on and measure the EUT operating frequency at the start-up, and two, five, and ten minutes after startup.
- 4.4.6 Result:

Timing	902.20 MHz		904.90 MHz	
	102Vac	138Vac	102Vac	138Vac
Start-Up	902.200	902.200	904.900	904.900
2 min.	902.200	902.198	904.900	904.900
5 min.	902.200	902.198	904.900	904.896
10 min.	902.200	902.198	904.900	904.900

5 Occupied Bandwidth Measurements

5.1 Instrument

Instrument	Manufacturer	Model	Serial No.	Last Calibration
EMI Test Receiver	Rohde & Schwarz	ESI 07	830154/002	2001/07/28

Note: All instrument upon which need to calibrated are with calibration period of 1 year.


5.2 Instrument configuration

5.2.1 The EMI test receiver resolution bandwidth set at 100 kHz.

5.3 Result

5.3.1 Channel 1

Frequency: 902.20 MHz, Occupied Bandwidth: 294.00 kHz

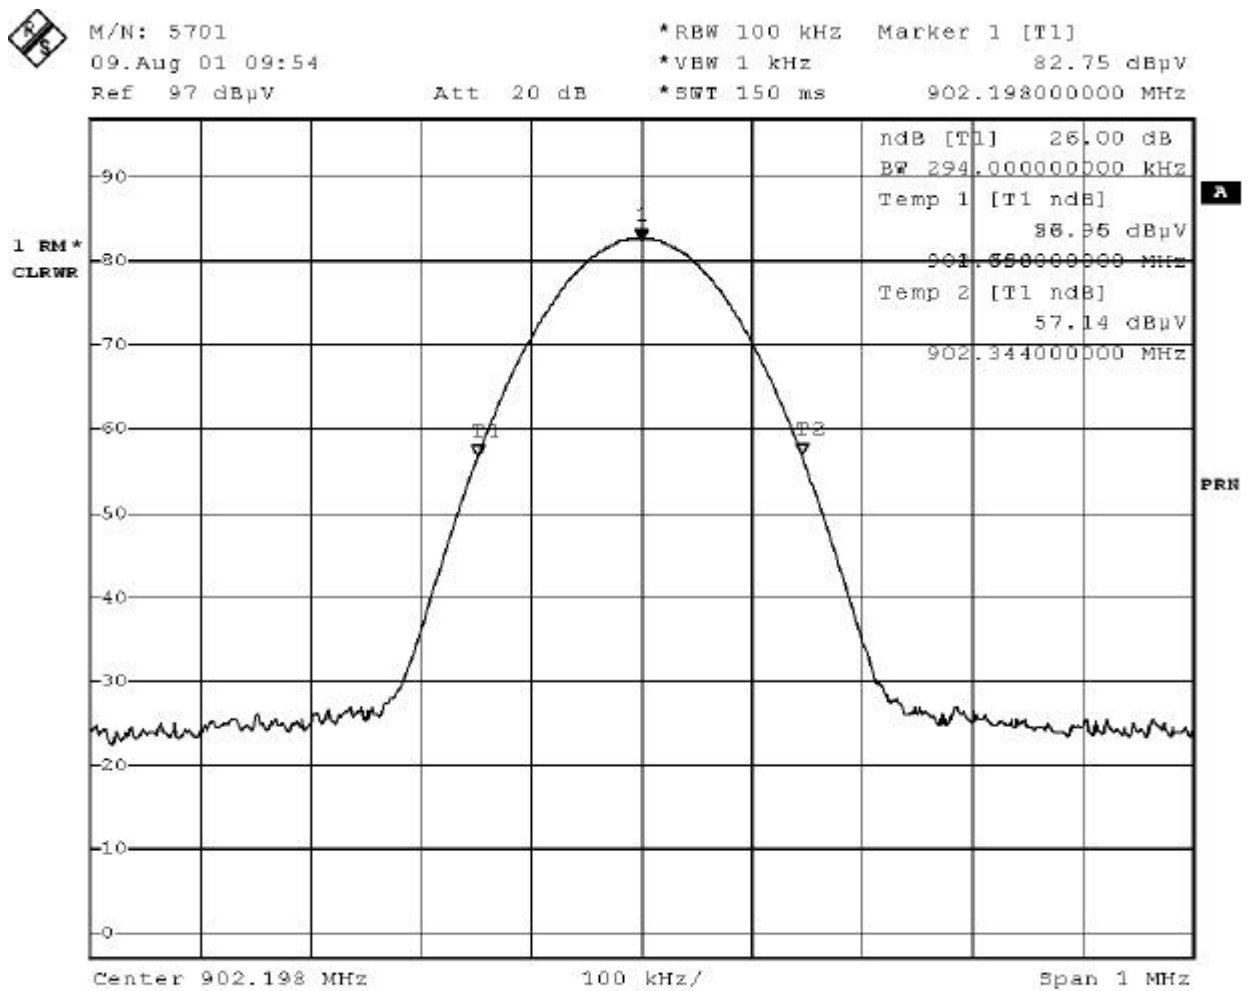


Date: 9.AUG.2001 09:54:24

5.3.2 Channel 10

Frequency: 904.90 MHz, Occupied Bandwidth: 296.00 kHz




M/N: 5701 *RBW 100 kHz Marker 1 [T1]
 09.Aug 01 09:56 *VBW 1 kHz 83.17 dBμV
 Ref 97 dBμV Att 20 dB *SWT 150 ms 904.898000000 MHz

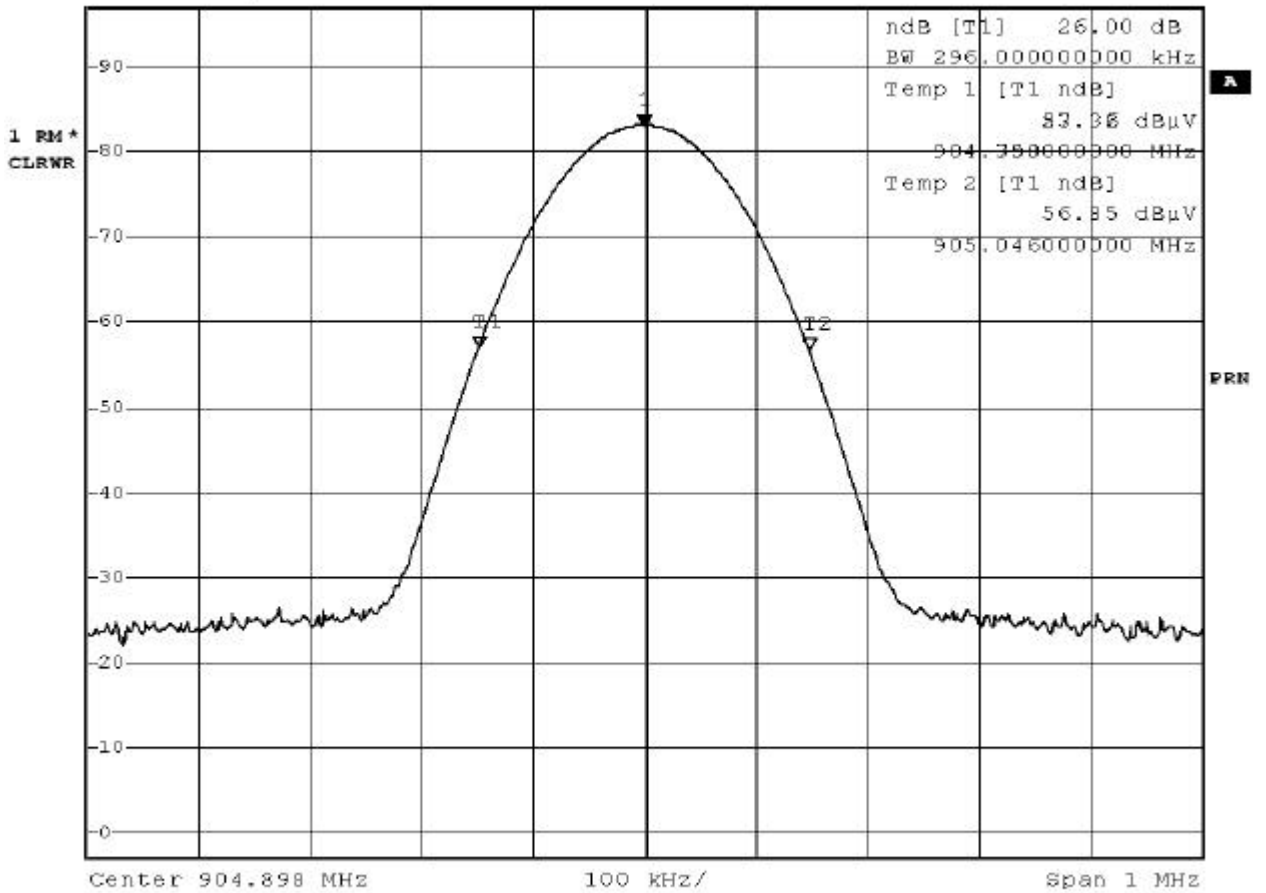

Date: 9.AUG.2001 09:56:52


Appendix 1 – Power Line Conducted Test Data

A1.1 Mode 1: Charge

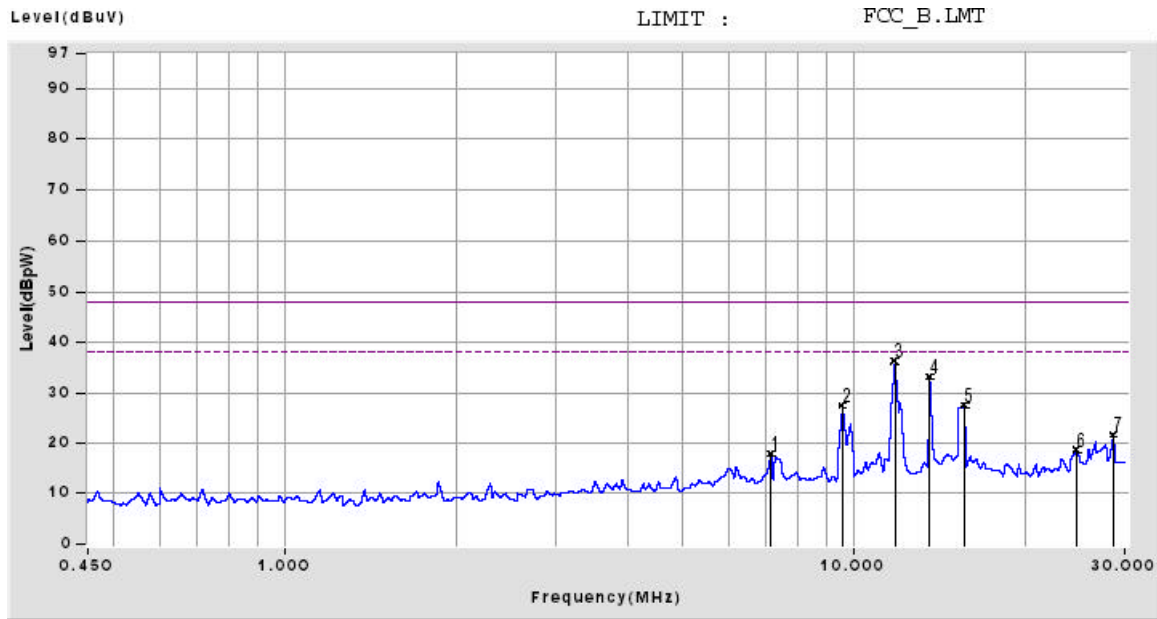

COMMENT: Charge


Line

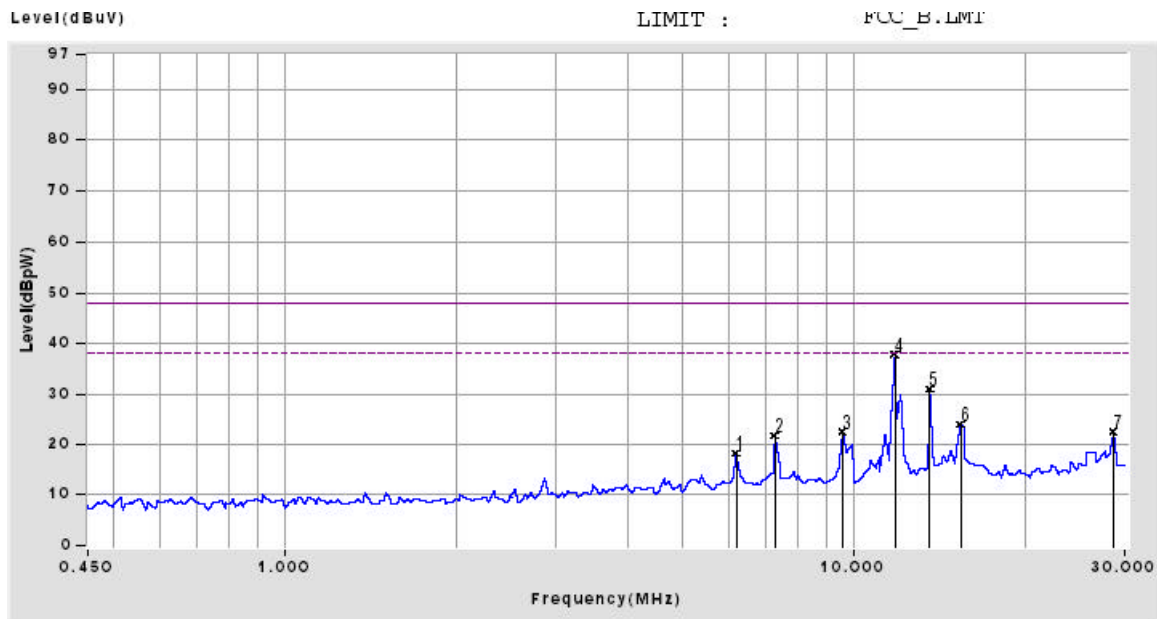


COMMENT: Charge

Neutral

A1.2 Mode 2: Walkman play

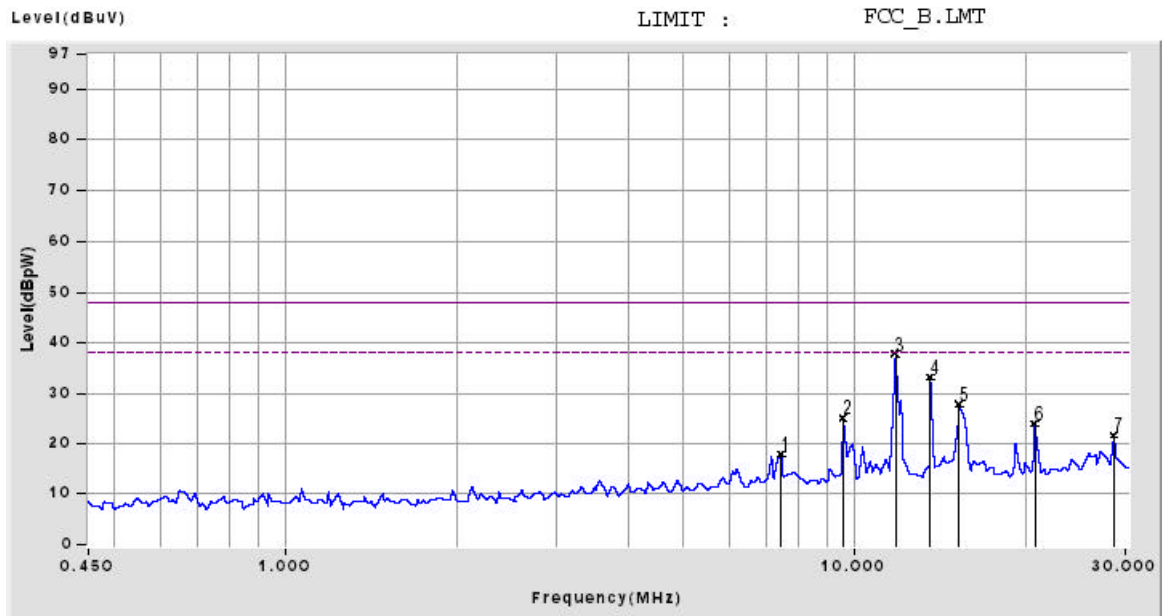

Line

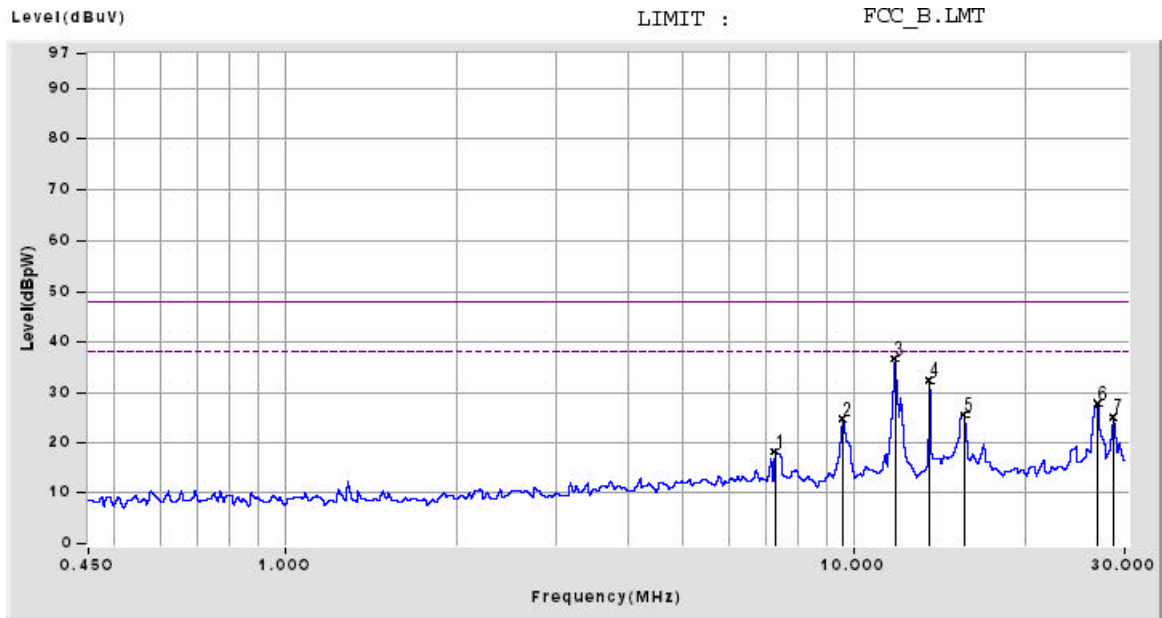


COMMENT:


Neutral

Appendix 2 – Radiated Emission Test Data


A2.1 Horizontal Polarization

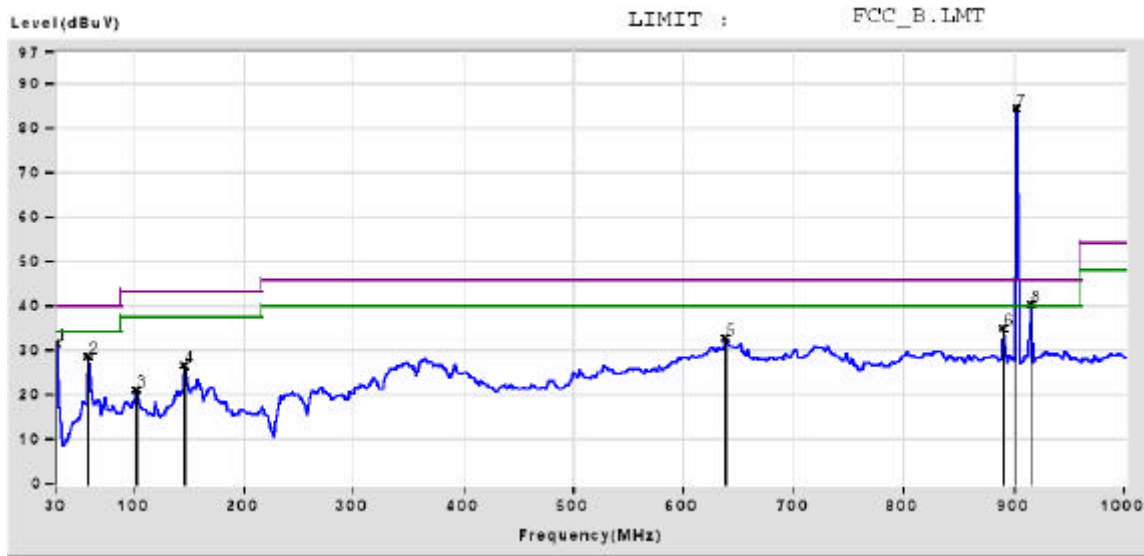


30 ~ 1000 MHz

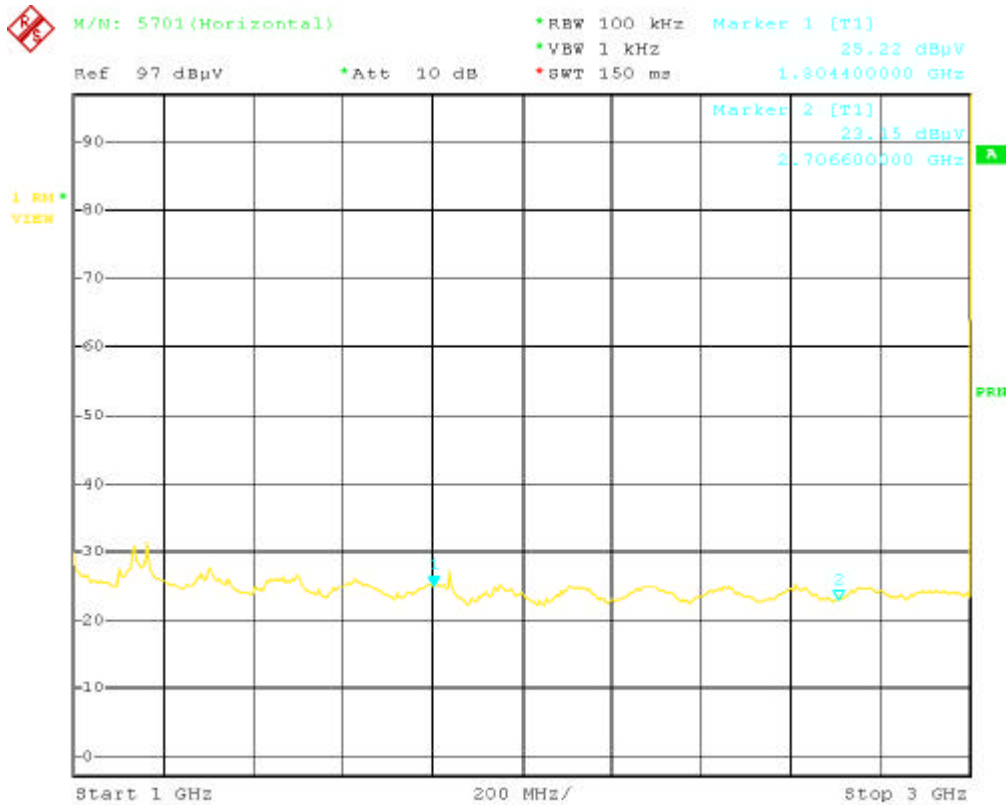

1 ~ 3 GHz

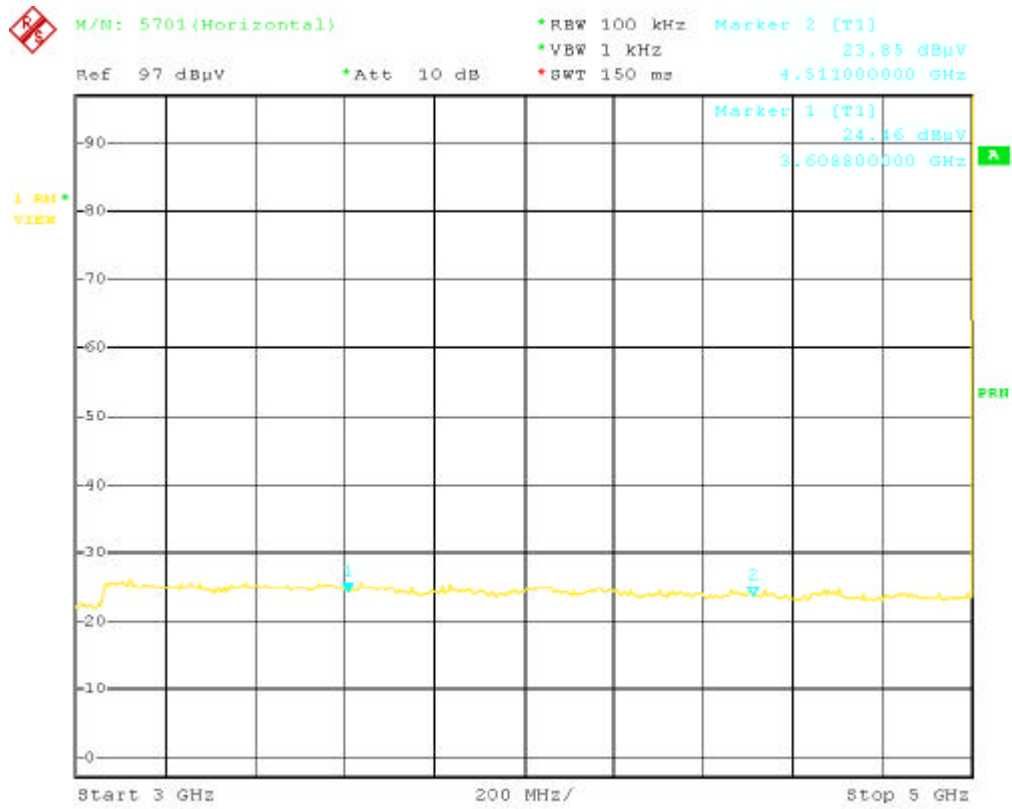


3 ~ 5 GHz

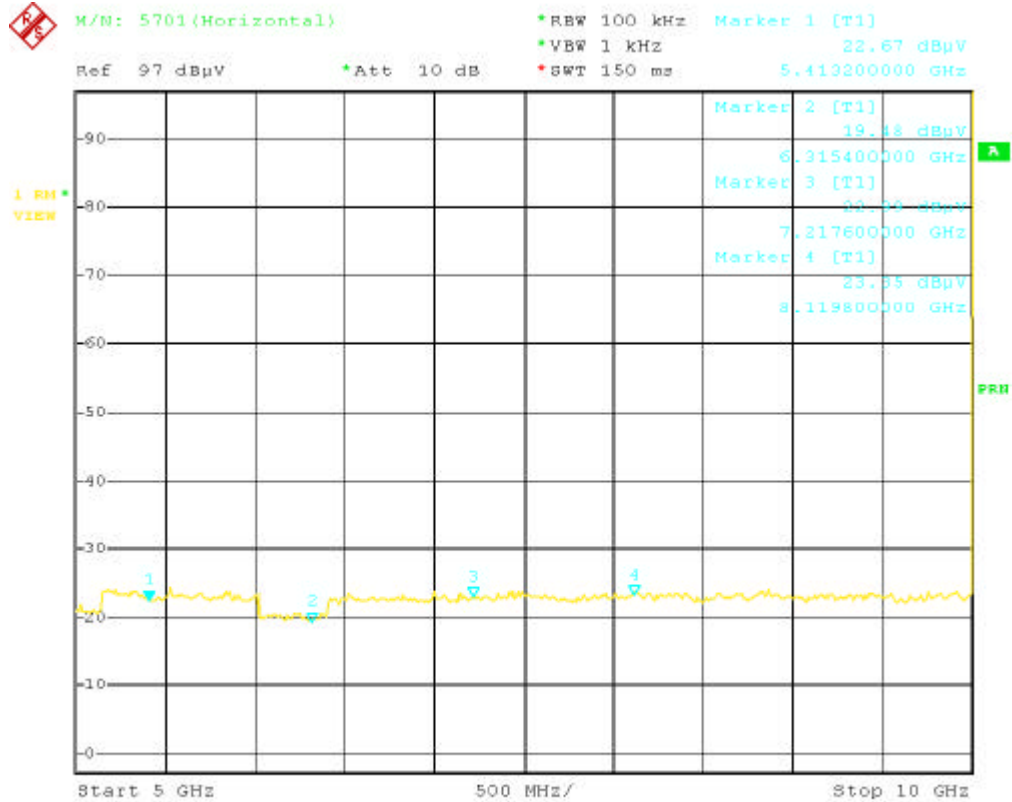


5 ~ 10 GHz


A2.2 Vertical Polarization

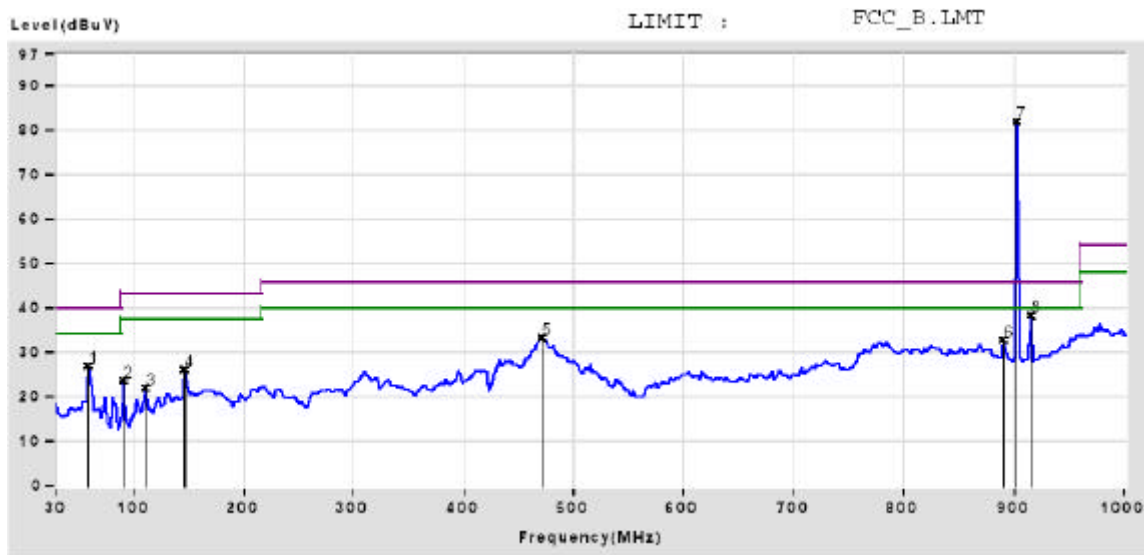


30 ~ 1000 MHz

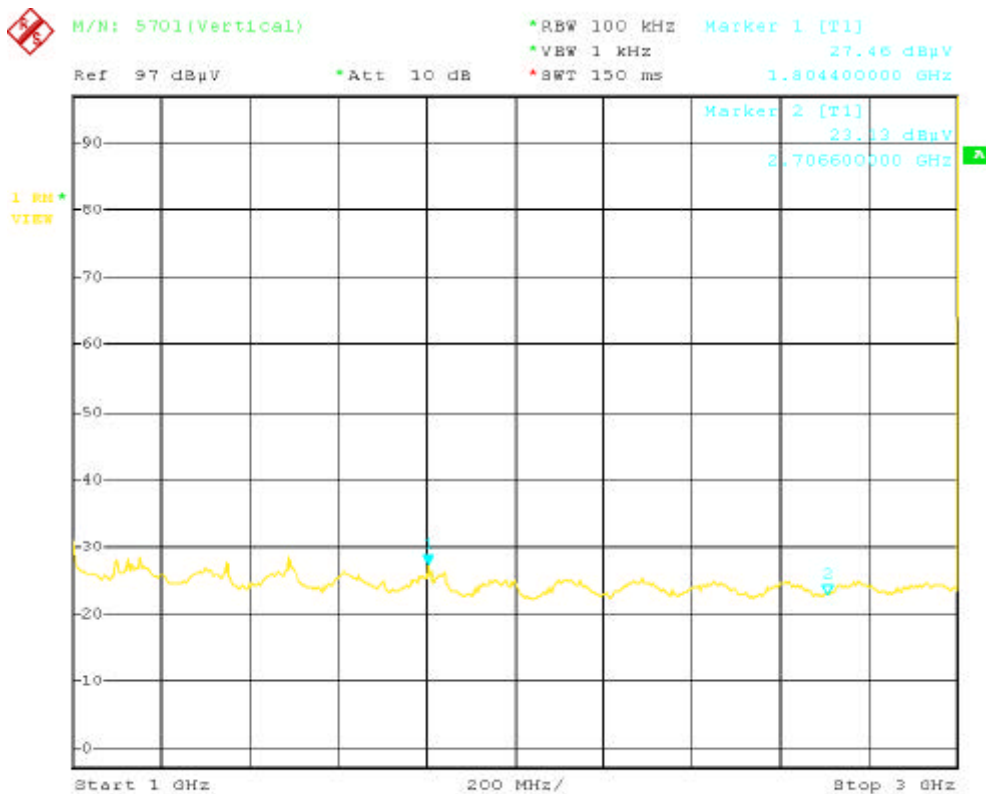

1 ~ 3 GHz

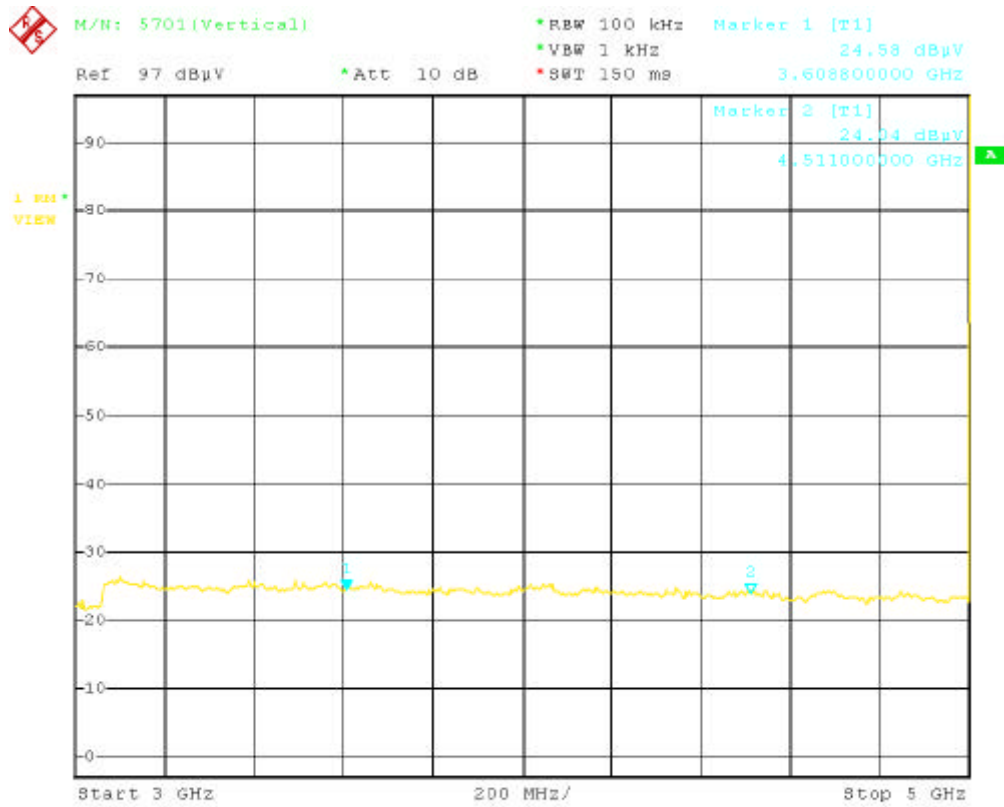

3 ~ 5 GHz

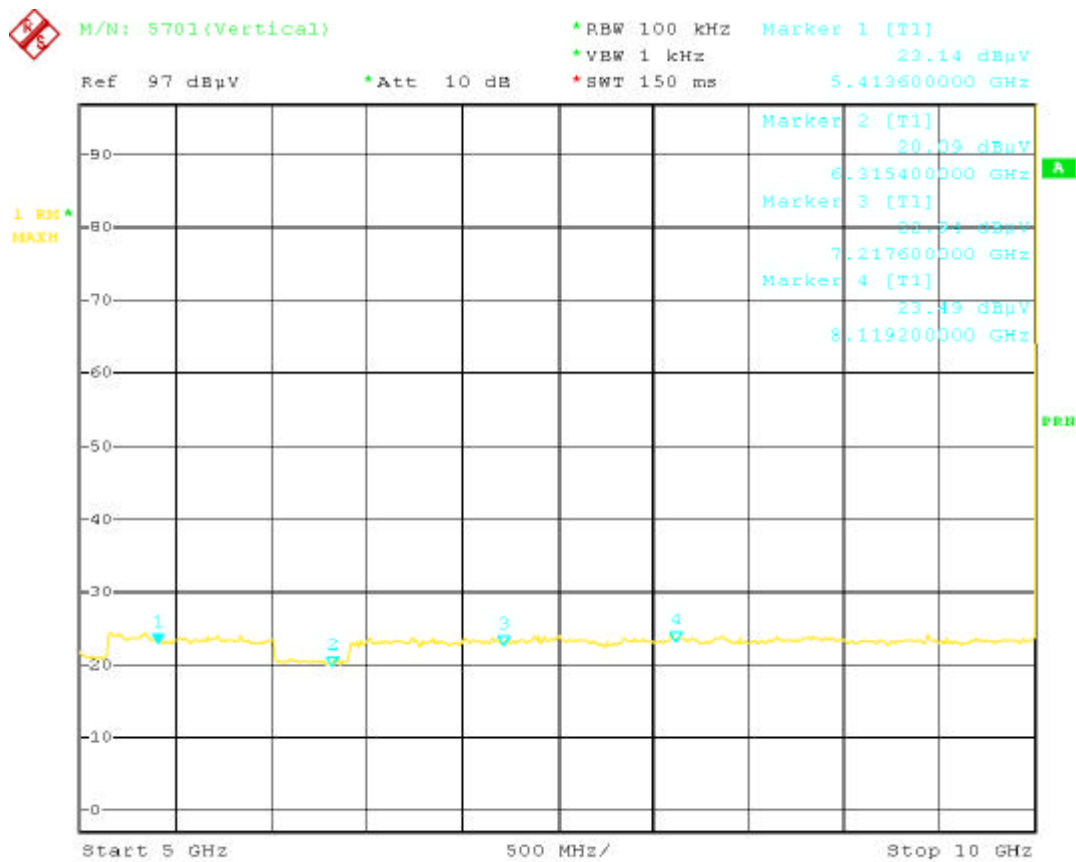

5 ~ 10 GHz