

# FCC TEST REPORT

**REPORT NO.:** RF110511E05

**MODEL NO.:** A-00033

**FCC ID:** DZLA00033

**RECEIVED:** May 11, 2011

**TESTED:** May 13 to June 08, 2011

**ISSUED:** June 30, 2011

**APPLICANT:** Logitech Inc.

**ADDRESS:** 6505 Kaiser Drive, Fremont, CA 94555 USA

**ISSUED BY:** Bureau Veritas Consumer Products Services (H.K.)  
Ltd., Taoyuan Branch Hsin Chu Laboratory

**LAB ADDRESS:** No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

**TEST LOCATION (1):** No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

**TEST LOCATION (2):** No.49, Ln. 206, Wende Rd., Shangshan Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

This test report consists of 75 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





## TABLE OF CONTENTS

RELEASE CONTROL RECORD.....	4
1 CERTIFICATION .....	5
2 SUMMARY OF TEST RESULTS .....	6
2.1 MEASUREMENT UNCERTAINTY .....	7
3 GENERAL INFORMATION.....	8
3.1 GENERAL DESCRIPTION OF EUT .....	8
3.2 DESCRIPTION OF TEST MODES .....	10
3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL: .....	11
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	13
3.5 DESCRIPTION OF SUPPORT UNITS .....	14
3.6 CONFIGURATION OF SYSTEM UNDER TEST .....	15
4 TEST PROCEDURES AND RESULTS.....	16
4.1 CONDUCTED EMISSION MEASUREMENT .....	16
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	16
4.1.2 TEST INSTRUMENTS.....	16
4.1.3 TEST PROCEDURES .....	17
4.1.4 TEST SETUP .....	17
4.1.5 EUT OPERATING CONDITIONS .....	18
4.1.6 TEST RESULTS .....	19
4.2 NUMBER OF HOPPING FREQUENCY USED .....	21
4.2.1 LIMIT OF HOPPING FREQUENCY USED .....	21
4.2.2 TEST INSTRUMENTS.....	21
4.2.3 TEST PROCEDURES .....	21
4.2.4 DEVIATION FROM TEST STANDARD.....	21
4.2.5 TEST SETUP .....	22
4.2.6 TEST RESULTS .....	22
4.3 DWELL TIME ON EACH CHANNEL .....	26
4.3.1 LIMIT OF DWELL TIME USED.....	26
4.3.2 TEST INSTRUMENTS.....	26
4.3.3 TEST PROCEDURES .....	26
4.3.4 DEVIATION FROM TEST STANDARD.....	27
4.3.5 TEST SETUP .....	27
4.3.6 TEST RESULTS .....	28
4.4 CHANNEL BANDWIDTH.....	40
4.4.1 LIMITS OF CHANNEL BANDWIDTH .....	40
4.4.2 TEST INSTRUMENTS.....	40
4.4.3 TEST PROCEDURE.....	40
4.4.4 DEVIATION FROM TEST STANDARD.....	40



A D T

4.4.5	TEST SETUP .....	41
4.4.6	EUT OPERATING CONDITION.....	41
4.4.7	TEST RESULTS .....	42
4.5	HOPPING CHANNEL SEPARATION.....	45
4.5.1	LIMIT OF HOPPING CHANNEL SEPARATION.....	45
4.5.2	TEST INSTRUMENTS.....	45
4.5.3	TEST PROCEDURES .....	45
4.5.4	DEVIATION FROM TEST STANDARD.....	45
4.5.5	TEST SETUP .....	45
4.5.6	TEST RESULTS .....	46
4.6	MAXIMUM PEAK OUTPUT POWER.....	49
4.6.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT .....	49
4.6.2	INSTRUMENTS.....	49
4.6.3	TEST PROCEDURES .....	49
4.6.4	DEVIATION FROM TEST STANDARD.....	49
4.6.5	TEST SETUP .....	50
4.6.6	EUT OPERATING CONDITION.....	50
4.6.7	TEST RESULTS .....	51
4.7	RADIATED EMISSION MEASUREMENT .....	54
4.7.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	54
4.7.2	TEST INSTRUMENTS.....	55
4.7.3	TEST PROCEDURES .....	56
4.7.4	DEVIATION FROM TEST STANDARD.....	56
4.7.5	TEST SETUP .....	57
4.7.6	EUT OPERATING CONDITIONS .....	57
4.7.7	TEST RESULTS .....	58
4.8	CONDUCTED OUT-BAND EMISSION MEASUREMENT .....	69
4.8.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT .....	69
4.8.2	TEST INSTRUMENTS.....	69
4.8.3	TEST PROCEDURE.....	69
4.8.4	DEVIATION FROM TEST STANDARD.....	69
4.8.5	EUT OPERATING CONDITION.....	69
4.8.6	TEST RESULTS .....	70
5	INFORMATION ON THE TESTING LABORATORIES .....	74
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....	75



A D T

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF110511E05	Original release	June 30, 2011



A D T

## 1 CERTIFICATION

**PRODUCT :** Wireless Headset H800  
**BRAND NAME :** Logitech  
**MODEL NO. :** A-00033  
**TEST SAMPLE :** ENGINEERING SAMPLE  
**APPLICANT :** Logitech Inc.  
**TESTED DATE :** May 13 to June 08, 2011  
**STANDARDS :** FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.4-2003  
ANSI C63.10-2009

The above equipment (Model: A-00033) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Midoli Peng, **DATE:** June 30, 2011  
(Midoli Peng, Specialist)

**APPROVED BY :** May Chen, **DATE:** June 30, 2011  
(May Chen, Deputy Manager)



## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -13.20dB at 17.395MHz
15.247(a)(1)(I)-(ii)	Number of Hopping Frequency Used Spec.: At least 15 channels	PASS	Meet the requirement of limit
15.247(a)(1)(ii)	Dwell Time on Each Channel Spec.: Max. 0.4 second within 31.6 second	PASS	Meet the requirement of limit
15.247(a)(1)(I)-(ii)	Hopping Channel Separation Spec. : Min. 25 kHz or two-thirds of 20 dB bandwidth, which ever is greater	PASS	Meet the requirement of limit
15.247(a)(2)	Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Spec.: max. 125mW	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Spec.: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -9.4dB at 613.35MHz
15.247(c)	Conducted Out-Band Emissions Measurement	PASS	Meet the requirement of limit
15.203	Antenna Requirement	PASS	No antenna connector is used.



## 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Measurement	Value
Conducted emissions	2.45 dB
Radiated emissions (30MHz-1GHz)	3.89 dB
Radiated emissions (1GHz ~18GHz)	2.19 dB
Radiated emissions (18GHz ~40GHz)	2.56 dB

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Wireless Headset H800
<b>MODEL NO.</b>	A-00033
<b>FCC ID</b>	DZLA00033
<b>POWER SUPPLY</b>	DC 3.7V from host equipment or battery
<b>MODULATION TYPE</b>	GFSK, $\pi/4$ -DQPSK, 8DPSK
<b>MODULATION TECHNOLOGY</b>	FHSS
<b>DATE RATE</b>	Up to 3Mbps
<b>FREQUENCY RANGE</b>	2402MHz ~ 2480MHz
<b>NUMBER OF CHANNEL</b>	79
<b>CHANNEL SPACING</b>	1MHz
<b>MAXIMUM OUTPUT POWER</b>	5.4mW
<b>ANTENNA TYPE</b>	PCB printed antenna with 1.93dBi antenna gain
<b>DATA CABLE</b>	USB cable (Unshielded, 1.9m)
<b>I/O PORTS</b>	USB charging port<USB2.0> x 1
<b>ASSOCIATED DEVICES</b>	Battery

#### NOTE:

- The EUT must be supplied with a battery as following table:

Brand	SYNERGY
Model No.	AHB472625
Rating	3.7V, 265mAh



2. The EUT was pre-tested under the following modes:

Test Mode	Description
Mode A	Y-Z Plane - Battery mode
<b>Mode B</b>	<b>Y-Z Plane - USB mode</b>
Mode C	X-Y Plane - USB mode
<b>Mode D</b>	<b>X-Z Plane - USB mode</b>

The worse radiated emissions (below 1GHz) test was found in **Mode B** and the worse radiated emissions (above 1GHz) test was found in **Mode D**. Therefore only the test data of the modes were recorded in this report.

3. The above EUT information was declared by the manufacturer and for more detailed feature descriptions, please refer to the manufacturer's specifications or User's Manual.

### 3.2 DESCRIPTION OF TEST MODES

Seventy-nine channels are provided to this EUT.

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

### 3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	
A	√				X-Y Plane - USB mode
B	-	√	-	-	Y-Z Plane - USB mode
C			√	√	X-Z Plane - USB mode

Where **PLC**: Power Line Conducted Emission

**RE < 1G**: Radiated Emission below 1GHz

**RE ≥ 1G**: Radiated Emission above 1GHz

**APCM**: Antenna Port Conducted Measurement

#### Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	0	FHSS	GFSK	DH5

#### Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	0	FHSS	GFSK	DH5

#### Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	0, 39, 78	FHSS	GFSK	DH5
0 to 78	0, 39, 78	FHSS	8DPSK	DH5

**Conducted Out-Band Emission Measurement:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	0, 78	FHSS	GFSK	DH5
0 to 78	0, 78	FHSS	8DPSK	DH5

**Antenna Port Conducted Measurement:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	0, 39, 78	FHSS	GFSK	DH5
0 to 78	0, 39, 78	FHSS	8DPSK	DH5
0 to 78	0, 39, 78	FHSS	$\pi/4$ -DQPSK	DH5

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (system)	TESTED BY
RE <sup>3</sup> 1G	25deg. C, 70%RH, 1001 hPa	120Vac, 60 Hz	Rex Huang
RE<1G	25deg. C, 65%RH, 1001 hPa	120Vac, 60 Hz	Rex Huang
PLC	28deg. C, 68%RH, 1001 hPa	120Vac, 60 Hz	Timmy Hu
APCM	25deg. C, 60%RH, 1001 hPa	120Vac, 60 Hz	Rex Huang

### **3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C. (15.247)**

**ANSI C63.4-2003**

**ANSI C63.10-2009**

All test items have been performed and recorded as per the above standards.

### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

For conducted test					
No.	Product	Brand	Model No.	Serial No.	FCC ID
1	PERSONAL COMPUTER	HP	DX7300MT	SGH7500R6B	FCC DoC
2	LCD MONITOR	DELL	E2210C	CN-0W366R-64180-05J-0CVS	FCC DoC
3	PRINTER	EPSON	LQ-300+	DCGY017079	FCC DoC
4	MODEM	ACEEX	1414	0206026775	IFAXDM1414
5	KEYBOARD	DELL	SK-8115	MY-0DJ325-71619-842-0457	FCC DoC
6	MOUSE	DELL	M056UOA	FOROOT41	FCC DoC
7	2.4GHz Transceiver	Logitech	A-00026	NA	NA

For conducted test	
No.	Signal cable description
1	USB Cable (Unshielded, 1.9m)
2	1.8m braid shielded wire , VGA connector , with two cores.
3	1.8m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core.
4	1.9m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
5	1.8m foil shielded wire, USB Connector, w/o core.
6	1.8m foil shielded wire, USB Connector, w/o core.
7	NA

Note: 1. All power cords of the above support units are unshielded (1.8m).


For other test items					
No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP32LA	GSLB32S	FCC DoC
2	iPod shuffle	Apple	MC749TA/A	CC4DMFJUDFDM	NA

For other test items	
No.	Signal cable description
1	USB Cable (Unshielded, 1.9m)
2	NA

Note: 1. All power cords of the above support units are unshielded (1.8m).


### 3.6 CONFIGURATION OF SYSTEM UNDER TEST

#### For conducted test

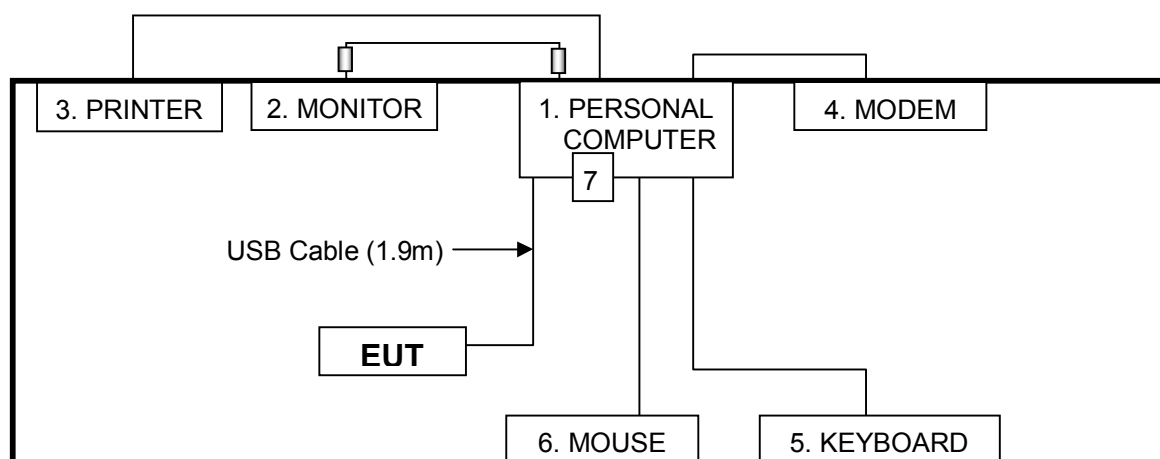

Note: Support unit 7 is 2.4GHz Transceiver.

#### For other test items

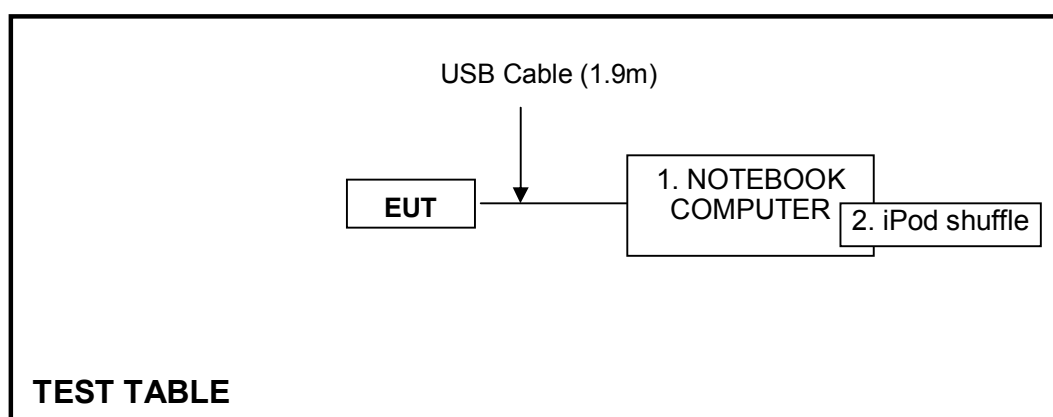

## 4 TEST PROCEDURES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	100287	Mar. 02, 2011	Mar. 01, 2012
Line-Impedance Stabilization Network (for EUT)	NSLK 8127	8127-523	Sep. 17, 2010	Sep. 16, 2011
Line-Impedance Stabilization Network (for Peripheral)	ENV-216	100072	June 11, 2010	June 10, 2011
RF Cable (JYEBAO)	5DFB	CONCAB-003	Aug. 06, 2010	Aug. 05, 2011
50 ohms Terminator	50	3	Nov. 03, 2010	Nov. 02, 2011
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

**Note:**


1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.



#### 4.1.3 TEST PROCEDURES

- The EUT/HOST was placed 0.4 meters from the conducting wall of the shielded room with EUT/HOST being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT/HOST were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

#### 4.1.4 TEST SETUP

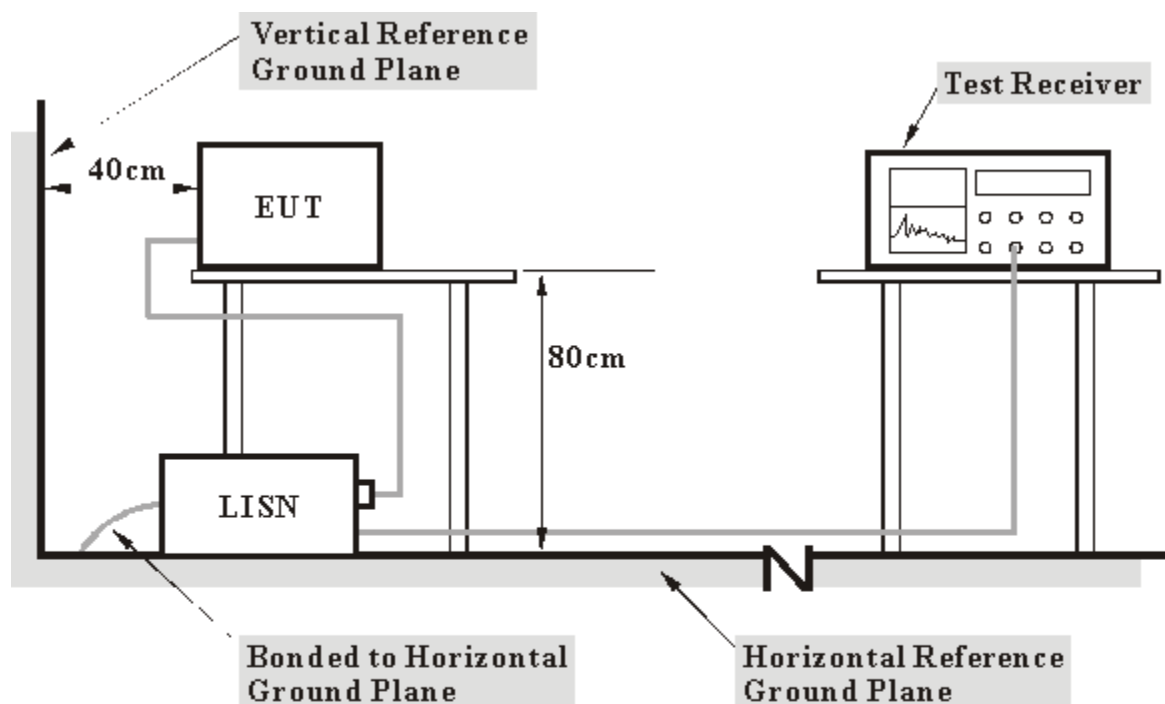

- Note:**
- Support units were connected to second LISN.
  - Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.5 EUT OPERATING CONDITIONS


- a. Connect the EUT with the support unit 1 (PC) which is placed in test table.
- b. The support unit 1 (PC) runs test program “InstallBlueSuite2.2.exe” to enable EUT under transmission/receiving condition continuously at specific channel frequency.

#### 4.1.6 TEST RESULTS

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
-------	----------	---------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.193	0.36	43.62	-	43.98	-	63.91	53.91	-19.93	-
2	0.388	0.36	29.88	-	30.24	-	58.10	48.10	-27.86	-
3	0.482	0.37	27.77	-	28.14	-	56.30	46.30	-28.17	-
4	9.758	0.68	30.63	-	31.31	-	60.00	50.00	-28.69	-
5	13.066	0.88	33.17	-	34.05	-	60.00	50.00	-25.95	-
6	17.539	1.02	35.44	-	36.46	-	60.00	50.00	-23.54	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

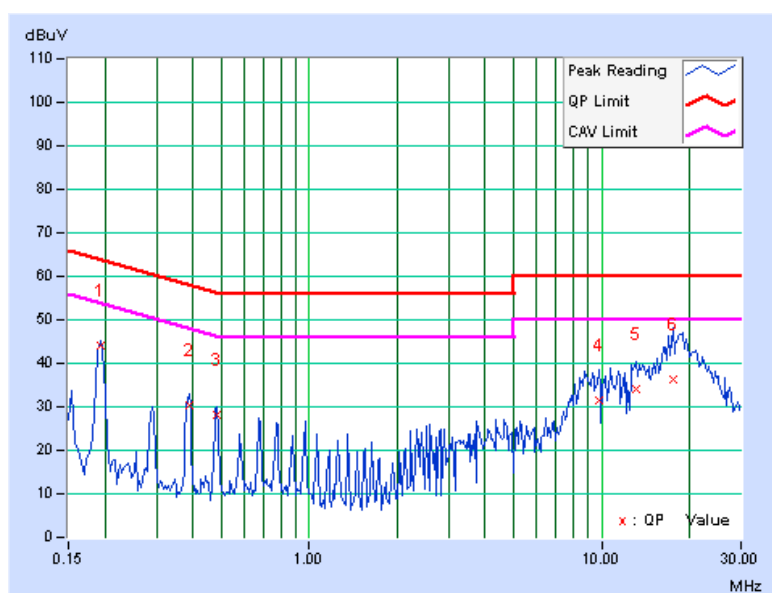

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
-------	-------------	---------------	-------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.194	0.10	44.23	-	44.33	-	63.84	53.84	-19.51	-
2	0.388	0.11	31.78	-	31.89	-	58.10	48.10	-26.21	-
3	2.230	0.20	30.11	-	30.31	-	56.00	46.00	-25.69	-
4	14.199	0.87	42.87	-	43.74	-	60.00	50.00	-16.26	-
<b>5</b>	<b>17.395</b>	<b>1.03</b>	<b>45.77</b>	-	<b>46.80</b>	-	<b>60.00</b>	<b>50.00</b>	<b>-13.20</b>	-
6	19.047	1.09	43.51	-	44.60	-	60.00	50.00	-15.40	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

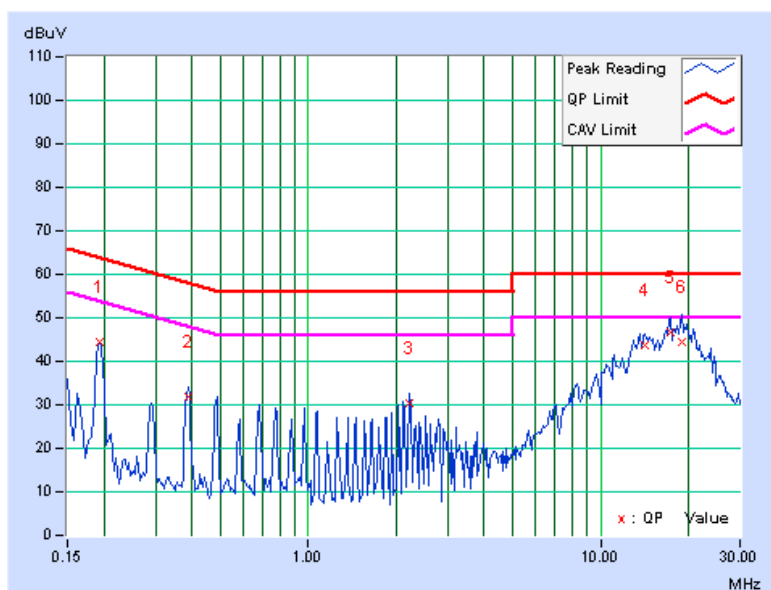

## 4.2 NUMBER OF HOPPING FREQUENCY USED

### 4.2.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 hopping frequencies, and should be equally spaced.

### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 08, 2010	Dec. 07, 2011

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


### 4.2.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation



#### 4.2.5 TEST SETUP





#### 4.2.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

# For GFSK

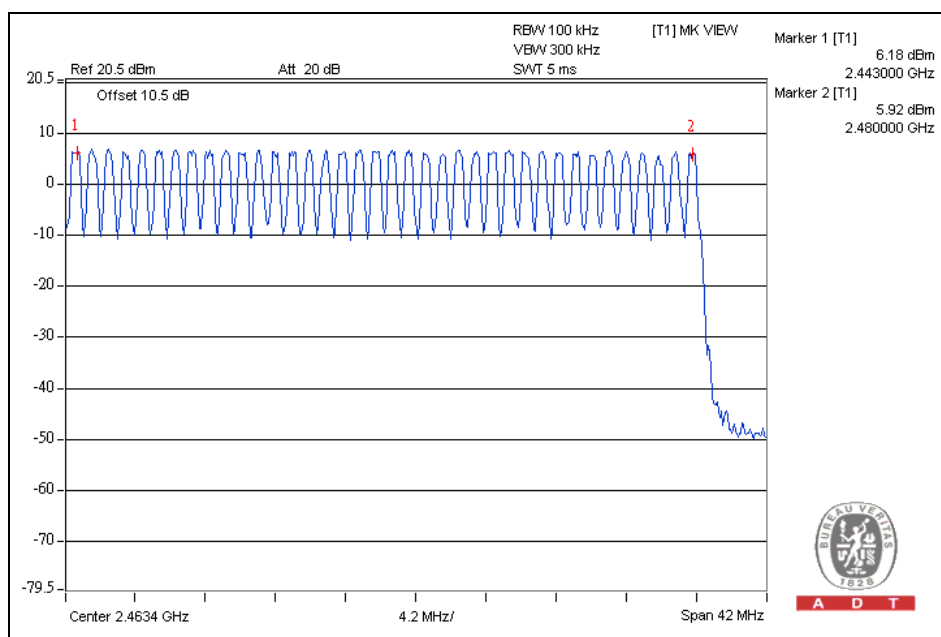
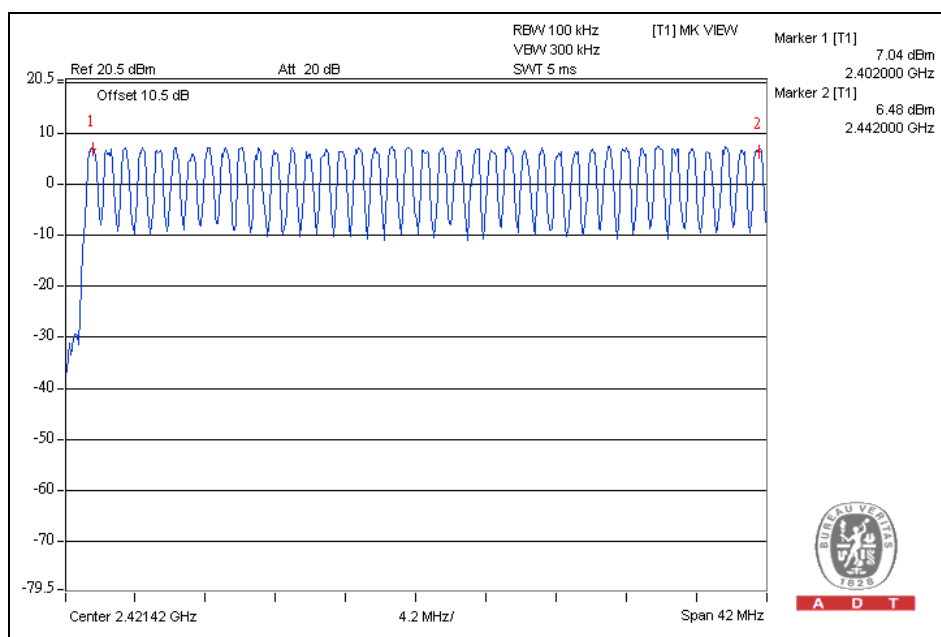


## For 8DPSK

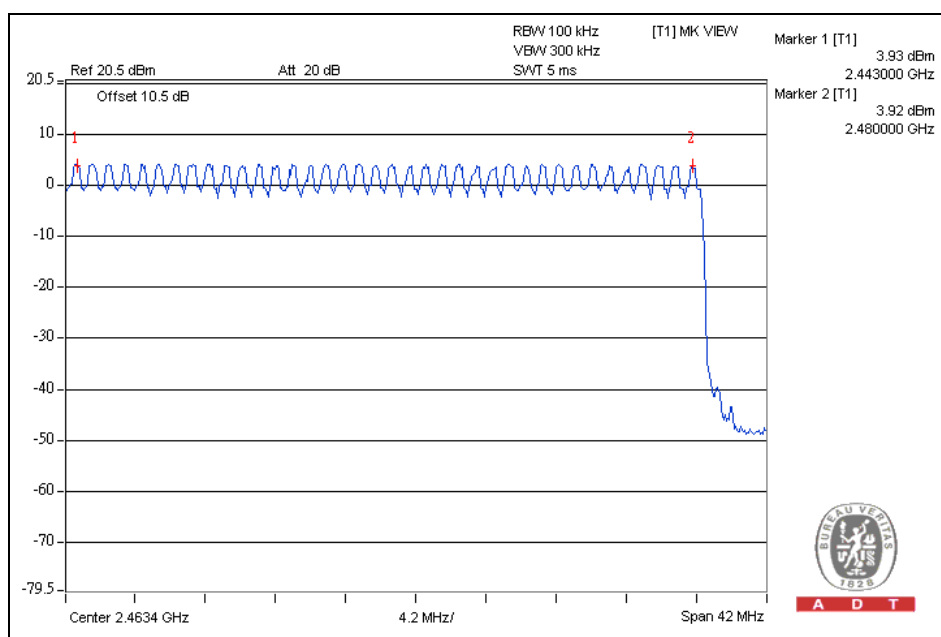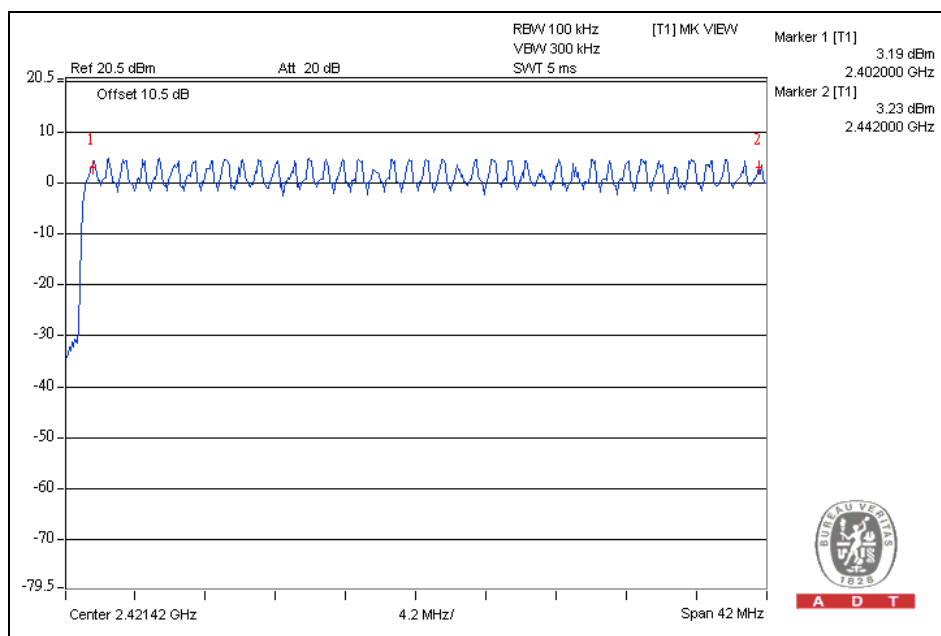



For  $\pi/4$ -DQPSK :

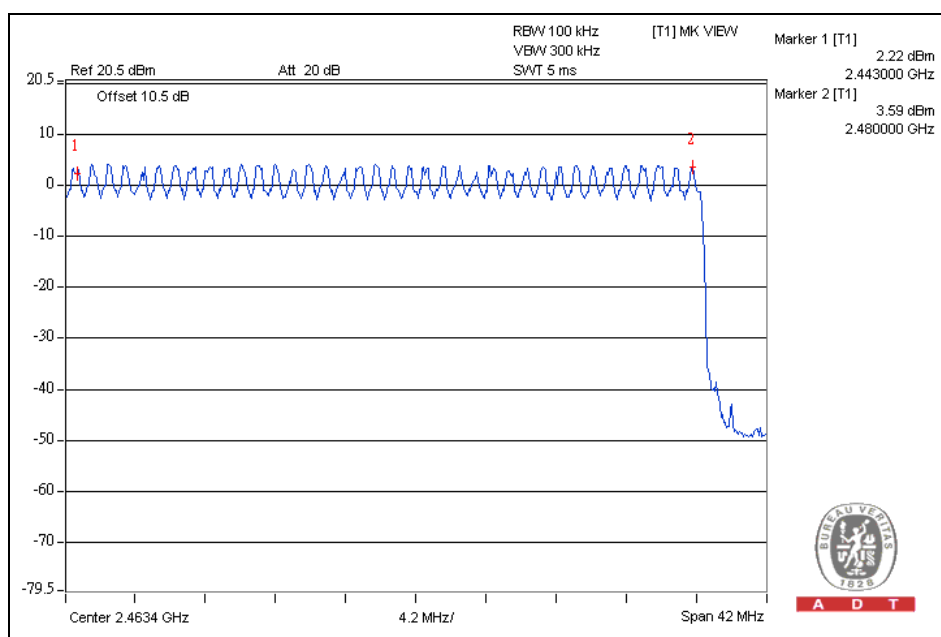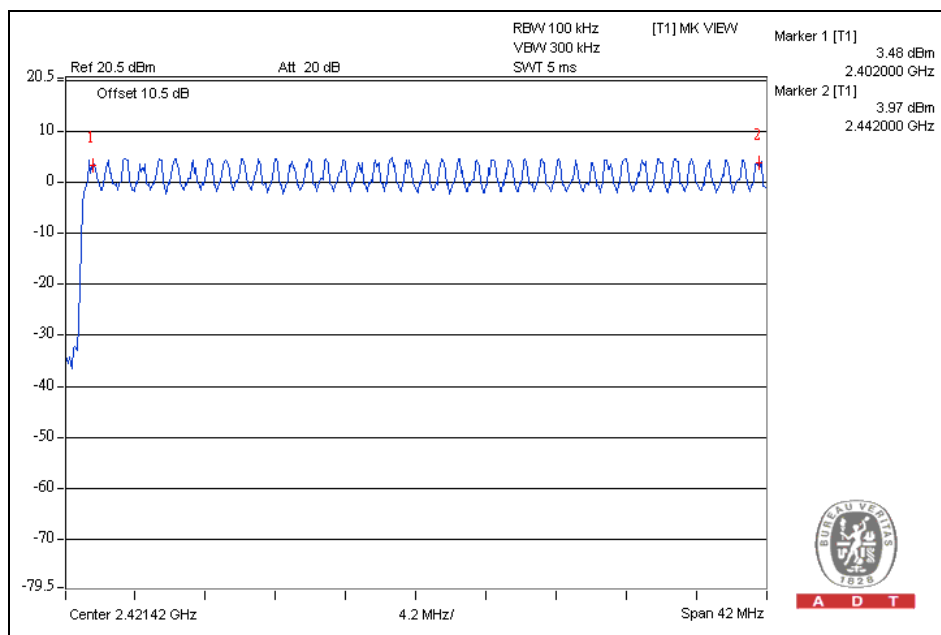

### 4.3 DWELL TIME ON EACH CHANNEL

#### 4.3.1 LIMIT OF DWELL TIME USED

For FHSS, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 31.6 second period. For hybrid systems, the average time of occupancy on any frequency should not exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4.

#### 4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 08, 2010	Dec. 07, 2011

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.3.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.3.5 TEST SETUP



### 4.3.6 TEST RESULTS

For GFSK:



Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	51 (times / 5 sec) *6.32=322.32 times	0.450	145.04	400
DH3	25 (times / 5 sec) *6.32=158 times	1.722	272.07	400
DH5	17 (times / 5 sec) *6.32=107.44 times	3.000	322.32	400

Test plots of the transmitting time slot are shown on next three pages.





A D T



DH1

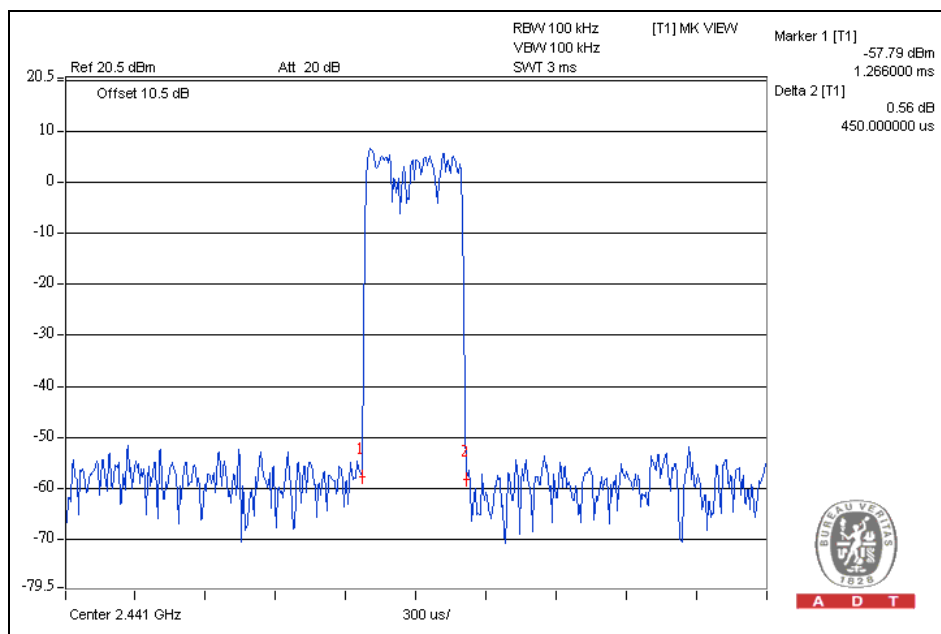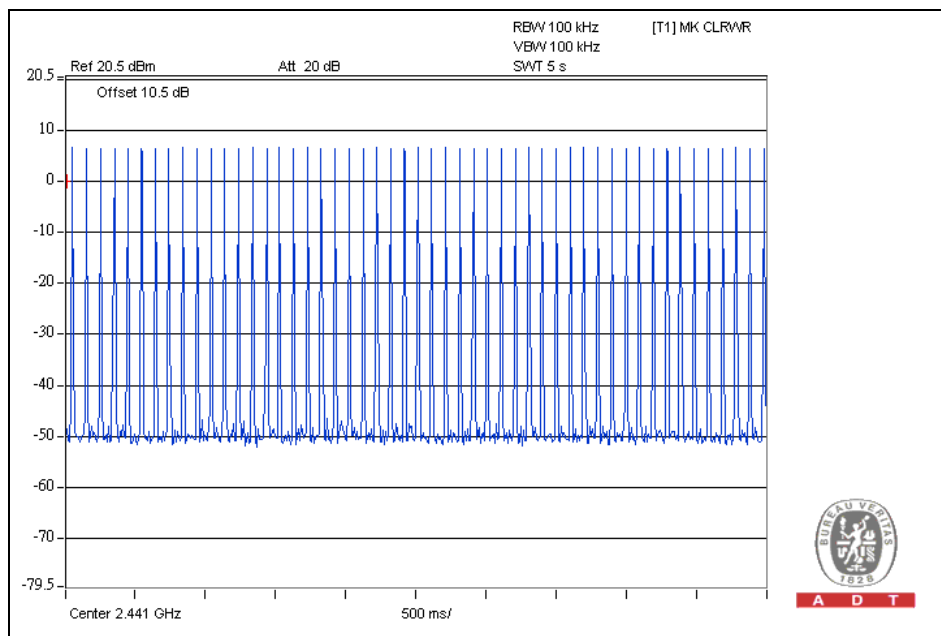

## DH3

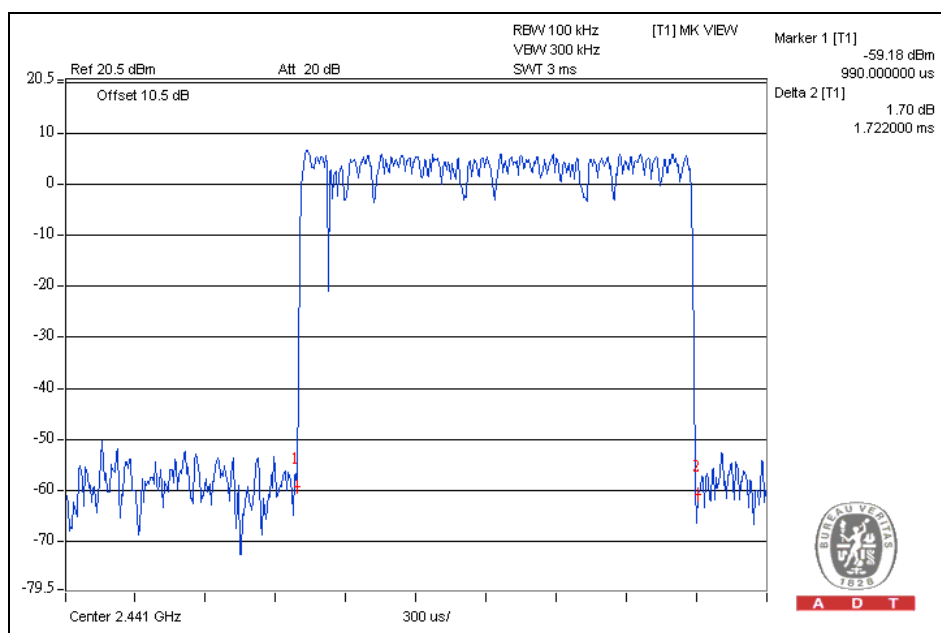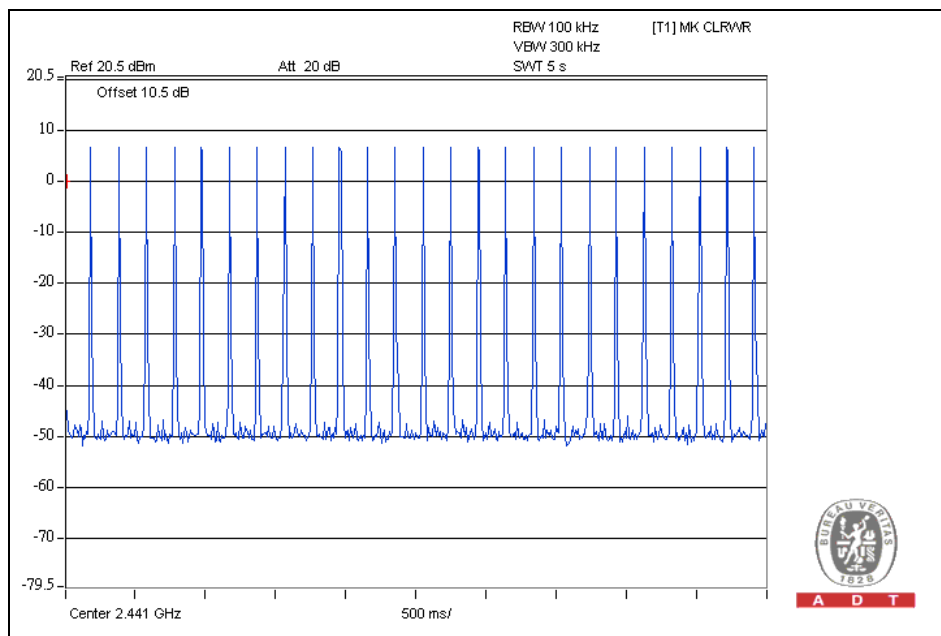

# DH5

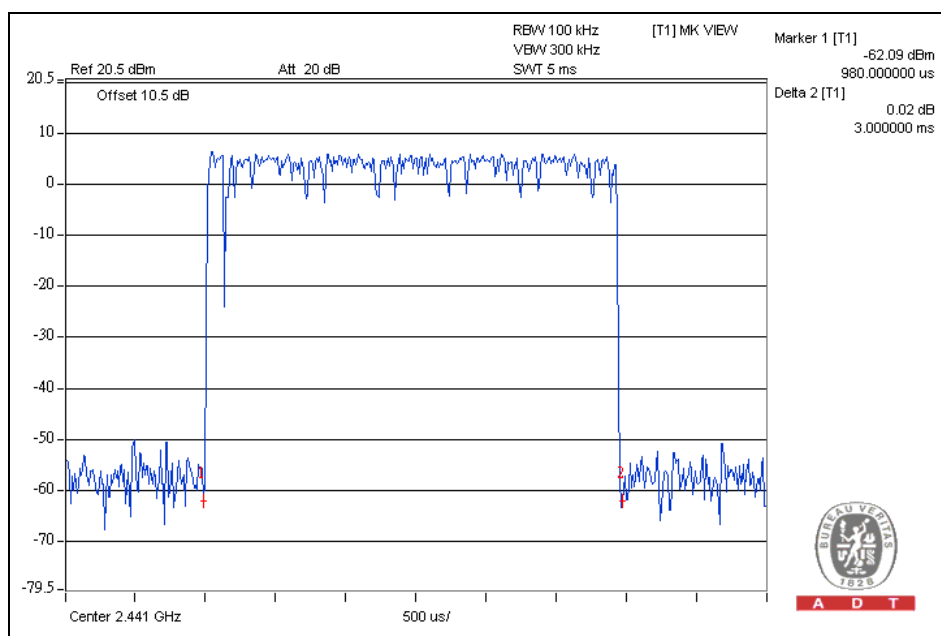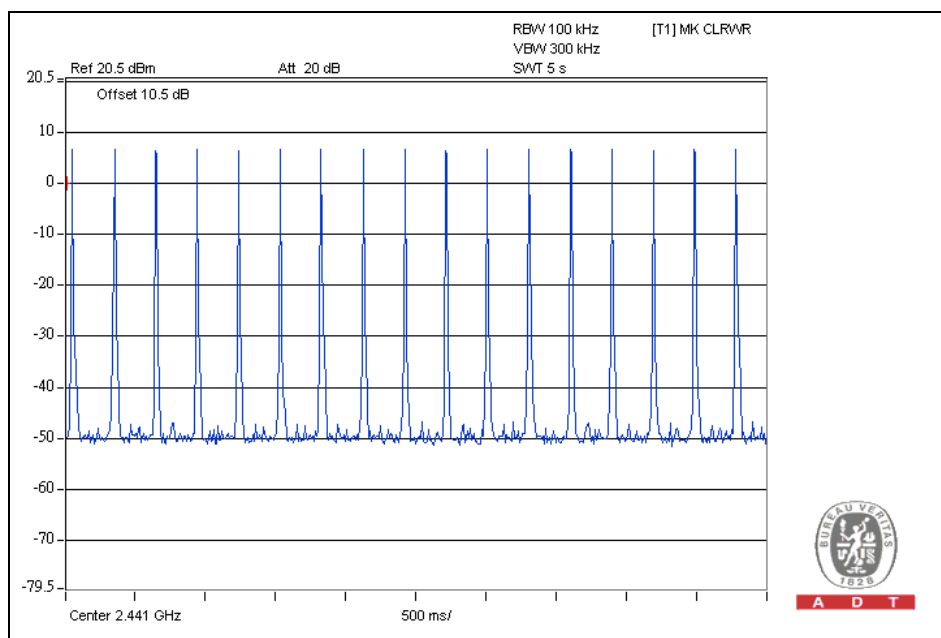



# For 8DPSK :

Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	50 (times / 5 sec) *6.32=316 times	0.510	161.16	400
DH3	25 (times / 5 sec) *6.32=158 times	1.752	276.81	400
DH5	17 (times / 5 sec) *6.32=107.44 times	2.990	321.24	400



Test plots of the transmitting time slot are shown on next three pages.





# DH1

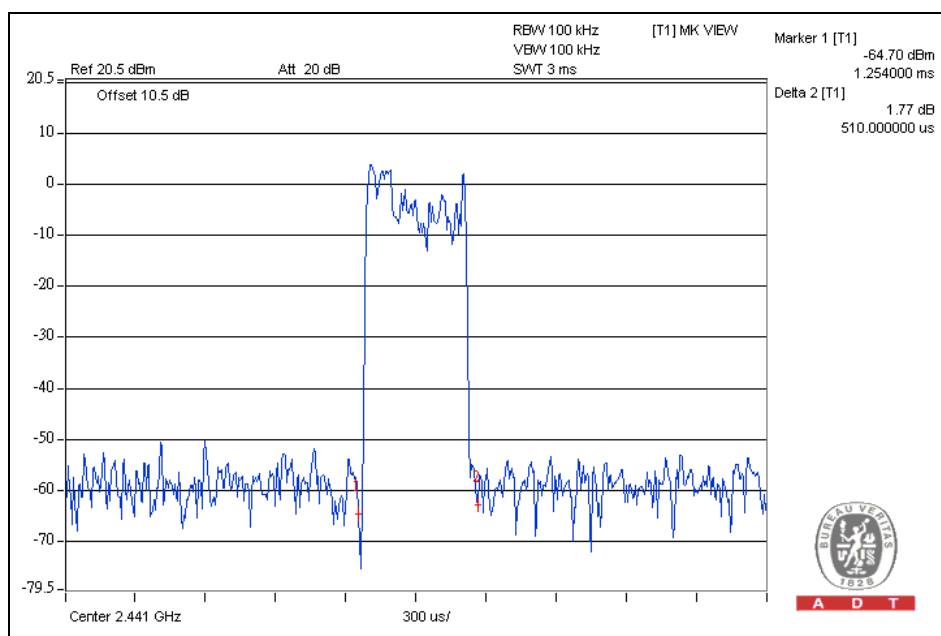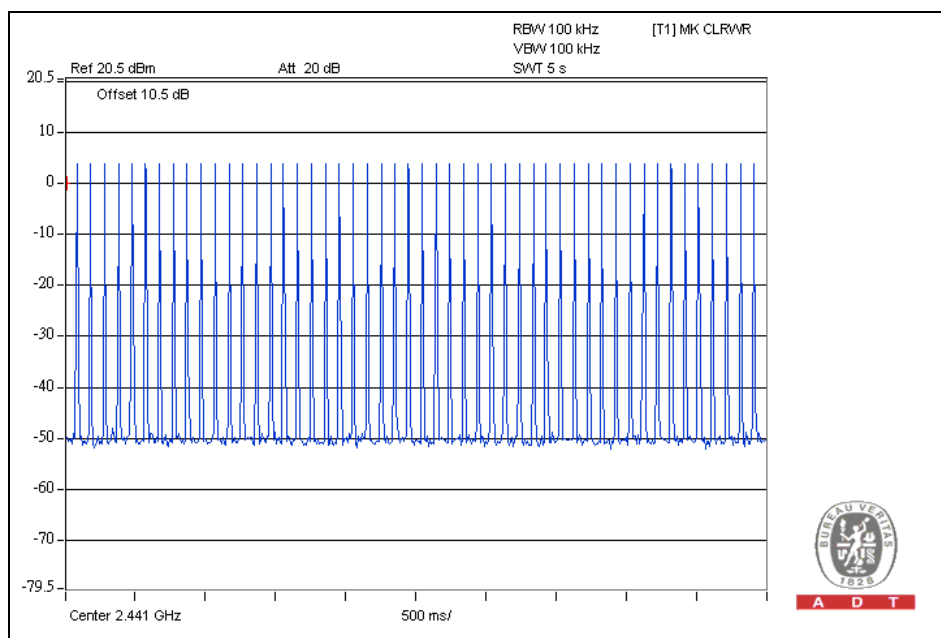

# DH3

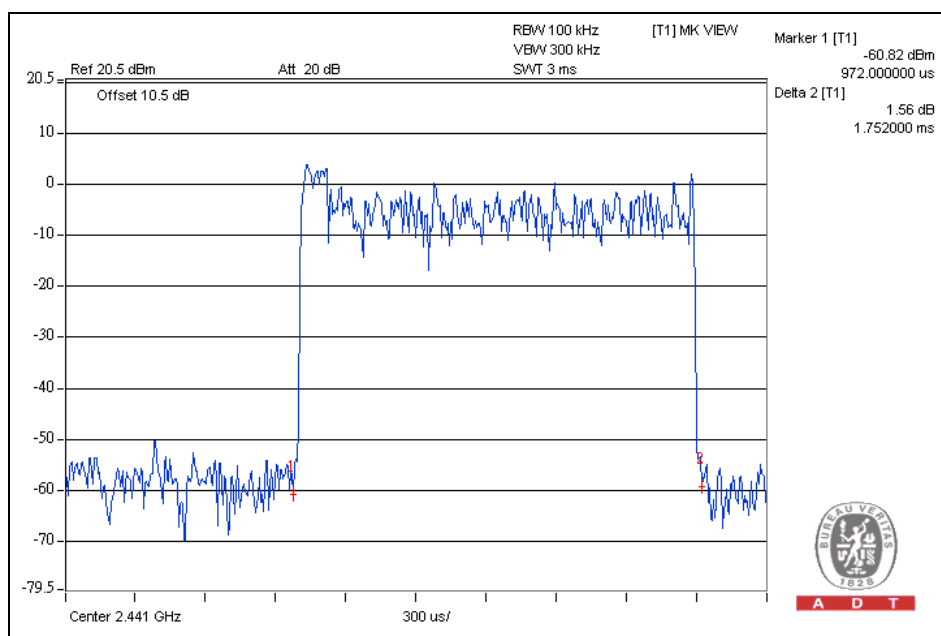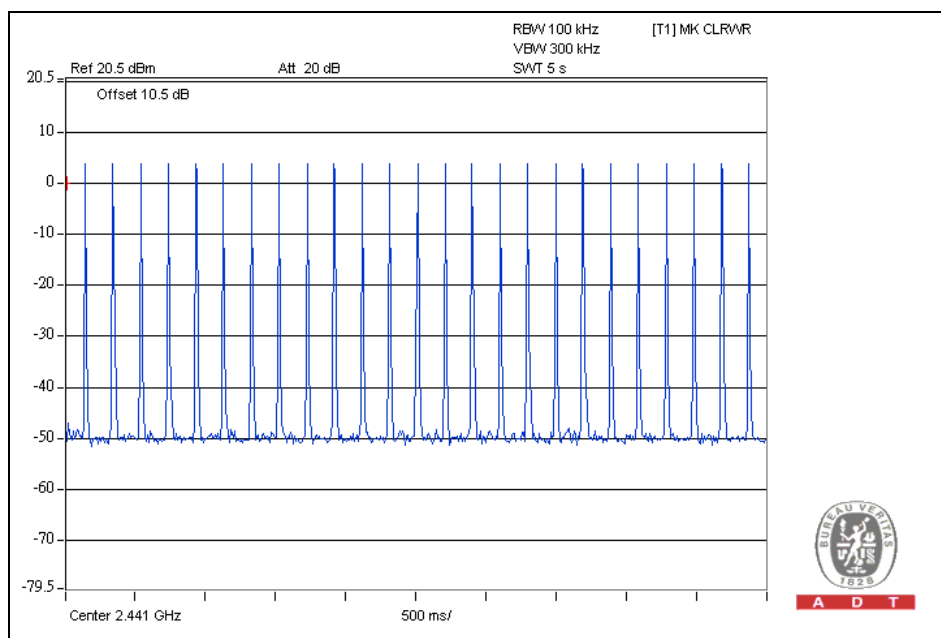

# DH5

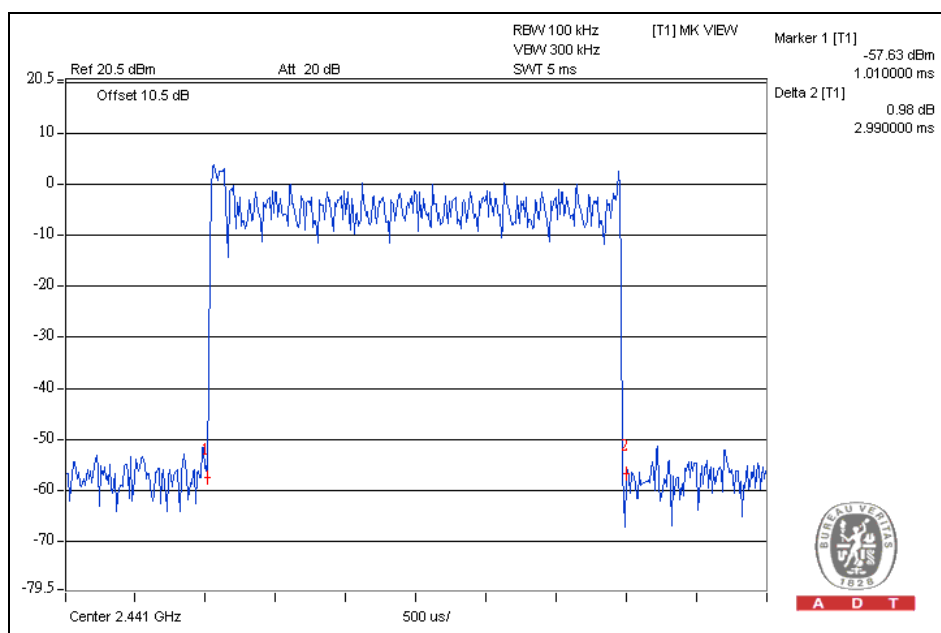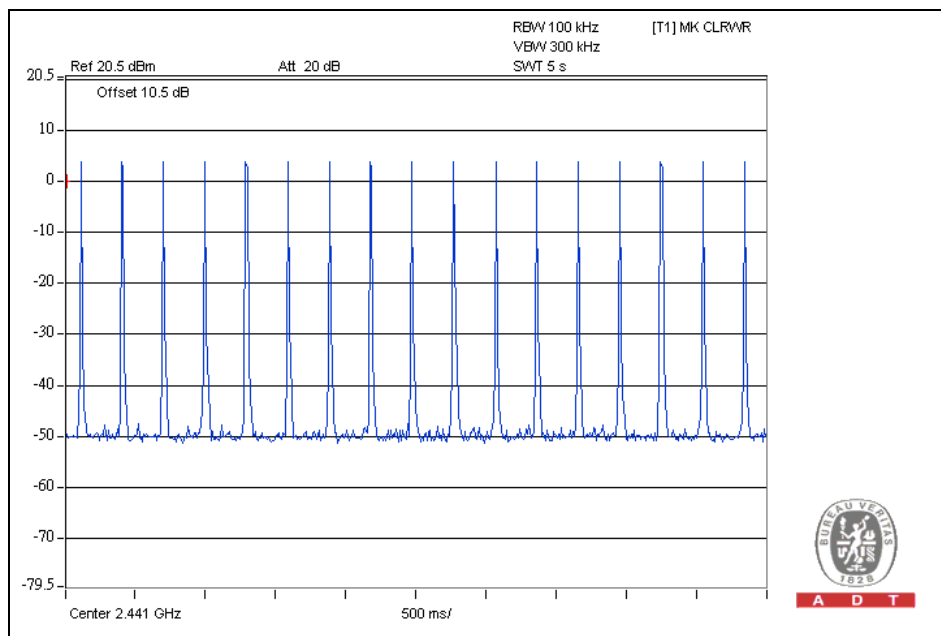





A D T

For  $\pi/4$  – DQPSK :



Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	51 (times / 5 sec) *6.32=322.32 times	0.492	158.58	400
DH3	26 (times / 5 sec) *6.32=164.32 times	1.734	284.93	400
DH5	17 (times / 5 sec) *6.32=107.44 times	3.06	328.76	400

Test plots of the transmitting time slot are shown on next three pages.


# DH1

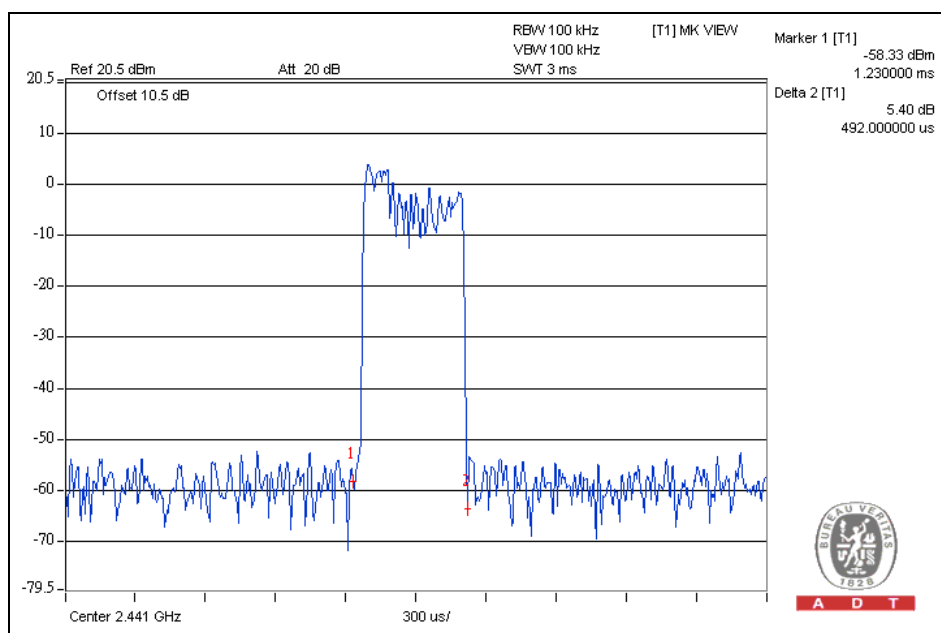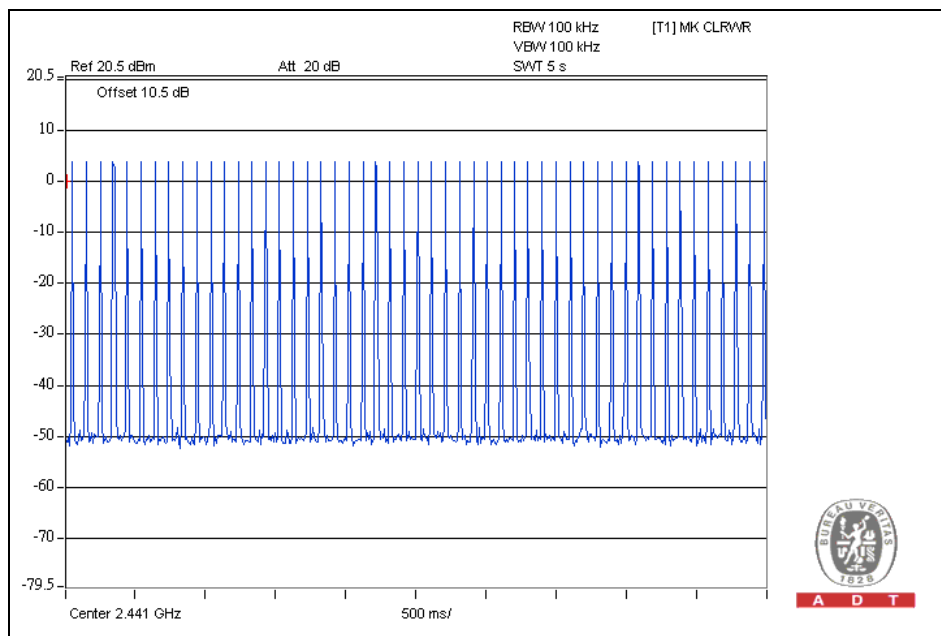


# DH3

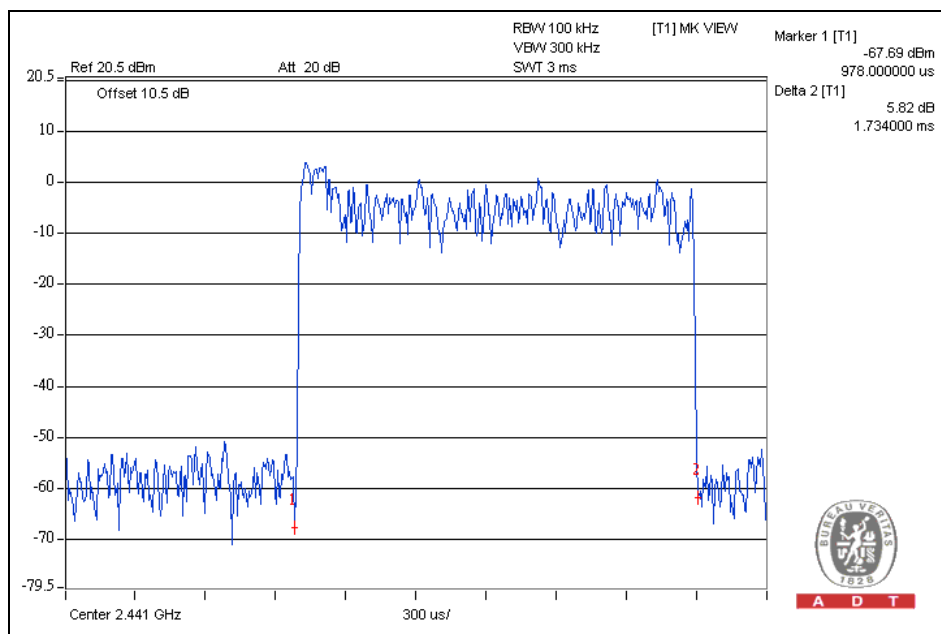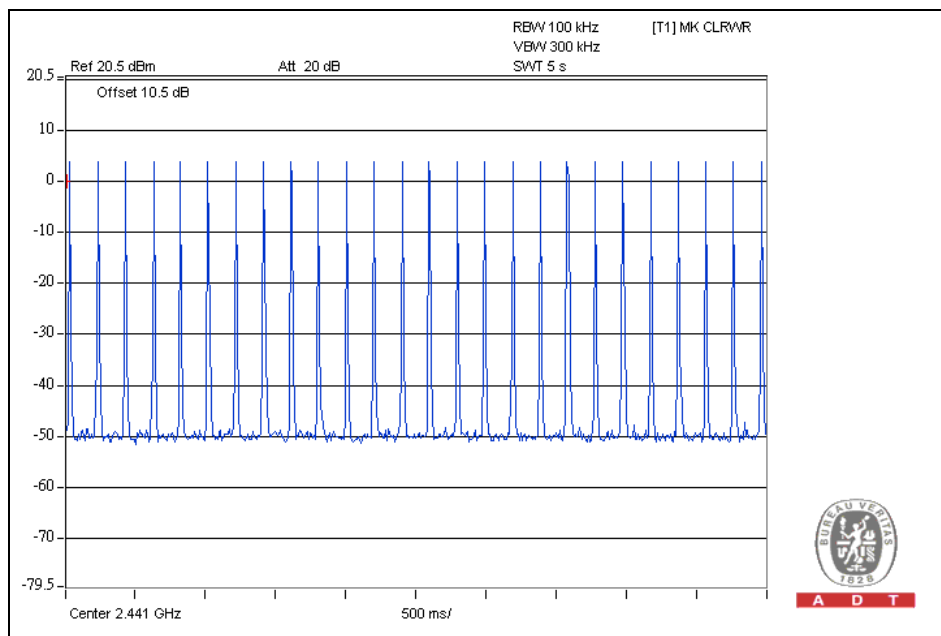

## DH5

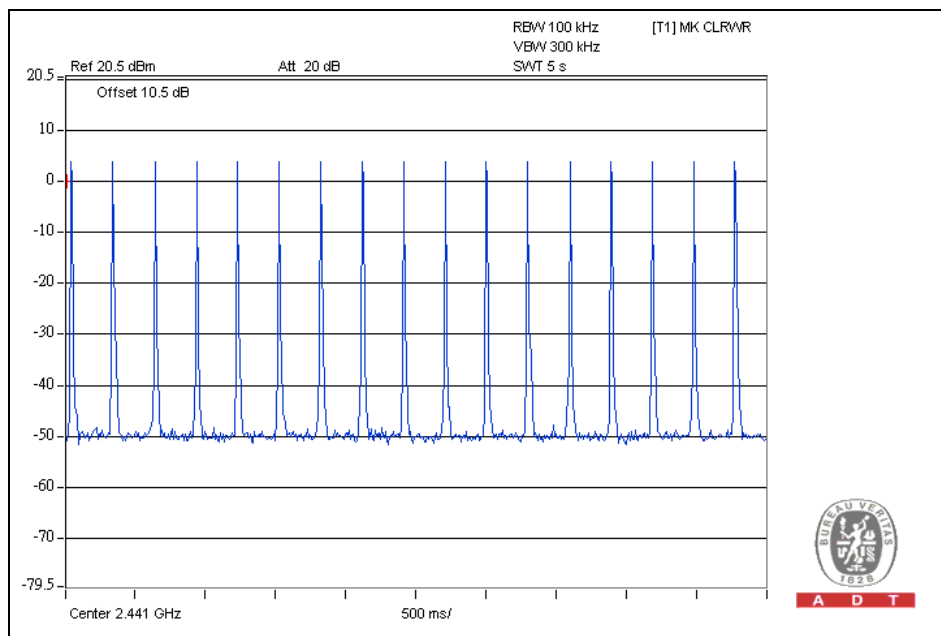

A D T

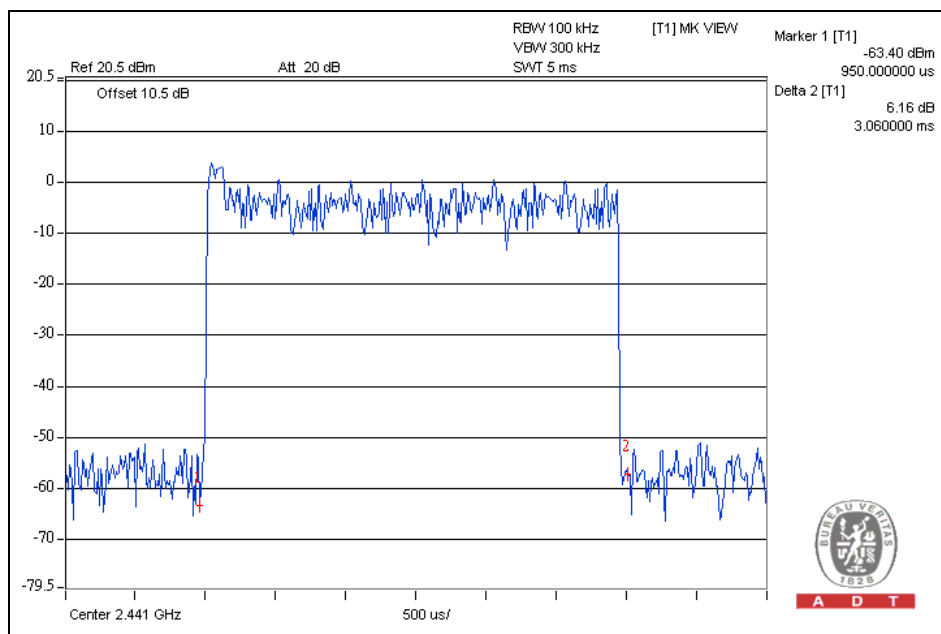

A D T

## 4.4 CHANNEL BANDWIDTH

### 4.4.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the two-thirds 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

### 4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 08, 2010	Dec. 07, 2011

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.4.3 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation



#### 4.4.5 TEST SETUP



#### 4.4.6 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

#### 4.4.7 TEST RESULTS

For GFSK:

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	0.88
39	2441	0.89
78	2480	0.89


#### Channel 78

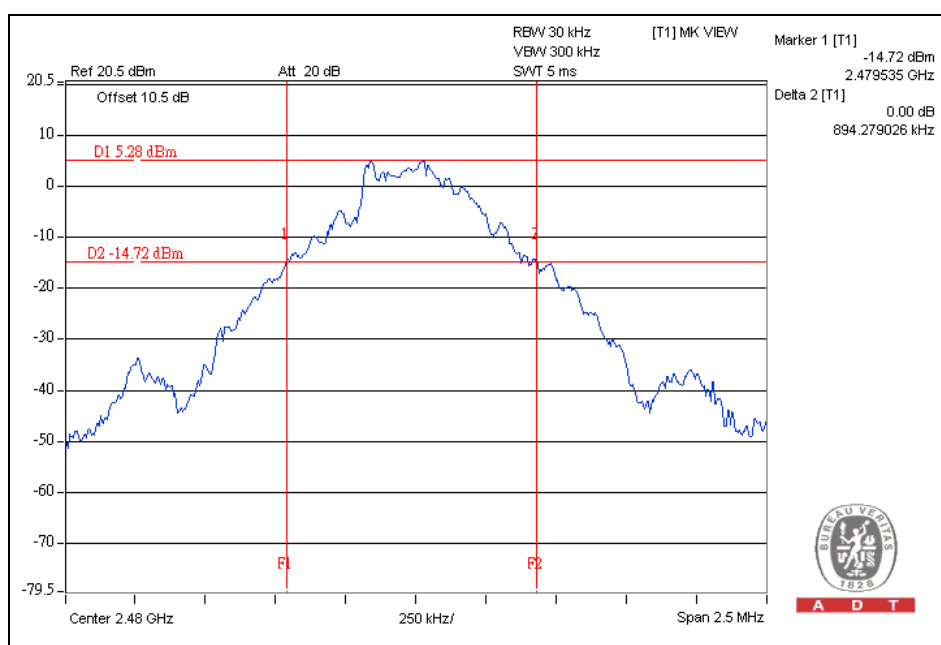

For 8DPSK:

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	1.30
39	2441	1.28
78	2480	1.29


Channel 0

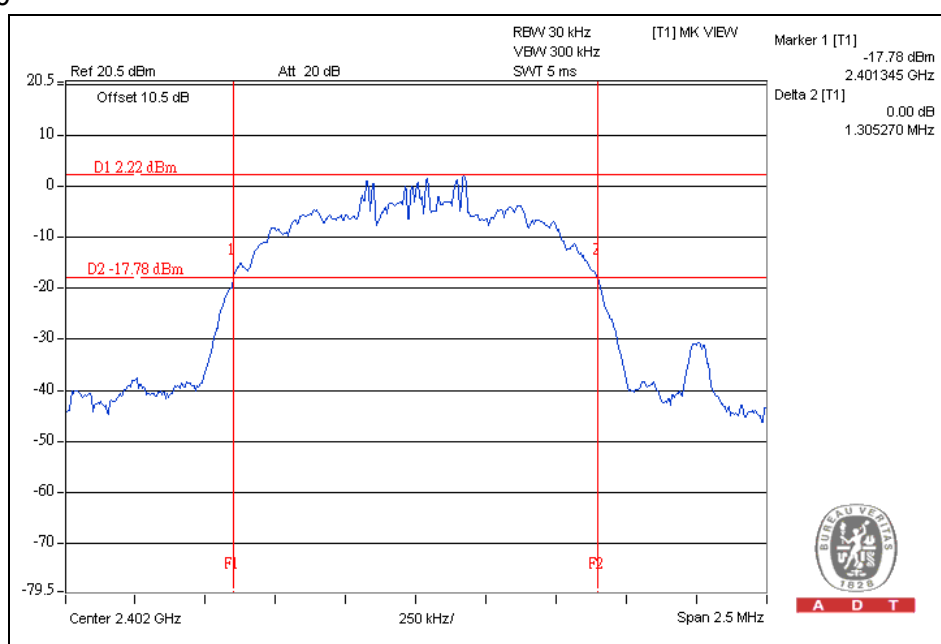

For  $\pi/4$ -DQPSK:

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	1.29
39	2441	1.26
78	2480	1.32

Channel 78

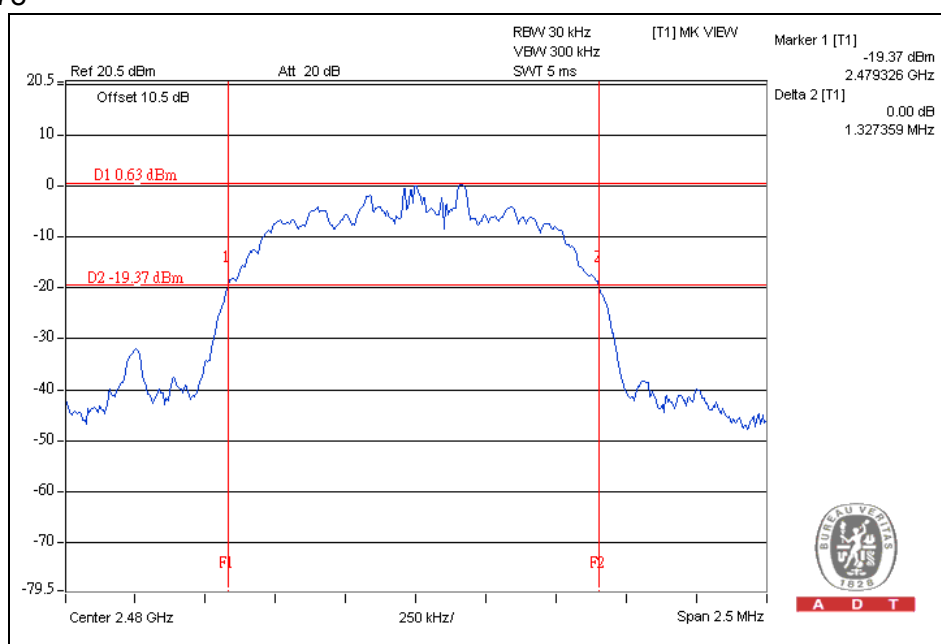

## 4.5 HOPPING CHANNEL SEPARATION

### 4.5.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25 kHz or two-thirds of 20dB hopping channel bandwidth (whichever is greater).

### 4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 08, 2010	Dec. 07, 2011

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


### 4.5.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.5.5 TEST SETUP




## 4.5.6 TEST RESULTS

### For GFSK

Channel	Frequency (MHz)	Adjacent Channel Separation (MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	1.000	0.587	PASS
39	2441	1.003	0.593	PASS
78	2480	1.008	0.593	PASS

The minimum limit is two-thirds of 20dB bandwidth. Test results please refer to below chart.

### Channel 78

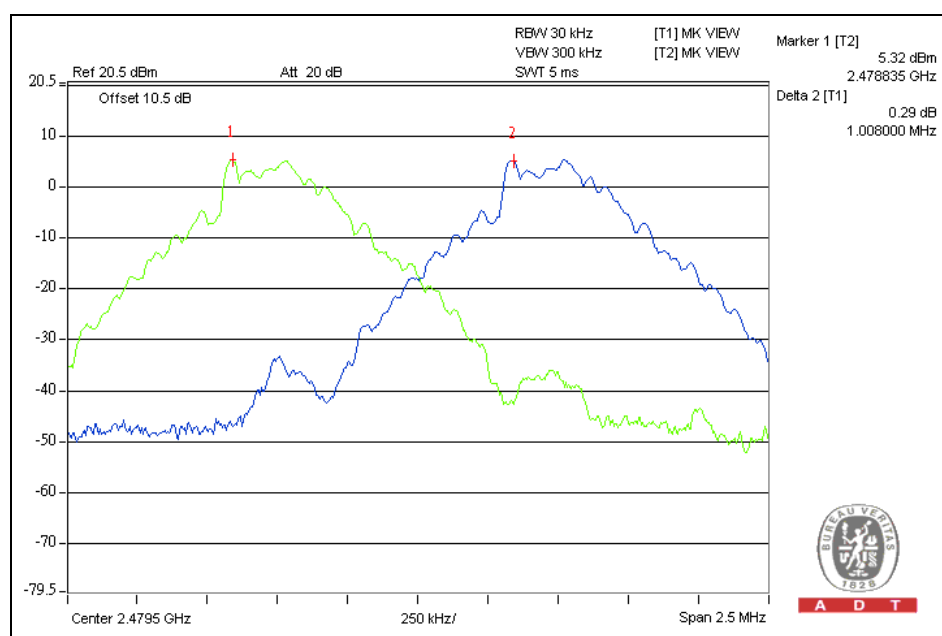


# For 8DPSK

Channel	Frequency (MHz)	Adjacent Channel Separation (MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	1.000	0.867	PASS
39	2441	1.007	0.853	PASS
78	2480	1.004	0.860	PASS

The minimum limit is two-thirds of 20dB bandwidth. Test results please refer to below chart.

## Channel 39

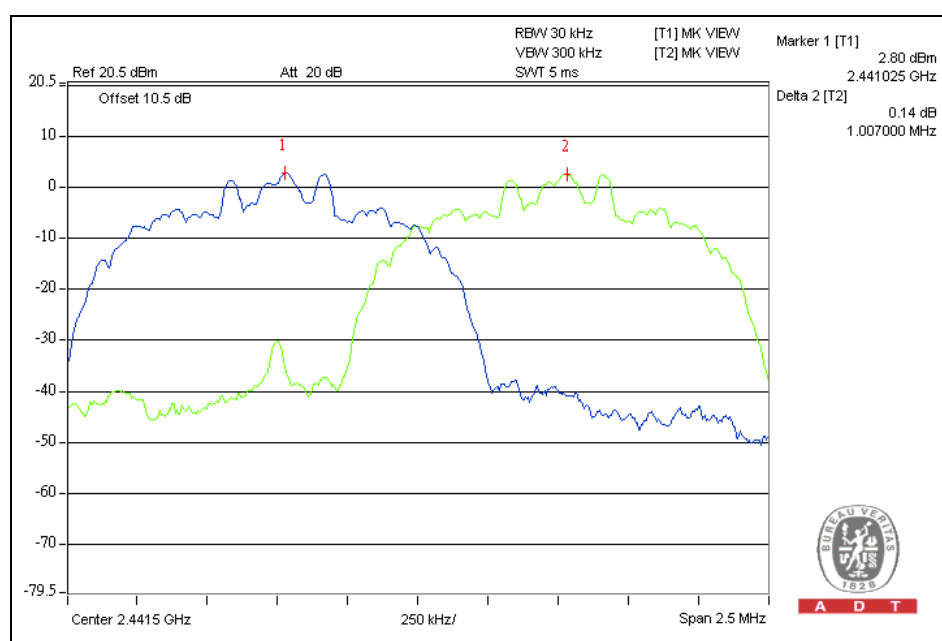


### For $\pi/4$ -DQPSK

Channel	Frequency (MHz)	Adjacent Channel Separation (MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	1.002	0.860	PASS
39	2441	1.000	0.840	PASS
78	2480	1.006	0.880	PASS

The minimum limit is two-thirds of 20dB bandwidth. Test results please refer to below chart.

### Channel 78

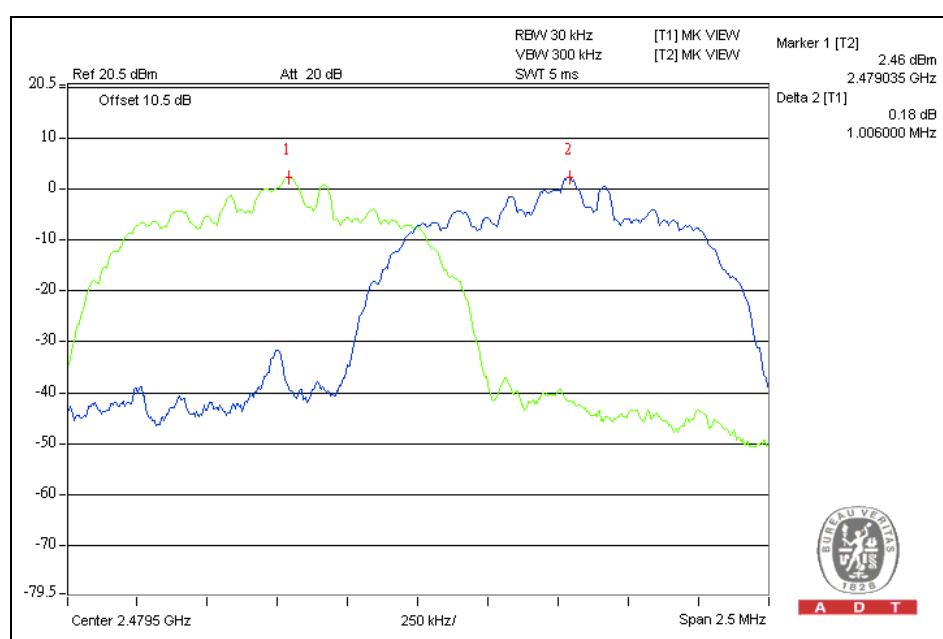



## 4.6 MAXIMUM PEAK OUTPUT POWER

### 4.6.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Limit is 125mW.

### 4.6.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 08, 2010	Dec. 07, 2011

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


### 4.6.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3 MHz RBW and 10 MHz VBW.
4. Measure the captured power within the band and recording the plot.
5. Repeat above procedures until all frequencies measured were complete.

### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.6.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

#### 4.6.6 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

## 4.6.7 TEST RESULTS

### For GFSK

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER OUTPUT (mW)	PEAK POWER LIMIT (mW)	PASS/FAIL
0	2402	7.3	5.4	125	PASS
39	2441	7.3	5.4	125	PASS
78	2480	7.0	5.0	125	PASS


### Channel 0

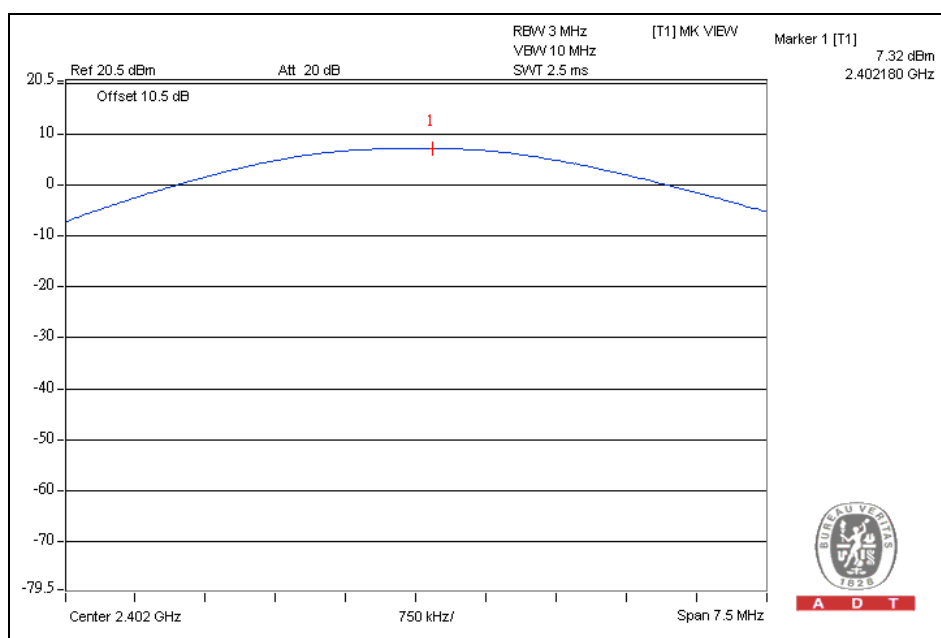

# For 8DPSK

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER OUTPUT (mW)	PEAK POWER LIMIT (mW)	PASS/FAIL
0	2402	5.9	3.9	125	PASS
39	2441	5.7	3.7	125	PASS
78	2480	5.5	3.5	125	PASS


## Channel 0

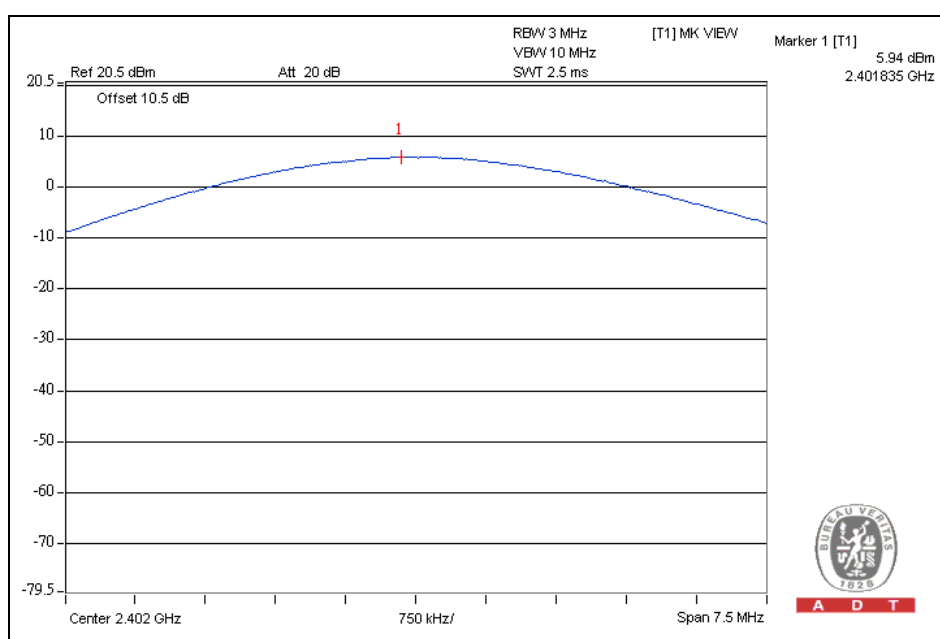

# For $\pi/4$ -DQPSK

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER OUTPUT (mW)	PEAK POWER LIMIT (mW)	PASS/FAIL
0	2402	5.5	3.5	125	PASS
39	2441	5.4	3.5	125	PASS
78	2480	5.0	3.2	125	PASS

## Channel 0

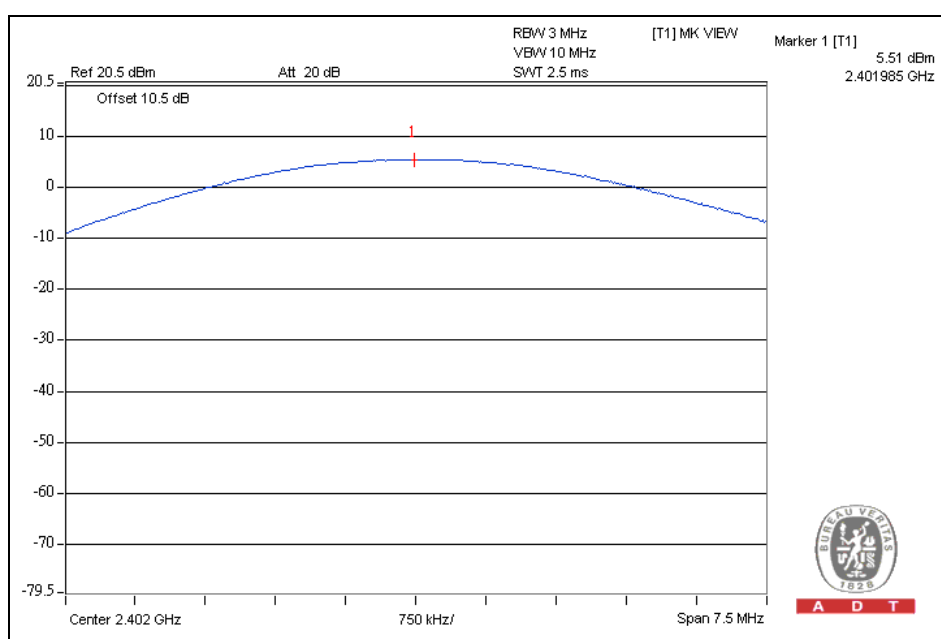

## 4.7 RADIATED EMISSION MEASUREMENT

### 4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	$2400/F(\text{kHz})$	300
0.490-1.705	$24000/F(\text{kHz})$	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

1. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
2. Section 15.205 restricted bands of operation shall compliance with the limits in Section 15.209.



#### 4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250253	Aug. 23, 2010	Aug. 22, 2011
Agilent Pre-Selector	N9039A	MY46520310	Aug. 23, 2010	Aug. 22, 2011
Agilent Signal Generator	N5181A	MY49060347	July 30, 2010	July 29, 2011
LIG NEX1 Test Receiver	ER-265	L09068005	Oct. 25, 2010	Oct. 24, 2011
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-04	Nov. 16, 2010	Nov. 15, 2011
Agilent Pre-Amplifier	8449B	3008A02465	Feb. 28, 2011	Feb. 27, 2012
Miteq Pre-Amplifier	AFS33-1800265 0-30-8P-44	881786	NA	NA
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-361	Apr. 14, 2011	Apr. 13, 2012
AISI Horn_Antenna	AIH.8018	000022009111 0	Nov. 22, 2010	Nov. 21, 2011
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 08, 2010	Oct. 07, 2011
RF CABLE	NA	RF104-205 RF104-207 RF104-202	Dec. 28, 2010	Dec. 27, 2011
RF Cable	NA	CHHCAB_001	NA	NA
Software	ADT_Radiated_ V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in 966 Chamber No. H.

4. The FCC Site Registration No. is 797305.

5. The CANADA Site Registration No. is IC 7450H-3.

#### 4.7.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meters chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

**NOTE:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.

#### 4.7.4 DEVIATION FROM TEST STANDARD

No deviation



#### 4.7.5 TEST SETUP

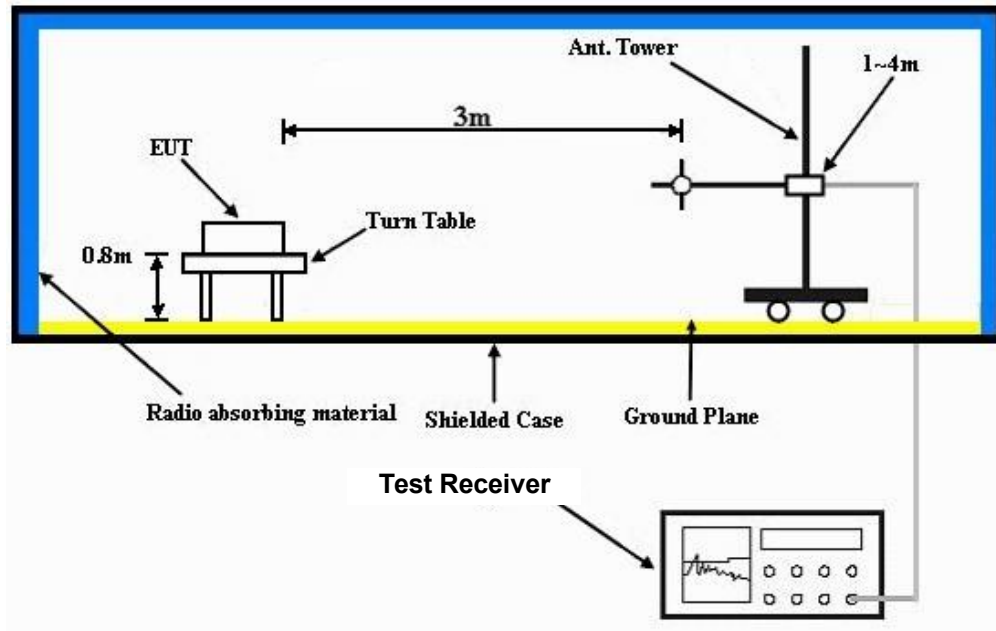

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.7.6 EUT OPERATING CONDITIONS

- Connect the EUT with the support unit 1 (NB) which is placed in test table.
- The support unit 1 (NB) runs test program “InstallBlueSuite2.2.exe” to enable EUT under transmission/receiving condition continuously at specific channel frequency.



A D T

## 4.7.7 TEST RESULTS

### BELOW 1GHz WORST-CASE DATA : GFSK MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1001 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	135.28	31.4 QP	43.5	-12.1	2.00 H	182	17.72	13.68
2	160.26	31.2 QP	43.5	-12.3	1.50 H	293	16.89	14.33
3	200.05	28.6 QP	43.5	-14.9	1.50 H	229	17.37	11.21
4	538.63	34.0 QP	46.0	-12.1	1.50 H	360	13.59	20.36
5	549.40	35.4 QP	46.0	-10.6	1.50 H	360	14.84	20.60
6	591.92	35.0 QP	46.0	-11.0	1.50 H	360	13.60	21.44
7	<b>613.35</b>	<b>36.6 QP</b>	<b>46.0</b>	<b>-9.4</b>	<b>1.00 H</b>	<b>360</b>	<b>14.91</b>	<b>21.67</b>
8	847.95	33.2 QP	46.0	-12.8	1.00 H	360	8.08	25.12
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	46.34	30.2 QP	40.0	-9.8	1.00 V	266	16.04	14.20
2	183.95	28.8 QP	43.5	-14.7	1.50 V	0	16.36	12.43
3	215.92	29.3 QP	43.5	-14.2	1.00 V	360	17.49	11.79
4	330.44	31.2 QP	46.0	-14.8	1.50 V	257	15.39	15.84
5	570.72	32.8 QP	46.0	-13.2	1.00 V	109	11.82	21.02
6	599.97	33.3 QP	46.0	-12.7	1.25 V	42	11.72	21.60
7	849.01	32.3 QP	46.0	-13.8	1.25 V	192	7.12	25.13
8	895.08	30.1 QP	46.0	-15.9	1.50 V	295	4.39	25.73

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
 3. The other emission levels were very low against the limit.  
 4. Margin value = Emission level – Limit value.



A D T

## GFSK MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH 1001 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.54	56.8 PK	74.0	-17.2	1.16 H	14	25.60	31.20
2	2386.54	26.7 AV	54.0	-27.3	1.16 H	14	-4.50	31.20
3	*2402.00	105.9 PK			1.16 H	14	74.65	31.25
4	*2402.00	75.8 AV			1.16 H	14	44.55	31.25
5	4804.00	54.1 PK	74.0	-19.9	1.03 H	265	14.75	39.35
6	4804.00	24.0 AV	54.0	-30.0	1.03 H	265	-15.35	39.35
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.6 PK	74.0	-18.4	1.74 V	342	24.39	31.21
2	2390.00	25.5 AV	54.0	-28.5	1.74 V	342	-5.71	31.21
3	*2402.00	98.7 PK			1.74 V	342	67.45	31.25
4	*2402.00	68.6 AV			1.74 V	342	37.35	31.25
5	4804.00	57.2 PK	74.0	-16.8	1.74 V	307	17.85	39.35
6	4804.00	27.1 AV	54.0	-26.9	1.74 V	307	-12.25	39.35

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH 1001 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	105.6 PK			1.16 H	15	74.25	31.35
2	*2441.00	75.5 AV			1.16 H	15	44.15	31.35
3	4882.00	53.0 PK	74.0	-21.0	1.00 H	78	13.35	39.65
4	4882.00	22.9 AV	54.0	-31.1	1.00 H	78	-16.75	39.65
5	7323.00	52.4 PK	74.0	-21.6	1.00 H	70	8.28	44.12
6	7323.00	22.3 AV	54.0	-31.7	1.00 H	70	-21.82	44.12
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	98.3 PK			1.72 V	344	66.95	31.35
2	*2441.00	68.2 AV			1.72 V	344	36.85	31.35
3	4882.00	56.4 PK	74.0	-17.6	1.76 V	302	16.75	39.65
4	4882.00	26.3 AV	54.0	-27.7	1.76 V	302	-13.35	39.65
5	7323.00	52.8 PK	74.0	-21.2	1.00 V	322	8.68	44.12
6	7323.00	22.7 AV	54.0	-31.3	1.00 V	322	-21.42	44.12

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ”: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .




A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH 1001 hPa	TESTED BY	Rex Huang


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	105.2 PK			1.12 H	12	73.75	31.45
2	*2480.00	75.1 AV			1.12 H	12	43.65	31.45
3	2484.37	58.2 PK	74.0	-15.8	1.12 H	12	26.74	31.46
4	2484.37	28.1 AV	54.0	-25.9	1.12 H	12	-3.36	31.46
5	4960.00	54.8 PK	74.0	-19.2	1.00 H	75	14.83	39.97
6	4960.00	24.7 AV	54.0	-29.3	1.00 H	75	-15.27	39.97
7	7440.00	52.9 PK	74.0	-21.1	1.00 H	94	8.66	44.24
8	7440.00	22.8 AV	54.0	-31.2	1.00 H	94	-21.44	44.24
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	98.1 PK			1.71 V	336	66.65	31.45
2	*2480.00	68.0 AV			1.71 V	336	36.55	31.45
3	2483.50	55.7 PK	74.0	-18.3	1.71 V	336	24.24	31.46
4	2483.50	25.6 AV	54.0	-28.4	1.71 V	336	-5.86	31.46
5	4960.00	58.3 PK	74.0	-15.7	1.77 V	308	18.33	39.97
6	4960.00	28.2 AV	54.0	-25.8	1.77 V	308	-11.77	39.97
7	7440.00	52.9 PK	74.0	-21.1	1.00 V	350	8.66	44.24
8	7440.00	22.8 AV	54.0	-31.2	1.00 V	350	-21.44	44.24

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .


# RESTRICTED BANDEDGE (GFSK MODE, CH0, HORIZONTAL )

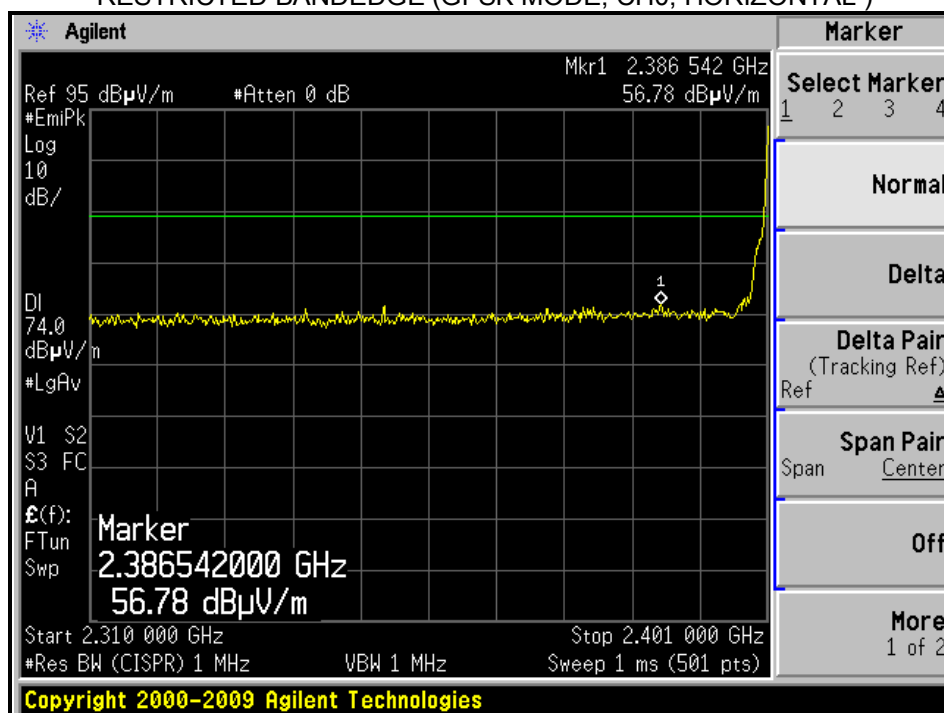


# RESTRICTED BANDEDGE (GFSK MODE, CH0, VERTICAL)

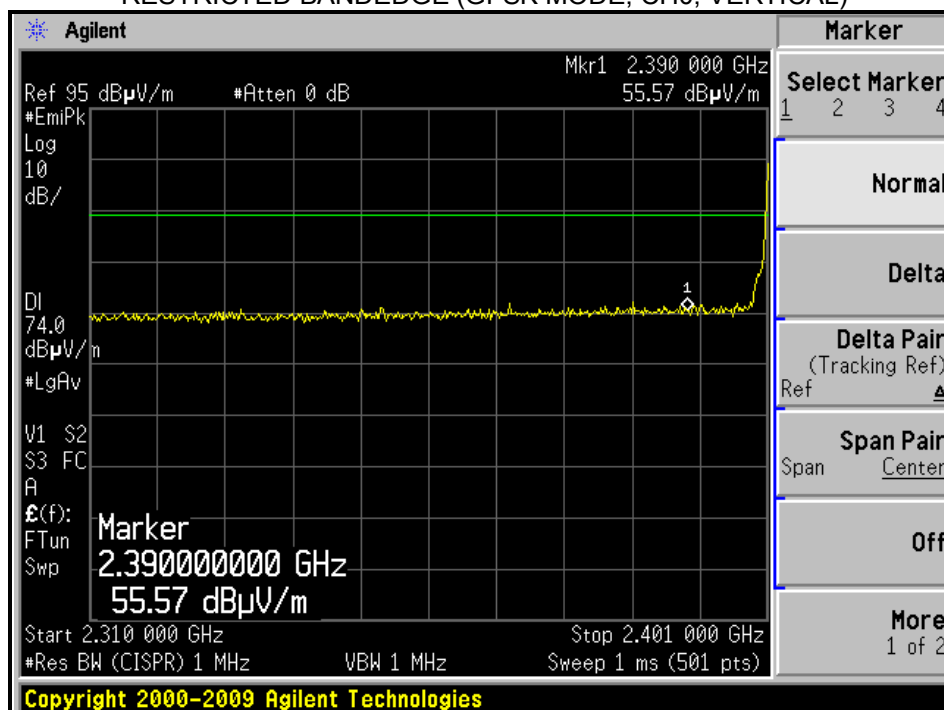

# RESTRICTED BANDEDGE (GFSK MODE, CH78, HORIZONTAL )

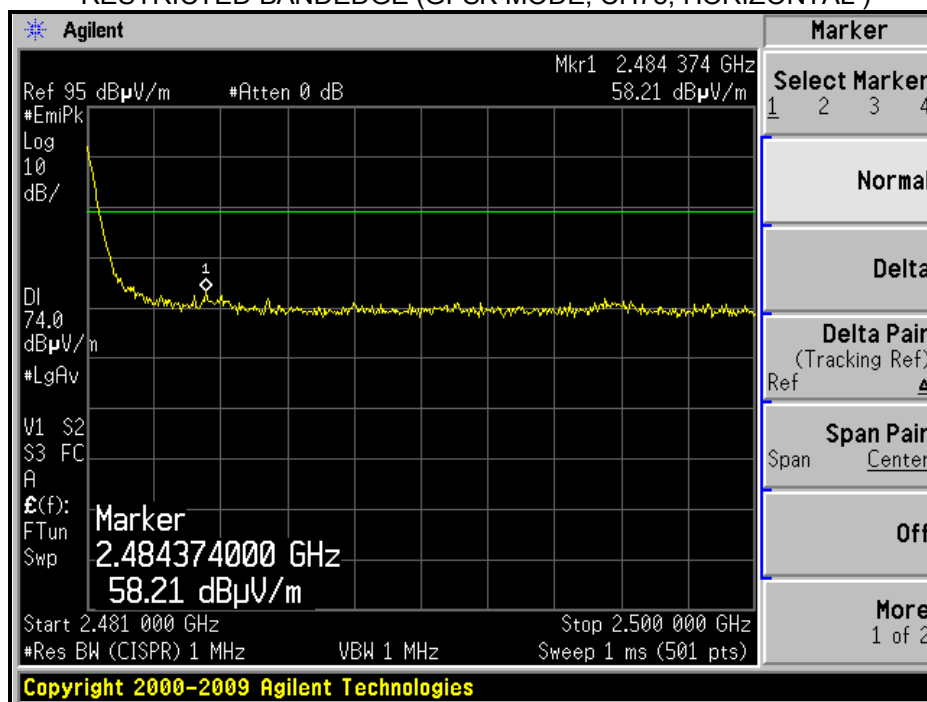

# RESTRICTED BANDEDGE (GFSK MODE, CH78, VERTICAL )

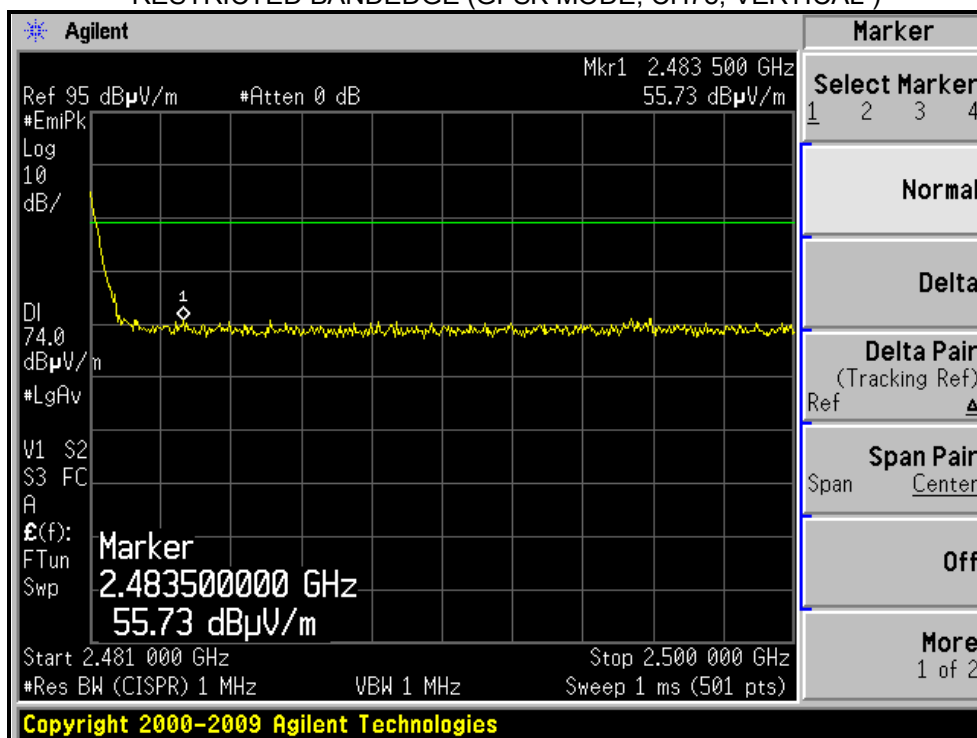

\* The average value of fundamental frequency is: Average value = peak reading + 20log(duty cycle). And it meets the requirement of limit.



A D T

**8DPSK MODULATION**

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH 1001 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2385.89	56.7 PK	74.0	-17.3	1.16 H	15	25.50	31.20
2	2385.89	26.6 AV	54.0	-27.4	1.16 H	15	-4.60	31.20
3	*2402.00	103.9 PK			1.16 H	15	72.65	31.25
4	*2402.00	73.8 AV			1.16 H	15	42.55	31.25
5	4804.00	51.1 PK	74.0	-22.9	1.02 H	263	11.75	39.35
6	4804.00	21.0 AV	54.0	-33.0	1.02 H	263	-18.35	39.35
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.2 PK	74.0	-17.8	1.73 V	342	24.99	31.21
2	2390.00	26.1 AV	54.0	-27.9	1.73 V	342	-5.11	31.21
3	*2402.00	96.5 PK			1.73 V	342	65.25	31.25
4	*2402.00	66.4 AV			1.73 V	342	35.15	31.25
5	4804.00	51.8 PK	74.0	-22.2	1.75 V	304	12.45	39.35
6	4804.00	21.7 AV	54.0	-32.3	1.75 V	304	-17.65	39.35

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .





A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH 1001 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	103.5 PK			1.15 H	16	72.15	31.35
2	*2441.00	73.4 AV			1.15 H	16	42.05	31.35
3	4882.00	50.6 PK	74.0	-23.4	1.00 H	76	10.95	39.65
4	4882.00	20.5 AV	54.0	-33.5	1.00 H	76	-19.15	39.65
5	7323.00	52.6 PK	74.0	-21.4	1.03 H	87	8.48	44.12
6	7323.00	22.5 AV	54.0	-31.5	1.03 H	87	-21.62	44.12
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	95.9 PK			1.71 V	343	64.55	31.35
2	*2441.00	65.8 AV			1.71 V	343	34.45	31.35
3	4882.00	51.7 PK	74.0	-22.3	1.70 V	293	12.05	39.65
4	4882.00	21.6 AV	54.0	-32.4	1.70 V	293	-18.05	39.65
5	7323.00	52.5 PK	74.0	-21.5	1.00 V	329	8.38	44.12
6	7323.00	22.4 AV	54.0	-31.6	1.00 V	329	-21.72	44.12

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ”: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1 \text{ dB}$ .
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .




A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH 1001 hPa	TESTED BY	Rex Huang


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	102.5 PK			1.13 H	12	71.05	31.45
2	*2480.00	72.4 AV			1.13 H	12	40.95	31.45
3	2483.50	55.6 PK	74.0	-18.4	1.13 H	12	24.14	31.46
4	2483.50	25.5 AV	54.0	-28.5	1.13 H	12	-5.96	31.46
5	4960.00	51.5 PK	74.0	-22.5	1.00 H	77	11.53	39.97
6	4960.00	21.4 AV	54.0	-32.6	1.00 H	77	-18.57	39.97
7	7440.00	52.5 PK	74.0	-21.5	1.08 H	93	8.26	44.24
8	7440.00	22.4 AV	54.0	-31.6	1.08 H	93	-21.84	44.24
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	95.5 PK			1.71 V	337	64.05	31.45
2	*2480.00	65.4 AV			1.71 V	337	33.95	31.45
3	2483.50	54.9 PK	74.0	-19.1	1.71 V	337	23.44	31.46
4	2483.50	24.8 AV	54.0	-29.2	1.71 V	337	-6.66	31.46
5	4960.00	52.9 PK	74.0	-21.1	1.79 V	320	12.93	39.97
6	4960.00	22.8 AV	54.0	-31.2	1.79 V	320	-17.17	39.97
7	7440.00	52.7 PK	74.0	-21.3	1.00 V	340	8.46	44.24
8	7440.00	22.6 AV	54.0	-31.4	1.00 V	340	-21.64	44.24

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on  $0.625 * 5$  per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .


# RESTRICTED BANDEDGE (GFSK MODE, CH0, HORIZONTAL )

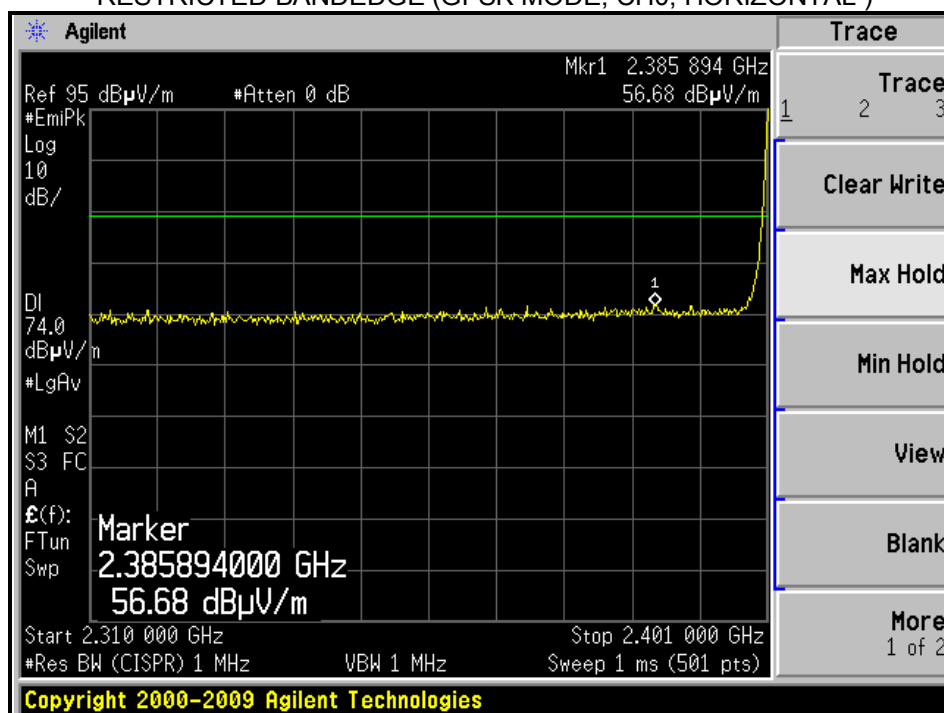


# RESTRICTED BANDEDGE (GFSK MODE, CH0, VERTICAL)

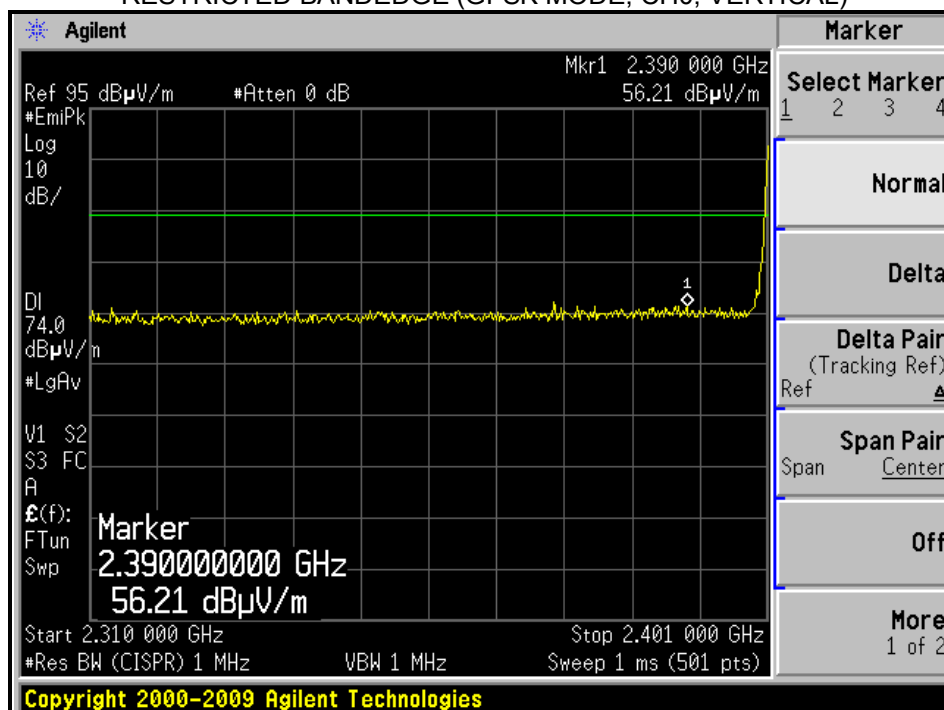

# RESTRICTED BANDEDGE (GFSK MODE, CH78, HORIZONTAL )

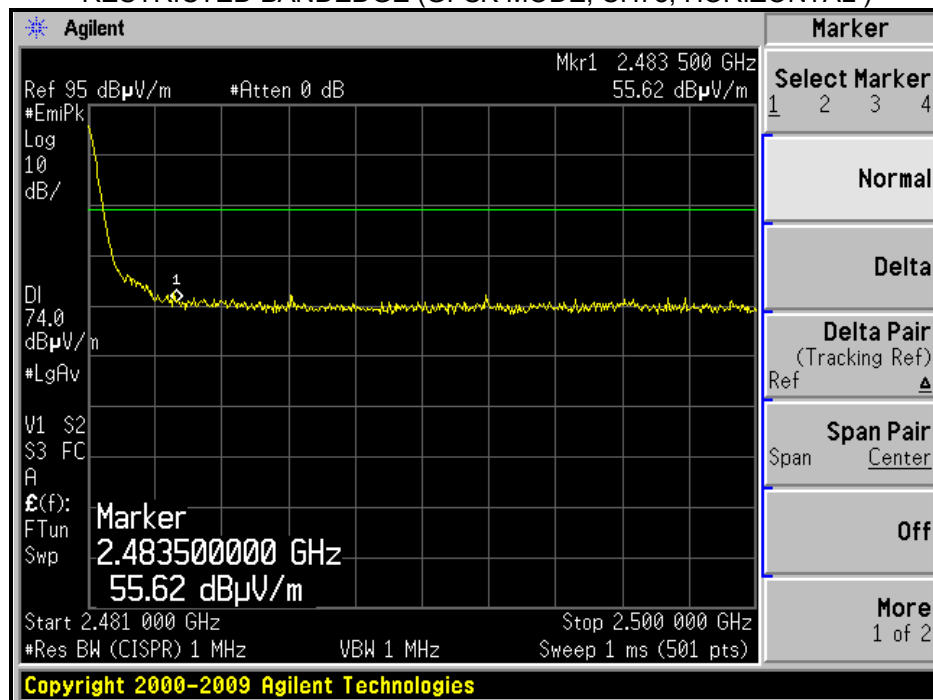

# RESTRICTED BANDEDGE (GFSK MODE, CH78, VERTICAL )

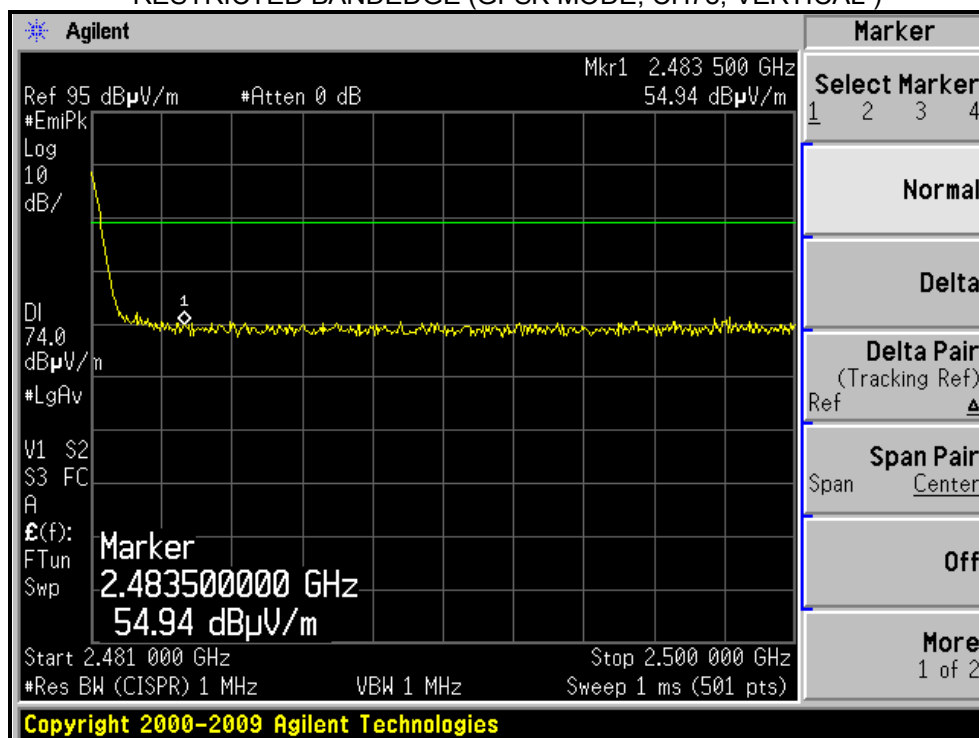

\* The average value of fundamental frequency is: Average value = peak reading + 20log(duty cycle). And it meets the requirement of limit.

## 4.8 CONDUCTED OUT-BAND EMISSION MEASUREMENT

### 4.8.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below  $-20\text{dB}$  of the highest emission level of operating band (in 100kHz RBW).

### 4.8.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 08, 2010	Dec. 07, 2011

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set RBW of spectrum analyzer to 100 kHz and VBW of spectrum analyzer to 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges were measured and recorded.

### 4.8.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.8.5 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

## 4.8.6 TEST RESULTS


Emissions radiated outside of the specified frequency bands, please refer following pages for met the requirement of the general radiated emission limits in § 15.209.

**For GFSK Modulation Type:**


CH 0

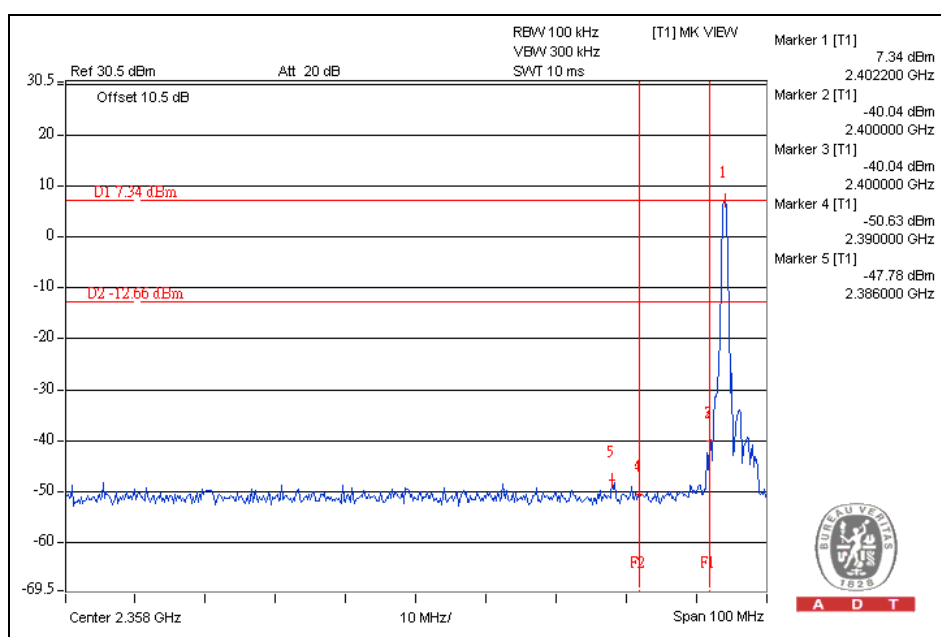


CH 78

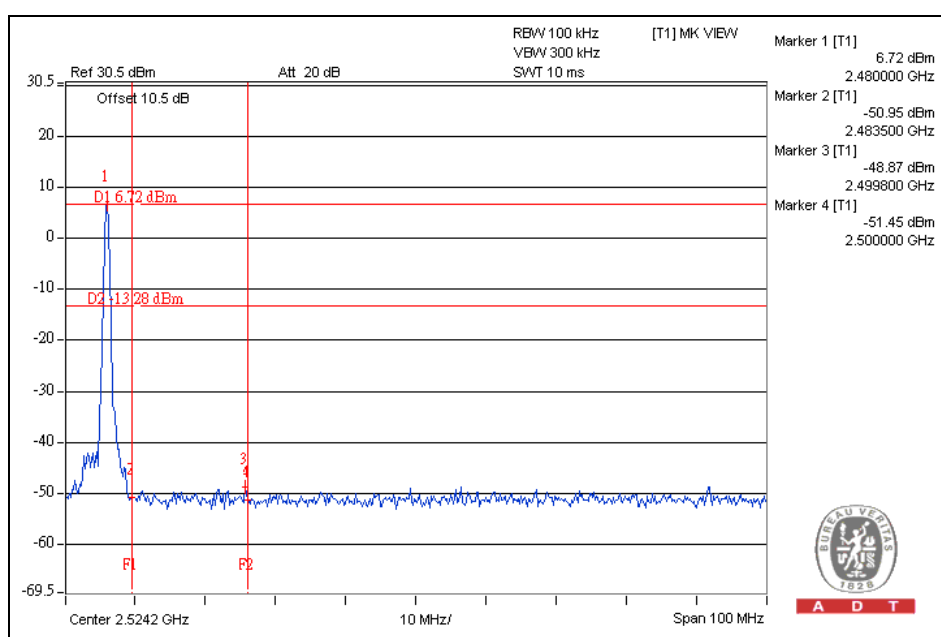

## CH 0

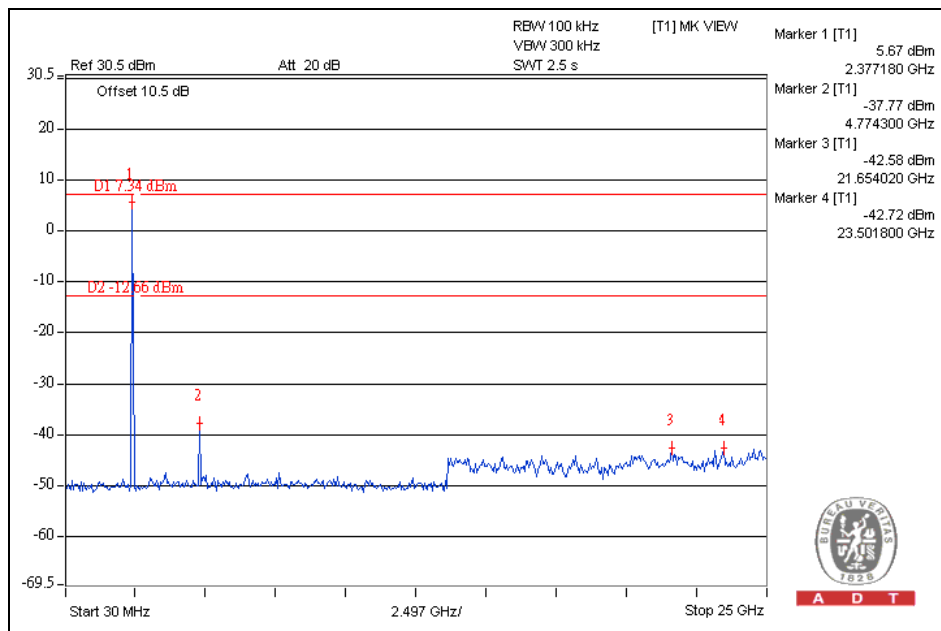


## CH 78

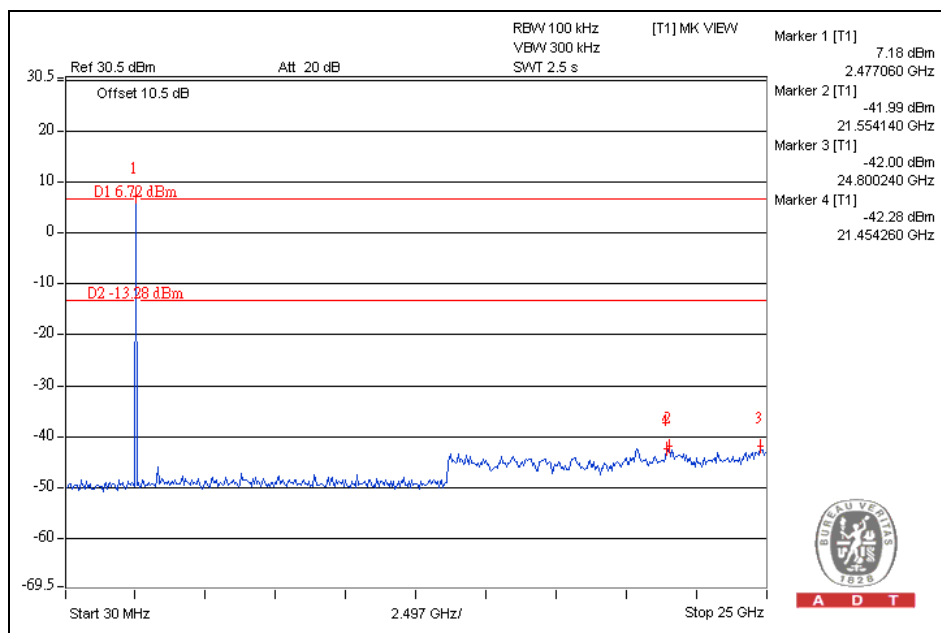


# For 8DPSK Modulation Type:

CH 0

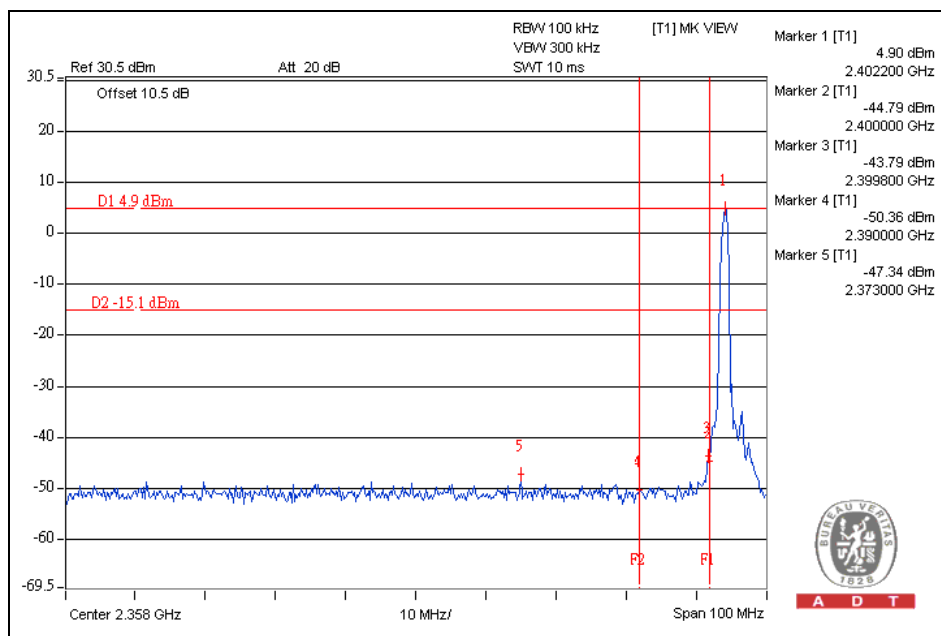

CH 78

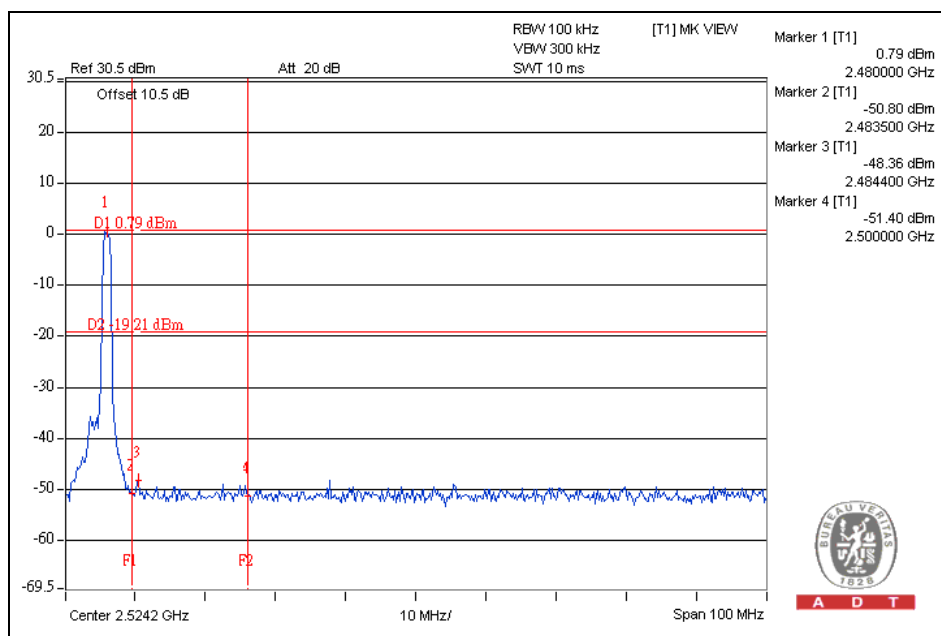







A D T

CH 0

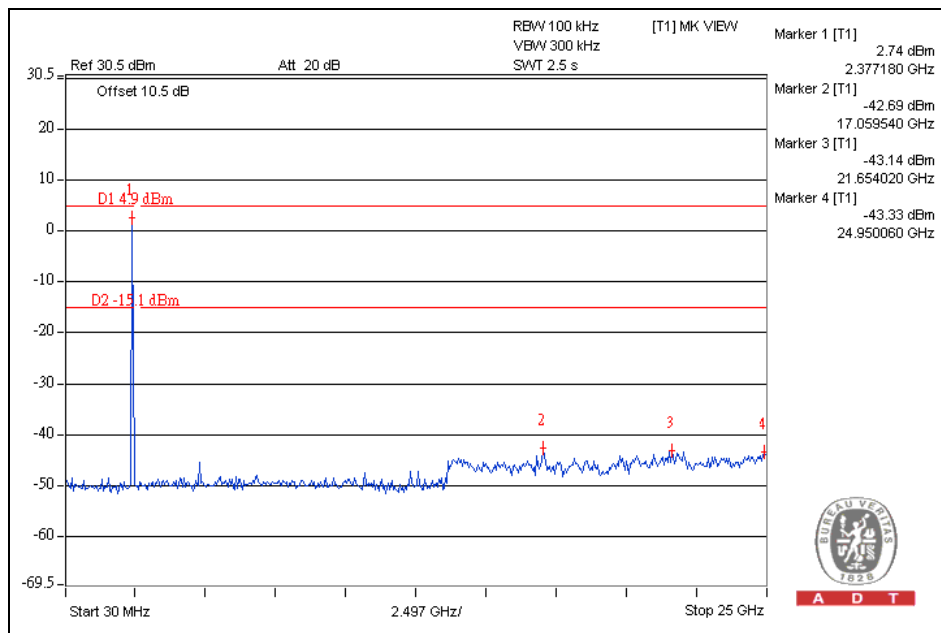

A D T

CH 78

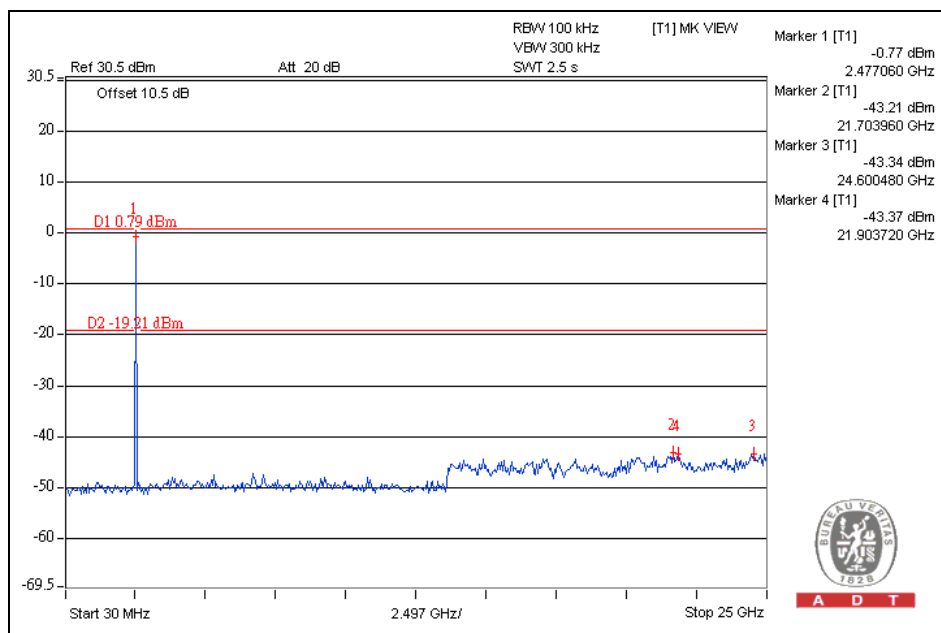

A D T

## 5 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: [www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml).  
If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3185050

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.

## **6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.

**--- END ---**