

Logitech, Inc.

MN: A-0363D Game Port Dongle

September 18, 2005

Report No. LABT0149.1

Report Prepared By



www.nwemc.com
1-888-EMI-CERT

© 2005 Northwest EMC, Inc

EMC Test Report



22975 NW Evergreen Parkway
Suite 400
Hillsboro, Oregon 97124

Certificate of Test
Issue Date: September 18, 2005
Logitech, Inc.
Model: MN: A-0363D Game Port Dongle

Emissions			
Specification	Test Method	Pass	Fail
FCC 15.247(a) Occupied Bandwidth:2005-04	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.247(b) Output Power:2005-04	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.247(d) Band Edge Compliance:2005-04	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.247(d) Spurious Conducted Emissions:2005-04	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.247(d) Spurious Radiated Emissions:2005-04	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.247(e) Power Spectral Density:2005-04	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.207 AC Powerline Conducted Emissions:2005-04	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.107 Class B:2005-04 AC Powerline Conducted Emissions	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.109(g) (CISPR 22:1997) Class B:2005-04 Radiated Emissions	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Modifications made to the product

See the Modifications section of this report

Test Facility

The measurement facility used to collect the data is located at:

Northwest EMC, Inc.
22975 NW Evergreen Parkway, Suite 400; Hillsboro, OR 97124
Phone: (503) 844-4066
Fax: 844-3826

This site has been fully described in a report filed with and accepted by the FCC (Federal Communications Commission) and Industry Canada.

Approved By:

Greg Kiemel, Director of Engineering

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.

Product compliance is the responsibility of the client, therefore the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. This Report may only be duplicated in its entirety. The results of this test pertain only to the sample(s) tested, the specific description is noted in each of the individual sections of the test report supporting this certificate of test.

Revision Number	Description	Date	Page Number
00			

FCC: Accredited by NVLAP for performance of FCC radio, digital, and ISM device testing. Our Open Area Test Sites, certification chambers, and conducted measurement facilities have been fully described in reports filed with the FCC and accepted by the FCC in letters maintained in our files. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by the FCC as a Telecommunications Certification Body (TCB). This allows Northwest EMC to certify transmitters to FCC specifications in accordance with 47 CFR 2.960 and 2.962.



NVLAP: Northwest EMC, Inc. is recognized under the United States Department of Commerce, National Institute of Standards and Technology, and National Voluntary Laboratory Accreditation Program for satisfactory compliance with the requirements of ISO/IEC 17025 for Testing Laboratories. The NVLAP accreditation encompasses Electromagnetic Compatibility Testing in accordance with the European Union EMC Directive 89/336/EEC, ANSI C63.4, MIL-STD 461E, DO-160D and SAE J1113. Additionally, Northwest EMC is accredited by NVLAP to perform radio testing in accordance with the European Union R&TTE Directive 1999/5/EEC, the requirements of FCC, and the RSS radio standards for Industry Canada.



200629-0
200630-0
200676-0

Industry Canada: Accredited by NVLAP for performance of Industry Canada RSS and ICES testing. Our Open Area Test Sites and certification chambers comply with RSS 212, Issue 1 (Provisional) and have been filed with Industry Canada and accepted. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by NIST and recognized by Industry Canada as a Certification Body (CB) per the APEC Mutual Recognition Arrangement (MRA). This allows Northwest EMC to certify transmitters to Industry Canada technical requirements.



CAB: Designated by NIST and validated by the European Commission as a Conformity Assessment Body (CAB) to conduct tests and approve products to the EMC directive and transmitters to the R&TTE directive, as described in the U.S. - EU Mutual Recognition Agreement.



TÜV Product Service: Included in TÜV Product Service Group's Listing of Recognized Laboratories. It qualifies in connection with the TÜV Certification after Recognition of Agent's Testing Program for the product categories and/or standards shown in TÜV's current Listing of CARAT Laboratories, available from TÜV. A certificate was issued to represent that this laboratory continues to meet TÜV's CARAT Program requirements. Certificate No. USA0401C.



TÜV Rheinland: Authorized to carryout EMC tests by order and under supervision of TÜV Rheinland. This authorization is based on "Conditions for EMC-Subcontractors" of November 1992.



NEMKO: Assessed and accredited by NEMKO (Norwegian testing and certification body) for European emissions and immunity testing. As a result of NEMKO's laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification (Authorization No. ELA 119).



Technology International: Assessed in accordance with ISO Guide 25 defining the general international requirements for the competence of calibration and testing laboratories and with ITI assessment criteria LACO196. Based upon that assessment, Interference Technology International, Ltd., has granted approval for specifications implementing the EU Directive on EMC (89/336/EEC and amendments). The scope of the approval was provided on a Schedule of Assessment supplied with the certificate and is available upon request.



Australia/New Zealand: The National Association of Testing Authorities (NATA), Australia has been appointed by the ACA as an accreditation body to accredit test laboratories and competent bodies for EMC standards. Accredited test reports or assessments by competent bodies must carry the NATA logo. Test reports made by an overseas laboratory that has been accredited for the relevant standards by an overseas accreditation body that has a Mutual Recognition Agreement (MRA) with NATA are also accepted as technical grounds for product conformity. The report should be endorsed with the respective logo of the accreditation body (NVLAP).



VCCI: Accepted as an Associate Member to the VCCI, Acceptance No. 564. Conducted and radiated measurement facilities have been registered in accordance with Regulations for Voluntary Control Measures, Article 8. (*Registration Numbers. - Hillsboro: C-1071 and R-1025, Irvine: C-2094 and R-1943, Newberg: C-1877 and R-1760, Sultan: R-871, C-1784 and R-1761.*)



BSMI: Northwest EMC has been designated by NIST and validated by C-Taipei (BSMI) as a CAB to conduct tests as described in the APEC Mutual Recognition Agreement. License No.SL2-IN-E-1017.



GOST: Northwest EMC, Inc. has been assessed and accredited by the Russian Certification bodies Certinform VNIINMASH, CERTINFO, SAMTES, and Federal CHEC, to perform EMC and Hygienic testing for Information Technology Products. As a result of their laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification



SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/scope.asp>

What is measurement uncertainty?


When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. The following statement of measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" value. In the case of transient tests (ESD, EFT, Surge, Voltage Dips and Interruptions), the test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements.

The following documents were the basis for determining the uncertainty levels of our measurements:

- "ISO Guide to the Expression of Uncertainty in Measurements", October 1993
- "NIS81: The Treatment of Uncertainty in EMC Measurements", May 1994
- "IEC CISPR 16-3 A1 f1 Ed.1: Radio-interference measurements and statistical techniques", December 2000

How might measurement uncertainty be applied to test results?

If the diamond marks the measured value for the test and the vertical bars bracket the range of + and - measurement uncertainty, then test results can be interpreted from the diagram below.

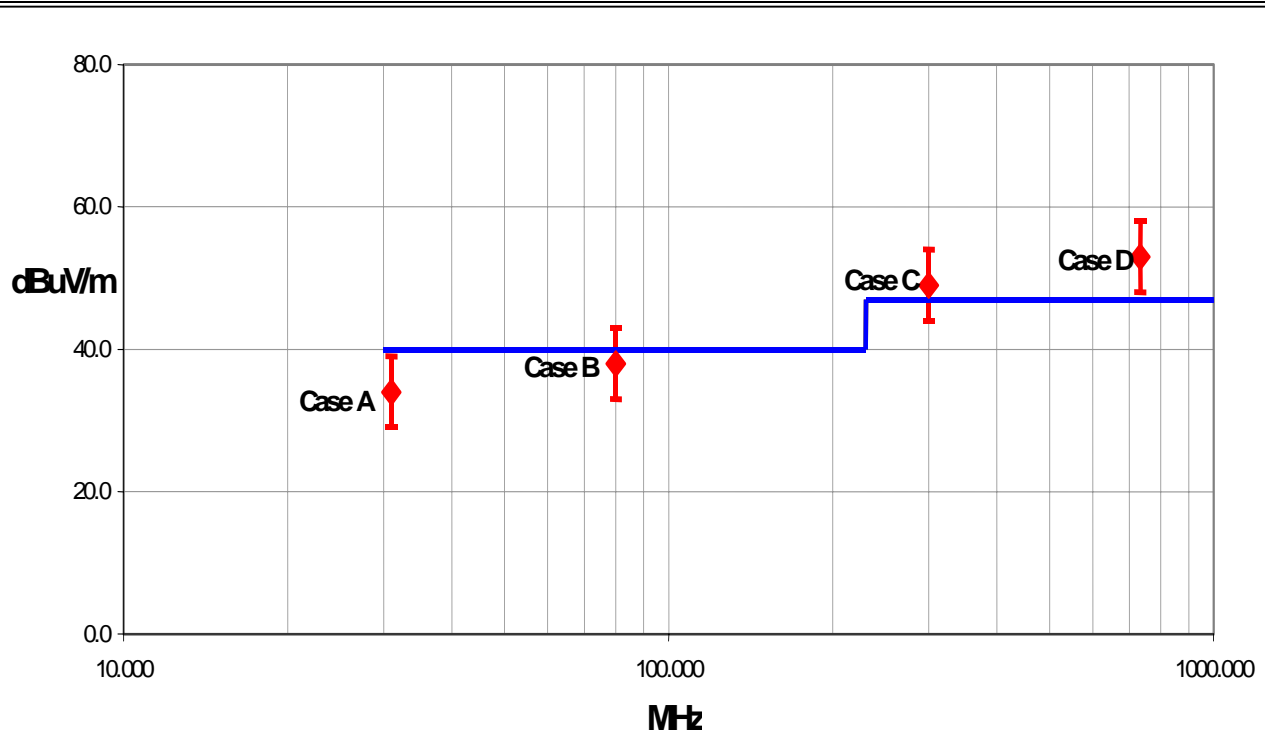

Test Result Scenarios:

Case A: Product complies.

Case B: Product conditionally complies. It is not possible to say with 95% confidence that the product complies.

Case C: Product conditionally does not comply. It is not possible to say with 95% confidence that the product does not comply.

Case D: Product does not comply.

Radiated Emissions ≤ 1 GHz

Value (dB)

Test Distance	Probability Distribution	Biconical Antenna		Log Periodic Antenna		Dipole Antenna	
		3m	10m	3m	10m	3m	10m
Combined standard uncertainty $u_c(y)$	normal	+ 1.86	+ 1.82	+ 2.23	+ 1.29	+ 1.31	+ 1.25
		- 1.88	- 1.87	- 1.41	- 1.26	- 1.27	- 1.25
Expanded uncertainty U (level of confidence ≈ 95%)	normal (k=2)	+ 3.72	+ 3.64	+ 4.46	+ 2.59	+ 2.61	+ 2.49
		- 3.77	- 3.73	- 2.81	- 2.52	- 2.55	- 2.49

Radiated Emissions > 1 GHz

Value (dB)

Test Distance	Probability Distribution	Without High Pass Filter		With High Pass Filter	
		3m	10m	3m	10m
Combined standard uncertainty $u_c(y)$	normal	+ 1.29	+ 1.38	- 1.25	- 1.35
		- 1.25	- 1.35	+ 2.57	+ 2.76
Expanded uncertainty U (level of confidence ≈ 95%)	normal (k=2)	+ 2.57	+ 2.76	- 2.51	- 2.70
		- 2.51	- 2.70		

Conducted Emissions

	Probability Distribution	Value (+/- dB)
Combined standard uncertainty $u_c(y)$	normal	1.48
Expanded uncertainty U (level of confidence ≈ 95 %)	normal (k = 2)	2.97

Radiated Immunity

	Probability Distribution	Value (+/- dB)
Combined standard uncertainty $u_c(y)$	normal	1.05
Expanded uncertainty U (level of confidence ≈ 95 %)	normal (k = 2)	2.11

Conducted Immunity

	Probability Distribution	Value (+/- dB)
Combined standard uncertainty $u_c(y)$	normal	1.05
Expanded uncertainty U (level of confidence ≈ 95 %)	normal (k = 2)	2.10

Legend

$u_c(y)$ = square root of the sum of squares of the individual standard uncertainties

U = combined standard uncertainty multiplied by the coverage factor: k . This defines an interval about the measured result that will encompass the true value with a confidence level of approximately 95%. If a higher level of confidence is required, then $k=3$ (CL of 99.7%) can be used. Please note that with a coverage factor of one, $u_c(y)$ yields a confidence level of only 68%.



California

Orange County Facility

Labs OC01 – OC13

41 Tesla Ave.
Irvine, CA 92618
(888) 364-2378
FAX (503) 844-3826



Oregon

Evergreen Facility

Labs EV01 – EV10

22975 NW Evergreen Pkwy.
Suite 400
Hillsboro, OR 97124
(503) 844-4066
FAX (503) 844-3826



Oregon

Trails End Facility

Labs TE01 – TE03

30475 NE Trails End Lane
Newberg, OR 97132
(503) 844-4066
FAX (503) 537-0735



Washington

Sultan Facility

Labs SU01 – SU07

14128 339th Ave. SE
Sultan, WA 98294
(888) 364-2378
FAX (360) 793-2536

Party Requesting the Test

Company Name:	Logitech, Inc.
Address:	1499 SE Tech Center Place Suite 350
City, State, Zip:	Vancouver, WA 98683
Test Requested By:	Mitchell Phillipi
Model:	MN: A-0363D Game Port Dongle
First Date of Test:	August 11, 2005
Last Date of Test:	September 10, 2005
Receipt Date of Samples:	August 10, 2005
Equipment Design Stage:	Pre-Production
Equipment Condition:	No visual damage.

Information Provided by the Party Requesting the Test

Clocks/Oscillators:	Not provided.
I/O Ports:	Combination power and I/O port

Functional Description of the EUT (Equipment Under Test):

Bluetooth enabled game port dongle for Xbox game systems.

Client Justification for EUT Selection:

The product is an engineering sample, representative of the final product.

Client Justification for Test Selection:

These tests satisfy the requirements for FCC certification.

Equipment modifications					
Item	Test	Date	Modification	Note	Disposition of EUT
1	Band Edge Compliance	08/11/2005	No EMI suppression devices were added or modified during this test.	Same configuration as delivered.	EUT remained at Northwest EMC.
2	Occupied Bandwidth	08/11/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
3	Spurious Conducted Emissions	08/11/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
4	Power Spectral Density	08/11/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
5	Output Power	08/11/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
6	Spurious Radiated Emissions	08/15/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test. ^{Note 1}	EUT remained at Northwest EMC.
7	Radiated Emissions (DoC)	08/30/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
8	Radiated Emissions (DoC)	09/08/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test..	EUT remained at Northwest EMC.
9	AC Powerline Conducted Emissions	09/10/2005	No EMI suppression devices were added or modified during this test.	Dongle only.	EUT remained at Northwest EMC.

Note 1: The EUT has a modification on the board that allows the test lab to change channels and mode of the Bluetooth radio. This modification is not used for EMI suppression. The modification includes a short cable that is used to plug into a development module in between tests. This cable was balled up during spurious radiated emissions in order to give a better sense of how the EUT will radiate noise in typical test conditions.

Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. All of the EUT parameters listed below were investigated. This includes, but may not be limited to, CPU speeds, video resolution settings, operational modes, and input voltages.

Operating Modes Investigated:

Loop back Mode

Headset Charging

Operating Mode used for Final Test:

Loop back Mode

Power Input Settings Investigated:

230 VAC, 50 Hz to Xbox, 230VAC to charging headset

230 VAC, 50 Hz to Xbox, Headset on battery

120 VAC, 60 Hz to Xbox, 120VAC to charging headset

120 VAC, 60 Hz to Xbox, Headset on battery

Input Power Setting used for Final Test:

230 VAC, 50 Hz to Xbox, Headset on battery

120 VAC, 60 Hz to Xbox, Headset on battery

Frequency Range Investigated

Start Frequency	Stop Frequency
30 MHz	1 GHz

Software\Firmware Applied During Test

Operating system	Version
Unknown	Unknown

Exercise software	Version
Voice Loop back Software	Unknown

Description

The system was tested using Voice Loop back Software on the Xbox to exercise the functions of the device during the testing.

EUT and Peripherals in Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
Bluetooth Headset	Logitech, Inc.	A-0363C	Unknown
EUT - Bluetooth Dongle	Logitech, Inc.	A-0363D	Unknown
Controller	Microsoft	Unknown	751412929A
Xbox - EU	Microsoft	Unknown	412407321303
Television	Thomson	418X-TX807C	3244480104088
US AC Adapter (used during headset charging mode)	Logitech, Inc.	AU055V150T	Unknown
EU AC Adapter (used during headset charging mode)	Logitech, Inc.	P925BW05050ABD3	Unknown
Xbox - US	Microsoft	Unknown	393229733206

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Power	No	1.4	No	Xbox	AC Mains
AC Power	No	2.0	No	Television	AC Mains
Video	No	2.0	No	Xbox	Television
Control	No	2.6	Yes	Controller	Xbox
DC Power (used only during charging mode)	No	1.2	No	EU AC Adapter	Headset
DC Power (used only during charging mode)	No	1.4	No	US AC Adapter	Headset
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

Measurement Equipment					
Description	Manufacturer	Model	Identifier	Last Cal	Interval
Antenna, Biconilog	EMCO	3141	AXE	12/03/2003	24 mo
Pre-Amplifier	Miteq	AM-1616-1000	AOL	08/02/2005	13 mo
Spectrum Analyzer	Agilent	E4446A	AAQ	04/08/2005	13 mo

Test Description


The final radiated emissions test was performed using the parameters described above as worst case. That final test was conducted at a facility that meets the ANSI C63.4 NSA requirements. The frequency range noted in the data sheets was scanned/tested at that facility. Emissions were maximized as specified, by maximizing table azimuth, antenna height, and cable manipulation.

Using the mode of operation and configuration noted within this report, a final radiated emissions test was performed. The frequency range investigated (scanned), is also noted in this report. Radiated emissions measurements were made at the EUT azimuth and antenna height such that the maximum radiated emissions level will be detected. This requires the use of a turntable and an antenna positioner. The preferred method of a continuous azimuth search is utilized for frequency scans of the EUT field strength with both polarities of the measuring antenna. A calibrated, linearly polarized antenna was positioned at the specified distance from the periphery of the EUT.

Note: The specified distance is the horizontal separation between the closest periphery of the EUT and the center of the axis of the elements of the receiving antenna. However, if the receiving antenna is a log-periodic array, the specified distance shall be the distance between the closest periphery of the EUT and the front-to-back center of the array of elements.

Tests were made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement was varied in height above the conducting ground plane to obtain the maximum signal strength. Though specified in the report, the measurement distance shall be 1 meter, 3 meters, 5 meters, 10 meters, or 30 meters. At any measurement distance, the antenna height was varied from 1 meter to 4 meters. These height scans apply for both horizontal and vertical polarization, except that for vertical polarization the minimum height of the center of the antenna shall be increased so that the lowest point of the bottom of the antenna clears the ground surface by at least 25 cm.

Measurement Bandwidths			
Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 – 0.15	1.0	0.2	0.2
0.15 – 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0
<i>Measurements were made using the bandwidths and detectors specified. No video filter was used.</i>			

Completed by:

EUT: MN: A-0363D Game Port Dongle		Work Order: LABT0149
Serial Number: Unknown		Date: 08/30/05
Customer: Logitech, Inc.		Temperature: 23
Attendees: None		Humidity: 42%
Project: None		Barometric Pressure: 29.98
Tested by: Holly Ashkannejhad	Power: 230VAC, 50Hz	Job Site: EV01

TEST SPECIFICATIONS		Test Method
FCC 15.109(g) (CISPR 22:1997) Class B:2005-04		ANSI C63.4:2003


TEST PARAMETERS	
Antenna Height(s) (m)	1 - 4
Test Distance (m)	5

COMMENTS
Dongle, Headset, Xbox, and Monitor in chamber. Headset battery powered.

EUT OPERATING MODES
Running Voice Loopback Software on Xbox

DEVIATIONS FROM TEST STANDARD
No deviations.

Run #	1	Signature <i>Holly Ashkannejhad</i>
Configuration #		
Results	Pass	

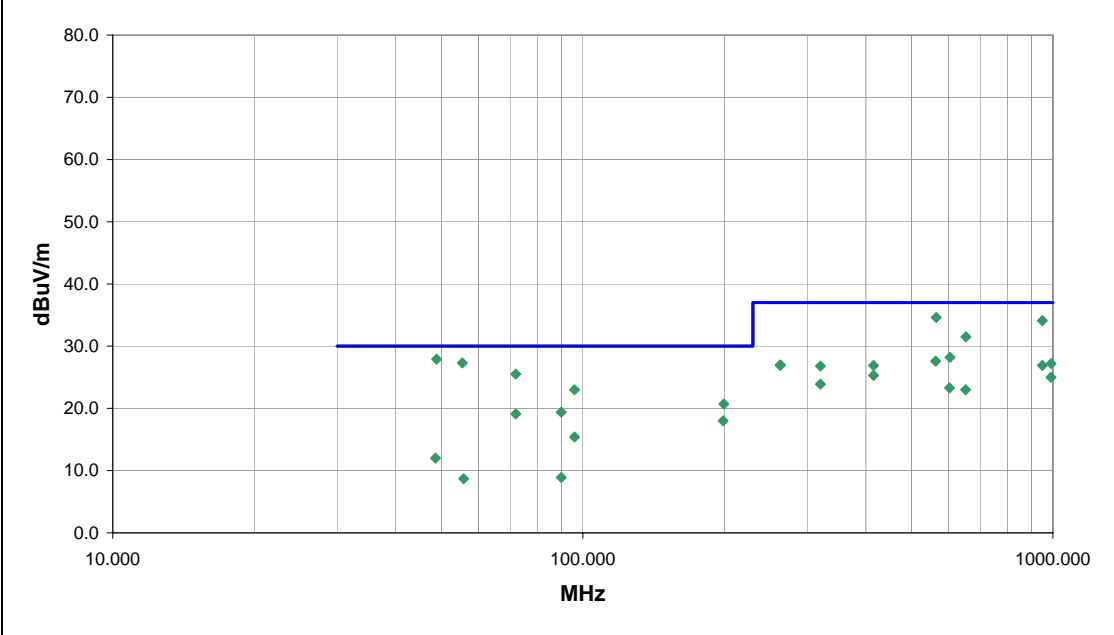

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
48.870	33.6	-5.7	122.0	1.0	5.0	0.0	V-Bilog	QP	0.0	27.9	30.0	-2.1
564.572	29.0	5.6	256.0	2.3	5.0	0.0	H-Bilog	QP	0.0	34.6	37.0	-2.4
55.426	34.2	-6.9	323.0	1.3	5.0	0.0	V-Bilog	QP	0.0	27.3	30.0	-2.7
949.321	24.6	9.5	8.0	1.0	5.0	0.0	V-Bilog	QP	0.0	34.1	37.0	-2.9
72.008	34.0	-8.5	283.0	1.9	5.0	0.0	V-Bilog	QP	0.0	25.5	30.0	-4.5
652.664	24.4	7.1	262.0	2.1	5.0	0.0	H-Bilog	QP	0.0	31.5	37.0	-5.5
95.995	29.9	-6.9	297.0	1.0	5.0	0.0	V-Bilog	QP	0.0	23.0	30.0	-7.0
603.912	22.6	5.6	250.0	1.0	5.0	0.0	H-Bilog	QP	0.0	28.2	37.0	-8.8
199.472	25.2	-4.5	46.0	2.3	5.0	0.0	H-Bilog	QP	0.0	20.7	30.0	-9.3
563.014	22.0	5.6	175.0	1.0	5.0	0.0	V-Bilog	QP	0.0	27.6	37.0	-9.4
991.726	17.4	9.8	312.0	1.0	5.0	0.0	V-Bilog	QP	0.0	27.2	37.0	-9.8
263.125	28.6	-1.6	106.0	3.2	5.0	0.0	V-Bilog	QP	0.0	27.0	37.0	-10.0
263.127	28.5	-1.6	12.0	2.0	5.0	0.0	H-Bilog	QP	0.0	26.9	37.0	-10.1
415.331	24.6	2.3	189.0	1.7	5.0	0.0	V-Bilog	QP	0.0	26.9	37.0	-10.1
949.323	17.4	9.5	251.0	2.0	5.0	0.0	H-Bilog	QP	0.0	26.9	37.0	-10.1
320.144	27.3	-0.5	252.0	2.8	5.0	0.0	V-Bilog	QP	0.0	26.8	37.0	-10.2
89.968	26.8	-7.4	252.0	1.7	5.0	0.0	V-Bilog	QP	0.0	19.4	30.0	-10.6
72.007	27.6	-8.5	320.0	3.9	5.0	0.0	H-Bilog	QP	0.0	19.1	30.0	-10.9
415.330	23.0	2.3	254.0	2.9	5.0	0.0	H-Bilog	QP	0.0	25.3	37.0	-11.7
198.763	22.5	-4.5	333.0	1.0	5.0	0.0	V-Bilog	QP	0.0	18.0	30.0	-12.0
990.323	15.2	9.8	324.0	2.0	5.0	0.0	H-Bilog	QP	0.0	25.0	37.0	-12.0
320.144	24.4	-0.5	331.0	1.8	5.0	0.0	H-Bilog	QP	0.0	23.9	37.0	-13.1
602.805	17.8	5.5	317.0	1.5	5.0	0.0	V-Bilog	QP	0.0	23.3	37.0	-13.7
651.674	15.9	7.1	174.0	2.3	5.0	0.0	V-Bilog	QP	0.0	23.0	37.0	-14.0
96.001	22.3	-6.9	193.0	3.0	5.0	0.0	H-Bilog	QP	0.0	15.4	30.0	-14.6
48.596	17.6	-5.6	272.0	2.0	5.0	0.0	H-Bilog	QP	0.0	12.0	30.0	-18.0
89.988	16.3	-7.4	317.0	2.1	5.0	0.0	H-Bilog	QP	0.0	8.9	30.0	-21.1
55.777	15.6	-6.9	360.0	1.0	5.0	0.0	H-Bilog	QP	0.0	8.7	30.0	-21.3

EUT: MN: A-0363D Game Port Dongle		Work Order: LABT0149
Serial Number: Unknown	Date: 09/08/05	
Customer: Logitech, Inc.	Temperature: 25	
Attendees: None	Humidity: 36%	
Project: None	Barometric Pressure: 29.83	
Tested by: Holly Ashkannejhad	Power: 120VAC, 60Hz	Job Site: EV01

TEST SPECIFICATIONS Test Method

FCC 15.109(g) (CISPR 22:1997) Class B:2005-04	ANSI C63.4:2003
--	------------------------

TEST PARAMETERS

Antenna Height(s) (m)	1 - 4	Test Distance (m)	5
-----------------------	-------	-------------------	---

COMMENTS

Dongle, Headset, Xbox, and Monitor in chamber. Headset battery powered.


EUT OPERATING MODES

Running Voice Loopback Software on Xbox

DEVIATIONS FROM TEST STANDARD

No deviations.

Run #	2	Signature <i>Holly Ashkannejhad</i>
Configuration #		
Results	Pass	

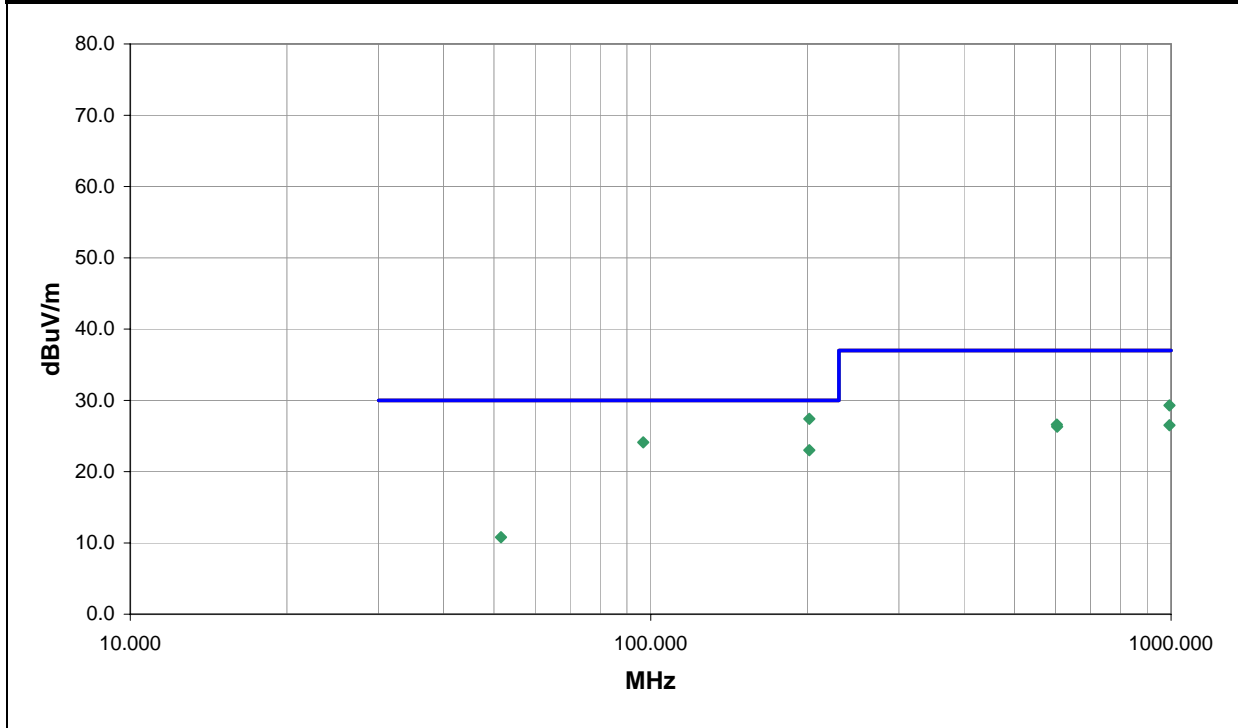

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
201.748	31.8	-4.4	148.0	1.0	5.0	0.0	V-Bilog	QP	0.0	27.4	30.0	-2.6
96.778	30.9	-6.8	27.0	3.8	5.0	0.0	H-Bilog	QP	0.0	24.1	30.0	-5.9
201.708	27.4	-4.4	190.0	3.0	5.0	0.0	H-Bilog	QP	0.0	23.0	30.0	-7.0
992.889	19.6	9.7	218.0	1.2	5.0	0.0	H-Bilog	QP	0.0	29.3	37.0	-7.7
603.354	21.0	5.6	163.0	1.0	5.0	0.0	V-Bilog	QP	0.0	26.6	37.0	-10.4
992.901	16.8	9.7	234.0	2.1	5.0	0.0	V-Bilog	QP	0.0	26.5	37.0	-10.5
603.920	20.7	5.6	232.0	2.6	5.0	0.0	H-Bilog	QP	0.0	26.3	37.0	-10.7
51.575	17.0	-6.2	28.0	3.0	5.0	0.0	H-Bilog	QP	0.0	10.8	30.0	-19.2



Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

Channels in Specified Band Investigated:

Low
Mid
High

Operating Modes Investigated:

No Hop

Data Rates Investigated:

Maximum

Output Power Setting(s) Investigated:

Maximum

Power Input Settings Investigated:

Battery

Software\Firmware Applied During Test

Exercise software	BlueCore-Audio	Version	1.0
Description			
The system was tested using special software developed to test all functions of the device during the test. The firmware put the radio into a no-hop mode with a modulated carrier. Transmit channels were selectable between the lowest, a middle, and the highest channels in the operating band.			

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
EUT - Bluetooth Headset	Logitech, Inc.	A-0363C	Unknown
Development Module	Cambridge Silicon Radio, Ltd.	BCES301199/1	7467 08 08 03
AC Adapter	Egston	N2GFSW3	42251

Remote Equipment Outside of Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
Laptop PC	IBM	A21M	IS108
AC Adapter	IBM	02K6657	None
Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary			

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
Serial	No	2.1	No	Laptop PC	Development Module
I/O	No	1.2	No	Development Module	EUT - Bluetooth Headset
DC Leads	No	1.8	PA	AC Adapter	Development Module

PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.

Measurement Equipment					
Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Tektronix	2784	AAO	01/02/2005	12 mo

Test Description

Requirement: Bluetooth can be authorized as either a Frequency Hopping System (FHSS), a Digital Transmission System (DTS), or a Hybrid System. As a FHSS, the maximum 20dB bandwidth of the hopping channel is equal to 1.5 times the channel separation. For example, channel separation for Bluetooth is 1 MHz, therefore the maximum 20 dB bandwidth is 1.5 MHz. The measurement is made with the spectrum analyzer's resolution bandwidth set to $\geq 1\%$ of the 20dB bandwidth, and the video bandwidth set to greater than or equal to the resolution bandwidth.

Configuration: The occupied bandwidth was measured with the EUT set to low, medium, and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate in a no hop mode.

Completed by:



NORTHWEST
EMC

OCCUPIED BANDWIDTH

Rev BETA
01/30/01

EUT: MN: A-0363C Cordless Headset	Work Order: LABT0149
Serial Number: Unknown	Date: 08/11/05
Customer: Logitech, Inc.	Temperature: 73 °F
Attendees: None	Tested by: Rod Peloquin
Customer Ref. No.: None	Power: Battery
	Humidity: 42% RH
	Job Site: EV06

TEST SPECIFICATIONS			
Specification: 47 CFR 15.247(a)	Year: 2005-04	Method: DA 00-705, ANSI C63.4	Year: 2003

SAMPLE CALCULATIONS

COMMENTS
Measured with a direct connection between the RF output and a spectrum analyzer.

EUT OPERATING MODES
Modulated by PRBS at maximum data rate

DEVIATIONS FROM TEST STANDARD
None


REQUIREMENTS
Bluetooth can be authorized as either a Frequency Hopping System (FHSS), a Digital Transmission System (DTS), or a Hybrid System.
As a FHSS, the maximum 20dB bandwidth of the hopping channel is equal to 1.5 times the channel separation. For example, channel separation for Bluetooth is 1 MHz, therefore the maximum 20 dB bandwidth is 1.5 MHz.
As a DTS system, the minimum 6 dB bandwidth is 500 kHz. As a Hybrid, it must meet the FHSS requirement as described above.

RESULTS
Pass BANDWIDTH 0.897 MHz

SIGNATURE

Tested By: _____

DESCRIPTION OF TEST
20dB Bandwidth - Low Channel

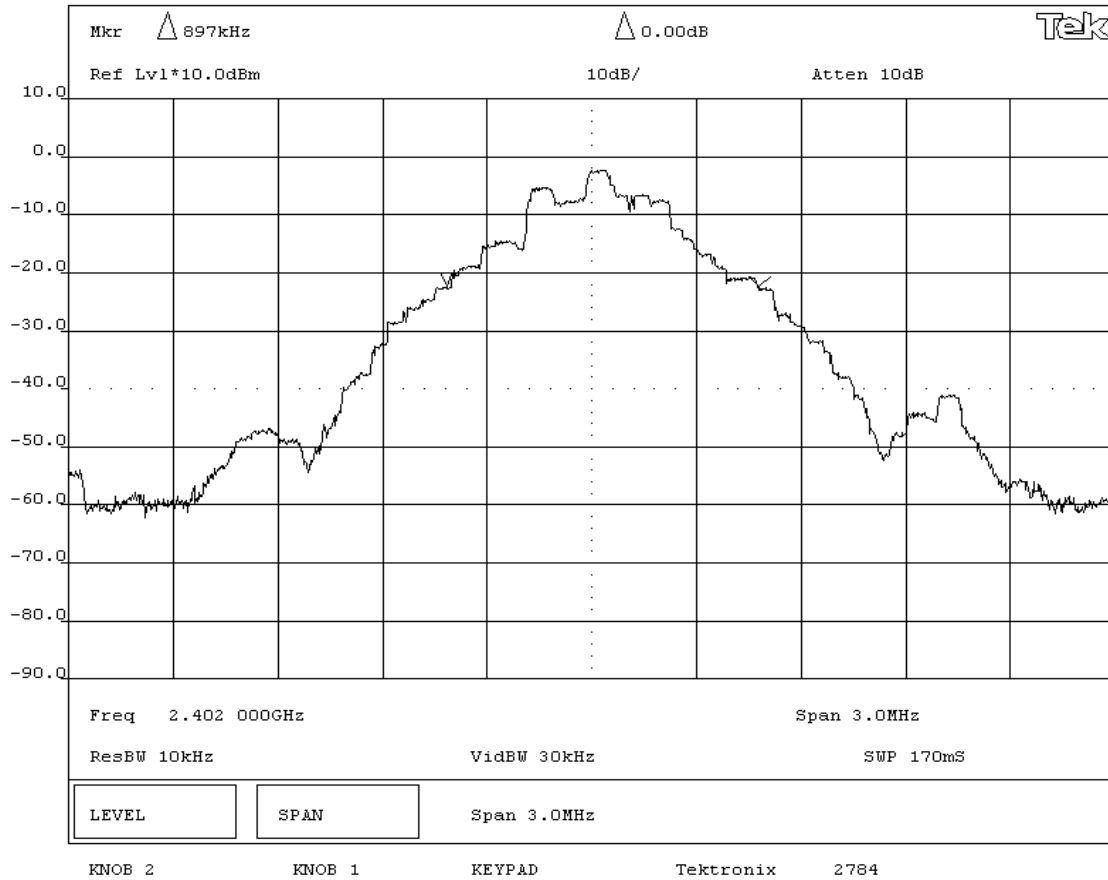

EUT: MN: A-0363C Cordless Headset		Work Order: LABT0149
Serial Number: Unknown		Date: 08/11/05
Customer: Logitech, Inc.		Temperature: 73 °F
Attendees: None	Tested by: Rod Peloquin	Humidity: 42% RH
Customer Ref. No.: None	Power: Battery	Job Site: EV06

TEST SPECIFICATIONS			
Specification: 47 CFR 15.247(a)	Year: 2005-04	Method: DA 00-705, ANSI C63.4	Year: 2003

SAMPLE CALCULATIONS

COMMENTS
Measured with a direct connection between the RF output and a spectrum analyzer.

EUT OPERATING MODES
Modulated by PRBS at maximum data rate

DEVIATIONS FROM TEST STANDARD
None

REQUIREMENTS
Bluetooth can be authorized as either a Frequency Hopping System (FHSS), a Digital Transmission System (DTS), or a Hybrid System.
As a FHSS, the maximum 20dB bandwidth of the hopping channel is equal to 1.5 times the channel separation. For example, channel separation for Bluetooth is 1 MHz, therefore the maximum 20 dB bandwidth is 1.5 MHz.
As a DTS system, the minimum 6 dB bandwidth is 500 kHz. As a Hybrid, it must meet the FHSS requirement as described above.


RESULTS	BANDWIDTH
Pass	0.939 MHz

SIGNATURE


 Tested By: _____

DESCRIPTION OF TEST

20dB Bandwidth - Mid Channel

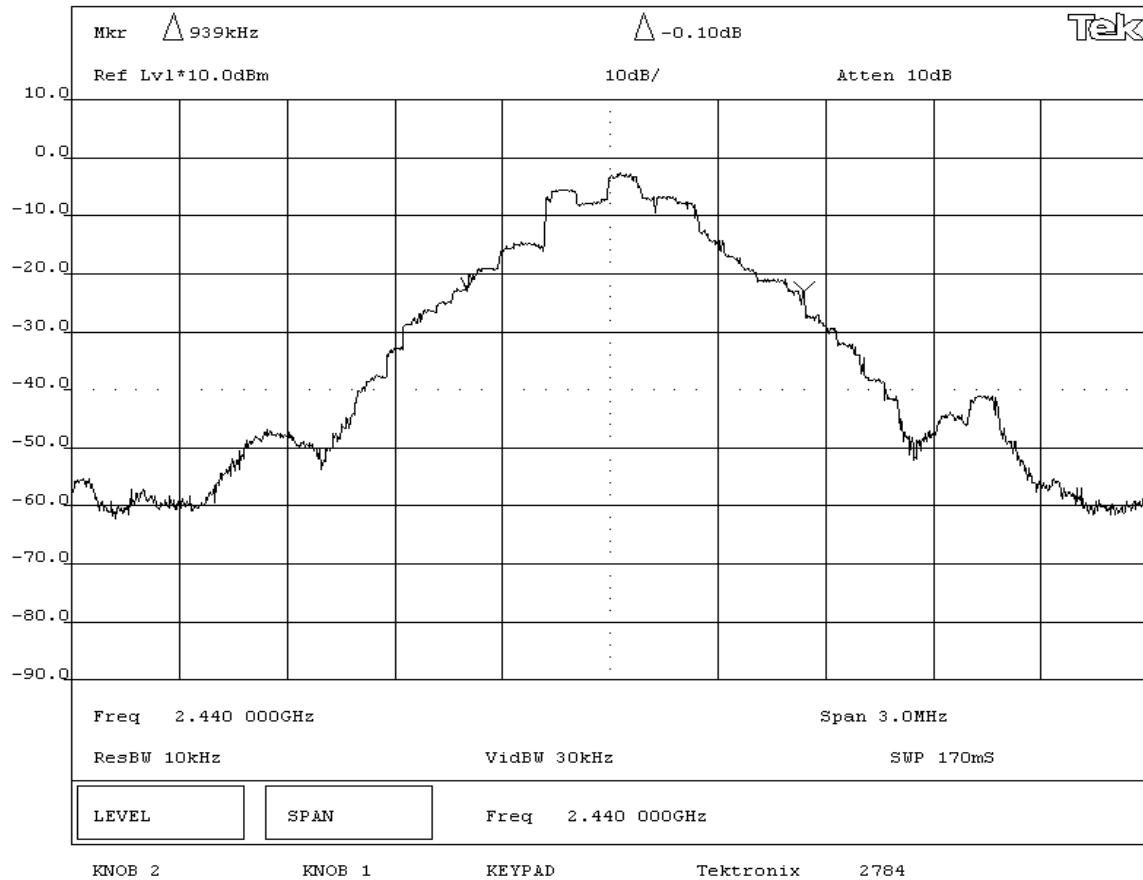

NORTHWEST
EMC

OCCUPIED BANDWIDTH

Rev BETA
01/30/01

EUT: MN: A-0363C Cordless Headset	Work Order: LABT0149	
Serial Number: Unknown	Date: 08/11/05	
Customer: Logitech, Inc.	Temperature: 73 °F	
Attendees: None	Tested by: Rod Peloquin	Humidity: 42% RH
Customer Ref. No.: None	Power: Battery	Job Site: EV06

TEST SPECIFICATIONS			
Specification: 47 CFR 15.247(a)	Year: 2005-06	Method: DA 00-705, ANSI C63.4	Year: 2003

SAMPLE CALCULATIONS

COMMENTS
Measured with a direct connection between the RF output and a spectrum analyzer.

EUT OPERATING MODES
Modulated by PRBS at maximum data rate


DEVIATIONS FROM TEST STANDARD
None


REQUIREMENTS
Bluetooth can be authorized as either a Frequency Hopping System (FHSS), a Digital Transmission System (DTS), or a Hybrid System.
As a FHSS, the maximum 20dB bandwidth of the hopping channel is equal to 1.5 times the channel separation. For example, channel separation for Bluetooth is 1 MHz, therefore the maximum 20 dB bandwidth is 1.5 MHz.
As a DTS system, the minimum 6 dB bandwidth is 500 kHz. As a Hybrid, it must meet the FHSS requirement as described above.

RESULTS
Pass BANDWIDTH 0.954 MHz

SIGNATURE
Tested By: *Rod Peloquin*

DESCRIPTION OF TEST
20dB Bandwidth - High Channel

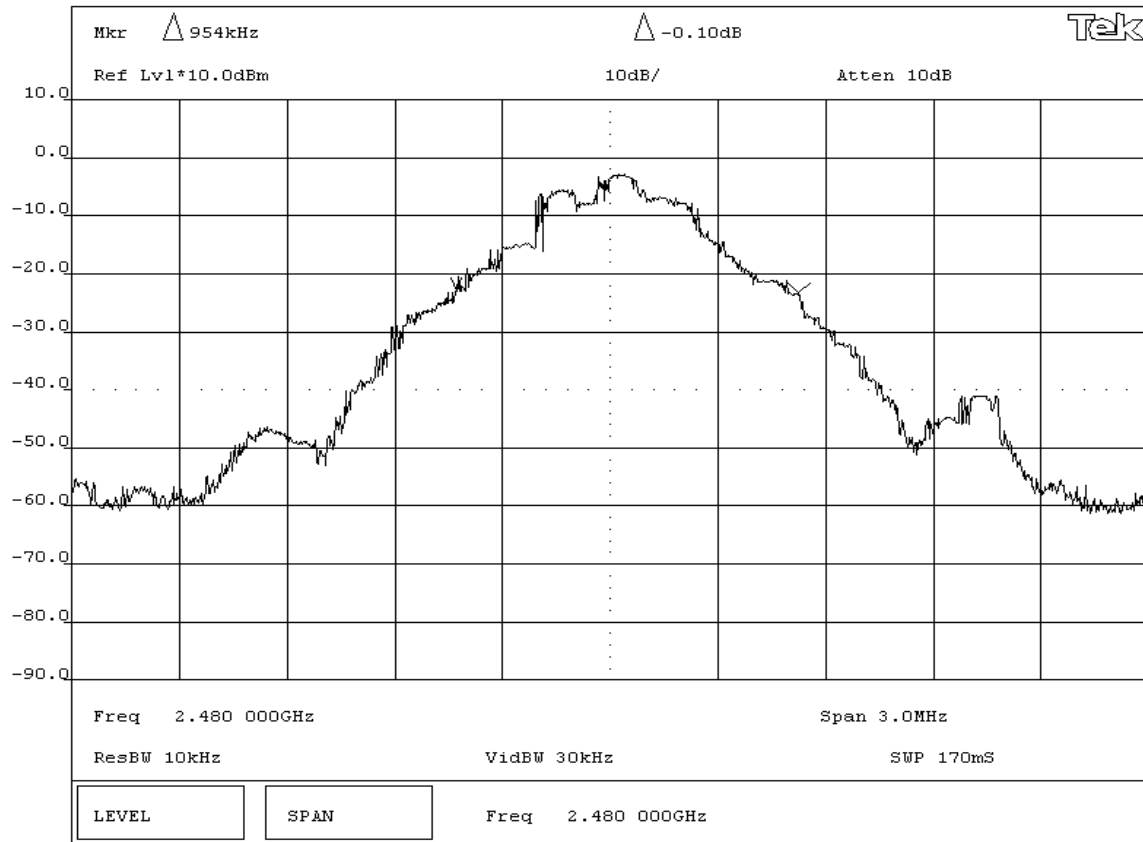

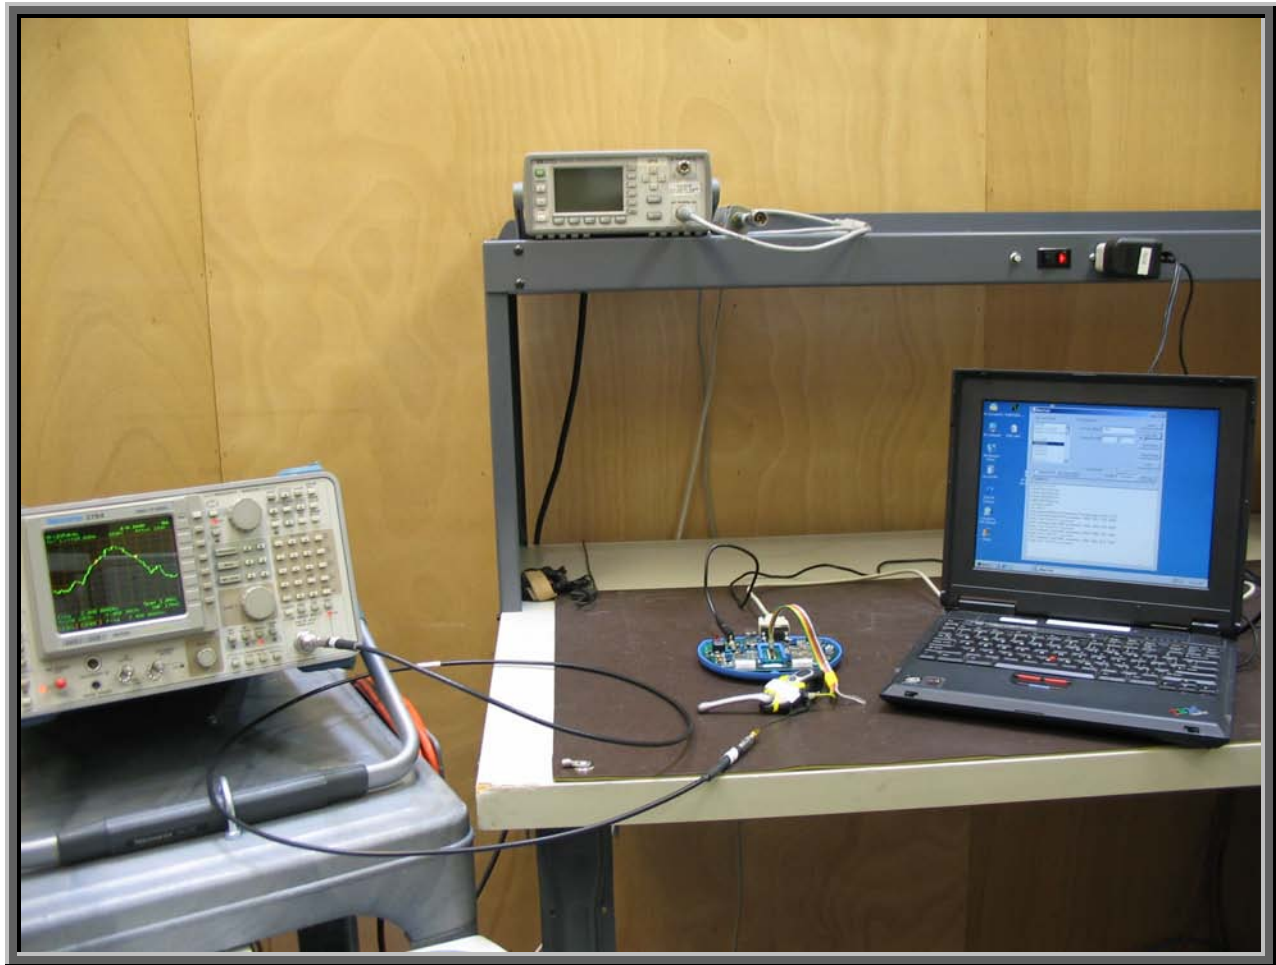

Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

Channels in Specified Band Investigated:

Low
Mid
High

Operating Modes Investigated:

No Hop

Data Rates Investigated:

Maximum

Output Power Setting(s) Investigated:

Maximum

Power Input Settings Investigated:

Battery

Software\Firmware Applied During Test

Exercise software	BlueCore-Audio	Version	1.0
Description			
The system was tested using special software developed to test all functions of the device during the test. The firmware put the radio into a no-hop mode with a modulated carrier. Transmit channels were selectable between the lowest, a middle, and the highest channels in the operating band.			

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
EUT - Bluetooth Headset	Logitech, Inc.	A-0363C	Unknown
Development Module	Cambridge Silicon Radio, Ltd.	BCES301199/1	7467 08 08 03
AC Adapter	Egston	N2GFSW3	42251

Remote Equipment Outside of Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
Laptop PC	IBM	A21M	IS108
AC Adapter	IBM	02K6657	None
Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary			

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
Serial	No	2.1	No	Laptop PC	Development Module
I/O	No	1.2	No	Development Module	EUT - Bluetooth Headset
DC Leads	No	1.8	PA	AC Adapter	Development Module

PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.

Measurement Equipment

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Oscilloscope	Tektronix	TDS 3052	TOF	12/02/2004	13 mo
Power Meter	Hewlett Packard	E4418A	SPA	07/23/2004	24 mo
Power Sensor	Hewlett-Packard	8481H	SPB	07/23/2004	24 mo
RF Detector	RLC Electronics	CR-133-R	ZZA	NCR	NA
Signal Generator	Hewlett Packard	8341B	TGN	02/07/2005	13 mo

Test Description


Requirement: Per 47 CFR 15.247(b)(3), the maximum peak output power must not exceed 1 Watt.

Configuration: The peak output power was measured with the EUT set to low, medium, and high transmit frequencies. The EUT was transmitting at its maximum output power. The data rate of the radio was varied to determine the level that produced the highest output power.

The measurement was made using a direct connection between the RF output of the EUT and a RF detector diode. The DC output of the diode was measured with the oscilloscope. The signal generator, tuned to the transmit frequency, was then substituted for the EUT. The CW output of the signal generator was adjusted until the DC output of the RF detector diode match the peak level produced when connected to the EUT. To further reduce measurement error, the power meter and sensor were then used to measure the output power level of the signal generator.


De Facto EIRP Limit: Per 47 CFR 15.247 (b)(1-3), the EUT meets the de facto EIRP limit of +36dBm.

Completed by:




NORTHWEST

EMC**OUTPUT POWER**Rev BETA
01/30/01

EUT:	MN: A-0363C Cordless Headset		Work Order:	LABT0149			
Serial Number:	Unknown		Date:	08/11/05			
Customer:	Logitech, Inc.		Temperature:	73 °F			
Attendees:	None	Tested by:	Rod Peloquin	Humidity:	42% RH		
Customer Ref. No.:	None	Power:	3.7 VDC	Job Site:	EV06		
TEST SPECIFICATIONS							
Specification:	47 CFR 15.247(b)	Year:	2005-06	Method:	DA 00-705, ANSI C63.4	Year:	2003
SAMPLE CALCULATIONS							
COMMENTS							
EUT OPERATING MODES							
Modulated by PRBS at maximum data rate							
DEVIATIONS FROM TEST STANDARD							
None							
REQUIREMENTS							
Maximum peak conducted output power does not exceed 1 Watt							
RESULTS		AMPLITUDE					
Pass		3.38 mW					
SIGNATURE							
 Tested By: _____							
DESCRIPTION OF TEST							
Output Power							

Frequency (MHz)	Peak Power Measured w/ Diode Detector (dBm)	Peak Power (mW)	Spec (mW)
2402.0	3.74	2.37	1000.0
2441.0	3.42	2.20	1000.0
2480.0	3.76	2.38	1000.0

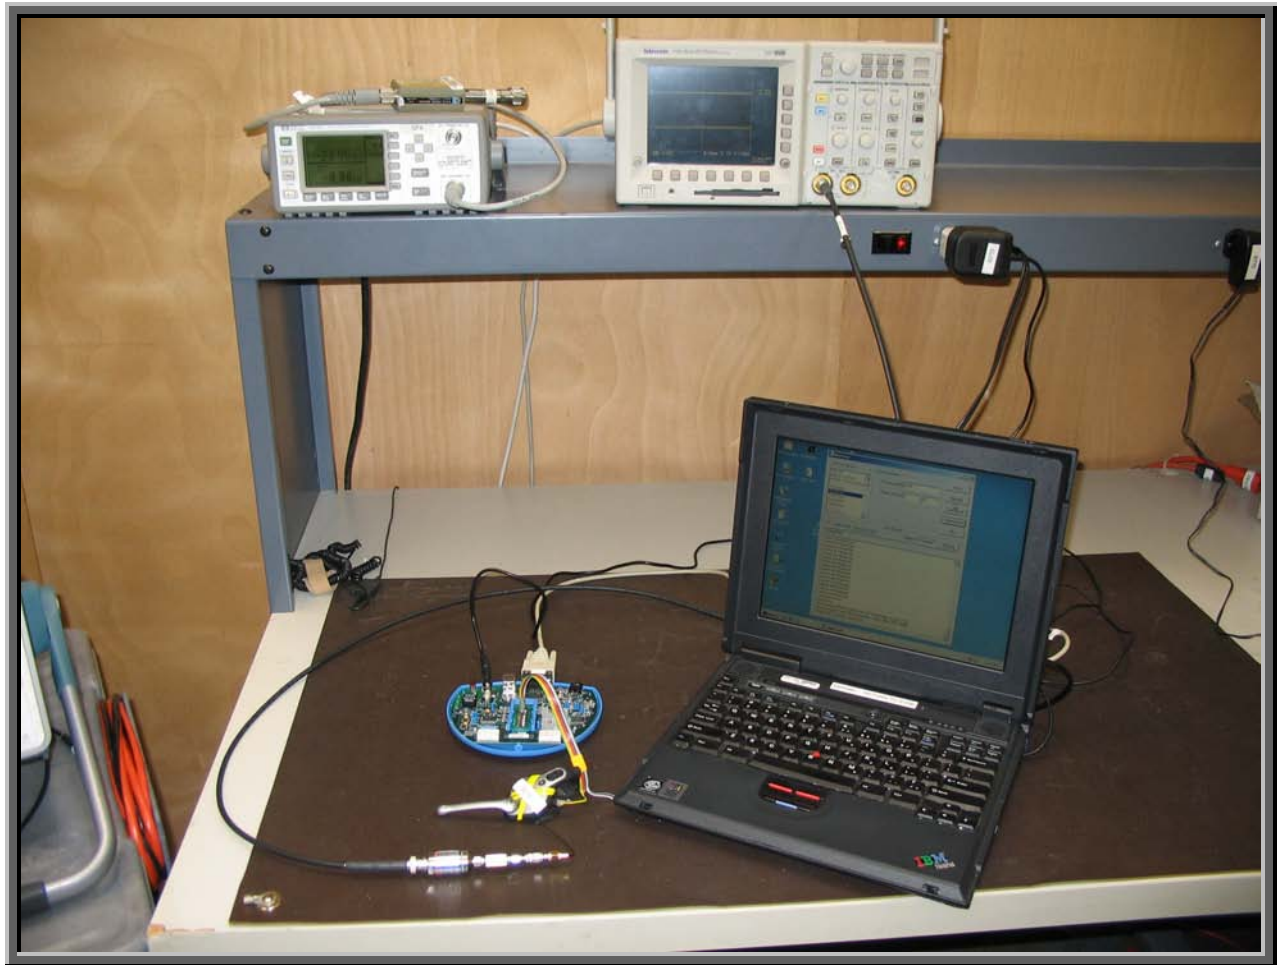

Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

Channels in Specified Band Investigated:

Low

High

Operating Modes Investigated:

No Hop

Data Rates Investigated:

Maximum

Output Power Setting(s) Investigated:

Maximum

Power Input Settings Investigated:

Battery

Software\Firmware Applied During Test

Exercise software	BlueCore-Audio	Version	1.0
Description			
The system was tested using special software developed to test all functions of the device during the test. The firmware put the radio into a no-hop mode with a modulated carrier. Transmit channels were selectable between the lowest and the highest channels in the operating band.			

Description

The system was tested using special software developed to test all functions of the device during the test. The firmware put the radio into a no-hop mode with a modulated carrier. Transmit channels were selectable between the lowest and the highest channels in the operating band.

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
EUT - Bluetooth Headset	Logitech, Inc.	A-0363C	Unknown
Development Module	Cambridge Silicon Radio, Ltd.	BCES301199/1	7467 08 08 03
AC Adapter	Egston	N2GFSW3	42251

Remote Equipment Outside of Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
Laptop PC	IBM	A21M	IS108
AC Adapter	IBM	02K6657	None

Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
Serial	No	2.1	No	Laptop PC	Development Module
I/O	No	1.2	No	Development Module	EUT - Bluetooth Headset
DC Leads	No	1.8	PA	AC Adapter	Development Module

PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.

Measurement Equipment					
Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Tektronix	2784	AAO	01/02/2005	12 mo

Test Description

Requirement: Per 47 CFR 15.247(d), in any 100 kHz bandwidth outside the authorized band, the maximum level of radio frequency power must be at least 20dB down from the highest emission level within the authorized band. The measurement is made with the spectrum analyzer's resolution bandwidth set to 100 kHz, and the video bandwidth set to greater than or equal to the resolution bandwidth.

Configuration: The spurious RF conducted emissions at the edges of the authorized band were measured with the EUT set to low and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate in a no hop mode. The channels closest to the band edges were selected. The spectrum was scanned across each band edge from 5 MHz below the band edge to 5 MHz above the band edge.

Completed by:



NORTHWEST
EMC

BAND EDGE COMPLIANCE

Rev BETA
01/30/01

EUT: MN: A-0363C Cordless Headset		Work Order: LABT0149
Serial Number: Unknown		Date: 08/11/05
Customer: Logitech, Inc.		Temperature: 73 °F
Attendees: None	Tested by: Rod Peloquin	Humidity: 42% RH
Customer Ref. No.: None	Power: Battery	Job Site: EV06

TEST SPECIFICATIONS			
Specification: 47 CFR 15.247(d)	Year: 2005-04	Method: DA 00-705, ANSI C63.4	Year: 2003

SAMPLE CALCULATIONS

COMMENTS

EUT OPERATING MODES
Modulated by PRBS at maximum data rate

DEVIATIONS FROM TEST STANDARD
None

REQUIREMENTS
Maximum level of any spurious emission at the edge of the authorized band is 20 dB down from the fundamental


RESULTS	AMPLITUDE
Pass	-53.10 dB


SIGNATURE


Rodney Le Peloquin


Tested By: _____

DESCRIPTION OF TEST
Band Edge Compliance - Low Channel

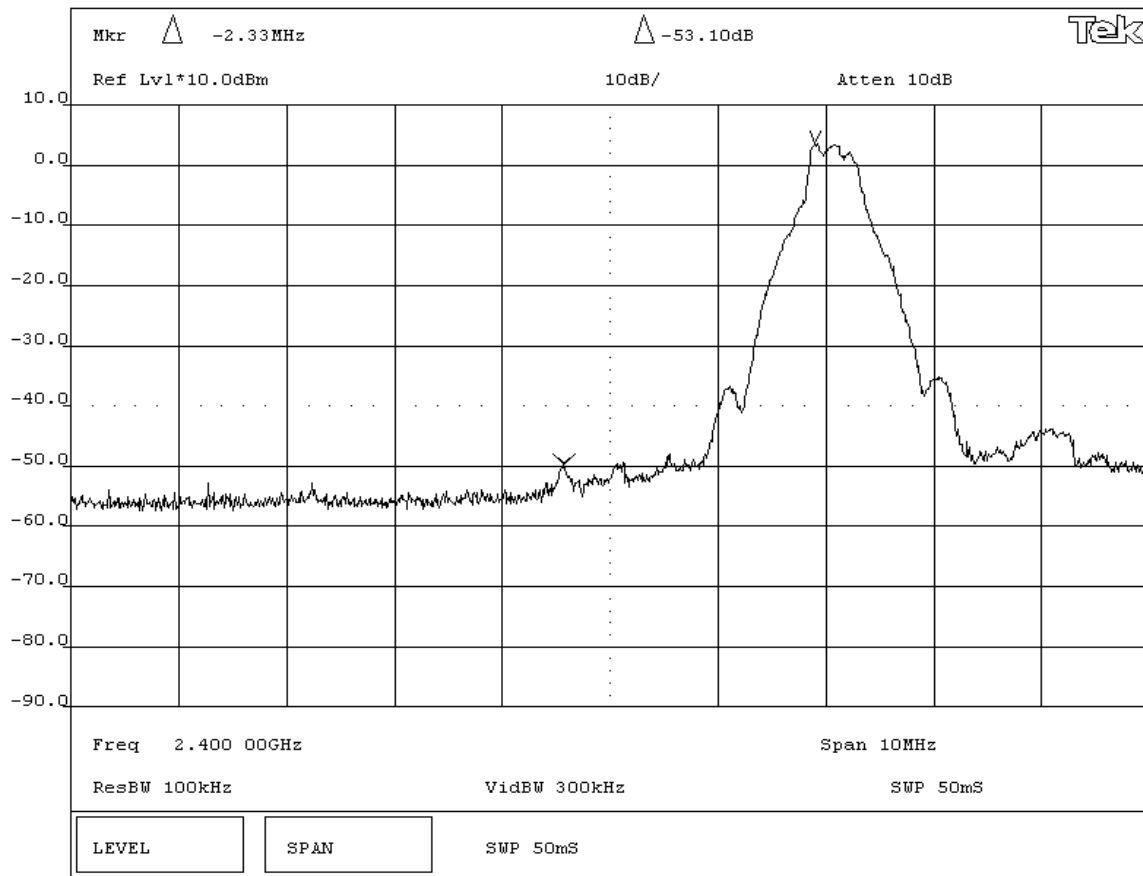

NORTHWEST		BAND EDGE COMPLIANCE		Rev BETA 01/30/01
EUT: MN: A-0363C Cordless Headset		Work Order:	LABT0149	
Serial Number: Unknown		Date:	08/11/05	
Customer: Logitech, Inc.		Temperature:	73 °F	
Attendees: None	Tested by: Rod Peloquin	Humidity:	42% RH	
Customer Ref. No.: None	Power: Battery	Job Site:	EV06	
TEST SPECIFICATIONS				
Specification: 47 CFR 15.247(d)	Year: 2005-06	Method: DA 00-705, ANSI C63.4	Year: 2003	
SAMPLE CALCULATIONS				
COMMENTS				
EUT OPERATING MODES				
Modulated by PRBS at maximum data rate				
DEVIATIONS FROM TEST STANDARD				
None				
REQUIREMENTS				
Maximum level of any spurious emission at the edge of the authorized band is 20 dB down from the fundamental				
RESULTS		AMPLITUDE		
Pass		-47.5 dB		
SIGNATURE				
 Tested By: _____				
DESCRIPTION OF TEST				
Band Edge Compliance - High Channel				

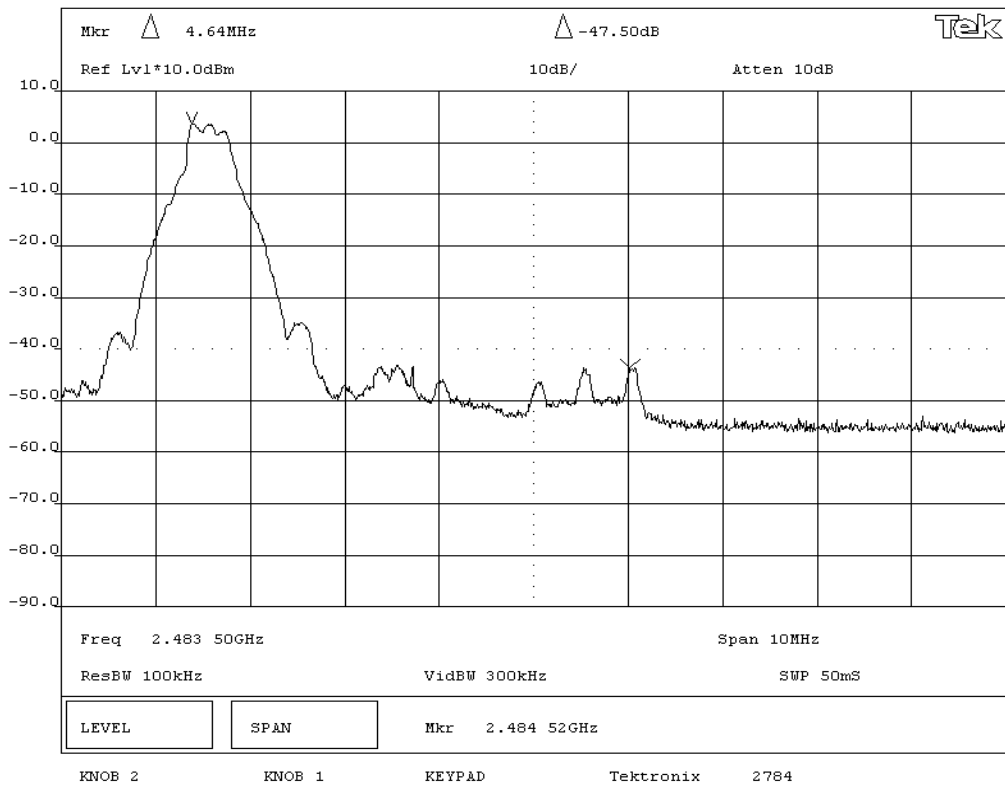

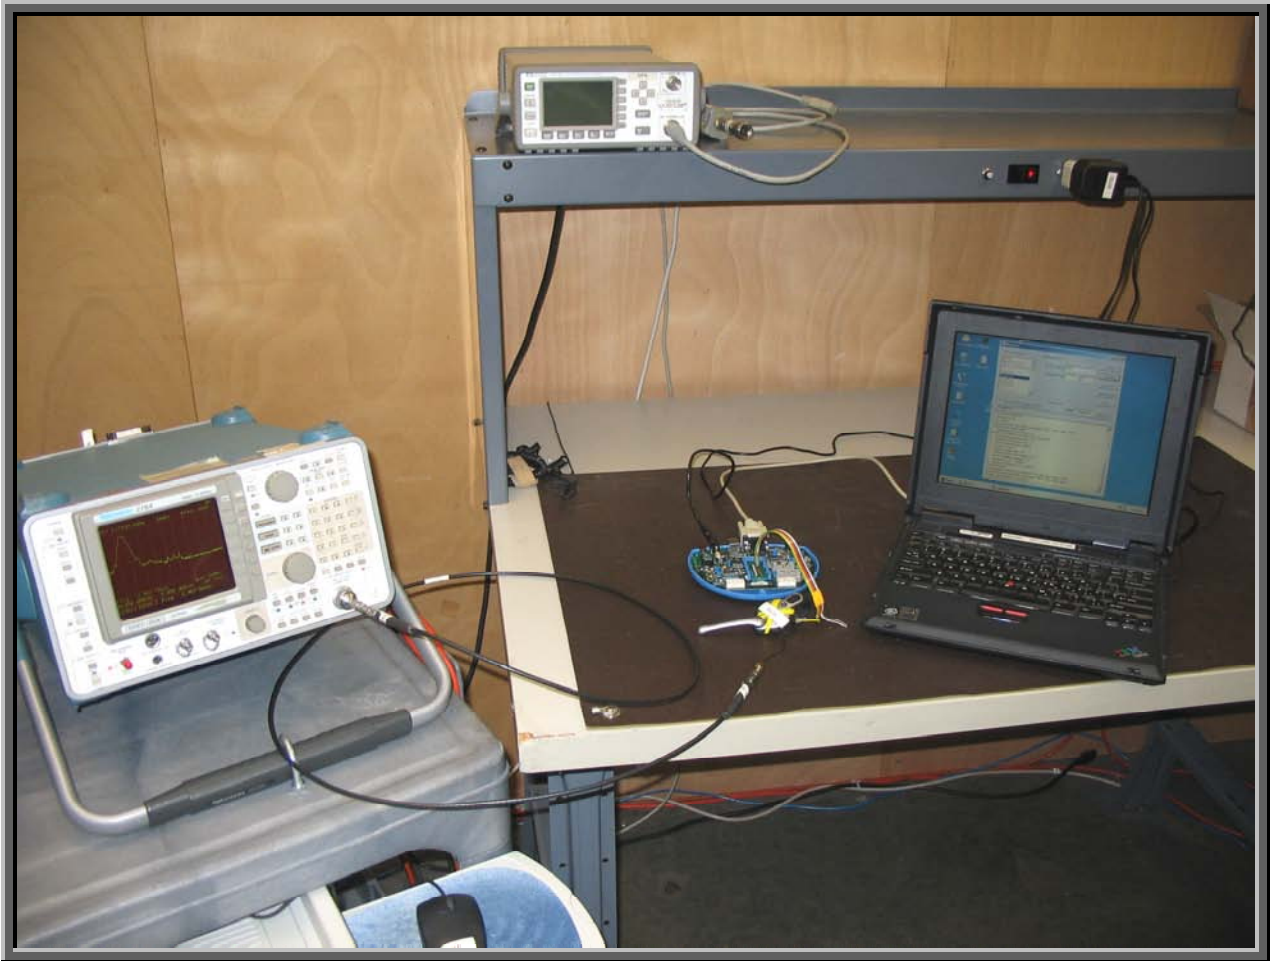

Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

Channels in Specified Band Investigated:

Low

Mid

High

Operating Modes Investigated:

No Hop

Data Rates Investigated:

Maximum

Output Power Setting(s) Investigated:

Maximum

Power Input Settings Investigated:

Battery

Software\Firmware Applied During Test

Exercise software	BlueCore-Audio	Version	1.0
Description			
The system was tested using special software developed to test all functions of the device during the test. The firmware put the radio into a no-hop mode with a modulated carrier. Transmit channels were selectable between the lowest, a middle, and the highest channels in the operating band.			

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
EUT - Bluetooth Headset	Logitech, Inc.	A-0363C	Unknown
Development Module	Cambridge Silicon Radio, Ltd.	BCES301199/1	7467 08 08 03
AC Adapter	Egston	N2GFSW3	42251

Remote Equipment Outside of Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
Laptop PC	IBM	A21M	IS108
AC Adapter	IBM	02K6657	None
Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary			

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
Serial	No	2.1	No	Laptop PC	Development Module
I/O	No	1.2	No	Development Module	EUT - Bluetooth Headset
DC Leads	No	1.8	PA	AC Adapter	Development Module

PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.


Measurement Equipment

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Tektronix	2784	AAO	01/02/2005	12 mo

Test Description

Requirement: Per 47 CFR 15.247(d), in any 100 kHz bandwidth outside the authorized band, the maximum level of radio frequency power must be at least 20dB down from the highest emission level within the authorized band. The measurement is made with the spectrum analyzer's resolution bandwidth set to 100 kHz, and the video bandwidth set to greater than or equal to the resolution bandwidth.

Configuration: The spurious RF conducted emissions were measured with the EUT set to low, medium, and high transmit frequencies. The measurements were made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate in a no hop mode. For each transmit frequency, the spectrum was scanned throughout the specified frequency.

Completed by:


EUT: MN: A-0363C Cordless Headset		Work Order: LABT0149
Serial Number: Unknown		Date: 08/11/05
Customer: Logitech, Inc.		Temperature: 73 °F
Attendees: None	Tested by: Rod Peloquin	Humidity: 42% RH
Customer Ref. No.: None	Power: Battery	Job Site: EV06

TEST SPECIFICATIONS			
Specification: 47 CFR 15.247(d)	Year: 2005-04	Method: DA 00-705, ANSI C63.4	Year: 2003
SAMPLE CALCULATIONS			


COMMENTS

EUT OPERATING MODES
Modulated by PRBS at maximum data rate


DEVIATIONS FROM TEST STANDARD
None

REQUIREMENTS
Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

RESULTS
Pass

SIGNATURE

Tested By: _____

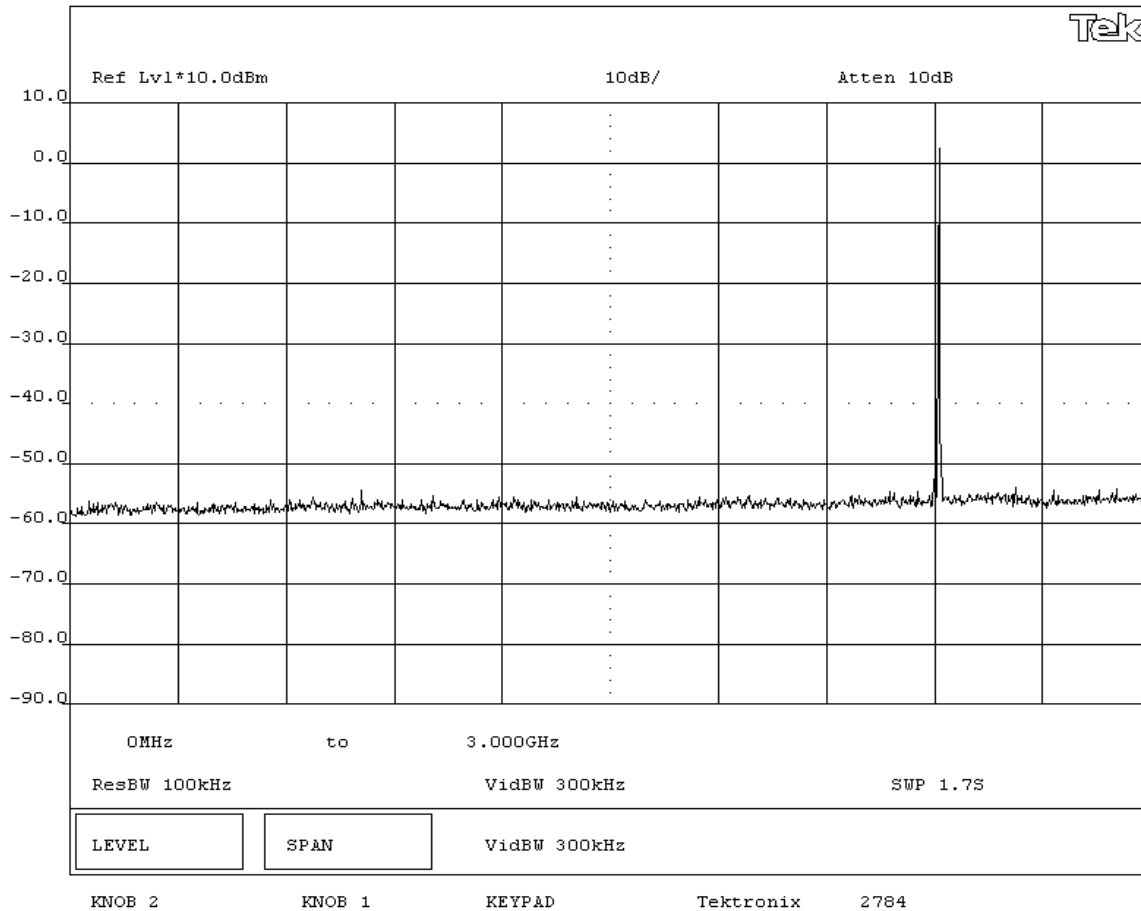DESCRIPTION OF TEST
Antenna Conducted Spurious Emissions - Low Channel 0MHz-3GHz



EUT: MN: A-0363C Cordless Headset		Work Order: LABT0149
Serial Number: Unknown		Date: 08/11/05
Customer: Logitech, Inc.		Temperature: 73 °F
Attendees: None	Tested by: Rod Peloquin	Humidity: 42% RH
Customer Ref. No.: None	Power: Battery	Job Site: EV06

TEST SPECIFICATIONS			
Specification: 47 CFR 15.247(d)	Year: 2005-04	Method: DA 00-705, ANSI C63.4	Year: 2003

SAMPLE CALCULATIONS			

COMMENTS			

EUT OPERATING MODES			
Modulated by PRBS at maximum data rate			


DEVIATIONS FROM TEST STANDARD			
None			

REQUIREMENTS			
Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental			

RESULTS			
Pass			

SIGNATURE			
 Tested By: _____			

DESCRIPTION OF TEST			
Antenna Conducted Spurious Emissions - Low Channel 3GHz-6.5GHz			

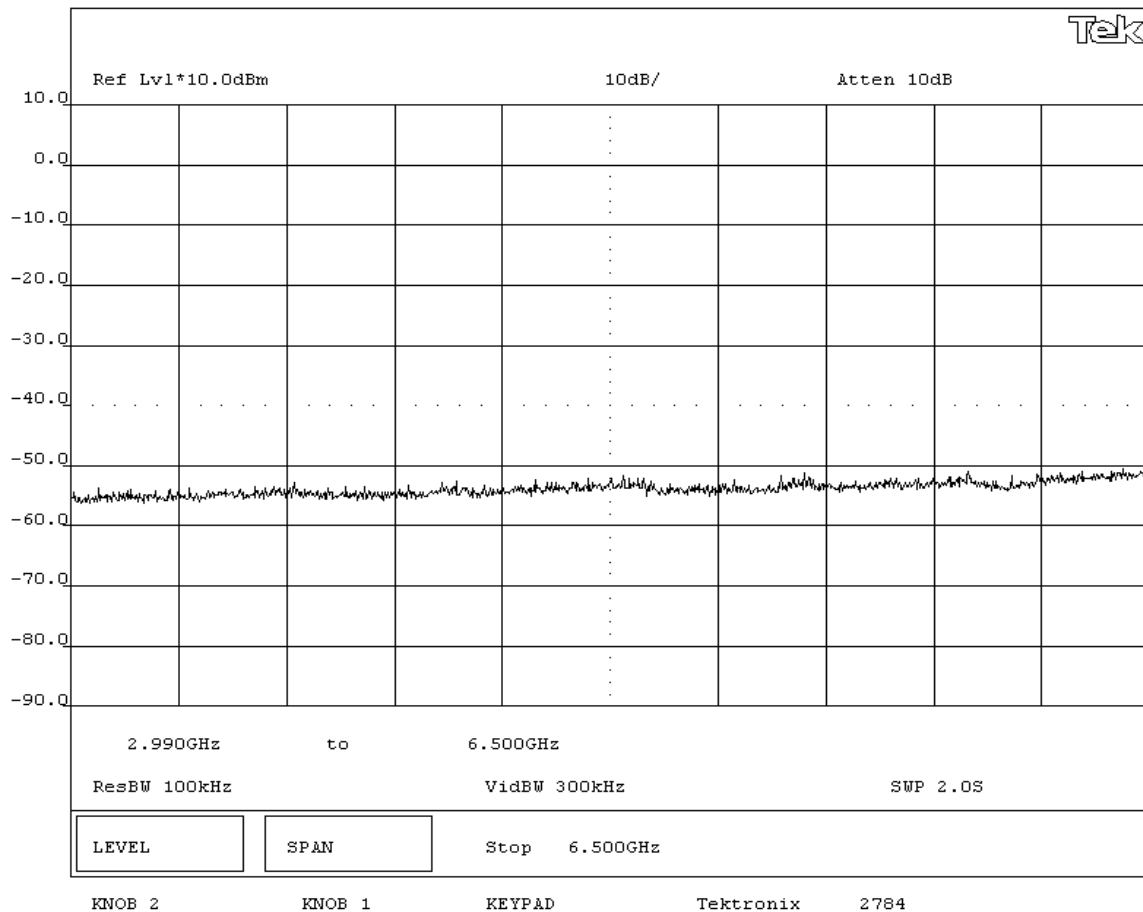

EUT: MN: A-0363C Cordless Headset		Work Order: LABT0149	
Serial Number: Unknown		Date: 08/11/05	
Customer: Logitech, Inc.		Temperature: 73 °F	
Attendees: None		Tested by: Rod Peloquin	
Customer Ref. No.: None		Power: Battery	
		Humidity: 42% RH	
		Job Site: EV06	

TEST SPECIFICATIONS			
Specification: 47 CFR 15.247(d)	Year: 2005-04	Method: DA 00-705, ANSI C63.4	Year: 2003

SAMPLE CALCULATIONS			

COMMENTS			

EUT OPERATING MODES			
Modulated by PRBS at maximum data rate			


DEVIATIONS FROM TEST STANDARD			
None			

REQUIREMENTS			
Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental			

RESULTS			
Pass			

SIGNATURE			
 Tested By: _____			

DESCRIPTION OF TEST			
Antenna Conducted Spurious Emissions - Low Channel 6.5GHz-15GHz			

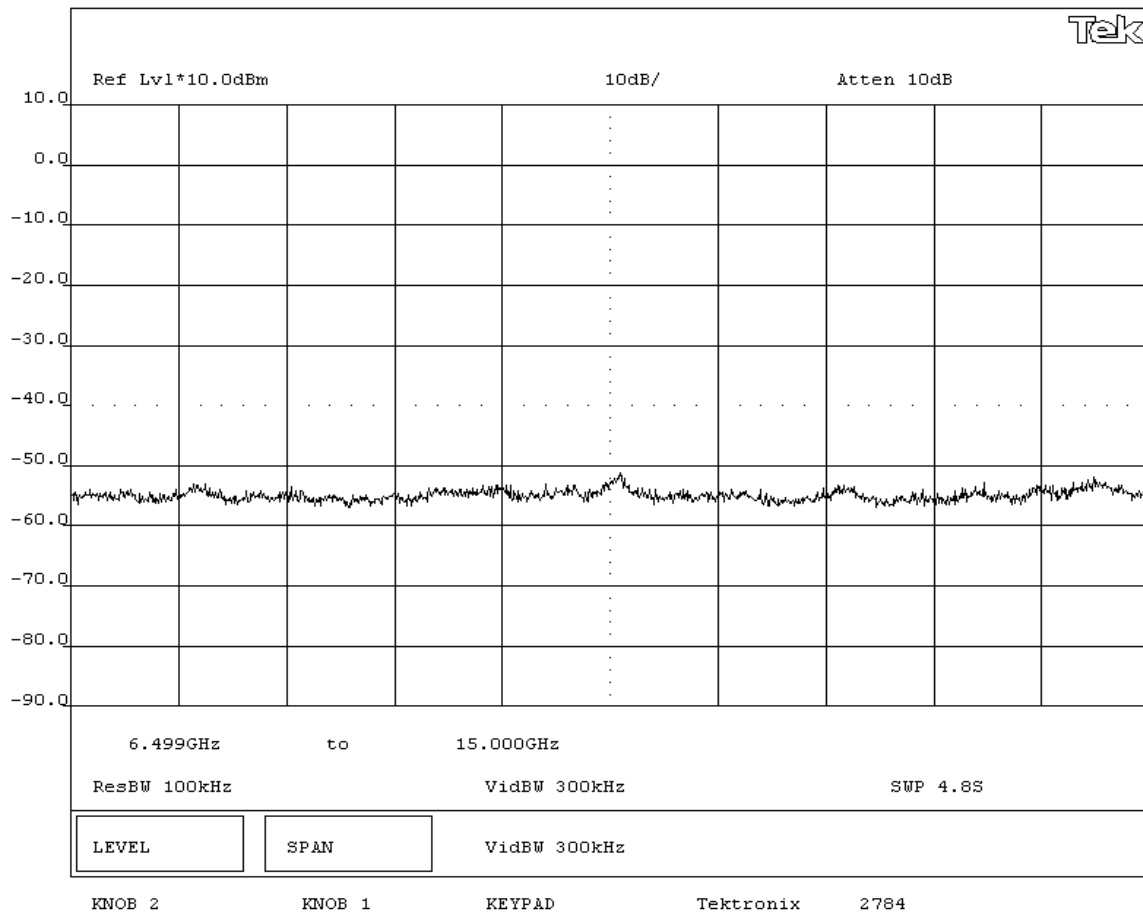

EUT: MN: A-0363C Cordless Headset		Work Order: LABT0149
Serial Number: Unknown		Date: 08/11/05
Customer: Logitech, Inc.		Temperature: 73 °F
Attendees: None	Tested by: Rod Peloquin	Humidity: 42% RH
Customer Ref. No.: None	Power: Battery	Job Site: EV06

TEST SPECIFICATIONS			
Specification: 47 CFR 15.247(d)	Year: 2005-04	Method: DA 00-705, ANSI C63.4	Year: 2003

SAMPLE CALCULATIONS			

COMMENTS			

EUT OPERATING MODES			
Modulated by PRBS at maximum data rate			


DEVIATIONS FROM TEST STANDARD			
None			

REQUIREMENTS			
Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental			

RESULTS			
Pass			

SIGNATURE			
 Tested By: _____			

DESCRIPTION OF TEST			
Antenna Conducted Spurious Emissions - Low Channel 15GHz - 25GHz			

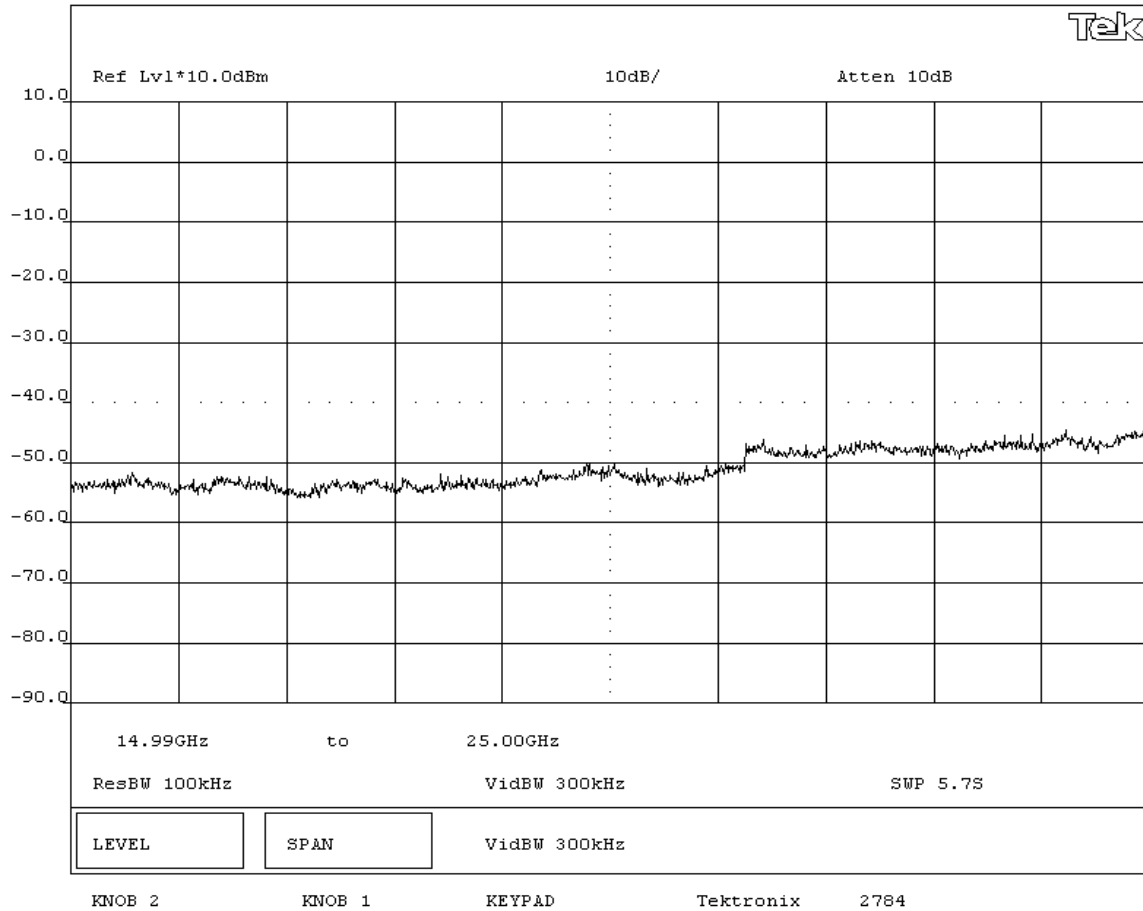

EMISSIONS DATA SHEET

EUT: MN: A-0363C Cordless Headset		Work Order: LABT0149	
Serial Number: Unknown		Date: 08/11/05	
Customer: Logitech, Inc.		Temperature: 73 °F	
Attendees: None		Tested by: Rod Peloquin	
Customer Ref. No.: None		Power: Battery	
		Humidity: 42% RH	
		Job Site: EV06	

TEST SPECIFICATIONS			
Specification: 47 CFR 15.247(d)	Year: 2005-04	Method: DA 00-705, ANSI C63.4	Year: 2003

SAMPLE CALCULATIONS			

COMMENTS			

EUT OPERATING MODES			
Modulated by PRBS at maximum data rate			


DEVIATIONS FROM TEST STANDARD			
None			

REQUIREMENTS			
Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental			

RESULTS			
Pass			

SIGNATURE			
 Tested By: _____			

DESCRIPTION OF TEST			
Antenna Conducted Spurious Emissions - Mid Channel 0MHz-3GHz			

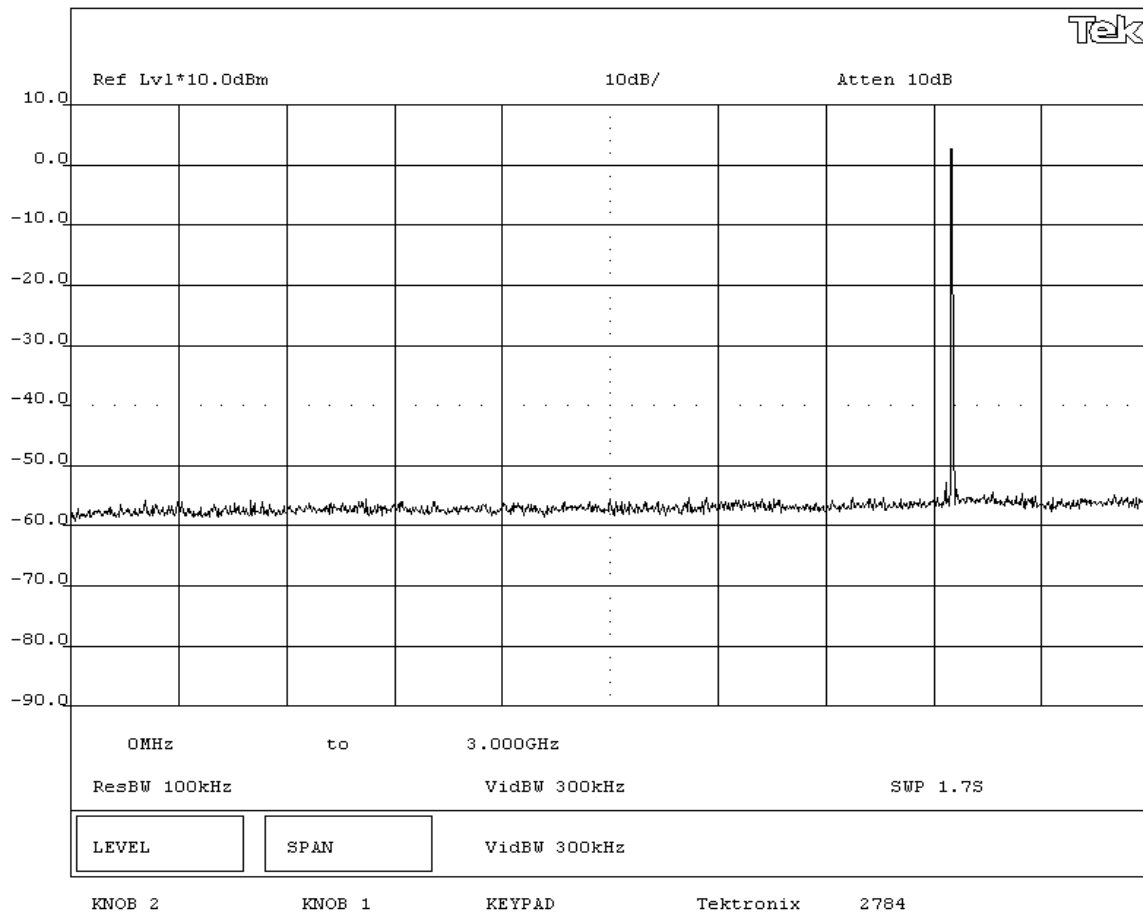

EUT: MN: A-0363C Cordless Headset		Work Order: LABT0149
Serial Number: Unknown		Date: 08/11/05
Customer: Logitech, Inc.		Temperature: 73 °F
Attendees: None	Tested by: Rod Peloquin	Humidity: 42% RH
Customer Ref. No.: None	Power: Battery	Job Site: EV06

TEST SPECIFICATIONS			
Specification: 47 CFR 15.247(d)	Year: 2005-04	Method: DA 00-705, ANSI C63.4	Year: 2003

SAMPLE CALCULATIONS			

COMMENTS			

EUT OPERATING MODES			
Modulated by PRBS at maximum data rate			


DEVIATIONS FROM TEST STANDARD			
None			

REQUIREMENTS			
Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental			

RESULTS			
Pass			

SIGNATURE			
 Tested By: _____			

DESCRIPTION OF TEST			
Antenna Conducted Spurious Emissions - Mid Channel 3GHz-6.5GHz			

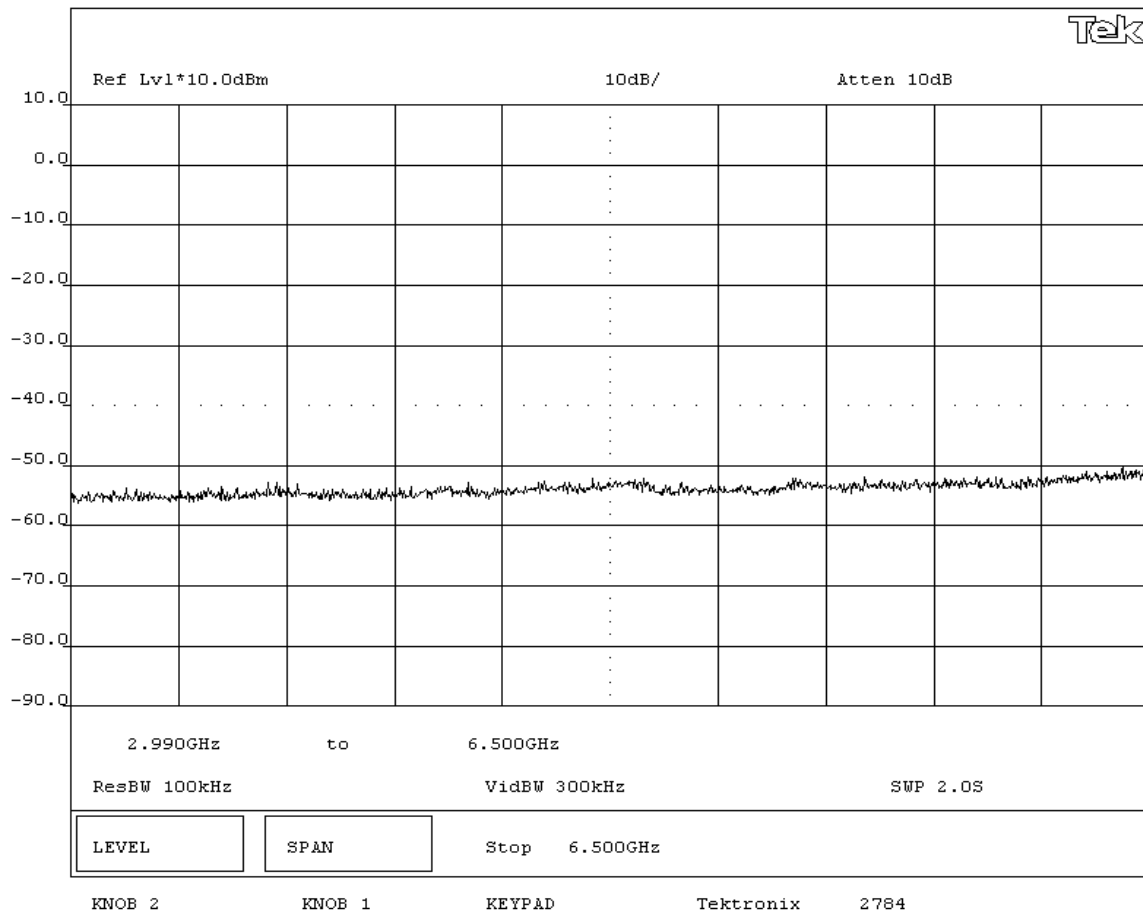

EUT: MN: A-0363C Cordless Headset		Work Order: LABT0149	
Serial Number: Unknown		Date: 08/11/05	
Customer: Logitech, Inc.		Temperature: 73 °F	
Attendees: None		Tested by: Rod Peloquin	
Customer Ref. No.: None		Power: Battery	
		Humidity: 42% RH	
		Job Site: EV06	

TEST SPECIFICATIONS			
Specification: 47 CFR 15.247(d)	Year: 2005-04	Method: DA 00-705, ANSI C63.4	Year: 2003

SAMPLE CALCULATIONS			

COMMENTS			

EUT OPERATING MODES			
Modulated by PRBS at maximum data rate			


DEVIATIONS FROM TEST STANDARD			
None			

REQUIREMENTS			
Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental			

RESULTS			
Pass			

SIGNATURE			
 Tested By: _____			

DESCRIPTION OF TEST			
Antenna Conducted Spurious Emissions - Mid Channel 6.5GHz-15GHz			

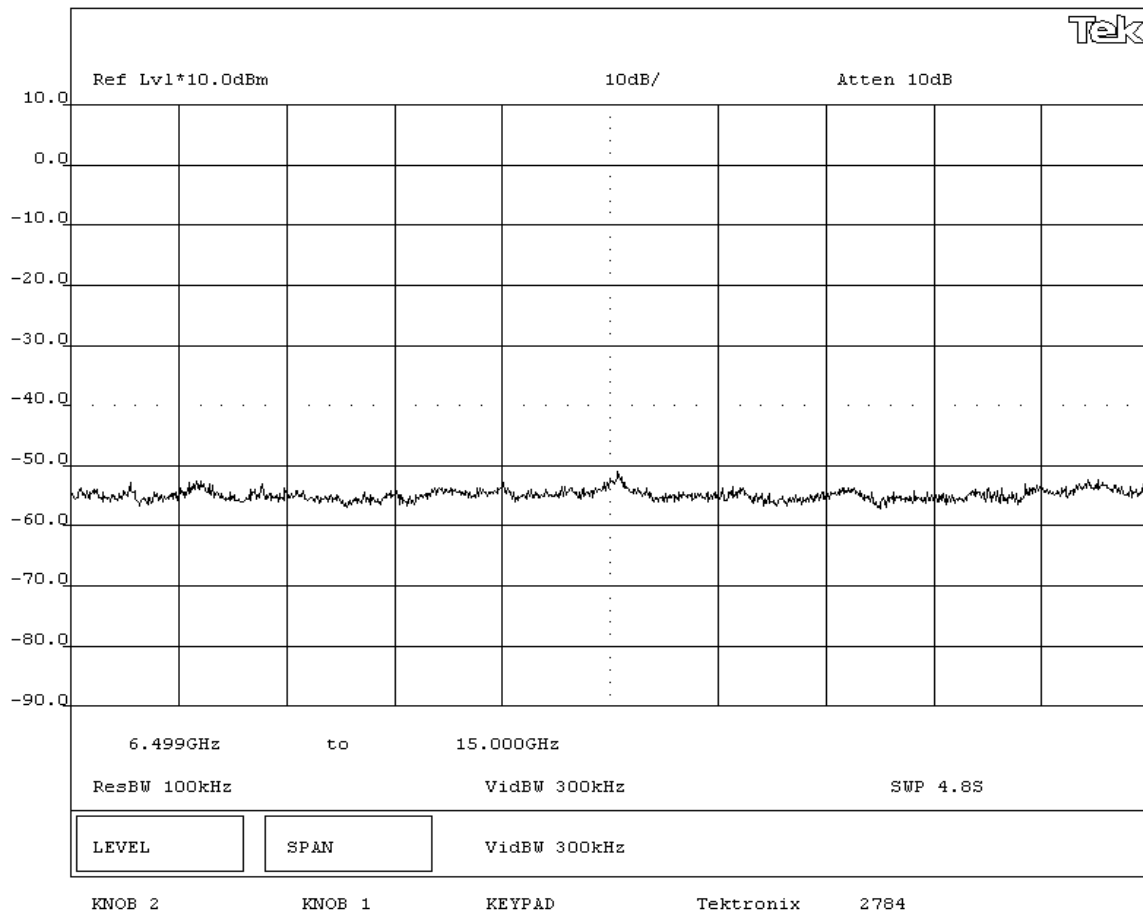

EUT: MN: A-0363C Cordless Headset		Work Order: LABT0149	
Serial Number: Unknown		Date: 08/11/05	
Customer: Logitech, Inc.		Temperature: 73 °F	
Attendees: None		Tested by: Rod Peloquin	
Customer Ref. No.: None		Power: Battery	
		Humidity: 42% RH	
		Job Site: EV06	

TEST SPECIFICATIONS			
Specification: 47 CFR 15.247(d)	Year: 2005-04	Method: DA 00-705, ANSI C63.4	Year: 2003

SAMPLE CALCULATIONS			

COMMENTS			

EUT OPERATING MODES			
Modulated by PRBS at maximum data rate			


DEVIATIONS FROM TEST STANDARD			
None			

REQUIREMENTS			
Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental			

RESULTS			
Pass			

SIGNATURE			
 Tested By: _____			

DESCRIPTION OF TEST			
Antenna Conducted Spurious Emissions - Mid Channel 15GHz-25GHz			

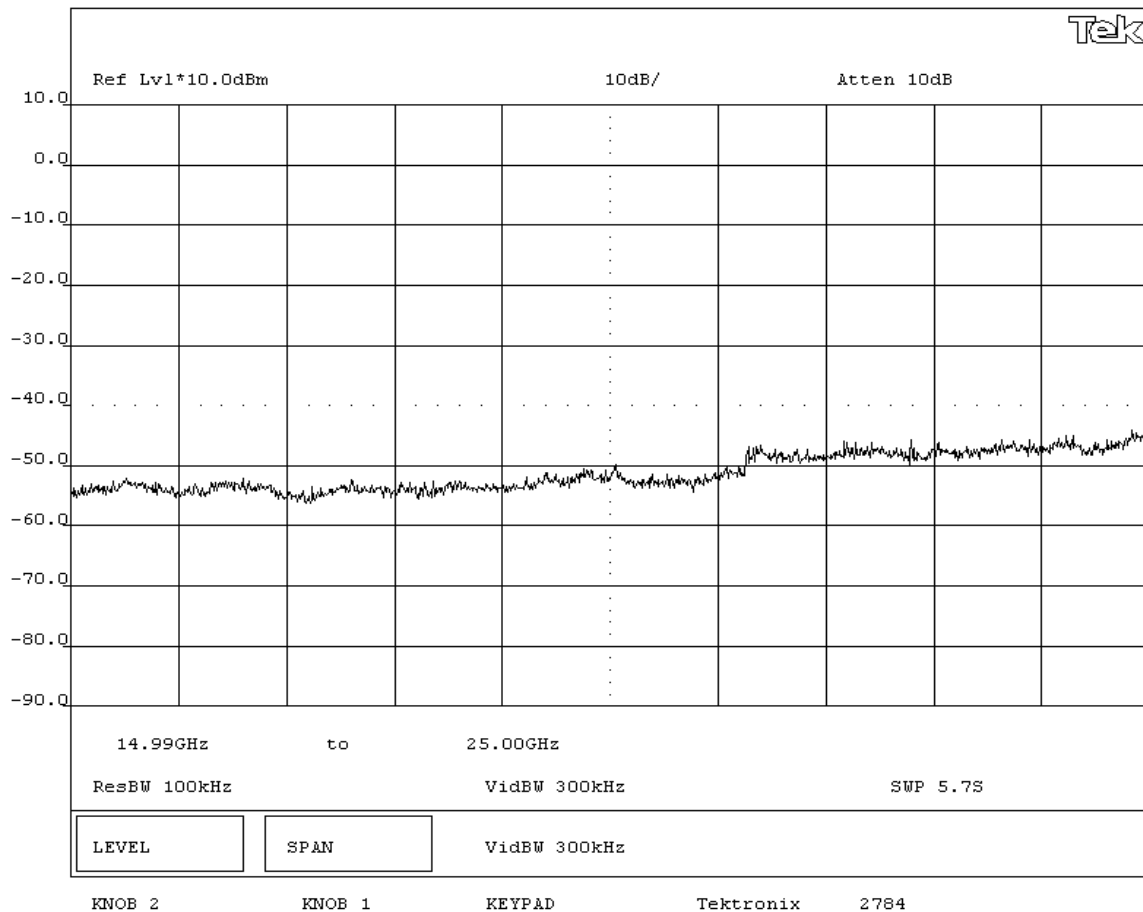

NORTHWEST
EMC

EMISSIONS DATA SHEET

Rev BETA
01/30/01

EUT: MN: A-0363C Cordless Headset		Work Order: LABT0149	
Serial Number: Unknown		Date: 08/11/05	
Customer: Logitech, Inc.		Temperature: 73 °F	
Attendees: None		Tested by: Rod Peloquin	
Customer Ref. No.: None		Power: Battery	
		Humidity: 42% RH	
		Job Site: EV06	

TEST SPECIFICATIONS			
Specification: 47 CFR 15.247(d)	Year: 2005-04	Method: DA 00-705, ANSI C63.4	Year: 2003

SAMPLE CALCULATIONS

COMMENTS

EUT OPERATING MODES
Modulated by PRBS at maximum data rate

DEVIATIONS FROM TEST STANDARD
None


REQUIREMENTS
Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

RESULTS
Pass

SIGNATURE

Tested By: *Rodry L. Peloquin*

DESCRIPTION OF TEST
Antenna Conducted Spurious Emissions - High Channel 0MHz-3GHz

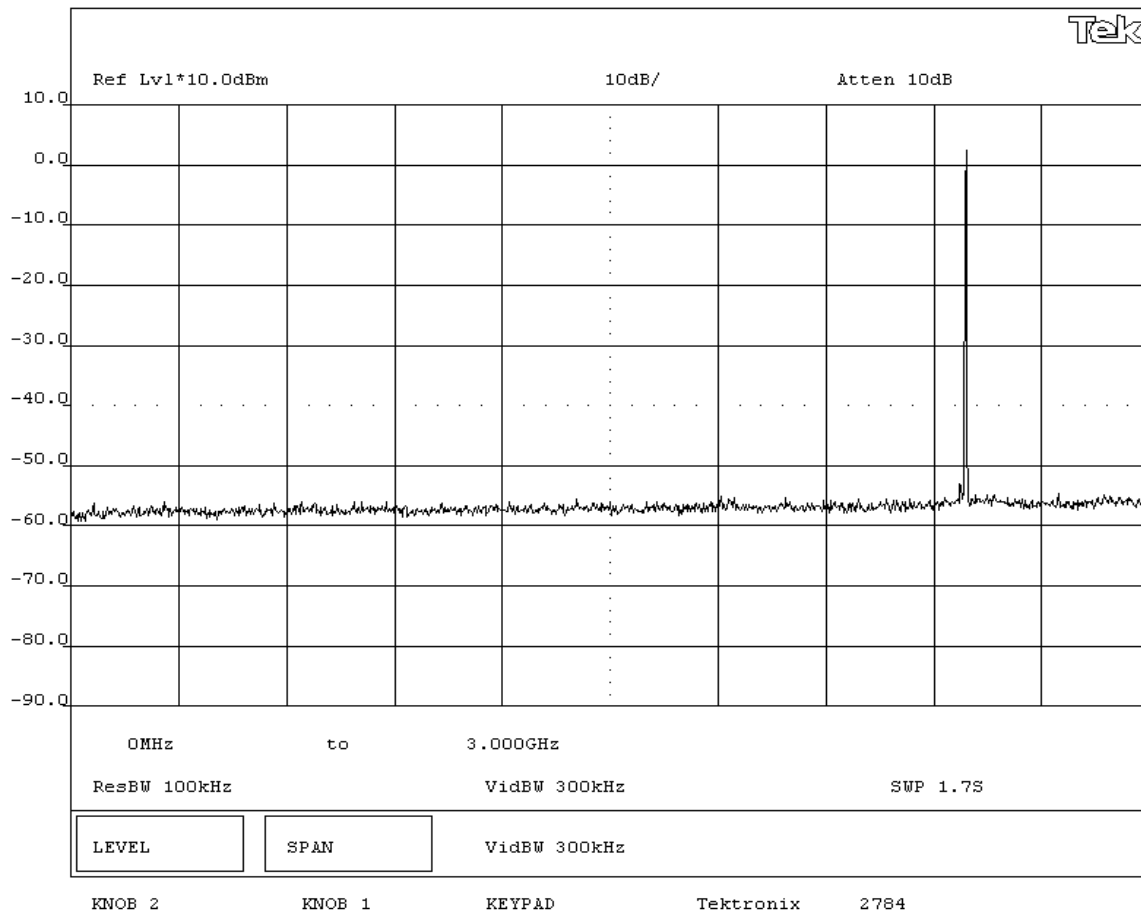

NORTHWEST EMC EMISSIONS DATA SHEET Rev BETA 01/30/01

EUT: MN: A-0363C Cordless Headset		Work Order: LABT0149
Serial Number: Unknown		Date: 08/11/05
Customer: Logitech, Inc.		Temperature: 73 °F
Attendees: None	Tested by: Rod Peloquin	Humidity: 42% RH
Customer Ref. No.: None	Power: Battery	Job Site: EV06

TEST SPECIFICATIONS			
Specification: 47 CFR 15.247(d)	Year: 2005-04	Method: DA 00-705, ANSI C63.4	Year: 2003

SAMPLE CALCULATIONS

COMMENTS

EUT OPERATING MODES
Modulated by PRBS at maximum data rate

DEVIATIONS FROM TEST STANDARD
None


REQUIREMENTS
Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

RESULTS
Pass

SIGNATURE

Tested By: *Rod Peloquin*

DESCRIPTION OF TEST
Antenna Conducted Spurious Emissions - High Channel 3GHz-6.5GHz

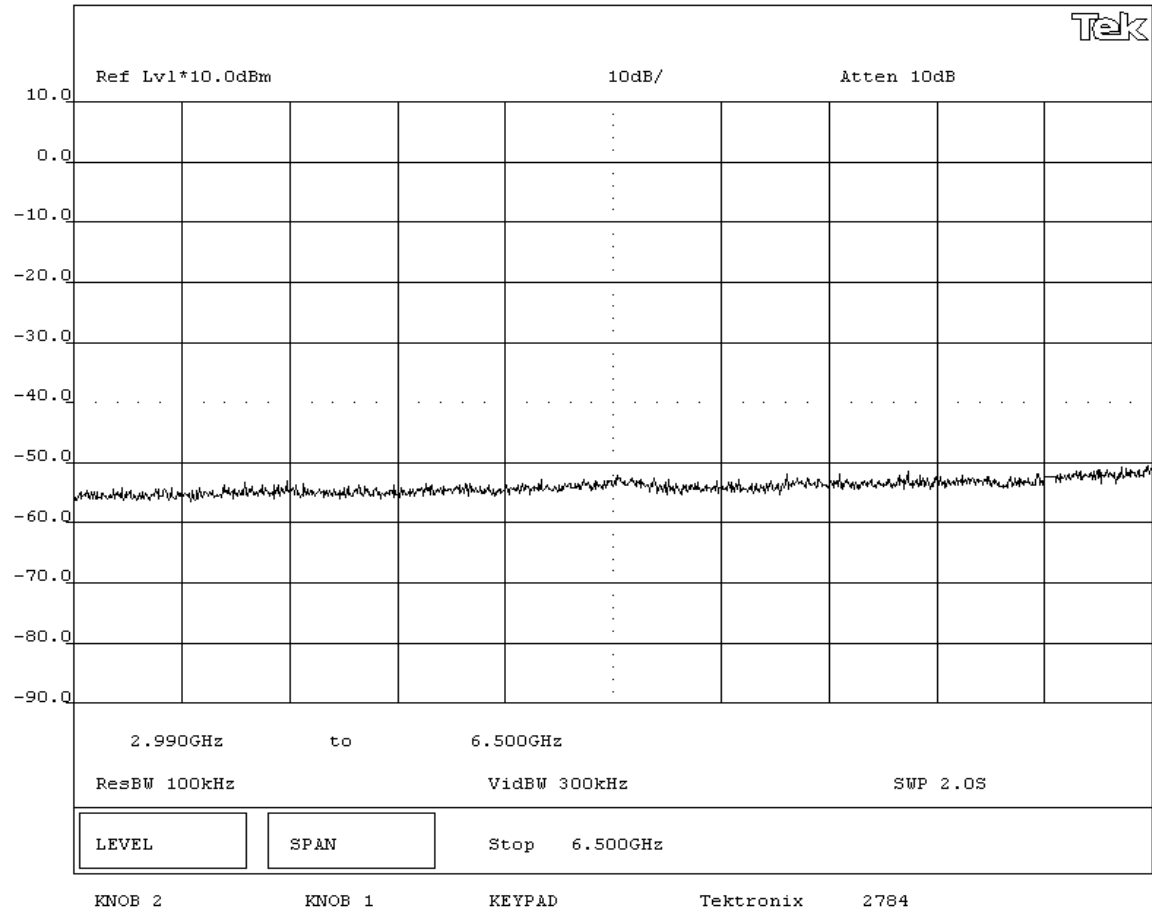

EUT: MN: A-0363C Cordless Headset		Work Order: LABT0149
Serial Number: Unknown		Date: 08/11/05
Customer: Logitech, Inc.		Temperature: 73 °F
Attendees: None	Tested by: Rod Peloquin	Humidity: 42% RH
Customer Ref. No.: None	Power: Battery	Job Site: EV06

TEST SPECIFICATIONS			
Specification: 47 CFR 15.247(d)	Year: 2005-04	Method: DA 00-705, ANSI C63.4	Year: 2003

SAMPLE CALCULATIONS			

COMMENTS			

EUT OPERATING MODES			
Modulated by PRBS at maximum data rate			


DEVIATIONS FROM TEST STANDARD			
None			

REQUIREMENTS			
Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental			

RESULTS			
Pass			

SIGNATURE			
 Tested By: _____			

DESCRIPTION OF TEST			
Antenna Conducted Spurious Emissions - High Channel 6.5GHz-15GHz			

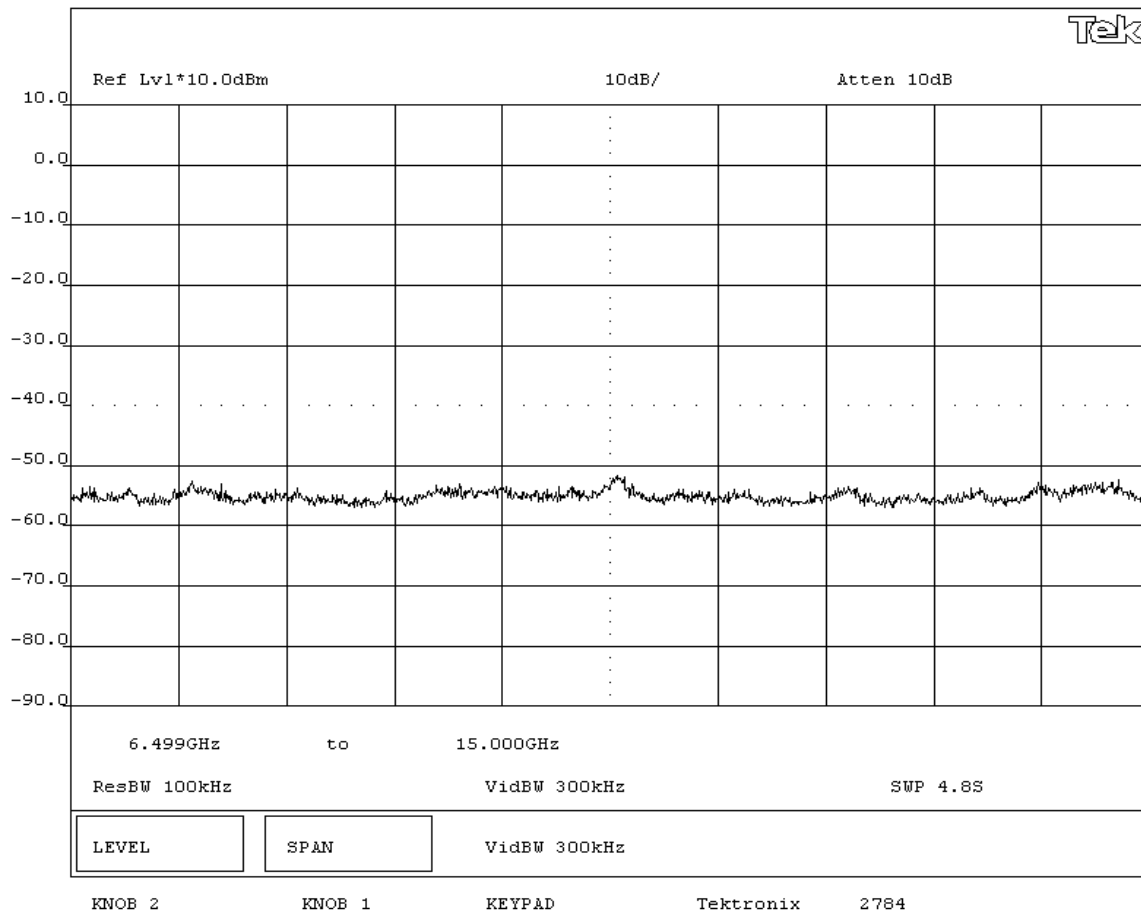

EMISSIONS DATA SHEET

EUT: MN: A-0363C Cordless Headset		Work Order: LABT0149
Serial Number: Unknown		Date: 08/11/05
Customer: Logitech, Inc.		Temperature: 73 °F
Attendees: None	Tested by: Rod Peloquin	Humidity: 42% RH
Customer Ref. No.: None	Power: Battery	Job Site: EV06

TEST SPECIFICATIONS			
Specification: 47 CFR 15.247(d)	Year: 2005-04	Method: DA 00-705, ANSI C63.4	Year: 2003

SAMPLE CALCULATIONS			

COMMENTS			

EUT OPERATING MODES			
Modulated by PRBS at maximum data rate			


DEVIATIONS FROM TEST STANDARD			
None			


REQUIREMENTS			
Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental			

RESULTS			
Pass			

SIGNATURE			
 Tested By: _____			

DESCRIPTION OF TEST			
Antenna Conducted Spurious Emissions - High Channel 15GHz-25GHz			

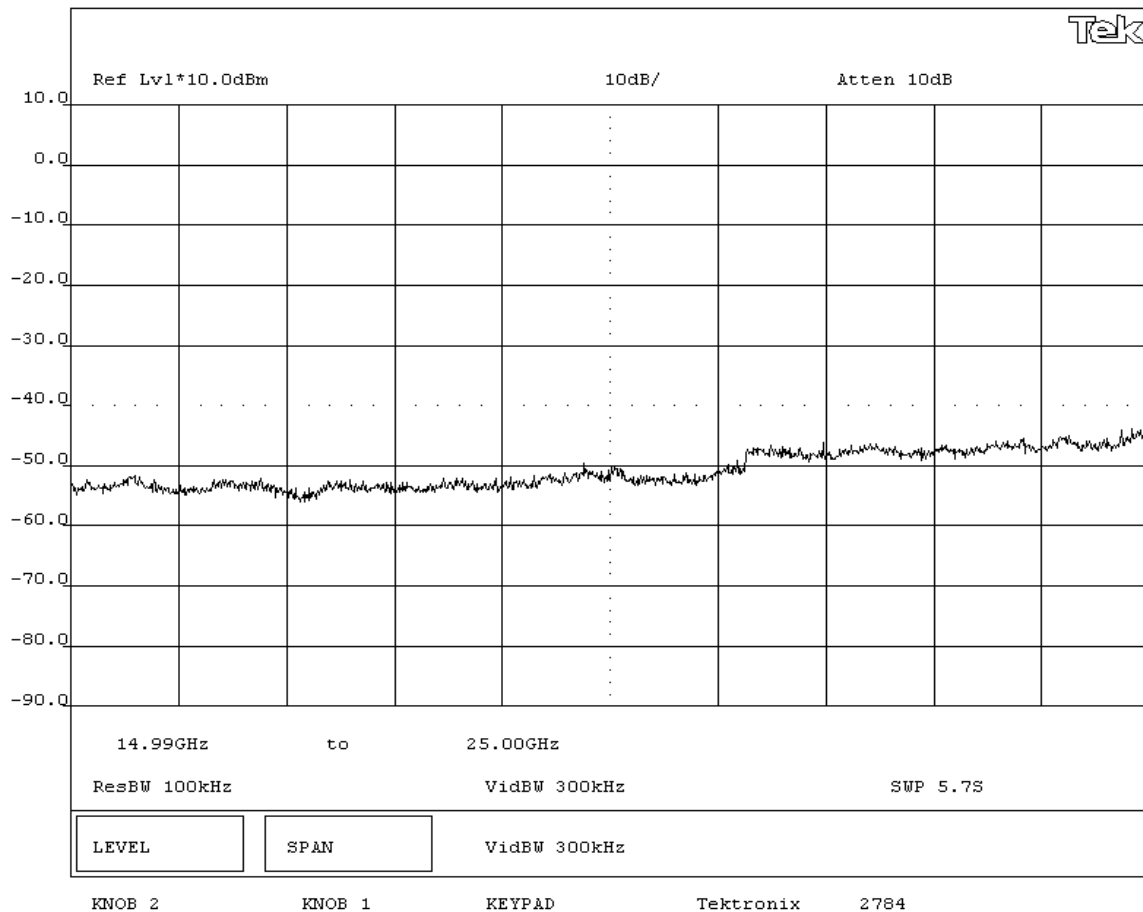

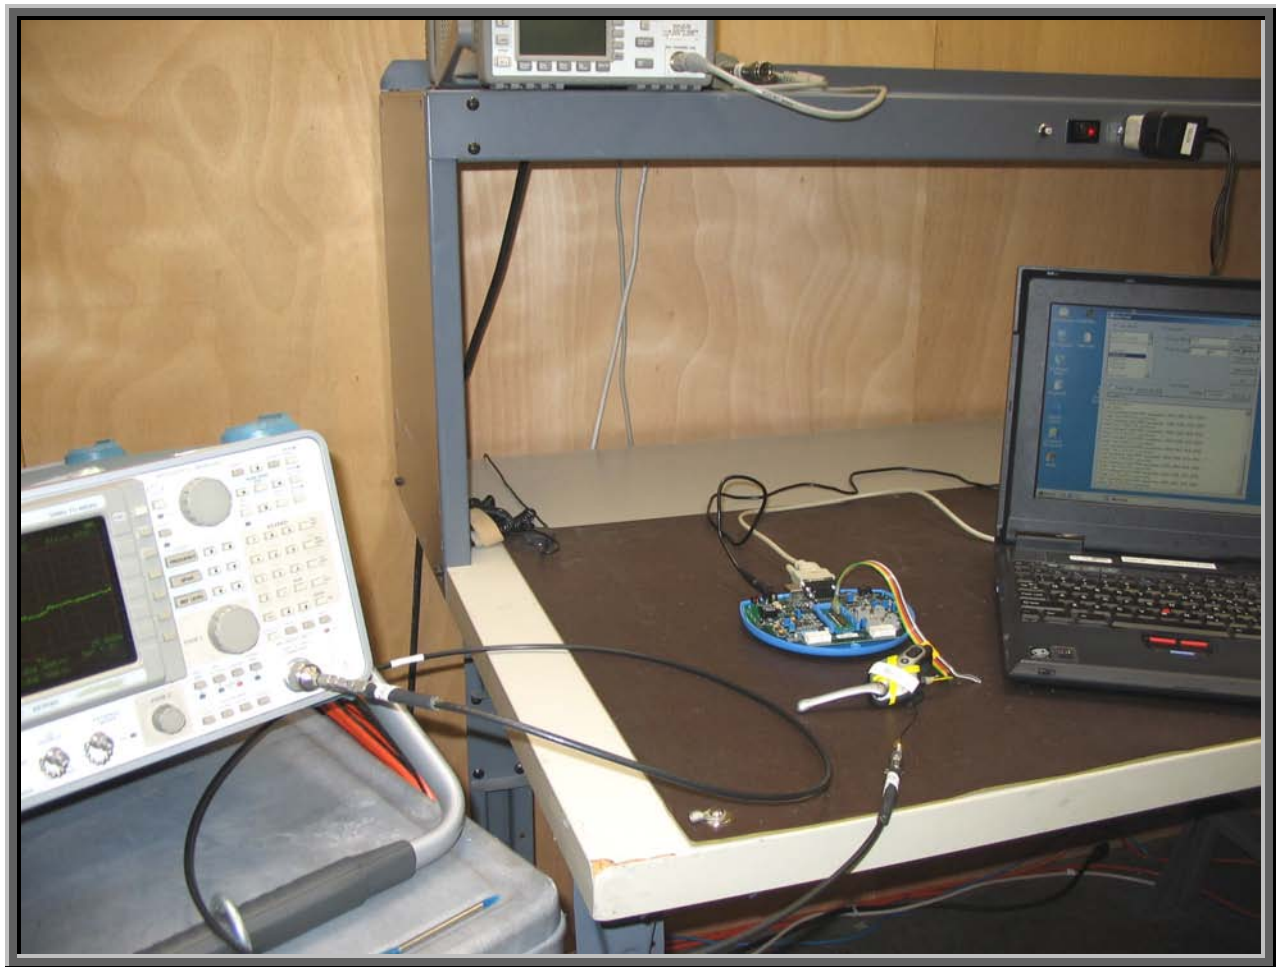

Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

Channels in Specified Band Investigated:

Low

Mid

High

Operating Modes Investigated:

No Hop

Data Rates Investigated:

Maximum

Output Power Setting(s) Investigated:

Maximum

Power Input Settings Investigated:

Battery

Software\Firmware Applied During Test

Exercise software	BlueCore-Audio	Version	1.0
Description			
The system was tested using special software developed to test all functions of the device during the test. The firmware put the radio into a no-hop mode with a modulated carrier. Transmit channels were selectable between the lowest, a middle, and the highest channels in the operating band.			

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
EUT - Bluetooth Headset	Logitech, Inc.	A-0363C	Unknown
Development Module	Cambridge Silicon Radio, Ltd.	BCES301199/1	7467 08 08 03
AC Adapter	Egston	N2GFSW3	42251

Remote Equipment Outside of Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
Laptop PC	IBM	A21M	IS108
AC Adapter	IBM	02K6657	None
Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary			

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
Serial	No	2.1	No	Laptop PC	Development Module
I/O	No	1.2	No	Development Module	EUT - Bluetooth Headset
DC Leads	No	1.8	PA	AC Adapter	Development Module

PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.

Measurement Equipment					
Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Tektronix	2784	AAO	01/02/2005	12 mo

Test Description


Requirement: Per 47 CFR 15.247(e), the peak power spectral density conducted from the antenna port of a direct sequence transmitter must not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission.

Configuration: The peak power spectral density measurements were measured with the EUT set to low, mid, and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate using direct sequence modulation. Per the procedure outlined in FCC 97-114, the spectrum analyzer was used as follows:

The emission peak(s) were located and zoom in on within the passband. The resolution bandwidth was set to 3 kHz, the video bandwidth was set to greater than or equal to the resolution bandwidth. The sweep speed was set equal to the span divided by 3 kHz (sweep = (SPAN/3 kHz)). For example, given a span of 1.5 MHz, the sweep should be $1.5 \times 10^6 \div 3 \times 10^3 = 500$ seconds. External attenuation was used and added to the reading. The following FCC procedure was used for modifying the power spectral density measurements:

"If the spectrum line spacing cannot be resolved on the available spectrum analyzer, the noise density function on most modern conventional spectrum analyzers will directly measure the noise power density normalized to a 1 Hz noise power bandwidth. Add 34.8 dB for correction to 3 kHz."

Completed by:



POWER SPECTRAL DENSITY

EUT: MN: A-0363C Cordless Headset		Work Order: LABT0149
Serial Number: Unknown		Date: 08/11/05
Customer: Logitech, Inc.		Temperature: 73 °F
Attendees: None	Tested by: Rod Peloquin	Humidity: 42% RH
Customer Ref. No.: None	Power: Battery	Job Site: EV06

TEST SPECIFICATIONS			
Specification: 47 CFR 15.247(e)	Year: 2005-06	Method: FCC 97-114, ANSI C63.4	Year: 2003

SAMPLE CALCULATIONS
 Meter reading on spectrum analyzer is internally compensated for cable loss and external attenuation.
 Power Spectral Density per 3kHz bandwidth = Power Spectral Density per 1 Hz bandwidth + Bandwidth Correction Factor.
 Bandwidth Correction Factor = $10 \cdot \log(3\text{kHz}/1\text{Hz}) = 34.8 \text{ dB}$

COMMENTS

EUT OPERATING MODES

Modulated by PRBS at maximum data rate

DEVIATIONS FROM TEST STANDARD

None

REQUIREMENTS

Maximum peak power spectral density conducted from a DSSS transmitter does not exceed 8 dBm in any 3 kHz band


RESULTS

Pass AMPLITUDE
 Power Spectral Density = -7.0dBm / 3kHz

SIGNATURE

Tested By: *Rod Peloquin*

DESCRIPTION OF TEST
Power Spectral Density - Low Channel

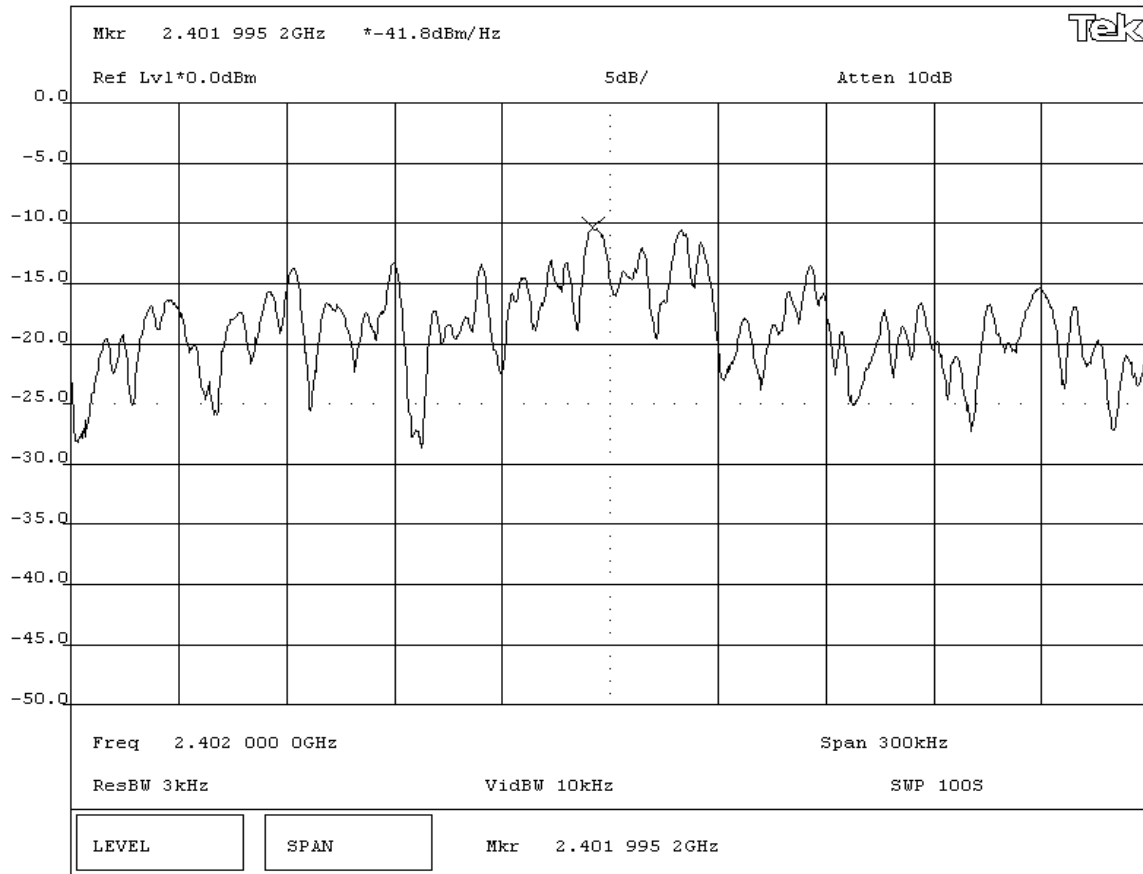

POWER SPECTRAL DENSITY

EUT: MN: A-0363C Cordless Headset		Work Order: LABT0149
Serial Number: Unknown		Date: 08/11/05
Customer: Logitech, Inc.		Temperature: 73 °F
Attendees: None	Tested by: Rod Peloquin	Humidity: 42% RH
Customer Ref. No.: None	Power: Battery	Job Site: EV06

TEST SPECIFICATIONS			
Specification: 47 CFR 15.247(e)	Year: 2005-06	Method: FCC 97-114, ANSI C63.4	Year: 2003

SAMPLE CALCULATIONS
 Meter reading on spectrum analyzer is internally compensated for cable loss and external attenuation
 Power Spectral Density per 3kHz bandwidth = Power Spectral Density per 1 Hz bandwidth + Bandwidth Correction Factor.
 Bandwidth Correction Factor = $10 \cdot \log(3\text{kHz}/1\text{Hz}) = 34.8 \text{ dB}$

COMMENTS

EUT OPERATING MODES

Modulated by PRBS at maximum data rate

DEVIATIONS FROM TEST STANDARD

None

REQUIREMENTS

Maximum peak power spectral density conducted from a DSSS transmitter does not exceed 8 dBm in any 3 kHz band

RESULTS


Pass AMPLITUDE
 Power Spectral Density = -7.1dBm / 3kHz

SIGNATURE

Tested By: 

DESCRIPTION OF TEST

Power Spectral Density - Mid Channel

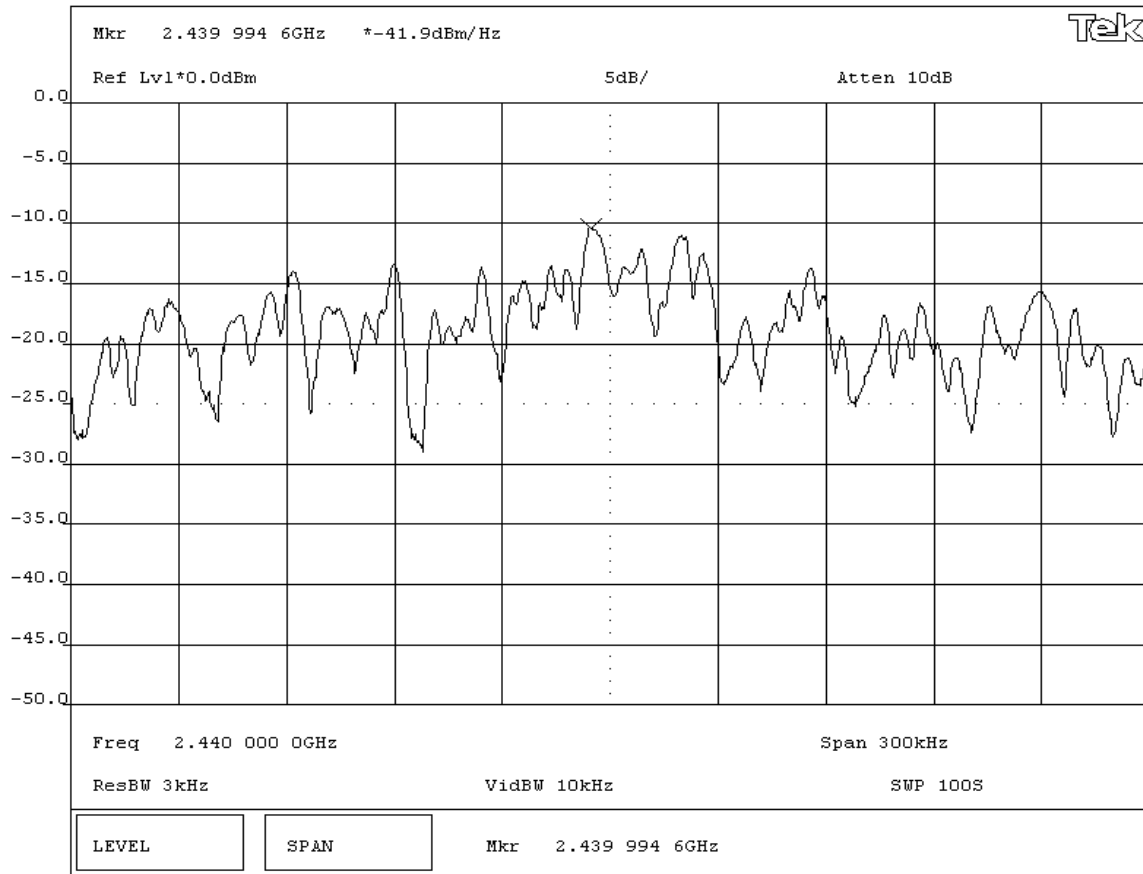

POWER SPECTRAL DENSITY

EUT: MN: A-0363C Cordless Headset		Work Order: LABT0149
Serial Number: Unknown		Date: 08/11/05
Customer: Logitech, Inc.		Temperature: 73 °F
Attendees: None	Tested by: Rod Peloquin	Humidity: 42% RH
Customer Ref. No.: None	Power: Battery	Job Site: EV06

Specification: 47 CFR 15.247(e)	Year: 2005-06	Method: FCC 97-114, ANSI C63.4	Year: 2003
---------------------------------	---------------	--------------------------------	------------

SAMPLE CALCULATIONS
 Meter reading on spectrum analyzer is internally compensated for cable loss and external attenuation
 Power Spectral Density per 3kHz bandwidth = Power Spectral Density per 1 Hz bandwidth + Bandwidth Correction Factor.
 Bandwidth Correction Factor = $10 \cdot \log(3\text{kHz}/1\text{Hz}) = 34.8 \text{ dB}$

COMMENTS

EUT OPERATING MODES

Modulated by PRBS at maximum data rate

DEVIATIONS FROM TEST STANDARD

None

REQUIREMENTS

Maximum peak power spectral density conducted from a DSSS transmitter does not exceed 8 dBm in any 3 kHz band

RESULTS


Pass AMPLITUDE
 Power Spectral Density = -7.5dBm / 3kHz


SIGNATURE

Rodney L. Peloquin
 Tested By: _____

DESCRIPTION OF TEST

Power Spectral Density - High Channel

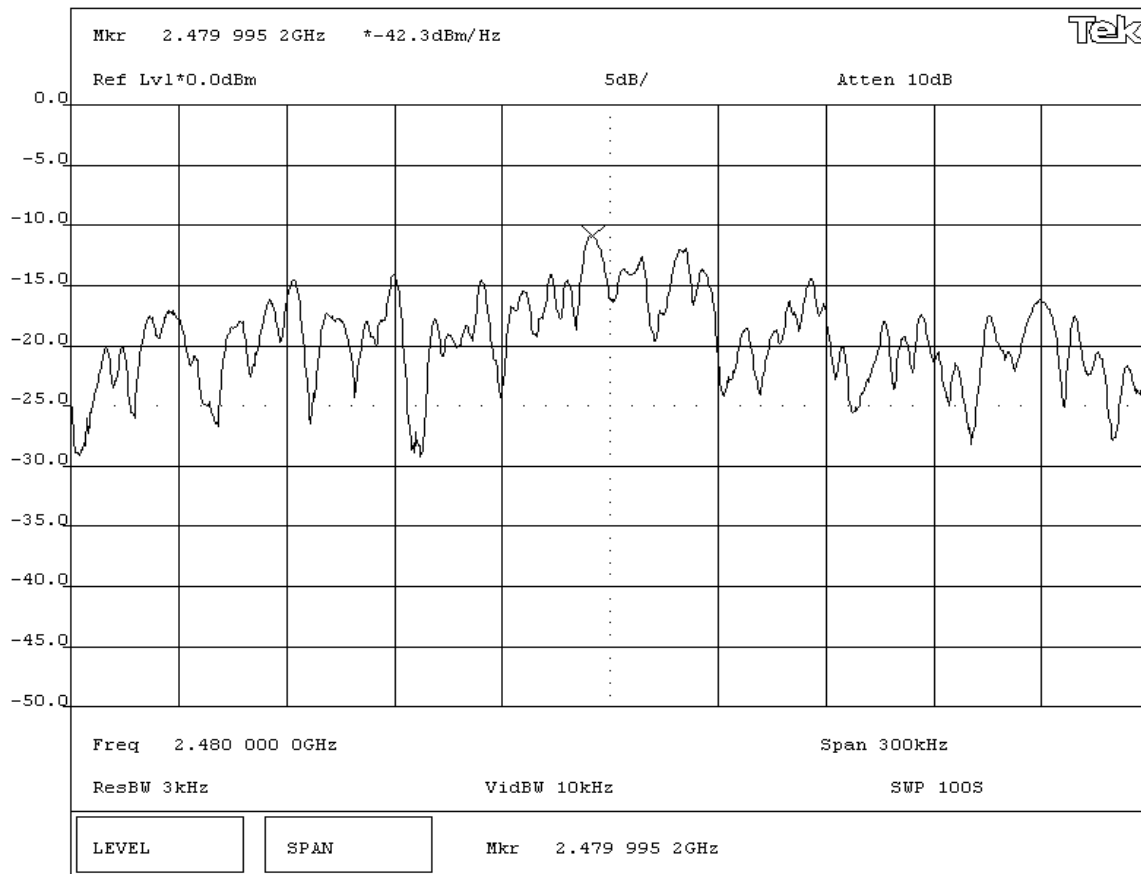

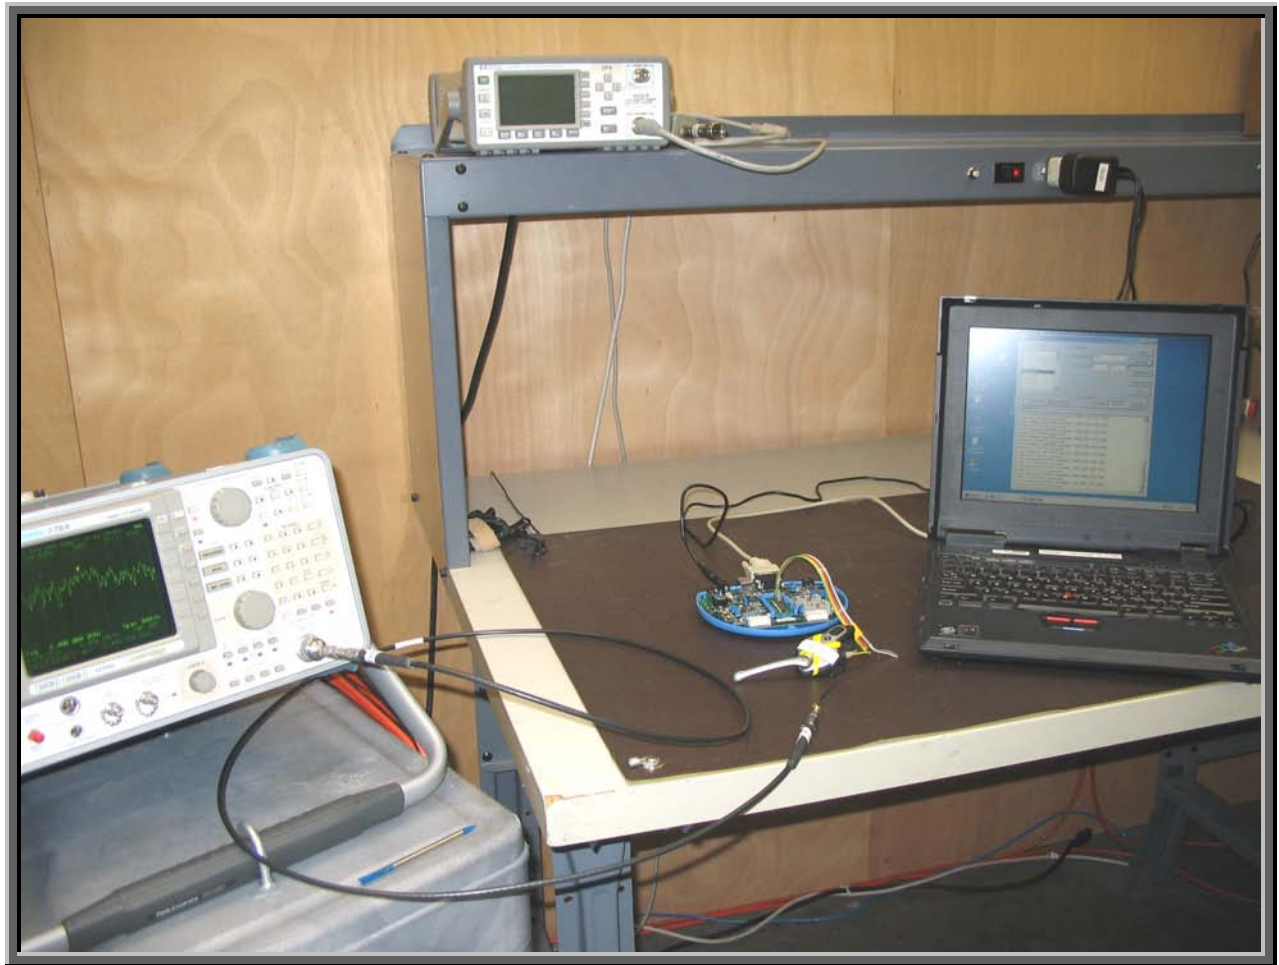

Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

Channels in Specified Band Investigated:

Low

Mid

High

Operating Modes Investigated:

No Hop

Data Rates Investigated:

Maximum

Output Power Setting(s) Investigated:

Maximum

Power Input Settings Investigated:

230VAC, 50Hz to Xbox

Frequency Range Investigated

Start Frequency	30 MHz	Stop Frequency	26 GHz
-----------------	--------	----------------	--------

Software\Firmware Applied During Test

Exercise software	BlueCore-Audio	Version	1.0
-------------------	----------------	---------	-----

Description

The system was tested using special software developed to test all functions of the device during the test. The firmware put the radio into a no-hop mode with a modulated carrier. Transmit channels were selectable between the lowest, a middle, and the highest channels in the operating band.

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
EUT - Bluetooth Dongle	Logitech, Inc.	A-0363D	Unknown
Xbox	Microsoft Corporation	Xbox	412407321303
Game Controller	Microsoft Corporation	Xbox Controller S	751412924A

Remote Equipment Outside of Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
Laptop PC	IBM	A21M	IS108
AC Adapter	IBM	02K6657	None
Development Module	Cambridge Silicon Radio, Ltd.	BCES301199/1	7467 08 08 03
AC Adapter	Egston	N2GHSW3	42251

Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
Serial	No	2.1	No	Laptop PC	Development Module
I/O	No	1.2	No	Development Module	Bluetooth Headset
DC Leads	No	1.8	PA	AC Adapter	Development Module
DC Leads	No	1.8	PA	AC Adapter	Laptop PC
AC Power	No	2.0	No	AC Adapter	AC Mains
Audio/Video	Yes	1.0	Yes	Xbox	Unterminated
AC Power	No	1.6	Yes	Xbox	AC Mains
Game Control	No	1.4	Yes	Xbox	Game Controller

PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.

Measurement Equipment

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Antenna, Biconilog	EMCO	3141	AXE	12/03/2003	24 mo
Pre-Amplifier	Miteq	AM-1616-1000	AOL	08/02/2005	13 mo
Spectrum Analyzer	Agilent	E4446A	AAQ	04/08/2005	13 mo
Antenna, Horn	EMCO	3115	AHC	09/07/2004	12 mo
Pre-Amplifier	Miteq	AMF-4D-010100-24-10P	APW	08/02/2005	13 mo
High Pass Filter	Micro-Tronics	HPM50111	HFO	03/09/2005	13 mo
Antenna, Horn	EMCO	3160-08	AHK	NCR	NA
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APC	02/17/2005	13 mo
Antenna, Horn	EMCO	3160-09	AHG	NCR	NA
Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	02/15/2005	13 mo

Test Description

Requirement: The field strength of any spurious emissions or modulation products that fall in a restricted band, as defined in 47 CFR 15.205, is measured. The peak level must comply with the limits specified in 47 CFR 15.35(b). The average level (taken with a 10Hz VBW) must comply with the limits specified in 15.209.

Configuration: The highest gain of each type of antenna to be used with the EUT was tested. The EUT was configured for low, mid, and high band transmit frequencies. For each configuration, the spectrum was scanned throughout the specified range. In addition, measurements were made in the restricted bands to verify compliance. While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and the EUT antenna in three orthogonal axis, and adjusting measurement antenna height and polarization, and manipulating the EUT antenna in 3 orthogonal planes (per ANSI C63.4:2003). A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

Bandwidths Used for Measurements			
Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 – 0.15	1.0	0.2	0.2
0.15 – 30.0	10.0	9.0	9.0
30.0 – 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

Measurements were made using the bandwidths and detectors specified. No video filter was used.

Completed by:

EUT: MN: A-0363D Game Port Dongle	Work Order: LABT0149
Serial Number: Unknown	Date: 08/15/05
Customer: Logitech, Inc.	Temperature: 27
Attendees: None	Humidity: 39%
Project: None	Barometric Pressure: 29.86
Tested by: Holly Ashkannejhad	Power: 230VAC, 50Hz
	Job Site: EV01

TEST SPECIFICATIONS	
FCC 15.247(d) Spurious Radiated Emissions:2005-04	Test Method ANSI C63.4:2003


TEST PARAMETERS			
Antenna Height(s) (m)	1 - 4	Test Distance (m)	3

COMMENTS
Modification cable balled up.

EUT OPERATING MODES
No hop, low channel

DEVIATIONS FROM TEST STANDARD
No deviations.

Run #	6	Signature <i>Holly Ashkannejhad</i>
Configuration #		
Results	Pass	

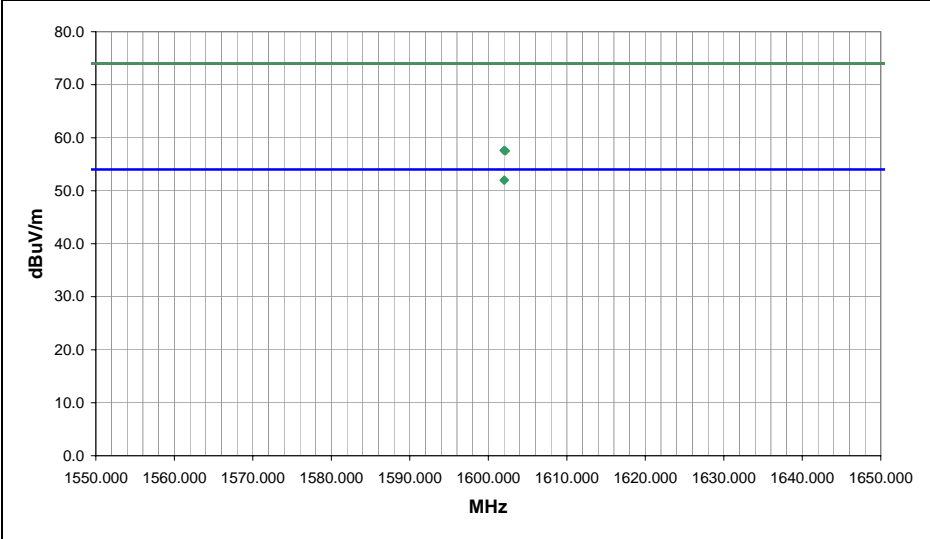

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
1602.044	34.8	-2.8	313.0	2.2	3.0	20.0	H-Horn	AV	0.0	52.0	54.0	-2.0	EUT Horizontal, modification cable balled up.
1602.016	34.8	-2.8	325.0	1.9	3.0	20.0	V-Horn	AV	0.0	52.0	54.0	-2.0	EUT Vertical, modification cable balled up.
1601.988	40.4	-2.8	325.0	1.9	3.0	20.0	V-Horn	PK	0.0	57.6	74.0	-16.4	EUT Vertical, modification cable balled up.
1602.184	40.3	-2.8	313.0	2.2	3.0	20.0	H-Horn	PK	0.0	57.5	74.0	-16.5	EUT Horizontal, modification cable balled up.

RADIATED EMISSIONS DATA SHEET

EUT: MN: A-0363D Game Port Dongle	Work Order: LABT0149
Serial Number: Unknown	Date: 08/15/05
Customer: Logitech, Inc.	Temperature: 27
Attendees: None	Humidity: 39%
Project: None	Barometric Pressure: 29.86
Tested by: Holly Ashkannejhad	Power: 230VAC, 50Hz
	Job Site: EV01

TEST SPECIFICATIONS	
FCC 15.247(d) Spurious Radiated Emissions:2005-04	ANSI C63.4:2003
TEST METHOD	


TEST PARAMETERS	
Antenna Height(s) (m) 1 - 4	Test Distance (m) 3

COMMENTS

EUT OPERATING MODES
No hop, low channel

DEVIATIONS FROM TEST STANDARD
No deviations.

Run #	7	Signature <i>Holly Ashkannejhad</i>
Configuration #		
Results	Pass	

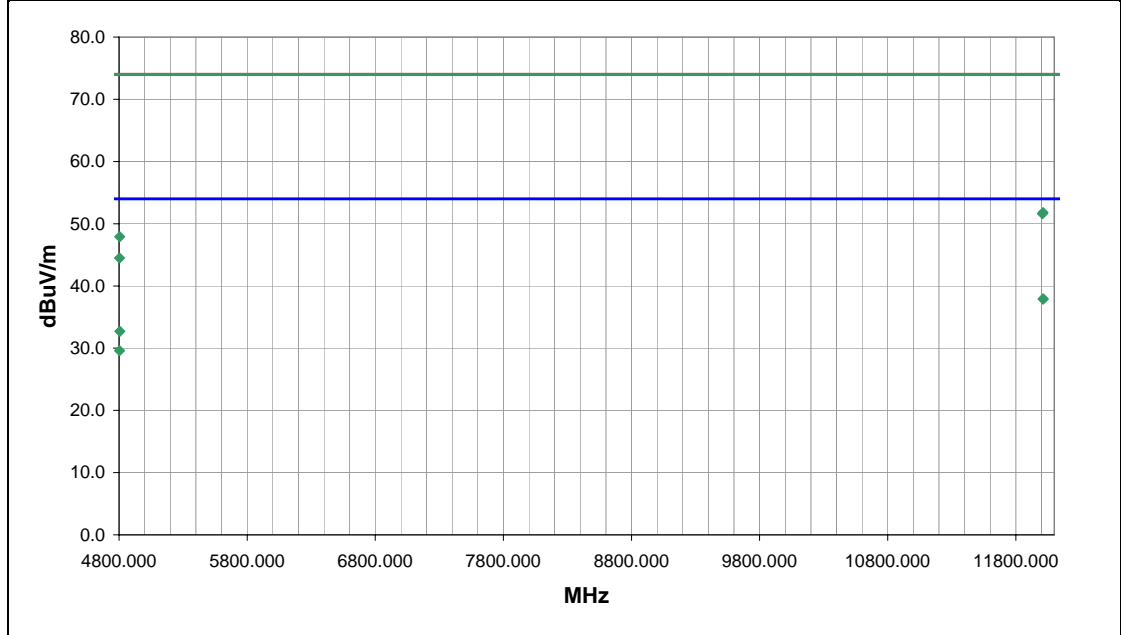

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
12013.280	21.9	16.0	67.0	3.5	3.0	0.0	V-Horn	AV	0.0	37.9	54.0	-16.1	EUT Vertical
12012.170	21.9	16.0	318.0	1.0	3.0	0.0	H-Horn	AV	0.0	37.9	54.0	-16.1	EUT Horizontal
4805.667	26.3	6.4	165.0	2.5	3.0	0.0	V-Horn	AV	0.0	32.7	54.0	-21.3	EUT Vertical
12012.160	35.8	16.0	318.0	1.0	3.0	0.0	H-Horn	PK	0.0	51.8	74.0	-22.2	EUT Horizontal
12008.100	35.6	16.0	67.0	3.5	3.0	0.0	V-Horn	PK	0.0	51.6	74.0	-22.4	EUT Vertical
4804.207	23.2	6.4	183.0	3.3	3.0	0.0	H-Horn	AV	0.0	29.6	54.0	-24.4	EUT Horizontal
4804.828	41.5	6.4	165.0	2.5	3.0	0.0	V-Horn	PK	0.0	47.9	74.0	-26.1	EUT Vertical
4804.013	38.1	6.4	183.0	3.3	3.0	0.0	H-Horn	PK	0.0	44.5	74.0	-29.5	EUT Horizontal

EUT: MN: A-0363D Game Port Dongle	Work Order: LABT0149
Serial Number: Unknown	Date: 08/15/05
Customer: Logitech, Inc.	Temperature: 27
Attendees: None	Humidity: 39%
Project: None	Barometric Pressure: 29.86
Tested by: Holly Ashkannejhad	Power: 230VAC, 50Hz
	Job Site: EV01

TEST SPECIFICATIONS		Test Method	
FCC 15.247(d) Spurious Radiated Emissions:2005-04		ANSI C63.4:2003	


TEST PARAMETERS			
Antenna Height(s) (m)	1 - 4	Test Distance (m)	3

COMMENTS	

EUT OPERATING MODES	
No hop, mid channel	

DEVIATIONS FROM TEST STANDARD	
No deviations.	

Run #	8	Signature <i>Holly Ashkannejhad</i>
Configuration #		
Results	Pass	

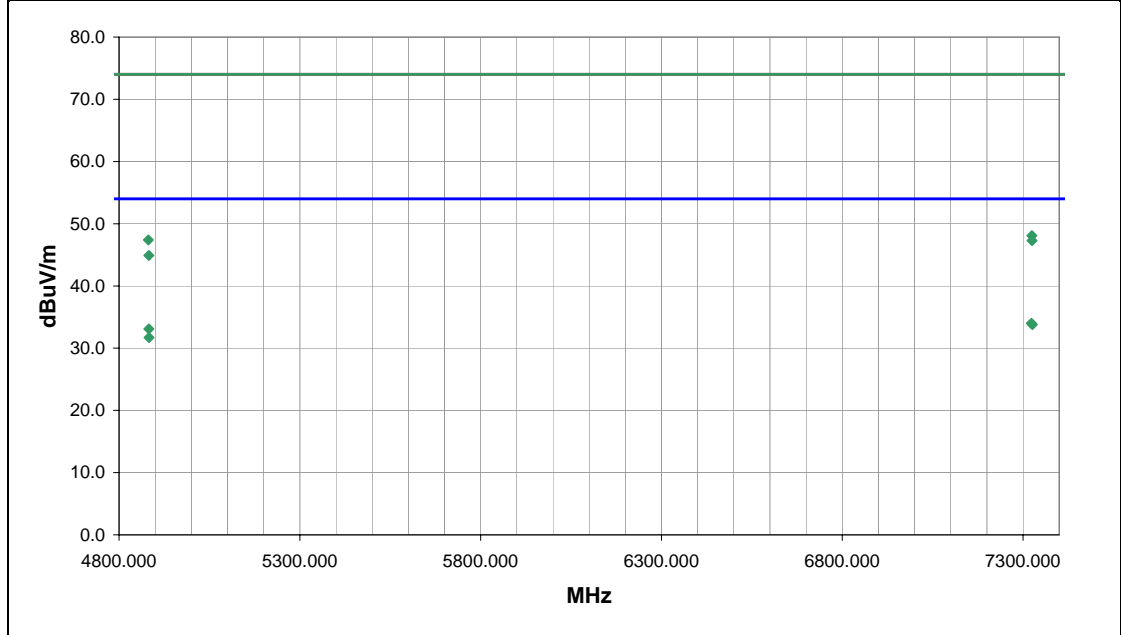

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
7323.031	20.5	13.5	116.0	1.0	3.0	0.0	V-Horn	AV	0.0	34.0	54.0	-20.0	EUT Vertical
7325.565	20.3	13.5	13.0	1.0	3.0	0.0	H-Horn	AV	0.0	33.8	54.0	-20.2	EUT Horizontal
4882.089	26.4	6.7	338.0	1.4	3.0	0.0	V-Horn	AV	0.0	33.1	54.0	-20.9	EUT Vertical
4882.828	25.0	6.7	119.0	1.2	3.0	0.0	H-Horn	AV	0.0	31.7	54.0	-22.3	EUT Horizontal
7324.143	34.6	13.5	13.0	1.0	3.0	0.0	H-Horn	PK	0.0	48.1	74.0	-25.9	EUT Horizontal
4881.144	40.7	6.7	338.0	1.4	3.0	0.0	V-Horn	PK	0.0	47.4	74.0	-26.6	EUT Vertical
7324.624	33.8	13.5	116.0	1.0	3.0	0.0	V-Horn	PK	0.0	47.3	74.0	-26.7	EUT Vertical
4882.271	38.2	6.7	119.0	1.2	3.0	0.0	H-Horn	PK	0.0	44.9	74.0	-29.1	EUT Horizontal

RADIATED EMISSIONS DATA SHEET

EUT: MN: A-0363D Game Port Dongle		Work Order: LABT0149	
Serial Number: Unknown		Date: 08/15/05	
Customer: Logitech, Inc.		Temperature: 27	
Attendees: None		Humidity: 39%	
Project: None		Barometric Pressure: 29.86	
Tested by: Holly Ashkannejhad		Power: 230VAC, 50Hz	
		Job Site: EV01	

TEST SPECIFICATIONS		Test Method	
FCC 15.247(d) Spurious Radiated Emissions:2005-04		ANSI C63.4:2003	


TEST PARAMETERS			
Antenna Height(s) (m)	1 - 4	Test Distance (m)	3

COMMENTS	

EUT OPERATING MODES	
No hop, high channel	

DEVIATIONS FROM TEST STANDARD	
No deviations.	

Run #	9	Signature <i>Holly Ashkannejhad</i>
Configuration #		
Results	Pass	

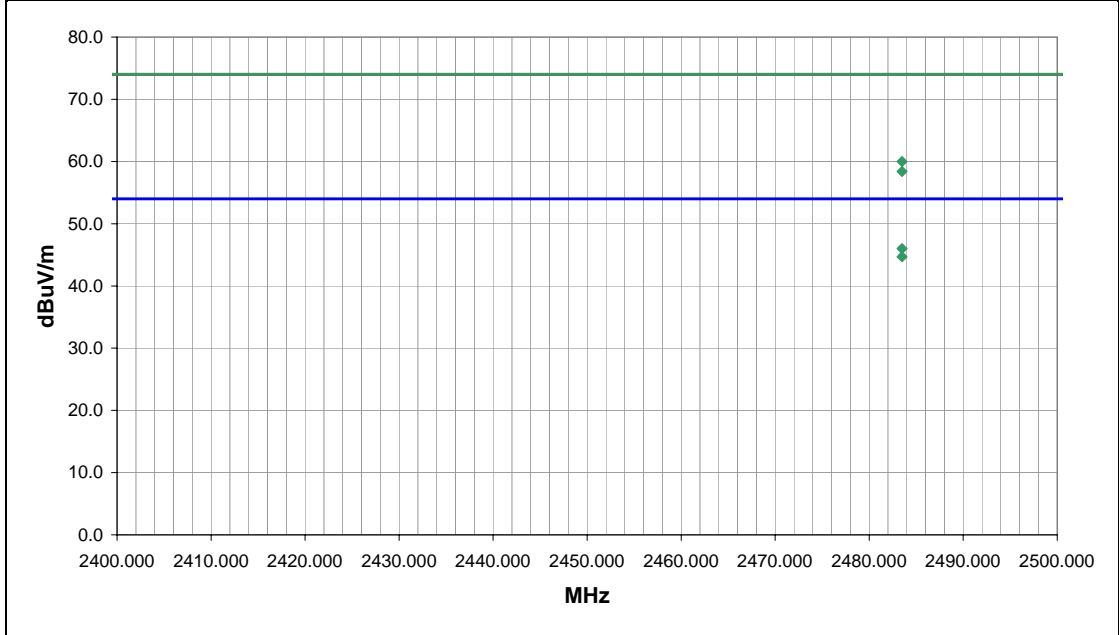

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
2483.500	25.5	0.5	350.0	2.1	3.0	20.0	H-Horn	AV	0.0	46.0	54.0	-8.0	EUT Horizontal
2483.500	24.2	0.5	305.0	1.0	3.0	20.0	V-Horn	AV	0.0	44.7	54.0	-9.3	EUT Vertical
2483.500	39.5	0.5	350.0	2.1	3.0	20.0	H-Horn	PK	0.0	60.0	74.0	-14.0	EUT Horizontal
2483.500	37.9	0.5	305.0	1.0	3.0	20.0	V-Horn	PK	0.0	58.4	74.0	-15.6	EUT Vertical

EUT: MN: A-0363D Game Port Dongle	Work Order: LABT0149
Serial Number: Unknown	Date: 08/15/05
Customer: Logitech, Inc.	Temperature: 27
Attendees: None	Humidity: 39%
Project: None	Barometric Pressure: 29.86
Tested by: Holly Ashkannejhad	Power: 230VAC, 50Hz
	Job Site: EV01

TEST SPECIFICATIONS		Test Method
FCC 15.247(d) Spurious Radiated Emissions:2005-04	ANSI C63.4:2003	


TEST PARAMETERS	
Antenna Height(s) (m) 1 - 4	Test Distance (m) 3

COMMENTS

EUT OPERATING MODES
No hop, low channel

DEVIATIONS FROM TEST STANDARD
No deviations.

Run #	10	Signature <i>Holly Ashkannejhad</i>
Configuration #		
Results	Pass	

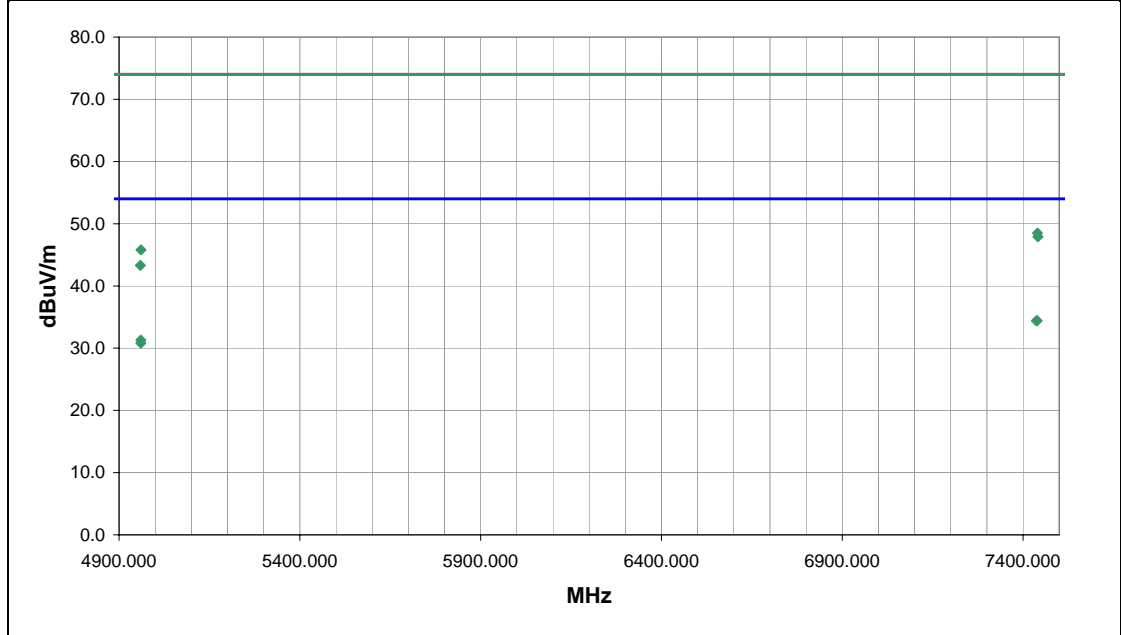

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
7436.538	20.5	13.9	206.0	1.0	3.0	0.0	V-Horn	AV	0.0	34.4	54.0	-19.6	EUT Vertical
7438.923	20.5	13.9	279.0	1.0	3.0	0.0	H-Horn	AV	0.0	34.4	54.0	-19.6	EUT Horizontal
4960.011	24.5	6.8	348.0	1.0	3.0	0.0	V-Horn	AV	0.0	31.3	54.0	-22.7	EUT Vertical
4960.063	24.0	6.8	287.0	1.2	3.0	0.0	H-Horn	AV	0.0	30.8	54.0	-23.2	EUT Horizontal
7440.013	34.6	13.9	206.0	1.0	3.0	0.0	V-Horn	PK	0.0	48.5	74.0	-25.5	EUT Vertical
7441.123	34.0	13.9	279.0	1.0	3.0	0.0	H-Horn	PK	0.0	47.9	74.0	-26.1	EUT Horizontal
4960.624	39.0	6.8	348.0	1.0	3.0	0.0	V-Horn	PK	0.0	45.8	74.0	-28.2	EUT Vertical
4958.674	36.5	6.8	287.0	1.2	3.0	0.0	H-Horn	PK	0.0	43.3	74.0	-30.7	EUT Horizontal







Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. All of the EUT parameters listed below were investigated. This includes, but may not be limited to, CPU speeds, video resolution settings, operational modes, and input voltages.

Operating Modes Investigated:

Transmitting High Channel
Transmitting Mid Channel
Transmitting Low Channel

Power Input Settings Investigated:

230 VAC, 50 Hz
120 VAC, 60 Hz

Software\Firmware Applied During Test

Exercise software	BlueCore-Audio	Version	1.0
Description			
The system was tested using special software developed to test all functions of the device during the test. The firmware put the radio into a no-hop mode with a modulated carrier. Transmit channels were selectable between the lowest, a middle, and the highest channels in the operating band.			

EUT and Peripherals in Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
EUT - Bluetooth Dongle	Logitech, Inc.	A-0363D	Unknown
Controller	Microsoft	Unknown	751412929A
Xbox - EU	Microsoft	Unknown	412407321303
Xbox - US	Microsoft	Unknown	393229733206

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Leads	No	1.2	No	Xbox - EU	AC Mains
AC Leads	No	1.2	No	Xbox - US	AC Mains

PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.

Measurement Equipment

Description	Manufacturer	Model	Identifier	Last Cal	Interval
LISN	Solar	9252-50-R-24-BNC	LIN	12/29/2004	13 mo
High Pass Filter	TTE	H97-100k-50-720B	HFC	12/29/2004	13 mo
Attenuator	Tektronix	011-0059-02	ATH	12/29/2004	13 mo
Spectrum Analyzer	Agilent	E4446A	AAQ	04/08/2005	13 mo

Test Description

Using the mode of operation and configuration noted within this report, conducted emissions tests were performed. The frequency range investigated (scanned), is also noted in this report. Conducted power line measurements are made, unless otherwise specified, over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio-noise voltage that is conducted from the EUT power-input terminals that are directly (or indirectly via separate transformer or power supplies) connected to a public power network. Equipment is tested with power cords that are normally used or that have electrical or shielding characteristics that are the same as those cords normally used. Typically those measurements are made using a LISN (Line Impedance Stabilization Network), the 50 Ω measuring port is terminated by a 50 Ω EMI meter or a 50 Ω resistive load. All 50 Ω measuring ports of the LISN are terminated by 50 Ω .

Measurement Bandwidths

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 – 0.15	1.0	0.2	0.2
0.15 – 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

Measurements were made using the bandwidths and detectors specified. No video filter was used.

Completed by:


EUT: MN: A-0363D Game Port Dongle		Work Order: LABT0149
Serial Number: Unknown	Date: 09/10/05	
Customer: Logitech, Inc.	Temperature: 25	
Attendees: None	Humidity: 33%	
Project: None	Barometric Pressure: 29.98	
Tested by: Holly Ashkannejhad	Power: 120VAC, 60Hz	Job Site: EV01

TEST SPECIFICATIONS	Test Method
FCC 15.207 Class B:2005-04 FCC 15.107 Class B:2005-04	ANSI C63.4:2003 ANSI C63.4:2003


TEST PARAMETERS
Cable or Line Tested: L1

COMMENTS
US Xbox

EUT OPERATING MODES
Transmitting Low channel

DEVIATIONS FROM TEST STANDARD
No deviations.

Run #	11	Signature <i>Holly Ashkannejhad</i>
Configuration #		
Results	Pass	

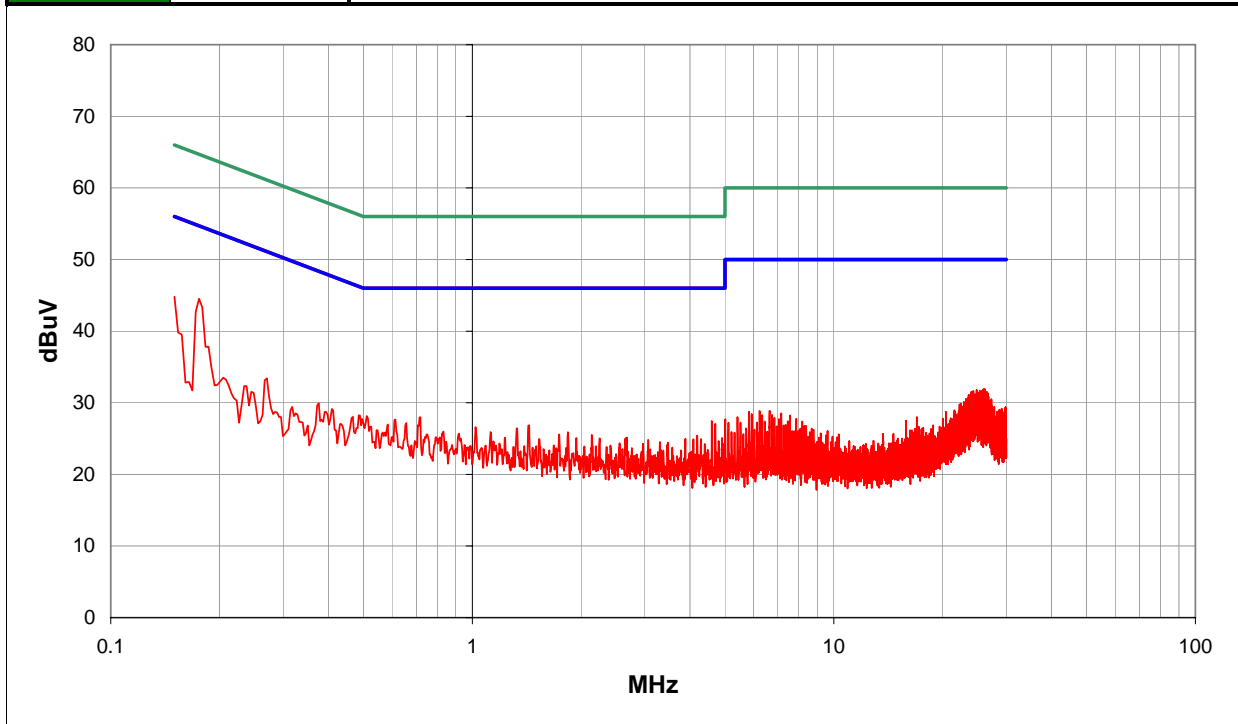

Freq (MHz)	Amplitude (dBuV)	Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.176	24.3	0.0	0.2	20.0		44.5	54.7	-10.2
0.150	24.6	0.0	0.2	20.0		44.8	56.0	-11.2
0.270	13.2	0.0	0.2	20.0		33.4	51.1	-17.7
0.489	8.0	0.0	0.2	20.0		28.2	46.2	-17.9
0.719	7.7	0.0	0.3	20.0		28.0	46.0	-18.0
26.142	10.3	0.0	1.6	20.0		31.9	50.0	-18.1
25.956	10.3	0.0	1.6	20.0		31.9	50.0	-18.1
24.837	10.2	0.0	1.6	20.0		31.8	50.0	-18.2
25.749	10.1	0.0	1.6	20.0		31.7	50.0	-18.3
25.333	10.1	0.0	1.6	20.0		31.7	50.0	-18.3
0.613	7.4	0.0	0.3	20.0		27.7	46.0	-18.3
24.320	10.1	0.0	1.6	20.0		31.7	50.0	-18.3
25.643	10.0	0.0	1.6	20.0		31.6	50.0	-18.4
0.376	9.7	0.0	0.2	20.0		29.9	48.4	-18.4
24.006	10.0	0.0	1.5	20.0		31.5	50.0	-18.5
26.452	9.9	0.0	1.6	20.0		31.5	50.0	-18.5
0.467	7.8	0.0	0.2	20.0		28.0	46.6	-18.5
0.409	8.9	0.0	0.2	20.0		29.1	47.7	-18.5
4.600	6.8	0.0	0.7	20.0		27.5	46.0	-18.5

EUT: MN: A-0363D Game Port Dongle		Work Order: LABT0149
Serial Number: Unknown		Date: 09/10/05
Customer: Logitech, Inc.		Temperature: 25
Attendees: None		Humidity: 33%
Project: None		Barometric Pressure: 29.98
Tested by: Holly Ashkannejhad	Power: 120VAC, 60Hz	Job Site: EV01

TEST SPECIFICATIONS	Test Method
FCC 15.207 Class B:2005-04	ANSI C63.4:2003
FCC 15.107 Class B:2005-04	ANSI C63.4:2003


TEST PARAMETERS
Cable or Line Tested: N

COMMENTS
US Xbox

EUT OPERATING MODES
Transmitting Low channel

DEVIATIONS FROM TEST STANDARD
No deviations.

Run #	12	Signature <i>Holly Ashkannejhad</i>
Configuration #		
Results	Pass	

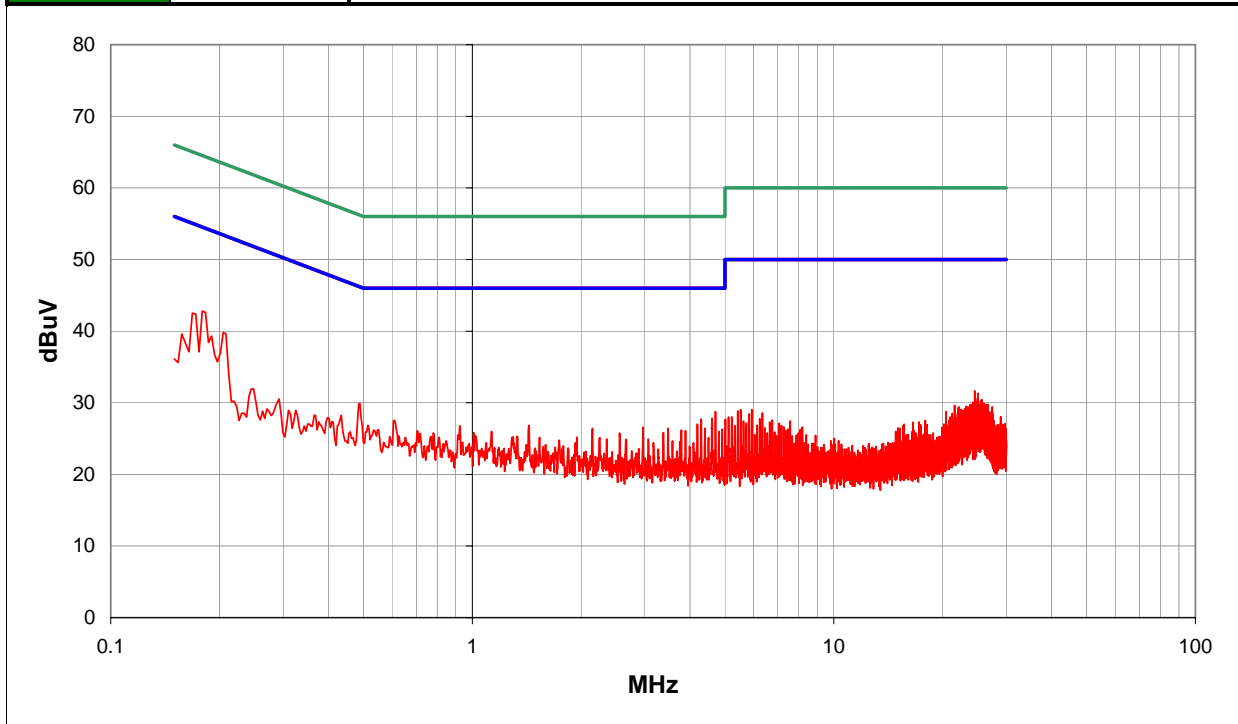

Freq (MHz)	Amplitude (dBuV)	Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.179	22.6	0.0	0.2	20.0		42.8	54.5	-11.7
0.168	22.3	0.0	0.2	20.0		42.5	55.0	-12.5
0.205	19.6	0.0	0.2	20.0		39.8	53.4	-13.6
0.157	19.4	0.0	0.2	20.0		39.6	55.6	-16.0
0.489	9.7	0.0	0.2	20.0		29.9	46.2	-16.2
4.705	8.1	0.0	0.7	20.0		28.8	46.0	-17.2
4.603	7.2	0.0	0.7	20.0		27.9	46.0	-18.1
4.297	7.1	0.0	0.6	20.0		27.7	46.0	-18.3
24.542	10.1	0.0	1.6	20.0		31.7	50.0	-18.3
0.609	7.3	0.0	0.3	20.0		27.6	46.0	-18.4
25.063	9.7	0.0	1.6	20.0		31.3	50.0	-18.7
0.434	8.0	0.0	0.2	20.0		28.2	47.2	-18.9
4.195	6.4	0.0	0.6	20.0		27.0	46.0	-19.0
0.514	6.6	0.0	0.2	20.0		26.8	46.0	-19.2
1.433	6.5	0.0	0.3	20.0		26.8	46.0	-19.2
0.923	6.5	0.0	0.3	20.0		26.8	46.0	-19.2
2.963	6.1	0.0	0.5	20.0		26.6	46.0	-19.4
24.961	9.0	0.0	1.6	20.0		30.6	50.0	-19.4
3.481	5.9	0.0	0.5	20.0		26.4	46.0	-19.6

EUT: MN: A-0363D Game Port Dongle		Work Order: LABT0149
Serial Number: Unknown	Date: 09/10/05	
Customer: Logitech, Inc.	Temperature: 25	
Attendees: None	Humidity: 33%	
Project: None	Barometric Pressure: 29.98	
Tested by: Holly Ashkannejhad	Power: 120VAC, 60Hz	Job Site: EV01

TEST SPECIFICATIONS		Test Method
FCC 15.207 Class B:2005-04	ANSI C63.4:2003	
FCC 15.107 Class B:2005-04	ANSI C63.4:2003	


TEST PARAMETERS	
Cable or Line Tested	N

COMMENTS	
US XBox	

EUT OPERATING MODES	
Transmitting Mid channel	

DEVIATIONS FROM TEST STANDARD	
No deviations.	

Run #	13	Signature <i>Holly Ashkannejhad</i>
Configuration #		
Results	Pass	

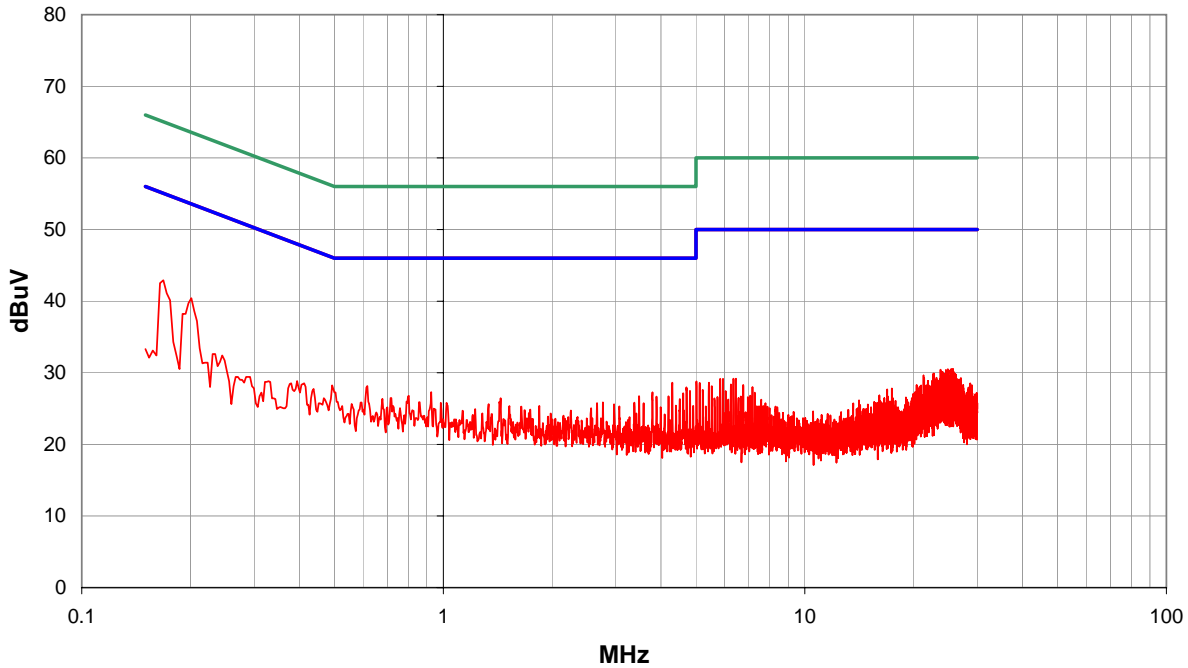

Freq (MHz)	Amplitude (dBuV)	Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.168	22.7	0.0	0.2	20.0		42.9	55.0	-12.1
0.201	20.2	0.0	0.2	20.0		40.4	53.6	-13.2
4.301	8.0	0.0	0.6	20.0		28.6	46.0	-17.4
0.616	7.9	0.0	0.3	20.0		28.2	46.0	-17.8
0.493	8.0	0.0	0.2	20.0		28.2	46.1	-17.9
4.705	7.3	0.0	0.7	20.0		28.0	46.0	-18.0
4.811	6.8	0.0	0.7	20.0		27.5	46.0	-18.5
0.926	7.0	0.0	0.3	20.0		27.3	46.0	-18.7
3.791	6.7	0.0	0.6	20.0		27.3	46.0	-18.7
4.607	6.5	0.0	0.7	20.0		27.2	46.0	-18.8
0.394	8.6	0.0	0.2	20.0		28.8	48.0	-19.1
0.802	6.5	0.0	0.3	20.0		26.8	46.0	-19.2
3.477	6.2	0.0	0.5	20.0		26.7	46.0	-19.3
4.195	6.1	0.0	0.6	20.0		26.7	46.0	-19.3
3.889	6.1	0.0	0.6	20.0		26.7	46.0	-19.3
0.438	7.5	0.0	0.2	20.0		27.7	47.1	-19.4
25.683	8.9	0.0	1.6	20.0		30.5	50.0	-19.5
25.388	8.9	0.0	1.6	20.0		30.5	50.0	-19.5
24.863	8.9	0.0	1.6	20.0		30.5	50.0	-19.5

EUT: MN: A-0363D Game Port Dongle		Work Order: LABT0149
Serial Number: Unknown	Date: 09/10/05	
Customer: Logitech, Inc.	Temperature: 25	
Attendees: None	Humidity: 33%	
Project: None	Barometric Pressure: 29.98	
Tested by: Holly Ashkannejhad	Power: 120VAC, 60Hz	Job Site: EV01

TEST SPECIFICATIONS	Test Method
FCC 15.207 Class B:2005-04 FCC 15.107 Class B:2005-04	ANSI C63.4:2003 ANSI C63.4:2003


TEST PARAMETERS
Cable or Line Tested: L1

COMMENTS
US Xbox

EUT OPERATING MODES
Transmitting Mid channel

DEVIATIONS FROM TEST STANDARD
No deviations.

Run #	14	Signature <i>Holly Ashkannejhad</i>
Configuration #		
Results	Pass	

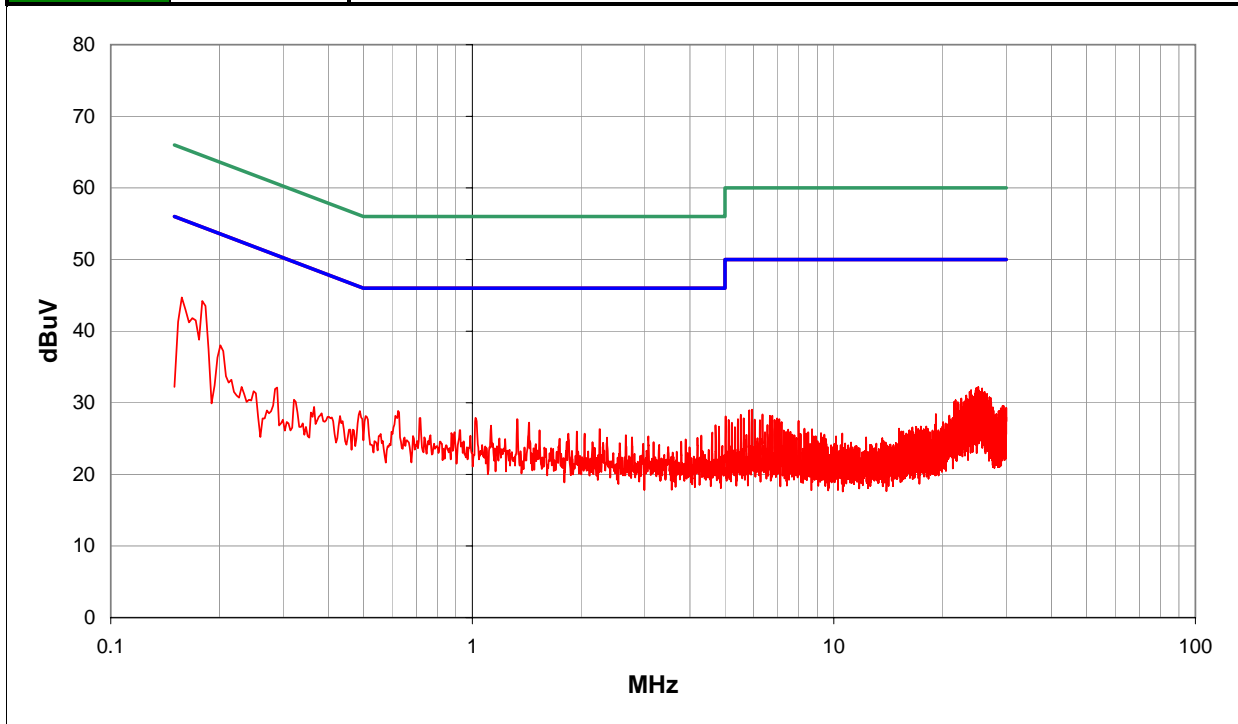

Freq (MHz)	Amplitude (dBuV)	Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.179	24.0	0.0	0.2	20.0		44.2	54.5	-10.3
0.157	24.5	0.0	0.2	20.0		44.7	55.6	-10.9
0.201	17.8	0.0	0.2	20.0		38.0	53.6	-15.6
0.624	8.6	0.0	0.3	20.0		28.9	46.0	-17.1
0.489	8.6	0.0	0.2	20.0		28.8	46.2	-17.3
25.082	10.6	0.0	1.6	20.0		32.2	50.0	-17.8
0.507	7.9	0.0	0.2	20.0		28.1	46.0	-17.9
24.776	10.5	0.0	1.6	20.0		32.1	50.0	-17.9
25.698	10.4	0.0	1.6	20.0		32.0	50.0	-18.0
1.021	7.6	0.0	0.3	20.0		27.9	46.0	-18.1
0.719	7.6	0.0	0.3	20.0		27.9	46.0	-18.1
24.673	10.2	0.0	1.6	20.0		31.8	50.0	-18.2
23.955	10.2	0.0	1.5	20.0		31.7	50.0	-18.3
1.331	7.4	0.0	0.3	20.0		27.7	46.0	-18.3
25.195	10.1	0.0	1.6	20.0		31.7	50.0	-18.3
0.288	11.9	0.0	0.2	20.0		32.1	50.6	-18.4
23.755	10.0	0.0	1.5	20.0		31.5	50.0	-18.5
26.110	9.9	0.0	1.6	20.0		31.5	50.0	-18.5
25.395	9.9	0.0	1.6	20.0		31.5	50.0	-18.5

EUT: MN: A-0363D Game Port Dongle		Work Order: LABT0149
Serial Number: Unknown		Date: 09/10/05
Customer: Logitech, Inc.		Temperature: 25
Attendees: None		Humidity: 33%
Project: None		Barometric Pressure: 29.98
Tested by: Holly Ashkannejhad	Power: 120VAC, 60Hz	Job Site: EV01

TEST SPECIFICATIONS	Test Method
FCC 15.207 Class B:2005-04 FCC 15.107 Class B:2005-04	ANSI C63.4:2003 ANSI C63.4:2003


TEST PARAMETERS
Cable or Line Tested: L1

COMMENTS
US Xbox

EUT OPERATING MODES
Transmitting High channel

DEVIATIONS FROM TEST STANDARD
No deviations.

Run #	15	Signature <i>Holly Ashkannejhad</i>
Configuration #		
Results	Pass	

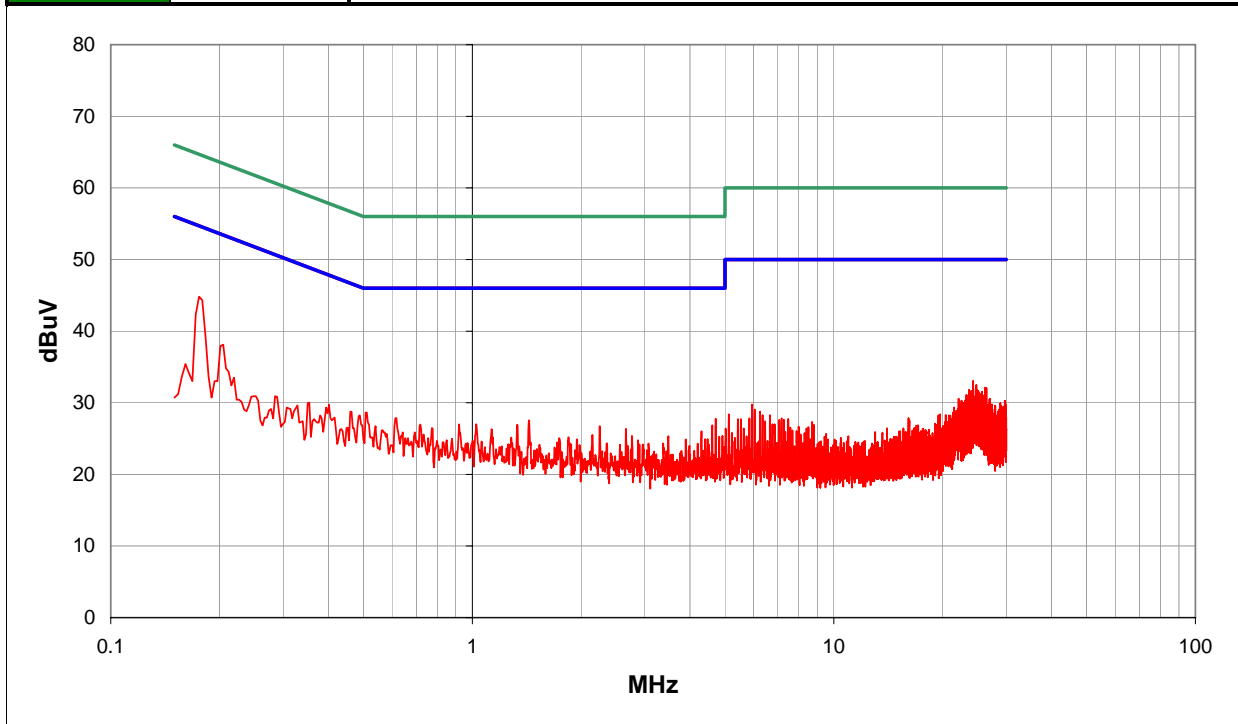

Freq (MHz)	Amplitude (dBuV)	Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.176	24.6	0.0	0.2	20.0		44.8	54.7	-9.9
0.205	17.9	0.0	0.2	20.0		38.1	53.4	-15.3
24.273	11.5	0.0	1.6	20.0		33.1	50.0	-16.9
0.511	8.4	0.0	0.2	20.0		28.6	46.0	-17.4
24.790	10.9	0.0	1.6	20.0		32.5	50.0	-17.5
26.223	10.5	0.0	1.6	20.0		32.1	50.0	-17.9
0.463	8.5	0.0	0.2	20.0		28.7	46.6	-17.9
0.489	8.0	0.0	0.2	20.0		28.2	46.2	-17.9
26.427	10.4	0.0	1.6	20.0		32.0	50.0	-18.0
0.401	9.5	0.0	0.2	20.0		29.7	47.8	-18.1
24.688	10.3	0.0	1.6	20.0		31.9	50.0	-18.1
0.616	7.6	0.0	0.3	20.0		27.9	46.0	-18.1
23.664	10.3	0.0	1.5	20.0		31.8	50.0	-18.2
24.885	10.2	0.0	1.6	20.0		31.8	50.0	-18.2
4.713	7.1	0.0	0.7	20.0		27.8	46.0	-18.2
25.096	10.1	0.0	1.6	20.0		31.7	50.0	-18.3
24.072	10.1	0.0	1.5	20.0		31.6	50.0	-18.4
23.974	10.1	0.0	1.5	20.0		31.6	50.0	-18.4
1.436	7.2	0.0	0.3	20.0		27.5	46.0	-18.5

EUT: MN: A-0363D Game Port Dongle		Work Order: LABT0149
Serial Number: Unknown	Date: 09/10/05	
Customer: Logitech, Inc.	Temperature: 25	
Attendees: None	Humidity: 33%	
Project: None	Barometric Pressure: 29.98	
Tested by: Holly Ashkannejhad	Power: 120VAC, 60Hz	Job Site: EV01

TEST SPECIFICATIONS		Test Method
FCC 15.207 Class B:2005-04	ANSI C63.4:2003	
FCC 15.107 Class B:2005-04	ANSI C63.4:2003	


TEST PARAMETERS	
Cable or Line Tested	N

COMMENTS
US Xbox



EUT OPERATING MODES
Transmitting High channel

DEVIATIONS FROM TEST STANDARD
No deviations.

Run #	16	Signature <i>Holly Ashkannejhad</i>
Configuration #		
Results	Pass	

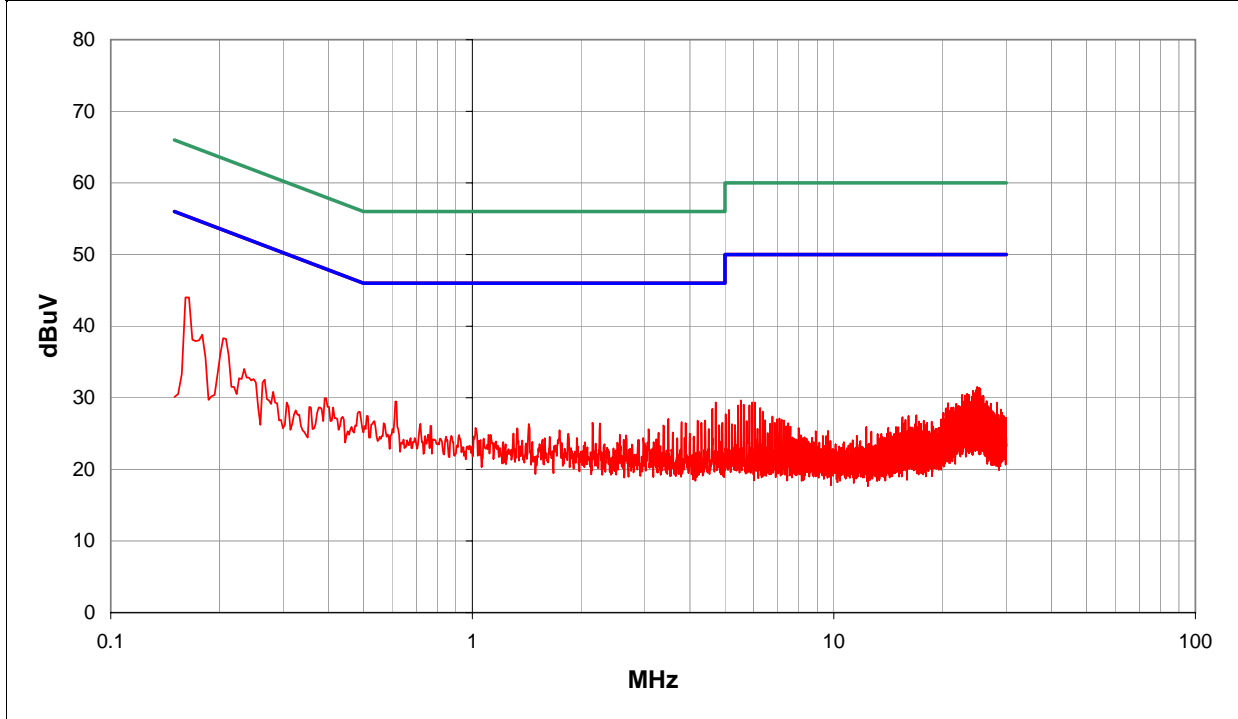

Freq (MHz)	Amplitude (dBuV)	Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks [PK] from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.165	23.8	0.0	0.2	20.0		44.0	55.2	-11.2
0.205	18.1	0.0	0.2	20.0		38.3	53.4	-15.1
0.616	9.2	0.0	0.3	20.0		29.5	46.0	-16.5
4.713	8.7	0.0	0.7	20.0		29.4	46.0	-16.6
4.611	7.8	0.0	0.7	20.0		28.5	46.0	-17.5
0.394	9.7	0.0	0.2	20.0		29.9	48.0	-18.0
0.489	7.8	0.0	0.2	20.0		28.0	46.2	-18.1
0.234	13.8	0.0	0.2	20.0		34.0	52.3	-18.3
24.903	9.9	0.0	1.6	20.0		31.5	50.0	-18.5
0.514	7.2	0.0	0.2	20.0		27.4	46.0	-18.6
25.209	9.8	0.0	1.6	20.0		31.4	50.0	-18.6
25.410	9.7	0.0	1.6	20.0		31.3	50.0	-18.7
0.267	12.3	0.0	0.2	20.0		32.5	51.2	-18.7
24.695	9.5	0.0	1.6	20.0		31.1	50.0	-18.9
3.484	6.5	0.0	0.5	20.0		27.0	46.0	-19.0
24.287	9.4	0.0	1.6	20.0		31.0	50.0	-19.0
4.406	6.2	0.0	0.6	20.0		26.8	46.0	-19.2
4.202	6.2	0.0	0.6	20.0		26.8	46.0	-19.2
0.536	6.5	0.0	0.3	20.0		26.8	46.0	-19.2

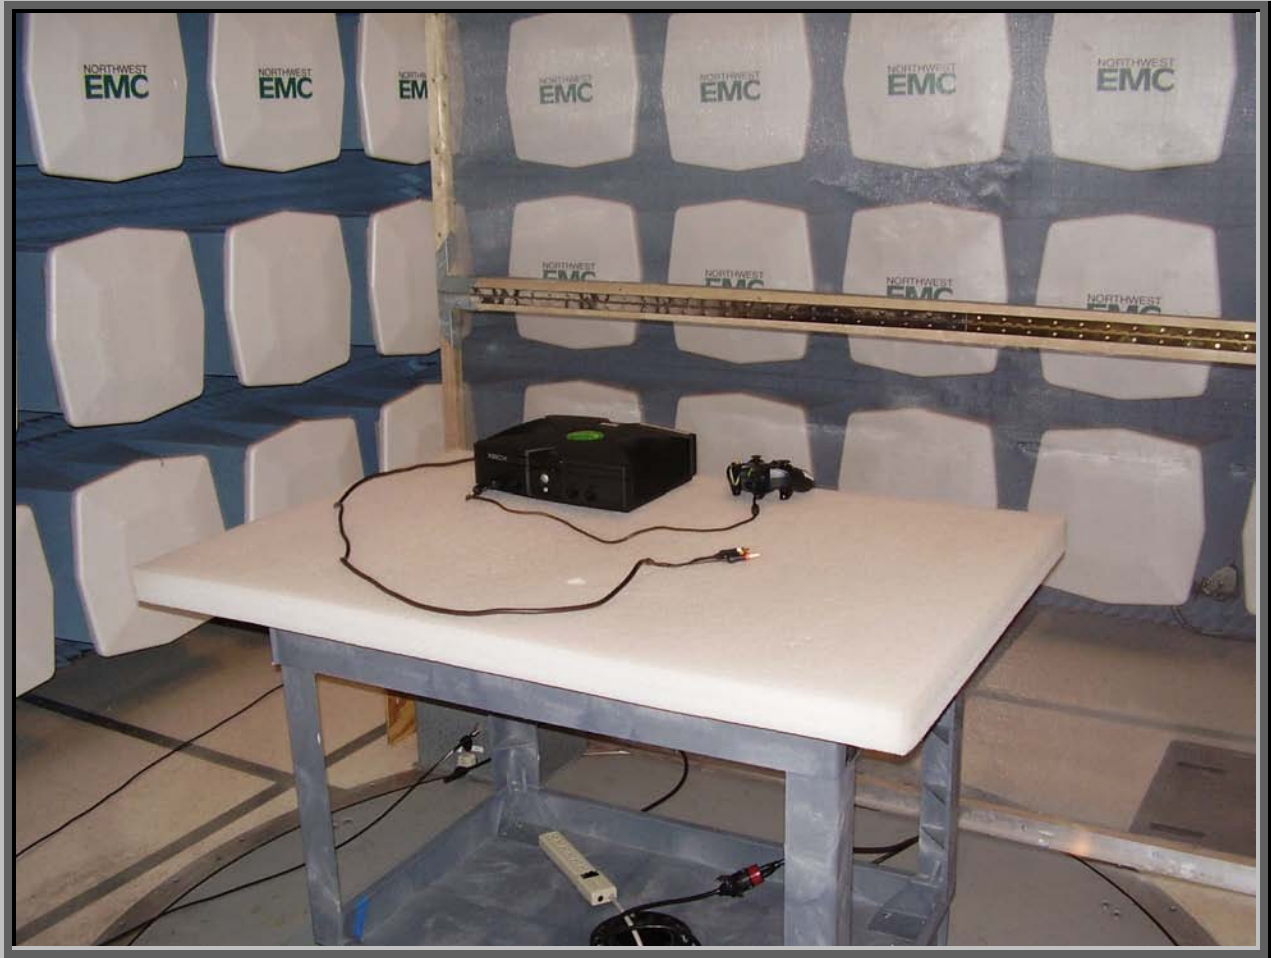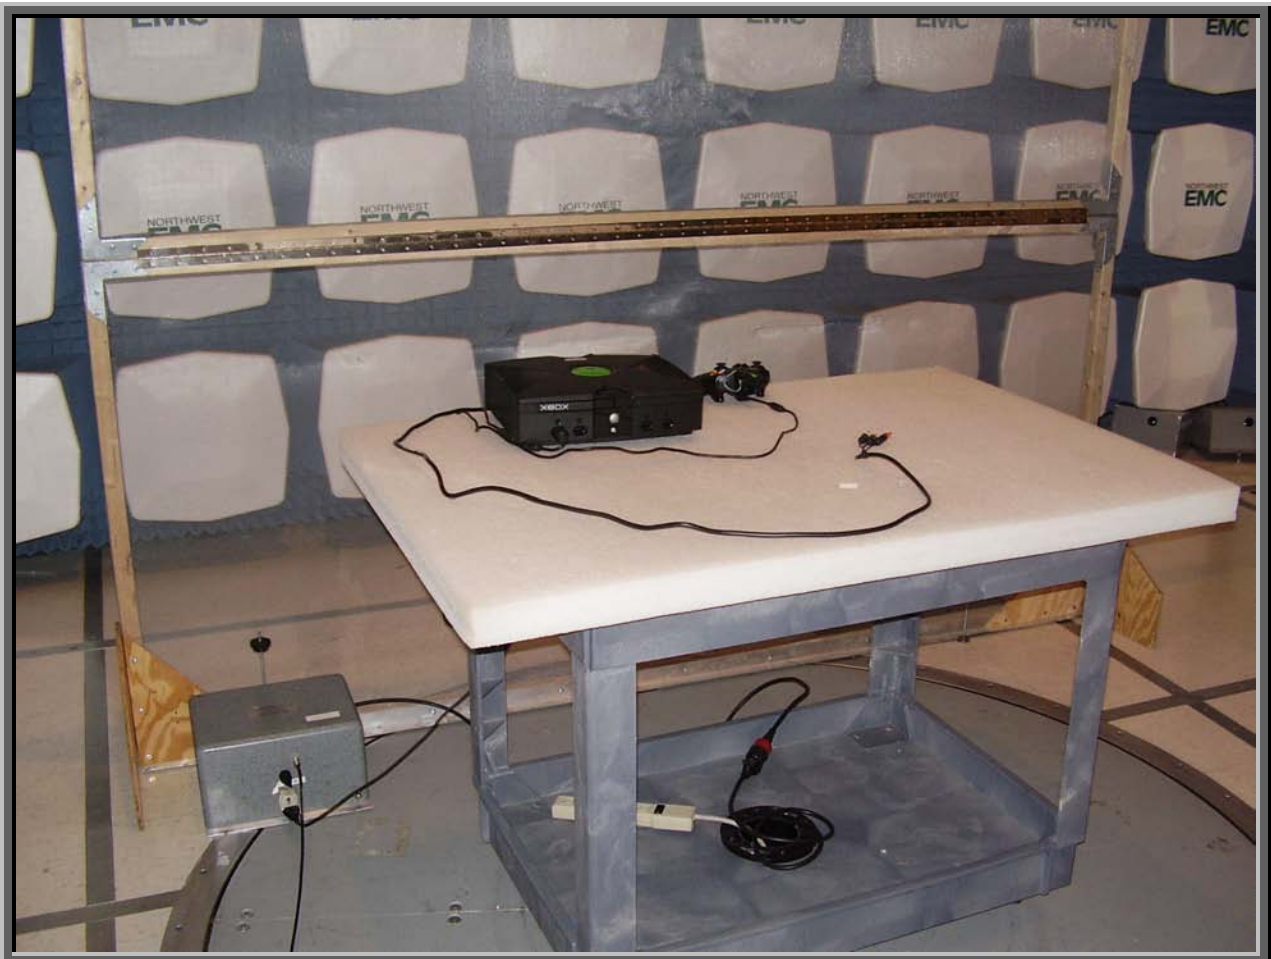



BLUETOOTH APPROVALS

FCC Procedure Received from Joe Dichoso on 2-15-02

The following exhibit indicates the FCC Spread Spectrum requirements in Section 15.247 for devices meeting the Bluetooth Specifications in the 2.4 GHz band as of February 2001 operating in the USA. The purpose of this exhibit is to help expedite the approval process for Bluetooth devices. This exhibit provides items that vary for each device and also provides a list of items that are common to Bluetooth devices that explains the remaining requirements. The list of common items can be submitted for each application for equipment authorization. This exhibit only specifies requirements in Section 15.247, requirements in other rule Sections for intentional radiators such as in Section 15.203 or 15.207 must be also be addressed. A Bluetooth device is a FHSS transmitter in the data mode and applies as a Hybrid spread spectrum device in the acquisition mode.

For each individual device, the following items, 1-7 will vary from one device to another and must be submitted.

- 1) The occupied bandwidth in Section 15.247(a)(1)(ii).
- 2) Conducted output power specified in Section 15.247(b)(1).
- 3) EIRP limit in Section 15.247(b)(3).
- 4) RF safety requirement in Section 15.247(b)(4)
- 5) Spurious emission limits in Section 15.247(c).
- 6) Processing gain and requirements for Hybrids in Section 15.247(f) in the acquisition mode.
- 7) Power spectral density requirement in Section 15.247(f) in the acquisition mode.

For all devices, the following items, 1-12, are common to all Bluetooth devices and will not vary from one device to another. This list can be copied into the filing.

1 Output power and channel separation of a Bluetooth device in the different operating modes:

The different operating modes (data-mode, acquisition-mode) of a Bluetooth device don't influence the output power and the channel spacing. There is only one transmitter which is driven by identical input parameters concerning these two parameters.

Only a different hopping sequence will be used. For this reason, the RF parameters in one op-mode is sufficient.

2 Frequency range of a Bluetooth device:

The maximum frequency of the device is: **2402 – 2480 MHz**.

This is according the Bluetooth Core Specification V 1.0B (+ critical errata) for devices which will be operated in the USA. Other frequency ranges (e.g. for Spain, France, Japan) which are allowed according the Core Specification must **not be** supported by the device.

3 Co-ordination of the hopping sequence in data mode to avoid simultaneous occupancy by multiple transmitters:

Bluetooth units which want to communicate with other units must be organized in a structure called piconet. This piconet consist of max. 8 Bluetooth units. One unit is the master the other seven are the slaves. The master co-ordinates frequency occupation in this piconet for all units. As the master hop sequence is derived from it's BD address which is unique for every Bluetooth device, additional masters intending to establish new piconets will always use different hop sequences.

4 Example of a hopping sequence in data mode:

Example of a 79 hopping sequence in data mode:

40, 21, 44, 23, 42, 53, 46, 55, 48, 33, 52, 35, 50, 65, 54, 67,
56, 37, 60, 39, 58, 69, 62, 71, 64, 25, 68, 27, 66, 57, 70, 59,
72, 29, 76, 31, 74, 61, 78, 63, 01, 41, 05, 43, 03, 73, 07, 75,
09, 45, 13, 47, 11, 77, 15, 00, 64, 49, 66, 53, 68, 02, 70, 06,
01, 51, 03, 55, 05, 04

5 Equally average use of frequencies in data mode and short transmissions:

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection
2. Internal master clock

The LAP (lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24 MSB's of the 48 BD_ADDRESS. The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronization with other units, only the offsets are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5 μ s. The clock has a cycle of about one day (23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire LAP (24 bits), 4 LSB's (4 bits) (Input 1) and the 27 MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions, the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence is generated. For transmitting the wanted data, the complete hopping sequence is not used and the connection ends. The second connection will be established. A new hopping sequence is generated. Due to the fact that the Bluetooth clock has a different value, because the period between the two transmission is longer (and it cannot be shorter) than the minimum resolution of the clock (312.5 μ s). The hopping sequence will always differ from the first one.

6 Receiver input bandwidth, synchronization and repeated single or multiple packets:

The input bandwidth of the receiver is 1 MHz.

In every connection, one Bluetooth device is the master and the other one is the slave. The master determines the hopping sequence (see chapter 5). The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection (e.g. single or multi-slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing is according to the packet type of the connection. Also, the slave of the connection uses these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence

7 Dwell time in data mode

The dwell time of 0.3797s within a 30 second period in data mode is independent from the packet type (packet length). The calculation for a 30 second period is a follows:

Dwell time = time slot length * hop rate / number of hopping channels *30s

Example for a DH1 packet (with a maximum length of one time slot)

Dwell time = 625 μ s * 1600 1/s / 79 * 30s = 0.3797s (in a 30s period)

For multi-slot packet the hopping is reduced according to the length of the packet. Example for a DH5 packet (with a maximum length of five time slots)
Dwell time = $5 * 625 \mu s * 1600 * 1/5 * 1/s / 79 * 30s = 0.3797s$ (in a 30s period)
This is according the Bluetooth Core Specification V 1.0B (+ critical errata) for all Bluetooth devices. Therefore, all Bluetooth devices **comply** with the FCC dwell time requirement in the data mode.

This was checked during the Bluetooth Qualification tests.

The Dwell time in hybrid mode is approximately 2.6 mS (in a 12.8s period)

8 Channel Separation in hybrid mode

The nominal channel spacing of the Bluetooth system is 1Mhz independent of the operating mode.

The maximum "initial carrier frequency tolerance" which is allowed for Bluetooth is $f_{center} = 75 \text{ kHz}$.

This was checked during the Bluetooth Qualification tests (Test Case: TRM/CA/07-E) for three frequencies (2402, 2441, 2480 MHz).

9 Derivation and examples for a hopping sequence in hybrid mode

For the generation of the inquiry and page hop sequences the same procedures as described for the data mode are used (see item 5), but this time with different input vectors:

**For the inquiry hop sequence, a predefined fixed address is always used. This results in the same 32 frequencies used by all devices doing an inquiry but every time with a different start frequency and phase in this sequence.

**For the page hop sequence, the device address of the paged unit is used as the input vector. This results in the use of a subset of 32 frequencies which is specific for that initial state of the connection establishment between the two units. A page to different devices would result in a different subset of 32 frequencies.

So it is ensured that also in hybrid mode, the frequency is used equally on average.

Example of a hopping sequence in inquiry mode:

48, 50, 09, 13, 52, 54, 41, 45, 56, 58, 11, 15, 60, 62, 43, 47, 00, 02, 64, 68, 04, 06, 17, 21, 08, 10, 66, 70, 12, 14, 19, 23

Example of a hopping sequence in paging mode:

08, 57, 68, 70, 51, 02, 42, 40, 04, 61, 44, 46, 63, 14, 50, 48, 16, 65, 52, 54, 67, 18, 58, 56, 20, 53, 60, 62, 55, 06, 66, 64

10 Receiver input bandwidth and synchronization in hybrid mode:

The receiver input bandwidth is the same as in the data mode (1 MHz). When two Bluetooth devices establish contact for the first time, one device sends an inquiry access code and the other device is scanning for this inquiry access code. If two devices have been connected previously and want to start a new transmission, a similar procedure takes place. The only difference is, instead of the inquiry access code, a special access code, derived from the BD_ADDRESS of the paged device will be, will be sent by the master of this connection. Due to the fact that both units have been connected before (in the inquiry procedure) the paging unit has timing and frequency information about the page scan of the paged unit. For this reason the time to establish the connection is reduced.

11 Spread rate / data rate of the direct sequence signal

The Spread rate / Data rate in inquiry and paging mode can be defined via the access code. The access code is the only criterion for the system to check if there is a valid transmission or not. If you regard the presence of a valid access code as one bit of information, and compare it with the length of the access code of 68 bits, the Spread rate / Data rate will be 68/1.

12 Spurious emission in hybrid mode

The Dwell in hybrid mode is shorter than in data mode. For this reason the spurious emissions average level in data mode is worst case. The spurious emissions peak level is the same for both modes.