

Logitech, Inc.

F-0399A

July 05, 2005

Report No. LABT0131

Report Prepared By



www.nwemc.com

1-888-EMI-CERT

© 2005 Northwest EMC, Inc

EMC Test Report



22975 NW Evergreen Parkway
Suite 400
Hillsboro, Oregon 97124

Certificate of Test
Issue Date: July 05, 2005
Logitech, Inc.
Model: F-0399A

Emissions			
Specification	Test Method	Pass	Fail
FCC 15.247(a) Occupied Bandwidth:2005-04	ANSI C63.4:2003	☒	☐
FCC 15.247(b) Output Power:2005-04	ANSI C63.4:2003	☒	☐
FCC 15.247(d) Band Edge Compliance:2005-04	ANSI C63.4:2003	☒	☐
FCC 15.247(d) Spurious Conducted Emissions:2005-04	ANSI C63.4:2003	☒	☐
FCC 15.247(d) Spurious Radiated Emissions:2005-04	ANSI C63.4:2003	☒	☐
FCC 15.247(e) Power Spectral Density:2005-04	ANSI C63.4:2003	☒	☐
FCC 15.109(g) (CISPR 22:1997) Class B:2005-04	ANSI C63.4:2003	☒	☐

Modifications made to the product

See the Modifications section of this report

Test Facility

The measurement facility used to collect the data is located at:

Northwest EMC, Inc.
22975 NW Evergreen Parkway, Suite 400; Hillsboro, OR 97124
Phone: (503) 844-4066
Fax: 844-3826

This site has been fully described in a report filed with and accepted by the FCC (Federal Communications Commission) and Industry Canada.

Approved By:

Greg Kiemel, Director of Engineering

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.

Product compliance is the responsibility of the client, therefore the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. This Report may only be duplicated in its entirety. The results of this test pertain only to the sample(s) tested, the specific description is noted in each of the individual sections of the test report supporting this certificate of test.

Revision Number	Description	Date	Page Number
00	none		

FCC: Accredited by NVLAP for performance of FCC radio, digital, and ISM device testing. Our Open Area Test Sites, certification chambers, and conducted measurement facilities have been fully described in reports filed with the FCC and accepted by the FCC in letters maintained in our files. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by the FCC as a Telecommunications Certification Body (TCB). This allows Northwest EMC to certify transmitters to FCC specifications in accordance with 47 CFR 2.960 and 2.962.



NVLAP: Northwest EMC, Inc. is recognized under the United States Department of Commerce, National Institute of Standards and Technology, and National Voluntary Laboratory Accreditation Program for satisfactory compliance with the requirements of ISO/IEC 17025 for Testing Laboratories. The NVLAP accreditation encompasses Electromagnetic Compatibility Testing in accordance with the European Union EMC Directive 89/336/EEC, ANSI C63.4, MIL-STD 461E, DO-160D and SAE J1113. Additionally, Northwest EMC is accredited by NVLAP to perform radio testing in accordance with the European Union R&TTE Directive 1999/5/EEC, the requirements of FCC, and the RSS radio standards for Industry Canada.



200629-0
200630-0
200676-0

Industry Canada: Accredited by NVLAP for performance of Industry Canada RSS and ICES testing. Our Open Area Test Sites and certification chambers comply with RSS 212, Issue 1 (Provisional) and have been filed with Industry Canada and accepted. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by NIST and recognized by Industry Canada as a Certification Body (CB) per the APEC Mutual Recognition Arrangement (MRA). This allows Northwest EMC to certify transmitters to Industry Canada technical requirements.



CAB: Designated by NIST and validated by the European Commission as a Conformity Assessment Body (CAB) to conduct tests and approve products to the EMC directive and transmitters to the R&TTE directive, as described in the U.S. - EU Mutual Recognition Agreement.



TÜV Product Service: Included in TÜV Product Service Group's Listing of Recognized Laboratories. It qualifies in connection with the TÜV Certification after Recognition of Agent's Testing Program for the product categories and/or standards shown in TÜV's current Listing of CARAT Laboratories, available from TÜV. A certificate was issued to represent that this laboratory continues to meet TÜV's CARAT Program requirements. Certificate No. USA0401C.



TÜV Rheinland: Authorized to carryout EMC tests by order and under supervision of TÜV Rheinland. This authorization is based on "Conditions for EMC-Subcontractors" of November 1992.



NEMKO: Assessed and accredited by NEMKO (Norwegian testing and certification body) for European emissions and immunity testing. As a result of NEMKO's laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification (Authorization No. ELA 119).



Technology International: Assessed in accordance with ISO Guide 25 defining the general international requirements for the competence of calibration and testing laboratories and with ITI assessment criteria LACO196. Based upon that assessment, Interference Technology International, Ltd., has granted approval for specifications implementing the EU Directive on EMC (89/336/EEC and amendments). The scope of the approval was provided on a Schedule of Assessment supplied with the certificate and is available upon request.



Australia/New Zealand: The National Association of Testing Authorities (NATA), Australia has been appointed by the ACA as an accreditation body to accredit test laboratories and competent bodies for EMC standards. Accredited test reports or assessments by competent bodies must carry the NATA logo. Test reports made by an overseas laboratory that has been accredited for the relevant standards by an overseas accreditation body that has a Mutual Recognition Agreement (MRA) with NATA are also accepted as technical grounds for product conformity. The report should be endorsed with the respective logo of the accreditation body (NVLAP).



VCCI: Accepted as an Associate Member to the VCCI, Acceptance No. 564. Conducted and radiated measurement facilities have been registered in accordance with Regulations for Voluntary Control Measures, Article 8. (*Registration Numbers. - Hillsboro: C-1071 and R-1025, Irvine: C-2094 and R-1943, Newberg: C-1877 and R-1760, Sultan: R-871, C-1784 and R-1761*).



BSMI: Northwest EMC has been designated by NIST and validated by C-Taipei (BSMI) as a CAB to conduct tests as described in the APEC Mutual Recognition Agreement. License No.SL2-IN-E-1017.



GOST: Northwest EMC, Inc. has been assessed and accredited by the Russian Certification bodies Certinform VNIINMASH, CERTINFO, SAMTES, and Federal CHEC, to perform EMC and Hygienic testing for Information Technology Products. As a result of their laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification



SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/scope.asp>

How important is it to understand performance criteria?

It is the responsibility of the test laboratory to observe the results of the tests that are performed and to accurately report those results. As the responsible party (manufacturer, importer, etc) it is your responsibility to take those results, compare them against the specifications and standards, then, if appropriate make a declaration of conformity. As the responsible party it makes sense that you are fully aware of the requirements, how your device performs when tested to those requirements, and what information is being used to declare conformity.

To better assist you in making those conformity decisions, Northwest EMC has adopted a very simple, yet very clear performance assessment procedure. The following criteria is used when performing immunity or susceptibility tests:

Performance Criteria 1:

- ❑ The EUT exhibited no change in performance when operating as specified by the manufacturer. In this case no changes were observed during the test.
- ❑ In most cases this would be equivalent to Performance Criteria A. When operating the equipment in the modes or configurations specified by the responsible party, monitoring the parameters specified, no changes were observed. Basically nothing happened.

Performance Criteria 2:

- ❑ The EUT exhibited a change in performance when operating as specified by the manufacturer. In this case the equipment recovered without any operator intervention, once the test signal was removed. The data sheets will detail the exact phenomena observed.
- ❑ In most cases this would be equivalent to Performance Criteria B. When operating the equipment in the modes or configurations specified by the responsible party, monitoring the parameters specified, changes were observed. The EUT was able to recover from those changes without any operator intervention, once the test signal was removed.

Performance Criteria 3:

- ❑ The EUT exhibited a change in performance when operating as specified by the manufacturer. In this case the equipment required some operator intervention in order to recover. This intervention may be in the form of changing EUT settings, or even resetting the system. The data sheets will detail the exact phenomena observed.
- ❑ In most cases this would be equivalent to Performance Criteria C. When operating the equipment in the modes or configurations specified by the responsible party, monitoring the parameters specified, changes were observed. The EUT required some sort of operator intervention to recover. There was no permanent damage and the EUT appeared to function normally after completion of test.

Performance Criteria 4:

- ❑ The EUT exhibited a change in performance when operating as specified by the manufacturer. In this case the equipment was damaged and would not recover. The data sheets will detail the exact phenomena observed.
- ❑ In most cases there is no specific criterion to compare this to; it typically ends the test. When operating the equipment in the modes or configurations specified by the responsible party, monitoring the parameters specified, changes were observed. There was no recovery; the equipment would no longer function as intended.

Each of the standards and specifications have unique performance criteria. In order to make an accurate assessment, one must compare the test results provided with the specific performance criteria. **To ensure that a responsible party is compliant with the specifications, one must read and understand those specifications. Provided below is a sample performance criteria, taken from EN 61000-6-1.**

EN 61000-6-1 Performance Criteria

Performance Criteria A: *The apparatus shall continue to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.*

Performance Criteria B: *The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test degradation of performance is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.*

Performance Criteria C: *Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of controls.*

How should a device perform in order for a declaration of conformity to be made?

As already stated, it is the responsible party that must interpret and understand the results in such a way that a declaration of conformity is made. Having said that, we are often asked to render our opinion as to how a device should perform. Our recommendation simply follows the standards, as can be referenced below. Most of the standards and specifications offer the same performance criterion shown below as their requirements.

Test	Performance Criteria typically specified by the Standard	Equivalent Northwest EMC Performance Criteria
ESD	Performance Criteria B	Performance Criteria 1 or 2
Radiated RF	Performance Criteria A	Performance Criteria 1
EFT/Burst	Performance Criteria B	Performance Criteria 1 or 2
Surge	Performance Criteria B	Performance Criteria 1 or 2
Conducted RF	Performance Criteria A	Performance Criteria 1
Magnetic Field	Performance Criteria A	Performance Criteria 1
Voltage Dips and Variations	Performance Criteria B & C	Performance Criteria 1, 2, or 3

What is measurement uncertainty?


When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. The following statement of measurement uncertainty is used to reflect the accuracy of the measured result as compared with its “true” value. In the case of transient tests (ESD, EFT, Surge, Voltage Dips and Interruptions), the test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements.

The following documents were the basis for determining the uncertainty levels of our measurements:

- “ISO Guide to the Expression of Uncertainty in Measurements”, October 1993
- “NIS81: The Treatment of Uncertainty in EMC Measurements”, May 1994
- “IEC CISPR 16-3 A1 f1 Ed.1: Radio-interference measurements and statistical techniques”, December 2000

How might measurement uncertainty be applied to test results?

If the diamond marks the measured value for the test and the vertical bars bracket the range of + and – measurement uncertainty, then test results can be interpreted from the diagram below.

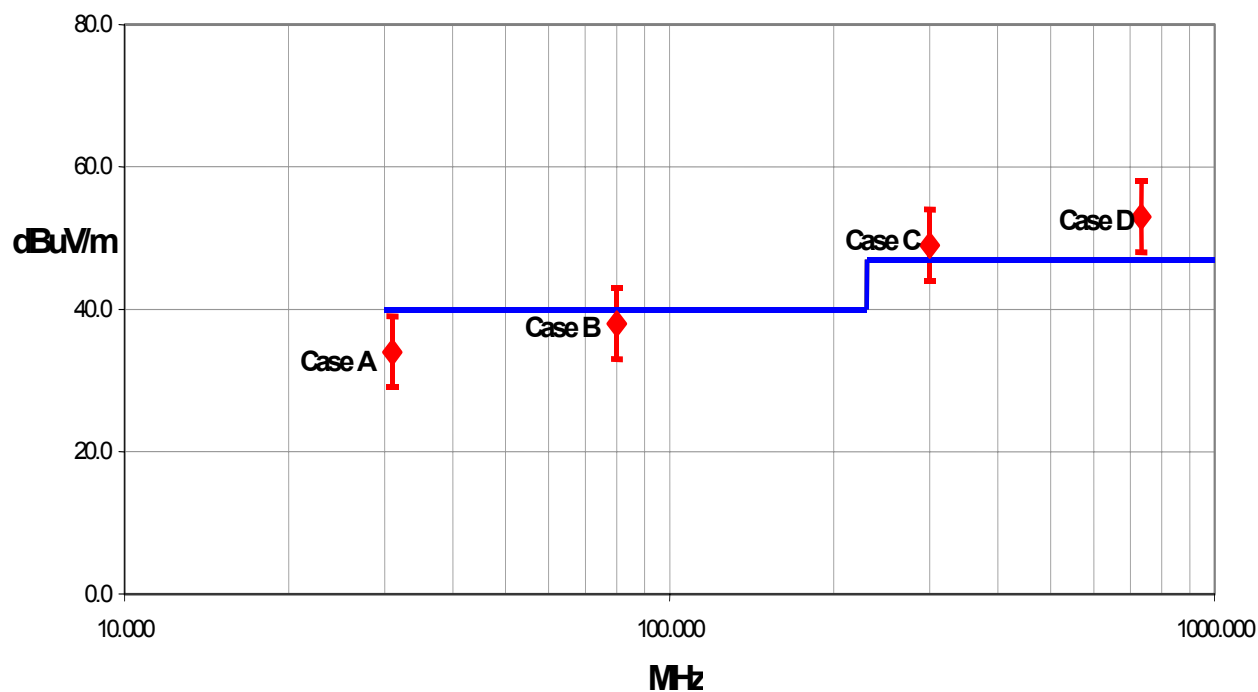**Test Result Scenarios:**

Case A: Product complies.

Case B: Product conditionally complies. It is not possible to say with 95% confidence that the product complies.

Case C: Product conditionally does not comply. It is not possible to say with 95% confidence that the product does not comply.

Case D: Product does not comply.

Radiated Emissions ≤ 1 GHz

Value (dB)

Test Distance	Probability Distribution	Biconical Antenna		Log Periodic Antenna		Dipole Antenna	
		3m	10m	3m	10m	3m	10m
Combined standard uncertainty $u_c(y)$	normal	+ 1.86 - 1.88	+ 1.82 - 1.87	+ 2.23 - 1.41	+ 1.29 - 1.26	+ 1.31 - 1.27	+ 1.25 - 1.25
Expanded uncertainty U (level of confidence $\approx 95\%$)	normal (k=2)	+ 3.72 - 3.77	+ 3.64 - 3.73	+ 4.46 - 2.81	+ 2.59 - 2.52	+ 2.61 - 2.55	+ 2.49 - 2.49

Radiated Emissions > 1 GHz

Value (dB)

Test Distance	Probability Distribution	Without High Pass Filter		With High Pass Filter	
		3m	10m	3m	10m
Combined standard uncertainty $u_c(y)$	normal	+ 1.29 - 1.25	+ 1.29 - 1.25	+ 1.38 - 1.35	+ 1.38 - 1.35
Expanded uncertainty U (level of confidence $\approx 95\%$)	normal (k=2)	+ 2.57 - 2.51	+ 2.57 - 2.51	+ 2.76 - 2.70	+ 2.76 - 2.70

Conducted Emissions

Test Distance	Probability Distribution	Value (+/- dB)	
		3m	10m
Combined standard uncertainty $u_c(y)$	normal	1.48	1.48
Expanded uncertainty U (level of confidence $\approx 95\%$)	normal (k = 2)	2.97	2.97

Radiated Immunity

Test Distance	Probability Distribution	Value (+/- dB)	
		3m	10m
Combined standard uncertainty $u_c(y)$	normal	1.05	1.05
Expanded uncertainty U (level of confidence $\approx 95\%$)	normal (k = 2)	2.11	2.11

Conducted Immunity

Test Distance	Probability Distribution	Value (+/- dB)	
		3m	10m
Combined standard uncertainty $u_c(y)$	normal	1.05	1.05
Expanded uncertainty U (level of confidence $\approx 95\%$)	normal (k = 2)	2.10	2.10

Legend

$u_c(y)$ = square root of the sum of squares of the individual standard uncertainties

U = combined standard uncertainty multiplied by the coverage factor: k . This defines an interval about the measured result that will encompass the true value with a confidence level of approximately 95%. If a higher level of confidence is required, then $k=3$ (CL of 99.7%) can be used. Please note that with a coverage factor of one, $u_c(y)$ yields a confidence level of only 68%.

**California****Orange County Facility****Labs OC01 – OC13**

41 Tesla Ave.
Irvine, CA 92618
(888) 364-2378
FAX (503) 844-3826

**Oregon****Evergreen Facility****Labs EV01 – EV10**

22975 NW Evergreen Pkwy.
Suite 400
Hillsboro, OR 97124
(503) 844-4066
FAX (503) 844-3826

**Oregon****Trails End Facility****Labs TE01 – TE03**

30475 NE Trails End Lane
Newberg, OR 97132
(503) 844-4066
FAX (503) 537-0735

**Washington****Sultan Facility****Labs SU01 – SU07**

14128 339th Ave. SE
Sultan, WA 98294
(888) 364-2378
FAX (360) 793-2536

Party Requesting the Test

Company Name:	Logitech, Inc.
Address:	1499 SE Tech Center Place Suite 350
City, State, Zip:	Vancouver, WA 98683
Test Requested By:	Mitchell Phillipi
Model:	F-0399A
First Date of Test:	6-28-2005
Last Date of Test:	6-29-2005
Receipt Date of Samples:	6-28-2005
Equipment Design Stage:	Pre-Production
Equipment Condition:	No visual damage.

Information Provided by the Party Requesting the Test

Clocks/Oscillators:	Not provided.
I/O Ports:	Combination power and I/O port

Functional Description of the EUT (Equipment Under Test):

Head mounted transceiver is a low power, a battery powered, cordless transceiver which is designed to be worn over the ear of the user to enable a two-way transmission with a Bluetooth compatible cellular telephone.

Client Justification for EUT Selection:

The product is an engineering sample, representative of the final product.

Client Justification for Test Selection:

Not Provided

EUT Photo

Equipment modifications					
Item	Test	Date	Modification	Note	Disposition of EUT
1	Occupied Bandwidth	06/28/2005	No EMI suppression devices were added or modified during this test.	Same configuration as delivered.	EUT remained at Northwest EMC.
2	Band Edge Compliance	06/28/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
3	Power Spectral Density	06/28/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
4	Spurious Conducted Emissions	06/28/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
5	Output Power	06/29/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
6	Spurious Radiated Emissions	06/29/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
7	Radiated Emissions	06/30/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.

Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

Channels in Specified Band Investigated:

Low
Mid
High

Operating Modes Investigated:

No Hop

Data Rates Investigated:

Maximum

Output Power Setting(s) Investigated:

Maximum

Software\Firmware Applied During Test

Exercise software	BlueCore-Audio	Version	1.0
Description			
The system was tested using special software developed to test all functions of the device during the test. The firmware put the radio into a no-hop mode with a modulated carrier. Transmit channels were selectable between the lowest, a middle, and the highest channels in the operating band.			

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
EUT – F-0399A	Logitech, Inc.	F-0399A	000D-44-4F00C5
Development Module	Cambridge Silicon Radio, Ltd.	BCES301199/1	7467 08 08 03
AC Adapter	Egston	N2GFSW3	42251

Remote Equipment Outside of Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
Laptop PC	IBM	A21M	IS108
AC Adapter	IBM	02K6657	None
Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary			

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
Serial	No	2.1	No	Laptop PC	Development Module
I/O	No	1.2	No	Development Module	EUT
DC Leads	No	1.8	PA	AC Adapter	Development Module
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					


Measurement Equipment					
Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Tektronix	2784	AAO	01/02/2005	12 mo

Test Description


Requirement: Bluetooth can be authorized as either a Frequency Hopping System (FHSS), a Digital Transmission System (DTS), or a Hybrid System. As a FHSS, the maximum 20dB bandwidth of the hopping channel is equal to 1.5 times the channel separation. For example, channel separation for Bluetooth is 1 MHz, therefore the maximum 20 dB bandwidth is 1.5 MHz. The measurement is made with the spectrum analyzer's resolution bandwidth set to $\geq 1\%$ of the 20dB bandwidth, and the video bandwidth set to greater than or equal to the resolution bandwidth.

Configuration: The occupied bandwidth was measured with the EUT set to low, medium, and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate in a no hop mode.


Completed by:




NORTHWEST EMC		OCCUPIED BANDWIDTH		Rev BETA 01/30/01	
EUT: F-0399A			Work Order: LABT0131		
Serial Number: 000D-44-4F00C5			Date: 06/28/05		
Customer: Logitech, Inc.			Temperature: 70 °F		
Attendees: None		Tested by: Rod Peloquin		Humidity: 43% RH	
Customer Ref. No.:		Power: Battery		Job Site: EV06	
TEST SPECIFICATIONS					
Specification: 47 CFR 15.247(a)		Year: 2005-04		Method: DA 00-705, ANSI C63.4	
				Year: 2003	
SAMPLE CALCULATIONS					
COMMENTS					
Measured with a direct connection between the RF output and a spectrum analyzer.					
EUT OPERATING MODES					
Modulated by PRBS at maximum data rate					
DEVIATIONS FROM TEST STANDARD					
None					
REQUIREMENTS					
Bluetooth can be authorized as either a Frequency Hopping System (FHSS), a Digital Transmission System (DTS), or a Hybrid System.					
As a FHSS, the maximum 20dB bandwidth of the hopping channel is equal to 1.5 times the channel separation. For example, channel separation for Bluetooth is 1 MHz, therefore the maximum 20 dB bandwidth is 1.5 MHz.					
As a DTS system, the minimum 6 dB bandwidth is 500 kHz. As a Hybrid, it must meet the FHSS requirement as described above.					
RESULTS			BANDWIDTH		
Pass			0.909 MHz		
SIGNATURE					
 Tested By: _____					
DESCRIPTION OF TEST					
20dB Bandwidth - Low Channel					

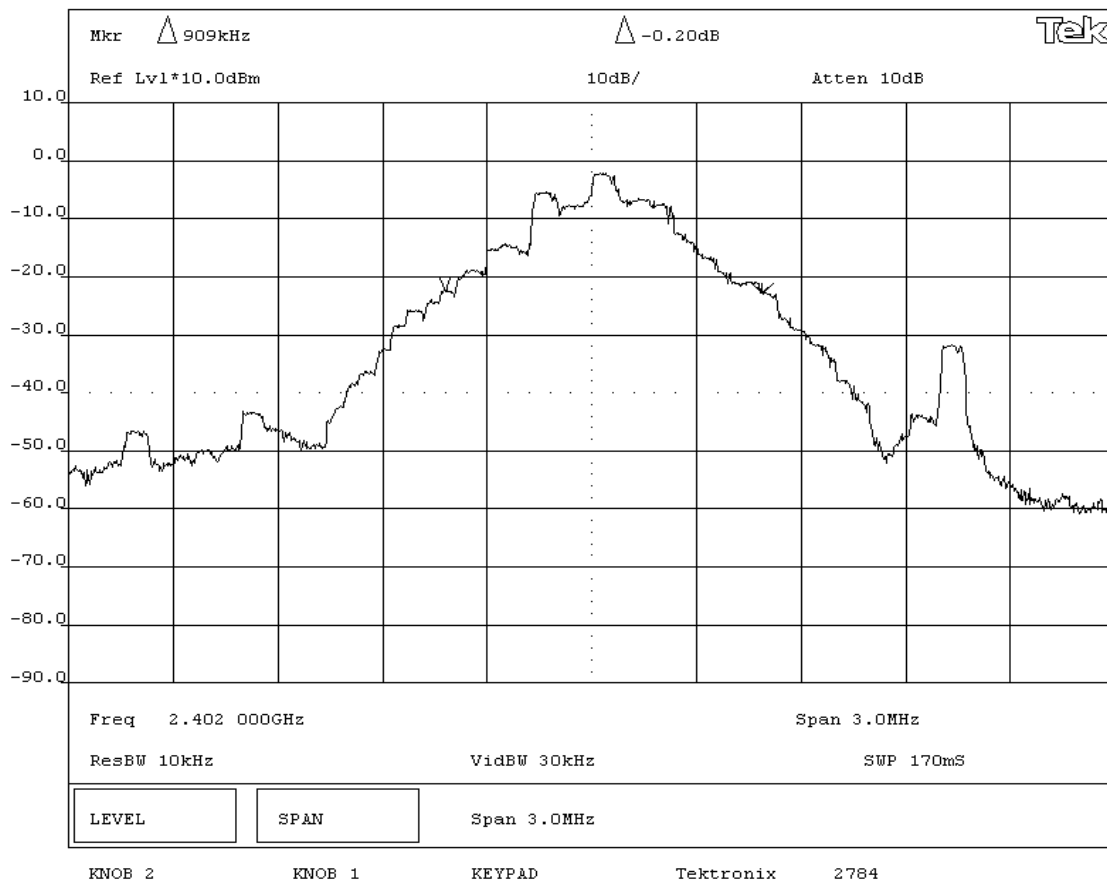

NORTHWEST EMC		OCCUPIED BANDWIDTH		Rev BETA 01/30/01	
EUT: F-0399A		Work Order: LABT0131			
Serial Number: 000D-44-4F00C5		Date: 06/28/05			
Customer: Logitech, Inc.		Temperature: 70 °F			
Attendees: None		Tested by: Rod Poloquin		Humidity: 43% RH	
Customer Ref. No.:		Power: Battery		Job Site: EV06	
TEST SPECIFICATIONS					
Specification: 47 CFR 15.247(a)		Year: 2005-04		Method: DA 00-705, ANSI C63.4	
				Year: 2003	
SAMPLE CALCULATIONS					
COMMENTS					
Measured with a direct connection between the RF output and a spectrum analyzer.					
EUT OPERATING MODES					
Modulated by PRBS at maximum data rate					
DEVIATIONS FROM TEST STANDARD					
None					
REQUIREMENTS					
Bluetooth can be authorized as either a Frequency Hopping System (FHSS), a Digital Transmission System (DTS), or a Hybrid System.					
As a FHSS, the maximum 20dB bandwidth of the hopping channel is equal to 1.5 times the channel separation. For example, channel separation for Bluetooth is 1 MHz, therefore the maximum 20 dB bandwidth is 1.5 MHz.					
As a DTS system, the minimum 6 dB bandwidth is 500 kHz. As a Hybrid, it must meet the FHSS requirement as described above.					
RESULTS					
				BANDWIDTH	
Pass				0.909 MHz	
SIGNATURE					
 Tested By: _____					
DESCRIPTION OF TEST					
20dB Bandwidth - Mid Channel					

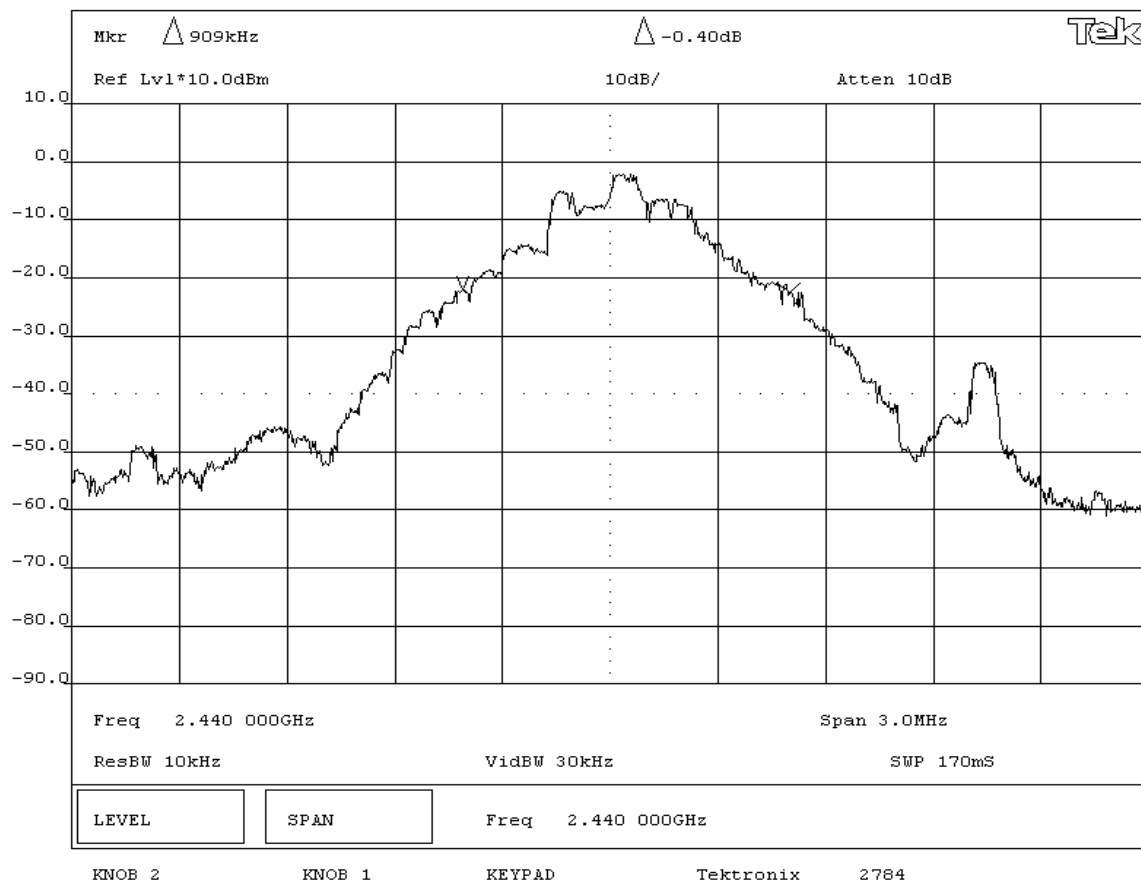

NORTHWEST EMC		OCCUPIED BANDWIDTH		Rev BETA 01/30/01	
EUT: F-0399A		Work Order: LABT0131			
Serial Number: 000D-44-4F00C5		Date: 06/28/05			
Customer: Logitech, Inc.		Temperature: 70 °F			
Attendees: None		Tested by: Rod Poloquin		Humidity: 43% RH	
Customer Ref. No.:		Power: Battery		Job Site: EV06	
TEST SPECIFICATIONS					
Specification: 47 CFR 15.247(a)		Year: 2005-04		Method: DA 00-705, ANSI C63.4	
				Year: 2003	
SAMPLE CALCULATIONS					
COMMENTS					
Measured with a direct connection between the RF output and a spectrum analyzer.					
EUT OPERATING MODES					
Modulated by PRBS at maximum data rate					
DEVIATIONS FROM TEST STANDARD					
None					
REQUIREMENTS					
Bluetooth can be authorized as either a Frequency Hopping System (FHSS), a Digital Transmission System (DTS), or a Hybrid System.					
As a FHSS, the maximum 20dB bandwidth of the hopping channel is equal to 1.5 times the channel separation. For example, channel separation for Bluetooth is 1 MHz, therefore the maximum 20 dB bandwidth is 1.5 MHz.					
As a DTS system, the minimum 6 dB bandwidth is 500 kHz. As a Hybrid, it must meet the FHSS requirement as described above.					
RESULTS					
				BANDWIDTH	
Pass				0.894 MHz	
SIGNATURE					
 Tested By: _____					
DESCRIPTION OF TEST					
20dB Bandwidth - High Channel					

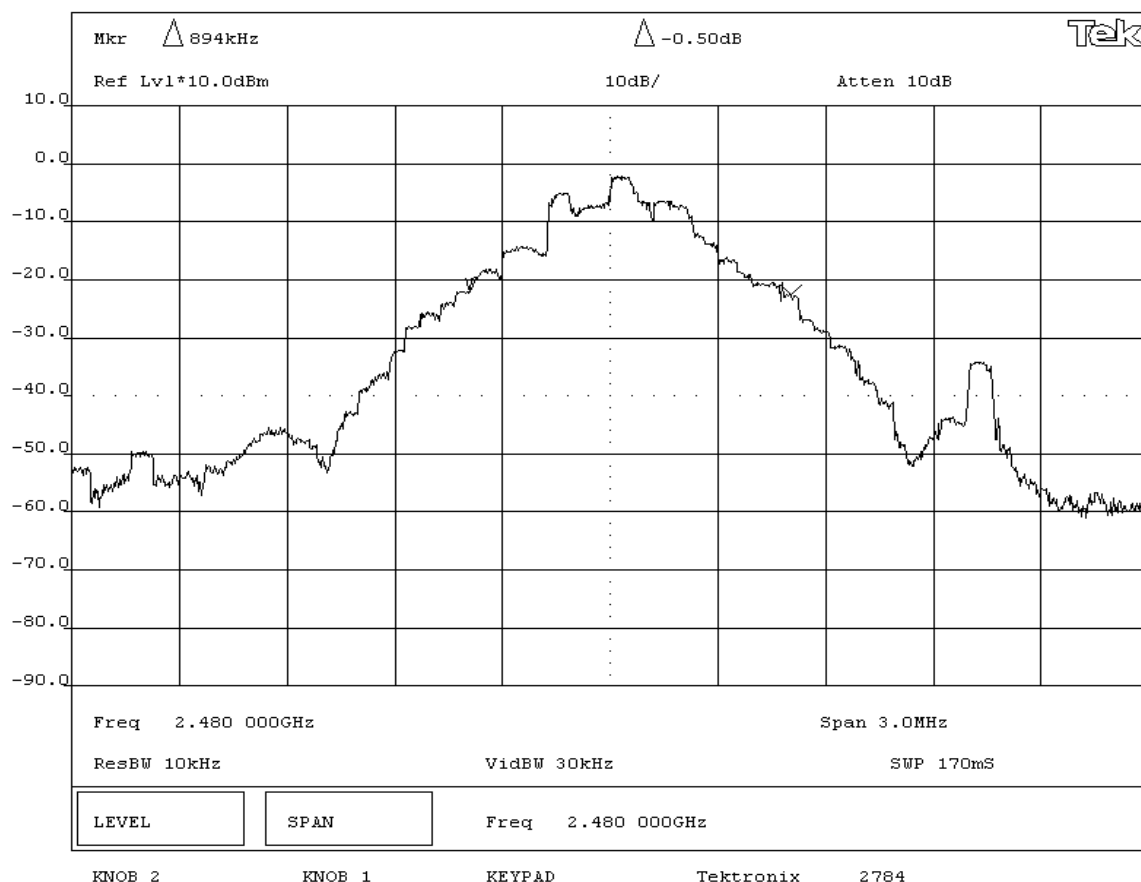



Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

Channels in Specified Band Investigated:

Low
Mid
High

Operating Modes Investigated:

No Hop

Data Rates Investigated:

Maximum

Output Power Setting(s) Investigated:

Maximum

Power Input Settings Investigated:

3.7 VDC

Software\Firmware Applied During Test

Exercise software	BlueCore-Audio	Version	1.0
Description			
The system was tested using special software developed to test all functions of the device during the test. The firmware put the radio into a no-hop mode with a modulated carrier. Transmit channels were selectable between the lowest, a middle, and the highest channels in the operating band.			

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
EUT – F-0399A	Logitech, Inc.	F-0399A	000D-44-4F00C5
Development Module	Cambridge Silicon Radio, Ltd.	BCES301199/1	7467 08 08 03
AC Adapter	Egston	N2GFSW3	42251

Remote Equipment Outside of Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
Laptop PC	IBM	A21M	IS108
AC Adapter	IBM	02K6657	None
Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary			

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
Serial	No	2.1	No	Laptop PC	Development Module
I/O	No	1.2	No	Development Module	EUT
DC Leads	No	1.8	PA	AC Adapter	Development Module
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

Measurement Equipment

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Oscilloscope	Tektronix	TDS 3052	TOF	12/02/2004	13 mo
RF Detector	RLC Electronics	CR-133-R	ZZA	NCR	NA
Signal Generator	Hewlett Packard	8341B	TGN	02/07/2005	13 mo
Power Meter	Hewlett Packard	E4418A	SPA	07/23/2004	24 mo
Power Sensor	Hewlett-Packard	8481H	SPB	07/23/2004	24 mo
DC Power Supply	Topward	TPS-2000	TPD	NCR	NA
Multimeter	Tektronix	DMM912	MMH	12/02/2004	13 mo

Test Description


Requirement: Per 47 CFR 15.247(b)(3), the maximum peak output power must not exceed 1 Watt.

Configuration: The peak output power was measured with the EUT set to low, medium, and high transmit frequencies. The EUT was transmitting at its maximum output power.

The measurement was made using a direct connection between the RF output of the EUT and a RF detector diode. The DC output of the diode was measured with the oscilloscope. The signal generator, tuned to the transmit frequency, was then substituted for the EUT. The CW output of the signal generator was adjusted until the DC output of the RF detector diode match the peak level produced when connected to the EUT. To further reduce measurement error, the power meter and sensor were then used to measure the output power level of the signal generator.


De Facto EIRP Limit: Per 47 CFR 15.247 (b)(1-3), the EUT meets the de facto EIRP limit of +36dBm.

Completed by:



NORTHWEST EMC		OUTPUT POWER		Rev BETA 01/30/01	
EUT:	F-0399A			Work Order:	LABT0131
Serial Number:	000D-44-4F00C5			Date:	06/29/05
Customer:	Logitech, Inc.			Temperature:	70 °F
Attendees:	None	Tested by:	Rod Peloquin	Humidity:	45% RH
Customer Ref. No.:		Power:	3.7 VDC	Job Site:	EV06
TEST SPECIFICATIONS					
Specification:	47 CFR 15.247(b)	Year:	2005-04	Method:	DA 00-705, ANSI C63.4
				Year:	2003
SAMPLE CALCULATIONS					
COMMENTS					
EUT OPERATING MODES					
Modulated by PRBS at maximum data rate					
DEVIATIONS FROM TEST STANDARD					
None					
REQUIREMENTS					
Maximum peak conducted output power does not exceed 1 Watt					
RESULTS		AMPLITUDE			
Pass		3.05 mW			
SIGNATURE					
 Tested By: _____					
DESCRIPTION OF TEST					
Output Power					

Frequency (MHz)	Peak Power Measured w/ Diode Detector (dBm)	Peak Power (mW)	Spec (mW)
2402.0	4.10	2.57	1000.0
2441.0	4.67	2.93	1000.0
2480.0	4.85	3.05	1000.0

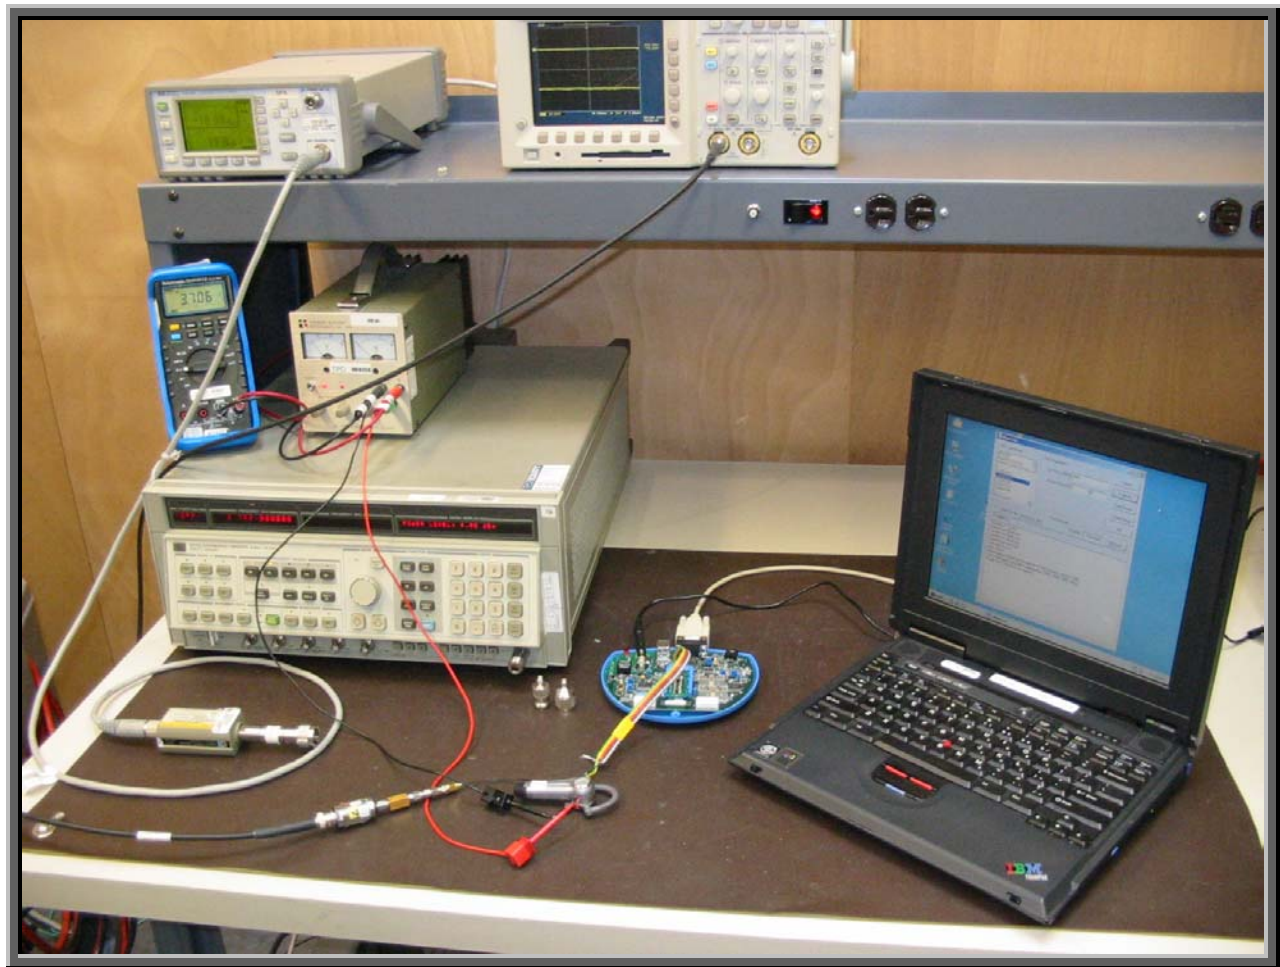

Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

Channels in Specified Band Investigated:

Low

High

Operating Modes Investigated:

No Hop

Data Rates Investigated:

Maximum

Output Power Setting(s) Investigated:

Maximum

Software\Firmware Applied During Test

Exercise software	BlueCore-Audio	Version	1.0
Description			
The system was tested using special software developed to test all functions of the device during the test. The firmware put the radio into a no-hop mode with a modulated carrier. Transmit channels were selectable between the lowest, a middle, and the highest channels in the operating band.			

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
EUT – F-0399A	Logitech, Inc.	F-0399A	000D-44-4F00C5
Development Module	Cambridge Silicon Radio, Ltd.	BCES301199/1	7467 08 08 03
AC Adapter	Egston	N2GFSW3	42251

Remote Equipment Outside of Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
Laptop PC	IBM	A21M	IS108
AC Adapter	IBM	02K6657	None
Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary			

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
Serial	No	2.1	No	Laptop PC	Development Module
I/O	No	1.2	No	Development Module	EUT
DC Leads	No	1.8	PA	AC Adapter	Development Module
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					


Measurement Equipment

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Tektronix	2784	AAO	01/02/2005	12 mo

Test Description

Requirement: Per 47 CFR 15.247(d), in any 100 kHz bandwidth outside the authorized band, the maximum level of radio frequency power must be at least 20dB down from the highest emission level within the authorized band. The measurement is made with the spectrum analyzer's resolution bandwidth set to 100 kHz, and the video bandwidth set to greater than or equal to the resolution bandwidth.

Configuration: The spurious RF conducted emissions at the edges of the authorized band were measured with the EUT set to low and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate in a no hop mode. The channels closest to the band edges were selected. The spectrum was scanned across each band edge from 5 MHz below the band edge to 5 MHz above the band edge.

Completed by:


NORTHWEST
EMC**BAND EDGE COMPLIANCE**Rev BETA
01/30/01

EUT: F-0399A			Work Order: LABT0131		
Serial Number: 000D-44-4F00C5			Date: 06/28/05		
Customer: Logitech, Inc.			Temperature: 70 °F		
Attendees: None			Humidity: 43% RH		
Customer Ref. No.:			Job Site: EV06		
Tested by: Rod Peloquin			Power: Battery		

TEST SPECIFICATIONS

Specification: 47 CFR 15.247(d)	Year: 2005-04	Method: DA 00-705, ANSI C63.4	Year: 2003
---------------------------------	---------------	-------------------------------	------------

SAMPLE CALCULATIONS**COMMENTS****EUT OPERATING MODES**

Modulated by PRBS at maximum data rate

DEVIATIONS FROM TEST STANDARD


None


REQUIREMENTS


Maximum level of any spurious emission at the edge of the authorized band is 20 dB down from the fundamental


RESULTS**AMPLITUDE**

Pass -52.10 dB

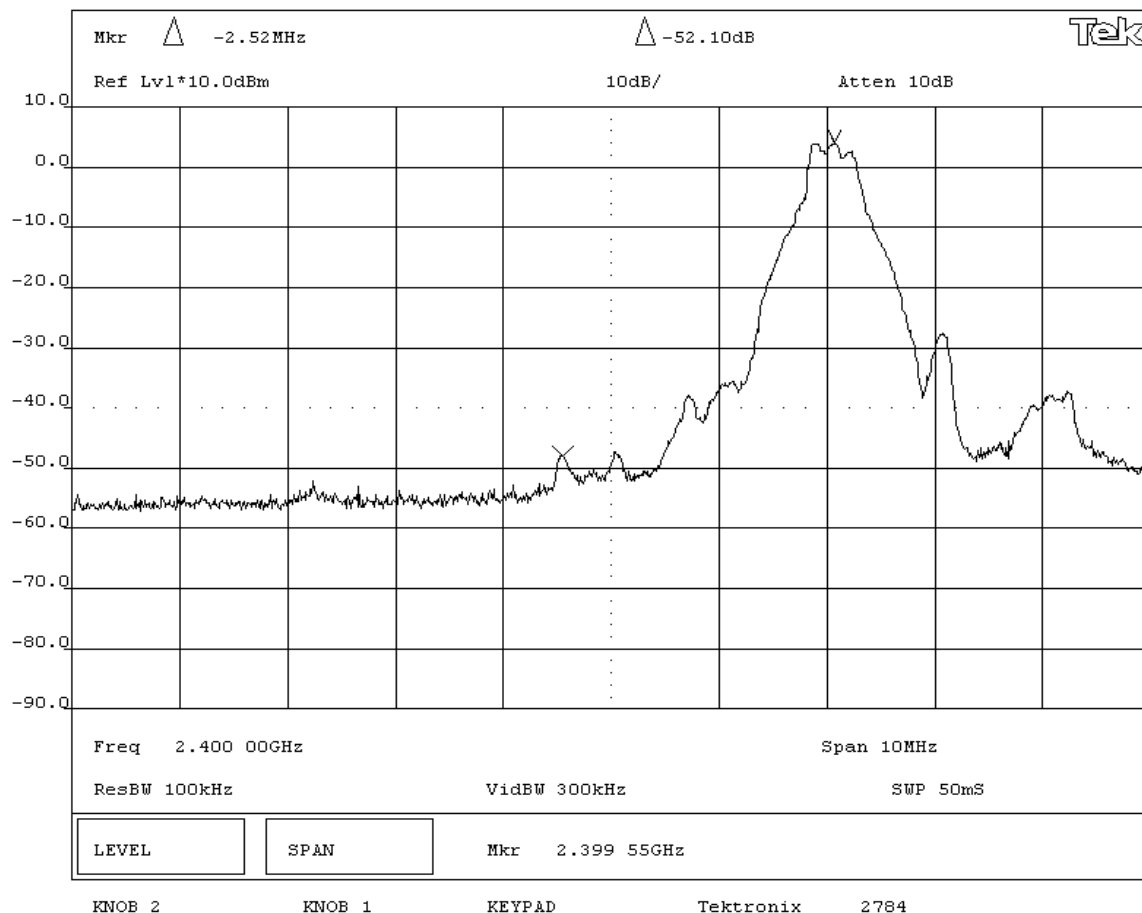SIGNATURETested By: **DESCRIPTION OF TEST****Band Edge Compliance - Low Channel**

NORTHWEST EMC		BAND EDGE COMPLIANCE		Rev BETA 01/30/01	
EUT: F-0399A		Work Order: LABT0131			
Serial Number: 000D-44-4F00C5		Date: 06/28/05			
Customer: Logitech, Inc.		Temperature: 70 °F			
Attendees: None		Tested by: Rod Peloquin		Humidity: 43% RH	
Customer Ref. No.:		Power: Battery		Job Site: EV06	
TEST SPECIFICATIONS					
Specification: 47 CFR 15.247(d)		Year: 2005-04		Method: DA 00-705, ANSI C63.4	
				Year: 2003	
SAMPLE CALCULATIONS					
COMMENTS					
EUT OPERATING MODES					
Modulated by PRBS at maximum data rate					
DEVIATIONS FROM TEST STANDARD					
None					
REQUIREMENTS					
Maximum level of any spurious emission at the edge of the authorized band is 20 dB down from the fundamental					
RESULTS					
AMPLITUDE					
Pass -47.0 dB					
SIGNATURE					
 Tested By: _____					
DESCRIPTION OF TEST					
Band Edge Compliance - High Channel					

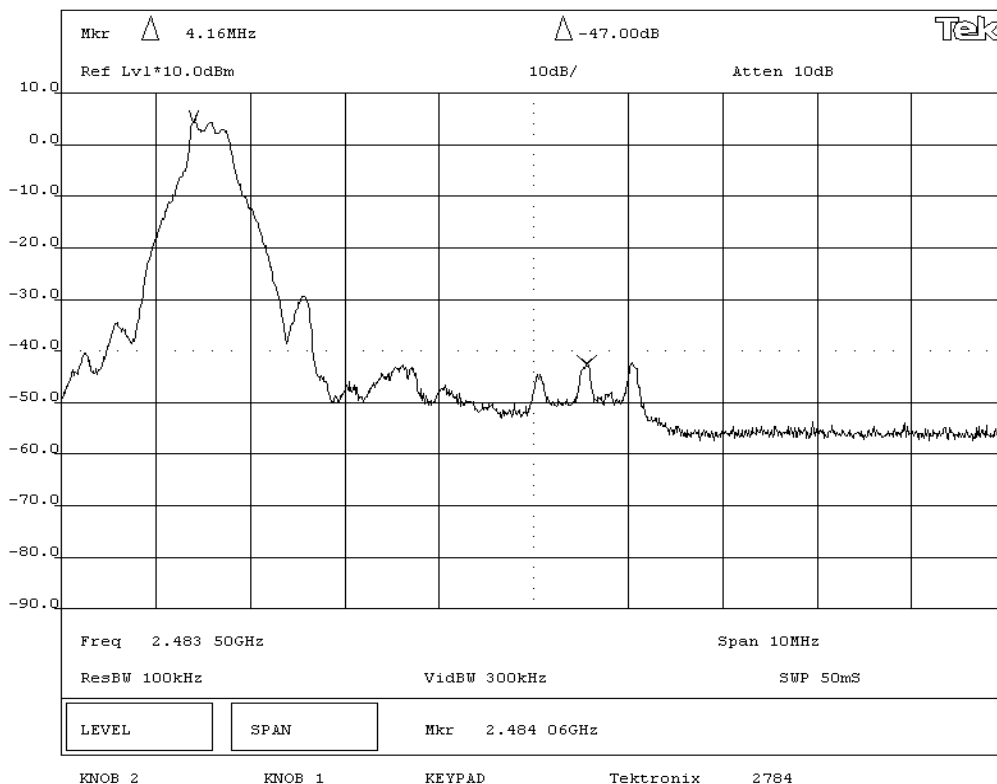

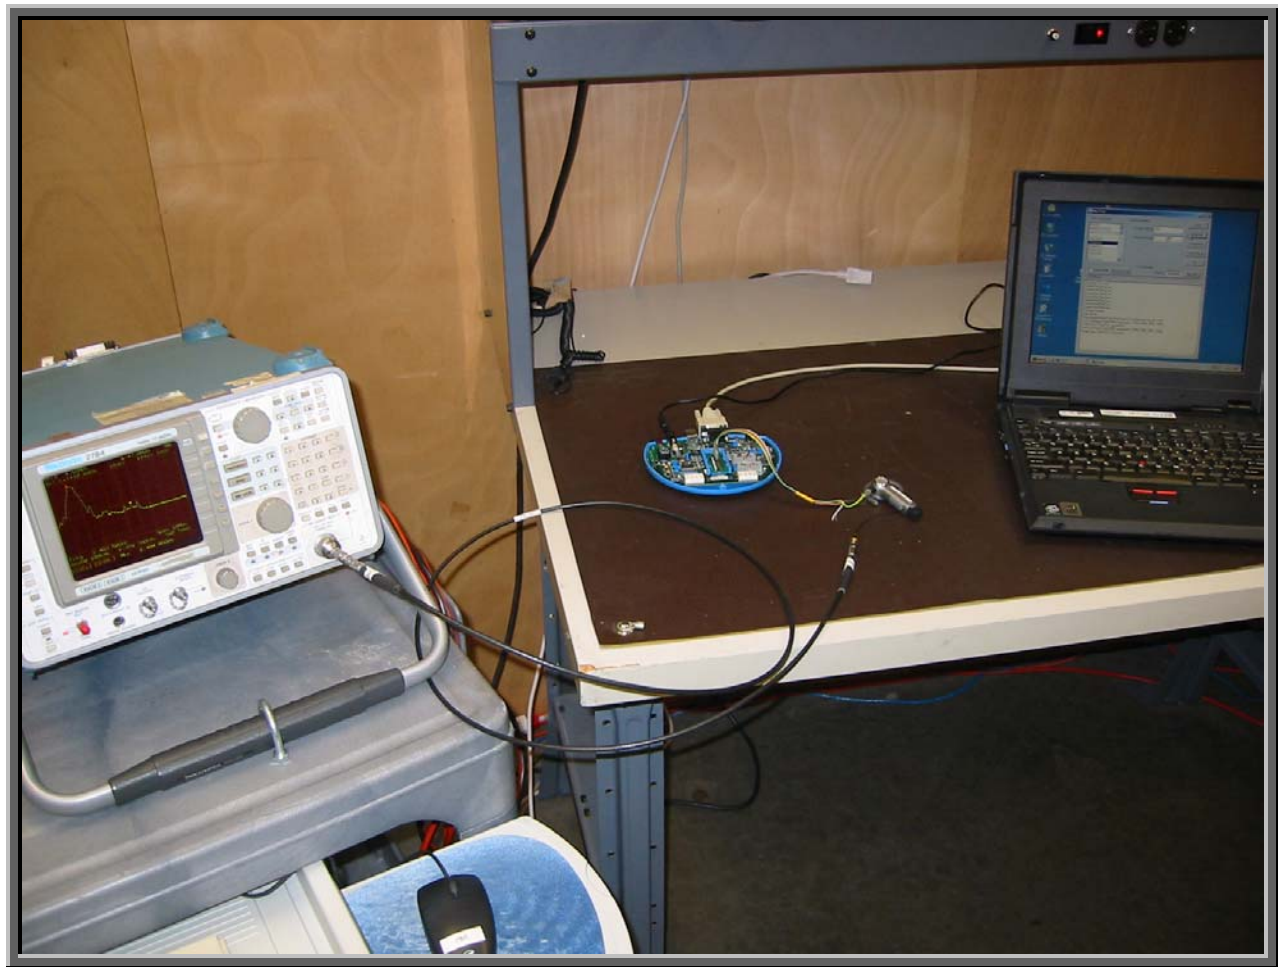

Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

Channels in Specified Band Investigated:

Low
Mid
High

Operating Modes Investigated:

No Hop

Data Rates Investigated:

Maximum

Output Power Setting(s) Investigated:

Maximum

Software\Firmware Applied During Test

Exercise software	BlueCore-Audio	Version	1.0
Description			
The system was tested using special software developed to test all functions of the device during the test. The firmware put the radio into a no-hop mode with a modulated carrier. Transmit channels were selectable between the lowest, a middle, and the highest channels in the operating band.			

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
EUT – F-0399A	Logitech, Inc.	F-0399A	000D-44-4F00C5
Development Module	Cambridge Silicon Radio, Ltd.	BCES301199/1	7467 08 08 03
AC Adapter	Egston	N2GFSW3	42251

Remote Equipment Outside of Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
Laptop PC	IBM	A21M	IS108
AC Adapter	IBM	02K6657	None
Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary			

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
Serial	No	2.1	No	Laptop PC	Development Module
I/O	No	1.2	No	Development Module	EUT
DC Leads	No	1.8	PA	AC Adapter	Development Module
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					


Measurement Equipment					
Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Tektronix	2784	AAO	01/02/2005	12 mo

Test Description


Requirement: Per 47 CFR 15.247(d), in any 100 kHz bandwidth outside the authorized band, the maximum level of radio frequency power must be at least 20dB down from the highest emission level within the authorized band. The measurement is made with the spectrum analyzer's resolution bandwidth set to 100 kHz, and the video bandwidth set to greater than or equal to the resolution bandwidth.

Configuration: The spurious RF conducted emissions were measured with the EUT set to low, medium, and high transmit frequencies. The measurements were made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate using direct sequence modulation. For each transmit frequency, the spectrum was scanned throughout the specified frequency range.

Completed by:



NORTHWEST EMC				EMISSIONS DATA SHEET				Rev BETA 01/30/01	
EUT: F-0399A				Work Order: LABT0131					
Serial Number: 000D-44-4F00C5				Date: 06/28/05					
Customer: Logitech, Inc.				Temperature: 71 °F					
Attendees: None				Tested by: Rod Peloquin				Humidity: 49% RH	
Customer Ref. No.:				Power: Battery				Job Site: EV06	
TEST SPECIFICATIONS									
Specification: 47 CFR 15.247(d)				Year: 2005-04		Method: DA 00-705, ANSI C63.4		Year: 2003	
SAMPLE CALCULATIONS									
COMMENTS									
EUT OPERATING MODES									
Modulated by PRBS at maximum data rate									
DEVIATIONS FROM TEST STANDARD									
None									
REQUIREMENTS									
Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental									
RESULTS									
Pass									
SIGNATURE									
 Tested By: _____									
DESCRIPTION OF TEST									
Antenna Conducted Spurious Emissions - Low Channel 0MHz-3GHz									

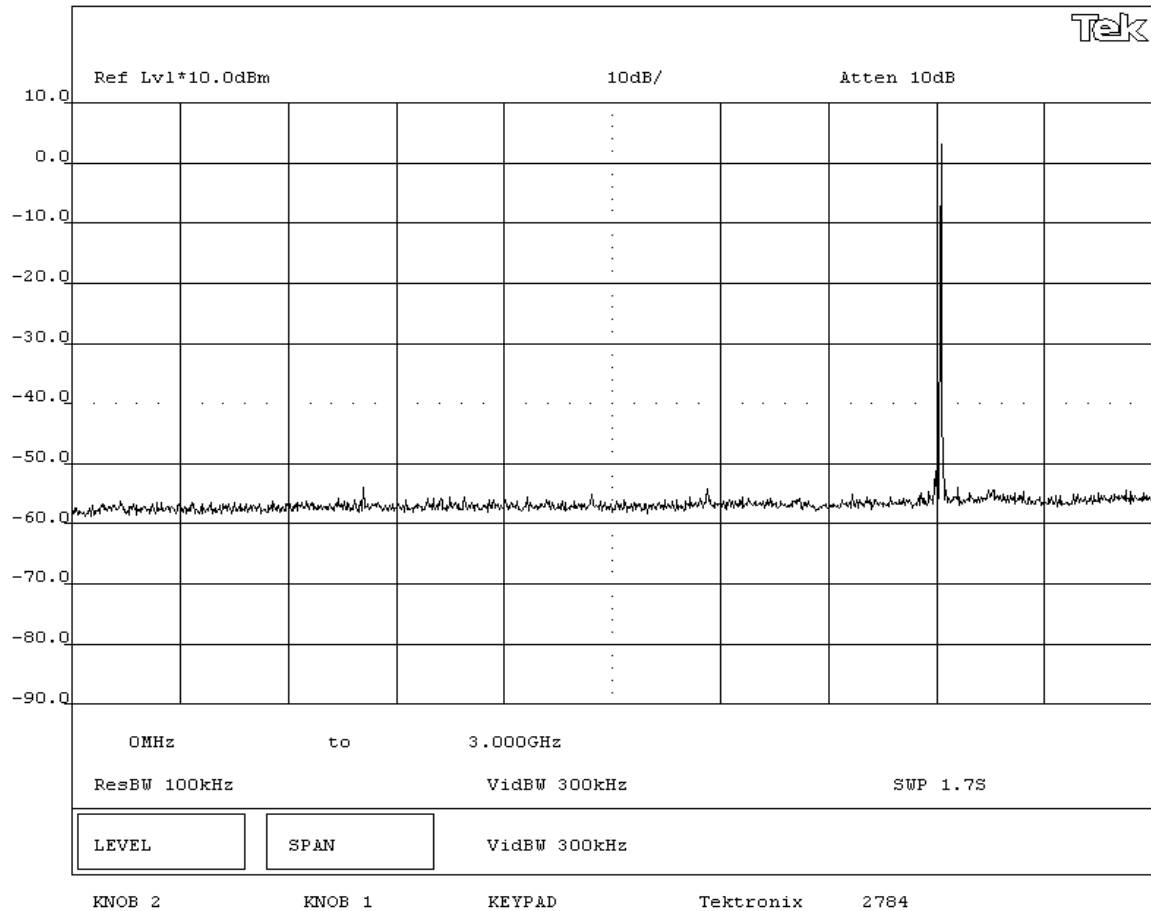

NORTHWEST
EMC**EMISSIONS DATA SHEET**Rev BETA
01/30/01

EUT:	F-0399A	Work Order:	LABT0131
Serial Number:	000D-44-4F00C5	Date:	06/28/05
Customer:	Logitech, Inc.	Temperature:	71 °F
Attendees:	None	Tested by:	Rod Peloquin
Customer Ref. No.:		Power:	Battery
		Humidity:	49% RH
		Job Site:	EV06

TEST SPECIFICATIONS

Specification:	47 CFR 15.247(d)	Year:	2005-04	Method:	DA 00-705, ANSI C63.4	Year:	2003
----------------	------------------	-------	---------	---------	-----------------------	-------	------

SAMPLE CALCULATIONS**COMMENTS****EUT OPERATING MODES**

Modulated by PRBS at maximum data rate

DEVIATIONS FROM TEST STANDARD


None

REQUIREMENTS

Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

RESULTS

Pass

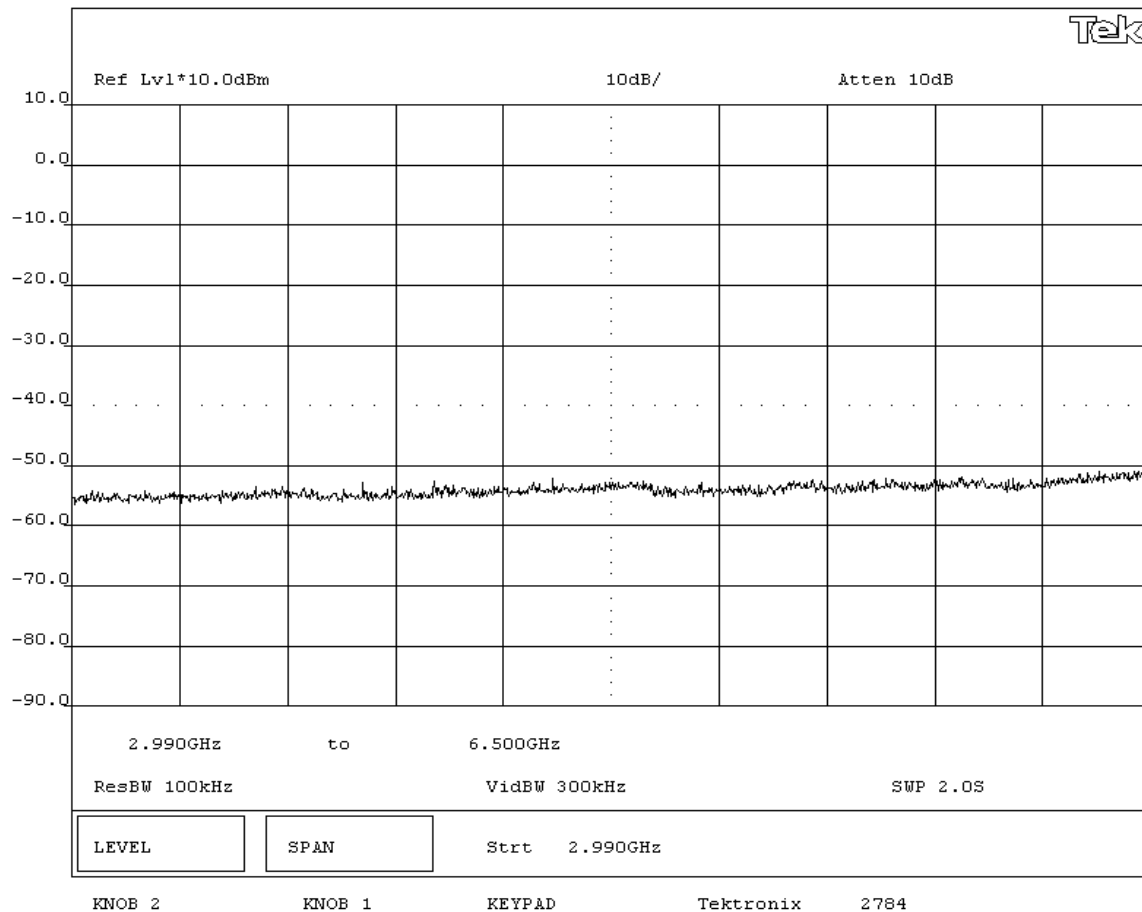SIGNATURETested By: **DESCRIPTION OF TEST****Antenna Conducted Spurious Emissions - Low Channel 3GHz-6.5GHz**

EMISSIONS DATA SHEET

Rev BETA
01/30/01

EUT:	F-0399A	Work Order:	LABT0131
Serial Number:	000D-44-4F00C5	Date:	06/28/05
Customer:	Logitech, Inc.	Temperature:	71 °F
Attendees:	None	Tested by:	Rod Peloquin
Customer Ref. No.:		Humidity:	49% RH
		Power:	Battery
		Job Site:	EV06

TEST SPECIFICATIONS

Specification:	47 CFR 15.247(d)	Year:	2005-04	Method:	DA 00-705, ANSI C63.4	Year:	2003
----------------	------------------	-------	---------	---------	-----------------------	-------	------

SAMPLE CALCULATIONS

COMMENTS

Comments	

EUT OPERATING MODES

Modulated by PRBS at maximum data rate

DEVIATIONS FROM TEST STANDARD

None

REQUIREMENTS

Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

RESULTS


Pass


SIGNATURE


Tested By: Rocky Le Pellego

DESCRIPTION OF TEST

Antenna Conducted Spurious Emissions - Low Channel 6.5GHz-15GHz

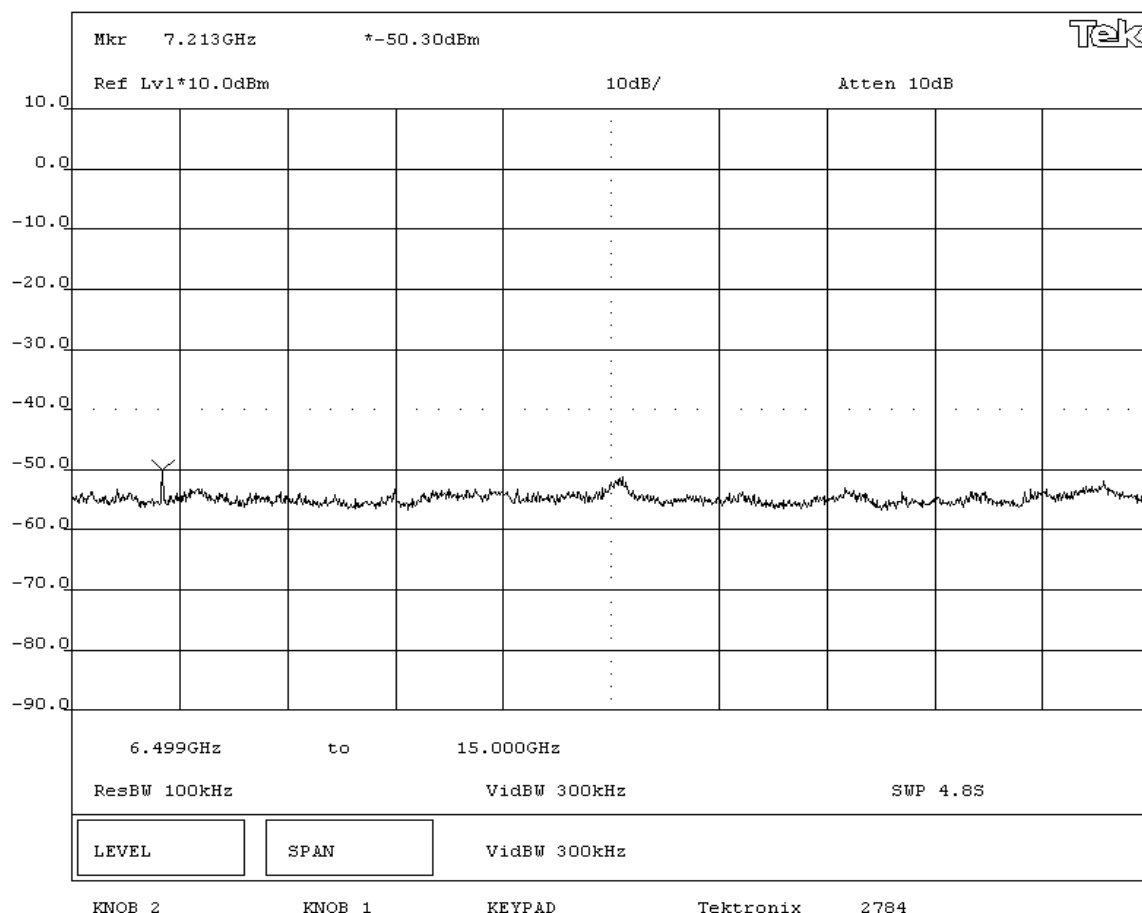

NORTHWEST EMC		EMISSIONS DATA SHEET		Rev BETA 01/30/01	
EUT: F-0399A			Work Order: LABT0131		
Serial Number: 000D-44-4F00C5			Date: 06/28/05		
Customer: Logitech, Inc.			Temperature: 71 °F		
Attendees: None		Tested by: Rod Peloquin		Humidity: 49% RH	
Customer Ref. No.:		Power: Battery		Job Site: EV06	
TEST SPECIFICATIONS					
Specification: 47 CFR 15.247(d)		Year: 2005-04		Method: DA 00-705, ANSI C63.4	
				Year: 2003	
SAMPLE CALCULATIONS					
COMMENTS					
EUT OPERATING MODES					
Modulated by PRBS at maximum data rate					
DEVIATIONS FROM TEST STANDARD					
None					
REQUIREMENTS					
Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental					
RESULTS					
Pass					
SIGNATURE					
 Tested By: _____					
DESCRIPTION OF TEST					
Antenna Conducted Spurious Emissions - Low Channel 15GHz - 25GHz					

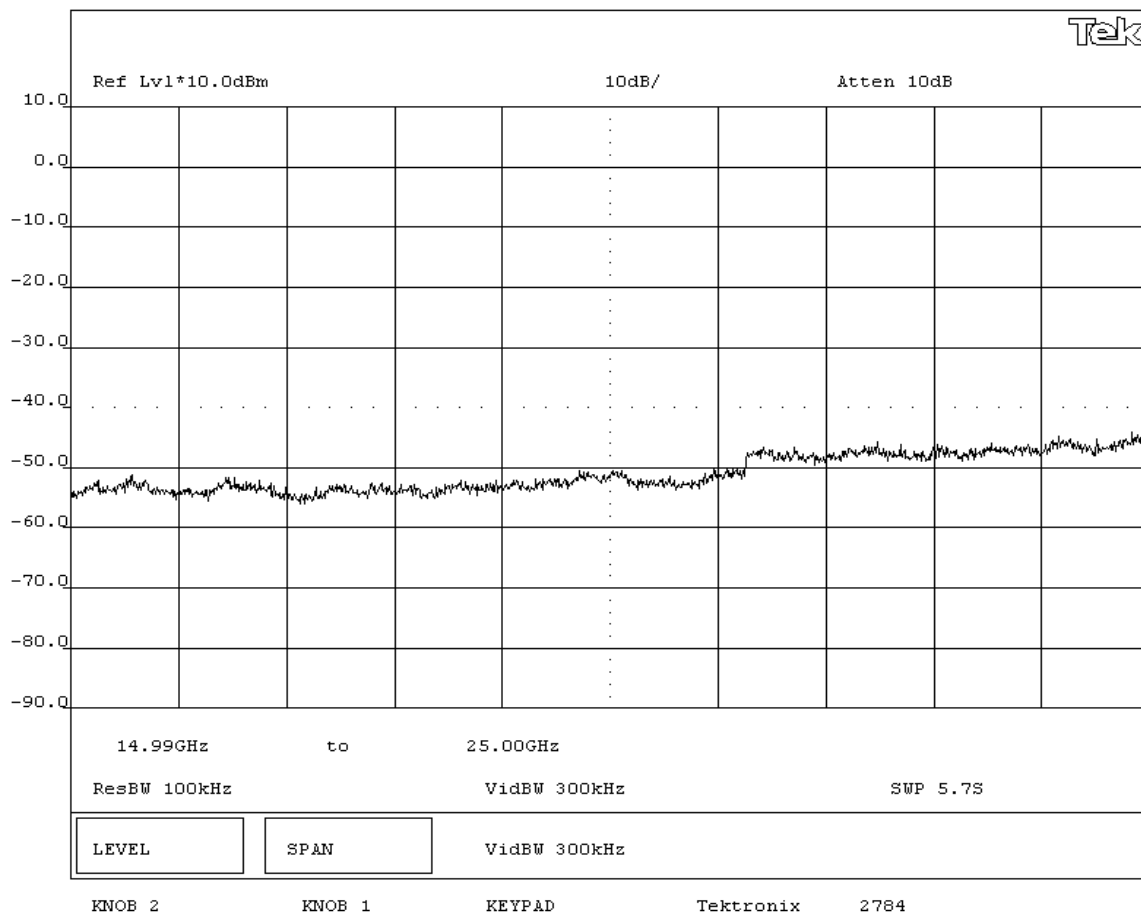

NORTHWEST
EMC**EMISSIONS DATA SHEET**Rev BETA
01/30/01

EUT: F-0399A			Work Order: LABT0131		
Serial Number: 000D-44-4F00C5			Date: 06/28/05		
Customer: Logitech, Inc.			Temperature: 71 °F		
Attendees: None			Humidity: 49% RH		
Customer Ref. No.:			Tested by: Rod Peloquin	Job Site: EV06	
			Power: Battery		

TEST SPECIFICATIONS

Specification: 47 CFR 15.247(d)	Year: 2005-04	Method: DA 00-705, ANSI C63.4	Year: 2003
---------------------------------	---------------	-------------------------------	------------

SAMPLE CALCULATIONS**COMMENTS****EUT OPERATING MODES**

Modulated by PRBS at maximum data rate

DEVIATIONS FROM TEST STANDARD


None

REQUIREMENTS

Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

RESULTS

Pass

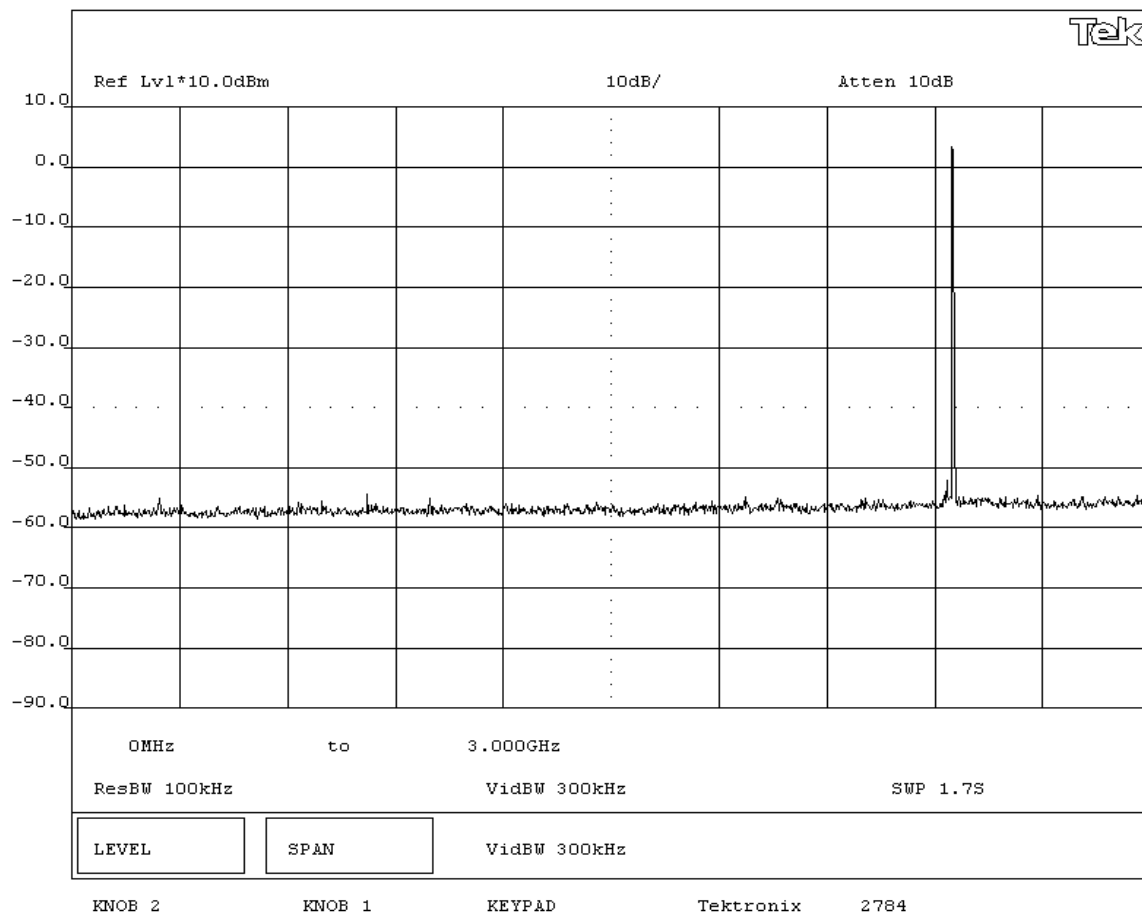SIGNATURETested By. **DESCRIPTION OF TEST****Antenna Conducted Spurious Emissions - Mid Channel 0MHz-3GHz**

NORTHWEST
EMC

EMISSIONS DATA SHEET

Rev BETA
01/30/01

EUT:	F-0399A	Work Order:	LABT0131
Serial Number:	000D-44-4F00C5	Date:	06/28/05
Customer:	Logitech, Inc.	Temperature:	71 °F
Attendees:	None	Tested by:	Rod Peloquin
Customer Ref. No.:		Power:	Battery
		Humidity:	49% RH
		Job Site:	EV06

TEST SPECIFICATIONS

Specification:	47 CFR 15.247(d)	Year:	2005-04	Method:	DA 00-705, ANSI C63.4	Year:	2003
----------------	------------------	-------	---------	---------	-----------------------	-------	------

SAMPLE CALCULATIONS

COMMENTS

EUT OPERATING MODES

Modulated by PRBS at maximum data rate

DEVIATIONS FROM TEST STANDARD

None

REQUIREMENTS

Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

RESULTS


Pass

SIGNATURE

Tested By: 

DESCRIPTION OF TEST

Antenna Conducted Spurious Emissions - Mid Channel 3GHz-6.5GHz

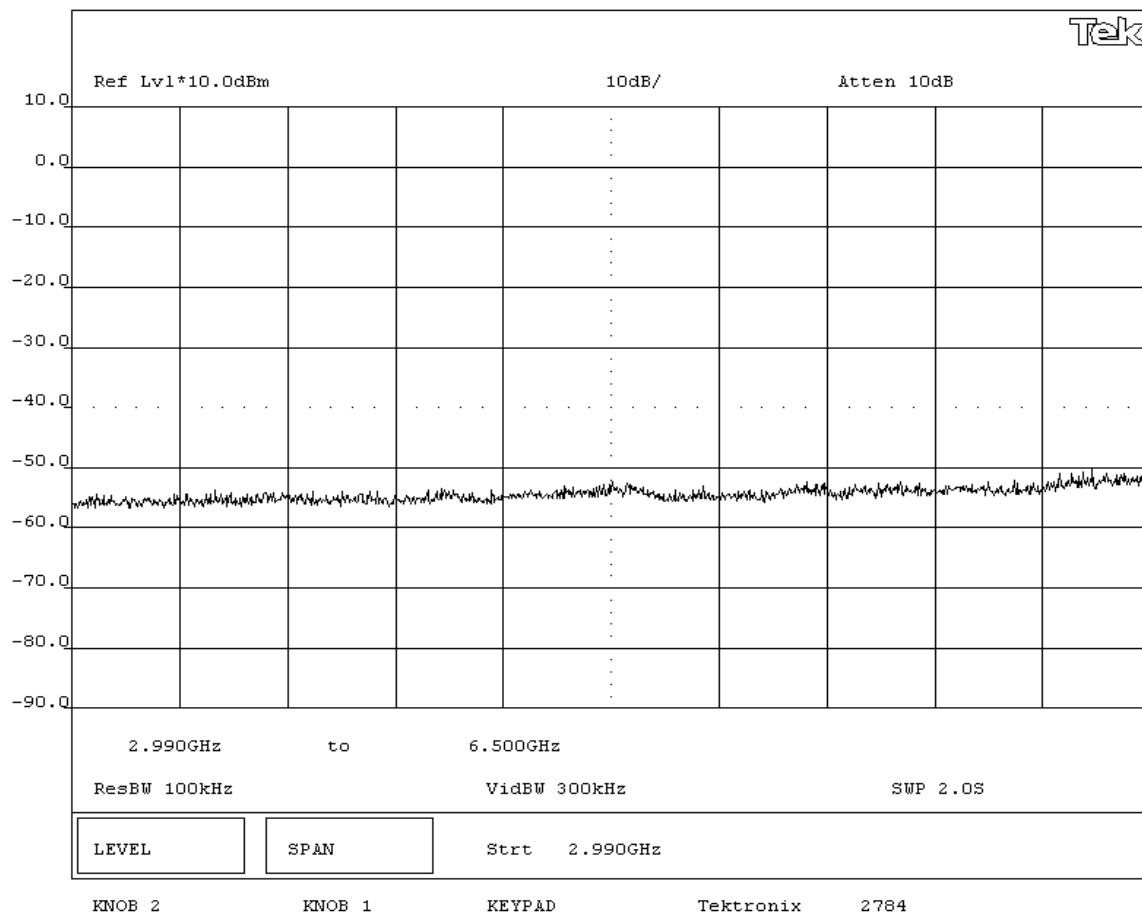

EMISSIONS DATA SHEET

Rev BETA
01/30/01

EUT:	F-0399A	Work Order:	LABT0131
Serial Number:	000D-44-4F00C5	Date:	06/28/05
Customer:	Logitech, Inc.	Temperature:	71 °F
Attendees:	None	Tested by:	Rod Peloquin
Customer Ref. No.:		Humidity:	49% RH
		Power:	Battery
		Job Site:	EV06

TEST SPECIFICATIONS

Specification:	47 CFR 15.247(d)	Year:	2005-04	Method:	DA 00-705, ANSI C63.4	Year:	2003
----------------	------------------	-------	---------	---------	-----------------------	-------	------

SAMPLE CALCULATIONS

--

COMMENTS

Comments	

EUT OPERATING MODES

Modulated by PRBS at maximum data rate

DEVIATIONS FROM TEST STANDARD

None

REQUIREMENTS

Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

RESULTS


Pass

SIGNATURE


Tested By: Bohly to Bohly

DESCRIPTION OF TEST


Antenna Conducted Spurious Emissions - Mid Channel 6.5GHz-15GHz

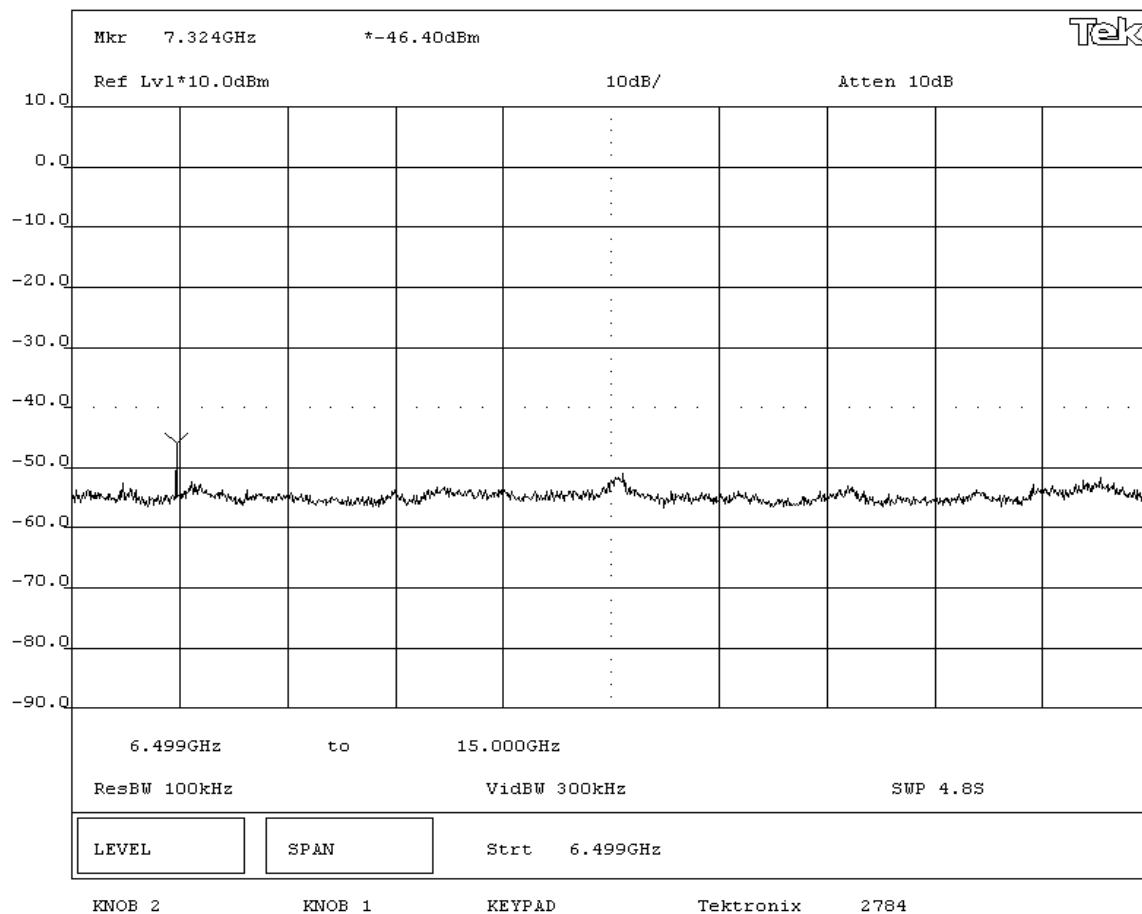


NORTHWEST EMC		EMISSIONS DATA SHEET		Rev BETA 01/30/01	
EUT: F-0399A			Work Order: LABT0131		
Serial Number: 000D-44-4F00C5			Date: 06/28/05		
Customer: Logitech, Inc.			Temperature: 71 °F		
Attendees: None		Tested by: Rod Peloquin		Humidity: 49% RH	
Customer Ref. No.:		Power: Battery		Job Site: EV06	
TEST SPECIFICATIONS					
Specification: 47 CFR 15.247(d)		Year: 2005-04		Method: DA 00-705, ANSI C63.4	
				Year: 2003	
SAMPLE CALCULATIONS					
COMMENTS					
EUT OPERATING MODES					
Modulated by PRBS at maximum data rate					
DEVIATIONS FROM TEST STANDARD					
None					
REQUIREMENTS					
Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental					
RESULTS					
Pass					
SIGNATURE					
 Tested By: _____					
DESCRIPTION OF TEST					
Antenna Conducted Spurious Emissions - Mid Channel 15GHz-25GHz					

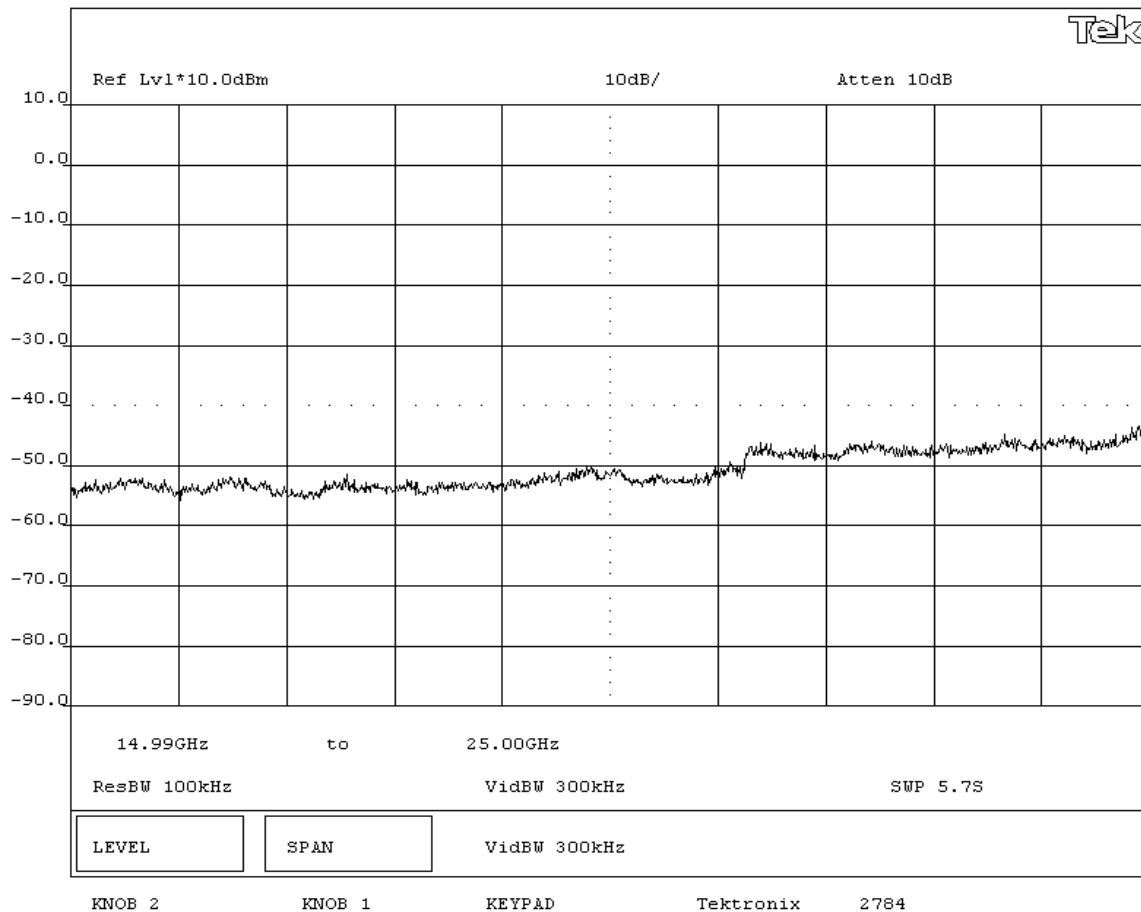


NORTHWEST EMC		EMISSIONS DATA SHEET		Rev BETA 01/30/01	
EUT: F-0399A			Work Order: LABT0131		
Serial Number: 000D-44-4F00C5			Date: 06/28/05		
Customer: Logitech, Inc.			Temperature: 71 °F		
Attendees: None		Tested by: Rod Peloquin		Humidity: 49% RH	
Customer Ref. No.:		Power: Battery		Job Site: EV06	
TEST SPECIFICATIONS					
Specification: 47 CFR 15.247(d)		Year: 2005-04		Method: DA 00-705, ANSI C63.4	
				Year: 2003	
SAMPLE CALCULATIONS					
COMMENTS					
EUT OPERATING MODES					
Modulated by PRBS at maximum data rate					
DEVIATIONS FROM TEST STANDARD					
None					
REQUIREMENTS					
Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental					
RESULTS					
Pass					
SIGNATURE					
 Tested By: _____					
DESCRIPTION OF TEST					
Antenna Conducted Spurious Emissions - High Channel 0MHz-3GHz					

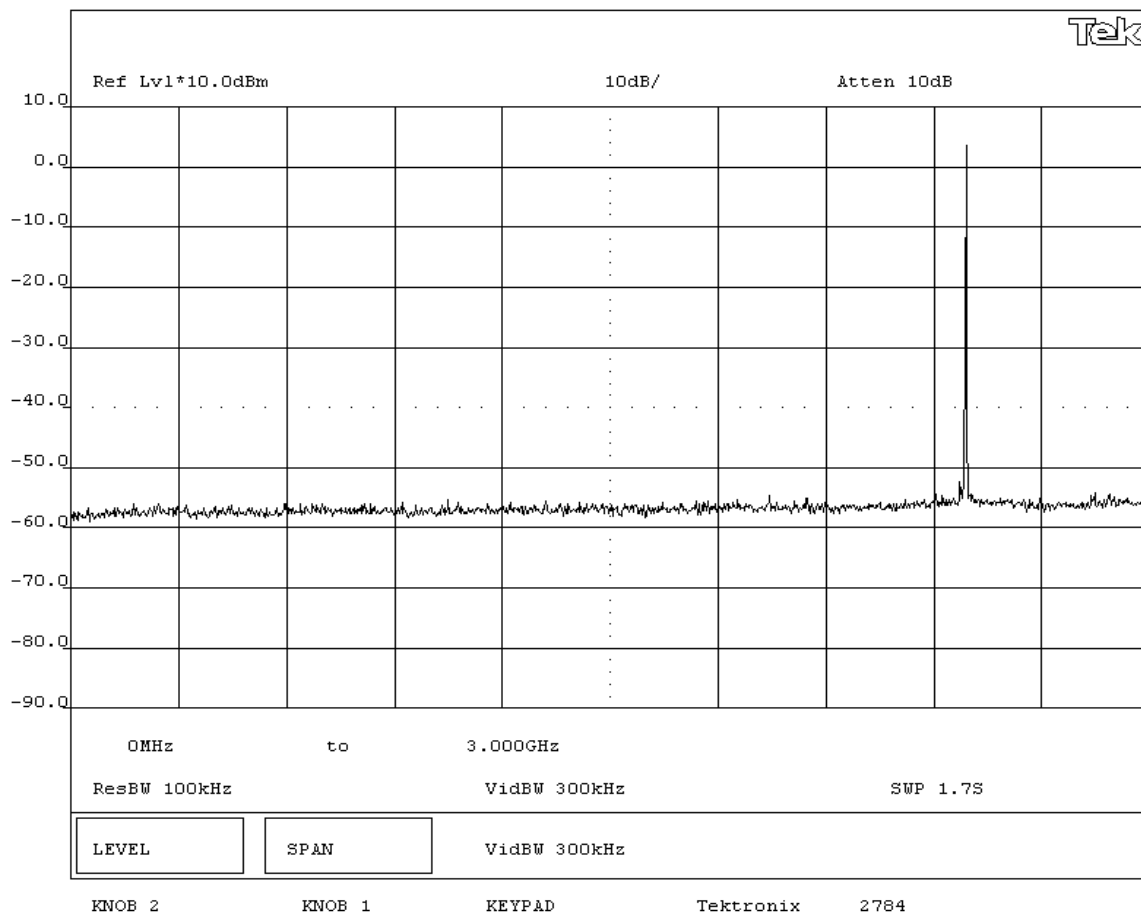


NORTHWEST EMC		EMISSIONS DATA SHEET		Rev BETA 01/30/01	
EUT: F-0399A			Work Order: LABT0131		
Serial Number: 000D-44-4F00C5			Date: 06/28/05		
Customer: Logitech, Inc.			Temperature: 71 °F		
Attendees: None		Tested by: Rod Peloquin		Humidity: 49% RH	
Customer Ref. No.:		Power: Battery		Job Site: EV06	
TEST SPECIFICATIONS					
Specification: 47 CFR 15.247(d)		Year: 2005-04		Method: DA 00-705, ANSI C63.4	
				Year: 2003	
SAMPLE CALCULATIONS					
COMMENTS					
EUT OPERATING MODES					
Modulated by PRBS at maximum data rate					
DEVIATIONS FROM TEST STANDARD					
None					
REQUIREMENTS					
Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental					
RESULTS					
Pass					
SIGNATURE					
 Tested By: _____					
DESCRIPTION OF TEST					
Antenna Conducted Spurious Emissions - High Channel 3GHz-6.5GHz					

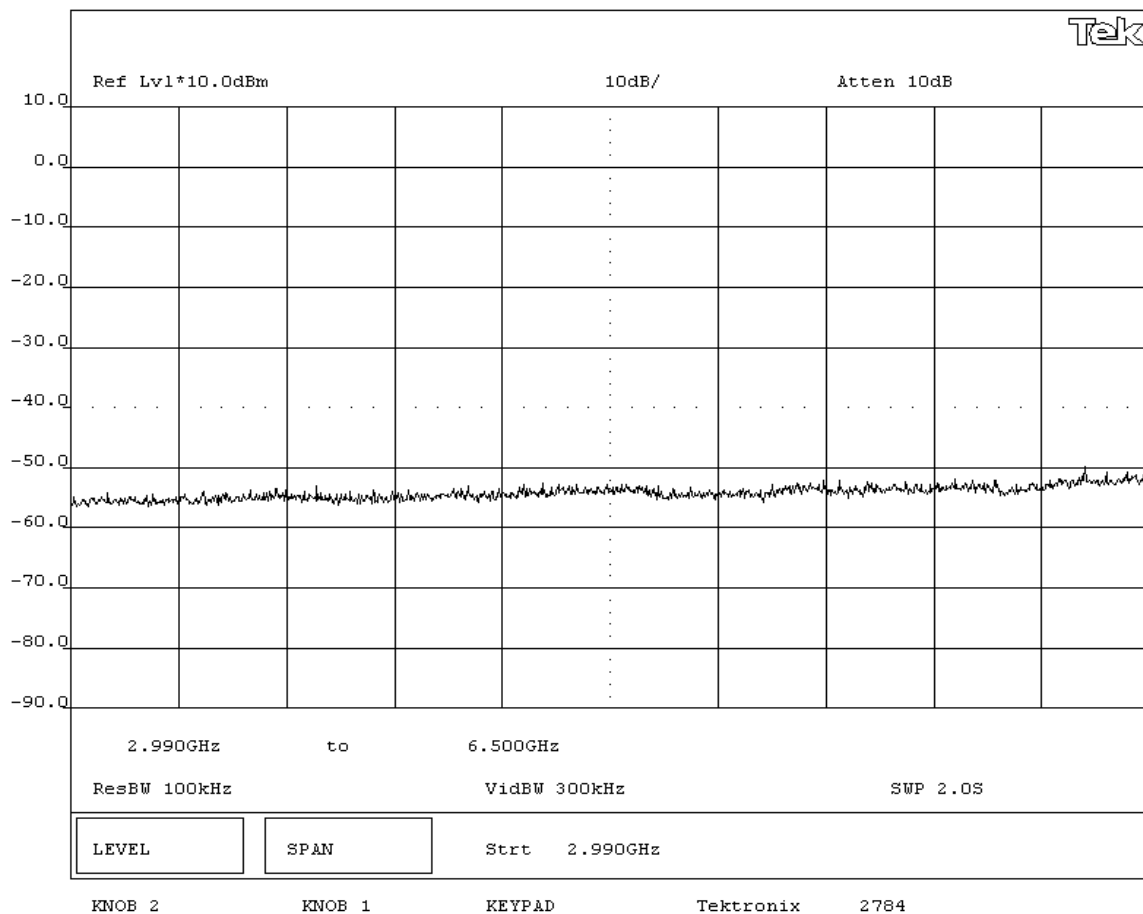


NORTHWEST EMC		EMISSIONS DATA SHEET		Rev BETA 01/30/01	
EUT: F-0399A			Work Order: LABT0131		
Serial Number: 000D-44-4F00C5			Date: 06/28/05		
Customer: Logitech, Inc.			Temperature: 71 °F		
Attendees: None		Tested by: Rod Peloquin		Humidity: 49% RH	
Customer Ref. No.:		Power: Battery		Job Site: EV06	
TEST SPECIFICATIONS					
Specification: 47 CFR 15.247(d)		Year: 2005-04		Method: DA 00-705, ANSI C63.4	
				Year: 2003	
SAMPLE CALCULATIONS					
COMMENTS					
EUT OPERATING MODES					
Modulated by PRBS at maximum data rate					
DEVIATIONS FROM TEST STANDARD					
None					
REQUIREMENTS					
Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental					
RESULTS					
Pass					
SIGNATURE					
 Tested By: _____					
DESCRIPTION OF TEST					
Antenna Conducted Spurious Emissions - High Channel 6.5GHz-15GHz					

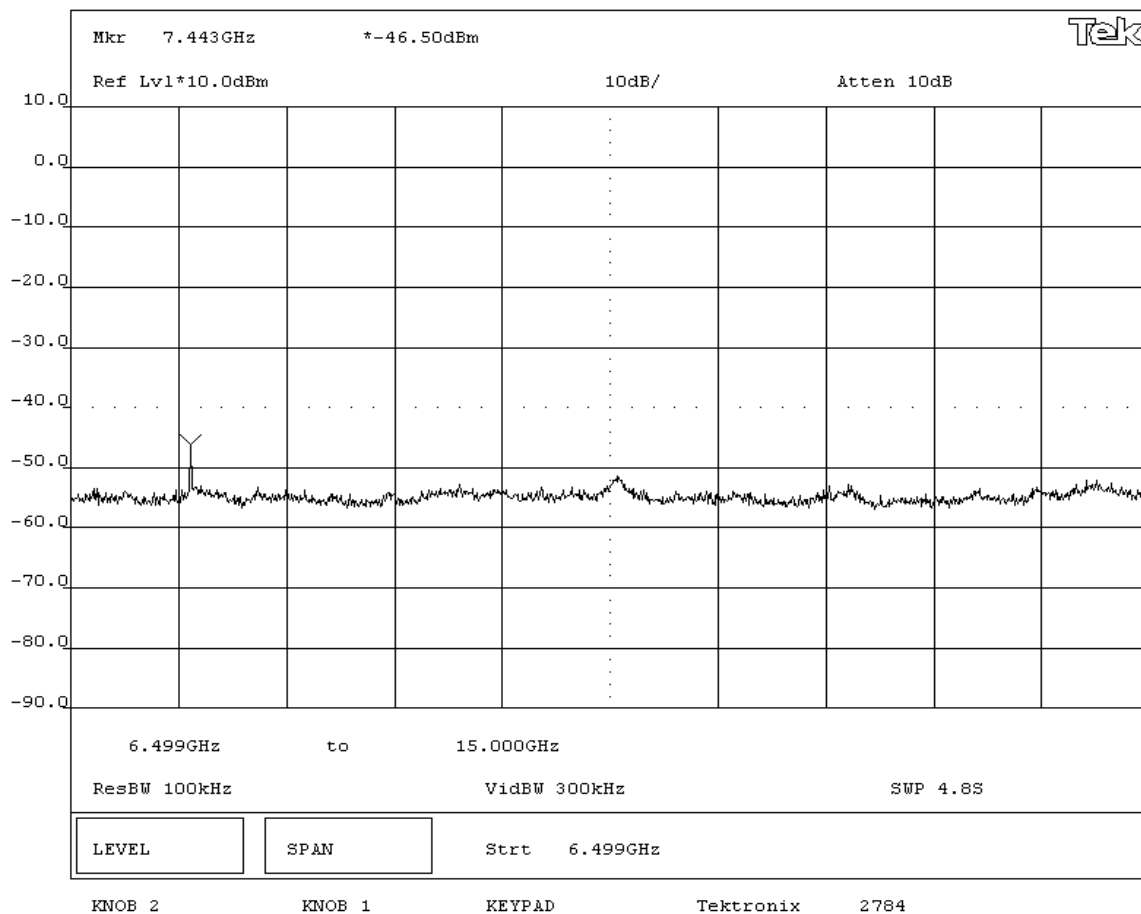

NORTHWEST EMC		EMISSIONS DATA SHEET		Rev BETA 01/30/01	
EUT: F-0399A			Work Order: LABT0131		
Serial Number: 000D-44-4F00C5			Date: 06/28/05		
Customer: Logitech, Inc.			Temperature: 71 °F		
Attendees: None		Tested by: Rod Peloquin		Humidity: 49% RH	
Customer Ref. No.:		Power: Battery		Job Site: EV06	
TEST SPECIFICATIONS					
Specification: 47 CFR 15.247(d)		Year: 2005-04		Method: DA 00-705, ANSI C63.4	
				Year: 2003	
SAMPLE CALCULATIONS					
COMMENTS					
EUT OPERATING MODES					
Modulated by PRBS at maximum data rate					
DEVIATIONS FROM TEST STANDARD					
None					
REQUIREMENTS					
Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental					
RESULTS					
Pass					
SIGNATURE					
 Tested By: _____					
DESCRIPTION OF TEST					
Antenna Conducted Spurious Emissions - High Channel 15GHz-25GHz					

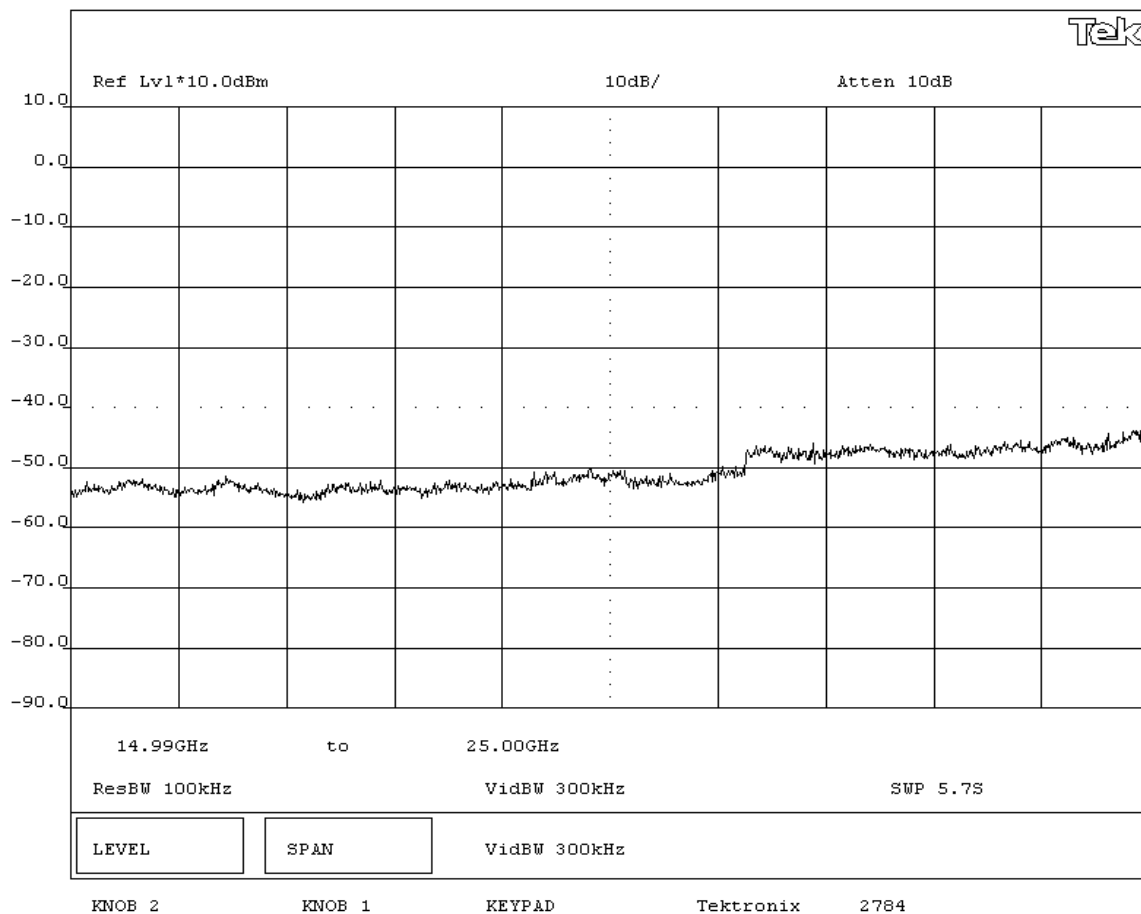

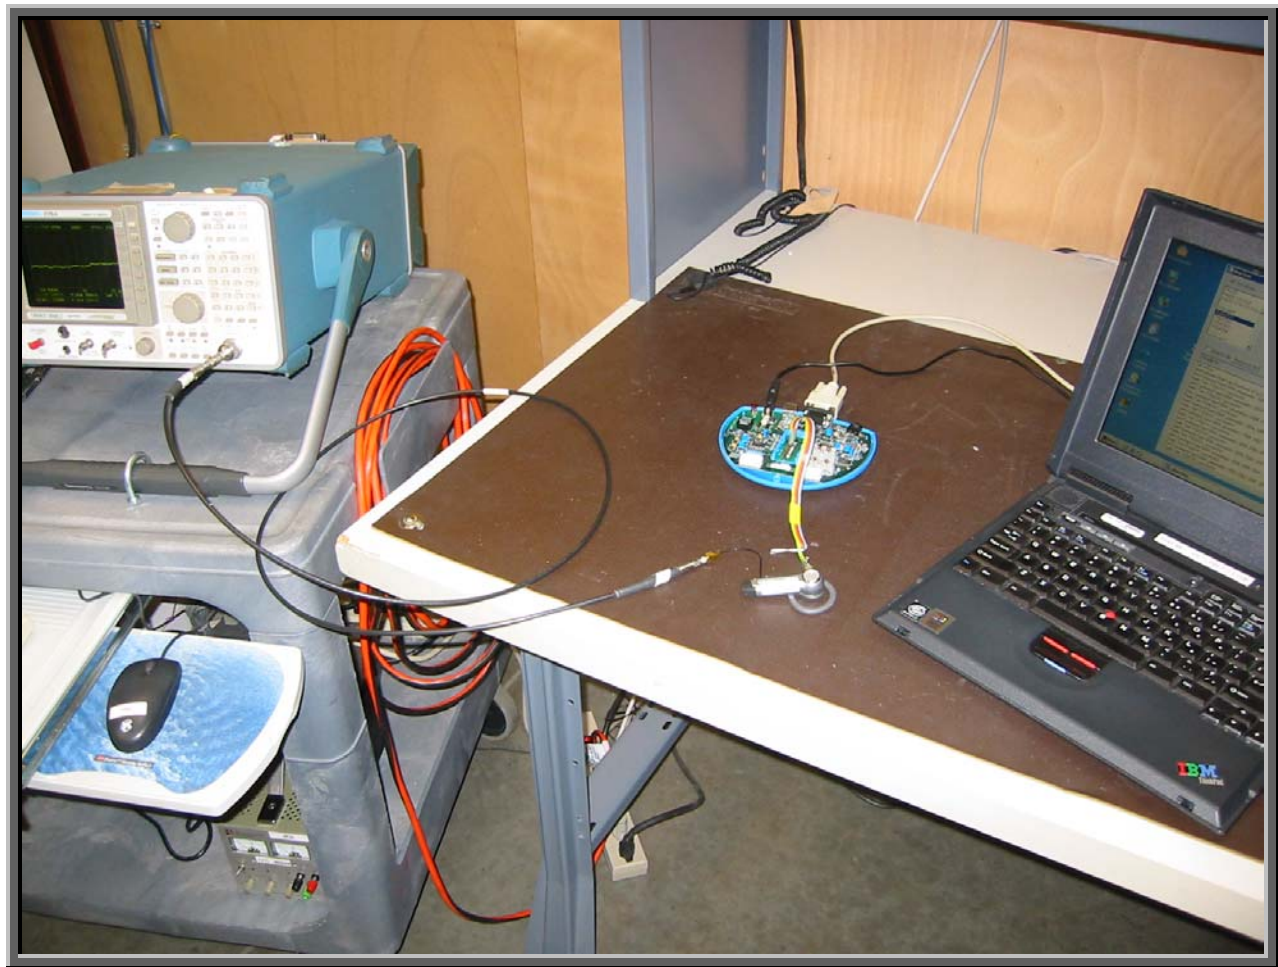

Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

Channels in Specified Band Investigated:

Low
Mid
High

Operating Modes Investigated:

No Hop

Data Rates Investigated:

Maximum

Output Power Setting(s) Investigated:

Maximum

Software\Firmware Applied During Test

Exercise software	BlueCore-Audio	Version	1.0
Description			
The system was tested using special software developed to test all functions of the device during the test. The firmware put the radio into a no-hop mode with a modulated carrier. Transmit channels were selectable between the lowest, a middle, and the highest channels in the operating band.			

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
EUT – F-0399A	Logitech, Inc.	F-0399A	000D-44-4F00C5
Development Module	Cambridge Silicon Radio, Ltd.	BCES301199/1	7467 08 08 03
AC Adapter	Egston	N2GFSW3	42251

Remote Equipment Outside of Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
Laptop PC	IBM	A21M	IS108
AC Adapter	IBM	02K6657	None
Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary			

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
Serial	No	2.1	No	Laptop PC	Development Module
I/O	No	1.2	No	Development Module	EUT
DC Leads	No	1.8	PA	AC Adapter	Development Module
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

Measurement Equipment

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Tektronix	2784	AAO	01/02/2005	12 mo

Test Description


Requirement: Per 47 CFR 15.247(e), the peak power spectral density conducted from the antenna port of a direct sequence transmitter must not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission.

Configuration: The peak power spectral density measurements were measured with the EUT set to low, mid, and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate using direct sequence modulation. Per the procedure outlined in FCC 97-114, the spectrum analyzer was used as follows:

The emission peak(s) were located and zoom in on within the passband. The resolution bandwidth was set to 3 kHz, the video bandwidth was set to greater than or equal to the resolution bandwidth. The sweep speed was set equal to the span divided by 3 kHz (sweep = $(SPAN/3 \text{ kHz})$). For example, given a span of 1.5 MHz, the sweep should be $1.5 \times 10^6 \div 3 \times 10^3 = 500$ seconds. External attenuation was used and added to the reading. The following FCC procedure was used for modifying the power spectral density measurements:

"If the spectrum line spacing cannot be resolved on the available spectrum analyzer, the noise density function on most modern conventional spectrum analyzers will directly measure the noise power density normalized to a 1 Hz noise power bandwidth. Add 34.8 dB for correction to 3 kHz."

Completed by:



NORTHWEST
EMC**POWER SPECTRAL DENSITY**Rev BETA
01/30/01

EUT: F-0399A			Work Order: LABT0131		
Serial Number: 000D-44-4F00C5			Date: 06/28/05		
Customer: Logitech, Inc.			Temperature: 70 °F		
Attendees: None			Humidity: 43% RH		
Customer Ref. No.:			Job Site: EV06		
Tested by: Rod Peloquin			Power: Battery		

TEST SPECIFICATIONS

Specification: 47 CFR 15.247(e)	Year: 2005-04	Method: FCC 97-114, ANSI C63.4	Year: 2003
---------------------------------	---------------	--------------------------------	------------

SAMPLE CALCULATIONS

Meter reading on spectrum analyzer is internally compensated for cable loss and external attenuation.

Power Spectral Density per 3kHz bandwidth = Power Spectral Density per 1 Hz bandwidth + Bandwidth Correction Factor.

Bandwidth Correction Factor = $10 \cdot \log(3\text{kHz}/1\text{Hz}) = 34.8 \text{ dB}$ **COMMENTS****EUT OPERATING MODES**

Modulated by PRBS at maximum data rate

DEVIATIONS FROM TEST STANDARD

None


REQUIREMENTS

Maximum peak power spectral density conducted from a DSSS transmitter does not exceed 8 dBm in any 3 kHz band

RESULTS**AMPLITUDE**

Pass

Power Spectral Density = -7.0dBm / 3kHz

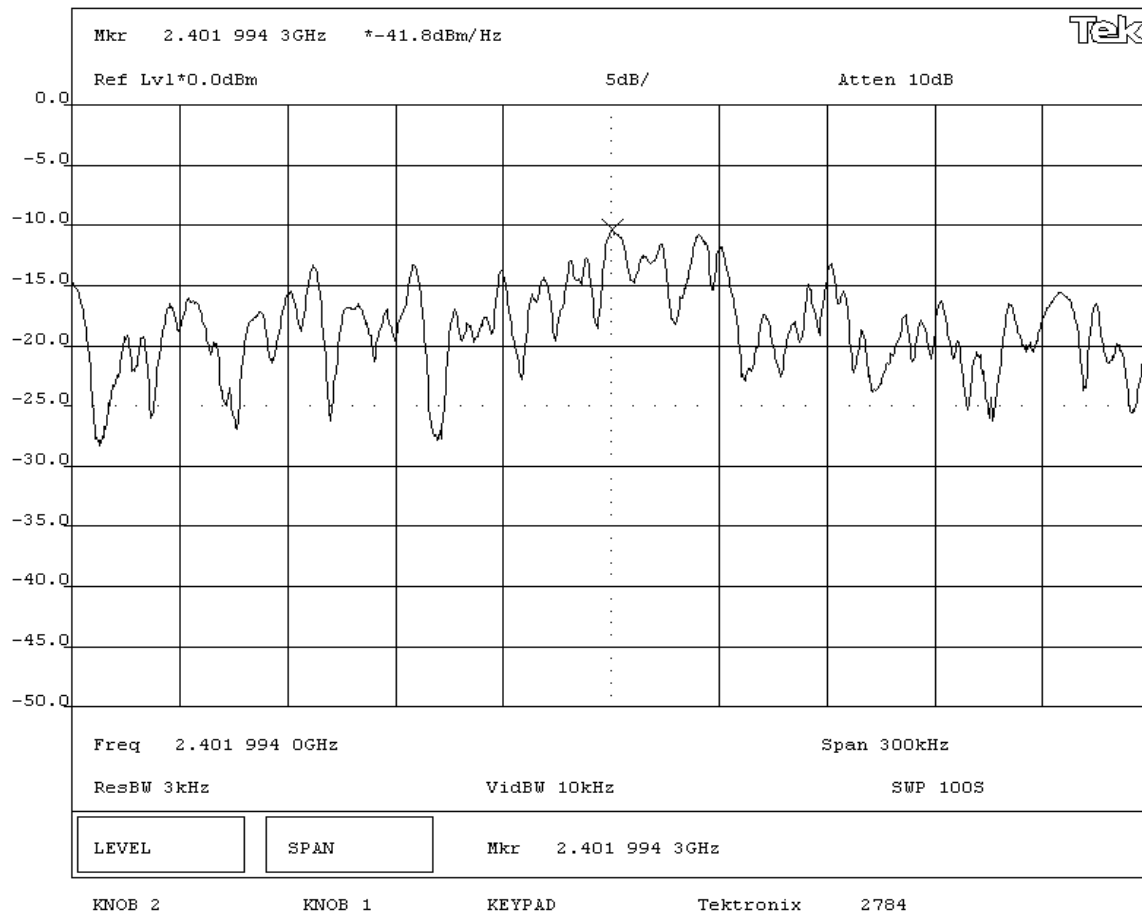SIGNATURETested By: **DESCRIPTION OF TEST****Power Spectral Density - Low Channel**

NORTHWEST
EMC

POWER SPECTRAL DENSITY

Rev BETA
01/30/01

EUT: F-0399A			Work Order: LABT0131		
Serial Number: 000D-44-4F00C5			Date: 06/28/05		
Customer: Logitech, Inc.			Temperature: 70 °F		
Attendees: None			Humidity: 43% RH		
Customer Ref. No.:			Job Site: EV06		
			Tested by: Rod Peloquin		
			Power: Battery		

TEST SPECIFICATIONS

Specification: 47 CFR 15.247(e)	Year: 2005-04	Method: FCC 97-114, ANSI C63.4	Year: 2003
---------------------------------	---------------	--------------------------------	------------

SAMPLE CALCULATIONS

Meter reading on spectrum analyzer is internally compensated for cable loss and external attenuation

Power Spectral Density per 3kHz bandwidth = Power Spectral Density per 1 Hz bandwidth + Bandwidth Correction Factor.

Bandwidth Correction Factor = $10 \cdot \log(3\text{kHz}/1\text{Hz}) = 34.8 \text{ dB}$

COMMENTS

EUT OPERATING MODES

Modulated by PRBS at maximum data rate

DEVIATIONS FROM TEST STANDARD

None

REQUIREMENTS

Maximum peak power spectral density conducted from a DSSS transmitter does not exceed 8 dBm in any 3 kHz band

RESULTS

AMPLITUDE


Pass Power Spectral Density = -6.5dBm / 3kHz

SIGNATURE

Tested By: 

DESCRIPTION OF TEST

Power Spectral Density - Mid Channel

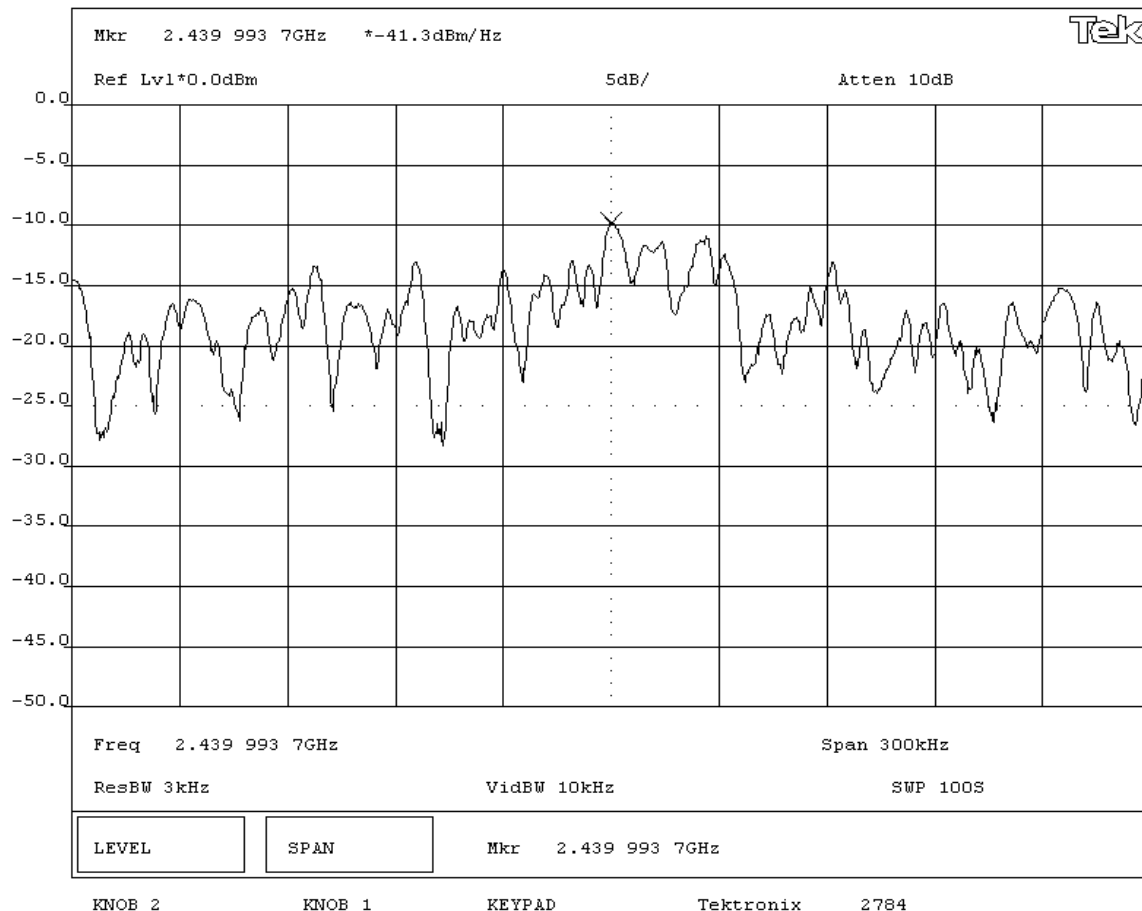

NORTHWEST
EMC**POWER SPECTRAL DENSITY**Rev BETA
01/30/01

EUT: F-0399A			Work Order: LABT0131		
Serial Number: 000D-44-4F00C5			Date: 06/28/05		
Customer: Logitech, Inc.			Temperature: 70 °F		
Attendees: None			Humidity: 43% RH		
Customer Ref. No.:			Job Site: EV06		
Tested by: Rod Peloquin			Power: Battery		

TEST SPECIFICATIONS

Specification: 47 CFR 15.247(e)	Year: 2005-04	Method: FCC 97-114, ANSI C63.4	Year: 2003
---------------------------------	---------------	--------------------------------	------------

SAMPLE CALCULATIONS

Meter reading on spectrum analyzer is internally compensated for cable loss and external attenuation

Power Spectral Density per 3kHz bandwidth = Power Spectral Density per 1 Hz bandwidth + Bandwidth Correction Factor.

Bandwidth Correction Factor = $10 \cdot \log(3\text{kHz}/1\text{Hz}) = 34.8 \text{ dB}$ **COMMENTS****EUT OPERATING MODES**

Modulated by PRBS at maximum data rate

DEVIATIONS FROM TEST STANDARD

None


REQUIREMENTS


Maximum peak power spectral density conducted from a DSSS transmitter does not exceed 8 dBm in any 3 kHz band

RESULTS**AMPLITUDE**

Pass

Power Spectral Density = -6.3dBm / 3kHz

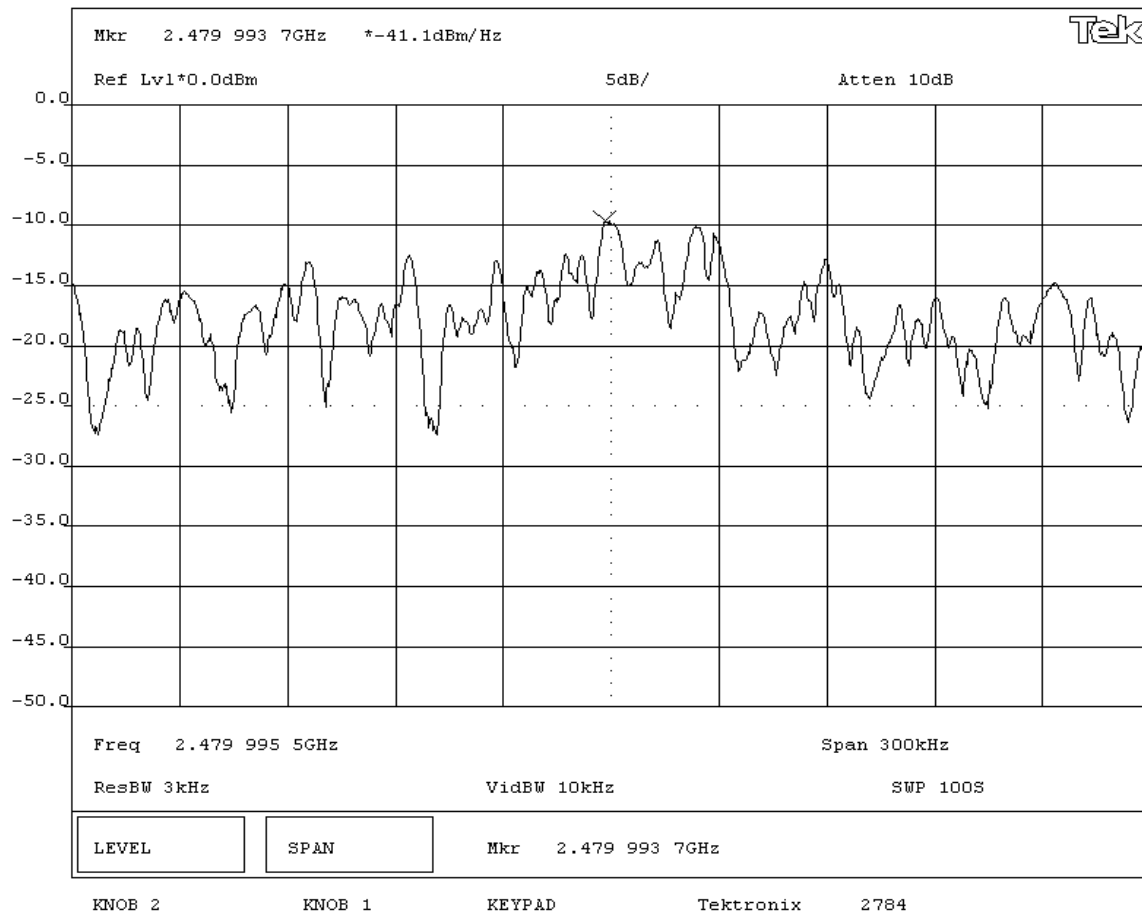SIGNATURETested By: **DESCRIPTION OF TEST****Power Spectral Density - High Channel**

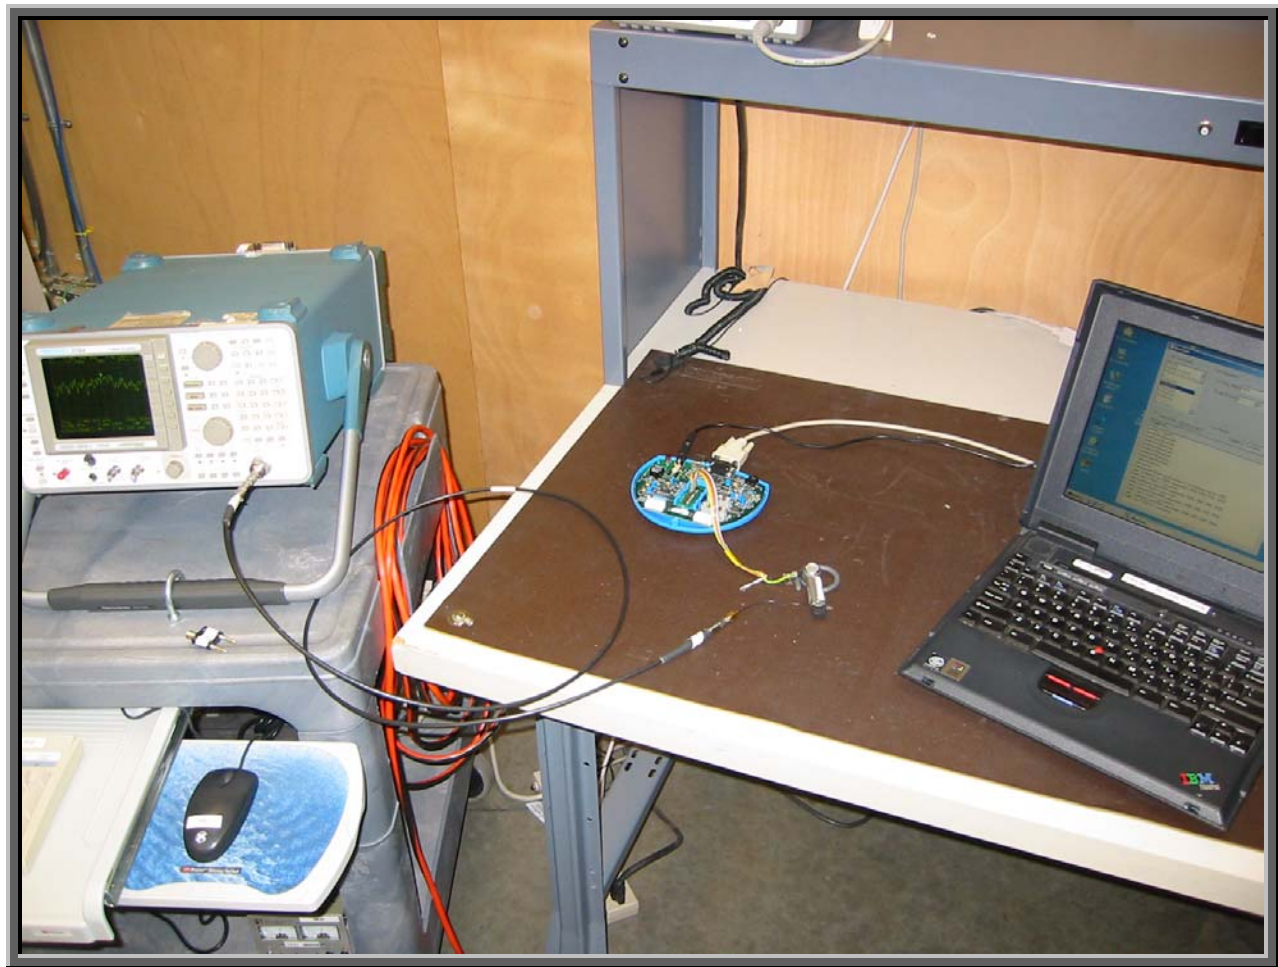

Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

Channels in Specified Band Investigated:

Low
Mid
High

Operating Modes Investigated:

No Hop

Data Rates Investigated:

Maximum

Output Power Setting(s) Investigated:

Maximum

Power Input Settings Investigated:

Battery

Frequency Range Investigated

Start Frequency	30 MHz	Stop Frequency	26 GHz
------------------------	--------	-----------------------	--------

Software\Firmware Applied During Test

Exercise software	BlueCore-Audio	Version	1.0
Description			
The system was tested using special software developed to test all functions of the device during the test. The firmware put the radio into a no-hop mode with a modulated carrier. Transmit channels were selectable between the lowest, a middle, and the highest channels in the operating band.			

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
EUT – F-0399A	Logitech, Inc.	F-0399A	000D-44-4F0089

Remote Equipment Outside of Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
Laptop PC	IBM	A21M	IS108
AC Adapter	IBM	02K6657	None
Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary			

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
Serial	No	2.1	No	Laptop PC	Development Module
I/O	No	1.2	No	Development Module	EUT
DC Leads	No	1.8	PA	AC Adapter	Development Module
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

Measurement Equipment

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Pre-Amplifier	Amplifier Research	LN1000A	APS	03/01/2005	13 mo
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APJ	05/05/2005	3 mo
Antenna, Biconilog	EMCO	3141	AXE	12/03/2003	24 mo
Antenna, Horn	EMCO	3115	AHC	09/07/2004	12 mo
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APC	02/17/2005	13 mo
Antenna, Horn	EMCO	3160-08	AHK	NCR	NA
High Pass Filter	Micro-Tronics	HPM50111	HFO	03/09/2005	13 mo
Attenuator	Coaxicom	66702 5910-20	RBJ	02/25/2005	13 mo
Antenna, Horn	EMCO	3160-09	AHG	NCR	NA
Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	02/15/2005	13 mo
Spectrum Analyzer	Agilent	E4446A	AAQ	04/08/2005	13 mo

Test Description

Requirement: The field strength of any spurious emissions or modulation products that fall in a restricted band, as defined in 47 CFR 15.205, is measured. The peak level must comply with the limits specified in 47 CFR 15.35(b). The average level (taken with a 10Hz VBW) must comply with the limits specified in 15.209.

Configuration: The highest gain of each type of antenna to be used with the EUT was tested. The EUT was configured for low, mid, and high band transmit frequencies. For each configuration, the spectrum was scanned throughout the specified range. In addition, measurements were made in the restricted bands to verify compliance. While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and the EUT antenna in three orthogonal axis, and adjusting measurement antenna height and polarization, and manipulating the EUT antenna in 3 orthogonal planes (per ANSI C63.4:2003). A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

Bandwidths Used for Measurements			
Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 – 0.15	1.0	0.2	0.2
0.15 – 30.0	10.0	9.0	9.0
30.0 – 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0
<i>Measurements were made using the bandwidths and detectors specified. No video filter was used.</i>			

Completed by:

NORTHWEST		PSA 2005.6.23 BETA										
EMC		RADIATED EMISSIONS DATA SHEET										
EUT: F-0399A		Work Order: LABT0131										
Serial Number:		Date: 06/29/05										
Customer: Logitech, Inc.		Temperature: 23										
Attendees: None		Humidity: 47%										
Project:		Barometric Pressure: 29.96										
Tested by: Holly Ashkannejhad		Power: Battery	Job Site: EV01									
TEST SPECIFICATIONS		Test Method										
FCC 15.247(d) Spurious Radiated Emissions:2005-04		ANSI C63.4:2003										
TEST PARAMETERS												
Antenna Height(s) (m)	1 - 4	Test Distance (m)	3									
COMMENTS												
EUT OPERATING MODES												
Transmitting Bluetooth Low Channel												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
Run #	1	Signature <i>Holly Ashkannejhad</i>										
Configuration #												
Results	Pass											
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
1601.977	29.0	-6.1	183.0	1.0	3.0	20.0	V-Horn	AV	0.0	42.9	54.0	-11.1
1599.625	25.4	-6.1	255.0	1.9	3.0	20.0	H-Horn	AV	0.0	39.3	54.0	-14.7
1600.962	40.1	-6.1	255.0	1.9	3.0	20.0	H-Horn	PK	0.0	54.0	74.0	-20.0
1602.134	39.6	-6.1	183.0	1.0	3.0	20.0	V-Horn	PK	0.0	53.5	74.0	-20.5



NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET		PSA 2005.6.23 BETA EMI 2005.6.19								
EUT: F-0399A		Work Order: LABT0131										
Serial Number:		Date: 06/29/05										
Customer: Logitech, Inc.		Temperature: 23										
Attendees: None		Humidity: 47%										
Project:		Barometric Pressure: 29.96										
Tested by: Holly Ashkannejhad		Power: Battery		Job Site: EV01								
TEST SPECIFICATIONS		Test Method										
FCC 15.247(d) Spurious Radiated Emissions:2005-04		ANSI C63.4:2003										
TEST PARAMETERS												
Antenna Height(s) (m)		1 - 4		Test Distance (m) 3								
COMMENTS												
EUT OPERATING MODES												
Transmitting Bluetooth High Channel												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
Run #	2		Signature <i>Holly Ashkannejhad</i>									
Configuration #												
Results	Pass											
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
2483.500	26.5	-2.3	232.0	1.4	3.0	20.0	V-Horn	AV	0.0	44.2	54.0	-9.8
2483.500	26.4	-2.3	302.0	1.0	3.0	20.0	H-Horn	AV	0.0	44.1	54.0	-9.9
2483.500	42.1	-2.3	232.0	1.4	3.0	20.0	V-Horn	PK	0.0	59.8	74.0	-14.2
2483.500	41.1	-2.3	302.0	1.0	3.0	20.0	H-Horn	PK	0.0	58.8	74.0	-15.2

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				PSA 2005.6.23 BETA EMI 2005.6.19	
EUT: F-0399A										Work Order: LABT0131					
Serial Number:										Date: 06/29/05					
Customer: Logitech, Inc.										Temperature: 23					
Attendees: None										Humidity: 46%					
Project:										Barometric Pressure: 29.97					
Tested by: Holly Ashkannejhad						Power: Battery		Job Site: EV01							
TEST SPECIFICATIONS										Test Method					
FCC 15.247(d) Spurious Radiated Emissions:2005-04										ANSI C63.4:2003					
TEST PARAMETERS															
Antenna Height(s) (m)				1 - 4				Test Distance (m)				3			
COMMENTS															
EUT OPERATING MODES															
Transmitting Bluetooth Low Channel															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
Run #		3		Signature											
Configuration #															
Results		Pass													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
4804.003	32.9	5.8	214.0	2.3	3.0	0.0	H-Horn	AV	0.0	38.7	54.0	-15.3			
4803.900	32.8	5.8	239.0	1.2	3.0	0.0	V-Horn	AV	0.0	38.6	54.0	-15.4			
12011.880	20.7	17.3	103.0	2.5	3.0	0.0	H-Horn	AV	0.0	38.0	54.0	-16.0			
12013.840	20.7	17.3	31.0	3.0	3.0	0.0	V-Horn	AV	0.0	38.0	54.0	-16.0			
4804.740	46.1	5.8	214.0	2.3	3.0	0.0	H-Horn	PK	0.0	51.9	74.0	-22.1			
4803.900	45.9	5.8	239.0	1.2	3.0	0.0	V-Horn	PK	0.0	51.7	74.0	-22.3			
12008.900	34.1	17.3	103.0	2.5	3.0	0.0	H-Horn	PK	0.0	51.4	74.0	-22.6			
12010.730	34.0	17.3	31.0	3.0	3.0	0.0	V-Horn	PK	0.0	51.3	74.0	-22.7			

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				PSA 2005.6.23 BETA EMI 2005.6.19	
EUT: F-0399A										Work Order: LABT0131					
Serial Number:										Date: 06/29/05					
Customer: Logitech, Inc.										Temperature: 23					
Attendees: None										Humidity: 46%					
Project:										Barometric Pressure: 29.97					
Tested by: Holly Ashkannejhad						Power: Battery		Job Site: EV01							
TEST SPECIFICATIONS										Test Method					
FCC 15.247(d) Spurious Radiated Emissions:2005-04										ANSI C63.4:2003					
TEST PARAMETERS															
Antenna Height(s) (m)				1 - 4				Test Distance (m)				3			
COMMENTS															
EUT OPERATING MODES															
Transmitting Bluetooth Mid Channel															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
Run #		4		Signature											
Configuration #															
Results		Pass													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
7322.972	28.9	11.8	346.0	1.0	3.0	0.0	H-Horn	AV	0.0	40.7	54.0	-13.3			
7322.428	25.9	11.8	68.0	2.5	3.0	0.0	V-Horn	AV	0.0	37.7	54.0	-16.3			
12205.670	20.1	17.1	75.0	1.0	3.0	0.0	H-Horn	AV	0.0	37.2	54.0	-16.8			
12207.700	20.0	17.1	155.0	1.0	3.0	0.0	V-Horn	AV	0.0	37.1	54.0	-16.9			
7323.777	41.3	11.8	346.0	1.0	3.0	0.0	H-Horn	PK	0.0	53.1	74.0	-20.9			
4882.038	25.9	6.2	220.0	1.3	3.0	0.0	H-Horn	AV	0.0	32.1	54.0	-21.9			
7322.734	40.2	11.8	68.0	2.5	3.0	0.0	V-Horn	PK	0.0	52.0	74.0	-22.0			
4881.374	25.6	6.2	120.0	1.8	3.0	0.0	V-Horn	AV	0.0	31.8	54.0	-22.2			
12205.610	34.3	17.1	75.0	1.0	3.0	0.0	H-Horn	PK	0.0	51.4	74.0	-22.6			
12206.210	33.7	17.1	155.0	1.0	3.0	0.0	V-Horn	PK	0.0	50.8	74.0	-23.2			
4882.034	43.7	6.2	220.0	1.3	3.0	0.0	H-Horn	PK	0.0	49.9	74.0	-24.1			
4881.374	42.9	6.2	120.0	1.8	3.0	0.0	V-Horn	PK	0.0	49.1	74.0	-24.9			

NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET		PSA 2005.6.23 BETA EMI 2005.6.19								
EUT: F-0399A			Work Order: LABT0131									
Serial Number:			Date: 06/29/05									
Customer: Logitech, Inc.			Temperature: 23									
Attendees: None			Humidity: 46%									
Project:			Barometric Pressure: 29.97									
Tested by: Holly Ashkannejhad		Power: Battery		Job Site: EV01								
TEST SPECIFICATIONS			Test Method									
FCC 15.247(d) Spurious Radiated Emissions:2005-04			ANSI C63.4:2003									
TEST PARAMETERS												
Antenna Height(s) (m)		1 - 4		Test Distance (m) 3								
COMMENTS												
EUT OPERATING MODES												
Transmitting Bluetooth High Channel												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
Run #	5		Signature <i>Holly Ashkannejhad</i>									
Configuration #												
Results	Pass											
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
12397.880	19.1	17.1	146.0	1.0	3.0	0.0	V-Horn	AV	0.0	36.2	54.0	-17.8
7440.123	24.1	12.0	253.0	1.9	3.0	0.0	V-Horn	AV	0.0	36.1	54.0	-17.9
12397.620	19.0	17.1	135.0	1.9	3.0	0.0	H-Horn	AV	0.0	36.1	54.0	-17.9
4960.729	27.8	6.4	222.0	1.4	3.0	0.0	H-Horn	AV	0.0	34.2	54.0	-19.8
4959.882	27.6	6.4	123.0	1.3	3.0	0.0	V-Horn	AV	0.0	34.0	54.0	-20.0
7439.924	21.9	12.0	239.0	1.0	3.0	0.0	H-Horn	AV	0.0	33.9	54.0	-20.1
4960.282	44.1	6.4	222.0	1.4	3.0	0.0	H-Horn	PK	0.0	50.5	74.0	-23.5
12401.090	33.0	17.1	146.0	1.0	3.0	0.0	V-Horn	PK	0.0	50.1	74.0	-23.9
12398.850	32.7	17.1	135.0	1.9	3.0	0.0	H-Horn	PK	0.0	49.8	74.0	-24.2
4959.882	43.3	6.4	123.0	1.3	3.0	0.0	V-Horn	PK	0.0	49.7	74.0	-24.3
7441.071	37.0	12.0	253.0	1.9	3.0	0.0	V-Horn	PK	0.0	49.0	74.0	-25.0
7439.457	35.4	12.0	239.0	1.0	3.0	0.0	H-Horn	PK	0.0	47.4	74.0	-26.6



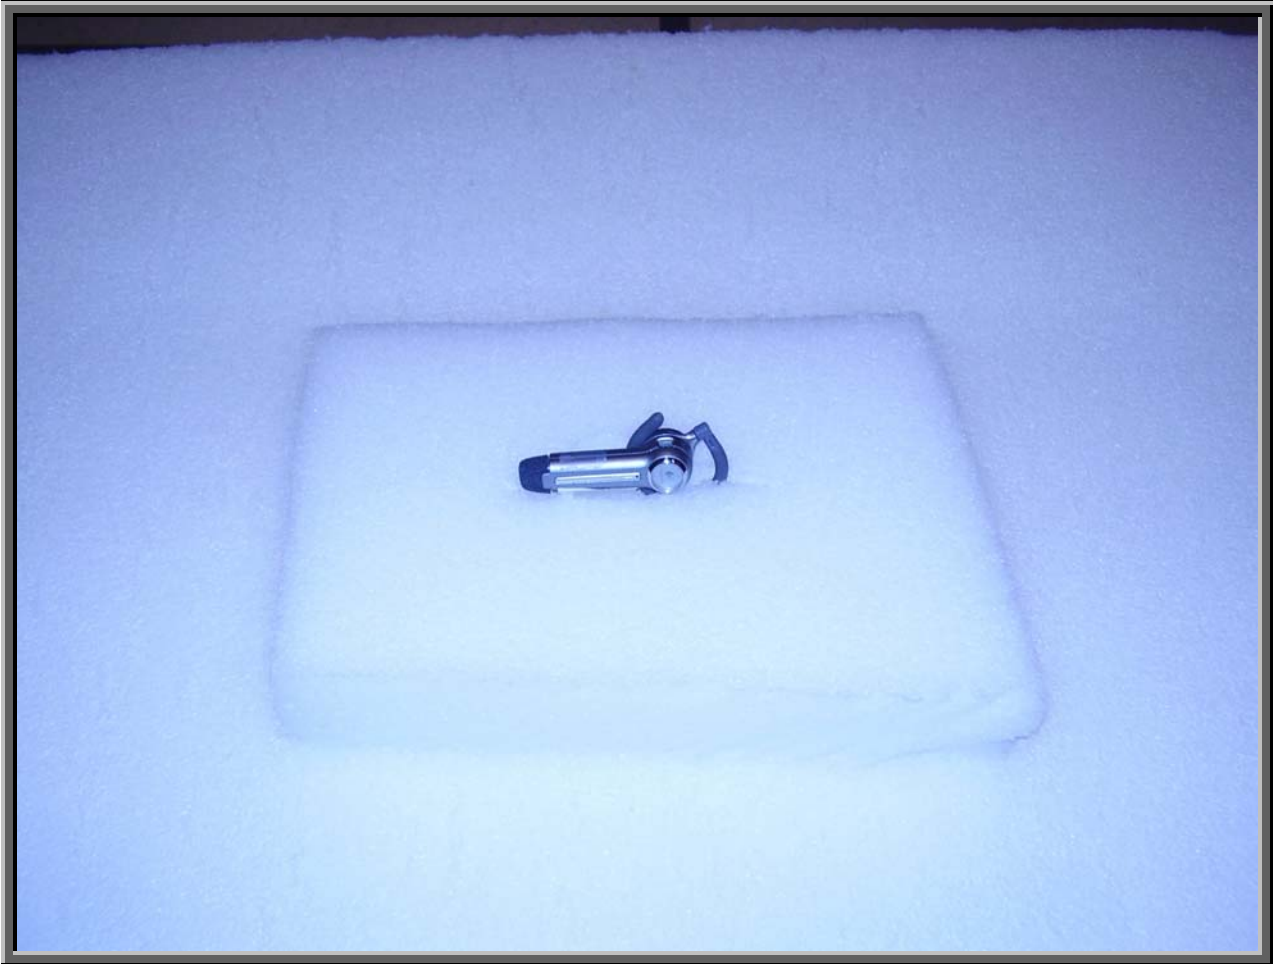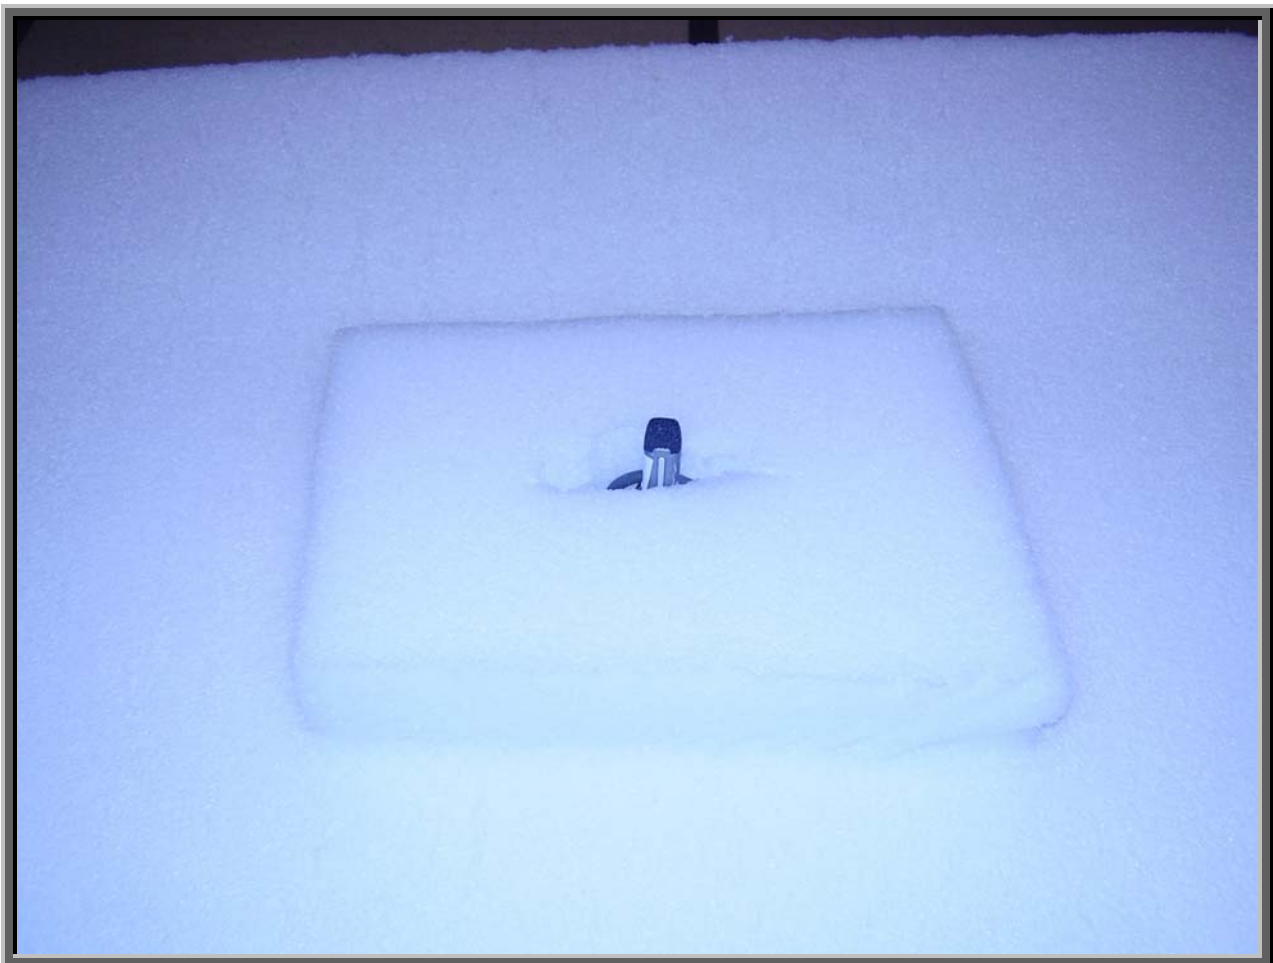

Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. All of the EUT parameters listed below were investigated. This includes, but may not be limited to, CPU speeds, video resolution settings, operational modes, and input voltages.

Operating Modes Investigated:

Charging mode

Transmitting

Operating Mode used for Final Test:

Selected frequencies from both operating modes

Power Input Settings Investigated:

230 VAC, 50 Hz

120 VAC, 60 Hz

Battery

Input Power Setting used for Final Test:

Selected frequencies at 120VAC, 60Hz and Battery powered.

Frequency Range Investigated

Start Frequency	30 MHz	Stop Frequency	1 GHz
------------------------	--------	-----------------------	-------

Software\Firmware Applied During Test

Operating system	Unknown	Version	Unknown
-------------------------	---------	----------------	---------

Exercise software	Unknown	Version	Unknown
--------------------------	---------	----------------	---------

Description

The system was tested using standard operating production software to exercise the functions of the device during the testing.

EUT and Peripherals in Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
AC Adapter	Logitech, Inc.	P925BW05050ABD3	Unknown
EUT – F-0399A	Logitech, Inc.	F-0399A	000D-44-4F0089

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads	No	1.8	PA	AC Adapter	EUT

PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.

Measurement Equipment

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Antenna, Biconilog	EMCO	3141	AXE	12/03/2003	24 mo
Pre-Amplifier	Amplifier Research	LN1000A	APS	03/01/2005	13 mo
Spectrum Analyzer	Agilent	E4446A	AAQ	04/08/2005	13 mo

Test Description

The final radiated emissions test was performed using the parameters described above as worst case. That final test was conducted at a facility that meets the ANSI C63.4 NSA requirements. The frequency range noted in the data sheets was scanned/tested at that facility. Emissions were maximized as specified, by maximizing table azimuth, antenna height, and cable manipulation.


Using the mode of operation and configuration noted within this report, a final radiated emissions test was performed. The frequency range investigated (scanned), is also noted in this report. Radiated emissions measurements were made at the EUT azimuth and antenna height such that the maximum radiated emissions level will be detected. This requires the use of a turntable and an antenna positioner. The preferred method of a continuous azimuth search is utilized for frequency scans of the EUT field strength with both polarities of the measuring antenna. A calibrated, linearly polarized antenna was positioned at the specified distance from the periphery of the EUT.

Note: The specified distance is the horizontal separation between the closest periphery of the EUT and the center of the axis of the elements of the receiving antenna. However, if the receiving antenna is a log-periodic array, the specified distance shall be the distance between the closest periphery of the EUT and the front-to-back center of the array of elements.

Tests were made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement was varied in height above the conducting ground plane to obtain the maximum signal strength. Though specified in the report, the measurement distance shall be 1 meter, 3 meters, 5 meters, 10 meters, or 30 meters. At any measurement distance, the antenna height was varied from 1 meter to 4 meters. These height scans apply for both horizontal and vertical polarization, except that for vertical polarization the minimum height of the center of the antenna shall be increased so that the lowest point of the bottom of the antenna clears the ground surface by at least 25 cm.

Measurement Bandwidths			
Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 – 0.15	1.0	0.2	0.2
0.15 – 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0
Measurements were made using the bandwidths and detectors specified. No video filter was used.			

Completed by:



NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET										PSA 2005.6.23 BETA EMI 2005.6.19	
EUT: F-0399A						Work Order: LABT0131							
Serial Number:						Date: 06/30/05							
Customer: Logitech, Inc.						Temperature: 23							
Attendees: None						Humidity: 46%							
Project:						Barometric Pressure: 29.97							
Tested by: Holly Ashkannejhad						Power: Battery		Job Site: EV01					
TEST SPECIFICATIONS						Test Method							
FCC 15.109(g) (CISPR 22:1997) Class B:2005-04						ANSI C63.4:2003							
TEST PARAMETERS													
Antenna Height(s) (m)		1 - 4				Test Distance (m)		5					
COMMENTS													
EUT OPERATING MODES													
EUT transmitting													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
Run #	2		Signature <i>Holly Ashkannejhad</i>										
Configuration #													
Results	Pass												
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	
181.248	28.6	-12.5	116.0	1.0	5.0	0.0	H-Bilog	QP	0.0	16.1	30.0	-13.9	
181.245	28.1	-12.5	139.0	1.0	5.0	0.0	V-Bilog	QP	0.0	15.6	30.0	-14.4	
918.183	22.2	0.1	274.0	1.0	5.0	0.0	H-Bilog	QP	0.0	22.3	37.0	-14.7	
918.552	22.2	0.1	50.0	1.0	5.0	0.0	V-Bilog	QP	0.0	22.3	37.0	-14.7	
799.500	22.4	-0.2	186.0	1.0	5.0	0.0	H-Bilog	QP	0.0	22.2	37.0	-14.8	
799.775	22.3	-0.2	109.0	1.0	5.0	0.0	V-Bilog	QP	0.0	22.1	37.0	-14.9	
160.850	21.4	-13.5	330.0	1.0	5.0	0.0	H-Bilog	QP	0.0	7.9	30.0	-22.1	
161.081	21.4	-13.5	313.0	1.0	5.0	0.0	V-Bilog	QP	0.0	7.9	30.0	-22.1	

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				PSA 2005.6.23 BETA EMI 2005.6.19	
EUT: F-0399A							Work Order: LABT0131								
Serial Number:							Date: 06/29/05								
Customer: Logitech, Inc.							Temperature: 23								
Attendees: None							Humidity: 46%								
Project:							Barometric Pressure: 29.97								
Tested by: Holly Ashkannejhad				Power: 120VAC, 60Hz			Job Site: EV01								
TEST SPECIFICATIONS										Test Method					
FCC 15.109(g) (CISPR 22:1997) Class B:2005-04										ANSI C63.4:2003					
TEST PARAMETERS															
Antenna Height(s) (m)		1 - 4				Test Distance (m)		5							
COMMENTS															
EUT OPERATING MODES															
EUT charging															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
Run #	1		Signature												
Configuration #															
Results	Pass														
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
41.772	41.3	-11.6	326.0	1.0	5.0	0.0	V-Bilog	QP	0.0	29.7	30.0	-0.3			
37.180	38.3	-9.6	320.0	1.0	5.0	0.0	V-Bilog	QP	0.0	28.7	30.0	-1.3			
49.853	37.1	-14.1	46.0	1.0	5.0	0.0	V-Bilog	QP	0.0	23.0	30.0	-7.0			
76.069	36.1	-16.6	343.0	1.5	5.0	0.0	V-Bilog	QP	0.0	19.5	30.0	-10.5			
181.243	27.6	-12.5	319.0	2.9	5.0	0.0	V-Bilog	QP	0.0	15.1	30.0	-14.9			
715.786	22.2	-0.9	309.0	2.8	5.0	0.0	V-Bilog	QP	0.0	21.3	37.0	-15.7			



BLUETOOTH APPROVALS

FCC Procedure Received from Joe Dichoso on 2-15-02

The following exhibit indicates the FCC Spread Spectrum requirements in Section 15.247 for devices meeting the Bluetooth Specifications in the 2.4 GHz band as of February 2001 operating in the USA. The purpose of this exhibit is to help expedite the approval process for Bluetooth devices. This exhibit provides items that vary for each device and also provides a list of items that are common to Bluetooth devices that explains the remaining requirements. The list of common items can be submitted for each application for equipment authorization. This exhibit only specifies requirements in Section 15.247, requirements in other rule Sections for intentional radiators such as in Section 15.203 or 15.207 must be also be addressed. A Bluetooth device is a FHSS transmitter in the data mode and applies as a Hybrid spread spectrum device in the acquisition mode.

For each individual device, the following items, 1-7 will vary from one device to another and must be submitted.

- 1) The occupied bandwidth in Section 15.247(a)(1)(ii).
- 2) Conducted output power specified in Section 15.247(b)(1).
- 3) EIRP limit in Section 15.247(b)(3).
- 4) RF safety requirement in Section 15.247(b)(4)
- 5) Spurious emission limits in Section 15.247(c).
- 6) Processing gain and requirements for Hybrids in Section 15.247(f) in the acquisition mode.
- 7) Power spectral density requirement in Section 15.247(f) in the acquisition mode.

For all devices, the following items, 1-12, are common to all Bluetooth devices and will not vary from one device to another. This list can be copied into the filing.

1 Output power and channel separation of a Bluetooth device in the different operating modes:

The different operating modes (data-mode, acquisition-mode) of a Bluetooth device don't influence the output power and the channel spacing. There is only one transmitter which is driven by identical input parameters concerning these two parameters.

Only a different hopping sequence will be used. For this reason, the RF parameters in one op-mode is sufficient.

2 Frequency range of a Bluetooth device:

The maximum frequency of the device is: **2402 – 2480 MHz**.

This is according the Bluetooth Core Specification V 1.0B (+ critical errata) for devices which will be operated in the USA. Other frequency ranges (e.g. for Spain, France, Japan) which are allowed according the Core Specification must **not be** supported by the device.

3 Co-ordination of the hopping sequence in data mode to avoid simultaneous occupancy by multiple transmitters:

Bluetooth units which want to communicate with other units must be organized in a structure called piconet. This piconet consist of max. 8 Bluetooth units. One unit is the master the other seven are the slaves. The master co-ordinates frequency occupation in this piconet for all units. As the master hop sequence is derived from it's BD address which is unique for every Bluetooth device, additional masters intending to establish new piconets will always use different hop sequences.

4 Example of a hopping sequence in data mode:

Example of a 79 hopping sequence in data mode:

40, 21, 44, 23, 42, 53, 46, 55, 48, 33, 52, 35, 50, 65, 54, 67,
56, 37, 60, 39, 58, 69, 62, 71, 64, 25, 68, 27, 66, 57, 70, 59,
72, 29, 76, 31, 74, 61, 78, 63, 01, 41, 05, 43, 03, 73, 07, 75,
09, 45, 13, 47, 11, 77, 15, 00, 64, 49, 66, 53, 68, 02, 70, 06,
01, 51, 03, 55, 05, 04

5 Equally average use of frequencies in data mode and short transmissions:

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection
2. Internal master clock

The LAP (lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24 MSB's of the 48 BD_ADDRESS. The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronization with other units, only the offsets are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5 μ s. The clock has a cycle of about one day (23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire LAP (24 bits), 4 LSB's (4 bits) (Input 1) and the 27 MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions, the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence is generated. For transmitting the wanted data, the complete hopping sequence is not used and the connection ends. The second connection will be established. A new hopping sequence is generated. Due to the fact that the Bluetooth clock has a different value, because the period between the two transmission is longer (and it cannot be shorter) than the minimum resolution of the clock (312.5 μ s). The hopping sequence will always differ from the first one.

6 Receiver input bandwidth, synchronization and repeated single or multiple packets:

The input bandwidth of the receiver is 1 MHz.

In every connection, one Bluetooth device is the master and the other one is the slave. The master determines the hopping sequence (see chapter 5). The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection (e.g. single or multi-slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing is according to the packet type of the connection. Also, the slave of the connection uses these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence

7 Dwell time in data mode

The dwell time of 0.3797s within a 30 second period in data mode is independent from the packet type (packet length). The calculation for a 30 second period is as follows:

Dwell time = time slot length * hop rate / number of hopping channels * 30s

Example for a DH1 packet (with a maximum length of one time slot)

Dwell time = 625 μ s * 1600 1/s / 79 * 30s = 0.3797s (in a 30s period)

For multi-slot packet the hopping is reduced according to the length of the packet.

Example for a DH5 packet (with a maximum length of five time slots)

Dwell time = $5 * 625 \mu s * 1600 * 1/5 * 1/s / 79 * 30s = 0.3797s$ (in a 30s period)

This is according the Bluetooth Core Specification V 1.0B (+ critical errata) for all Bluetooth devices. Therefore, all Bluetooth devices **comply** with the FCC dwell time requirement in the data mode.

This was checked during the Bluetooth Qualification tests.

The Dwell time in hybrid mode is approximately 2.6 mS (in a 12.8s period)

8 Channel Separation in hybrid mode

The nominal channel spacing of the Bluetooth system is 1Mhz independent of the operating mode.

The maximum "initial carrier frequency tolerance" which is allowed for Bluetooth is $f_{center} = 75 \text{ kHz}$.

This was checked during the Bluetooth Qualification tests (Test Case: TRM/CA/07-E) for three frequencies (2402, 2441, 2480 MHz).

9 Derivation and examples for a hopping sequence in hybrid mode

For the generation of the inquiry and page hop sequences the same procedures as described for the data mode are used (see item 5), but this time with different input vectors:

****For the inquiry hop sequence, a predefined fixed address is always used. This results in the same 32 frequencies used by all devices doing an inquiry but every time with a different start frequency and phase in this sequence.**

****For the page hop sequence, the device address of the paged unit is used as the input vector. This results in the use of a subset of 32 frequencies which is specific for that initial state of the connection establishment between the two units. A page to different devices would result in a different subset of 32 frequencies.**

So it is ensured that also in hybrid mode, the frequency is used equally on average.

Example of a hopping sequence in inquiry mode:

48, 50, 09, 13, 52, 54, 41, 45, 56, 58, 11, 15, 60, 62, 43, 47, 00, 02, 64, 68, 04, 06, 17, 21, 08, 10, 66, 70, 12, 14, 19, 23

Example of a hopping sequence in paging mode:

08, 57, 68, 70, 51, 02, 42, 40, 04, 61, 44, 46, 63, 14, 50, 48, 16, 65, 52, 54, 67, 18, 58, 56, 20, 53, 60, 62, 55, 06, 66, 64

10 Receiver input bandwidth and synchronization in hybrid mode:

The receiver input bandwidth is the same as in the data mode (1 MHz). When two Bluetooth devices establish contact for the first time, one device sends an inquiry access code and the other device is scanning for this inquiry access code. If two devices have been connected previously and want to start a new transmission, a similar procedure takes place. The only difference is, instead of the inquiry access code, a special access code, derived from the BD_ADDRESS of the paged device will be, will be sent by the master of this connection. Due to the fact that both units have been connected before (in the inquiry procedure) the paging unit has timing and frequency information about the page scan of the paged unit. For this reason the time to establish the connection is reduced.

11 Spread rate / data rate of the direct sequence signal

The Spread rate / Data rate in inquiry and paging mode can be defined via the access code. The access code is the only criterion for the system to check if there is a valid transmission or not. If you regard the presence of a valid access code as one bit of information, and compare it with the length of the access code of 68 bits, the Spread rate / Data rate will be 68/1.

12 Spurious emission in hybrid mode

The Dwell in hybrid mode is shorter than in data mode. For this reason the spurious emissions average level in data mode is worst case. The spurious emissions peak level is the same for both modes.