

Test Report Prepared By:

Electronics Test Centre  
27 East Lake Hill  
Airdrie, Alberta  
Canada  
T4A 2K3

airdrie@etc-mpbtech.com  
<http://www.etc-mpb.com/>  
Telephone: (403) 912-0037  
Facsimile: (403) 912-0083

MPBT Report No.: e12e3202-1 Release 1

Date: 8 November 2004

**Emissions Testing of ETHx in accordance with FCC Part 15.249,  
Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz,  
and 24.0-24.25 GHz.**

Test Personnel: Trung Nguyen, Jianming Zhang, David Raynes


Prepared for: Eleven Engineering Inc.

10150 – 100 Street  
Suite 900  
Edmonton, Alberta  
Canada  
T5J 0P6

Telephone: 1-780-425-6511  
Facsimile: 1-780-425-7006

---

Client Acceptance  
Authorized Signatory

  
\_\_\_\_\_  
David Raynes  
draynes@etc-mpbtech.com  
Senior EMC Technologist  
Electronics Test Centre (Airdrie)  
Authorized Signatory

## TABLE OF CONTENTS

1.0	INTRODUCTION
1.1	SCOPE
1.2	APPLICANT
1.3	APPLICABILITY
1.4	TEST SAMPLE DESCRIPTION
1.5	GENERAL TEST CONDITIONS AND ASSUMPTIONS
1.6	SCOPE OF TESTING
1.6.1	VARIATIONS IN TEST METHODS
1.6.2	EMISSIONS MEASUREMENTS
1.6.3	TEST SAMPLE MODIFICATIONS
2.0	ABBREVIATIONS
3.0	MEASUREMENT UNCERTAINTY
4.0	TEST CONCLUSION
4.1	CONDUCTED EMISSIONS AT AC LINES
4.2	RADIATED EMISSIONS INCLUDING RESTRICTED BANDS OF OPERATION
4.2A	RECEIVE MODE
4.2B	TRANSMIT MODE
5.0	TEST FACILITY
5.1	LOCATION
5.2	GROUNDING PLAN
5.3	POWER
5.4	EMISSIONS PROFILE
5.5	TEST CONFIGURATION
5.5.1	TABLETOP EQUIPMENT
5.5.2	RACK MOUNT
6.0	TEST EQUIPMENT
6.1	RADIATED EMISSIONS
6.2	CONDUCTED EMISSIONS
6.3	CALIBRATION

## APPENDIX A: Test Sample Description: ETHx

## **1.0 INTRODUCTION**

### **1.1 SCOPE**

The purpose of this report is to present the findings and results of compliance testing performed in accordance with CFR Title 47 FCC Part 15.249.

### **1.2 APPLICANT**

This test report has been prepared for Eleven Engineering Inc., located in Edmonton, Alberta, Canada.

### **1.3 APPLICABILITY**

All test procedures, limits, and results defined in this document apply to the Eleven Engineering Inc. ETHx unit, referred to herein as the Equipment Under Test (EUT).

The results contained in this report relate only to the item tested.

This report does not imply product endorsement by NVLAP or the Canadian or US governments.

### **1.4 TEST SAMPLE DESCRIPTION**

The test sample provided for testing was an ETHx wireless Ethernet bridge:

Product Type:	Commercial
Model Number:	Prototype
Serial Number:	Prototype
Cables:	- power cable - Ethernet cable - RS 232 cable
Power Requirements:	- 120 VAC - 0.3 amps - 60 Hz
Peripheral Equipment:	- computer laptop

More detailed information is provided by Eleven Engineering Inc. in Appendix A.

### **1.5 GENERAL TEST CONDITIONS AND ASSUMPTIONS**

The EUT was set up and exercised using the configurations, modes of operation and arrangements defined in this report only. All inputs and outputs to and from other equipment associated with the EUT were adequately simulated.

Where relevant, the EUT was only tested using the monitoring methods and test criteria defined in this report.

Environmental conditions are recorded for each test.

## 1.6 SCOPE OF TESTING

Testing was performed in accordance with FCC Part 15.249 Subpart C (2000), and ANSI C63.4 (2000).

### 1.6.1 VARIATIONS IN TEST METHODS

There were no variations from the test procedures outlined above.

### 1.6.2 MARGINAL EMISSIONS MEASUREMENTS

As noted in Section 4, some emissions were measured to be within -6 dB of the specified limit:

### 1.6.3 TEST SAMPLE CONFIGURATION & MODIFICATIONS

No EUT modifications were performed in order to meet the specifications.

## 2.0 ABBREVIATIONS

AP	-Average Peak
CE	-Conducted Emissions
E	-Field - Electric Field
H	-Field - Magnetic Field
N/T	-Not Tested
N/A	-Not Applicable
PK	-Peak
QP	-Quasi Peak
RE	-Radiated Emissions

## 3.0 MEASUREMENT UNCERTAINTY

For Radiated E-Field Emissions and Conducted Emissions, the uncertainties in the measurements were calculated using the methods outlined in the NAMAS document, NIS81: May 1984.

Frequency	= ± 1 kHz
Amplitude (RE)	= ± 4.01 dB
Amplitude (CE)	= ± 3.25 dB

## **4.0 TEST CONCLUSION**

### **STATEMENT OF COMPLIANCE**

The client equipment referred to in this report was found to comply with the requirements as stated below.

The EUT was subjected to the following tests. Compliance status is reported as **PASS** or **FAIL**. Test conditions that are not applicable to the EUT are marked **n/a**. If testing was not performed at this time, the appropriate field is marked **n/t**.

The following table summarizes the test results in terms of the specification and class or level applied, the unique test sample identification, the EUT modification state, and configuration as applicable.


<b>TEST CASE</b>	<b>TEST TYPE</b>	<b>SPECIFICATION</b>	<b>TEST SAMPLE</b>	<b>MOD. STATE</b>	<b>CONFIGURATION</b>	<b>RESULT</b>
§4.1	Conducted Emissions at AC lines	FCC Part 15.107 and 15.207	ETHx	nil	See § 1.6.3	<b>PASS</b>
§4.2a	Radiated Emissions (Rx Mode)	FCC Part 15.109	ETHx	nil	See § 1.6.3	<b>PASS</b>
§4.2b	Radiated Emissions (Tx Mode)	FCC Parts 15.205, 15.209 and 15.249	ETHx	nil	See § 1.6.3	<b>PASS</b>

#### 4.1 CONDUCTED EMISSIONS ON AC POWER LINES


##### 4.1a Receive Mode

Test Lab: Electronics Test Centre (Airdrie) Test Personnel: David Raynes Test Date: 26 October 2004	Product: ETHx												
<b>Test Result, ETHx: PASS</b>													
<b>Objectives/Criteria</b>  The Conducted emissions produced by a system or sub-system shall not exceed the limits for the specifications as stated.  <b>Emission levels should meet the requirements with a margin of 6dB.</b>  Temperature = 21 °C Humidity = 37 %	<b>Specification:</b>  Frequency <table border="1"> <thead> <tr> <th>(MHz)</th> <th>QP</th> <th>Avg</th> </tr> </thead> <tbody> <tr> <td>0.150 - 0.50</td> <td>66 – 56</td> <td>56 - 46</td> </tr> <tr> <td>0.50 – 5.0</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 – 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> Units of measurement are dBµV.	(MHz)	QP	Avg	0.150 - 0.50	66 – 56	56 - 46	0.50 – 5.0	56	46	5 – 30	60	50
(MHz)	QP	Avg											
0.150 - 0.50	66 – 56	56 - 46											
0.50 – 5.0	56	46											
5 – 30	60	50											
There were no emissions measured within -6 dB of the specified limit. Refer to the test data and plots for more detail.													

Plot of Conducted Emissions on AC Power Lines: Line 1

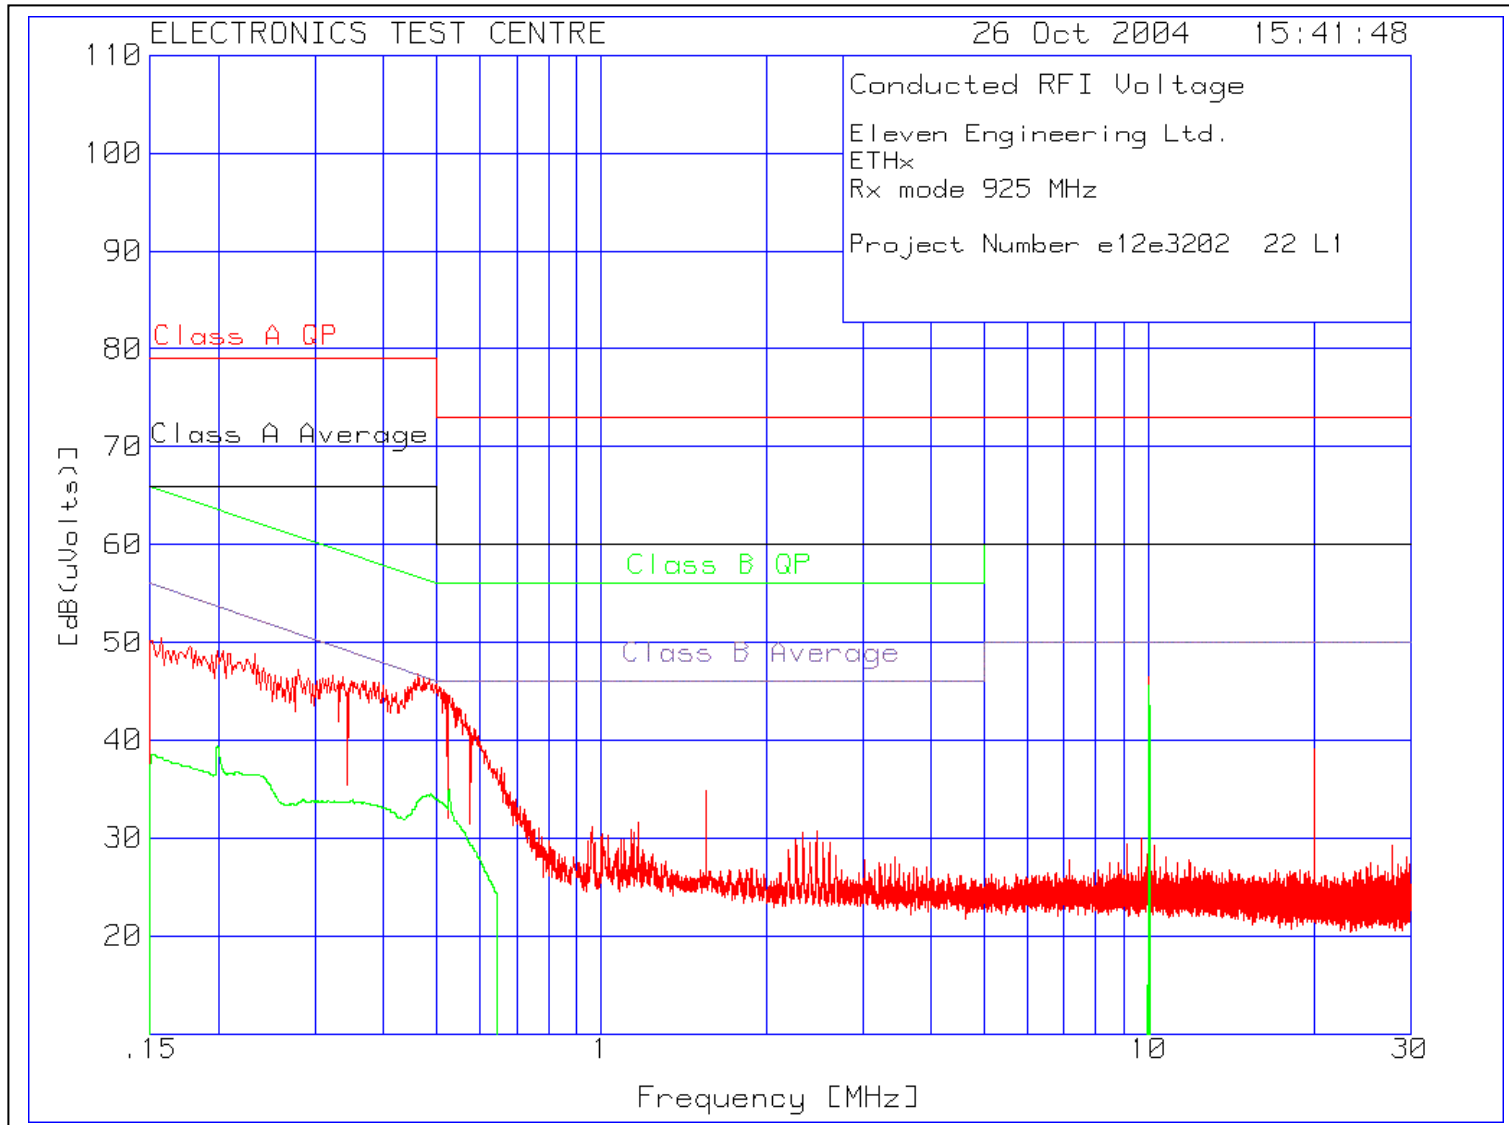


Plot of Conducted Emissions on AC Power Lines: Line 1

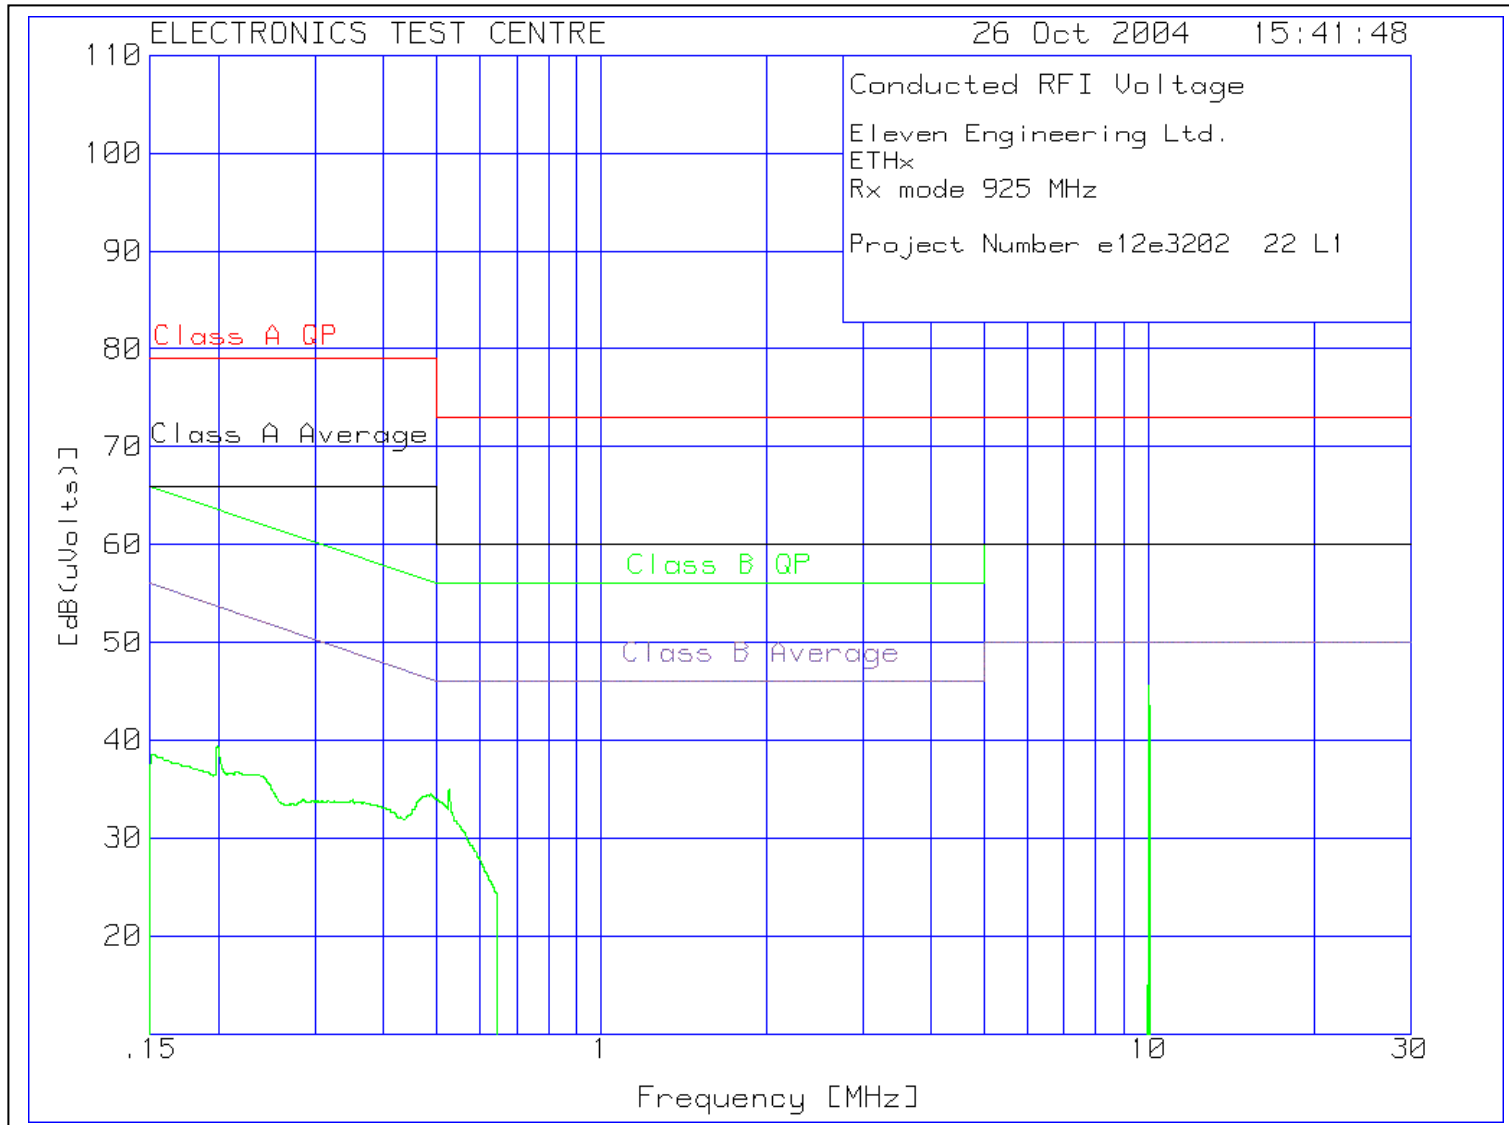





Plot of Conducted Emissions on AC Power Lines: Line 2

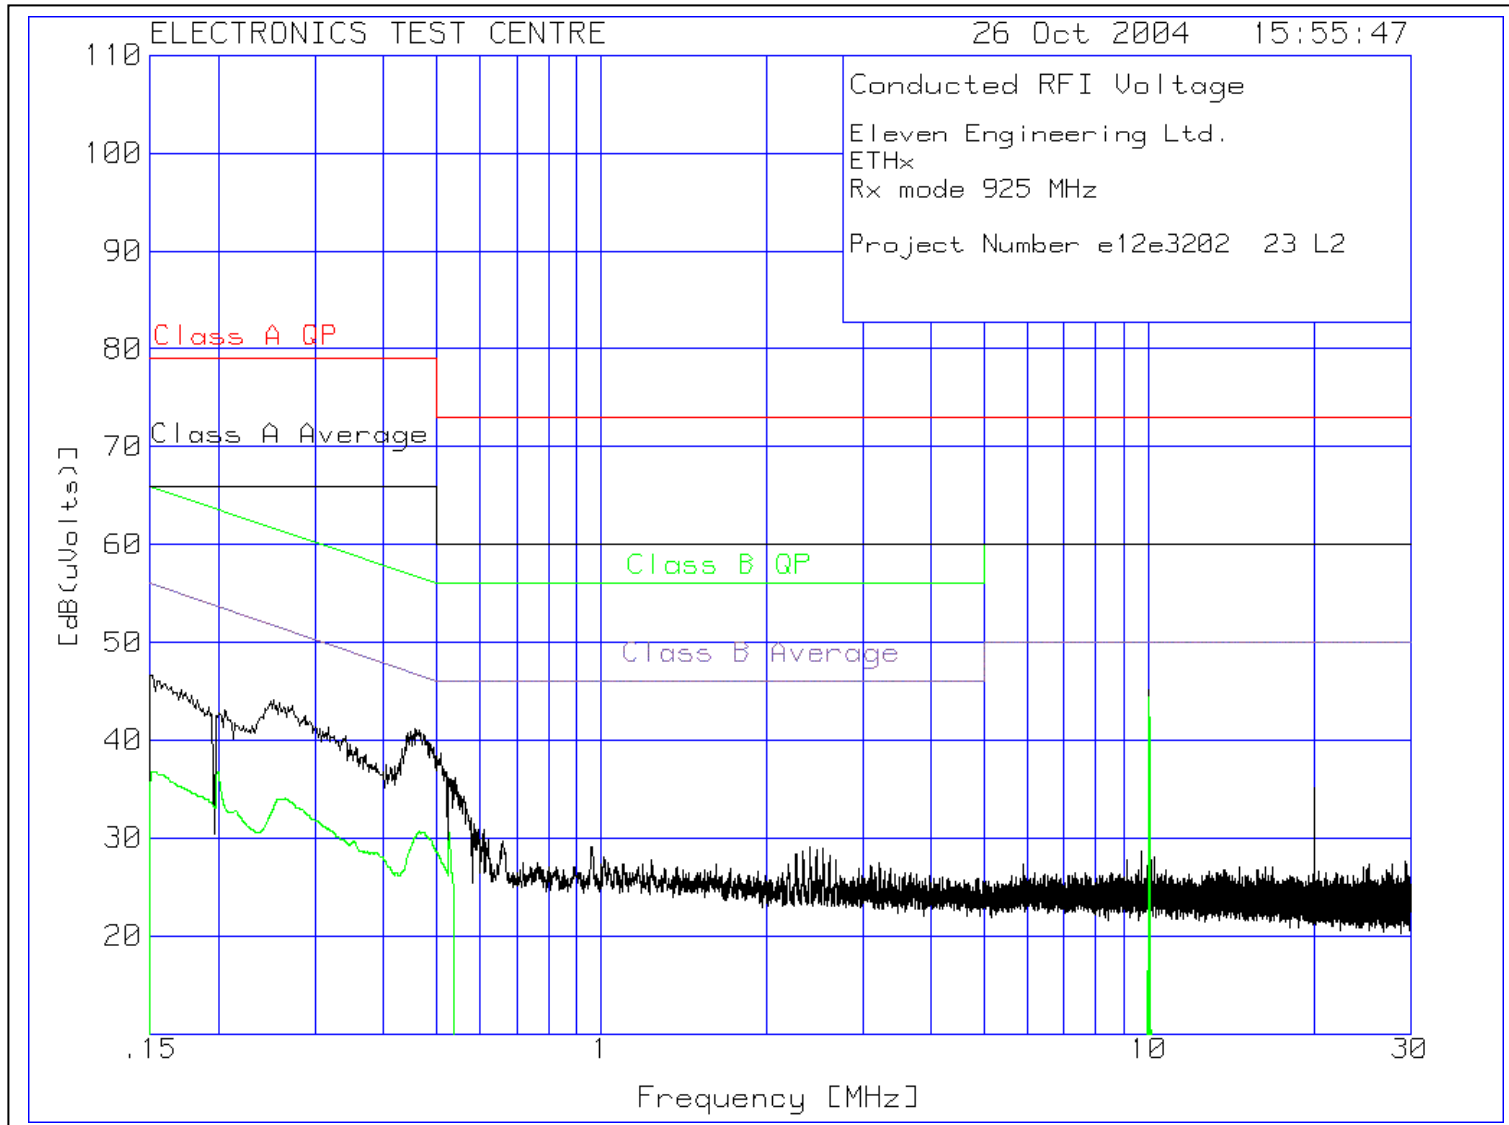


Plot of Conducted Emissions on AC Power Lines: Line 2

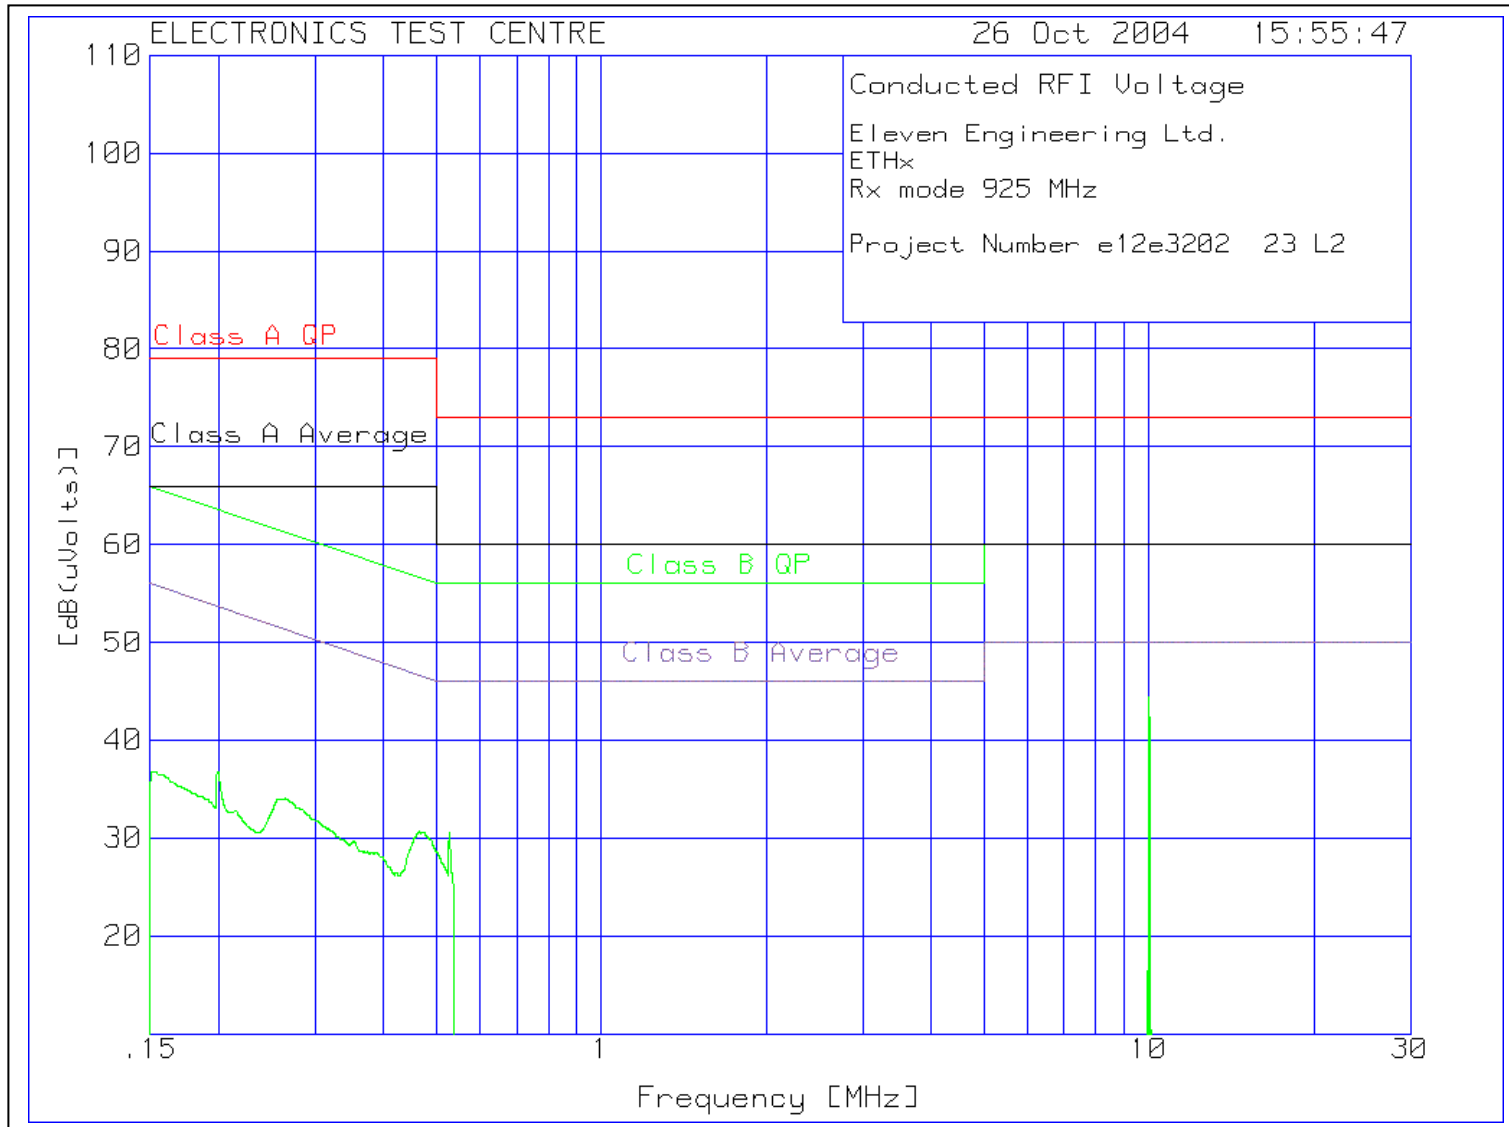

Plot of Conducted Emissions Test Chamber Ambient on AC Power Lines: Line 1

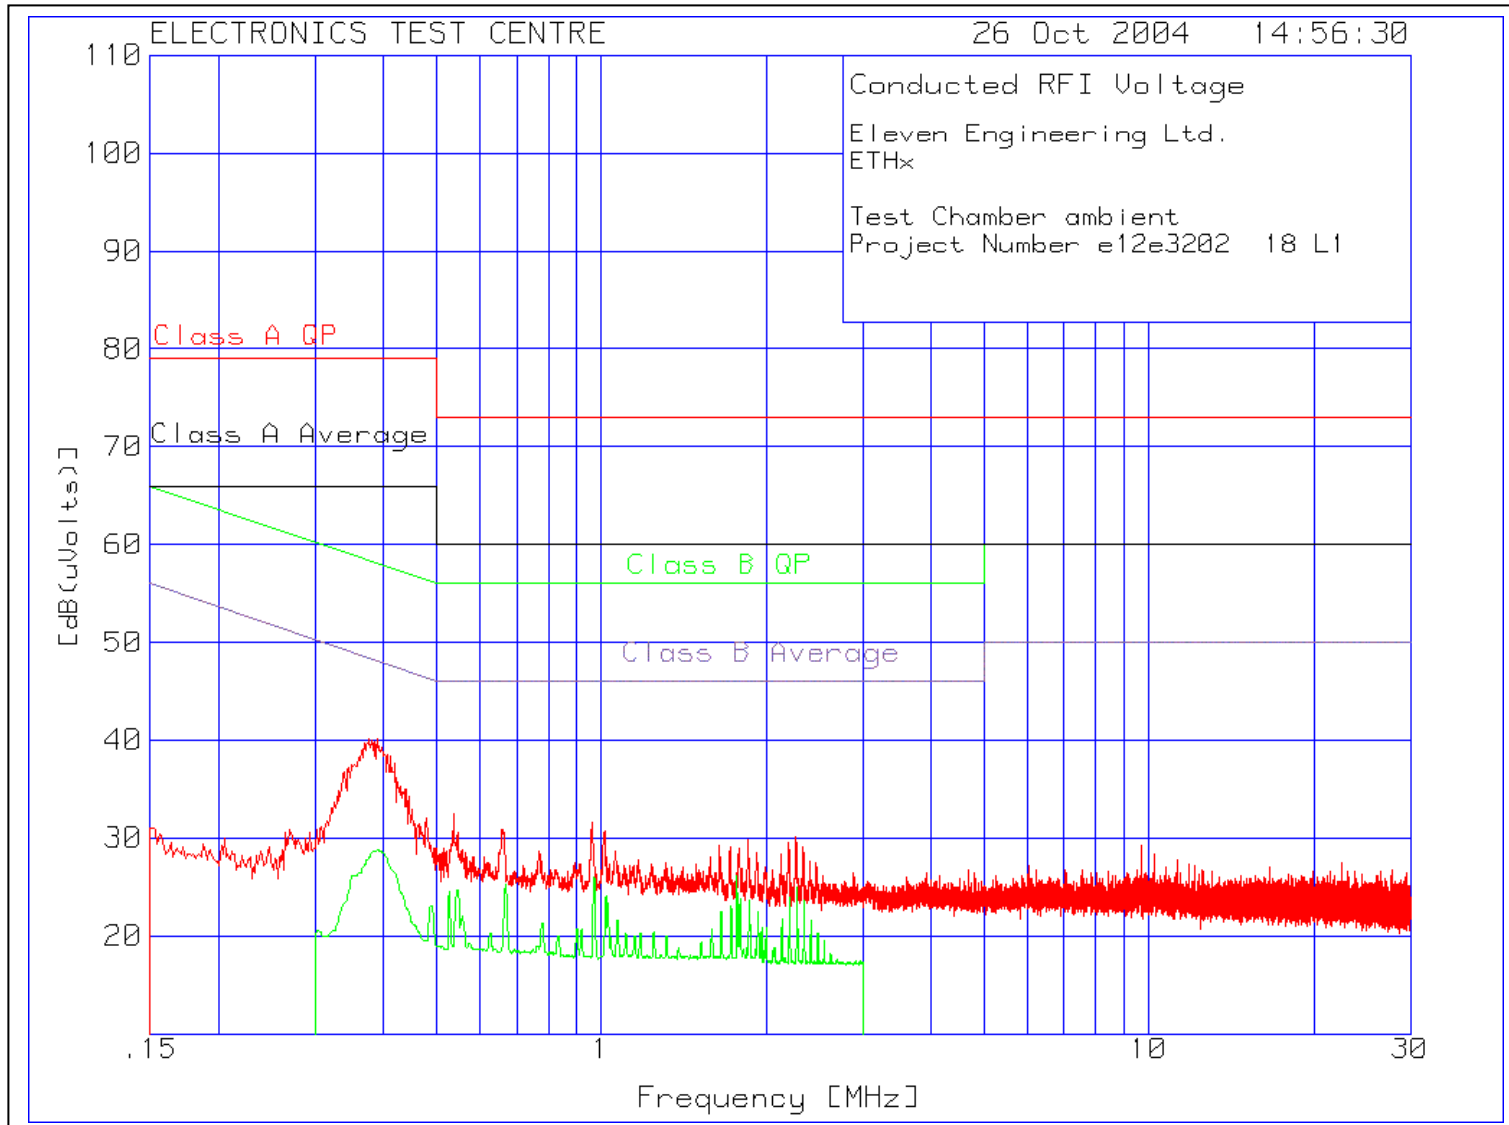

Plot of Conducted Emissions Test Chamber Ambient on AC Power Lines: Line 2

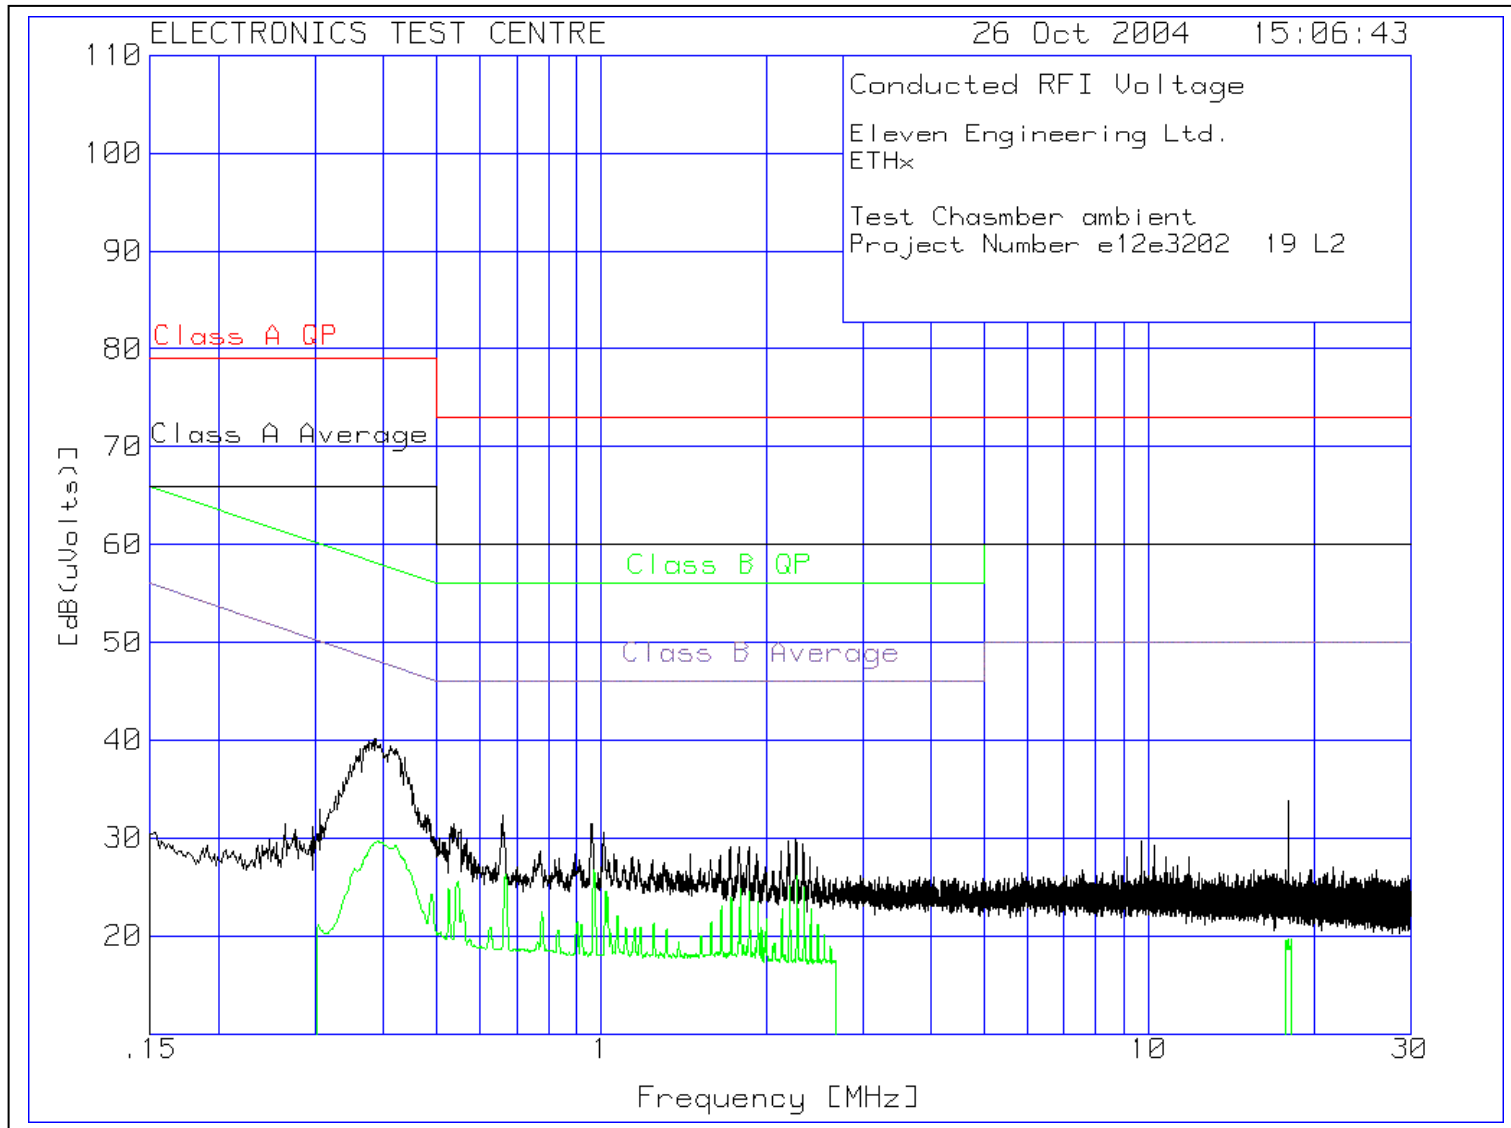

**4.1b Transmit Mode**

**f<sub>c</sub> = 905 MHz**

Test Lab: Electronics Test Centre (Airdrie) Test Personnel: David Raynes Test Date: 26 October 2004	Product: ETHx												
<b>Test Result, ETHx: PASS</b>													
<b>Objectives/Criteria</b>  The Conducted emissions produced by a system or sub-system shall not exceed the limits for the specifications as stated.  <b>Emission levels should meet the requirements with a margin of 6dB.</b>  Temperature = 21 °C    Humidity = 37 %	<b>Specification:</b>  Frequency <table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">(MHz)</th> <th style="text-align: center;">QP</th> <th style="text-align: center;">Avg</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">0.150 - 0.50</td> <td style="text-align: center;">66 – 56</td> <td style="text-align: center;">56 - 46</td> </tr> <tr> <td style="text-align: center;">0.50 – 5.0</td> <td style="text-align: center;">56</td> <td style="text-align: center;">46</td> </tr> <tr> <td style="text-align: center;">5 – 30</td> <td style="text-align: center;">60</td> <td style="text-align: center;">50</td> </tr> </tbody> </table> Units of measurement are dBμV.	(MHz)	QP	Avg	0.150 - 0.50	66 – 56	56 - 46	0.50 – 5.0	56	46	5 – 30	60	50
(MHz)	QP	Avg											
0.150 - 0.50	66 – 56	56 - 46											
0.50 – 5.0	56	46											
5 – 30	60	50											
There were no emissions measured within -6 dB of the specified limit. Refer to the test data and plots for more detail.													

Conducted Emissions Data:

The emissions data is presented in tabular form, showing the uncorrected spectrum analyzer reading, the type of detector, the correction factors applied, the net result, the value(s) of up to 4 limits at the frequency measured, and the margin between the result and the limit(s).

For example:

Test Frequency [MHz]	Meter Reading [dB(uV)]	Gain/Loss Factor [dB]	Transducer Factor [dB]	Level [dB (uVolts)]	Limit:1	2	3	4
.3052	35.6 pk	10	1.1	46.7	66	79	50.1	60.1
			Margin [dB]		-19.3	-32.3	-3.4	-13.4



L1

The applicable Limit

This reading was taken on Line 1

Test Frequency [MHz]

.3052

Test Frequency f = 0.3052 MHz (305.2 kHz)

Meter Reading [dB (uV)]

35.6 pk

The reading with Peak detector

Gain/Loss Factor [dB]

10

Net correction for preamp gain & cable loss

Transducer Factor [dB]

1.1

Correction for LISN loss

Level [dB (uVolts)]

46.7

Corrected value for voltage measurement

Limit: 1

66

The value of Limit 1 at 0.3052 MHz

Margin [dB]

-19.3

The measured voltage is 19.3 dB below Limit 1

Limit: 2

79

The value of Limit 2 at 0.3052 MHz

Margin [dB]

-32.3

The measured voltage is 32.3 dB below Limit 2

Limit: 3

50.1

The value of Limit 3 at 0.3052 MHz

Margin [dB]

-3.4

The measured voltage is 3.4 dB below Limit 3

Limit: 4

60.4

The value of Limit 4 at 0.3052 MHz

Margin [dB]

-13.4


The measured voltage is 13.4 dB below Limit 4

**Meter Reading in dBuV + Gain/Loss Factor in dB + Transducer Factor in dB = Corrected Voltage**


Note: When a preamp is used, the resulting gain is compensated.

Highlighting indicates a margin of less than 6 dB.

Plot of Conducted Emissions on AC Power Lines: Line 1

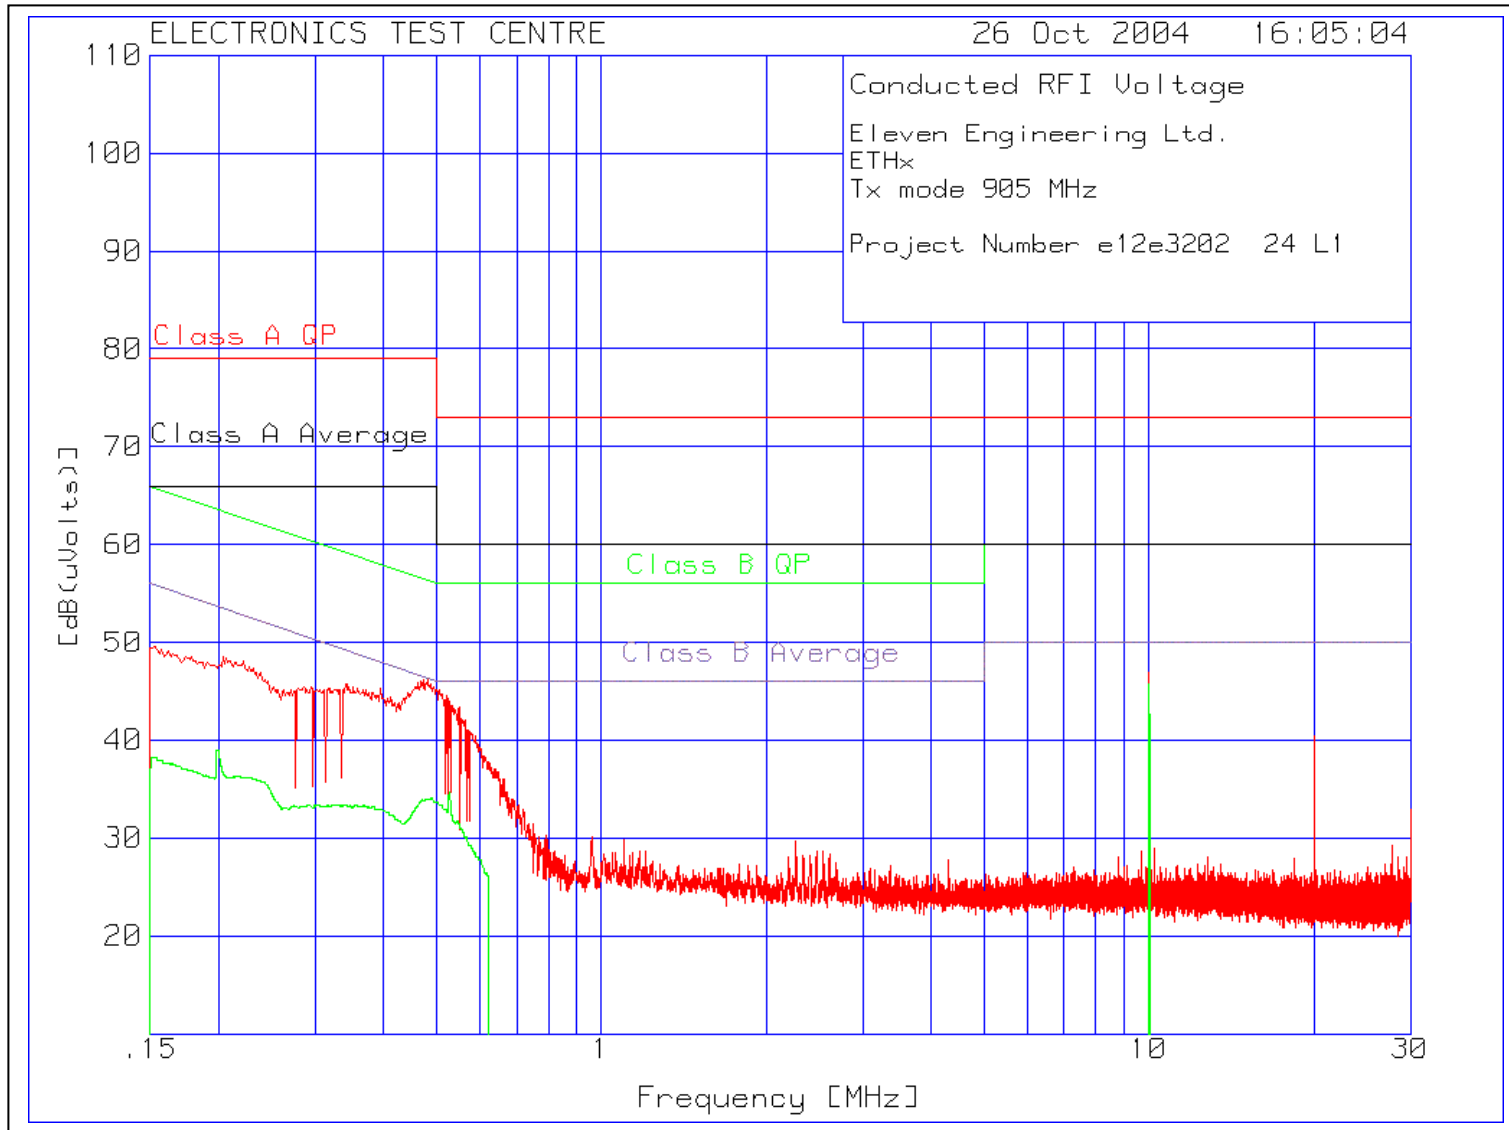


Plot of Conducted Emissions on AC Power Lines: Line 1

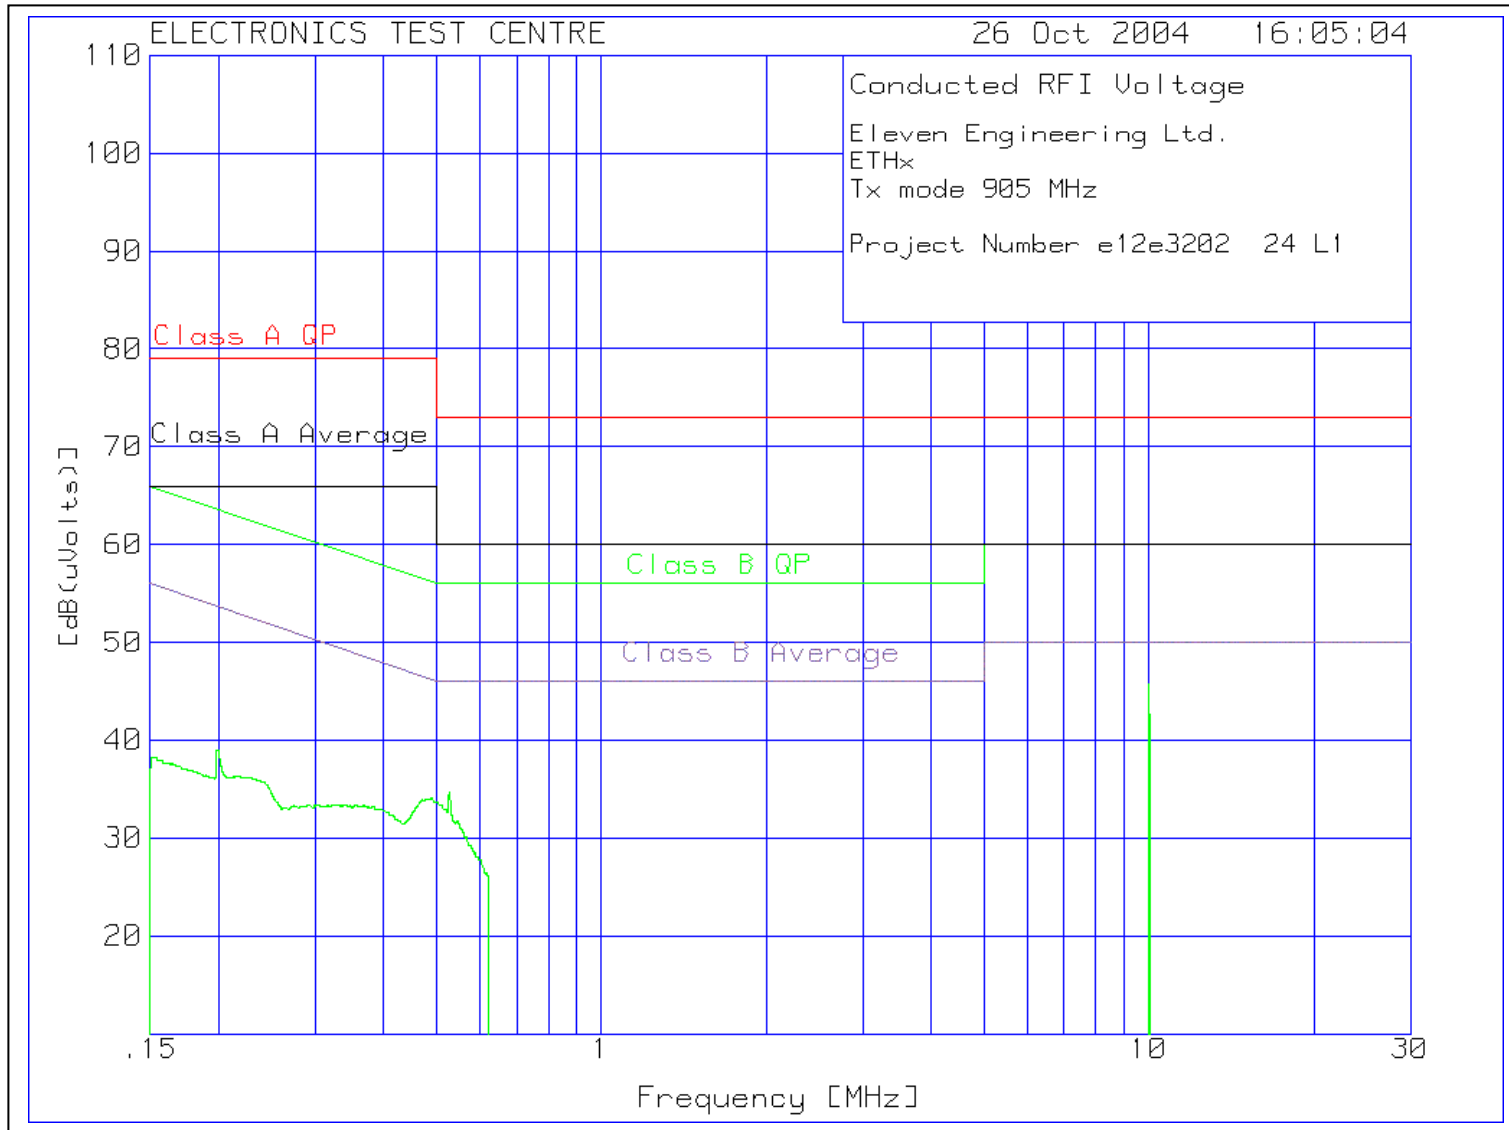





Plot of Conducted Emissions on AC Power Lines: Line 2

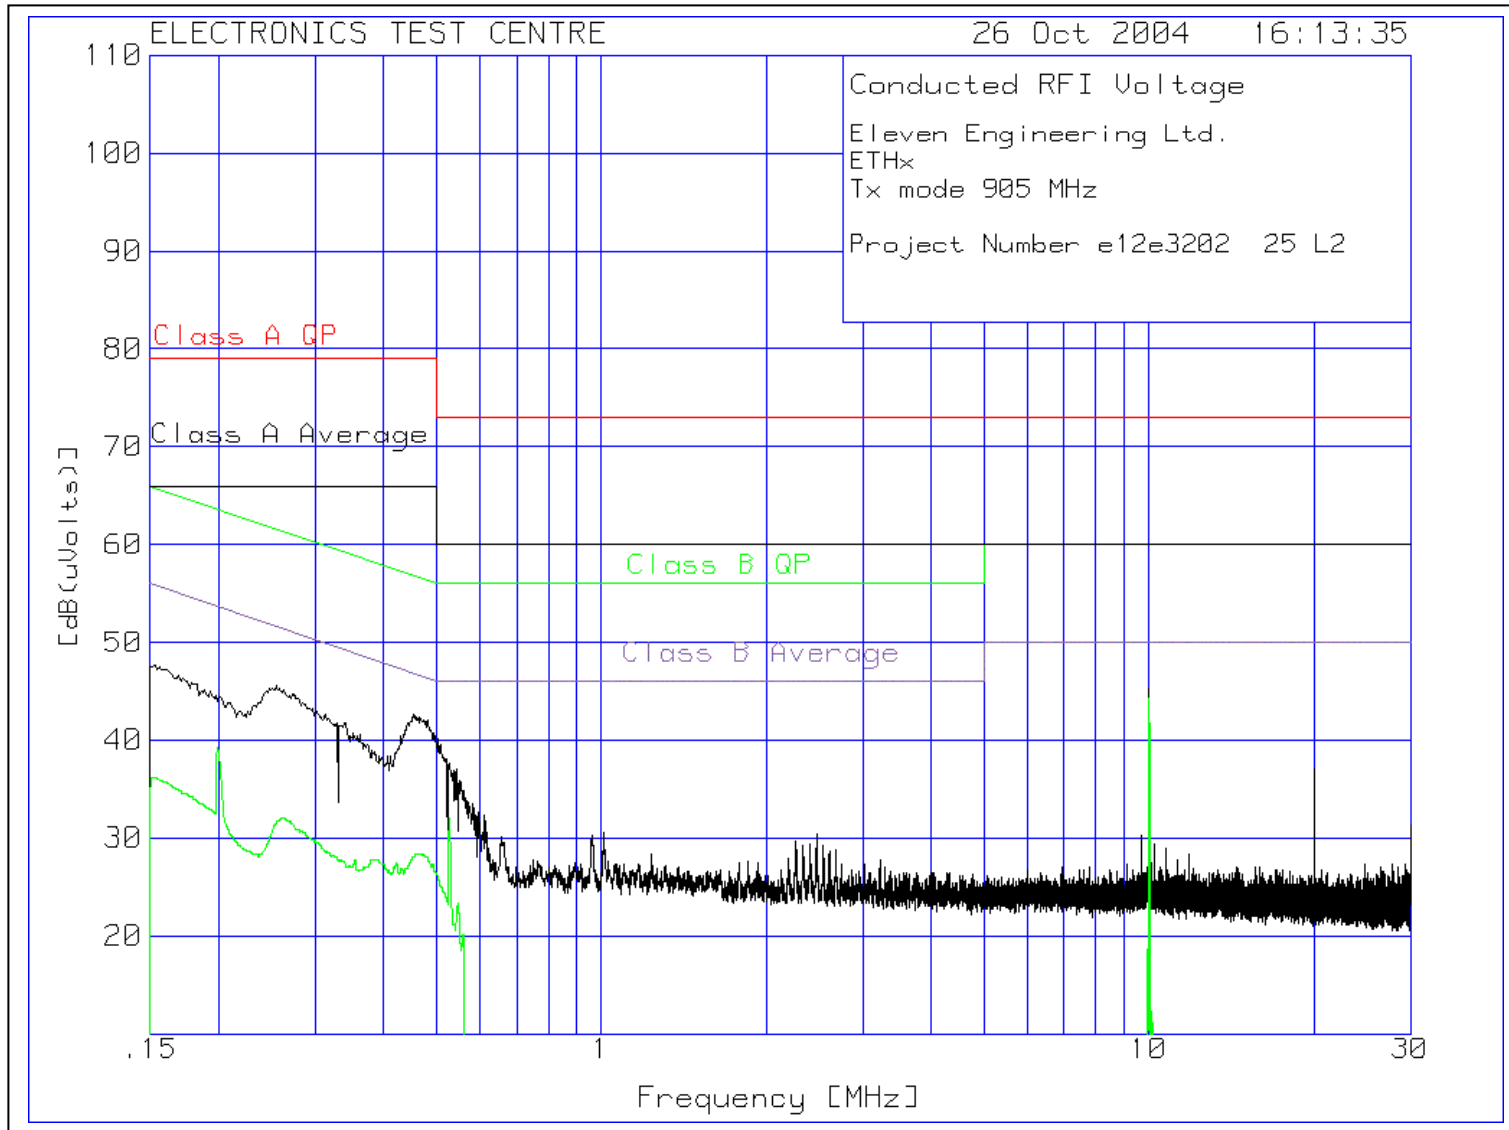


Plot of Conducted Emissions on AC Power Lines: Line 2

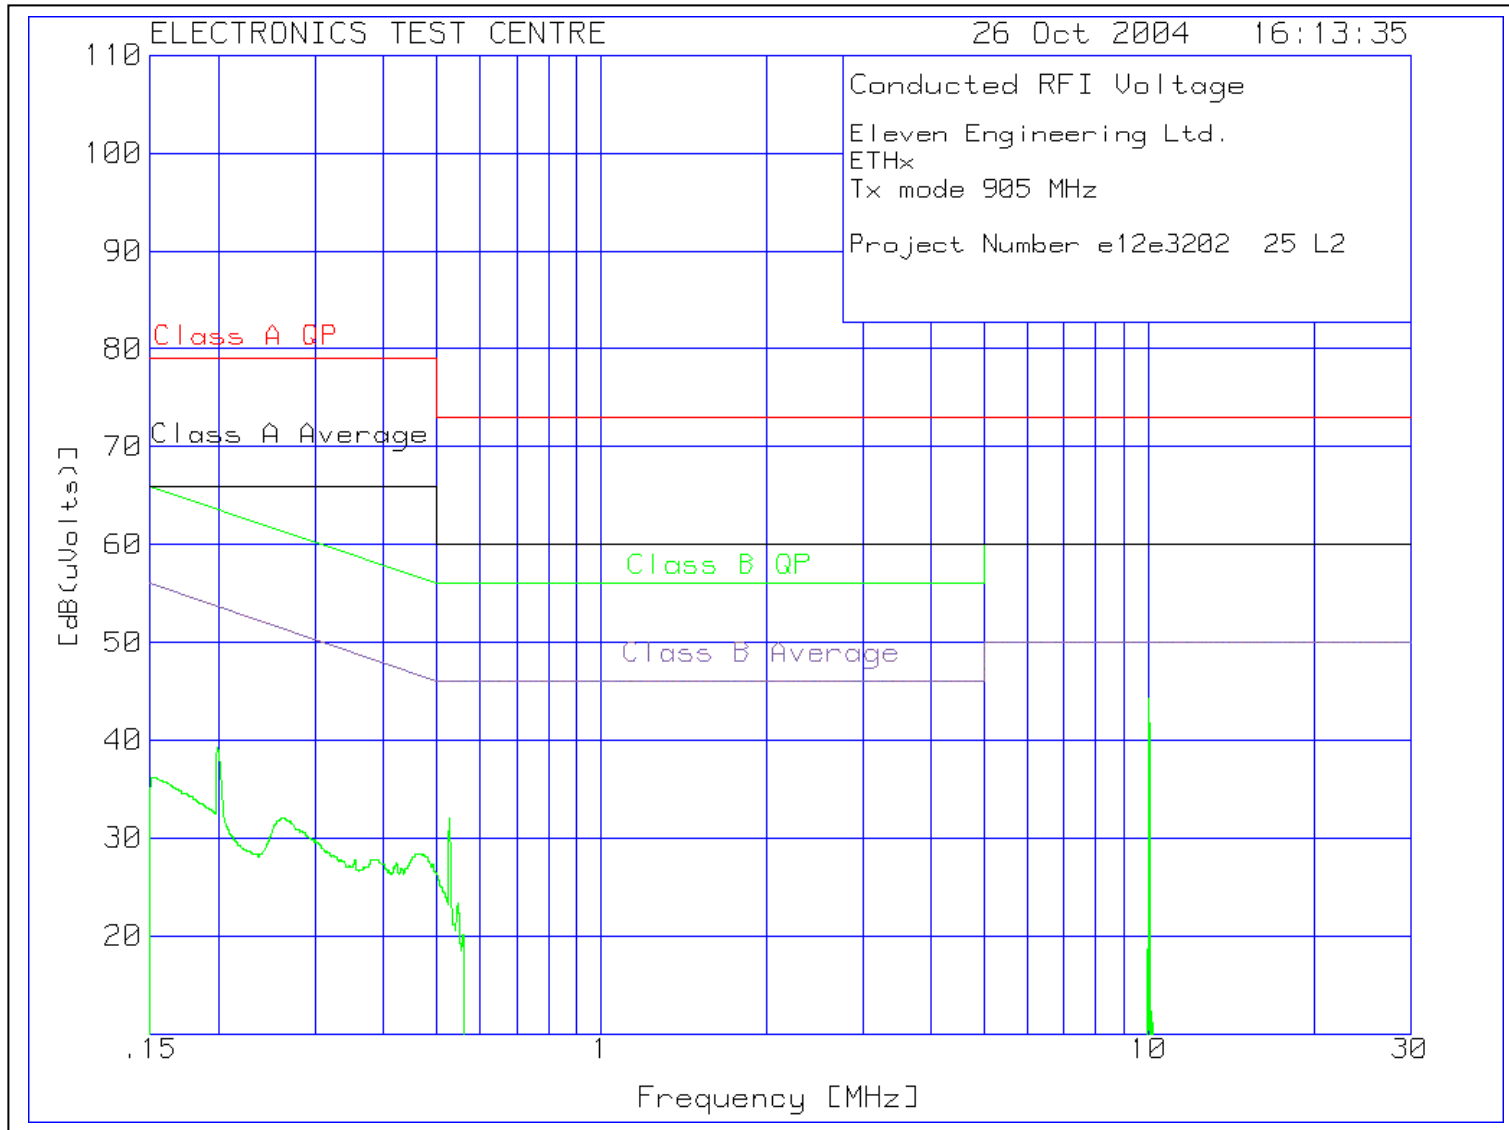

Plot of Conducted Emissions Test Chamber Ambient on AC Power Lines: Line 1

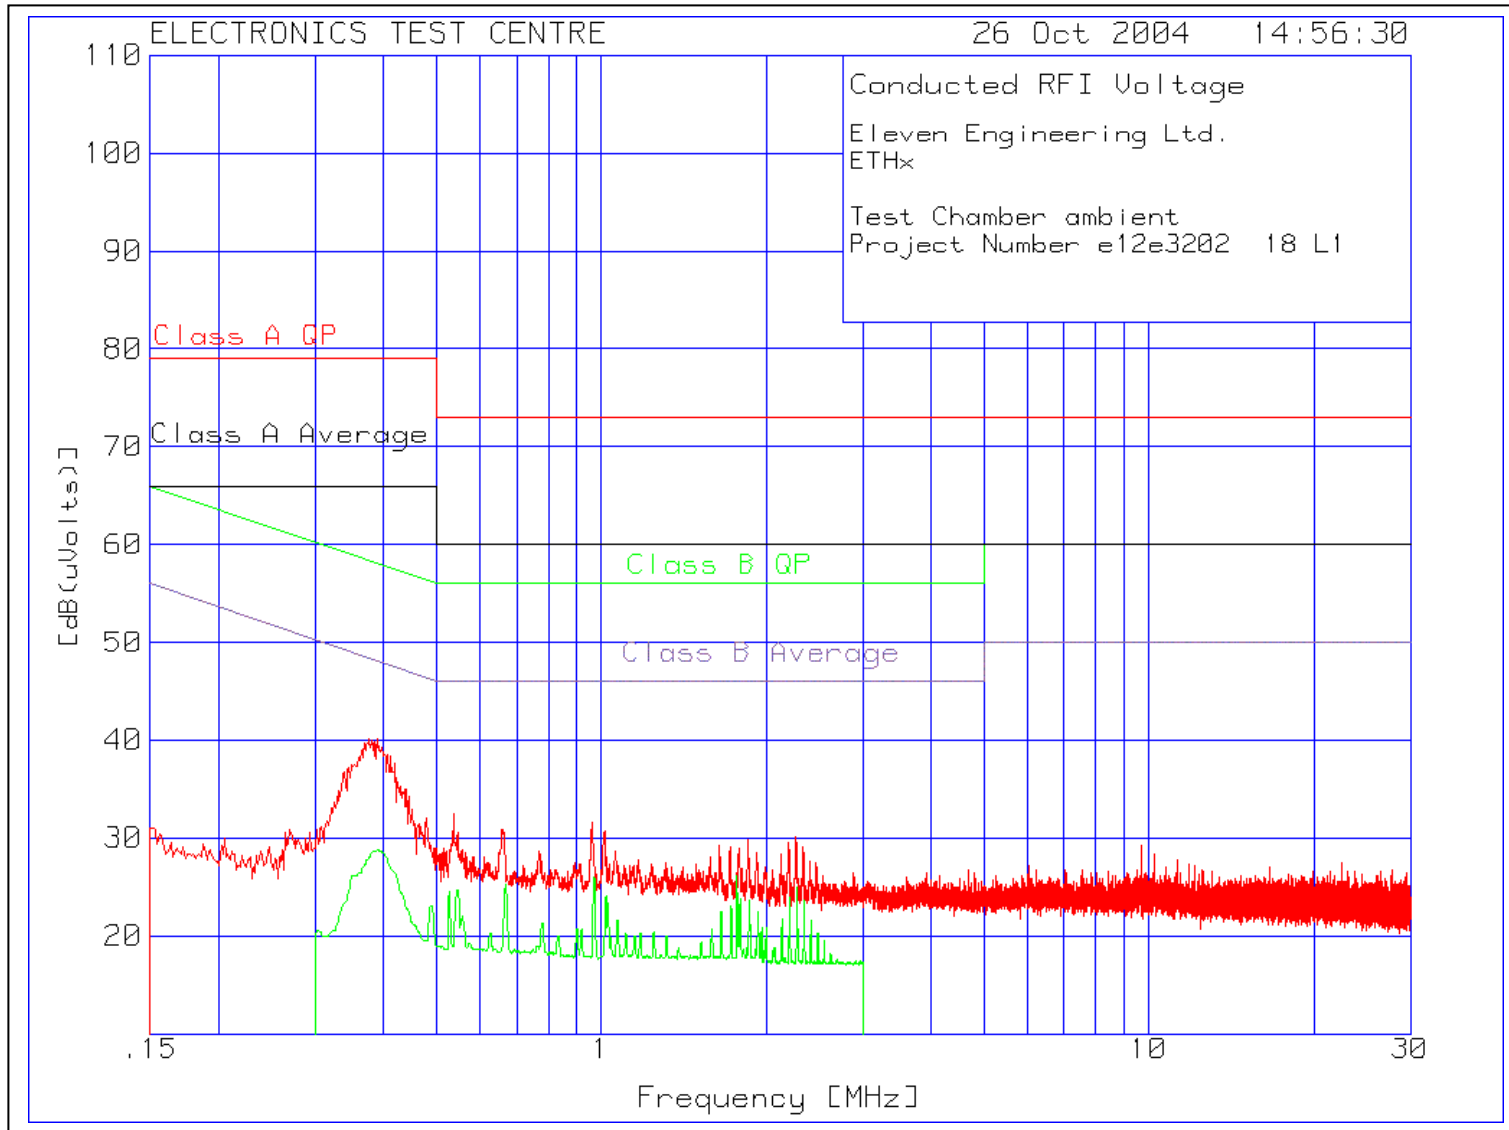

Plot of Conducted Emissions Test Chamber Ambient on AC Power Lines: Line 2

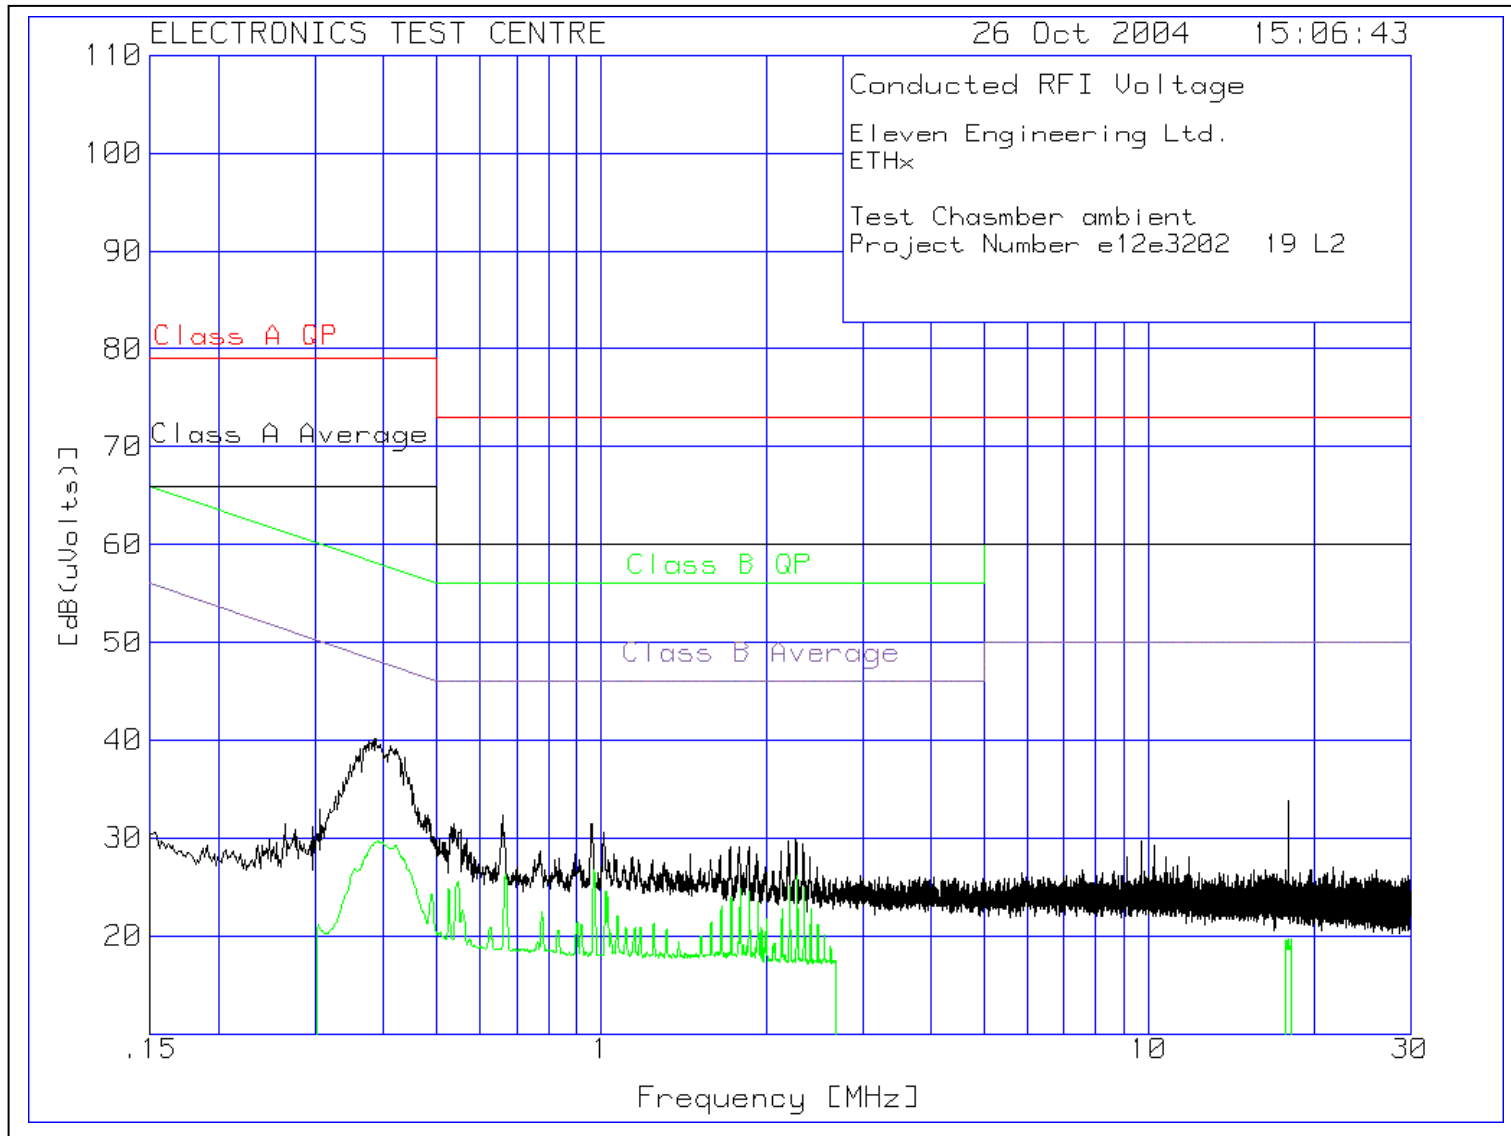


**f<sub>c</sub> = 915 MHz**


Test Lab: Electronics Test Centre (Airdrie) Test Personnel: David Raynes Test Date: 26 October 2004	Product: ETHx												
<b>Test Result, ETHx: PASS</b>													
<b>Objectives/Criteria</b>  The Conducted emissions produced by a system or sub-system shall not exceed the limits for the specifications as stated.  <b>Emission levels should meet the requirements with a margin of 6dB.</b>  Temperature = 21 °C    Humidity = 37 %	<b>Specification:</b>  Frequency <table border="1" data-bbox="894 604 1312 779"> <thead> <tr> <th>(MHz)</th> <th>QP</th> <th>Avg</th> </tr> </thead> <tbody> <tr> <td>0.150 - 0.50</td> <td>66 – 56</td> <td>56 - 46</td> </tr> <tr> <td>0.50 – 5.0</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 – 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> Units of measurement are dBµV.	(MHz)	QP	Avg	0.150 - 0.50	66 – 56	56 - 46	0.50 – 5.0	56	46	5 – 30	60	50
(MHz)	QP	Avg											
0.150 - 0.50	66 – 56	56 - 46											
0.50 – 5.0	56	46											
5 – 30	60	50											
There were no emissions measured within -6 dB of the specified limit. Refer to the test data and plots for more detail.													

This page intentionally left blank

Plot of Conducted Emissions on AC Power Lines: Line 1

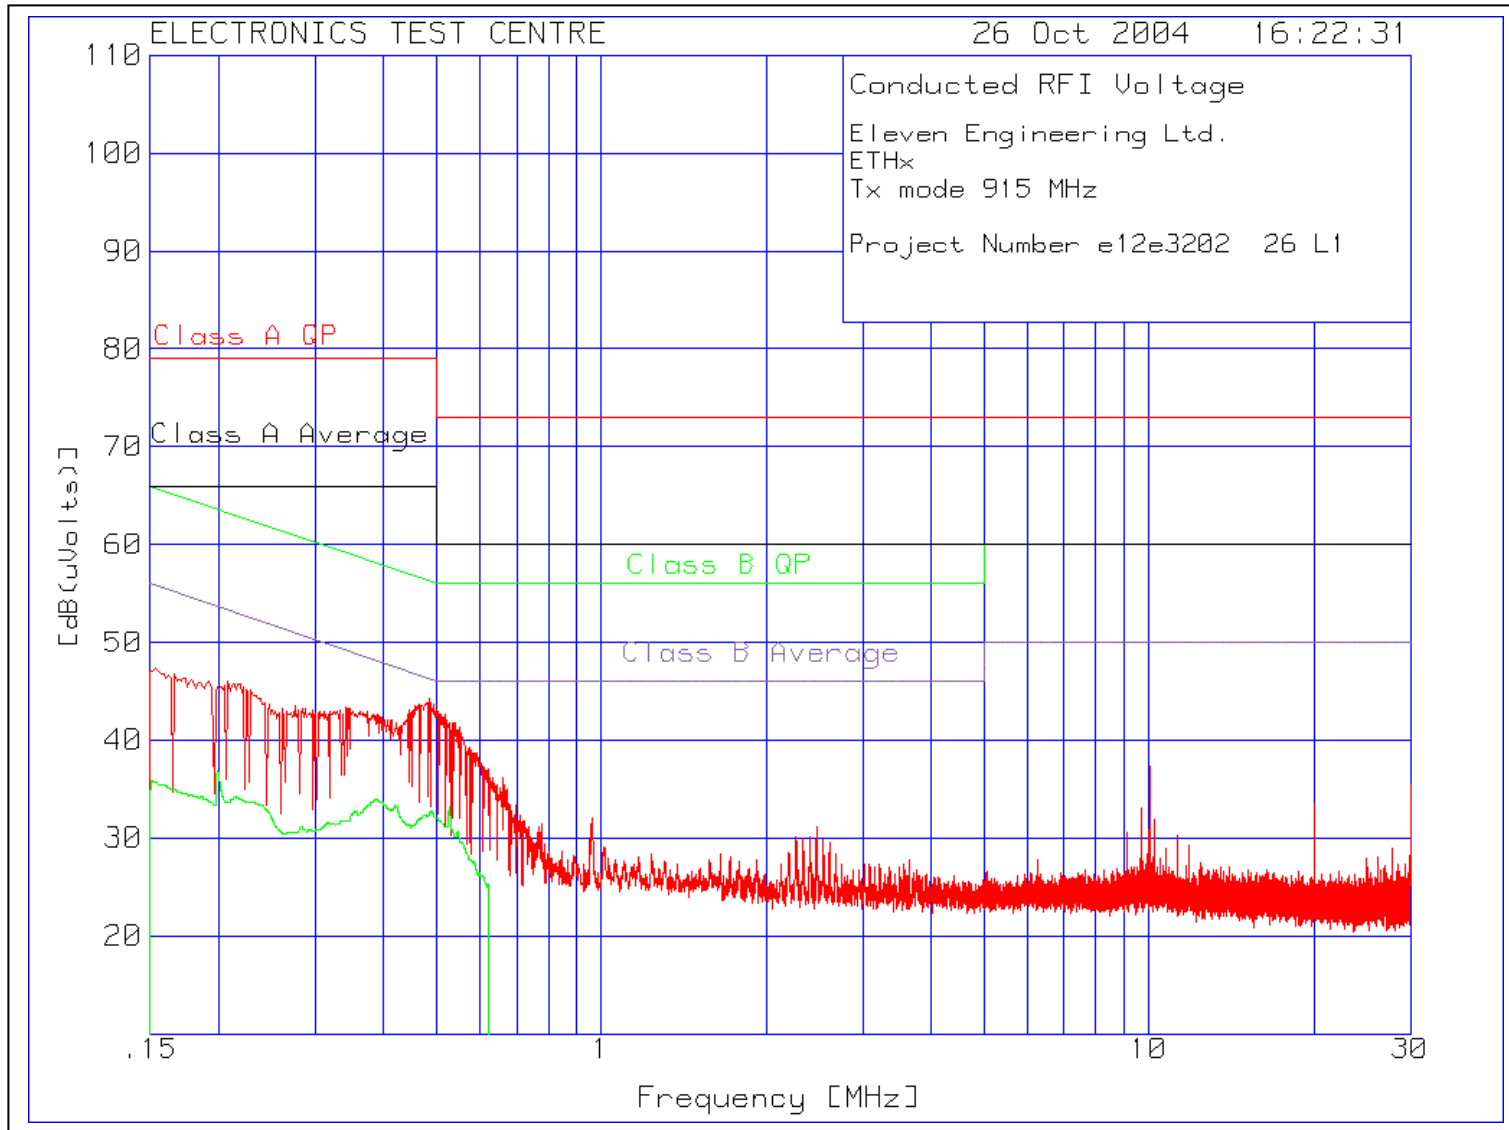


Plot of Conducted Emissions on AC Power Lines: Line 1

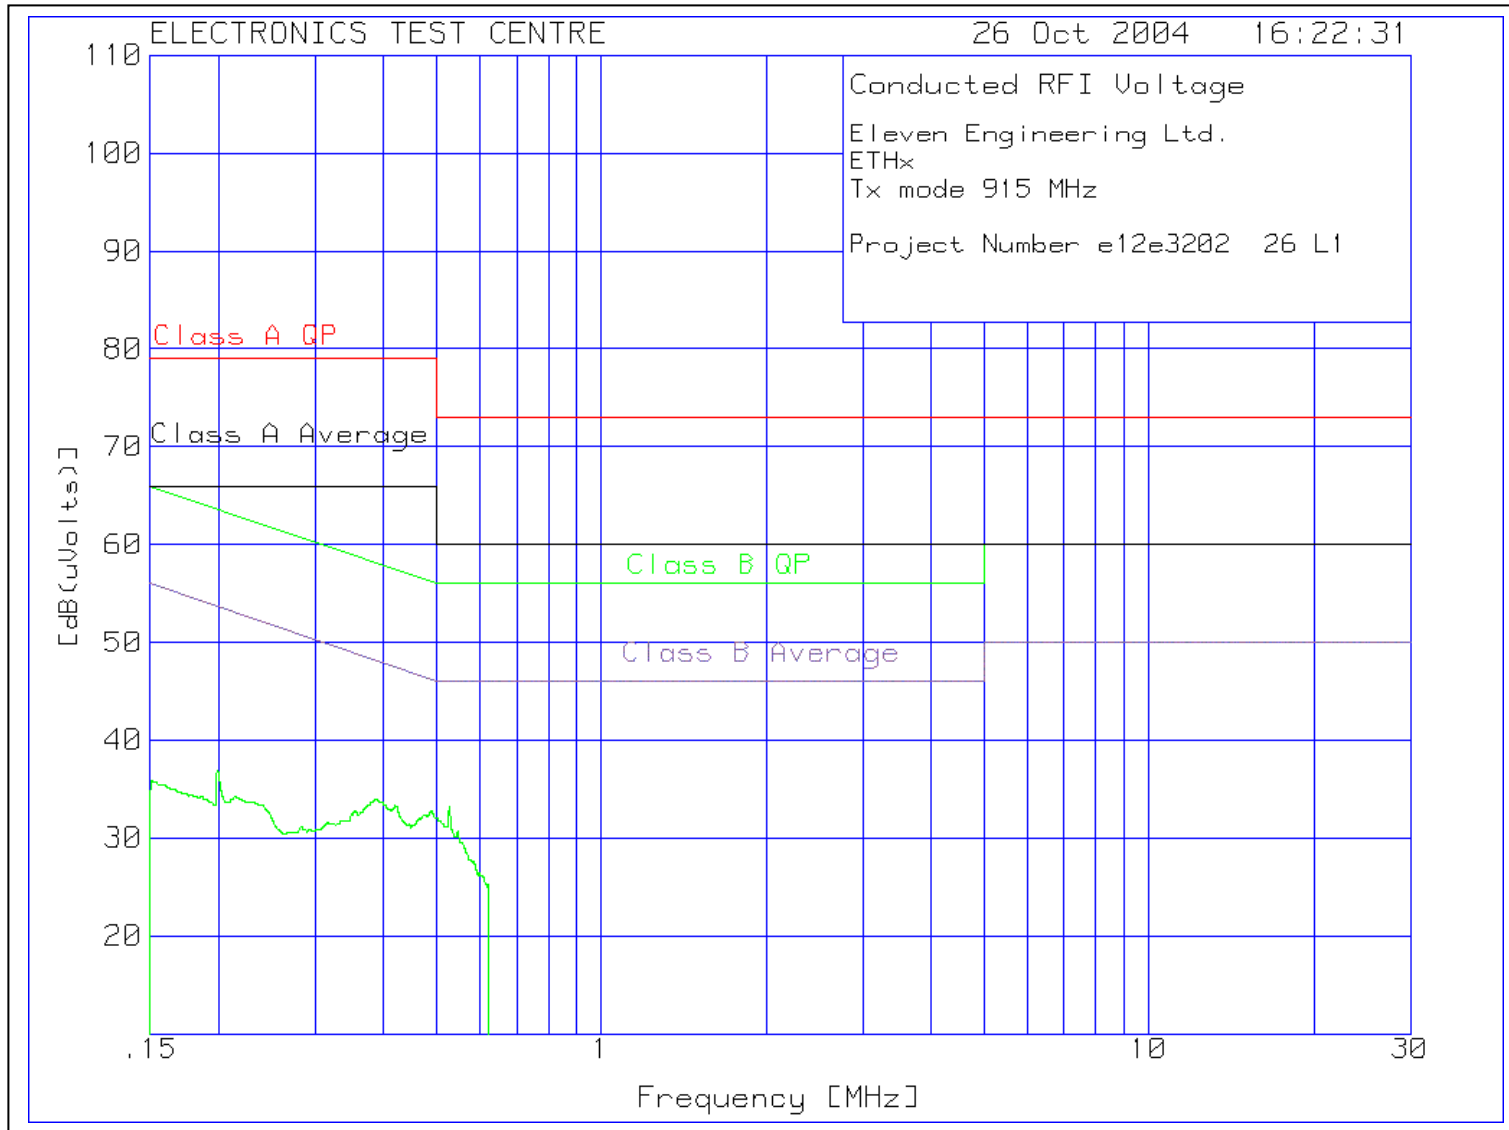





Plot of Conducted Emissions on AC Power Lines: Line 2

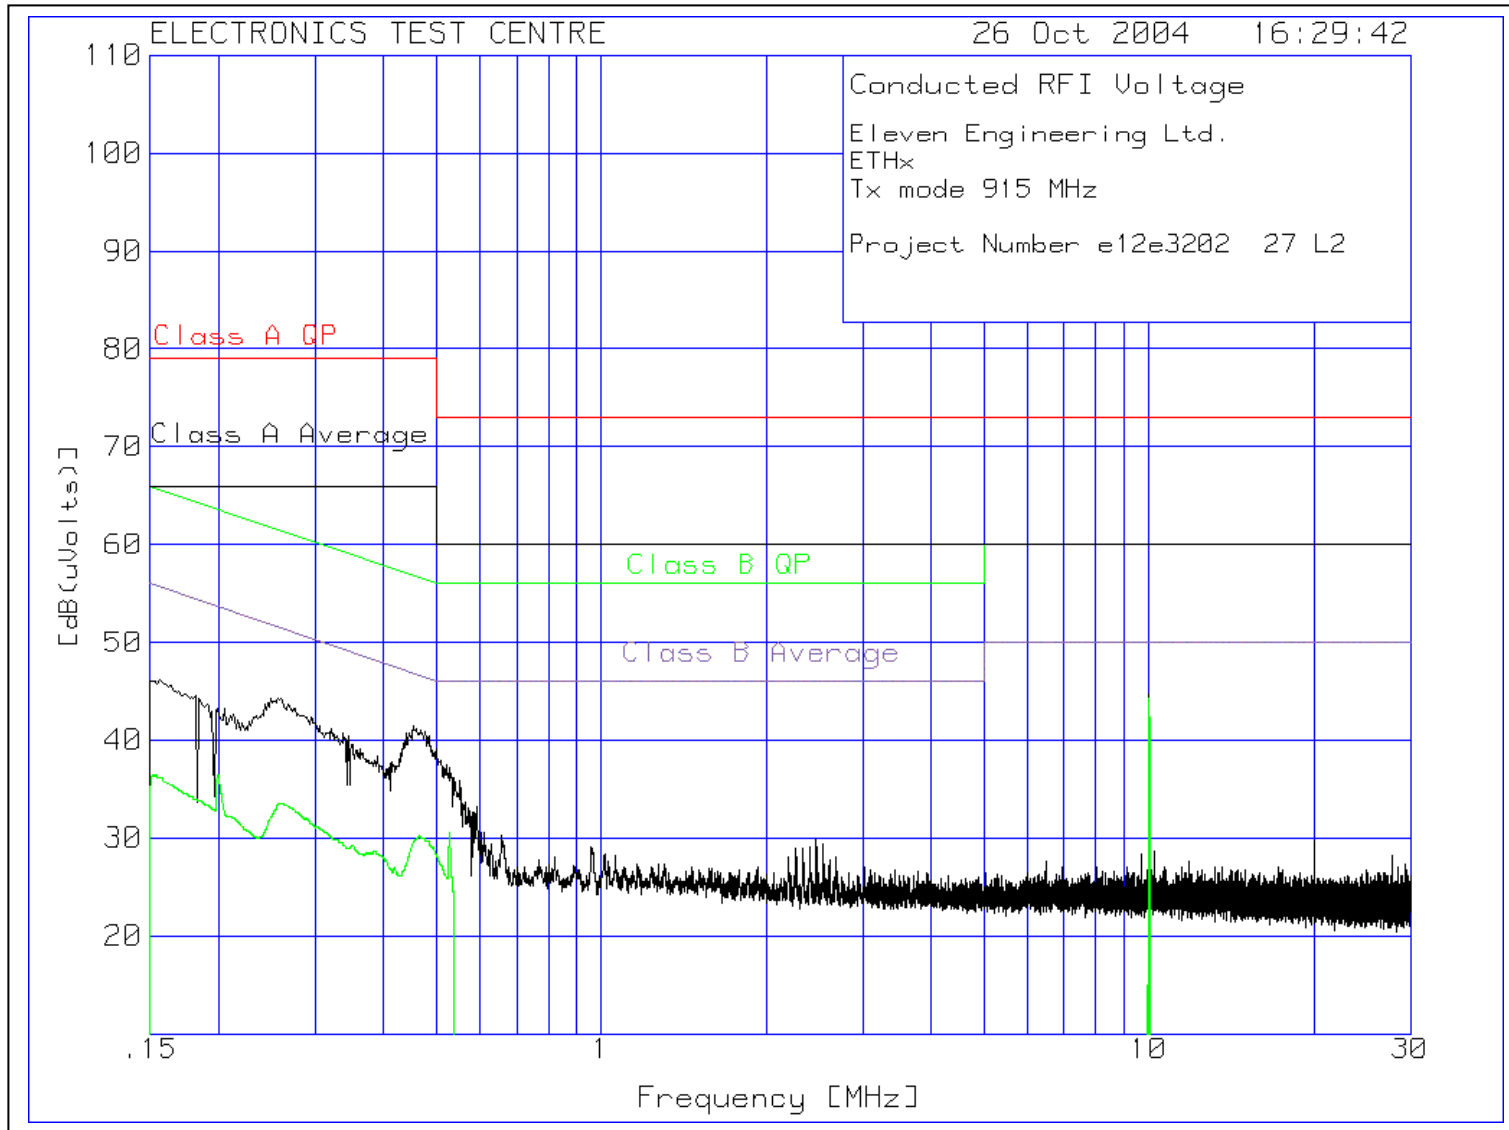


Plot of Conducted Emissions on AC Power Lines: Line 2

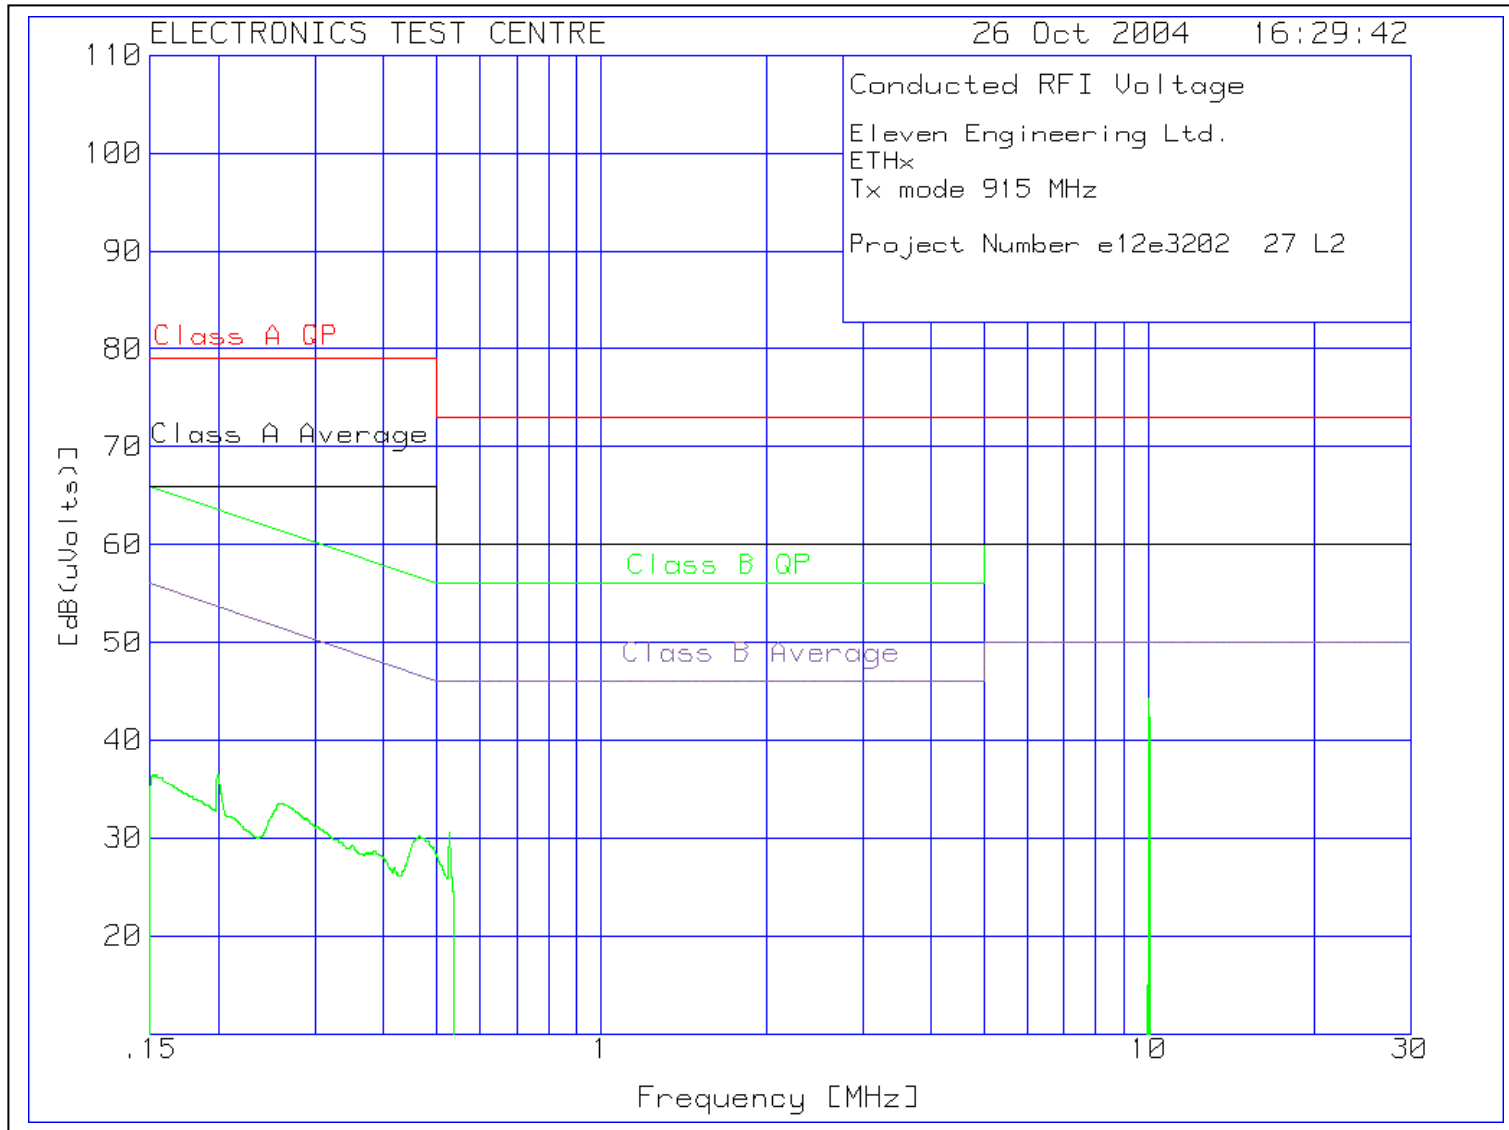

Plot of Conducted Emissions Test Chamber Ambient on AC Power Lines: Line 1

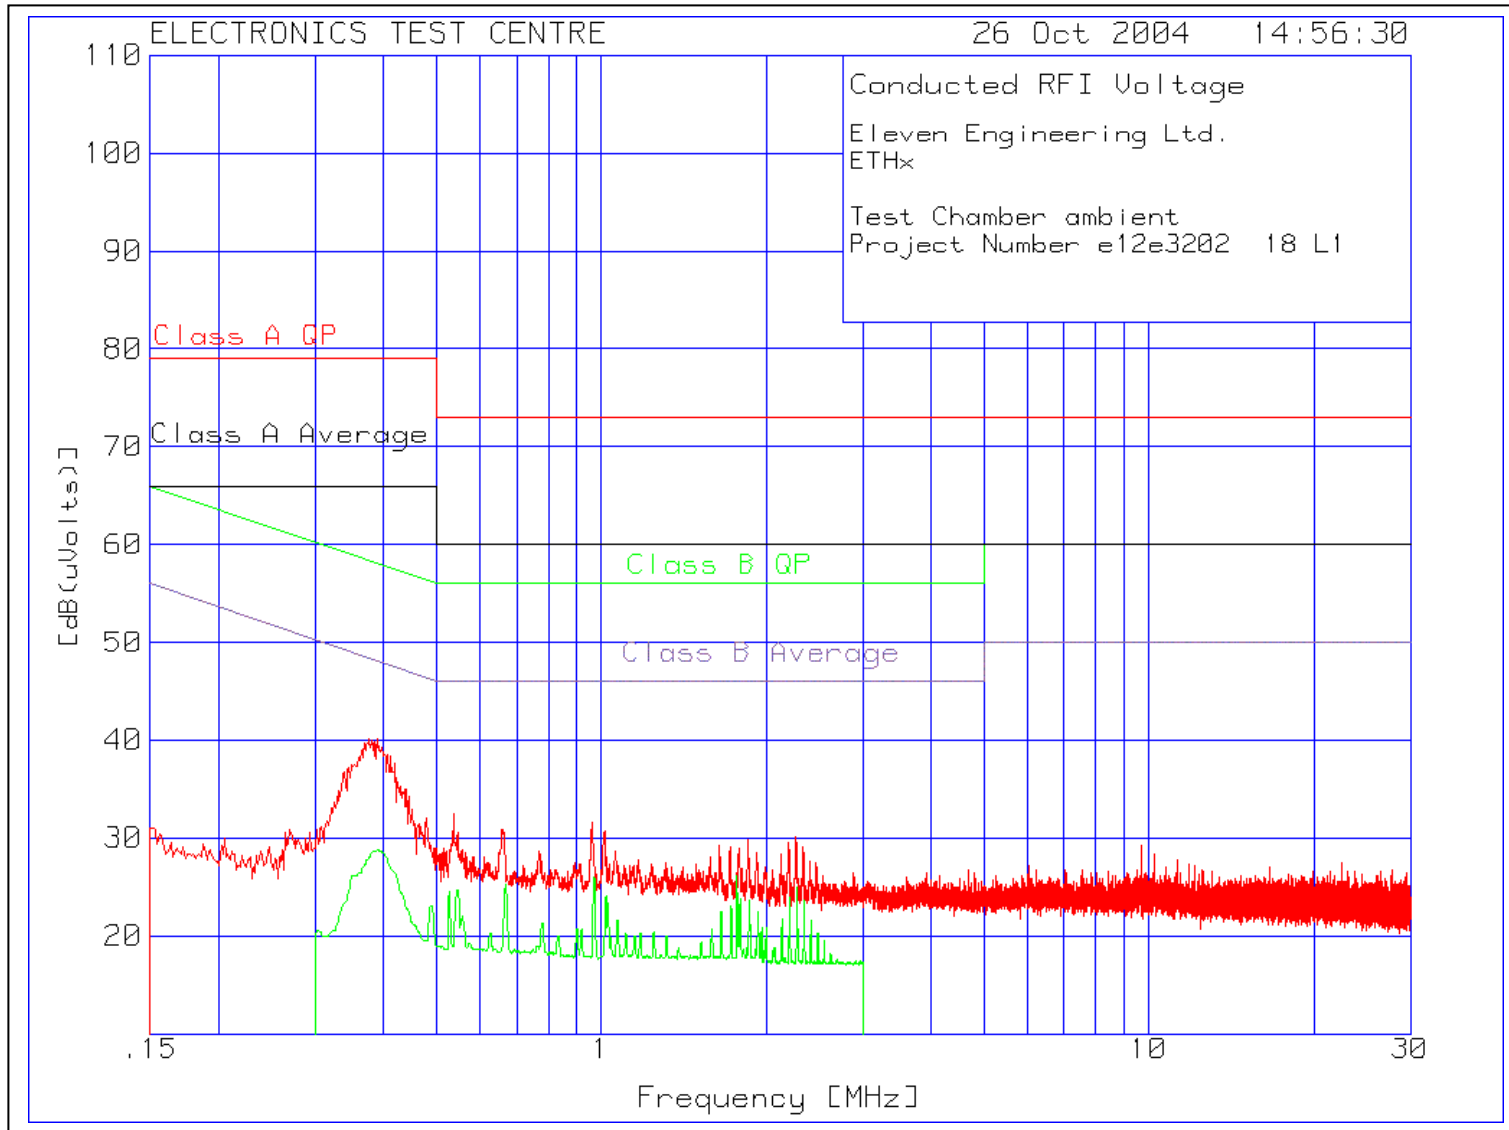

Plot of Conducted Emissions Test Chamber Ambient on AC Power Lines: Line 2

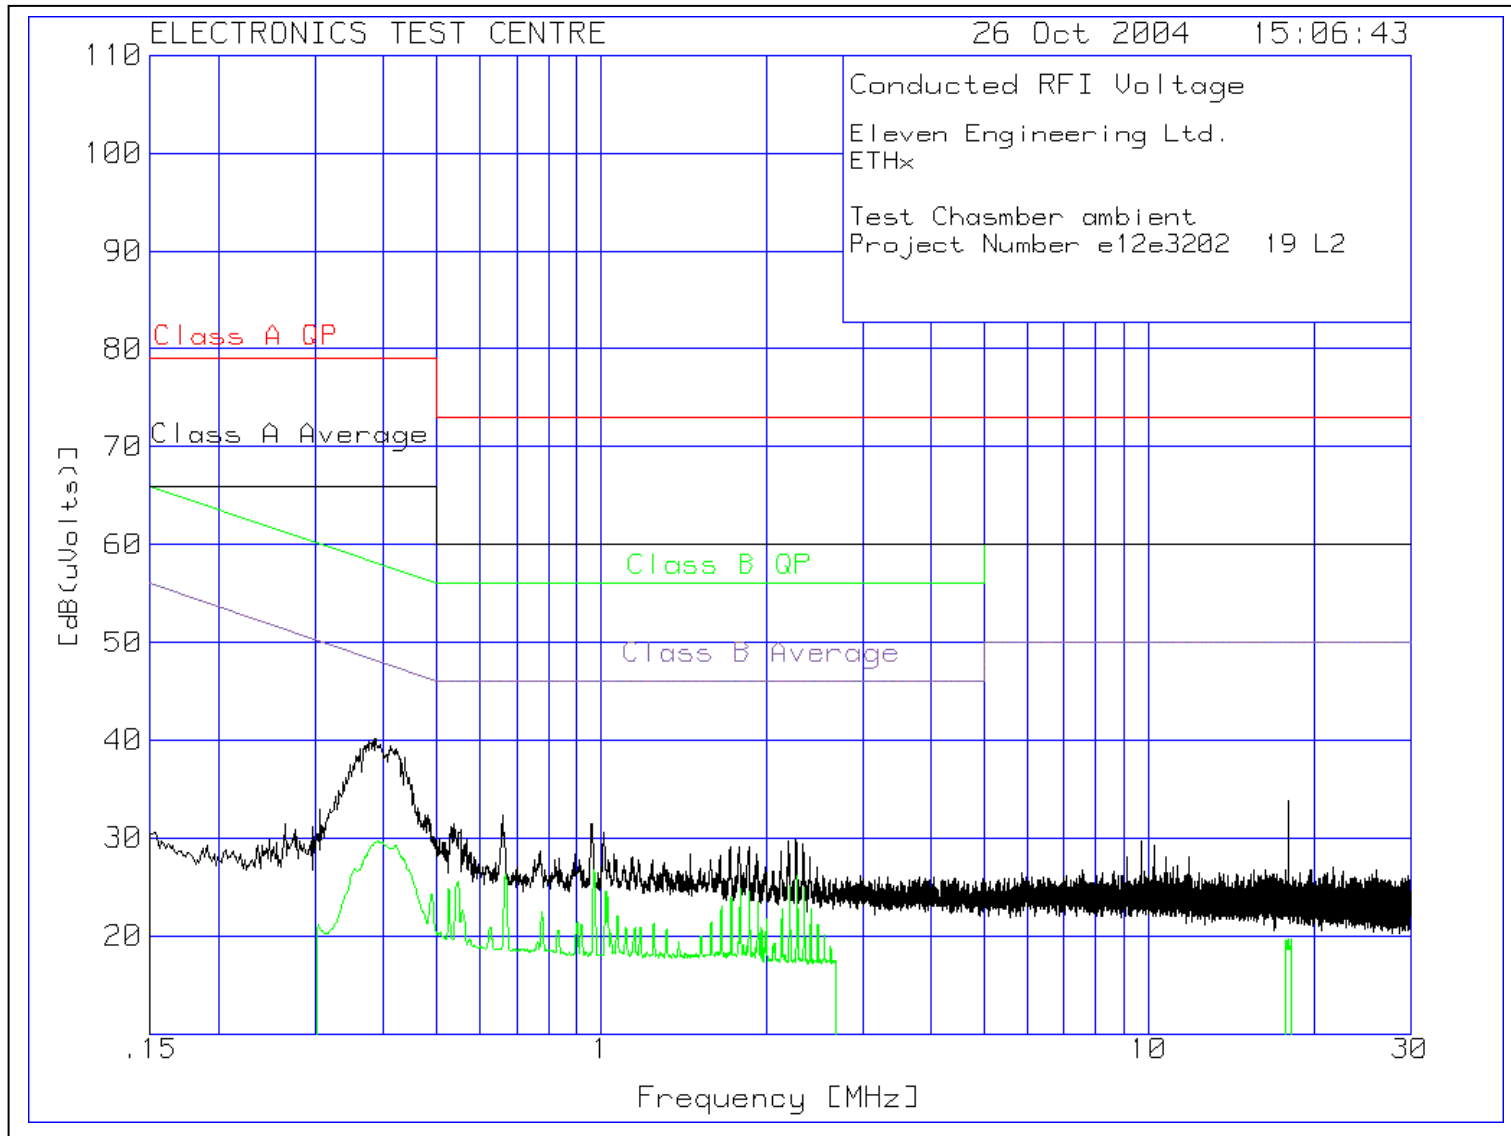


$f_c = 925 \text{ MHz}$


Test Lab: Electronics Test Centre (Airdrie) Test Personnel: David Raynes Test Date: 26 October 2004	Product: ETHx												
<b>Test Result, ETHx: PASS</b>													
<b>Objectives/Criteria</b>  The Conducted emissions produced by a system or sub-system shall not exceed the limits for the specifications as stated.  <b>Emission levels should meet the requirements with a margin of 6dB.</b>  Temperature = 21 °C    Humidity = 37 %	<b>Specification:</b>  Frequency <table border="1" data-bbox="894 604 1312 779"> <thead> <tr> <th>(MHz)</th> <th>QP</th> <th>Avg</th> </tr> </thead> <tbody> <tr> <td>0.150 - 0.50</td> <td>66 – 56</td> <td>56 - 46</td> </tr> <tr> <td>0.50 – 5.0</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 – 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> Units of measurement are dB $\mu$ V.	(MHz)	QP	Avg	0.150 - 0.50	66 – 56	56 - 46	0.50 – 5.0	56	46	5 – 30	60	50
(MHz)	QP	Avg											
0.150 - 0.50	66 – 56	56 - 46											
0.50 – 5.0	56	46											
5 – 30	60	50											
There were no emissions measured within -6 dB of the specified limit. Refer to the test data and plots for more detail.													

This page intentionally left blank

Plot of Conducted Emissions on AC Power Lines: Line 1

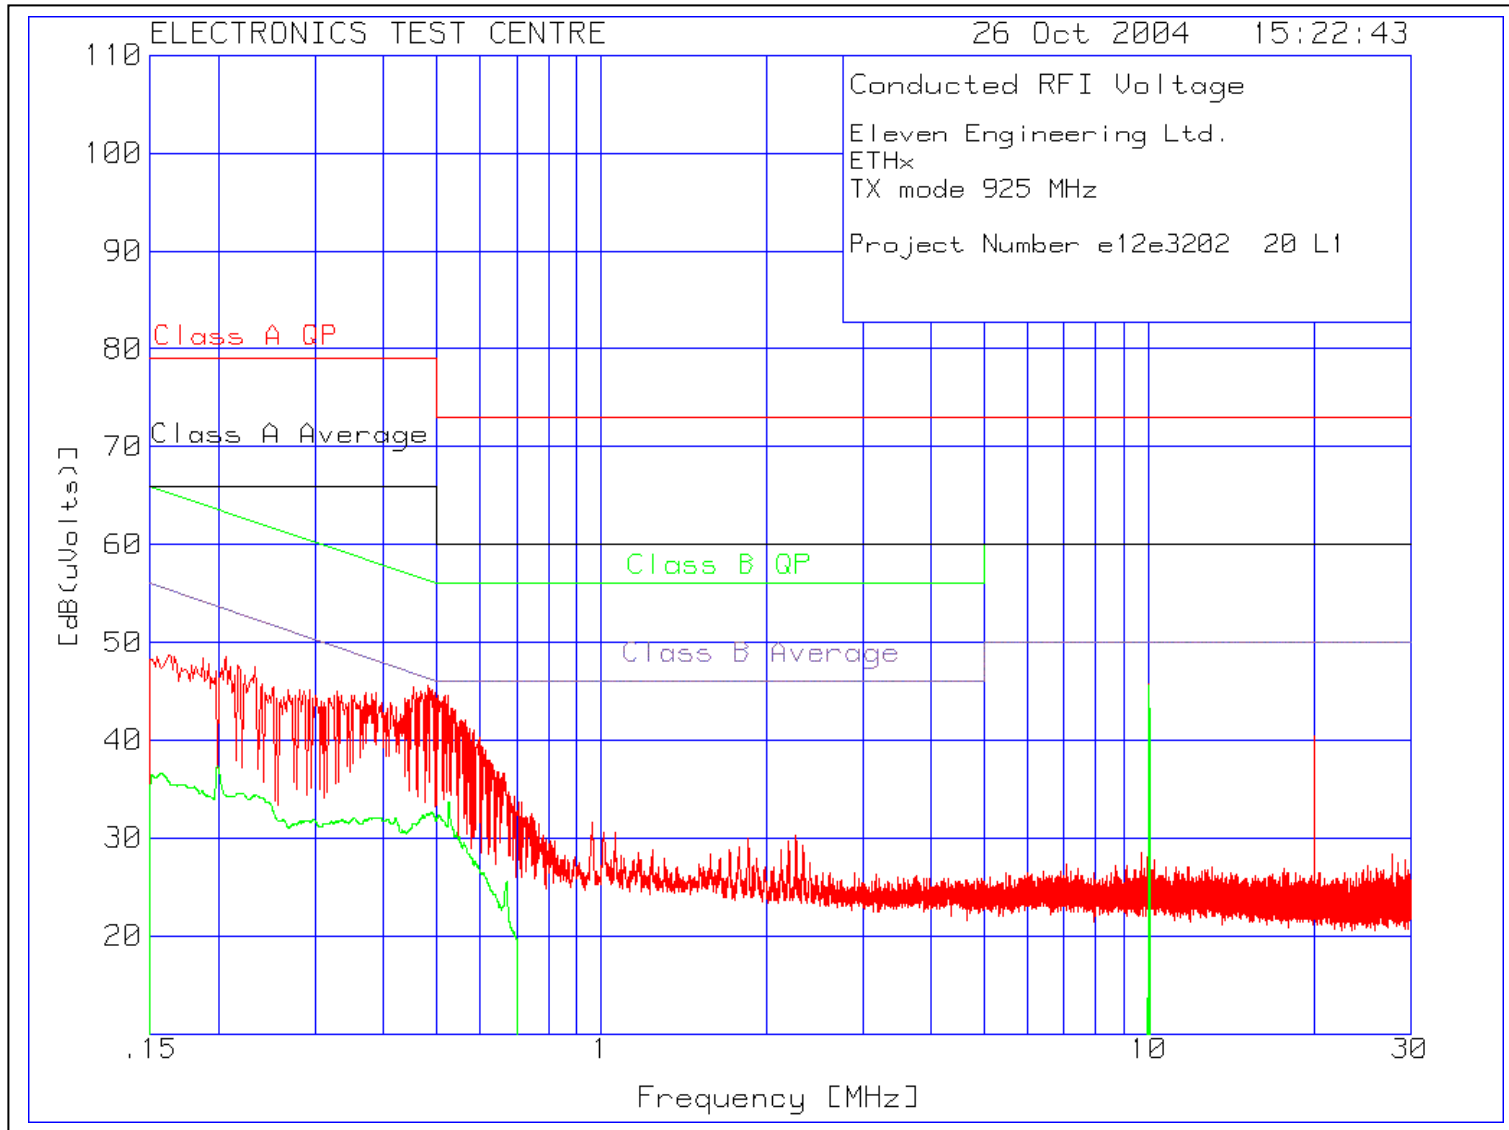


Plot of Conducted Emissions on AC Power Lines: Line 1

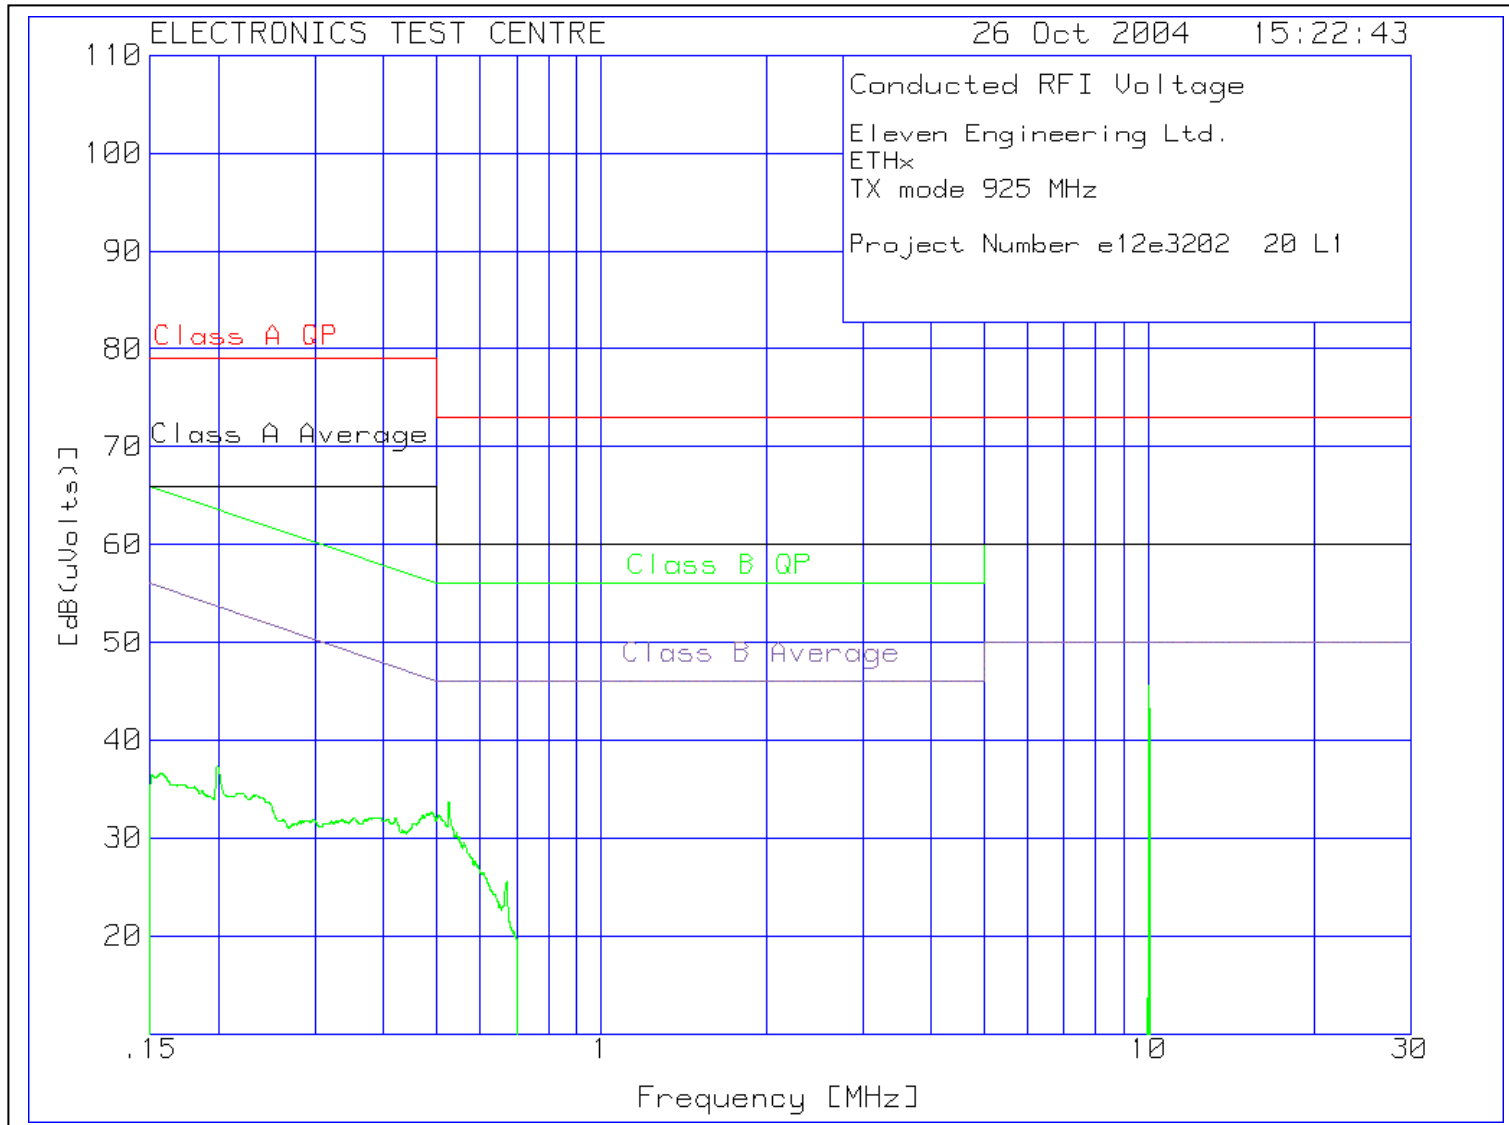





Plot of Conducted Emissions on AC Power Lines: Line 2

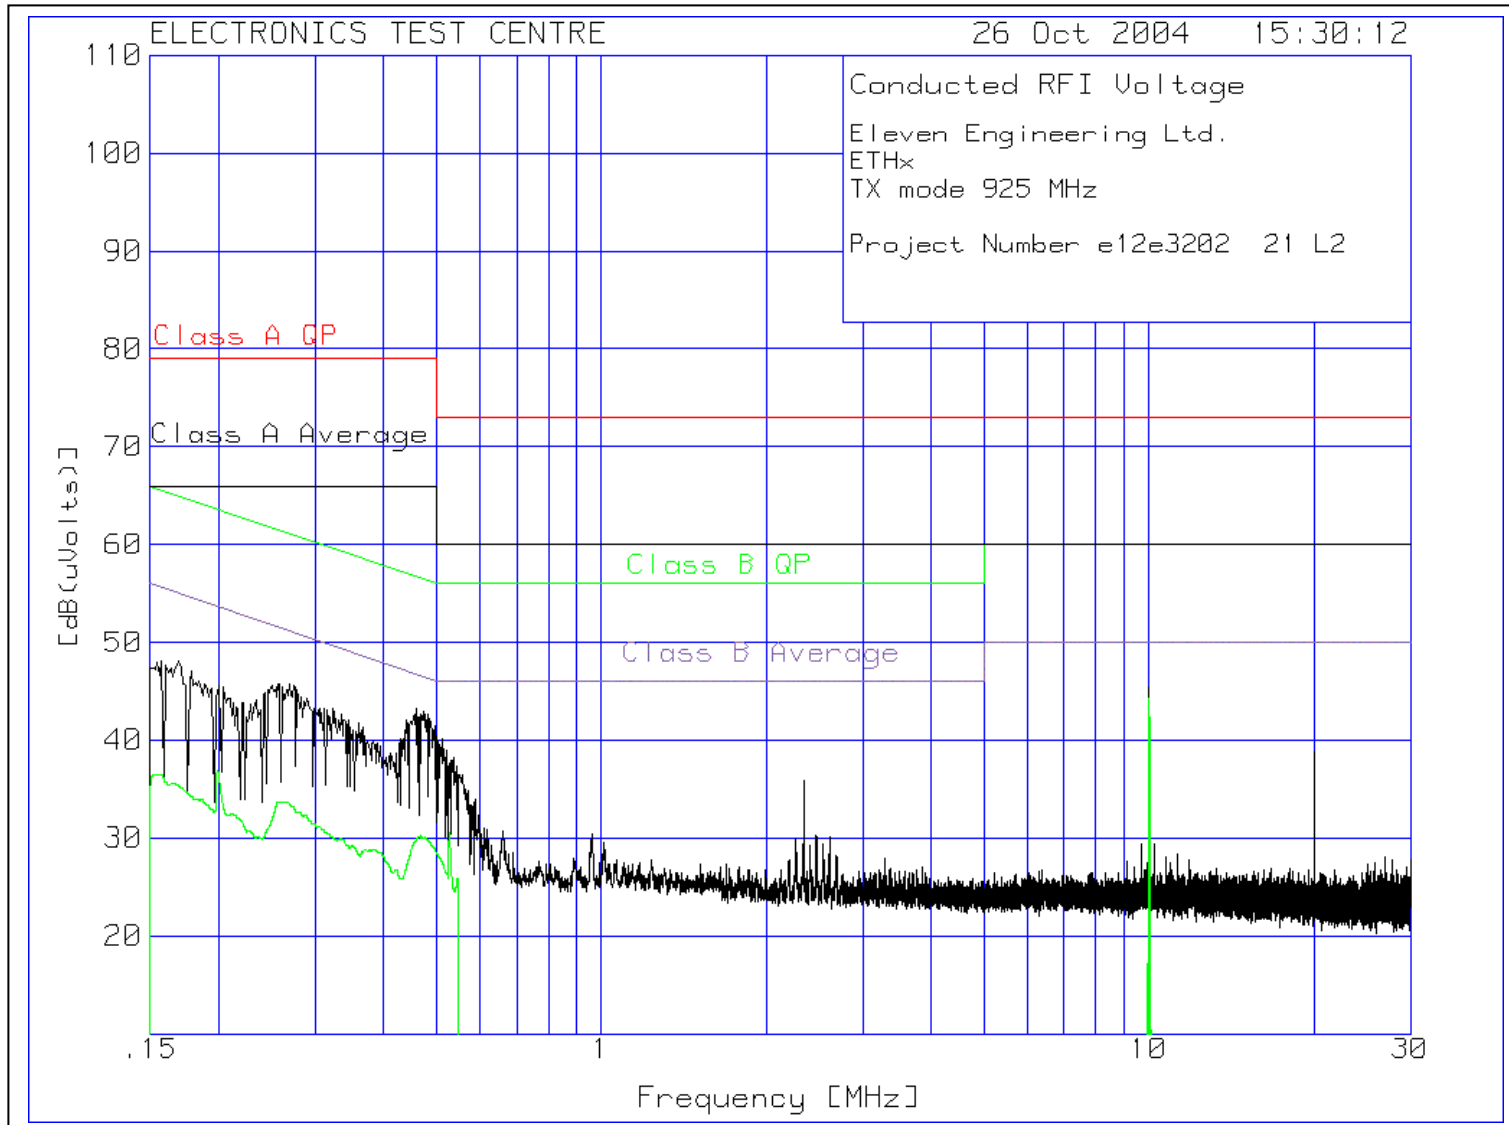


Plot of Conducted Emissions on AC Power Lines: Line 2

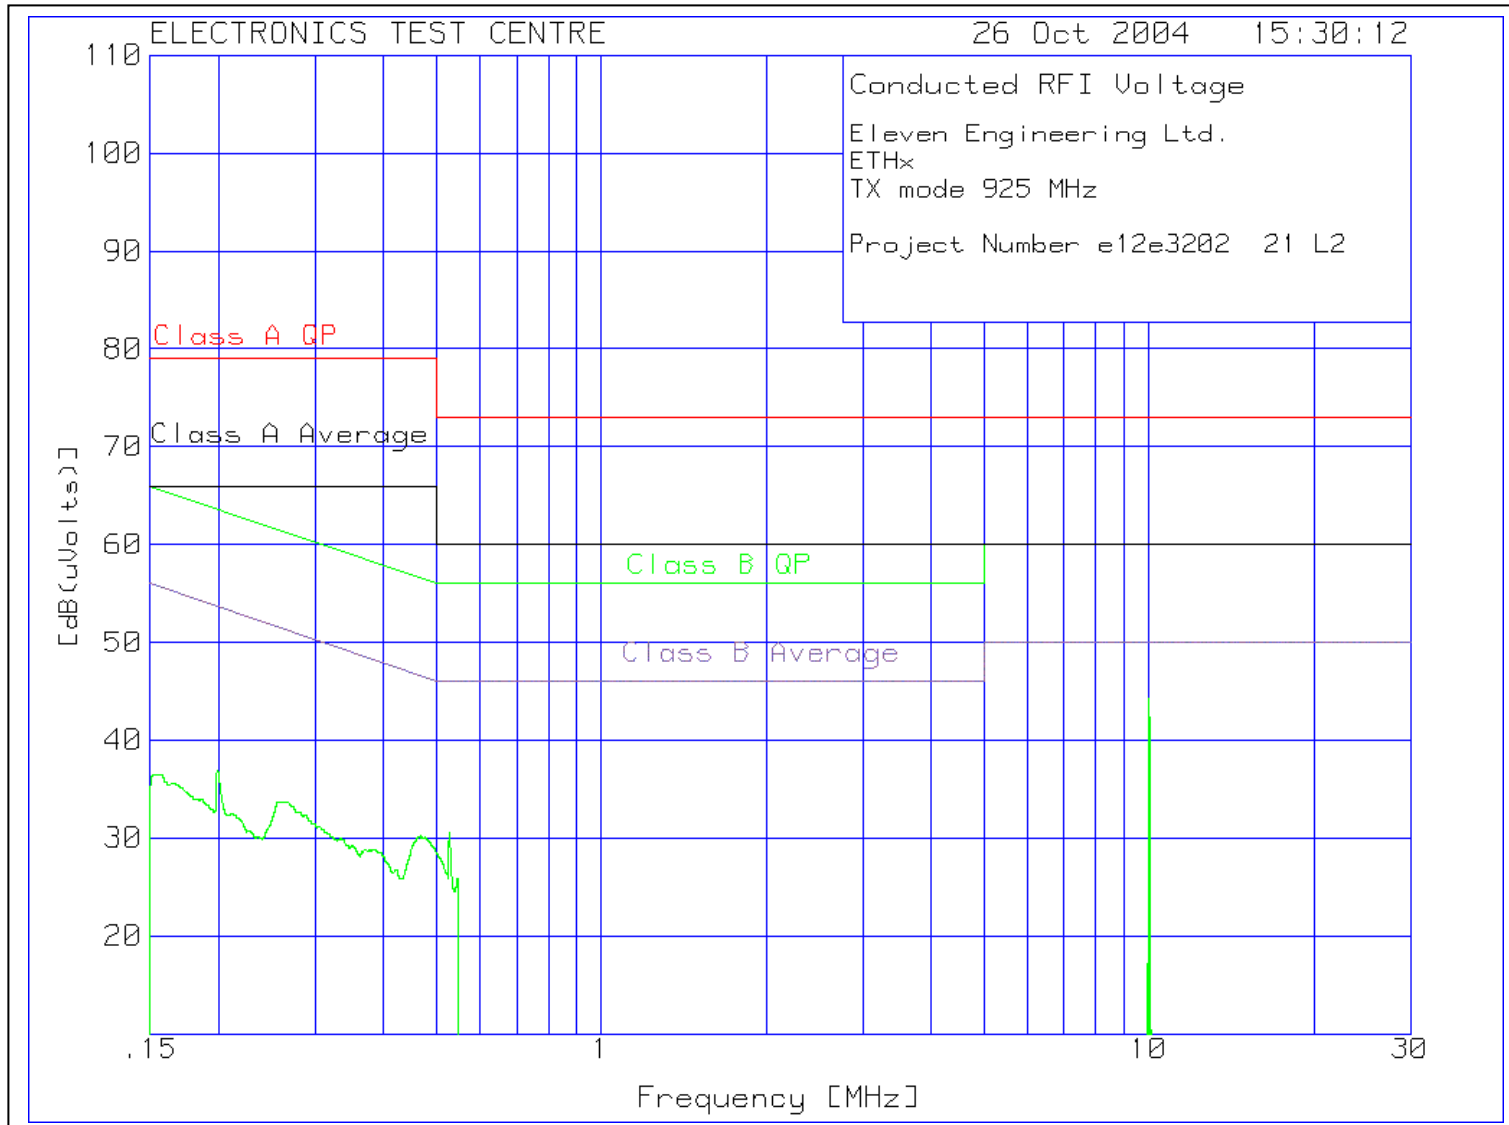

Plot of Conducted Emissions Test Chamber Ambient on AC Power Lines: Line 1

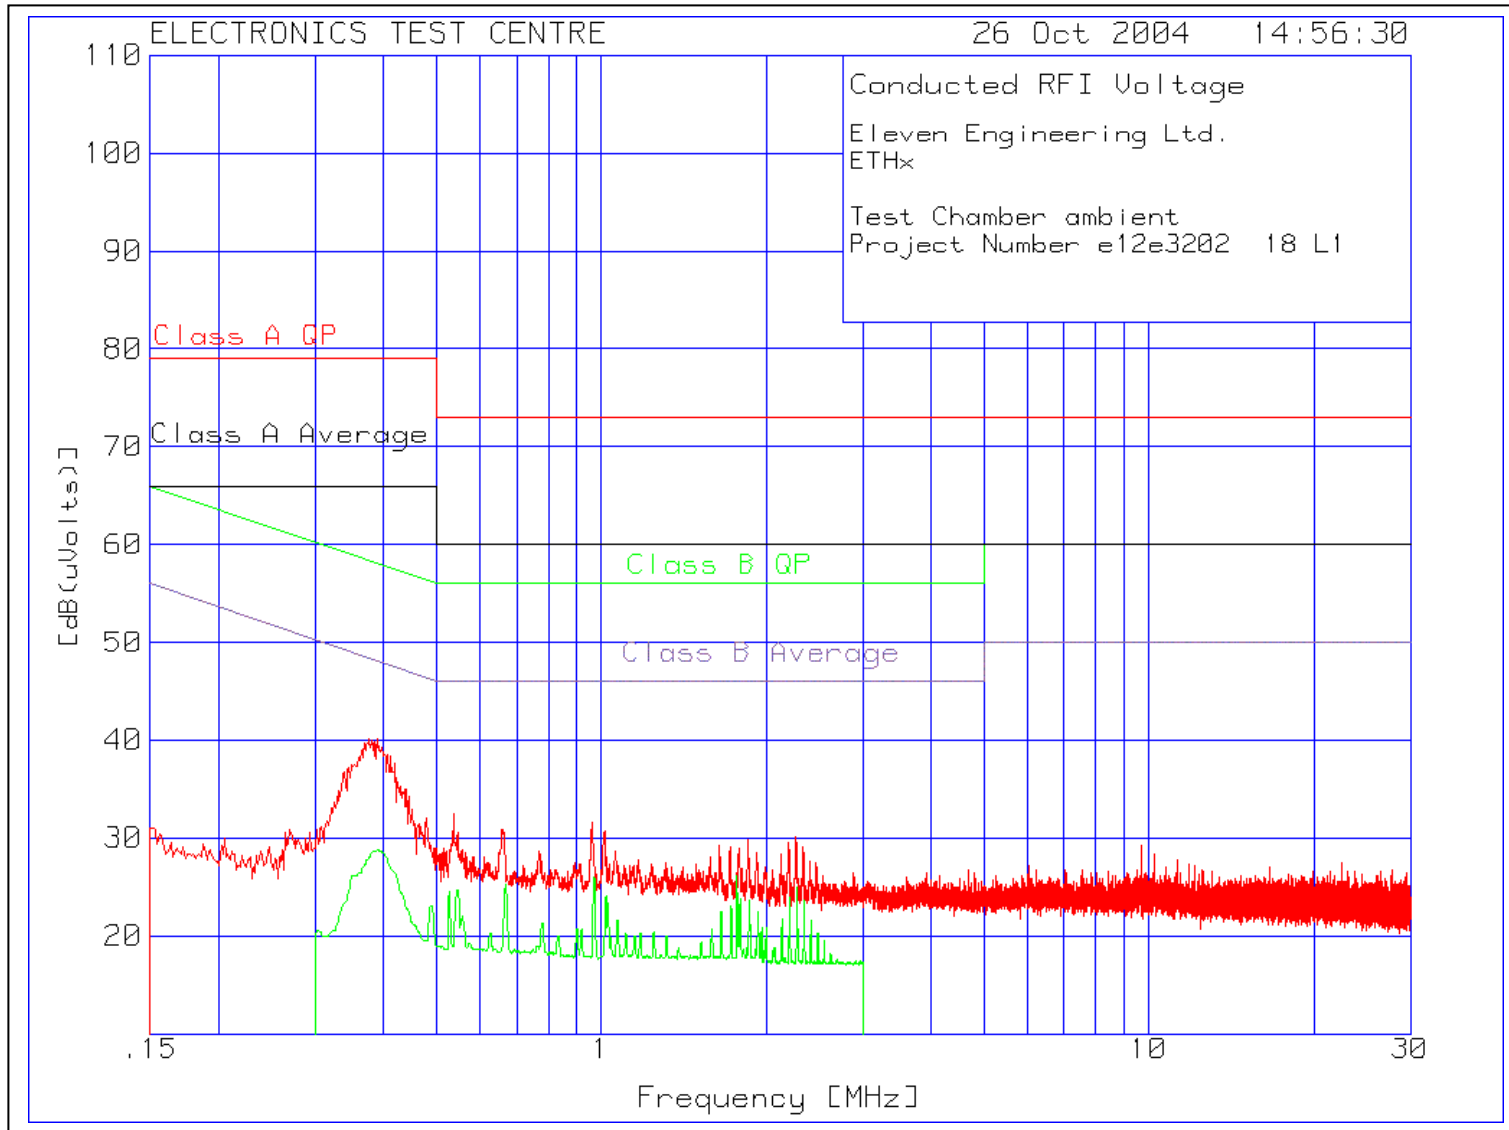

Plot of Conducted Emissions Test Chamber Ambient on AC Power Lines: Line 2

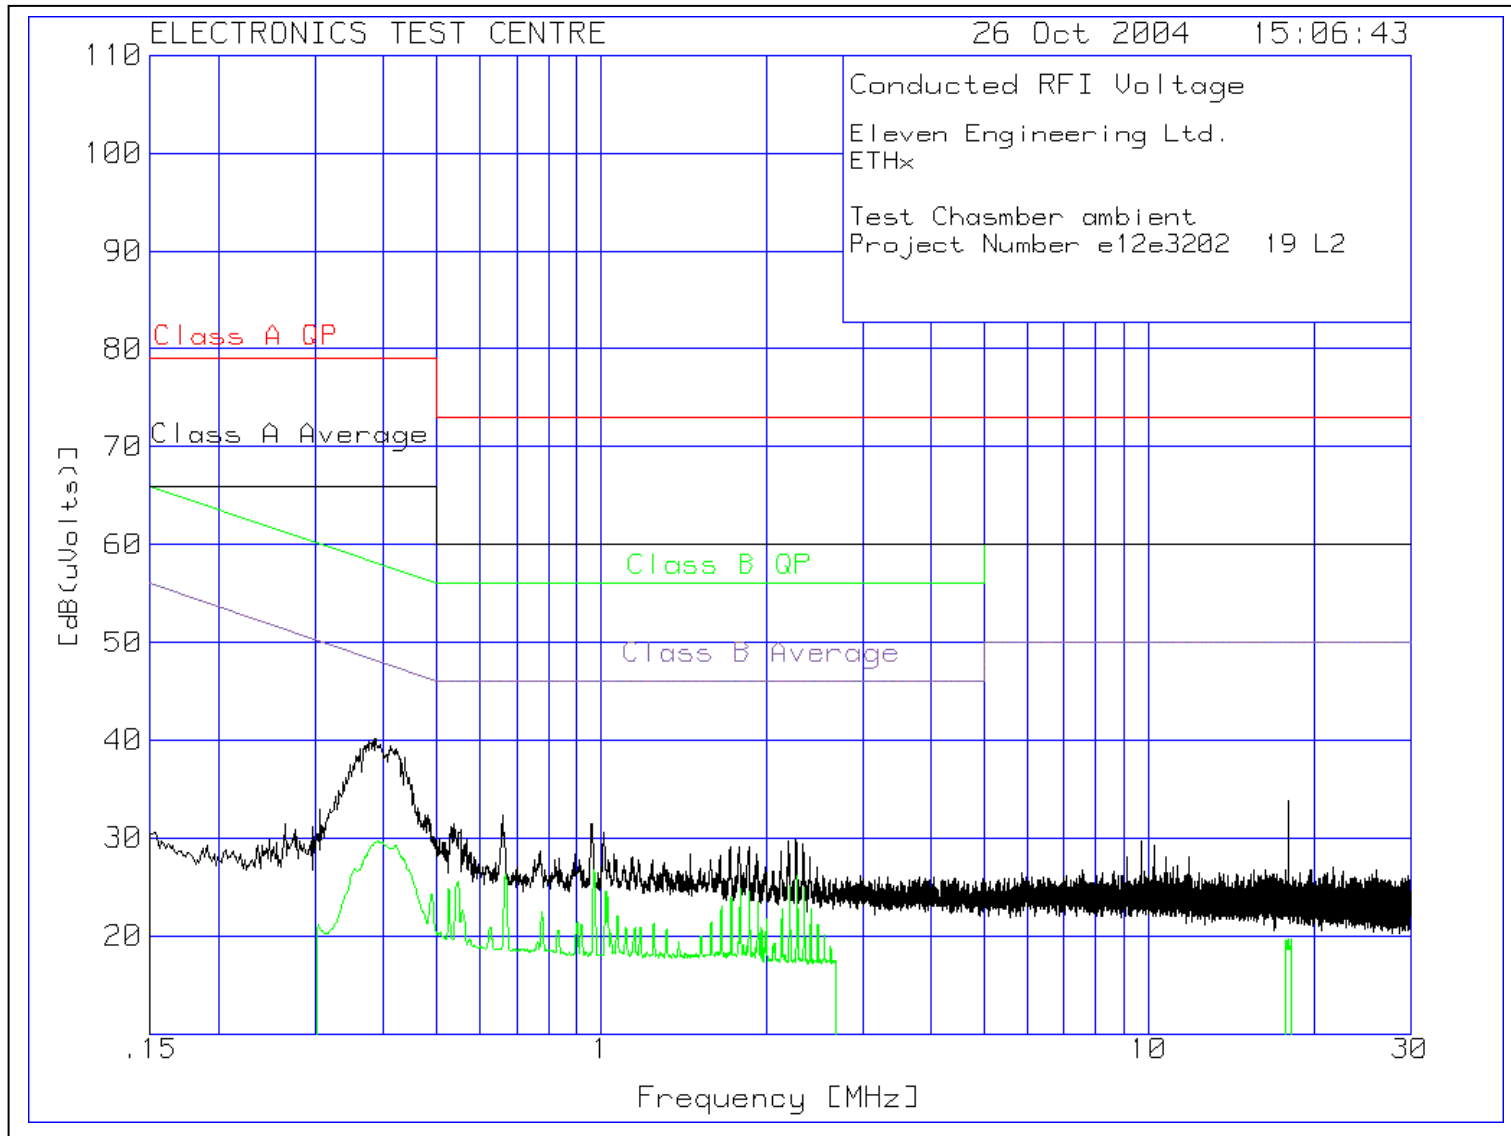

### 4.3 RADIATED EMISSIONS INCLUDING RESTRICTED BANDS OF OPERATION

#### 4.3a Receive Mode

Test Lab: Electronics Test Centre (Airdrie) Test Personnel: David Raynes Test Date: 26 October 2004			Product: ETHx																	
Test Result, ETHx: <b>PASS</b>																				
<p>Objectives/Criteria</p> <p>The Radiated E-Field emissions produced by a system or sub-system, measured at a distance of 3m from the EUT, shall not exceed the limits for the specifications as stated.</p> <p><b>Emission levels should meet the requirements with a margin of 6dB.</b></p> <p>The EUT was assessed against the requirements of <b>Class B</b>.</p> <p>Temperature = 21 °C Humidity = 37 %</p>			<p>Specification: FCC Part 15.249.109</p> <table border="1"> <thead> <tr> <th>Frequency [MHz]</th> <th>Class A QP @ 3m</th> <th>Class B QP @ 3m</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>49.54</td> <td><b>40.00</b></td> </tr> <tr> <td>88 – 216</td> <td>53.98</td> <td><b>43.52</b></td> </tr> <tr> <td>216 – 960</td> <td>56.90</td> <td><b>46.02</b></td> </tr> <tr> <td>above 960</td> <td>60.00</td> <td><b>53.98</b></td> </tr> </tbody> </table>			Frequency [MHz]	Class A QP @ 3m	Class B QP @ 3m	30 – 88	49.54	<b>40.00</b>	88 – 216	53.98	<b>43.52</b>	216 – 960	56.90	<b>46.02</b>	above 960	60.00	<b>53.98</b>
Frequency [MHz]	Class A QP @ 3m	Class B QP @ 3m																		
30 – 88	49.54	<b>40.00</b>																		
88 – 216	53.98	<b>43.52</b>																		
216 – 960	56.90	<b>46.02</b>																		
above 960	60.00	<b>53.98</b>																		
<b>Horizontal:</b>			<b>Vertical:</b>																	
Frequency [MHz]	Field Strength [dBµV/m]	Delta [dB from limit]	Frequency [MHz]	Field Strength [dBµV/m]	Delta [dB from limit]															
250.0088	39.37	-6.65	450.0062	40.11	-5.91															
750.0119	38.19	-7.83	250.0042	38.92	-7.1															
450.0054	38.02	-8.00	400.0063	37.69	-8.33															
There were more emissions measured within -10 dB of the specified limit. Refer to the test data and plots for more detail.																				

Radiated Emissions Data:

The emissions data is presented in tabular form, showing the uncorrected spectrum analyzer reading, the correction factors applied, the net result, the value(s) of up to 4 limits at the frequency measured, and the margin between the result and the limit(s).

For example:

Test Frequency [MHz]	Meter Reading [dB(uV)]	Gain/Loss Factor [dB]	Transducer Factor [dB]	Level [dB (uVolts)]	Limit:1	2	3	4
94.0036	37.1 qp	2.2	8.5	47.8	54	43.5	50.5	40.5
Azimuth: 156	Height:113	Vert	Margin [dB]	-6.2	4.3	-2.7	7.3	

↓		The applicable Limit
Test Frequency [MHz]	94.0036	Test Frequency f = 94.0036 MHz
Meter Reading [dB (uV)]	37.1 qp	The reading with Quasi-Peak detector
Gain/Loss Factor [dB]	2.2	Net correction for preamp gain & cable loss
Transducer Factor [dB]	8.5	Correction for antenna loss
Level [dB (uVolts)]	47.8	Corrected value for field strength
Azimuth:	156	The turntable was 156 degrees CW from facing the antenna
Height:	113	The antenna was 113 cm above the ground
Limit: 1	54	The value of Limit 1 at 94.0036 MHz
Margin [dB]	-6.2	The field strength is 6.2 dB below Limit 1
Limit: 2	43.5	The value of Limit 2 at 94.0036 MHz
Margin [dB]	4.3	The field strength is 4.3 dB above Limit 2
Limit: 3	50.5	The value of Limit 3 at 94.0036 MHz
Margin [dB]	-2.7	The field strength is 2.7 dB below Limit 3
Limit: 4	40.5	The value of Limit 4 at 94.0036 MHz
Margin [dB]	7.3	The field strength is 7.3 dB above Limit 4

**Meter Reading in dBuV + Gain/Loss Factor in dB + Transducer Factor in dB = Corrected Field Strength**

Note: When a preamp is used, the resulting gain is compensated.

Highlighting indicates a margin of less than 6 dB.


Eleven Engineering Ltd.  
ETHx  
Rx mode 925 MHz  
Project Number e12e3202-1 06

Test Frequency [MHz]	Meter Reading [dB(uV)]	Gain/Loss Factor [dB]	Transducer Factor [dB]	Level dB[uVolts/meter]	Limit:1	2	3	4
=====								
Range: 1 30 - 1000MHz								
250.0088	23.75 qp	4.42	11.2	39.37	56.9	57	46.02	47.46
Azimuth: 215 Height:124 Horz					Margin [dB]:	-17.53	-17.63	-6.65 -8.09
450.0054	16.91 qp	5.81	15.3	38.02	56.9	57	46.02	47.46
Azimuth: 196 Height:183 Horz					Margin [dB]:	-18.88	-18.98	-8 -9.44
750.0119	11.12 qp	7.37	19.7	38.19	56.9	57	46.02	47.46
Azimuth: 207 Height:100 Horz					Margin [dB]:	-18.71	-18.81	-7.83 -9.27
Range: 2 30 - 1000MHz								
40.0078	13.83 qp	1.59	13.7	29.12	49.54	50	40	40.46
Azimuth: 265 Height:105 Vert					Margin [dB]:	-20.42	-20.88	-10.88 -11.34
49.9988	18.07 qp	2.11	11.08	31.26	49.54	50	40	40.46
Azimuth: 339 Height:102 Vert					Margin [dB]:	-18.28	-18.74	-8.74 -9.2
80.0088	22.65 qp	2.57	6.15	31.37	49.54	50	40	40.46
Azimuth: 359 Height:141 Vert					Margin [dB]:	-18.17	-18.63	-8.63 -9.09
150.0066	22.62 qp	3.41	8.11	34.14	53.98	50	43.52	40.46
Azimuth: 312 Height:100 Vert					Margin [dB]:	-19.84	-15.86	-9.38 -6.32
250.0042	23.17 qp	4.42	11.33	38.92	56.9	57	46.02	47.46
Azimuth: 268 Height:126 Vert					Margin [dB]:	-17.98	-18.08	-7.1 -8.54
400.0063	17.76 qp	5.53	14.4	37.69	56.9	57	46.02	47.46
Azimuth: 195 Height:148 Vert					Margin [dB]:	-19.21	-19.31	-8.33 -9.77
450.0062	18.98 qp	5.81	15.32	40.11	56.9	57	46.02	47.46
Azimuth: 329 Height:122 Vert					Margin [dB]:	-16.79	-16.89	-5.91 -7.35

LIMIT 1: FCC Part 15 Class A 3m  
 LIMIT 2: ICES-003 Class A 3m  
 LIMIT 3: FCC Part 15 Class B 3m ←  
 LIMIT 4: ICES-003 Class B 3m


qp - Quasi-Peak detector

Plot of Radiated Emissions:

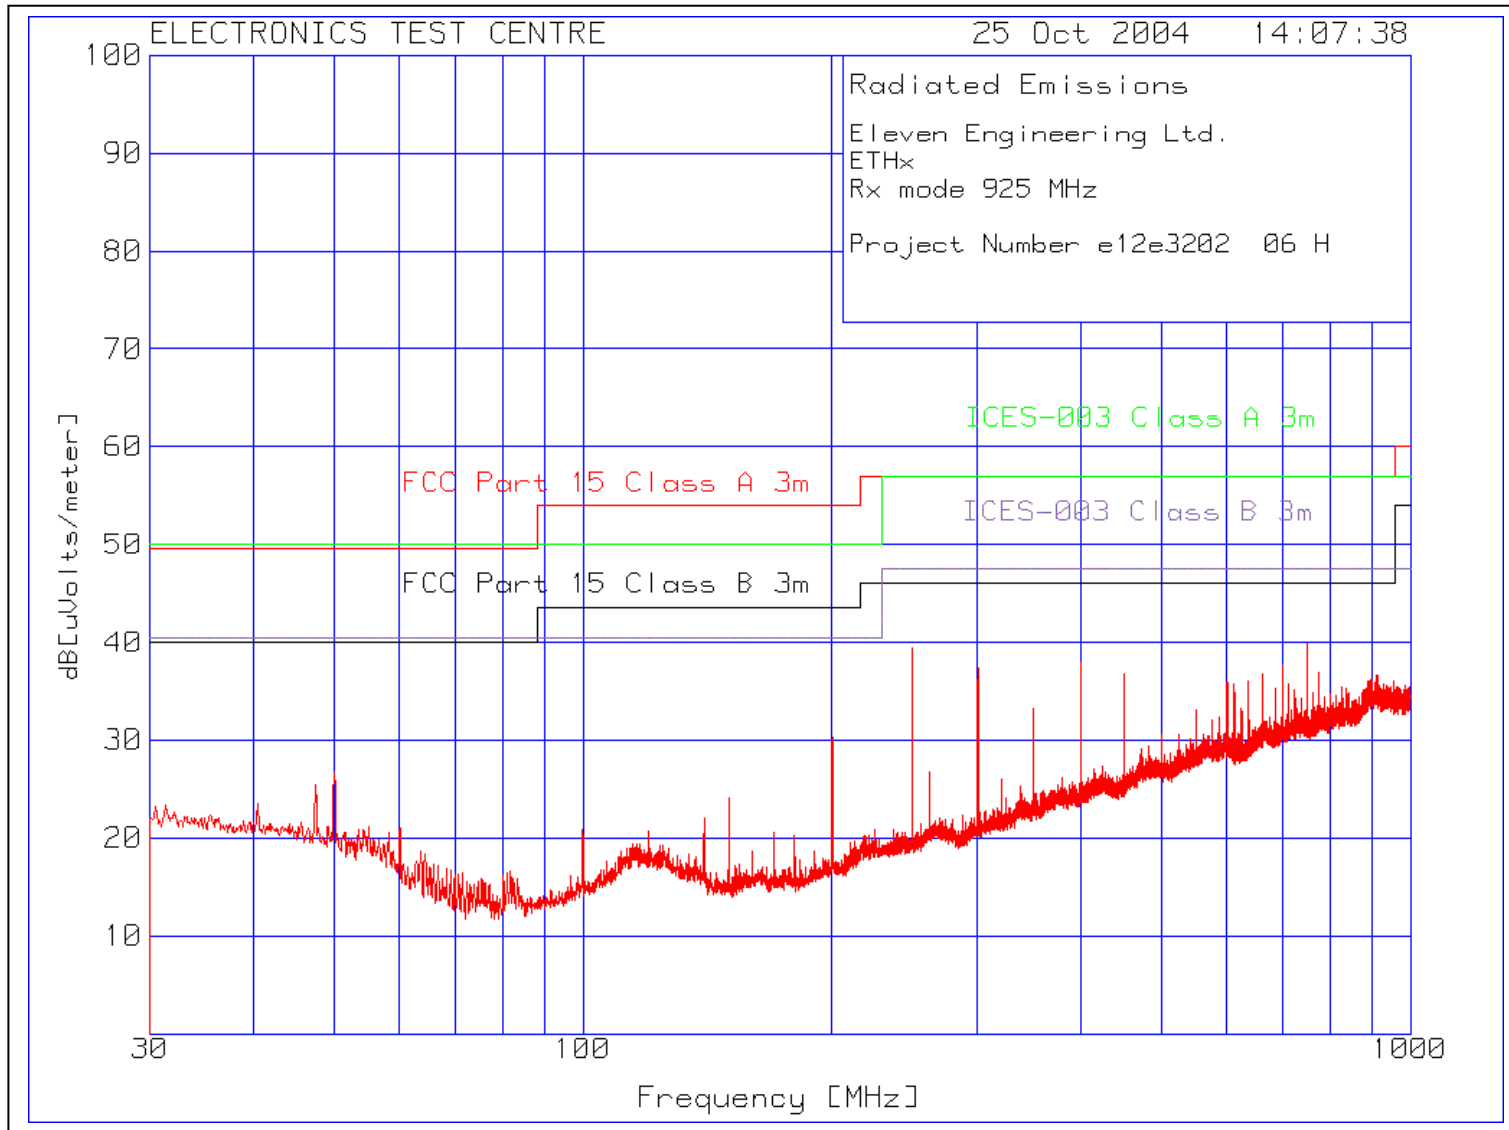





Plot of Radiated Emissions:

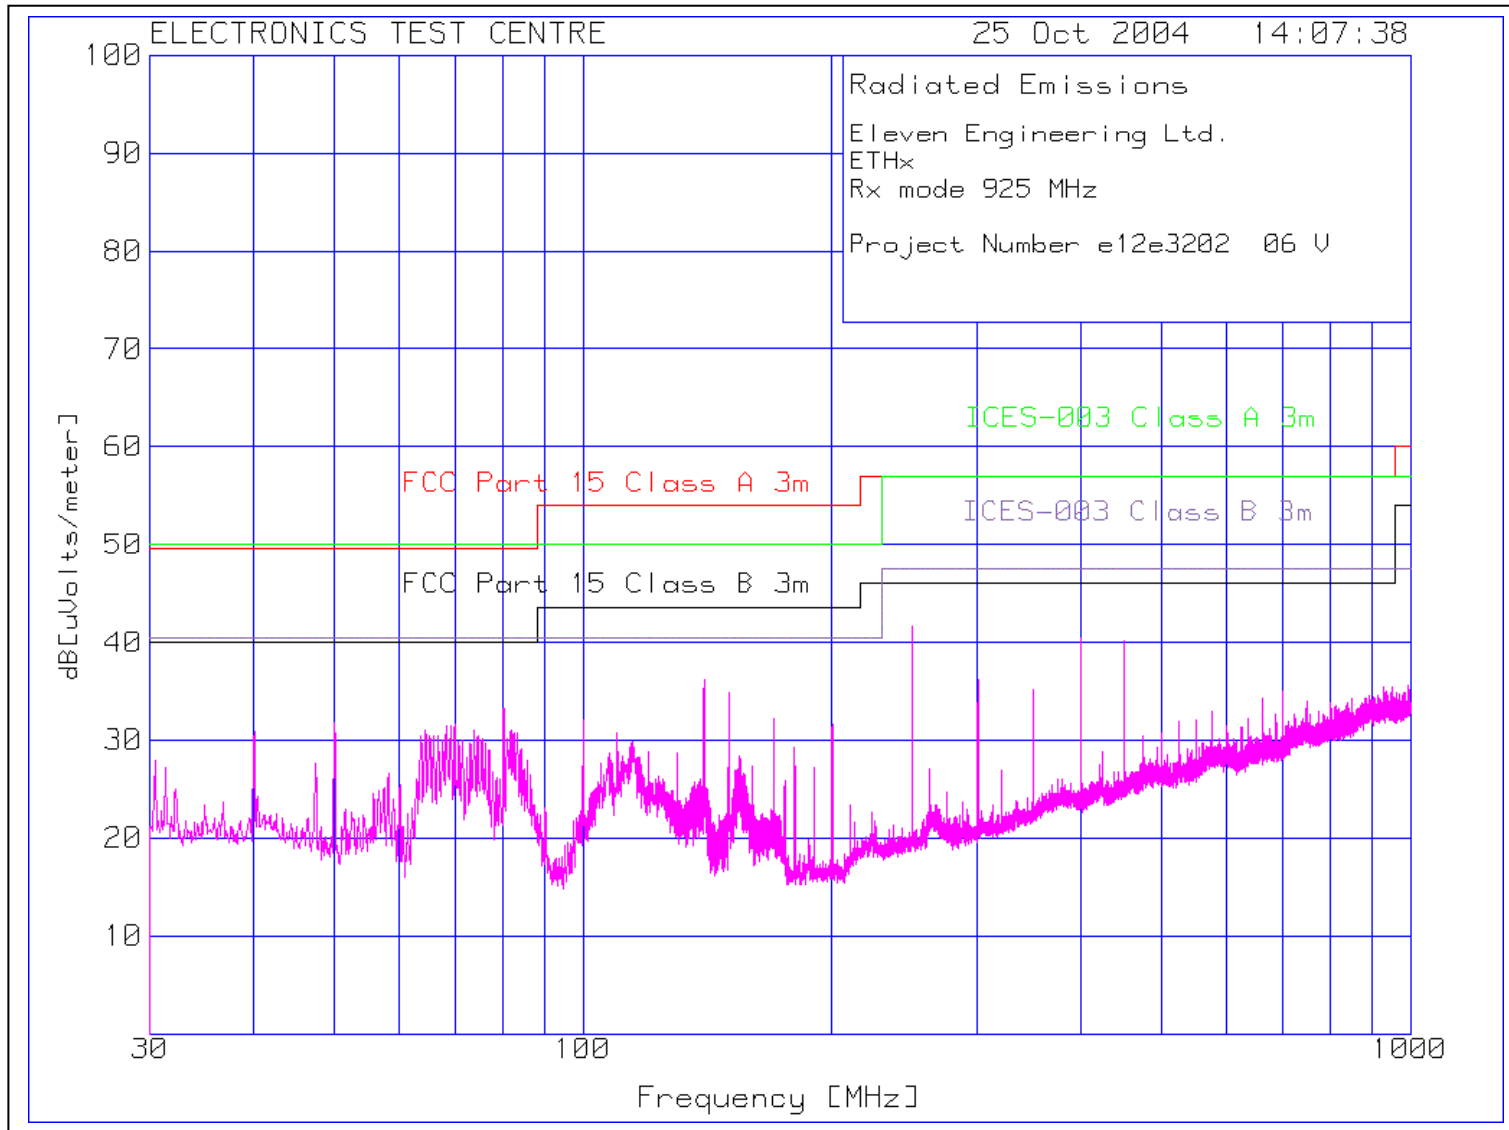


Plot of Radiated Emissions:

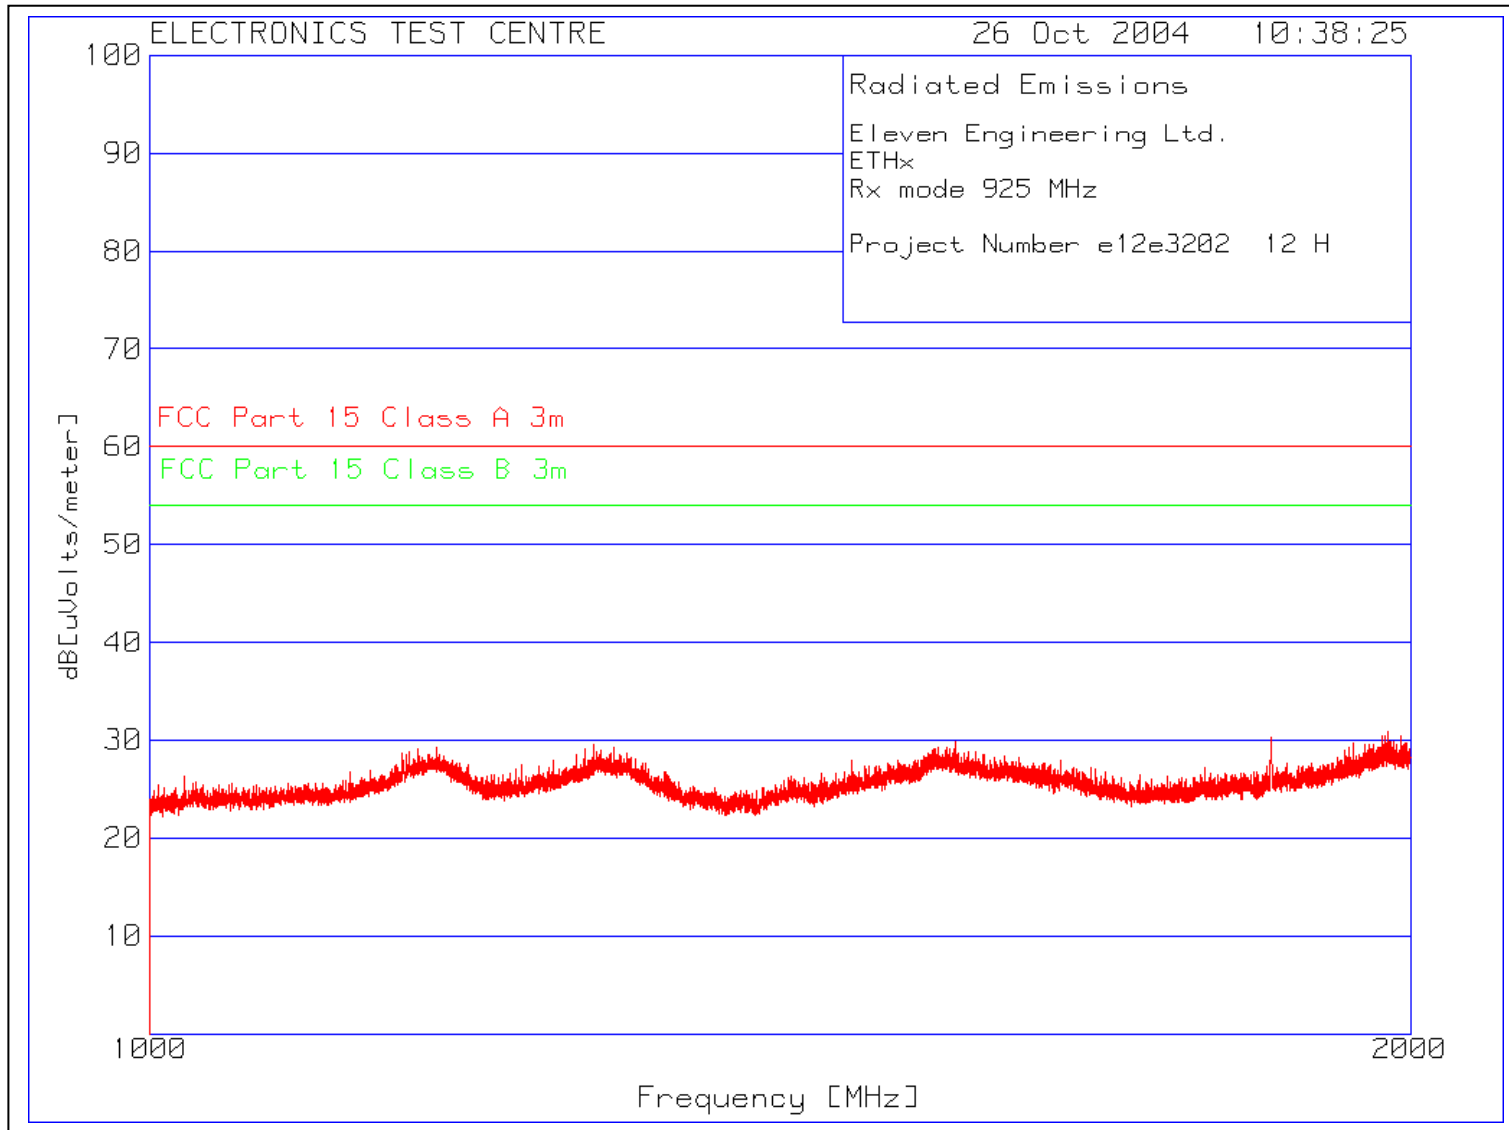


Plot of Radiated Emissions:

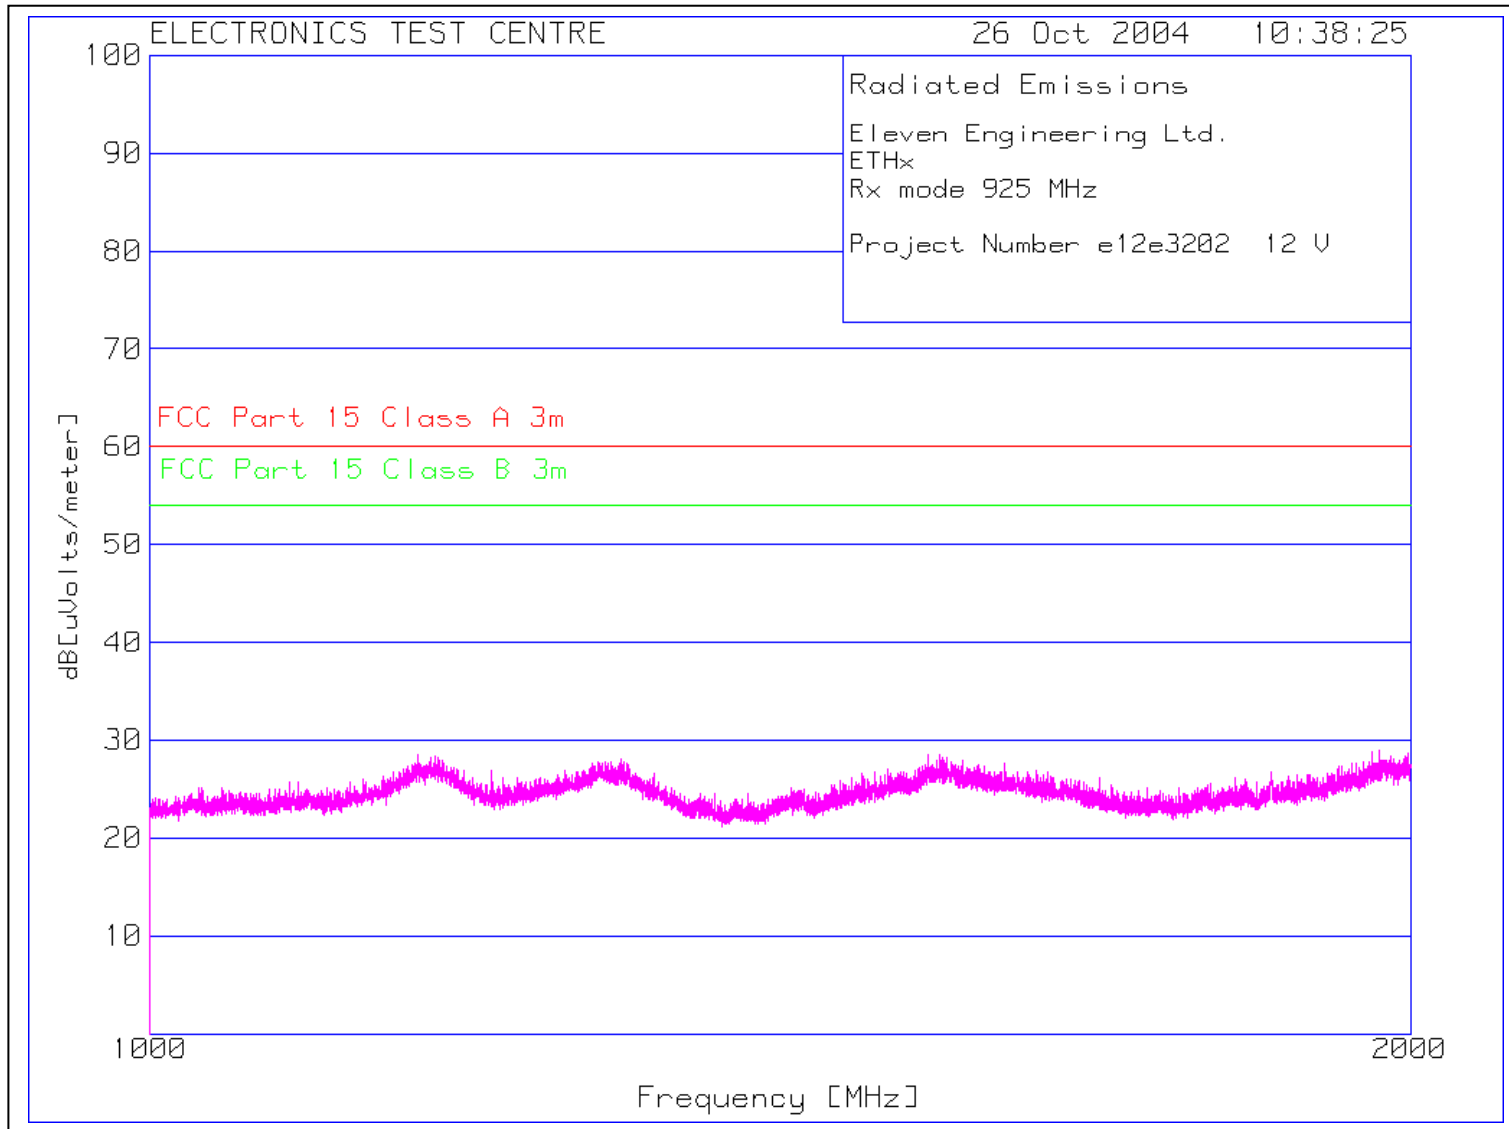

Plot of Radiated Emissions:

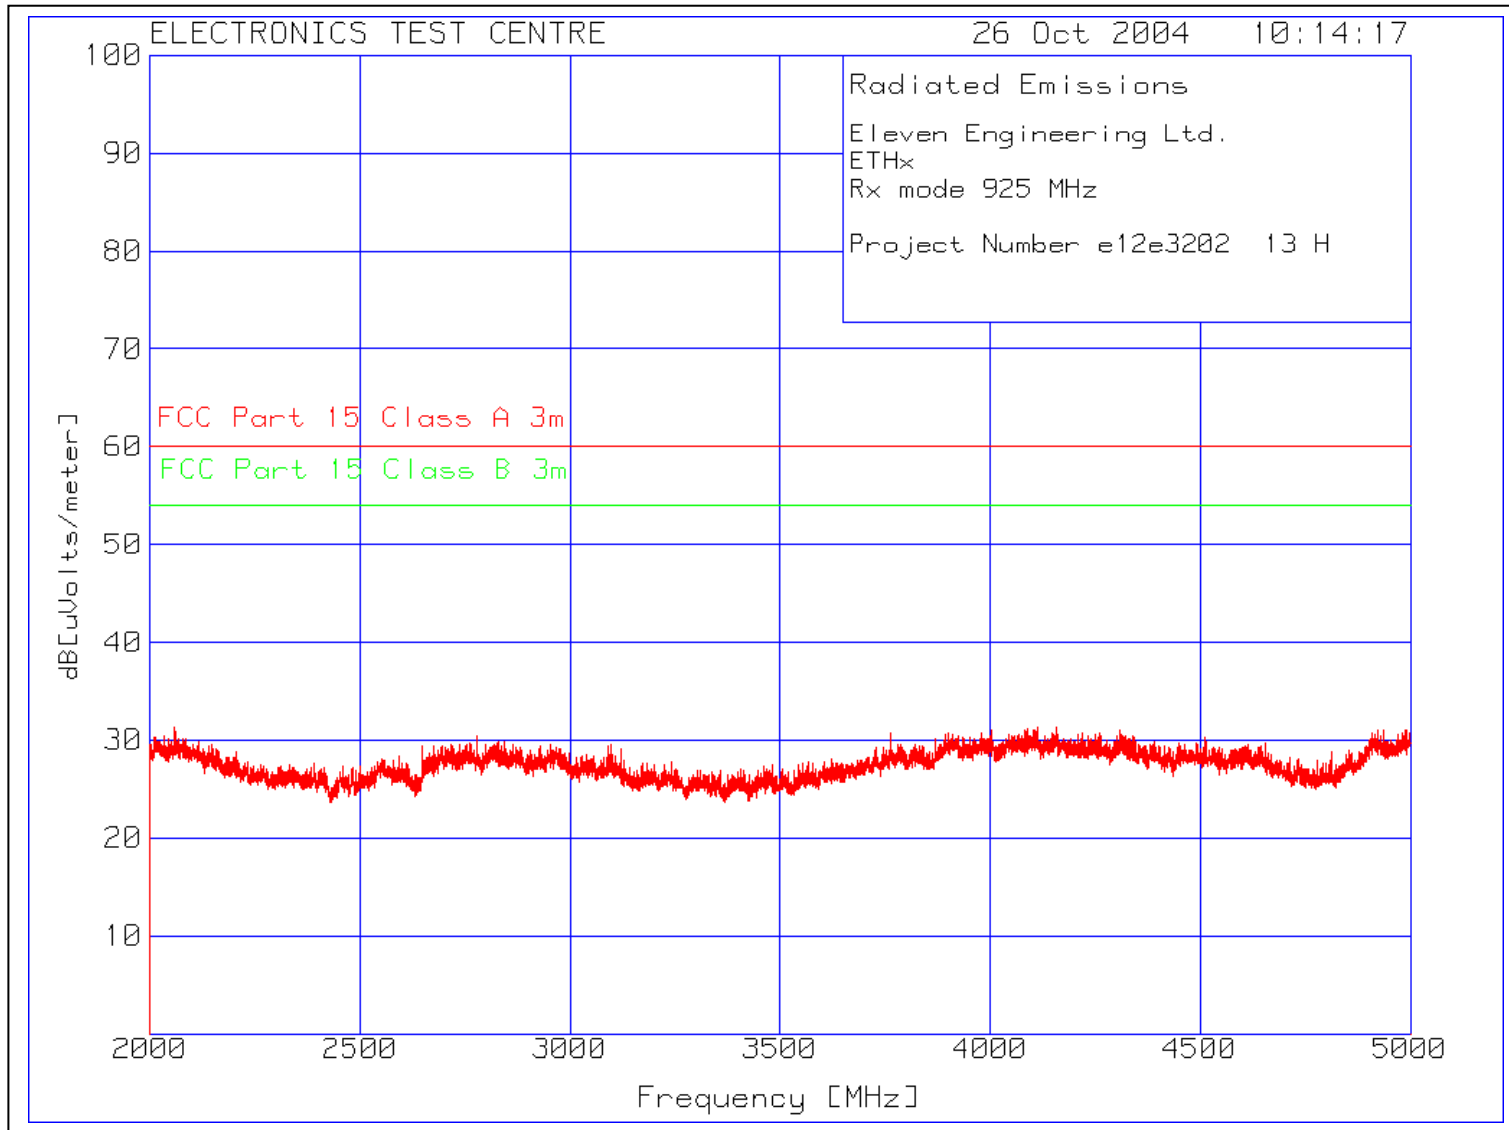

Plot of Radiated Emissions:

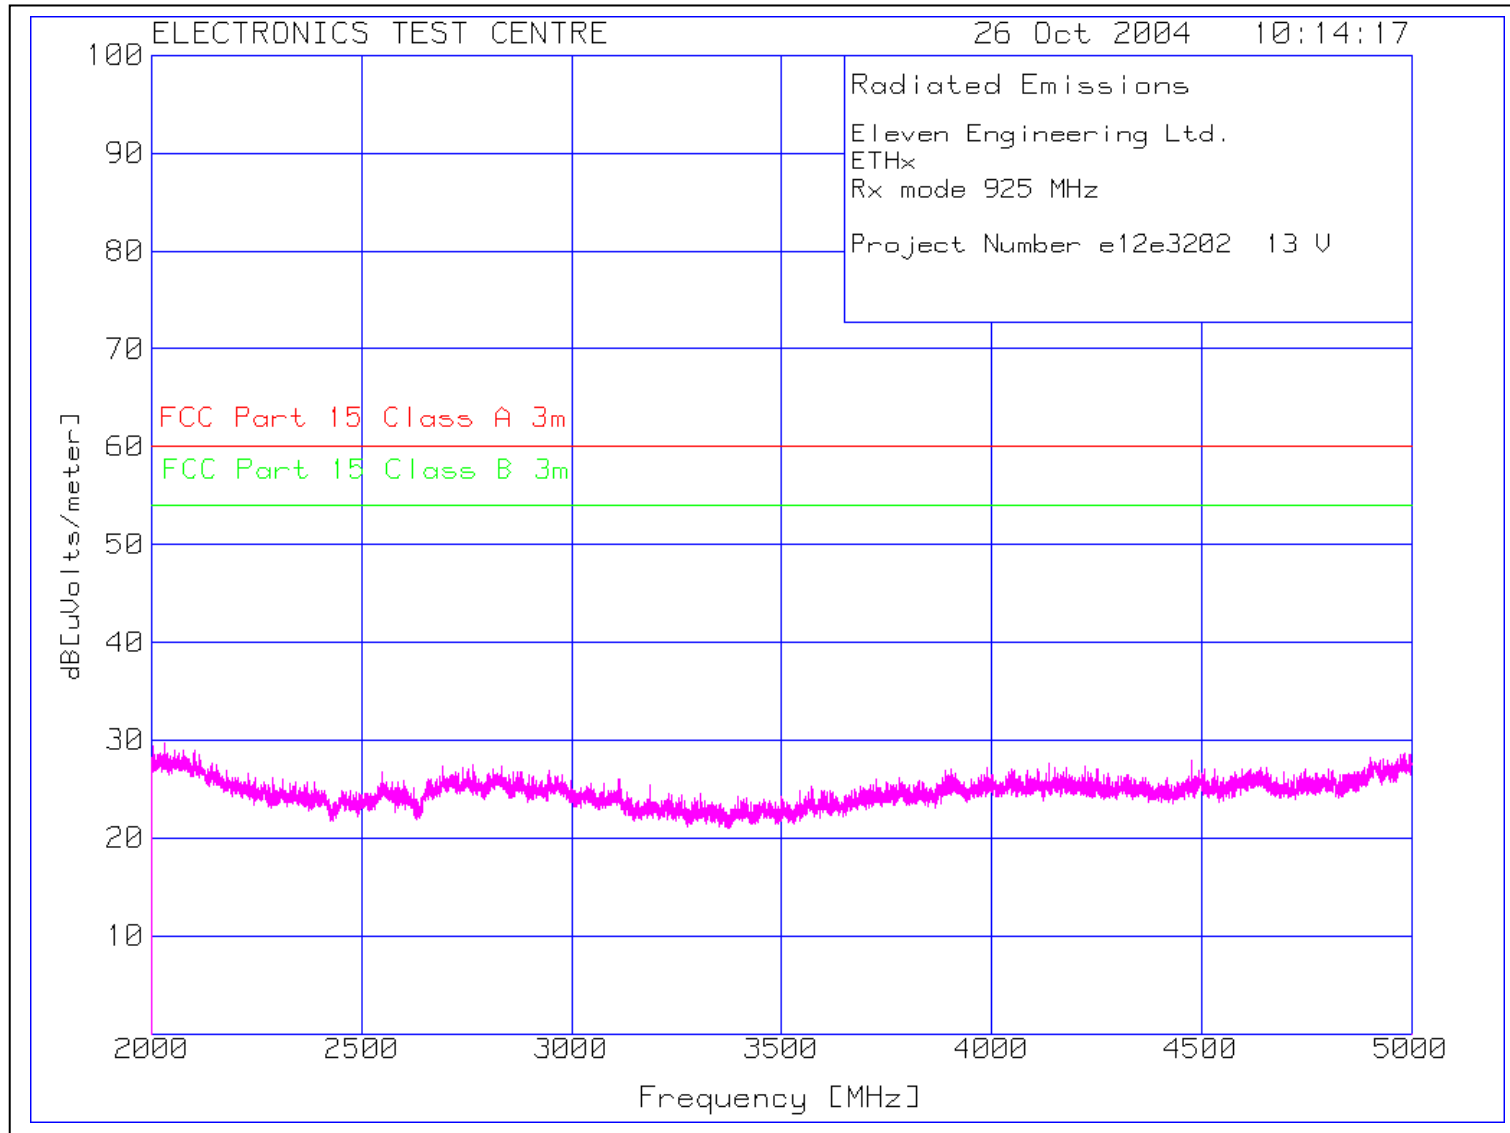

This page intentionally left blank

**4.3b Transmit Mode**

Test Lab: Electronics Test Centre (Airdrie) Test Personnel: David Raynes Test Date: 25 & 26 October 2004		Product: ETHx																	
<b>Test Result, EUM3003: PASS</b>																			
<b>Objectives/Criteria</b> The Radiated E-Field emissions produced by EUT, measured at a distance of 3m, shall not exceed these limits within the restricted bands of operation. Any emissions lying outside these bands (except harmonics), shall be at least 50 dB down from the level of the fundamental. Attenuation below the limits of 15.209 is not required.  Note: See the table below for the Restricted Bands of Operation per Part 15.205		<b>Specification: FCC Part 15.209</b> <table border="1"> <thead> <tr> <th>Frequency [MHz]</th> <th>Limit (QP @ 3m) [dB<math>\mu</math>V/m]</th> </tr> </thead> <tbody> <tr> <td>.009 – 0.490</td> <td>88.5 – 53.8</td> </tr> <tr> <td>.490 – 1.7</td> <td>53.8 – 43</td> </tr> <tr> <td>1.7 – 30</td> <td>49.50</td> </tr> <tr> <td>30 – 88</td> <td>40.00</td> </tr> <tr> <td>88 – 216</td> <td>43.52</td> </tr> <tr> <td>216 – 960</td> <td>46.02</td> </tr> <tr> <td>above 960</td> <td>53.98</td> </tr> </tbody> </table> <p><b>Emission levels should meet the requirements with a margin of 6dB.</b></p>		Frequency [MHz]	Limit (QP @ 3m) [dB $\mu$ V/m]	.009 – 0.490	88.5 – 53.8	.490 – 1.7	53.8 – 43	1.7 – 30	49.50	30 – 88	40.00	88 – 216	43.52	216 – 960	46.02	above 960	53.98
Frequency [MHz]	Limit (QP @ 3m) [dB $\mu$ V/m]																		
.009 – 0.490	88.5 – 53.8																		
.490 – 1.7	53.8 – 43																		
1.7 – 30	49.50																		
30 – 88	40.00																		
88 – 216	43.52																		
216 – 960	46.02																		
above 960	53.98																		
The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:																			
Carrier Frequency	Field Strength of Fundamental Frequency [millivolts/meter]	Field Strength of Fundamental Harmonics [ $\mu$ V/meter]																	
902-928 MHz	50 (93.98 dB $\mu$ V/meter)	500 (53.98 dB $\mu$ V/meter)																	
2400-2483.5 MHz	50 (93.98 dB $\mu$ V/meter)	500 (53.98 dB $\mu$ V/meter)																	
5725-5875 MHz	50 (93.98 dB $\mu$ V/meter)	500 (53.98 dB $\mu$ V/meter)																	
24.0-24.25 GHz	250 (107.96 dB $\mu$ V/meter)	2500(67.96 dB $\mu$ V/meter)																	

Restricted Bands of Operation per Part 15.205:

MHz	MHz	MHz	MHz	MHz	GHz	GHz
0.0900000 – 0.1100000	8.2910000 - 8.2940000	16.804250 - 16.804750	162.01250 - 167.17000	1660.0000 – 1710.0000	3.6000000 – 4.4000000	14.470000 – 14.500000
0.4950000 - 0.5050000	8.3620000 - 8.3660000	25.500000 - 25.670000	167.72000 - 173.20000	1718.8000 – 1722.2000	4.5000000 – 5.1500000	15.350000 – 16.200000
2.1735000 - 2.1905000	8.3762500 - 8.3867500	37.500000 - 38.250000	240.00000 – 285.00000	2200.0000 – 2300.0000	5.3500000 – 5.4600000	17.700000 – 21.400000
4.1250000 - 4.1280000	8.4142500 - 8.4147500	73.000000 - 74.600000	322.00000 - 335.40000	2310.0000 – 2390.0000	7.2500000 – 7.7500000	22.010000 – 23.120000
4.1772500 - 4.1777500	12.290000 - 12.293000	74.800000 - 75.200000	399.90000 – 410.00000	2483.5000 – 2500.0000	8.0250000 – 8.5000000	23.600000 – 24.000000
4.2072500 - 4.2077500	12.519750 - 12.520250	108.00000 - 121.94000	608.00000 – 614.00000	2655.0000 – 2900.0000	9.0000000 – 9.2000000	31.200000 – 31.800000
5.6770000 - 5.6830000	12.576750 - 12.577250	123.00000 - 138.00000	960.00000 – 1240.0000	3260.0000 – 3267.0000	9.3000000 – 9.5000000	36.430000 – 36.500000
6.2150000 - 6.2180000	13.360000 - 13.410000	149.90000 - 150.05000	1300.0000 – 1427.0000	3332.0000 – 3339.0000	10.600000 – 12.700000	Above 38.600000
6.2677500 - 6.2682500	16.420000 - 16.423000	156.52475 - 156.52525	1435.0000 – 1626.5000	3345.8000 – 3358.0000	13.250000 – 13.400000	
6.3117500 - 6.3122500	16.694750 - 16.695250	156.70000 - 156.90000	1645.5000 – 1646.5000	3500.0000 – 3600.0000		

■ US only     
 ■ Canada 108 – 138 MHz     
 ■ Canada 960 – 1427 MHz     
 ■ Canada only

Radiated Emissions Data: Operation in Restricted Bands

nominal f <sub>c</sub> (MHz)	f (MHz)	Field Strength (dBμV/m) Average	Limit (dBμV/m) Average	Delta (dB)	Antenna Polarization	Antenna Height (cm)	Azimuth (Degrees)
905	2714.1774	22.32	54	-31.68	H	103	137
905	2714.6992	13.20	54	-40.80	V	140	29
905	2717.2016	5.41	54	-48.59	H	103	137
905	2717.1957	2.36	54	-51.64	V	140	29
905	3620.2580	6.32	54	-47.68	V	103	285
915	2750.0756	19.39	54	-34.61	H	262	261
915	2748.6224	18.61	54	-35.39	V	129	115
915	2751.6117	22.77	54	-31.23	V	136	109
915	3666.8430	17.04	54	-36.96	H	264	119
925	2773.5794	22.2	54	-31.8	H	177	139
925	2773.5720	21.85	54	-32.15	V	101	111
925	3700.2441	16.26	54	-37.74	H	202	107
925	3700.2390	16.86	54	-37.14	V	146	281



Carrier Fundamental & Harmonics:

nominal $f_c$ (MHz)	f (MHz)	Field Strength (dB $\mu$ V/m) (Peak)	Limit (dB $\mu$ V/m)	Delta (dB)	Antenna Polarization	Antenna Height (cm)	Azimuth (Degrees)
905	905.2135	90.67	93.98 (qp)	-3.31	H	100	145
905	905.7060	93.88	93.98 (qp)	-0.01	V	118	42
905	1810.4563	22.80	53.98 (avg)	-31.18	H	124	52
905	1809.9960	9.59	53.98 (avg)	-44.39	V	117	14
905	2714.1774	22.32	53.98 (avg)	-31.66	H	103	137
905	2714.6992	13.20	53.98 (avg)	-40.78	V	140	29
905	2717.2016	5.41	53.98 (avg)	-48.57	H	103	137
905	2717.1957	2.36	53.98 (avg)	-51.62	V	140	29
905	3620.2580	6.32	53.98 (avg)	-47.66	V	103	285
915	916.3735	89.83	93.98 (qp)	-4.15	H	101	135
915	916.0470	93.23	93.98 (qp)	-0.75	V	121	332
915	1833.1287	2.86	53.98 (avg)	-51.12	H	108	32
915	1833.3256	10.09	53.98 (avg)	-43.89	V	117	14
915	2750.0756	19.39	53.98 (avg)	-34.59	H	262	261
915	2748.6224	18.61	53.98 (avg)	-35.37	V	129	115
915	2751.6117	22.77	53.98 (avg)	-31.21	V	136	109
915	3666.8430	17.04	53.98 (avg)	-36.94	H	264	119
925	925.6700	90.09	93.98	-3.89	H	154	117
925	925.5260	92.09	93.98	-1.89	V	116	96
925	1850.1235	12.55	53.98 (avg)	-41.43	H	108	32
925	1850.1144	14.06	53.98 (avg)	-39.92	V	157	23
925	2773.5794	22.20	53.98 (avg)	-31.78	H	177	139
925	2773.5720	21.85	53.98 (avg)	-32.13	V	101	111
925	3700.2441	16.26	53.98 (avg)	37.72	H	202	107
925	3700.2390	16.86	53.98 (avg)	-37.12	V	146	281

Notes:

Investigation was performed to 10 GHz.

All other carrier harmonics were below the measuring equipment noise floor, that is  $\leq 40$  dB $\mu$ V/m.

Eleven Engineering Ltd.  
ETHx  
Tx mode 905 MHz  
Project Number e12e3202-1 07

Test Frequency [MHz]	Meter Reading [dB(uV)]	Gain/Loss Factor [dB]	Transducer Factor [dB]	Level dB[uVolts/meter]	Limit:1	2	3	4
Range: 1 30 - 1000MHz								
49.9819	5.29 qp	2.11	13.49	20.89	49.54	50	40	40.46
Azimuth: 45		Height: 137Horz		Margin [dB]:	-28.65	-29.11	-19.11	-19.57
199.9859	17.16 qp	3.86	9.6	30.62	53.98	50	43.52	40.46
Azimuth: 219		Height: 100Horz		Margin [dB]:	-23.36	-19.38	-12.9	-9.84
249.9842	23.55 qp	4.42	11.2	39.17	56.9	57	46.02	47.46
Azimuth: 214		Height: 123Horz		Margin [dB]:	-17.73	-17.83	-6.85	-8.29
299.9894	23.83 qp	4.69	12.63	41.15	56.9	57	46.02	47.46
Azimuth: 208		Height: 101Horz		Margin [dB]:	-115.75	-15.85	-4.87	-6.31
399.9867	16.61 qp	5.53	14.6	36.74	56.9	57	46.02	47.46
Azimuth: 236		Height: 257Horz		Margin [dB]:	-20.16	-20.26	-9.28	-10.72
449.9855	18.04 qp	5.81	15.3	39.15	56.9	57	46.02	47.46
Azimuth: 220		Height: 182Horz		Margin [dB]:	-17.75	-17.85	-6.87	-8.31
749.9923	10.59 qp	7.37	19.7	37.66	56.9	57	46.02	47.46
Azimuth: 207		Height: 101Horz		Margin [dB]:	-19.24	-19.34	-8.36	-9.8

LIMIT 1: FCC Part 15 Class A 3m  
 LIMIT 2: ICES-003 Class A 3m  
 LIMIT 3: FCC Part 15 Class B 3m ←  
 LIMIT 4: ICES-003 Class B 3m

qp - Quasi-Peak detector


Eleven Engineering Ltd.  
ETHx  
Tx mode 905 MHz  
Project Number e12e3202-1 07

Test Frequency [MHz]	Meter Reading [dB(uV)]	Gain/Loss Factor [dB]	Transducer Factor [dB]	Level dB[uVolts/meter]	Limit:1	2	3	4	
=====									
Range: 2 30 - 1000MHz									
39.9822	3.64 qp	1.59	13.7	18.93	49.54	50	40	40.46	
Azimuth: 264 Height: 101Vert					Margin [dB]:	-30.61	-31.07	-21.07	-21.53
49.9923	19.03 qp	2.11	11.09	32.23	49.54	50	40	40.46	
Azimuth: 313 Height: 101Vert					Margin [dB]:	-17.31	-17.77	-7.77	-8.23
80.0073	24.01 qp	2.57	6.15	32.73	49.54	50	40	40.46	
Azimuth: 352 Height: 116Vert					Margin [dB]:	-16.81	-17.27	-7.27	-7.73
99.9807	20.05 qp	2.61	9.26	31.92	53.98	50	43.52	40.46	
Azimuth: 9 Height: 106 Vert					Margin [dB]:	-22.06	-18.08	-11.6	-8.54
139.937	13.28 qp	3.28	8.59	25.15	53.98	50	43.52	40.46	
Azimuth: 14 Height: 109Vert					Margin [dB]:	-28.83	-24.85	-18.37	-15.31
149.9805	23.65 qp	3.41	8.12	35.18	53.98	50	43.52	40.46	
Azimuth: 16 Height: 100Vert					Margin [dB]:	-18.8	-14.82	-8.34	-5.28
169.9863	18.7 qp	3.48	8.9	31.08	53.98	50	43.52	40.46	
Azimuth: 167 Height: 104Vert					Margin [dB]:	-22.9	-18.92	-12.44	-9.38
249.986	14.77 qp	4.42	11.33	30.52	56.9	57	46.02	47.46	
Azimuth: 269 Height: 168Vert					Margin [dB]:	-26.38	-26.48	-15.5	-16.94
299.9843	25.5 qp	4.69	12.46	42.65	56.9	57	46.02	47.46	
Azimuth: 185 Height: 165Vert					Margin [dB]:	-14.25	-14.35	-3.37	-4.81
349.9868	17.35 qp	5.07	13.59	36.01	56.9	57	46.02	47.46	
Azimuth: 87 Height: 116Vert					Margin [dB]:	-20.89	-20.99	-10.01	-11.45
399.9868	20.24 qp	5.53	14.4	40.17	56.9	57	46.02	47.46	
Azimuth: 87 Height: 116Vert					Margin [dB]:	-16.73	-16.83	-5.85	-7.29
449.9887	18.65 qp	5.81	15.32	39.78	56.9	57	46.02	47.46	
Azimuth: 327 Height: 123Vert					Margin [dB]:	-17.12	-17.22	-6.24	-7.68


LIMIT 1: FCC Part 15 Class A 3m  
 LIMIT 2: ICES-003 Class A 3m  
 LIMIT 3: FCC Part 15 Class B 3m ←  
 LIMIT 4: ICES-003 Class B 3m

qp - Quasi-Peak detector

Plot of Radiated Emissions:

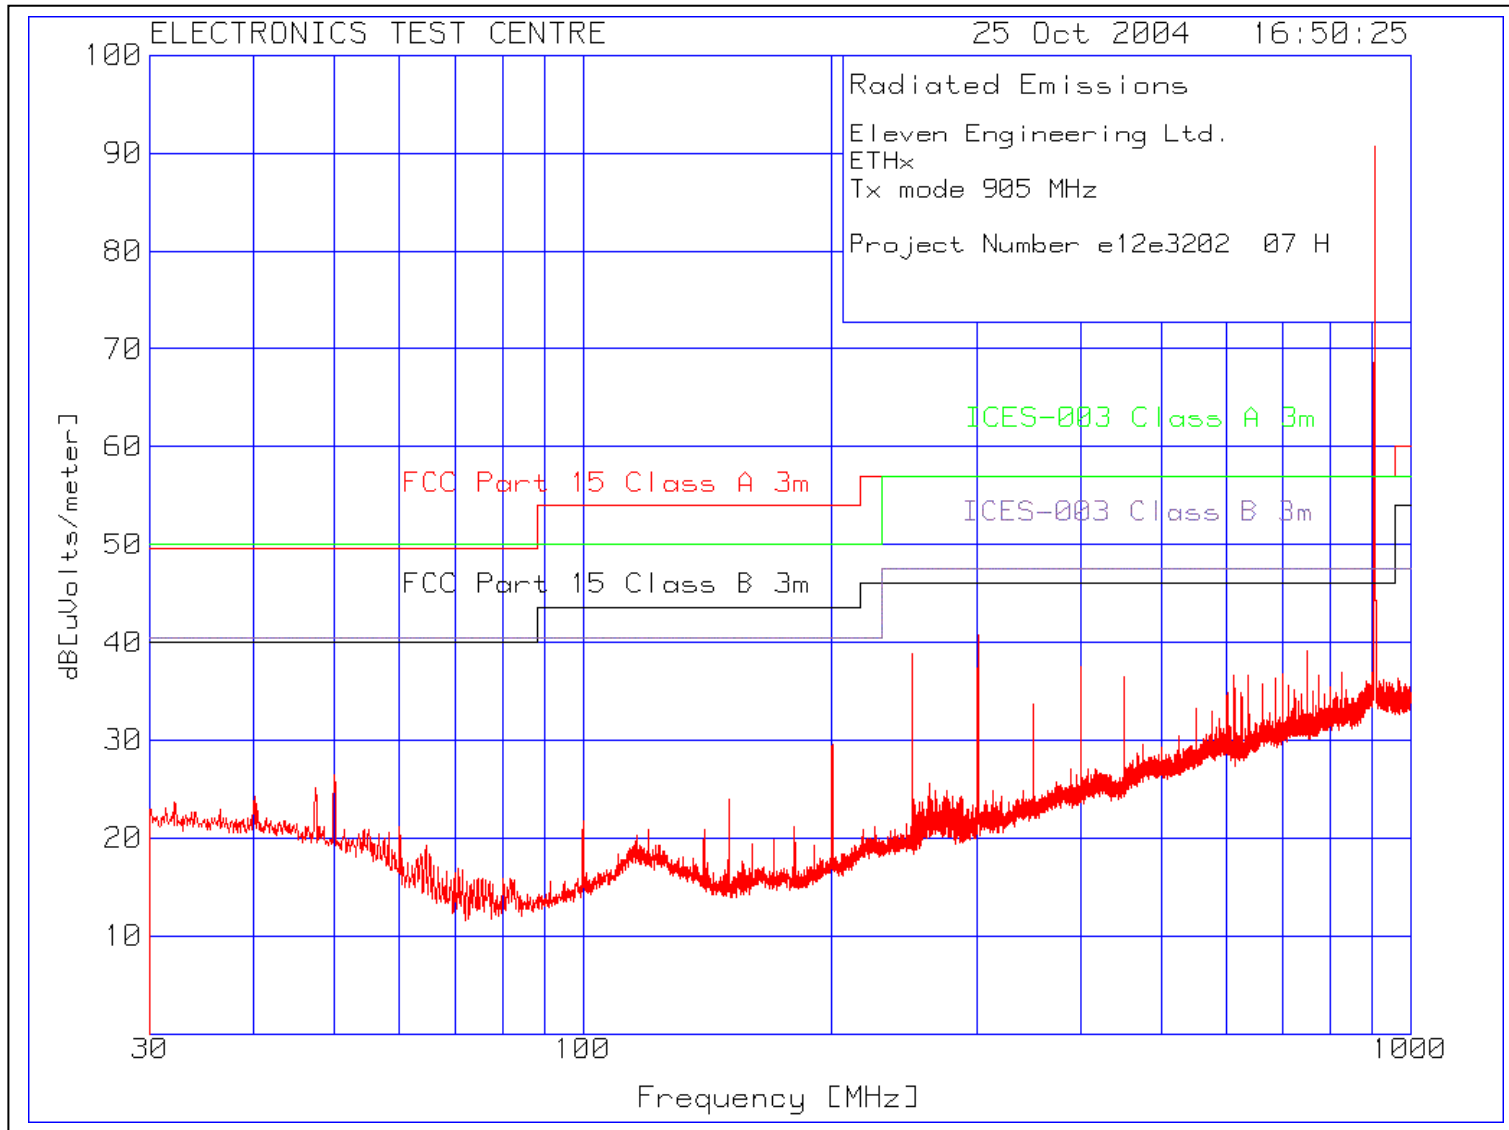

Plot of Radiated Emissions:

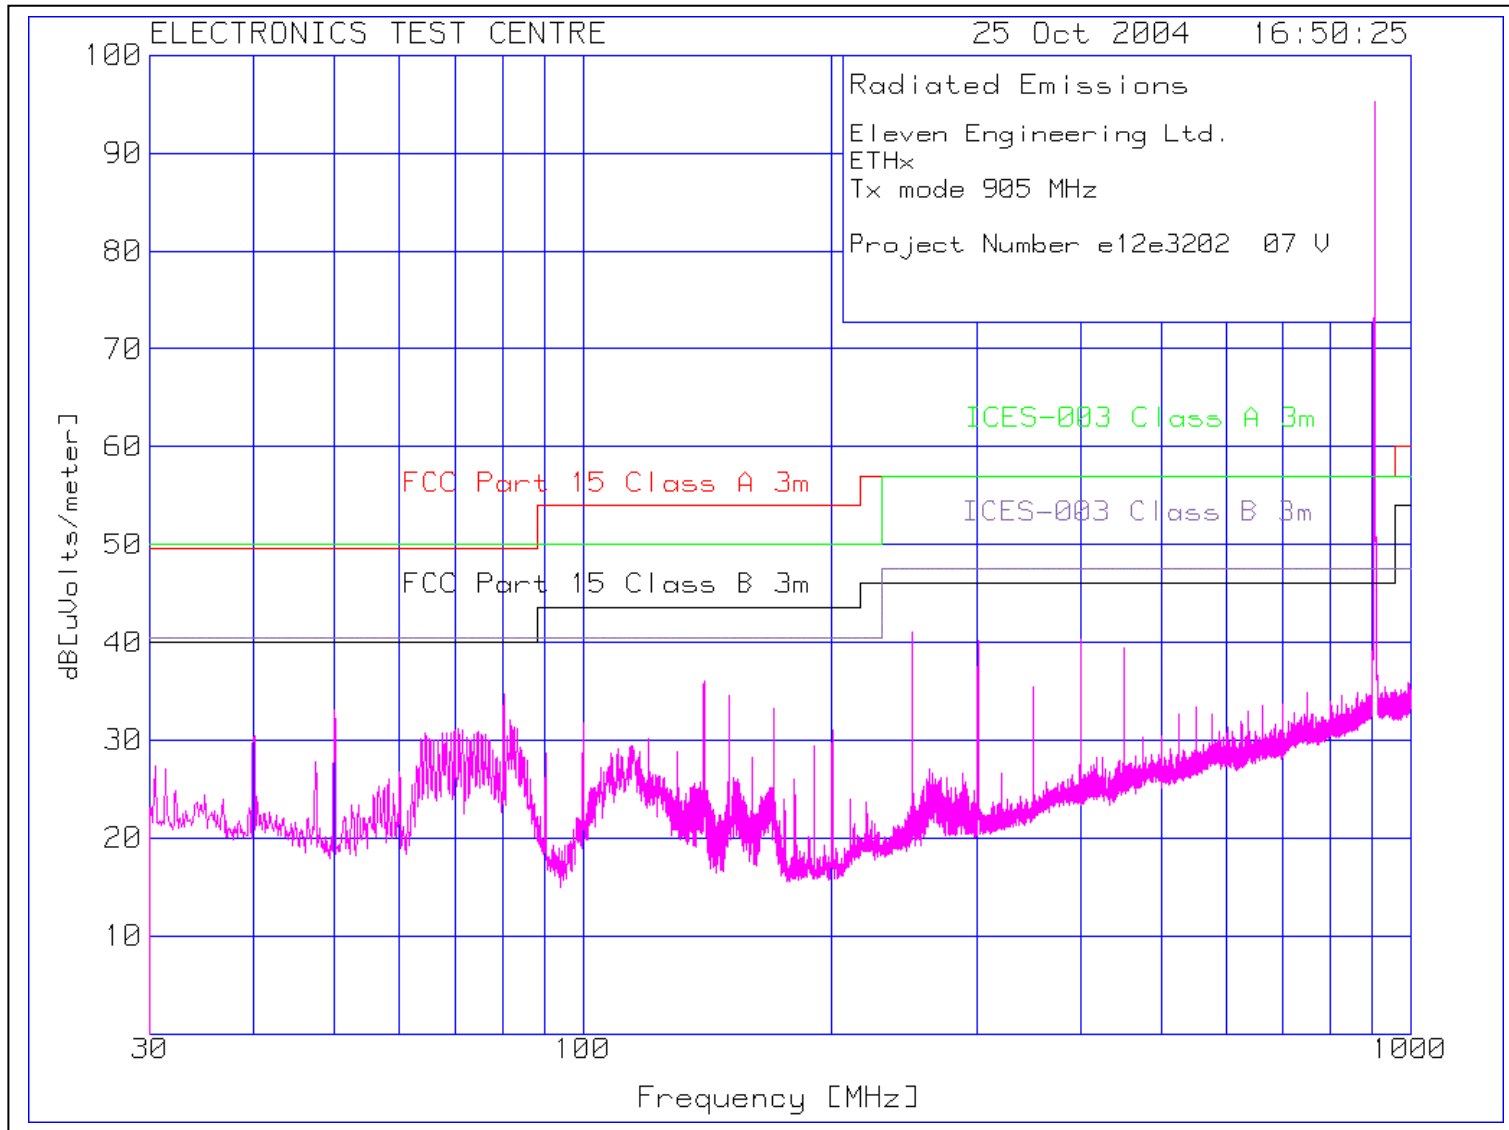

This page intentionally left blank

Eleven Engineering Ltd.  
ETHx  
Tx mode 915 MHz  
Project Number e12e3202-1 08

Test Frequency [MHz]	Meter Reading [dB(uV)]	Gain/Loss Factor [dB]	Transducer Factor [dB]	Level dB[uVolts/meter]	Limit:1	2	3	4
=====								
Range: 1 30 - 1000MHz								
249.9841	23.32 qp	4.42	11.2	38.94	56.9	57	46.02	47.46
Azimuth: 211 Height: 125			Horz Margin [dB]:		-17.96	-18.06	-7.08	-8.52
299.9839	23.16 qp	4.69	12.63	40.48	56.9	57	46.02	47.46
Azimuth: 200 Height: 106			Horz Margin [dB]:		-16.42	-16.52	-5.54	-6.98
399.9864	17.27 qp	5.53	14.6	37.4	56.9	57	46.02	47.46
Azimuth: 237 Height: 249			Horz Margin [dB]:		-19.5	-19.6	-8.62	-10.06
749.99	10.46 qp	7.37	19.7	37.53	56.9	57	46.02	47.46
Azimuth: 208 Height: 102			Horz Margin [dB]:		-19.37	-19.47	-8.49	-9.93

LIMIT 1: FCC Part 15 Class A 3m  
 LIMIT 2: ICES-003 Class A 3m  
 LIMIT 3: FCC Part 15 Class B 3m ←  
 LIMIT 4: ICES-003 Class B 3m

qp - Quasi-Peak detector

Eleven Engineering Ltd.  
ETHx  
Tx mode 915 MHz  
Project Number e12e3202-1 08


Test Frequency [MHz]	Meter Reading [dB(uV)]	Gain/Loss Factor [dB]	Transducer Factor [dB]	Level dB[uVolts/meter]	Limit:1	2	3	4	
=====									
Range: 2 30 - 1000MHz									
39.9862	12.53 qp	1.59	13.7	27.82	49.54	50	40	40.46	
Azimuth: 253 Height: 110 Vert					Margin [dB]:	-21.72	-22.18	-12.18	-12.64
49.9826	19.53 qp	2.11	11.09	32.73	49.54	50	40	40.46	
Azimuth: 359 Height: 102 Vert					Margin [dB]:	-16.81	-17.27	-7.27	-7.73
74.0631	20.61 qp	2.45	6.7	29.76	49.54	50	40	40.46	
Azimuth: 1 Height: 100 Vert					Margin [dB]:	-19.78	-20.24	-10.24	-10.7
74.5863	25.33 qp	2.46	6.7	34.49	49.54	50	40	40.46	
Azimuth: 358 Height: 101 Vert					Margin [dB]:	-15.05	-15.51	-5.51	-5.97
79.9779	24.4 qp	2.57	6.15	33.12	49.54	50	40	40.46	
Azimuth: 349 Height: 117 Vert					Margin [dB]:	-16.42	-16.88	-6.88	-7.34
249.9838	21.44 qp	4.42	11.33	37.19	56.9	57	46.02	47.46	
Azimuth: 268 Height: 100 Vert					Margin [dB]:	-19.71	-19.81	-8.83	-10.27
299.987	25.2 qp	4.69	12.46	42.35	56.9	57	46.02	47.46	
Azimuth: 170 Height: 168 Vert					Margin [dB]:	-14.55	-14.65	-3.67	-5.11
399.9873	20.21 qp	5.53	14.4	40.14	56.9	57	46.02	47.46	
Azimuth: 128 Height: 119 Vert					Margin [dB]:	-16.76	-16.86	-5.88	-7.32
449.9871	18.83 qp	5.81	15.32	39.37	56.9	57	46.02	47.46	
Azimuth: 327 Height: 121 Vert					Margin [dB]:	-16.94	-17.04	-6.06	-7.5

LIMIT 1: FCC Part 15 Class A 3m  
 LIMIT 2: ICES-003 Class A 3m  
 LIMIT 3: FCC Part 15 Class B 3m ←  
 LIMIT 4: ICES-003 Class B 3m


qp - Quasi-Peak detector



Plot of Radiated Emissions:

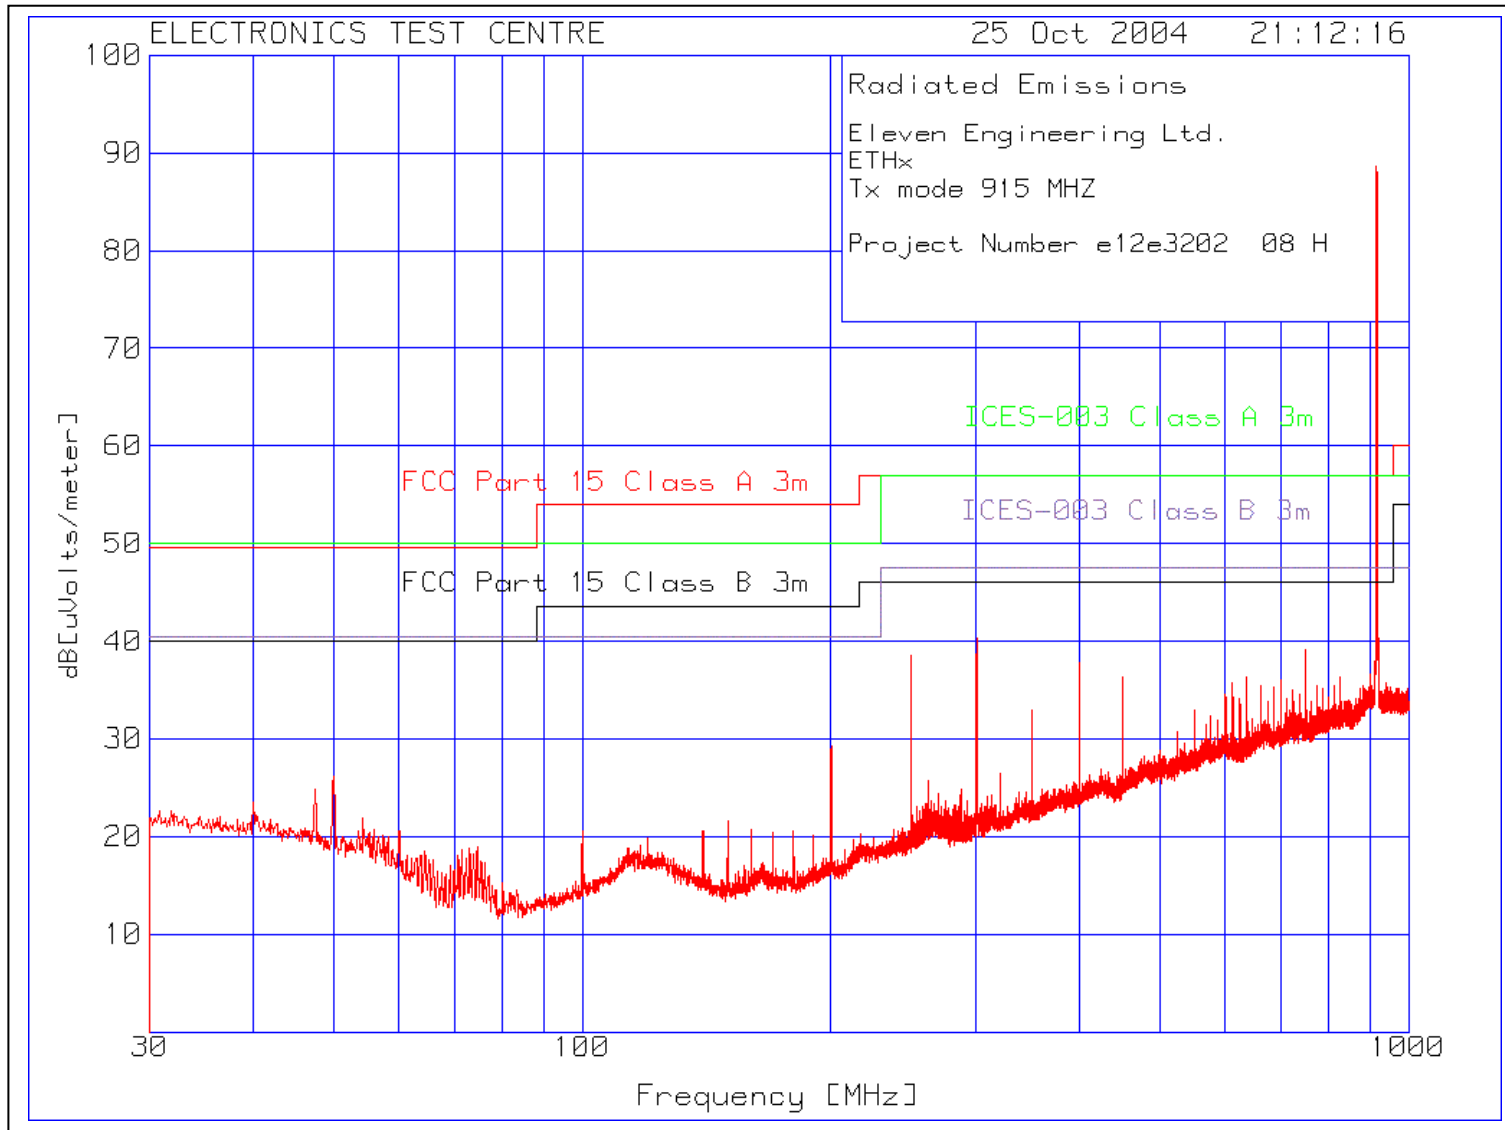

Plot of Radiated Emissions:

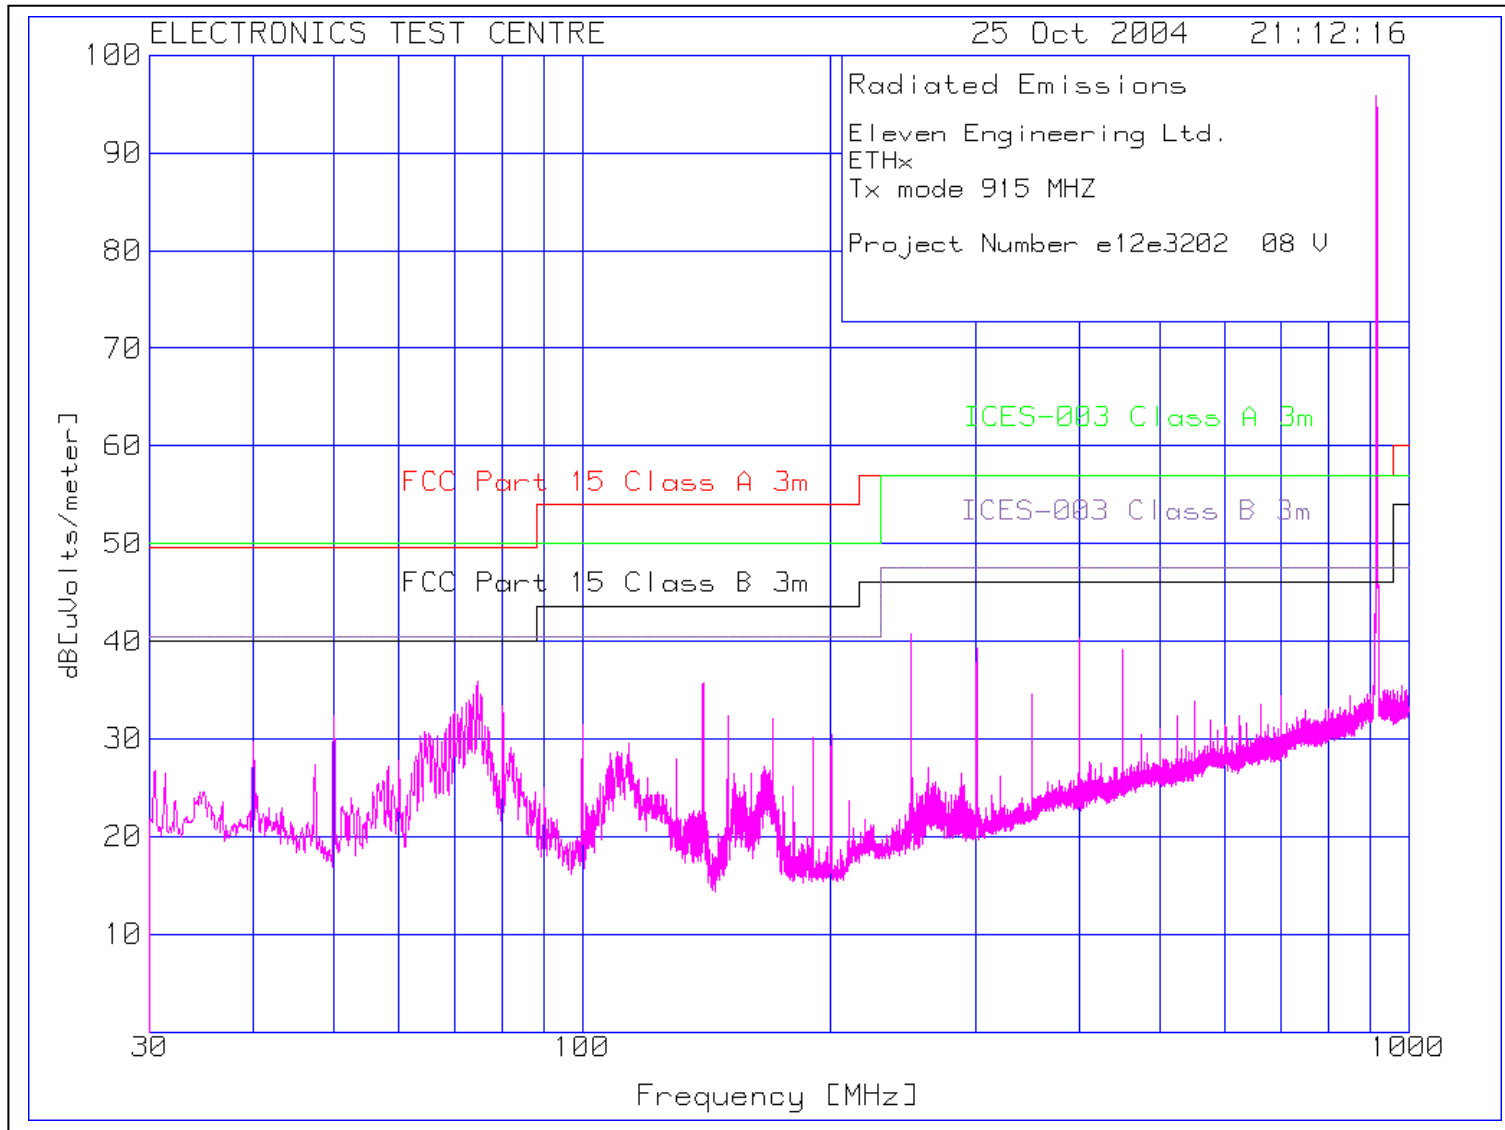

Eleven Engineering Ltd.  
ETHx  
Tx mode 925 MHz  
Project Number e12e3202-1 05

Test Frequency [MHz]	Meter Reading [dB(uV)]	Gain/Loss Factor [dB]	Transducer Factor [dB]	Level dB[uVolts/meter]	Limit:1	2	3	4
=====								
Range: 1 30 - 1000MHz								
50.0055	12.08 qp	2.11	13.48	27.67	49.54	50	40	40.46
Azimuth: 124		Height: 176		Horz Margin [dB]:		-	-	-
200.007	16.2 qp	3.86	9.59	29.65	53.98	50	40	40.46
Azimuth: 217		Height: 103		Horz Margin [dB]:		-24.33	-20.35	-13.87
250.0044	23.35 qp	4.42	11.2	38.97	56.9	57	46.02	47.46
Azimuth: 208		Height: 120		Horz Margin [dB]:		-17.93	-18.03	-7.05
300.0053	24.22 qp	4.69	12.63	41.54	56.9	57	46.02	47.46
Azimuth: 201		Height: 105		Horz Margin [dB]:		-15.36	-15.46	-4.48
350.0073	15.1 qp	5.07	13.71	33.88	56.9	57	46.02	47.46
Azimuth: 228		Height: 101		Horz Margin [dB]:		-23.02	-23.12	-12.14
400.0064	17.23 qp	5.53	14.6	37.36	56.9	57	46.02	47.46
Azimuth: 235		Height: 248		Horz Margin [dB]:		-19.54	-19.64	-8.66
450.0078	17.88 qp	5.81	15.3	38.99	56.9	57	46.02	47.46
Azimuth: 222		Height: 184		Horz Margin [dB]:		-17.91	-18.01	-7.03
750.0107	10.01 qp	7.37	19.7	37.08	56.9	57	46.02	47.46
Azimuth: 14		Height: 106		Horz Margin [dB]:		-19.82	-19.92	-8.94

LIMIT 1: FCC Part 15 Class A 3m  
 LIMIT 2: ICES-003 Class A 3m  
 LIMIT 3: FCC Part 15 Class B 3m ←  
 LIMIT 4: ICES-003 Class B 3m

qp - Quasi-Peak detector


Eleven Engineering Ltd.  
ETHx  
Tx mode 925 MHz  
Project Number e12e3202-1 05

Test Frequency [MHz]	Meter Reading [dB(uV)]	Gain/Loss Factor [dB]	Transducer Factor [dB]	Level dB[uVolts/meter]	Limit:1	2	3	4
=====								
Range: 2 30 - 1000MHz								
50.0023	18.84 qp	2.11	11.08	32.03	49.54	50	40	40.46
Azimuth: 343 Height: 101Vert					Margin [dB]:	-17.51	-17.97	-8.43
100.0032	22.07 qp	2.61	9.27	33.95	53.98	50	43.52	40.46
Azimuth: 15 Height: 107Vert					Margin [dB]:	-20.03	-16.05	-6.51
150.0015	21.96 qp	3.41	8.11	33.48	53.98	50	43.52	40.46
Azimuth: 313 Height: 102Vert					Margin [dB]:	-20.5	-16.52	-6.98
250.005	22.89 qp	4.42	11.33	38.64	56.9	57	46.02	47.46
Azimuth: 179 Height: 200Vert					Margin [dB]:	-18.26	-18.36	-8.82
300.0232	25.21 qp	4.69	12.46	42.36	56.9	57	46.02	47.46
Azimuth: 192 Height: 170Vert					Margin [dB]:	-14.54	-14.64	-5.1
400.0047	18.73 qp	5.53	14.4	38.66	56.9	57	46.02	47.46
Azimuth: 348 Height: 153Vert					Margin [dB]:	-18.24	-18.34	-8.8
550.0105	8.79 qp	6.18	16.9	31.87	56.9	57	46.02	47.46
Azimuth: 306 Height: 101Vert					Margin [dB]:	-25.03	-25.13	-15.59


LIMIT 1: FCC Part 15 Class A 3m  
 LIMIT 2: ICES-003 Class A 3m  
 LIMIT 3: FCC Part 15 Class B 3m ←  
 LIMIT 4: ICES-003 Class B 3m

qp - Quasi-Peak detector

Plot of Radiated Emissions:

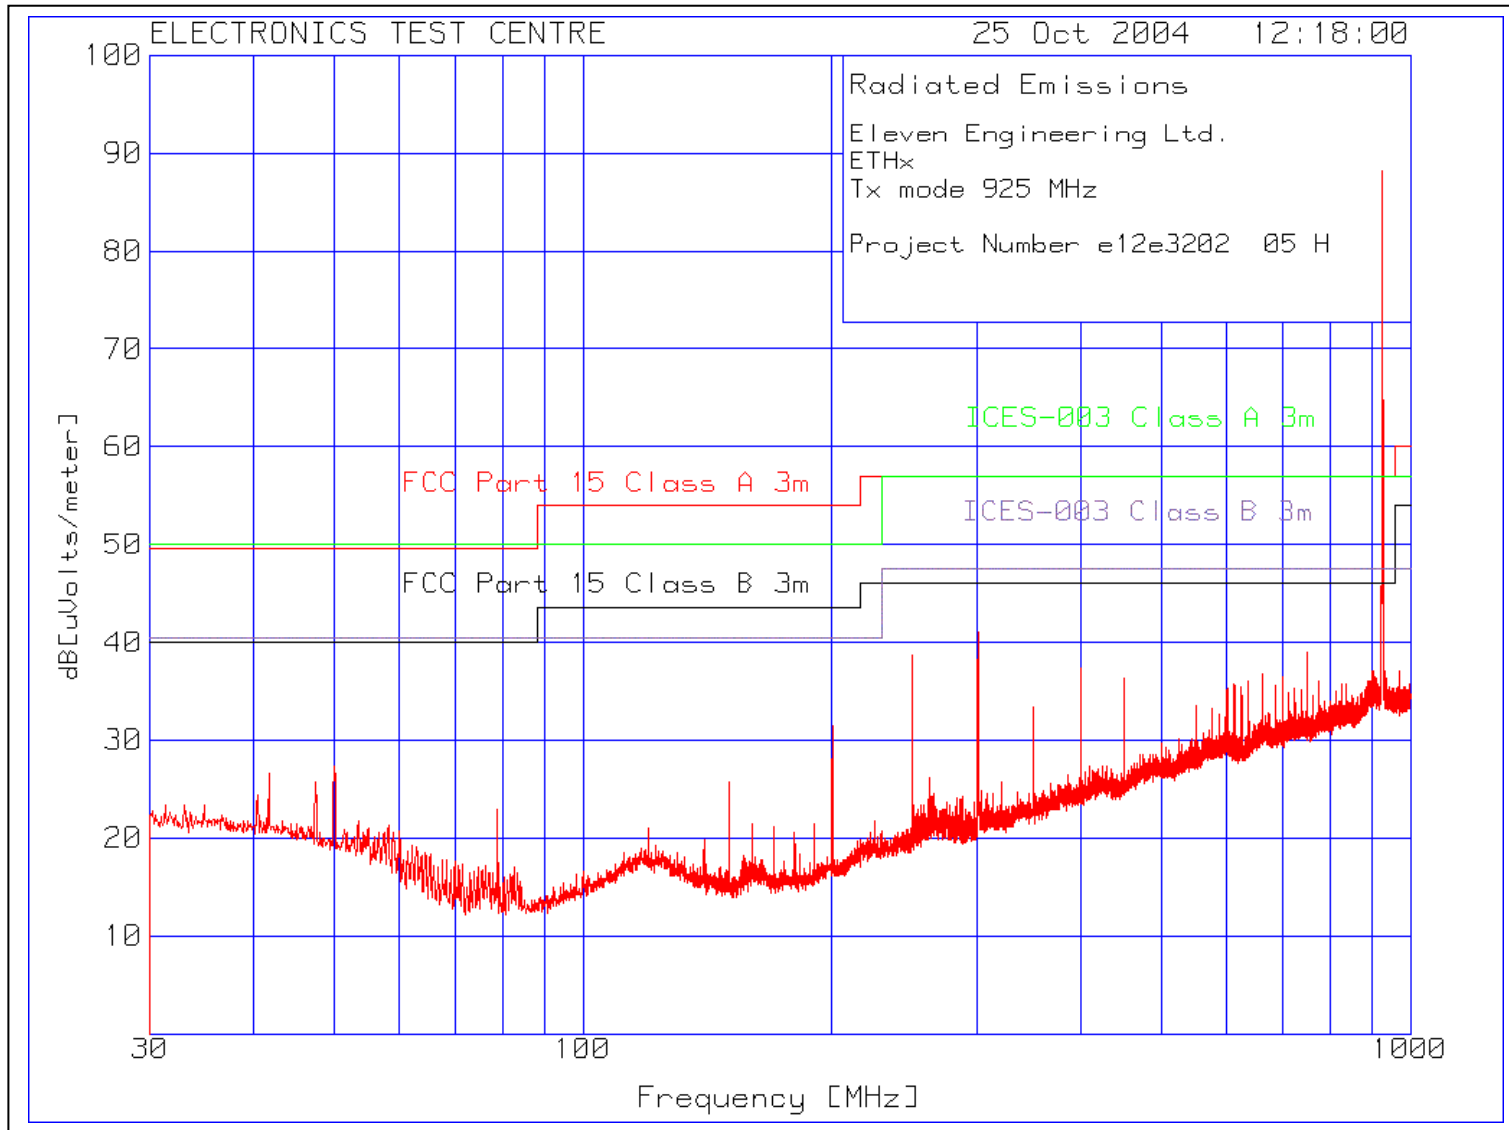

Plot of Radiated Emissions:

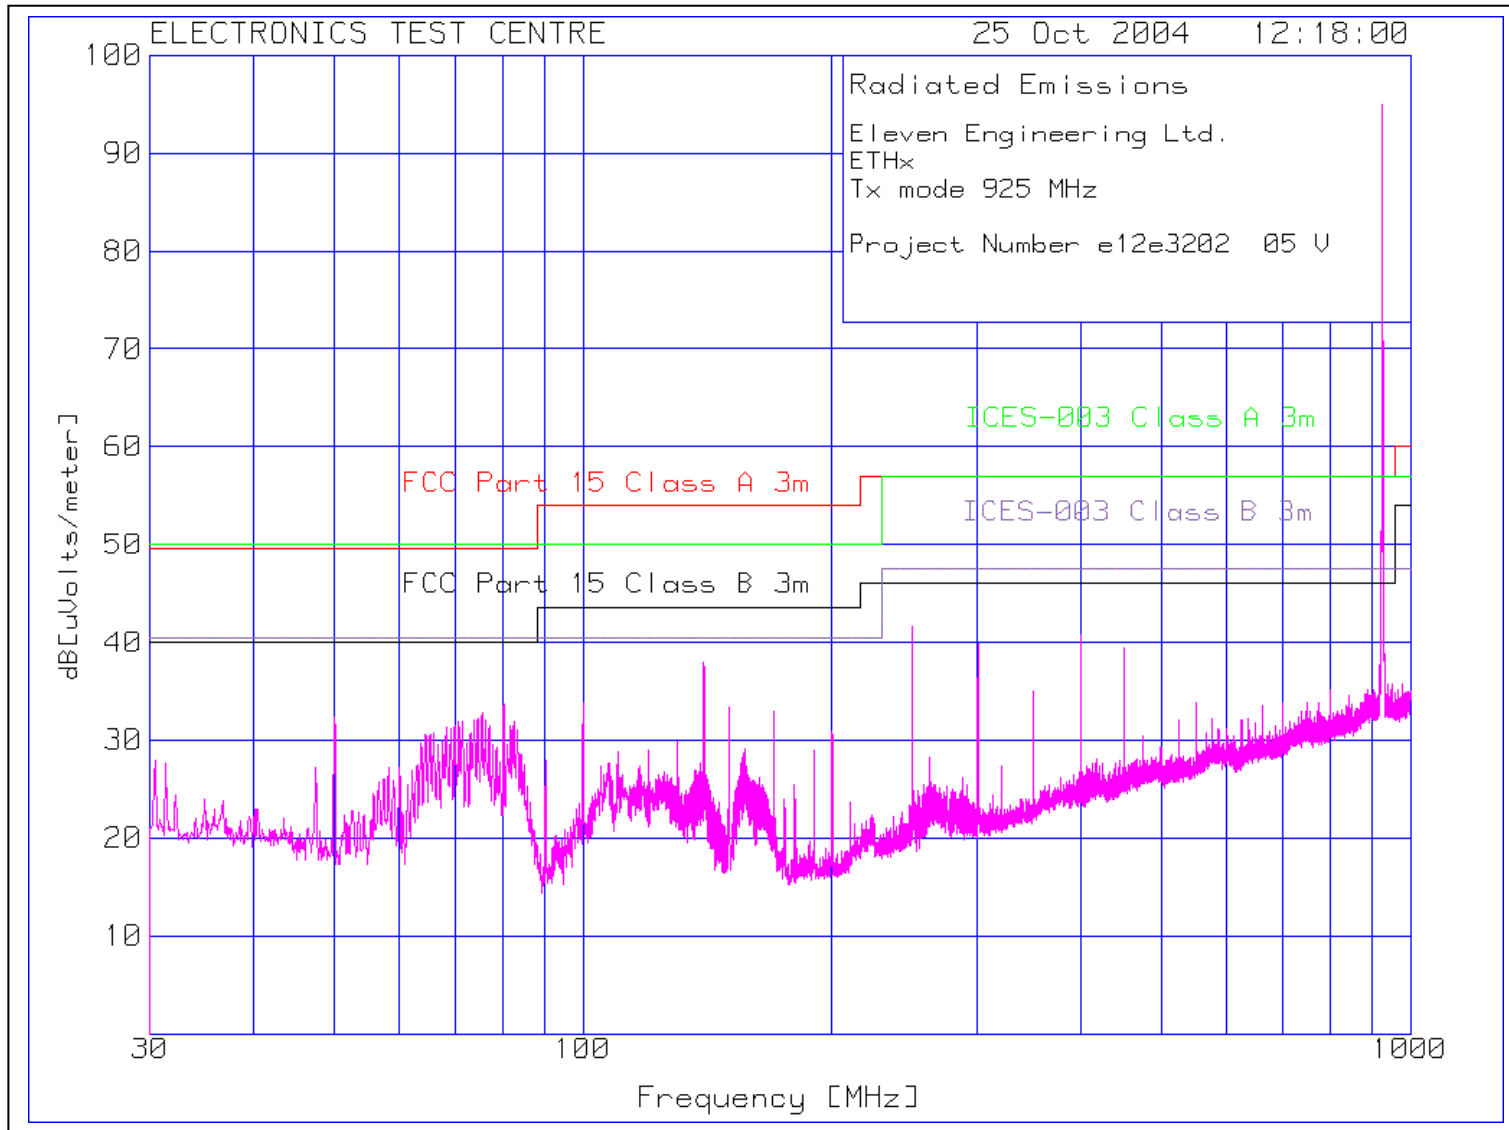

Carrier and spurious emissions: nominal  $f_c = 905$  MHz

Frequency (MHz)	Azimuth (Degrees)	Antenna Height (cm)	Ant. Pol.	EUT Spectrum Analyzer Reading (dBuV)	Substitute Tx Spectrum Analyzer Reading (dBuV)	Power Delivered To Tx Antenna After Cable Loss (dBm)	Corrected Tx Antenna Power (dBm)	Tx Antenna Gain (dBi)	EIRP (isotropic) (dBm)	ERP (dipole) (dBm)	ERP Limit (dBm)	Delta (dB)	ERP (Watts)	ERP Limit (Watts)	Delta (Watts)
905.2135	145	100	H	63.20	63.00	2.20	2.40	6.00	8.40	6.25	23.98	-17.73	0.004	0.250	-0.246
905.7060	42	118	V	67.90	67.60	7.20	7.50	6.65	14.15	12.00	23.98	-11.98	0.016	0.250	-0.234
1810.6025	298	105	H	16.53	18.20	-73.15	-74.82	5.60	-69.22	-71.37	-13	-58.37			
1810.4563	52	124	H	43.05	42.30	-49.40	-48.65	5.60	-43.05	-45.20	-13	-32.20			
1809.9960	14	117	V	29.96	30.10	-64.40	-64.54	7.10	-57.44	-59.59	-13	-46.59			
2714.1776	137	103	H	37.27	38.80	-53.60	-55.13	4.95	-50.18	-52.33	-13	-39.33			
2714.6560	29	140	V	28.51	30.00	-60.60	-62.09	4.95	-57.14	-59.29	-13	-46.29			
2717.1913	137	103	H	37.73	38.30	-53.60	-54.17	4.95	-49.22	-51.37	-13	-38.37			
2717.1871	29	140	V	35.00	32.60	-56.60	-54.20	4.95	-49.25	-51.40	-13	-38.40			
3620.1227	285	103	V	21.32	22.30	-55.70	-56.68	3.50	-53.18	-55.33	-13	-42.33			

Carrier and spurious emissions: nominal  $f_c = 915$  MHz

Frequency (MHz)	Azimuth (Degrees)	Antenna Height (cm)	Ant. Pol.	EUT Spectrum Analyzer Reading (dBuV)	Substitute Tx Spectrum Analyzer Reading (dBuV)	Power Delivered To Tx Antenna After Cable Loss (dBm)	Corrected Tx Antenna Power (dBm)	Tx Antenna Gain (dBi)	EIRP (isotropic) (dBm)	ERP (dipole) (dBm)	ERP Limit (dBm)	Delta (dB)	ERP (Watts)	ERP Limit (Watts)	Delta (Watts)
916.3735	135	101	H	62.70	62.90	2.20	2.00	6.20	8.20	6.05	23.98	-17.93	0.004	0.250	-0.246
917.0470	303	121	V	67.20	67.60	7.20	6.80	6.7	13.50	11.35	23.98	-12.63	0.014	0.250	-0.236
1833.1287	32	108	H	22.90	26.30	-72.50	-75.90	6.30	-69.60	-71.75	-13	-58.75			
1833.3256	14	195	V	30.23	32.10	-64.50	-66.37	7.20	-59.17	-61.32	-13	-48.32			
2750.0836	261	262	H	24.60	27.50	-65.80	-68.70	4.95	-63.75	-65.90	-13	-52.90			
2748.5383	115	129	V	38.17	36.20	-52.80	-50.83	4.95	-45.88	-48.03	-13	-35.03			
2751.6087	109	136	V	37.55	37.70	-52.80	-52.95	4.95	-48.00	-50.15	-13	-37.15			
3666.8430	119	264	H	15.52	19.70	-62.00	-66.18	3.50	-62.68	-64.83	-13	-51.83			
1833.1287	32	108	H	22.90	26.30	-72.50	-75.90	6.30	-69.60	-71.75	-13	-58.75			
1833.3256	14	195	V	30.23	32.10	-64.50	-66.37	7.20	-59.17	-61.32	-13	-48.32			



Carrier and spurious emissions: nominal  $f_c = 925$  MHz

Frequency (MHz)	Azimuth (Degrees)	Antenna Height (cm)	Ant. Pol.	EUT Spectrum Analyzer Reading (dBuV)	Substitute Tx Spectrum Analyzer Reading (dBuV)	Power Delivered To Tx Antenna After Cable Loss (dBm)	Corrected Tx Antenna Power (dBm)	Tx Antenna Gain (dBi)	EIRP (isotropic) (dBm)	ERP (dipole) (dBm)	ERP Limit (dBm)	Delta (dB)	ERP (Watts)	ERP Limit (Watts)	Delta (Watts)
925.6700	117	154	H	63.20	62.40	2.20	3.00	6.1	9.10	6.95	23.98	-17.03	0.005	0.25	-0.25
925.5260	96	116	V	66.10	67.00	7.20	6.30	6.75	13.05	10.90	23.98	-13.08	0.012	0.25	-0.24
1850.1235	142	118	H	32.80	34.00	-67.40	-68.60	6.10	-62.50	-64.65	-13	-51.65			
1850.1144	23	157	V	34.40	35.10	-65.40	-66.10	7.10	-59.00	-61.15	-13	-48.15			
2773.5796	139	177	H	38.23	38.70	-58.70	-59.17	4.95	-54.22	-56.37	-13	-43.37			
2773.5747	111	101	V	37.81	35.20	-58.70	-56.09	4.95	-51.14	-53.29	-13	-40.29			
2776.6521	139	177	H	37.32	38.50	-58.70	-59.88	4.95	-54.93	-57.08	-13	-44.08			
2776.6479	111	101	V	37.12	35.00	-58.70	-56.58	4.95	-51.63	-53.78	-13	-40.78			
3700.2352	107	202	H	23.86	26.40	-60.10	-62.64	3.15	-59.49	-61.64	-13	-48.64			
3700.2311	281	146	V	26.94	24.90	-60.10	-58.06	3.15	-54.91	-57.06	-13	-44.06			

This page intentionally left blank

## **5.0 TEST FACILITY**

### **5.1 LOCATION**

The EUT was tested for Electromagnetic Compatibility at the Electronics Test Centre, located in Airdrie, Alberta, Canada.

The RF Anechoic Chamber (RFAC) is identified as Chamber 1, located in the main building complex at the Electronics Test Centre. Its usable working space measures 10.6 m long x 7.3 m wide x 6.5 m high.

This test site is listed with the FCC under Registration Number 99541. Measurements taken at this site are accepted by Industry Canada per file number IC 2046-1.

The floor, walls and ceiling consist of annealed steel panels. The walls and ceiling are covered with ferrite tile, augmented by RF absorbant foam material on the end wall nearest the turntable, and on the adjacent walls and the ceiling. The chamber floor supports a 15 cm high internal floor, constructed of annealed steel panels, that forms the ground plane, and is bonded to the chamber walls.

The 3-m diameter turntable is flush-mounted with the floor. A sub-floor cable-way is provided to route cables between the turntable pit and EUT support equipment. Cables reach the EUT through an opening in the centre of the turntable.

Test instrumentation and EUT support equipment is located in two shielded vestibules located at the side of the main room. Cables are routed through bulkhead panels between the rooms as required. Power feeds are routed into the main room and vestibules through line filters providing at least 100 dB of attenuation between 10 kHz and 10 GHz.

### **5.2 GROUNDING PLAN**

The EUT was located on a wooden table 80 cm above the ground plane.

In accordance with Eleven Engineering Inc. specifications, the EUT was not grounded.

### **5.3 POWER**

AC power was supplied via an Underwriter's Laboratories ULW100-69, 100 dB, 100 Ampere wall mounted filter. Bonding to ground is implemented at the chamber wall.

### **5.4 EMISSIONS PROFILE**


Ambient conducted and radiated electromagnetic emission profiles were generated throughout the tests and are included in the test data.

## 5.5 TEST CONFIGURATION


### 5.5.1 Tabletop Equipment

The following diagrams illustrate the configuration of the EUT test and measurement equipment for Radiated and Conducted Emissions Testing of tabletop equipment.

#### Radiated

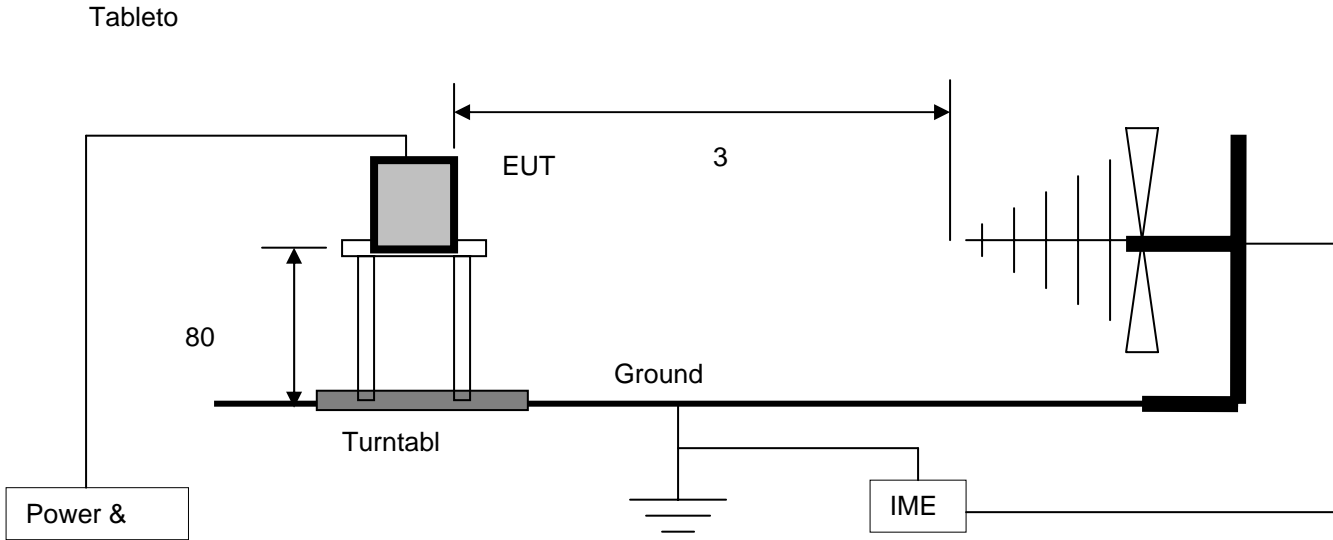


#### Conducted

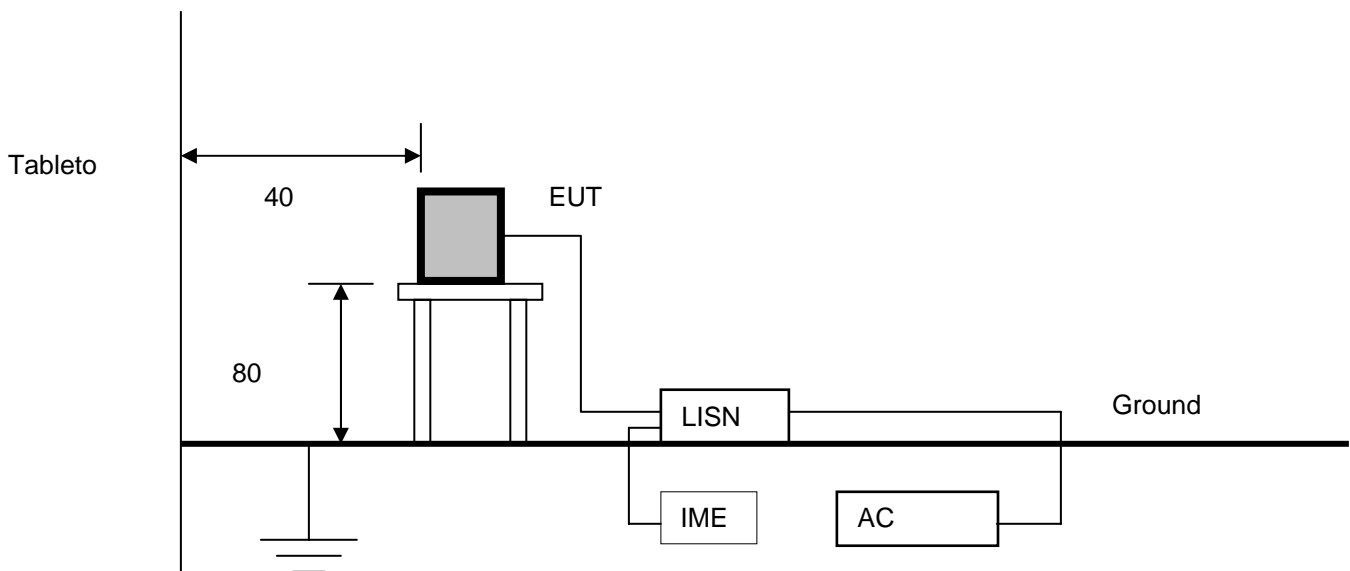


5.5.2 Rack Mount

The following diagrams illustrate the configuration of the EUT test and measurement equipment for Radiated and Conducted Emissions Testing of rack mounted equipment.

**Radiated**

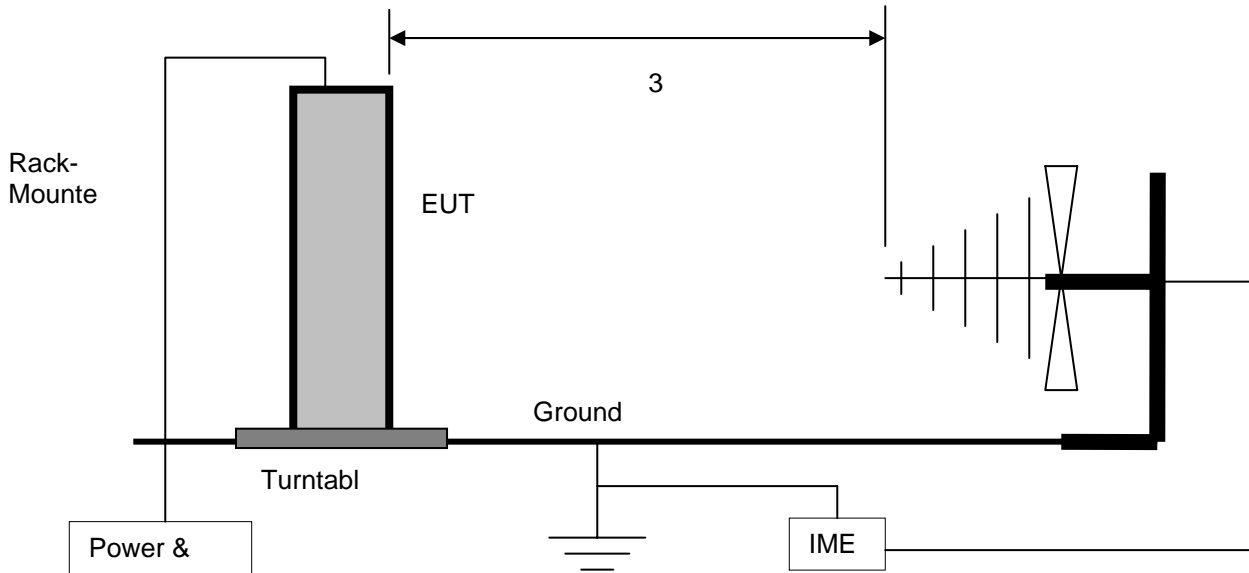

**Conducted**

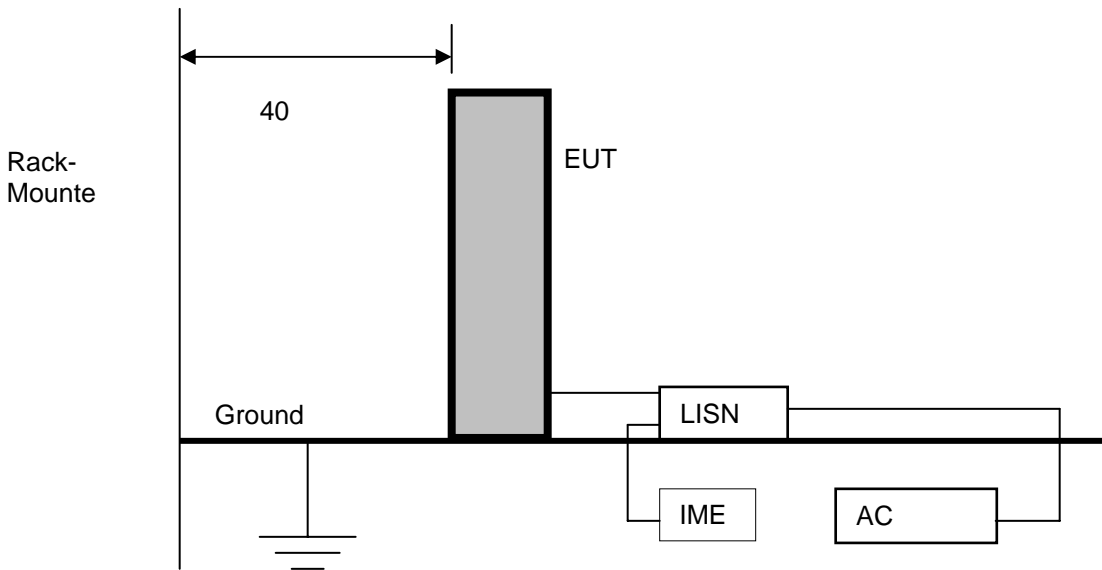

## **6.0 TEST EQUIPMENT**

The following equipment was used for this procedure. All measurement devices are calibrated annually, traceable to NIST.

### **6.1 RADIATED EMISSIONS**

- a) Spectrum Analyzer with RF Preselector
- b) CISPR Quasi-peak Adapter
- c) Power Isolation Transformers
- d) Biconilog antenna (20 MHz to 2 GHz)
- e) Antenna mast positioner and controller
- f) Flush-mounted turntable and controller
- g) Personal Computer and EMC software

### **6.2 CONDUCTED EMISSIONS**

- a) Spectrum Analyzer with RF Preselector
- b) Line Impedance Stabilization Network, 50  $\mu$ H
- c) CISPR Quasi-peak Adapter
- d) Isolation Transformer
- e) Personal Computer and EMC software

### **6.3 CALIBRATION**

All measurement instrumentation conforms to ANSI C63.2. Calibration is maintained in accordance with manufacturer recommendations. Each measurement device is labeled with its ETC asset number and calibration due date.

#### **6.3.1 CALIBRATION ACCURACY**

Test equipment used to provide quantitative measurements are calibrated with standards traceable to the National Research Council, National Institute of Standards and Technology or other national standards. Instrumentation systems for emissions measurements have the following accuracies:

Frequency =  $\pm$  1 kHz  
Amplitude (RE) =  $\pm$  4.01 dB  
Amplitude (CE) =  $\pm$  3.25 dB

### 6.3.2 TEST EQUIPMENT DESCRIPTION

The equipment used in the tests was selected from the following list.

Instrument	Manufacturer	Model No.	Asset No.	Calibration Due
Spectrum Analyzer & Display	Hewlett Packard	8566B & 85662	9565	20 April 2005
Spectrum Analyzer & Display	Hewlett Packard	8566B & 85662	9168	17 August 2005
RF Preselector	Hewlett Packard	85685A	9728	19 August 2005
Quasi-Peak Adapter	Hewlett Packard	85650A	4411	20 August 2005
Measurement System Software	Underwriters Laboratories	Version 6.0	4443	n/a
Line Impedance Stabilization Network	EMCO	3825/2r	9331	2 November 2005
Line Impedance Stabilization Network	EMCO	3825/2r	9259	2 November 2005
Biconilog Antenna	ARA	Lpb-2520/A	4318	2 August 2005
Dual Ridged Guide Antenna	EMCO	3115	9588	2 August 2005
Low Noise Amplifier	MITEQ	JS43-01001800-21-5P	4354	3 November 2004

**Appendix A**

**ETHx**

**Test Sample Description**  
(from data provided by Eleven Engineering Inc.)

Product Application	Product Category
Commercial <input checked="" type="checkbox"/> Military <input type="checkbox"/>	Telecommunications <input type="checkbox"/> Aerospace <input type="checkbox"/> Information Technology <input checked="" type="checkbox"/> Test & Measurement <input type="checkbox"/> Surface Transportation <input type="checkbox"/> Other <input type="checkbox"/> _____
<b>Product Name</b>	ETHx
<b>Part/Model No.</b>	n/a
<b>Serial Number</b>	n/a
<b>Power Requirements: (Voltage, AC/DC, Hz, Current)</b>	120 VAC, 60 Hz, 0.3 A
<b>Ground Connection (in addition to power cord)</b>	Nil
<b>Internally Generated Frequencies</b>	12.5, 25, 50, 905.2083, 907.29167, 910.41667, 913.54167, 916.66667, 919.27083, 922.39583, 923.95833 MHz
<b>Peripheral Support Equipment</b>	Personal Computer
<b>Description and number of interconnecting Leads &amp; Cables</b>	Ethernet cable RS-232 serial cable Power cable from AC adaptor
<b>Brief Functional Description</b>	The system is an in-expensive wireless Ethernet bridge. It is designed to replace twisted pair Ethernet cable with a wireless link. Two devices are sold together and both are identical. The devices are paired at the factory and will only communicate between matched pairs. To operate the user only has to connect the power and Ethernet cables to each unit. No additional configuration is required.