



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

Test Report

Report No ES3447-1

Client OSRAM SYLVANIA INC
Sivakumar Thangavelu

Address 200 Ballardvale Street
Wilmington, MA 01887

Phone 978-750-3865


Items tested iQ ZigBee RF Controller Module (Model: OSREFRMG1P2)
FCC ID DZO-OSREFRMG1P2
IC 23566-OSREFRMG1P2
FRN 0021513163

Equipment Type Digital Transmission System
Equipment Code DTS

FCC/IC Rule Parts CFR Title 47 FCC Part 15.247, ISSED Canada RSS-247 Issue 2

Test Dates Dec 20-26, 2018

Results As detailed within this report

Prepared by 
Arik Zwirner – EMC Engineer

Authorized by 
Yuruf Fazilloglu – Sr. Engineer

Issue Date 1/31/2019

Conditions of Issue This Test Report is issued subject to the conditions stated in the 'Conditions of Testing' section on page 333 of this report.

Curtis-Straus LLC is accredited by the American Association for Laboratory Accreditation for the specific scope of accreditation under Certificate Number 1627-01. This report may contain data which is not covered by the A2LA accreditation.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Contents

Contents.....	2
Summary.....	3
Test Methodology.....	4
Product Tested - Configuration Documentation	5
Statement of Conformity	6
Modifications Required for Compliance	6
Test Results	7
<i>DTS (6dB) Bandwidth</i>	7
<i>Peak Output Power</i>	9
<i>Radiated Spurious Emissions</i>	11
<i>Conducted Spurious Emissions</i>	20
<i>Power Spectral Density</i>	24
<i>AC Line Conducted Emissions</i>	26
<i>99% Occupied Bandwidth</i>	29
Measurement Uncertainty.....	32
Conditions Of Testing	33

Form Final Report REV 12-07-15



Summary

This test report supports an application for certification of a transmitter operating pursuant to CFR Title 47 FCC Part 15.247, ISED Canada RSS-247 Issue 2.

The product is the iQ ZigBee RF Controller Module (Model: OSREFRMG1P2). It is a transmitter that operates in the 2405-2480MHz frequency range. It has an internal PCB trace antenna with 0.63dBi gain. It is powered by 3VDC.

We found that the product met the above requirements without modifications. The test sample was received in good condition on December 20, 2018.

Test Methodology

All testing was performed according to the following rules/procedures/documents;

CFR Title 47 FCC Part 15.247, ISED Canada RSS-247 Issue 2 and RSS-Gen Issue 5. FCC KDB 558074 D01 15.247 Measurement Guidance v05 and ANSI C63.10-2013.

Radiated emissions were maximized by rotating the device around three orthogonal axes as well as varying the test antenna's height and polarity. AC line conducted emissions testing was performed with a 50 Ω /50 μ H LISN on AC side of a DC supply.

RF measurements were performed at the antenna port.

Following bandwidths were used during radiated spurious and line conducted emissions.

Frequency	RBW	VBW
0.15-30MHz	9kHz	30kHz
30-1000MHz	120kHz	1MHz
1-25GHz	1MHz	3MHz

Product Tested - Configuration Documentation

EUT Configuration										
Work Order:	S3447									
Company:	OSRAM SYLVANIA INC									
Company Address:	200 Ballardvale Street									
	Wilmington, MA, 01887									
Contact:	Sivakumar Thangavelu (3)									
	MN			PN			SN			
EUT:	OSREFRMG1P2						SK015, SK016, SK018			
EUT Description:	iQ ZigBee RF Controller Module									
EUT Max Frequency:	2480 MHz									
Support Equipment	MN			SN						
HP Power Supply	E3612A									
Port Label	Port Type	# ports	# populated	cable type	shielded	ferrites	length (m)	in/out	under test	comment
DC power	Power DC	1	1	Power DC	No	No	0.1	in	yes	
Software Operating Mode Description:										
Running low, mid and high channels at maximum power. EUT was battery powered except for AC mains emissions, when the HP power supply was used.										

Statement of Conformity

RSS-GEN	RSP-100	RSS 247	Part 15	Comments
6.4			15.15(b)	There are no controls accessible to the user that varies the output power to operate in violation of the regulatory requirements.
	3.1		15.19	The label is shown in the label exhibit.
	3.2		15.21	Information to the user is shown in the instruction manual exhibit.
			15.27	No special accessories are required for compliance.
3.2			15.31	The EUT was tested in accordance with the measurement standards in this section.
6.13.2			15.33	Frequency range was investigated according to this section, unless noted in specific rule section under which the equipment operates.
6.13.1			15.35	The EUT emissions were measured using the measurement detector and bandwidth specified in this section, unless noted in specific rule section under which the equipment operates.
6.8			15.203	The antenna of the module is an internal PCB trace antenna with 0.63dBi gain.
8.10			15.205 15.209	The fundamental is not in a Restricted band and the spurious and harmonic emissions in the Restricted bands comply with the general emission limits of 15.209 or RSS-Gen as applicable
8.8			15.207	EUT meets the AC Line conducted emissions requirements of this section.
			15.247	The unit complies with the requirements of 15.247
		RSS 247		The unit complies with the requirements of RSS-247
6.7				Occupied Bandwidth measurements were made.

Modifications Required for Compliance

No modifications required for Compliance

Test Results

DTS (6dB) Bandwidth


LIMIT

The minimum 6 dB bandwidth shall be at least 500 kHz. [15.247(a) (2)]

MEASUREMENTS / RESULTS

6dB Bandwidth				
Date: 12/21/2018		Company: Osram		Work Order: S3447
Engineer: AKZ		Operating Voltage/Frequency: Battery		
Temp: 21°C		Humidity: 31%		Pressure: 996mBar
Frequency Range: 2400-2480MHz		Measurement Type: Conducted		
Measurement Method: FCC KDB 558074 D01 15.247 Meas Guidance v05				
Notes:				
Frequency (MHz)	Reading (kHz)	6dB Bandwidth		
		Limit (kHz)	Margin (kHz)	Result (Pass/Fail)
		≥500	1151	Pass
		≥500	1149	Pass
		≥500	1148	Pass
Test Site: CEMI-2		Cable: none		Attenuator: Asset #2121
Analyzer: 1118472		Copyright Curtis-Straus LLC 2000		

PLOTS

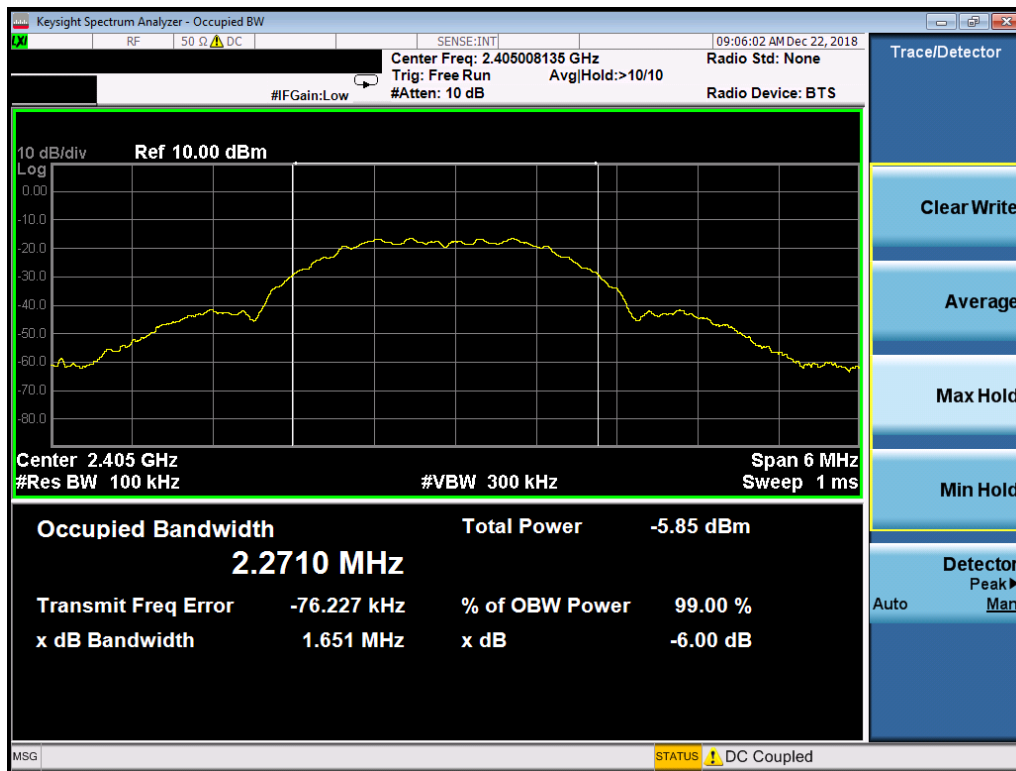

DTS Bandwidth, Low Channel



DTS Bandwidth, Mid Channel



DTS Bandwidth, High Channel

Peak Output Power

LIMIT

Conducted Output Power


1 Watt

[15.247(b) (3)]


MEASUREMENTS / RESULTS

Peak Output Power							
Date: 12/21/2018		Company: Osram			Work Order: S3447		
Engineer: AKZ		Operating Voltage/Frequency: Battery					
Temp: 21°C		Humidity: 31%		Pressure: 996mBar			
Frequency Range: 2400-2480MHz				Measurement Type: Conducted			
Measurement Method: FCC KDB 558074 D01 15.247 Meas Guidance v05							
Notes:							
Frequency	Peak Reading	Cable Loss	Attenuator Loss	Peak Output Power	Limit	Margin	Result
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)	(Pass/Fail)
2405	-12.84	0.00	29.50	16.66	30.0	-13.34	Pass
2440	-12.40	0.00	29.50	17.10	30.0	-12.90	Pass
2480	-12.31	0.00	29.50	17.19	30.0	-12.81	Pass
Test Site: CEMI-2		Cable: none		Attenuator: Asset #2121			
Analyzer: 1118472							
Peak Output Power (dBm)= Peak Reading (dBm) + Cable Loss (dB) + Attenuator Loss (dB)							


PLOTS

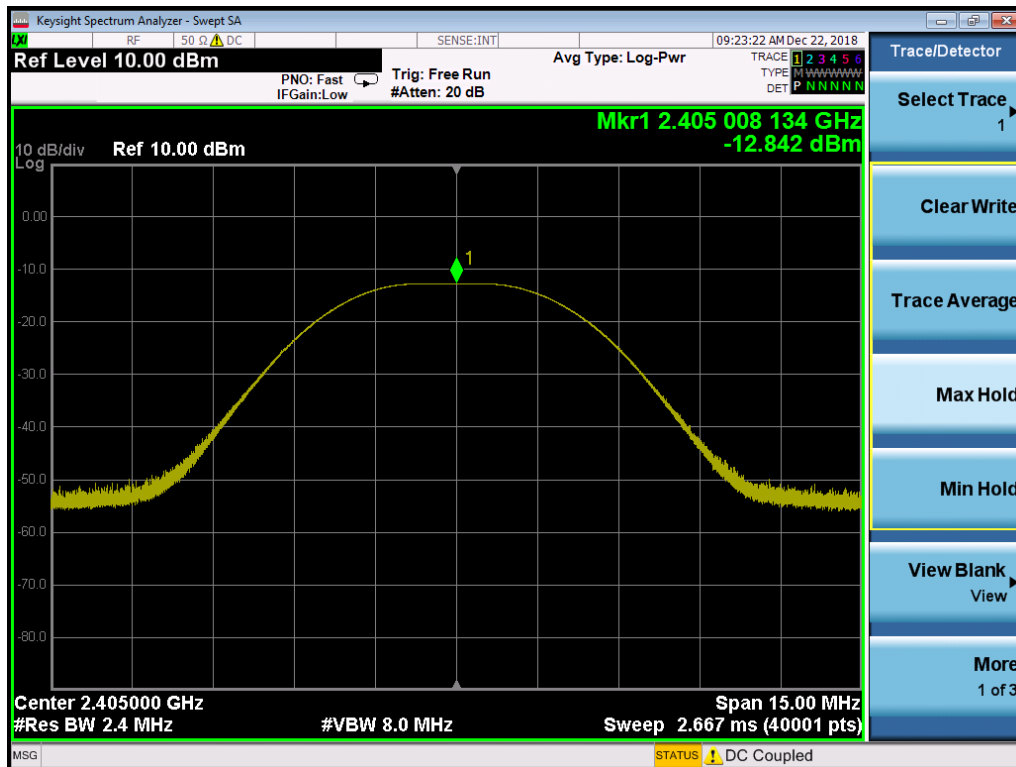

Peak Output Power, Low Channel

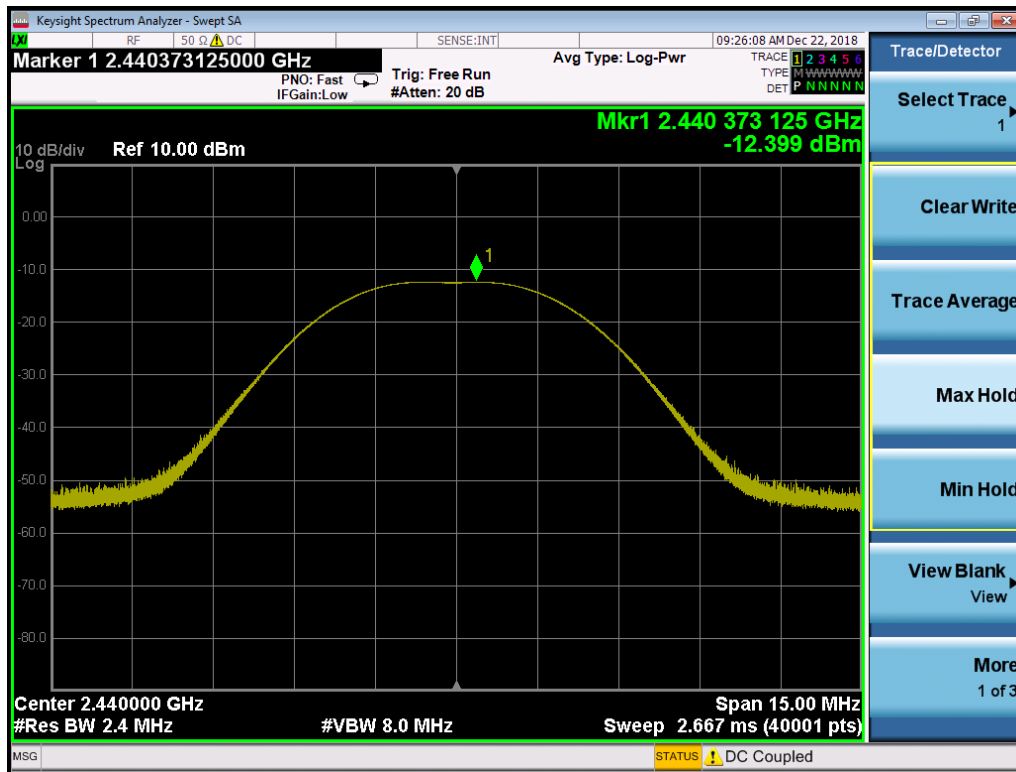

Peak Output Power, Mid Channel

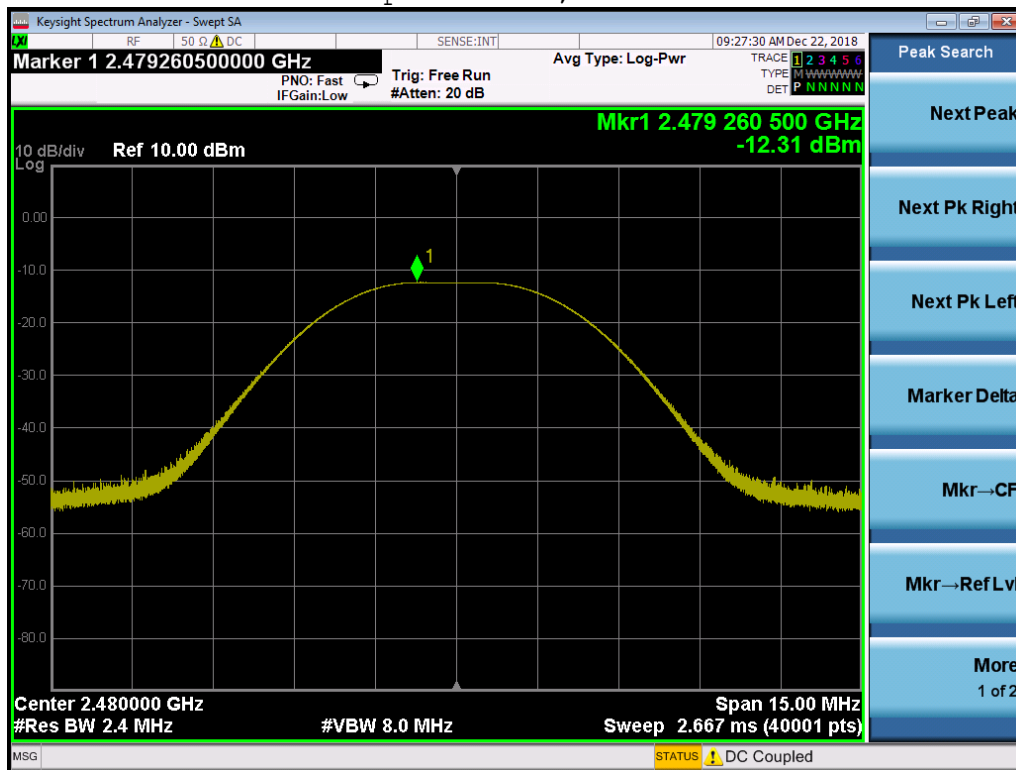

Peak Output Power,
High Channel 26 at 19.5dBm,
to represent Ch 25 at 19.5dBm and Ch 26 at 0dBm

Radiated Spurious Emissions

LIMITS

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).
[15.247(d)]

MEASUREMENTS / RESULTS

Curtis Straus - a Bureau Veritas Company							Work Order - S3447						
Radiated Emissions Electric Field 3m Distance							EUT Power Input - Battery						
Top Peaks Horizontal 30-1000MHz							Test Site - CH-1						
Operator: AKZ							Conditions - 23°C; 21%RH; 1021mBar						
Notes:													
Channel 11 at 19.5dBm													
Data Taken at 09:51:10 AM, Wednesday, December 26, 2018													
Frequency (MHz)	Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Lim1: FCC_pt15_2 09 (dBμV/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Lim2: FCC_pt15_1 09_Class_B (dBμV/m)	Lim2 Margin (dB)	Lim2 Test Results (Pass/Fail)	Worst Margin Lim2 (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
30.485	32.1	-7.7	24.4	40	-15.6	PASS	-15.6	40	-15.6	PASS	-15.6	100	45
326.165	40.7	-13.1	27.5	46	-18.5	PASS		46	-18.5	PASS		100	45
347.142	41	-13	28	46	-18	PASS		46	-18	PASS		100	45
353.398	40.8	-12.8	28	46	-18	PASS		46	-18	PASS		100	225
367.245	40.3	-12	28.2	46	-17.8	PASS		46	-17.8	PASS		100	45
924.486	31.5	-1.6	29.8	46	-16.2	PASS		46	-16.2	PASS		200	315
Curtis Straus - a Bureau Veritas Company							Work Order - S3447						
Radiated Emissions Electric Field 3m Distance							EUT Power Input - Battery						
Top Peaks Vertical 30-1000MHz							Test Site - CH-1						
Operator: AKZ							Conditions - 23°C; 21%RH; 1021mBar						
Notes:													
Channel 11 at 19.5dBm													
Data Taken at 09:51:10 AM, Wednesday, December 26, 2018													
Frequency (MHz)	Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Lim1: FCC_pt15_2 09 (dBμV/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Lim2: FCC_pt15_1 09_Class_B (dBμV/m)	Lim2 Margin (dB)	Lim2 Test Results (Pass/Fail)	Worst Margin Lim2 (dB)	Antenna Height (cm)	Turntable Azimuth (degrees)
30.291	32.3	-7.6	24.8	40	-15.2	PASS	-15.2	40	-15.2	PASS	-15.2	150	45
146.57	34.7	-15.5	19.2	43.5	-24.3	PASS		43.5	-24.3	PASS		200	135
152.729	35.3	-15.7	19.6	43.5	-23.9	PASS		43.5	-23.9	PASS		150	135
155.906	37.6	-15.8	21.9	43.5	-21.6	PASS		43.5	-21.6	PASS		100	135
893.203	32.6	-2.4	30.3	46	-15.7	PASS		46	-15.8	PASS		150	180

30-1000MHz Low Channel



Curtis Straus - a Bureau Veritas Company
 Radiated Emissions Electric Field 3m Distance
 Top Peaks Horizontal 30-1000MHz
 Operator: AKZ
 Notes:
 Channel 18 at 19.5dBm

Work Order - S3447
 EUT Power Input - Battery
 Test Site - CH-1
 Conditions - 23°C; 21%RH; 1021mBar

Data Taken at 10:09:11 AM, Wednesday, December 26, 2018

Frequency (MHz)	Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Lim1: FCC_pt15_2 09 (dBμV/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Lim2: FCC_pt15_1 09_Class_B (dBμV/m)	Lim2 Margin (dB)	Lim2 Test Results (Pass/Fail)	Worst Margin Lim2 (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
31.067	32.5	-8.2	24.3	40	-15.7	PASS	-15.7	40	-15.7	PASS	-15.7	200	270
332.64	40.8	-13.1	27.7	46	-18.3	PASS		46	-18.3	PASS		100	45
353.107	42	-12.8	29.2	46	-16.8	PASS		46	-16.8	PASS		100	45
360.285	40.2	-12.4	27.8	46	-18.2	PASS		46	-18.2	PASS		100	225
373.647	40	-12	28	46	-18	PASS		46	-18	PASS		100	45
830.977	33.4	-3.3	30.1	46	-15.9	PASS		46	-15.9	PASS		250	315

Curtis Straus - a Bureau Veritas Company
 Radiated Emissions Electric Field 3m Distance
 Top Peaks Vertical 30-1000MHz
 Operator: AKZ
 Notes:
 Channel 18 at 19.5dBm

Work Order - S3447
 EUT Power Input - Battery
 Test Site - CH-1
 Conditions - 23°C; 21%RH; 1021mBar

Data Taken at 10:09:11 AM, Wednesday, December 26, 2018

Frequency (MHz)	Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Lim1: FCC_pt15_2 09 (dBμV/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Lim2: FCC_pt15_1 09_Class_B (dBμV/m)	Lim2 Margin (dB)	Lim2 Test Results (Pass/Fail)	Worst Margin Lim2 (dB)	Antenna Height (cm)	Turntable Azimuth (degrees)
30.073	31.6	-7.4	24.2	40	-15.8	PASS	-15.8	40	-15.8	PASS	-15.8	200	180
143.32	37.1	-15.3	21.9	43.5	-21.6	PASS		43.5	-21.6	PASS		150	135
146.57	39.2	-15.5	23.7	43.5	-19.8	PASS		43.5	-19.8	PASS		150	135
155.93	36.2	-15.8	20.4	43.5	-23.1	PASS		43.5	-23.1	PASS		100	135
165.242	36.8	-16	20.7	43.5	-22.8	PASS		43.5	-22.8	PASS		100	225
940.054	31.2	-1.6	29.6	46	-16.4	PASS		46	-16.4	PASS		100	45

30-1000MHz Center Channel



BUREAU
VERITAS

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Curtis Straus - a Bureau Veritas Company
 Radiated Emissions Electric Field 3m Distance
 Top Peaks Horizontal 30-1000MHz
 Operator: AKZ
 Notes:
 Channel 26 at 19.5dBm

Work Order - S3447
 EUT Power Input - Battery
 Test Site - CH-1
 Conditions - 23°C; 21%RH; 1021mBar

Data Taken at 10:34:01 AM, Wednesday, December 26, 2018

Frequency (MHz)	Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Lim1: FCC_pt15_2 09 (dBμV/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Lim2: FCC_pt15_1 09_Class_B (dBμV/m)	Lim2 Margin (dB)	Lim2 Test Results (Pass/Fail)	Worst Margin Lim2 (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
30.194	31.9	-7.5	24.4	40	-15.6	PASS		40	-15.6	PASS		150	90
340.036	42.3	-13.1	29.2	46	-16.8	PASS		46	-16.8	PASS		100	45
360.091	41.6	-12.4	29.2	46	-16.8	PASS		46	-16.8	PASS		100	45
366.25	39.9	-12.1	27.8	46	-18.2	PASS		46	-18.2	PASS		100	45
832.845	38.9	-3.3	35.6	46	-10.4	PASS	-10.4	46	-10.5	PASS	-10.5	150	90
936.999	31.6	-1.6	30.1	46	-15.9	PASS		46	-16	PASS		150	135

Curtis Straus - a Bureau Veritas Company
 Radiated Emissions Electric Field 3m Distance
 Top Peaks Vertical 30-1000MHz
 Operator: AKZ
 Notes:
 Channel 26 at 19.5dBm

Work Order - S3447
 EUT Power Input - Battery
 Test Site - CH-1
 Conditions - 23°C; 21%RH; 1021mBar

Data Taken at 10:34:01 AM, Wednesday, December 26, 2018

Frequency (MHz)	Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Lim1: FCC_pt15_2 09 (dBμV/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Lim2: FCC_pt15_1 09_Class_B (dBμV/m)	Lim2 Margin (dB)	Lim2 Test Results (Pass/Fail)	Worst Margin Lim2 (dB)	Antenna Height (cm)	Turntable Azimuth (degrees)
30.364	32.5	-7.6	24.8	40	-15.2	PASS	-15.2	40	-15.2	PASS	-15.2	100	45
152.778	36.9	-15.7	21.2	43.5	-22.3	PASS		43.5	-22.3	PASS		100	135
155.882	37.1	-15.8	21.3	43.5	-22.2	PASS		43.5	-22.2	PASS		100	180
162.162	36.9	-15.8	21.1	43.5	-22.4	PASS		43.5	-22.4	PASS		100	180
486.506	33.1	-8.9	24.2	46	-21.8	PASS		46	-21.8	PASS		200	225
942.77	31.2	-1.6	29.7	46	-16.3	PASS		46	-16.4	PASS		150	180

30-1000MHz High Channel



Curtis Straus - a Bureau Veritas Company
 Radiated Emissions Electric Field 3m Distance
 1-6GHz Vertical Data
 Operator: AKZ
 Notes:
 Channel 11 at 19.5dBm

Work Order - S3447
 EUT Power Input - Battery
 Test Site - CH-1
 Conditions - 23°C; 19%RH; 1006mBar

Data Taken at 02:49:31 PM, Thursday, December 20, 2018

Frequency (MHz)	Raw Peak Reading (dBμV)	Raw Avg Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Peak Margin (dB)	Peak Results (Pass/Fail)	Worst Peak Margin (dB)	Adjusted Avg Amplitude (dBμV/m)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Avg Margin (dB)	Avg Results (Pass/Fail)	Worst Avg Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
4808.8	42.9	35.2	12.7	55.6	74	-18.4	PASS	-18.4	47.8	54	-6.2	PASS	-6.2	302	305

Curtis Straus - a Bureau Veritas Company
 Radiated Emissions Electric Field 3m Distance
 Top Peaks Horizontal 1-6GHz
 Operator: AKZ
 Notes:
 Channel 11 at 19.5dBm

Work Order - S3447
 EUT Power Input - Battery
 Test Site - CH-1
 Conditions - 23°C; 19%RH; 1006mBar

Data Taken at 02:49:31 PM, Thursday, December 20, 2018

Frequency (MHz)	Raw Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Margin to Peak Limit (dB)	Peak Limit Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Margin to Avg Limit (dB)	Avg Limit Results (Pass/Fail)	Avg Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
2174.88	32.9	12.1	44.9	74	-29.1	PASS		54	-9.1	PASS		300	199
2868	33	13.3	46.4	74	-27.6	PASS		54	-7.6	PASS		100	237
4810.75	41.1	12.7	53.7	74	-20.3	PASS	-20.3	54	-0.3	PASS	-0.3	200	176
5322	34.8	13.9	48.7	74	-25.3	PASS		54	-5.3	PASS		100	78

1-6GHz Low Channel

Curtis Straus - a Bureau Veritas Company
 Radiated Emissions Electric Field 3m Distance
 1-6GHz Horizontal Data
 Operator: AKZ
 Notes:
 Channel 18 at 19.5dBm

Work Order - S3447
 EUT Power Input - Battery
 Test Site - CH-1
 Conditions - 23°C; 19%RH; 1006mBar

Data Taken at 02:23:14 PM, Thursday, December 20, 2018

Frequency (MHz)	Raw Peak Reading (dBμV)	Raw Avg Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Peak Margin (dB)	Peak Results (Pass/Fail)	Worst Peak Margin (dB)	Adjusted Avg Amplitude (dBμV/m)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Avg Margin (dB)	Avg Results (Pass/Fail)	Worst Average Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
4878.9	43.7	36.3	13	56.8	74	-17.2	PASS	-17.2	49.3	54	-4.7	PASS	-4.7	239	176
5295.9	35.9	25.4	13.7	49.6	74	-24.4	PASS		39.1	54	-14.9	PASS		125	224
5317.5	34	25.2	13.9	47.9	74	-26.1	PASS		39.1	54	-14.9	PASS		355	91

Curtis Straus - a Bureau Veritas Company
 Radiated Emissions Electric Field 3m Distance
 1-6GHz Vertical Data
 Operator: AKZ
 Notes:
 Channel 18 at 19.5dBm

Work Order - S3447
 EUT Power Input - Battery
 Test Site - CH-1
 Conditions - 23°C; 19%RH; 1006mBar

Data Taken at 02:03:58 PM, Thursday, December 20, 2018

Frequency (MHz)	Raw Peak Reading (dBμV)	Raw Avg Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Peak Margin (dB)	Peak Results (Pass/Fail)	Worst Peak Margin (dB)	Adjusted Avg Amplitude (dBμV/m)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Avg Margin (dB)	Avg Results (Pass/Fail)	Worst Avg Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
4880.8	42.6	35	13.1	55.7	74	-18.3	PASS	-18.3	48.1	54	-5.9	PASS	-5.9	202	129

1-6GHz Center Channel



BUREAU
VERITAS

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Curtis Straus - a Bureau Veritas Company
 Radiated Emissions Electric Field 3m Distance
 Top Peaks Horizontal 1-6GHz
 Operator: AKZ
 Notes:
 Channel 26 at 19.5dBm

Work Order - S3447
 EUT Power Input - Battery
 Test Site - CH-1
 Conditions - 23°C; 19%RH; 1006mBar

Data Taken at 01:43:05 PM, Thursday, December 20, 2018

Frequency (MHz)	Raw Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Margin to Peak Limit (dB)	Peak Limit Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Margin to Avg Limit (dB)	Avg Limit Results (Pass/Fail)	Avg Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
2131.25	33.2	11.6	44.8	74	-29.2	PASS		54	-9.2	PASS		200	0
2924.13	34	13.2	47.2	74	-26.8	PASS		54	-6.8	PASS		200	137
4958.9	39.3	13.3	52.6	74	-21.4	PASS	-21.4	54	-1.4	PASS	-1.4	102	321

Curtis Straus - a Bureau Veritas Company
 Radiated Emissions Electric Field 3m Distance
 Top Peaks Vertical 1-6GHz
 Operator: AKZ
 Notes:
 Channel 26 at 19.5dBm

Work Order - S3447
 EUT Power Input - Battery
 Test Site - CH-1
 Conditions - 23°C; 19%RH; 1006mBar

Data Taken at 01:43:05 PM, Thursday, December 20, 2018

Frequency (MHz)	Raw Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Margin to Average Limit (dB)	Average Limit Test Result (Pass/Fail)	Average Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
2153.75	34.1	11.8	46	74	-28	PASS		54	-8	PASS		200	237
4958.88	39.8	13.3	53.1	74	-20.9	PASS	-20.9	54	-0.9	PASS	-0.9	100	298

1-6GHz High Channel

Curtis Straus - a Bureau Veritas Company
 Radiated Emissions Electric Field 1m Distance
 Top Peaks Horizontal 6-18GHz
 Operator: AKZ
 Notes:
 Channel 11 at 19.5dBm

Work Order - S3447
 EUT Power Input - Battery
 Test Site - CH-1
 Conditions - 23°C; 19%RH; 1006mBar
 0
 0

Data Taken at 03:34:00 PM, Thursday, December 20, 2018

Frequency (MHz)	Raw Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Margin to Avg Limit (dB)	Avg Limit Test Results (Pass/Fail)	Avg Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
10533.3	49.5	7.9	57.4	83.5	-26.1	PASS		63.5	-6.1	PASS		200	59
17972.4	47	14.3	61.3	83.5	-22.2	PASS	-22.2	63.5	-2.2	PASS	-2.2	150	156

Curtis Straus - a Bureau Veritas Company
 Radiated Emissions Electric Field 1m Distance
 Top Peaks Vertical 6-18GHz
 Operator: AKZ
 Notes:
 Channel 11 at 19.5dBm

Work Order - S3447
 EUT Power Input - Battery
 Test Site - CH-1
 Conditions - 23°C; 19%RH; 1006mBar
 0
 0

Data Taken at 03:34:00 PM, Thursday, December 20, 2018

Frequency (MHz)	Raw Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Margin to Avg Limit (dB)	Avg Limit Test Results (Pass/Fail)	Avg Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
10532.4	49.6	7.9	57.5	83.5	-26	PASS		63.5	-6	PASS		102	315
17790	47.6	14.1	61.7	83.5	-21.8	PASS	-21.8	63.5	-1.8	PASS	-1.8	125	79

6-18GHz Low Channel



Curtis Straus - a Bureau Veritas Company
 Radiated Emissions Electric Field 1m Distance
 Top Peaks Horizontal 6-18GHz
 Operator: AKZ
 Notes:
 Channel 18 at 19.5dBm

Work Order - S3447
 EUT Power Input - Battery
 Test Site - CH-1
 Conditions - 23°C; 19%RH; 1006mBar
 0
 0

Data Taken at 03:49:58 PM, Thursday, December 20, 2018

Frequency (MHz)	Raw Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Margin to Avg Limit (dB)	Avg Limit Test Results (Pass/Fail)	Avg Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
10531.8	51.2	7.9	59.2	83.5	-24.3	PASS		63.5	-4.3	PASS		200	118
17853.6	46.9	14.3	61.3	83.5	-22.2	PASS	-22.2	63.5	-2.2	PASS	-2.2	125	315

Curtis Straus - a Bureau Veritas Company
 Radiated Emissions Electric Field 1m Distance
 Top Peaks Vertical 6-18GHz
 Operator: AKZ
 Notes:
 Channel 18 at 19.5dBm

Work Order - S3447
 EUT Power Input - Battery
 Test Site - CH-1
 Conditions - 23°C; 19%RH; 1006mBar
 0
 0

Data Taken at 03:49:58 PM, Thursday, December 20, 2018

Frequency (MHz)	Raw Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Margin to Avg Limit (dB)	Avg Limit Test Results (Pass/Fail)	Avg Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
10533	49	7.9	57	83.5	-26.5	PASS		63.5	-6.5	PASS		175	158
16478.1	48.6	13	61.6	83.5	-21.9	PASS	-21.9	63.5	-1.9	PASS	-1.9	150	58
17898.6	47.2	14.3	61.4	83.5	-22.1	PASS		63.5	-2.1	PASS		100	178

6-18GHz Center Channel



Curtis Straus - a Bureau Veritas Company
 Radiated Emissions Electric Field 1m Distance
 Top Peaks Horizontal 6-18GHz
 Operator: AKZ
 Notes:
 Channel 26 at 19.5dBm

Work Order - S3447
 EUT Power Input - Battery
 Test Site - CH-1
 Conditions - 23°C; 19%RH; 1006mBar
 0
 0

Data Taken at 04:05:47 PM, Thursday, December 20, 2018

Frequency (MHz)	Raw Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Margin to Avg Limit (dB)	Avg Limit Test Results (Pass/Fail)	Avg Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
10531.8	50	7.9	58	83.5	-25.5	PASS		63.5	-5.5	PASS		125	58
12369.6	46.6	10.2	56.8	83.5	-26.7	PASS		63.5	-6.7	PASS		200	139
17873.7	47.4	14.3	61.7	83.5	-21.8	PASS	-21.8	63.5	-1.8	PASS	-1.8	175	296

Curtis Straus - a Bureau Veritas Company
 Radiated Emissions Electric Field 1m Distance
 Top Peaks Vertical 6-18GHz
 Operator: AKZ
 Notes:
 Channel 26 at 19.5dBm

Work Order - S3447
 EUT Power Input - Battery
 Test Site - CH-1
 Conditions - 23°C; 19%RH; 1006mBar
 0
 0

Data Taken at 04:05:47 PM, Thursday, December 20, 2018

Frequency (MHz)	Raw Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_2 09_Peak (dBμV/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_2 09_Average (dBμV/m)	Margin to Avg Limit (dB)	Avg Limit Test Results (Pass/Fail)	Avg Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
10532.4	50	7.9	57.9	83.5	-25.6	PASS		63.5	-5.6	PASS		150	236
17884.8	47.5	14.3	61.7	83.5	-21.8	PASS	-21.8	63.5	-1.8	PASS	-1.8	100	237

6-18GHz High Channel

Radiated Emissions Table

Date: 26-Dec-18		Company: Osram				Work Order: S3447											
Engineer: AKZ						EUT Operating Voltage/Frequency: Battery											
Temp: 23°C		Humidity: 21%		Pressure: 1021mbar													
Frequency Range: 18-25GHz						Measurement Distance: 0.1 m											
Notes: Tested Channels 11, 18, and 26 at 19.5dBm						EUT Max Freq: 2480MHz											
Antenna Polarization (H / V)	Frequency (MHz)	Peak Reading (dBμV)	Average Reading (dBμV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dBμV/m)	Adjusted Avg Reading (dBμV/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average					
									Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)			
LOW, MID, AND HIGH CHANNELS WERE TESTED AT FULL POWER.										---	---	---	---	---	---		
NO EMISSIONS WERE FOUND WITHIN 20dB OF THE LIMIT IN THIS RANGE.										---	---	---	---	---	---		
Table Result:		Pass		by		N/A		dB		Worst Freq:			N/A			MHz	
Test Site: EMI Chamber 1				Cable 1: Asset #2324				Cable 2: ---				Cable 3: ---					
Analyzer: ---				Preamp: 18-26.5GHz				Antenna: 18-26.5GHz Horn				Preselector: ---					
CSsoft Radiated Emissions Calculator v 1.017.211																	
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor																	
Copyright Curtis-Straus LLC 2000																	

18-25GHz All Channels



Radiated Band Edge Measurements

Radiated Emissions Table																			
Date: 20-Dec-18				Company: Osram					Work Order: S3447										
Engineer: AKZ				EUT Operating Voltage/Frequency: Battery															
Temp: 19°C				Humidity: 23%					Pressure: 1006mbar										
Frequency Range: band edges									Measurement Distance: 3 m										
Notes:																			
Antenna Polarization (H / V)	Frequency (MHz)	Peak Reading (dBμV)	Average Reading (dBμV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dBμV/m)	Adjusted Avg Reading (dBμV/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average							
									Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)					
Low band edge, Channel 11 at 19.5dBm, Y orientation																			
H	2390.0	33.5	33.5	25.4	32.2	3.2	43.5	43.5	74.0	-30.5	Pass	54.0	-10.5	Pass					
V	2390.0	32.6	32.6	25.4	32.2	3.2	42.6	42.6	74.0	-31.4	Pass	54.0	-11.4	Pass					
High band edge, Channel 25 at 19.5dBm, Y orientation																			
H	2483.5	36.6	36.6	25.3	32.4	3.1	46.8	46.8	74.0	-27.2	Pass	54.0	-7.2	Pass					
V	2483.5	34.9	34.9	25.3	32.4	3.1	45.1	45.1	74.0	-28.9	Pass	54.0	-8.9	Pass					
High band edge, Channel 26 at 0dBm, Y orientation																			
H	2483.5	40.3	40.3	25.3	32.4	3.1	50.5	50.5	74.0	-23.5	Pass	54.0	-3.5	Pass					
V	2483.5	38.5	38.5	25.3	32.4	3.1	48.7	48.7	74.0	-25.3	Pass	54.0	-5.3	Pass					
Table Result: Pass by -3.5 dB Worst Freq: 2483.5 MHz																			
Test Site: EMI Chamber 1					Cable 1: Asset #2480					Cable 2: Asset #2456					Cable 3: ---				
Analyzer: Asset #2093					Preamp: Asset #2443					Antenna: Blue Horn					Preselector: ---				
CSsoft Radiated Emissions Calculator v 1.017.211																			
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor																			
Copyright Curtis-Straus LLC 2000																			

Radiated Bandedges CH11 and CH25 at 19.5dBm, CH26 at 0dBm

Rev: 12/17/2018

Spectrum Analyzers / Receivers / Preselectors	Range	MN	Mfr	SN	Asset Cat	Calibration Due	Calibrated on
2093 MXE EMI Receiver	20Hz-26.5GHz	N9038A	Agilent	MY51210181	2093	11/21/2019	11/21/2018
Radiated Emissions Sites							
EMI Chamber 1	FCC Code	IC Code	VCCI Code	Range	Asset Cat	Calibration Due	Calibrated on
EMI Chamber 1	719150	2762A-6	A-0015	30-1000MHz	1685	12/21/2018	12/21/2016
EMI Chamber 1	719150	2762A-6	A-0015	1-18GHz	1685	12/21/2018	12/21/2016
Preamps / Couplers / Attenuators / Filters							
2443 PA	Range	MN	Mfr	SN	Asset Cat	Calibration Due	Calibrated on
8449B HF Preamp	9KHz-6GHz	BBV9744	SCWARZBECK	63	2443	2/5/2019	2/5/2018
2116 BRF	1-18GHz	8449B	Agilent	1149055		11/26/2019	11/26/2018
	0.009-18000MHz	BRM50702	Micro-Tronics	G226	2116	11/8/2019	11/8/2018
Antennas							
Blue Horn	Range	MN	Mfr	SN	Asset Cat	Calibration Due	Calibrated on
	1-18GHz	3117	ETS	157647	1861	2/14/2019	2/14/2017
Meteorological Meters/Chambers							
Weather Clock (Pressure Only)		MN	Mfr	SN	Asset Cat	Calibration Due	Calibrated on
TH A#2084		BA928	Oregon Scientific	C3166-1	831	5/15/2020	5/15/2018
		HTC-1	HDE		2084	3/23/2019	3/23/2018
Cables							
Asset #2456	Range		Mfr		Cat	Calibration Due	Calibrated on
Asset #2480	9KHz-18GHz		MegaPhase			10/31/2019	10/31/2018
Asset #2467	9KHz-18GHz		MegaPhase			10/29/2019	10/29/2018
	9KHz-18GHz		MegaPhase			10/31/2019	10/31/2018

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

REMI TEU



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828




page 19 of 34

Conducted Spurious Emissions

LIMITS

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth that contains the highest level of desired power based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.
[15.247(d)]

MEASUREMENTS / RESULTS

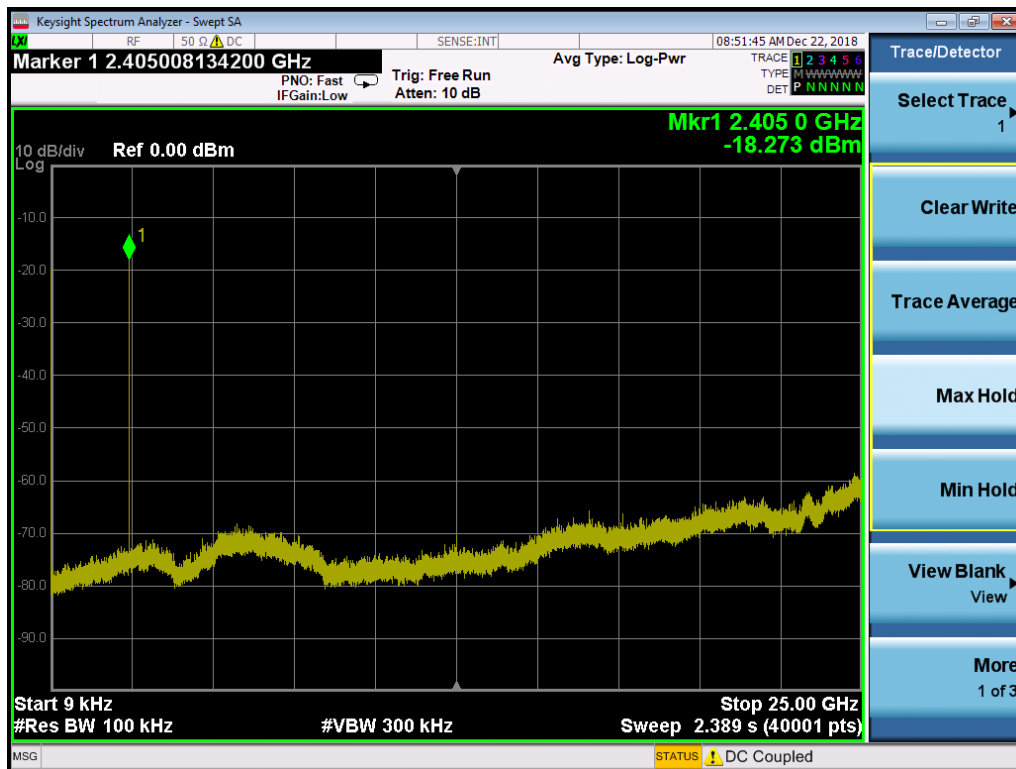

Low Channel



Mid Channel




High Channel 26 at 19.5dBm,
to represent Ch 25 at 19.5dBm and Ch 26 at 0dBm


Conducted Band Edge Measurements

Conducted Bandedge					
Date: 12/21/2018		Company: Osram		Work Order: S3447	
Engineer: AKZ		Operating Voltage/Frequency: Battery			
Temp: 21°C		Humidity: 31%		Pressure: 996mBar	
Frequency Range: 2400-2480MHz			Measurement Type: Conducted		
			Measurement Method: FCC KDB 558074 D01 15.247 Meas Guidance v05		
Notes:					
	Adjusted Bandedge (dBm)	Adjusted Fundamental (dBm)	Delta to Peak (dB)	Limit	
				(dB)	(Pass/Fail)
Low Bandedge	-77.01	-16.11	60.90	≥ 20	Pass
High Bandedge	-63.41	-15.53	47.88	≥ 20	Pass
Test Site: CEMI-2		Cable: none		Attenuator: Asset #2121	
Analyzer: 1118472		Copyright Curtis-Straus LLC 2000			

PLOTS

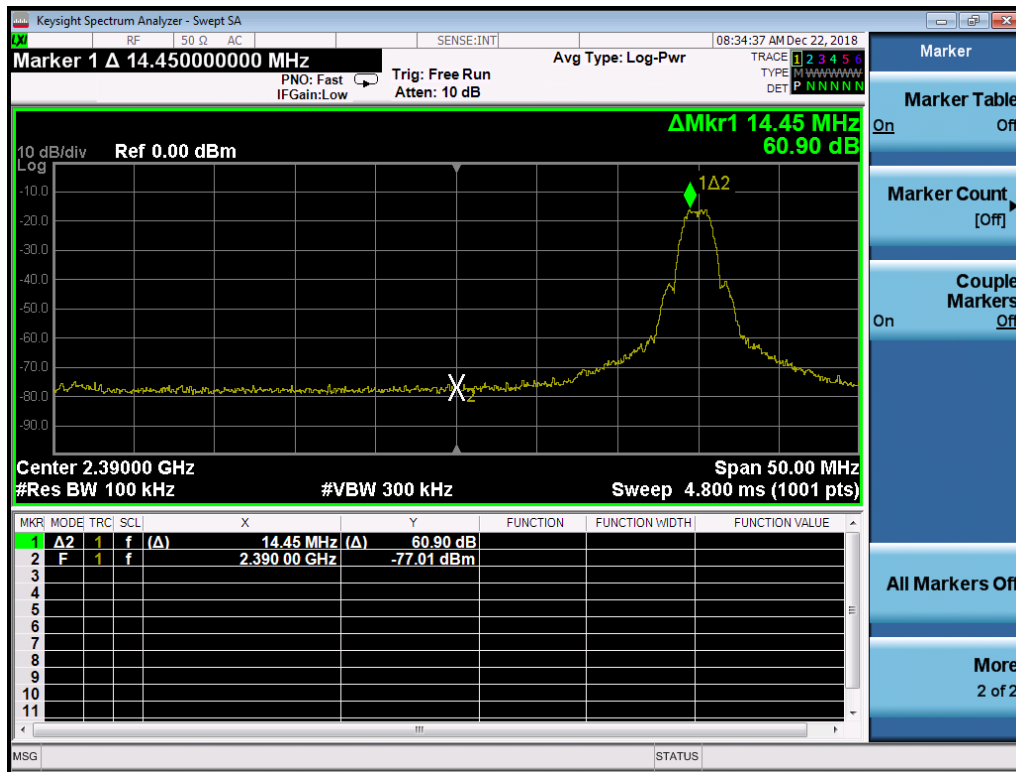

Band Edge, Lower Channel

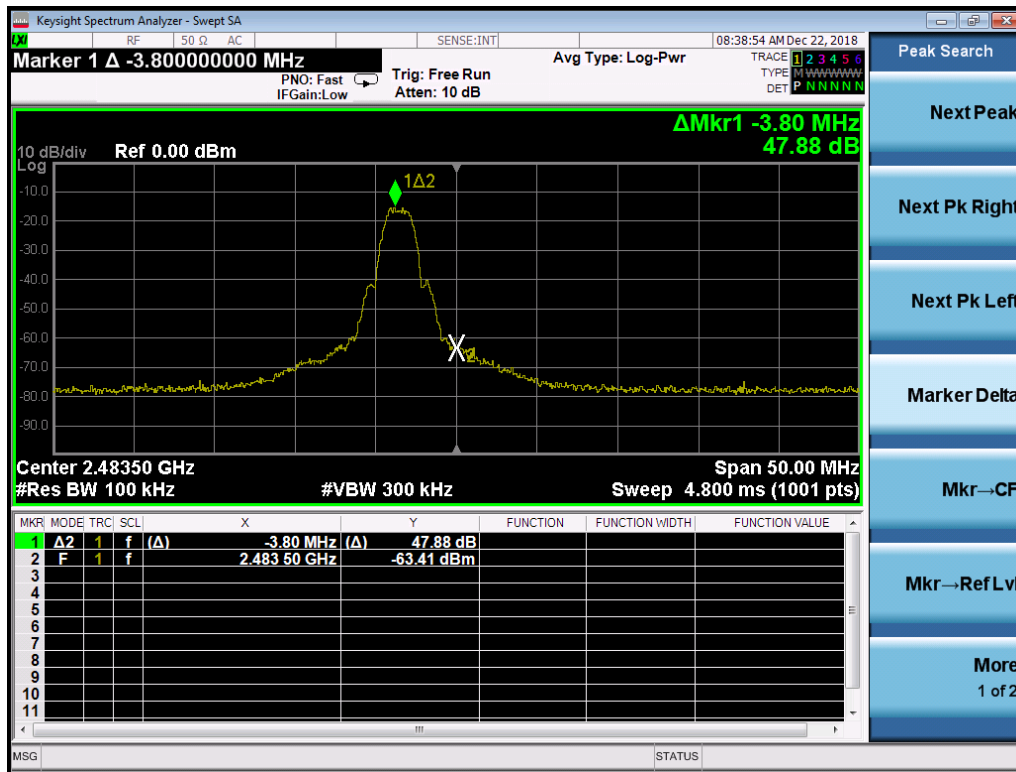

High Channel 26 at 19.5dBm,
to represent Ch 25 at 19.5dBm and Ch 26 at 0dBm

Power Spectral Density

LIMIT

...the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
[15.247(e)]

MEASUREMENTS / RESULTS

Peak Power Spectral Density							
Date: 12/21/2019		Company: Osram			Work Order: S3447		
Engineer: AKZ		Operating Voltage/Frequency: Battery					
Temp: 21°C		Humidity: 31%		Pressure: 996mBar			
Frequency Range: 2400-2480MHz			Measurement Type: Conducted				
			Measurement Method: FCC KDB 558074 D01 15.247 Meas Guidance v05				
Notes:							
Frequency	Peak Reading	Cable Loss	Attenuator Loss	Peak PSD	Limit	Margin	Result
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
2405	-28.78	0.00	29.5	0.72	8.0	-7.28	Pass
2440	-27.87	0.00	29.5	1.63	8.0	-6.37	Pass
2480	-28.22	0.00	29.5	1.28	8.0	-6.72	Pass
Test Site: CEMI-2		Cable: none			Attenuator: Asset #2121		
Analyzer: 1118472							
PSD(dBm) = Reading (dBm) + Cable Loss (dB) + Attenuator Loss (dBm)							

PLOTS



Power Spectral Density, Low Channel



Power Spectral Density, Mid Channel



High Channel 26 at 19.5dBm,

to represent Ch 25 at 19.5dBm and Ch 26 at 0dBm

AC Line Conducted Emissions**LIMITS**

Frequency of emission (MHz)	Quasi-peak limit (dB μ V)	Average limit (dB μ V)
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

[47 CFR 15.207(a)]

MEASUREMENTS / RESULTS

Curtis Straus - a Bureau Veritas Company	Work Order # - S3447
Conducted Emissions per CISPR 16-2-1	EUT Power Input - 120VAC/60Hz
Peak Detector Data	Test Site - CEMI-5
Notes:	Conditions: - 21°C; 35%RH; 996mBar
EUT Line tested: 120VAC/60Hz; Live Phase	Test Engineer - AKZ
Data Taken at 11:49:04 AM, Friday, December 21, 2018	

Frequency (MHz)	Raw Pk Reading (dBμV)	Correction Factor (dB)	Adjusted Pk Amplitude (dBμV)	QP Lim: Mains_FCC&CISPR_QP_Class_B (dBμV)	Margin to the QP Limit (dB)	Pk to QP Limit Results (Pass/Fail)	Worst Margin (QP Limit) (dB)
0.166	40	20.8	60.8	65.2	-4.4	PASS	-4.4
0.195	36	20.8	56.8	63.8	-7.1	PASS	
0.225	32.6	20.8	53.3	62.6	-9.3	PASS	
0.281	28.4	20.8	49.1	60.8	-11.6	PASS	
0.319	27.5	20.8	48.3	59.7	-11.5	PASS	
0.345	26.9	20.8	47.7	59.1	-11.4	PASS	

Curtis Straus - a Bureau Veritas Company	Work Order # - S3447
Conducted Emissions per CISPR 16-2-1, CISPR Average Detector	EUT Power Input - 120VAC/60Hz
Final Average Detector Data	Test Site - CEMI-5
Notes:	Conditions: - 21°C; 35%RH; 996mBar
EUT Line tested: 120VAC/60Hz; Live Phase	Test Engineer - AKZ
Data Taken at 11:49:04 AM, Friday, December 21, 2018	

Frequency (MHz)	Raw Avg Reading (dBμV)	Correction Factor (dB)	Adjusted Avg Amplitude (dBμV)	Av Lim: Mains_FCC&CISPR_Avg_Class_B (dBμV)	Avg Margin (dB)	Avg Results (Pass/Fail)	Worst Avg Margin (dB)
0.151	12.5	20.8	33.3	56	-22.7	PASS	
0.169	12.4	20.8	33.2	55	-21.8	PASS	
0.184	12.5	20.8	33.3	54.3	-21	PASS	
0.186	12.5	20.8	33.2	54.2	-21	PASS	-21
0.235	9.9	20.8	30.6	52.3	-21.7	PASS	
0.277	8.4	20.8	29.1	50.9	-21.8	PASS	

Curtis Straus - a Bureau Veritas Company
 Conducted Emissions per CISPR 16-2-1
 Peak Detector Data
 Notes:
 EUT Line Tested: 120VAC/60Hz; Neutral Phase

Work Order # - S3447
 EUT Power Input - 120VAC/60Hz
 Test Site - CEMI-5
 Conditions: - 21°C; 35%RH; 996mBar
 Test Engineer - AKZ
 0

Data Taken at 12:00:51 PM, Friday, December 21, 2018

Frequency (MHz)	Raw Pk Reading (dBµV)	Correction Factor (dB)	Adjusted Pk Amplitude (dBµV)	QP Lim: Mains_FCC&CISPR_QP_Class_B (dBµV)	Margin to the QP Limit (dB)	Pk to QP Limit Results (Pass/Fail)	Worst Margin (QP Limit) (dB)	Av Lim: Mains_FCC&CISPR_Avg_Class_B (dBµV)	Margin to Avg Limit (dB)	Pk to Avg Limit Results (Pass/Fail)	Worst Margin (Avg Limit) (dB)
0.184	24.4	20.8	45.2	64.3	-19.1	PASS	-19.1	54.3	-9.1	PASS	-9.1
0.21	18.5	20.8	39.3	63.2	-23.9	PASS		53.2	-13.9	PASS	
0.254	18.6	20.8	39.3	61.6	-22.3	PASS		51.6	-12.3	PASS	
0.294	16	20.8	36.7	60.4	-23.7	PASS		50.4	-13.7	PASS	
0.378	12.1	20.7	32.9	58.3	-25.5	PASS		48.3	-15.5	PASS	
4.007	7.1	20.8	27.9	56	-28.1	PASS		46	-18.1	PASS	

Rev. 12/17/2018

Spectrum Analyzers / Receivers /Preselectors
 Rental EXA Signal Analyzer(1118472)

Range 9KHz-26.5GHz **MN** N9010A-526;K

Mfr AT

SN MY51170010

Asset 1118472

Cat I

Calibration Due 8/10/2019

Calibrated on 8/10/2018

LISNs/Measurement Probes

Range 150kHz-30MHz

MN LI-150A

Mfr Com-Power

SN 201094

Asset 1732

Cat I

Calibration Due 3/23/2019

Calibrated on 3/23/2018

LISN Asset 1732

LISN Asset 1733

150kHz-30MHz

LI-150A

Com-Power

201095

1733

I

3/23/2019

3/23/2018

Conducted Test Sites (Mains / Telco)
 CEMI 5

FCC Code 719150

VCCI Code A-0015

Cat III

Calibration Due NA

Calibrated on N/A

Meteorological Meters/Chambers

Weather Clock (Pressure Only)
 TH A#2081

MN BA928
 HTC-1

Mfr Oregon Scientific
 HDE

SN C3166-1

Asset 831
 2081

Cat I
 II

Calibration Due 5/15/2020
 3/23/2019

Calibrated on 5/15/2018
 3/23/2018

Cables

CEMI-11

Range 9kHz - 2GHz

Mfr C-S

Cat II

Calibration Due 4/2/2019

Calibrated on 4/2/2018

Attenuators

20dB Attenuator-64

Range 9kHz-2GHz

MN

Mfr

SN N/A

Asset

Cat II

Calibration Due 11/15/2019

Calibrated on 11/15/2018

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



99% Occupied Bandwidth

REQUIREMENT

When an occupied bandwidth is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is its 99% emission bandwidth, as calculated or measured.

[RSS-Gen Issue 5 6.7]


MEASUREMENTS / RESULTS

99% Occupied Bandwidth			
Date: 12/21/2018		Company: Osram	
Engineer: AKZ		Work Order: S3447	
Temp: 21°C		Operating Voltage/Frequency: Battery	
Humidity: 31%		Pressure: 996mBar	
Frequency Range: 2400-2480MHz		Measurement Type: Conducted	
Measurement Method: RSS-Gen Issue 5 Section 6.7			
Notes:			
Frequency (MHz)	99% OBW (MHz)		
2405	2.2744		
2440	2.2779		
2480	2.2819		
Test Site: CEMI-2		Attenuator: Asset #2121	
Analyzer: 1118472		Cable: none	
Copyright Curtis-Straus LLC 2000			


PLOTS



Occupied Bandwidth, Low Channel

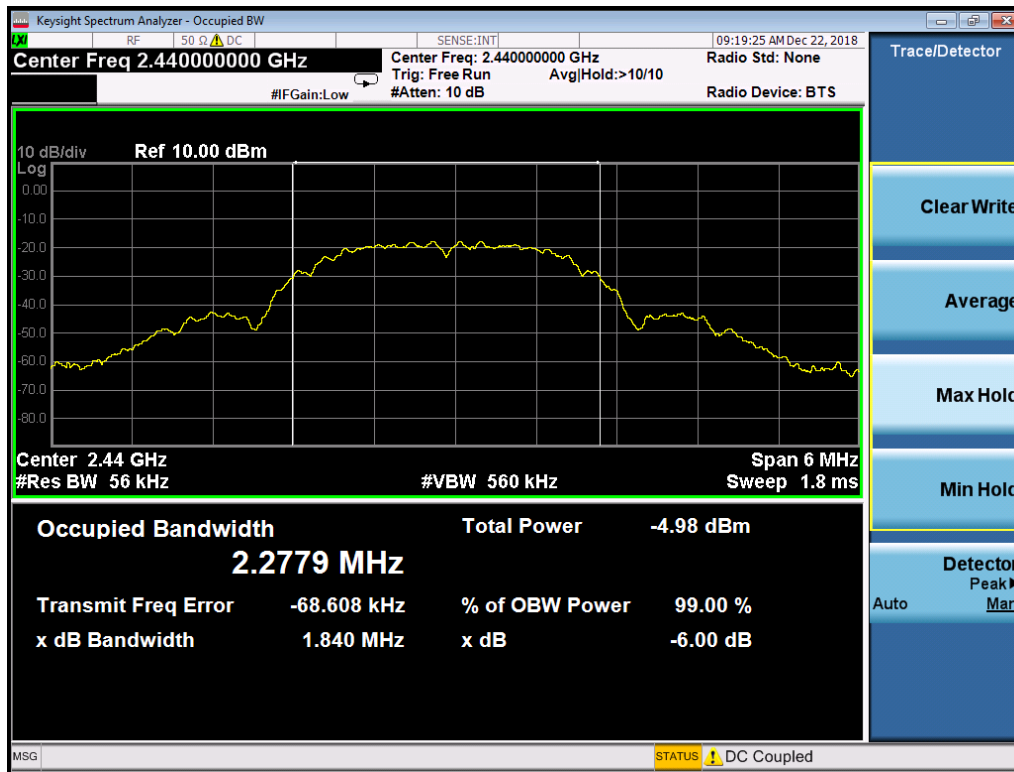

Occupied Bandwidth, Mid Channel

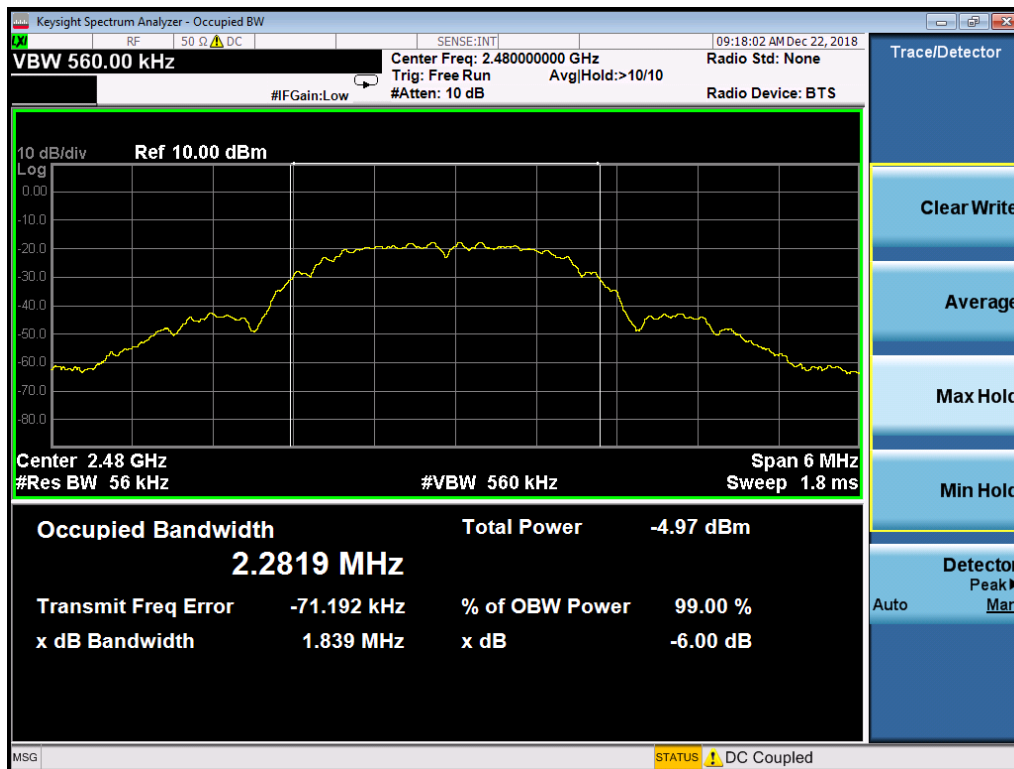Occupied Bandwidth, High Channel 26 (19.5dBm)
to represent Ch 25 at 19.5dBm and Ch 26 at 0dBm

TEU for all conducted antenna port measurements

Rev. 1/16/2019

Spectrum Analyzers / Receivers /Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Rental EXA Signal Analyzer(1118472)	9KHz-26.5GHz	N9010A-526;K	AT	MY51170010	1118472	I	8/10/2019	8/10/2018
Preamps /Couplers Attenuators / Filters	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
API - 30dB 20W Attenuator	9KHz-40GHz	89-30-11	API Weinschel	703	2121	I	3/23/2019	3/23/2018

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Measurement Uncertainty

The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Expanded Uncertainty k=2	Maximum allowable uncertainty
Radiated Emissions (30-1000MHz)		
NIST	5.6dB	N/A
CISPR	4.6dB	5.2dB (Ucisprr)
Radiated Emissions (1-26.5GHz)	4.6dB	N/A
Radiated Emissions (above 26.5GHz)	4.9dB	N/A
Magnetic Radiated Emissions	5.6dB	N/A
Conducted Emissions		
NIST	3.9dB	N/A
CISPR	3.6dB	3.6dB (Ucisprr)
Telco Conducted Emissions (Current)	2.9dB	N/A
Telco Conducted Emissions (Voltage)	4.4dB	N/A
Electrostatic Discharge	11.5%	N/A
Radiated RF Immunity (Uniform Field)	1.6dB	N/A
Electrical Fast Transients	23.1%	N/A
Surge	23.1%	N/A
Conducted RF Immunity	3dB	N/A
Magnetic Immunity	12.8%	N/A
Dips and Interrupts	2.3V	N/A
Harmonics	3.5%	N/A
Flicker	3.5%	N/A
Radio frequency (@ 2.4GHz)	3.23×10^{-8}	1×10^{-7}
RF power, conducted	0.40dB	0.75dB
Maximum frequency deviation:		
• Within 300Hz and 6kHz of audio frequency / Within 6kHz and 25kHz of audio frequency	3.4% 0.3dB	5% 3dB
Adjacent channel power	1.9dB	3dB
Conducted spurious emission of transmitter, valid up to 12.75GHz	2.39dB	3dB
Conducted emission of receivers	1.3dB	3dB
Radiated emission of transmitter, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of transmitter, valid up to 80GHz	3.3dB	6dB
Radiated emission of receiver, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of receiver, valid up to 80GHz	3.3dB	6dB
Humidity	2.37%	5%
Temperature	0.7°C	1.0°C
Time	4.1%	10%
RF Power Density, Conducted	0.4dB	3dB
DC and low frequency voltages	1.3%	3%
Voltage (AC, <10kHz)	1.3%	2%
Voltage (DC)	0.62%	1%
The above reflects a 95% confidence level		



BUREAU
VERITAS

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Conditions Of Testing

[Bureau Veritas Consumer Products Services, Inc., a Massachusetts corporation], and/or its affiliates (collectively, the "Company") will conduct, at the request of the Submitter ("Client"), the tests specified on the submitted Test Request Form or equivalent in accordance with, and subject to, the following terms and conditions (collectively, "Conditions"):

1. All orders for tests are subject to acceptance by the Company, and no order will constitute a binding commitment of the Company unless and until such order is accepted by it, as evidenced by the issuance of a written report ("Test Report") by the Company. The Test Report is issued solely by the Company, is intended for the exclusive use of Client and shall not be published, used for advertising purposes, copied or replicated for distribution to any other person or entity or otherwise publicly disclosed without the prior written consent of the Company. By submitting a request for services to the Company, Client consents to the disclosure to accreditation bodies of those records of Client relevant to the accreditation body's assessment of the Company's competence and compliance with relevant accreditation criteria. The Company shall not be liable for any loss or damage whatsoever resulting from the failure of the Company to provide its services within any time period for completion estimated by the Company. If Client anticipates using the Test Report in any legal proceeding, arbitration, dispute resolution forum or other proceeding, it shall so notify the Company prior to submitting the Test Report in such proceeding. The Company has no obligation to provide a fact or expert witness at such proceeding unless the Company agrees in advance to do so for a separate and additional fee.
2. The Test Report will set forth the findings of the Company solely with respect to the test samples identified therein. Unless specifically and expressly indicated in the Test Report, the results set forth in such Test Report are not intended to be indicative or representative of the quality or characteristics of the lot from which a test sample is taken, and Client shall not rely upon the Test Report as being so indicative or representative of the lot or of the tested product in general. The Test Report will reflect the findings of the Company at the time of testing only, and the Company shall have no obligation to update the Test Report after its issuance. The Test Report will set forth the results of the tests performed by the Company based upon the written information provided to the Company. The Test Report will be based solely on the samples and written information submitted to the Company by Client, and the Company shall not be obligated to conduct any independent investigation or inquiry with respect thereto.
3. The Company may, in its sole discretion, destroy samples which have been furnished to the Company for testing and which have not been destroyed in the course of testing. The Company may delegate the performance of all or a portion of the services contemplated hereunder to an affiliate, agent or subcontractor of the Company, and Client consents to such delegation.
4. These Conditions and the Test Report represent the entire understanding of the parties hereto with respect to the subject matter hereof and of the Test Report, and no modification, variance or extrapolation with respect thereto shall be permitted without the prior written consent of the Company.
5. The names, service marks, trademarks and copyrights of the Company and its affiliates, including the names "BUREAU VERITAS," "BUREAU VERITAS CONSUMER PRODUCTS SERVICES," "BVCPS," "MTL," "ACTS," "MTL-ACTS" and CURTIS-STRAUS (collectively, the "Marks") are and shall remain the sole property of the Company or its affiliates and shall not be used by Client except solely to the extent that Client obtains the prior written approval of the Company and then only in the manner prescribed by the Company. Client shall not contest the validity of the Marks or take any action that might impair the value or goodwill associated with the Marks or the image or reputation of the Company or its affiliates.
6. Payment in full shall be due 30 days after the date of invoice. Interest shall be due on overdue amounts from the due date until paid at an interest rate of 1.5% per month or, if less, the maximum rate permitted by law. The Company reserves the right, at any time and from time to time, to revoke any credit extended to Client. Client shall reimburse the Company for any costs it incurs in collecting past due amounts, including court costs and fees and expenses of attorneys and collection agencies. The Test Report may not be used or relied upon by Client if and for so long as Client fails to pay when due any invoice issued by the Company or any affiliate of it to Client or any affiliate or subsidiary of Client together with interest and penalties, if any, accrued thereon.
7. The Company disclaims any and all responsibility or liability arising out of or in connection with e-mail transmissions of such information.
8. Client understands and agrees that the Company is neither an insurer nor a guarantor, that the Company does not take the place of Client or any designer, manufacturer, agent, buyer, distributor or transportation or shipping company, and that the Company disclaims all liability in such capacities. Client further understands that if it seeks assurance against loss or damage, it should obtain appropriate insurance.
9. Client agrees that the Company, by providing the services, does not take the place of Client nor any third party, nor does the Company release them from any of their obligations, nor does the Company otherwise assume, abridge, abrogate or undertake to discharge any duty of any third party to Client or any duty of Client or any third party to any other third party, and Client will not release any third party from its obligations and duties with respect to the tested goods.
10. Client shall, on a timely basis, (a) provide adequate instructions to the Company in order to enable the Company to perform properly its services, (b) provide, or cause Client's suppliers and contractors to provide, the Company with all documents necessary to enable the Company to perform its services, (c) furnish the Company with all relevant information regarding Client's intended use and purposes of the tested goods, (d) advise the Company of essential dates and deadlines relevant to the tested goods and (e) fully exercise all rights and remedies available to Client against third parties in respect of the tested goods.
11. The Company shall undertake due care and ordinary skill in the performance of its services to Client, and the Company shall accept responsibility only where such skill has not been exercised and, even in such event, only to the extent of the limitation of liability set forth herein.
12. If Client desires to assert a claim arising from or relating to (i) the performance, purported performance or non-performance of any services by the Company or (ii) the sale, resale, manufacture, distribution or use of any tested goods, it must submit that claim to the Company in a writing that sets forth with particularity the basis for such claim within 60 days from discovery of the potential claim and not more than six months after the date of issuance of the Test Report to Client. Client waives any and all such claims including, without limitation, claims that the Test Report is inaccurate, incomplete or misleading or that additional or different testing is required, unless and then only to the extent that Client submits a written claim to the Company within both such time periods.
13. CLIENT SHALL, EXCEPT TO THE EXTENT OF COMPANY'S LIABILITY TO CLIENT HEREUNDER (WHICH IN NO EVENT SHALL EXCEED THE LIMITATION OF LIABILITY HEREIN), HOLD HARMLESS AND INDEMNIFY THE COMPANY, ITS AFFILIATES AND THEIR RESPECTIVE DIRECTORS, OFFICERS, EMPLOYEES, AGENTS AND SUBCONTRACTORS AGAINST ALL ACTUAL OR ALLEGED THIRD PARTY CLAIMS FOR LOSS, DAMAGE OR EXPENSE OF WHATSOEVER NATURE AND HOWSOEVER ARISING FROM OR RELATING TO (i) THE PERFORMANCE, PURPORTED PERFORMANCE OR NON-PERFORMANCE OF ANY SERVICES BY THE COMPANY OR (ii) THE SALE, RESALE, MANUFACTURE, DISTRIBUTION OR USE OF ANY TESTED GOODS.
14. EXCEPT AS MAY OTHERWISE BE EXPRESSLY AGREED TO IN WRITING BY THE COMPANY AND NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN OR IN ANY TEST REPORT, NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR USE, IS MADE.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



15. (A) IN NO EVENT WHATSOEVER SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL, SPECIAL, INCIDENTAL, EXEMPLARY OR PUNITIVE DAMAGES IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE TEST REPORT OR THE SERVICES PROVIDED BY THE COMPANY HEREUNDER, INCLUDING WITHOUT LIMITATION LOSS OF OR DAMAGE TO PROPERTY; LOSS OF INCOME, PROFIT OR USE; OR ANY CLAIMS OR DEMANDS MADE AGAINST CLIENT OR ANY OTHER PERSON BY ANY THIRD PARTY IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE SERVICES PROVIDED BY THE COMPANY HEREUNDER.

(B) NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN, AND IN RECOGNITION OF THE RELATIVE RISKS AND BENEFITS TO CLIENT AND THE COMPANY ASSOCIATED WITH THE TESTING SERVICES CONTEMPLATED HEREBY, THE RISKS HAVE BEEN ALLOCATED SUCH THAT UNDER NO CIRCUMSTANCES WHATSOEVER SHALL THE LIABILITY OF THE COMPANY TO CLIENT OR ANY THIRD PARTY IN RESPECT OF ANY CLAIM FOR LOSS, DAMAGE OR EXPENSE, OF WHATSOEVER NATURE OR MAGNITUDE, AND HOWSOEVER ARISING, EXCEED AN AMOUNT EQUAL TO FIVE (5) TIMES THE AMOUNT OF THE FEES PAID TO THE COMPANY FOR THE SPECIFIC SERVICES WHICH GAVE RISE TO SUCH CLAIM OR U.S.\$10,000, WHICHEVER IS THE LESSER AMOUNT.

16. The Company shall not be liable for any loss or damage resulting from any delay or failure in performance of its obligations hereunder resulting directly or indirectly from any event of force majeure or any event outside the control of the Company. If any such event occurs, the Company may immediately cancel or suspend its performance hereunder without incurring any liability whatsoever to Client.

17. Company's services, including these Conditions, shall be governed by, and construed in accordance with, the local laws of the country where the Company performs the tests or, in the case of tests performed in the United States of America, the laws of Massachusetts without regard to conflicts of laws principles. If any aspect(s) of these Conditions is found to be illegal or unenforceable, the validity, legality and enforceability of all remaining aspects of these Conditions shall not in any way be affected or impaired thereby. Any proceeding related to the subject matter hereof shall be brought, if at all, in the courts of the country where the Company performs the tests or, in the case of tests performed in the United States of America, in the courts of Massachusetts. Client waives the right to interpose any counterclaim or setoffs of any nature in any litigation arising hereunder.

The complete list of the Approved Subcontractors Curtis-Straus may use to delegate the performance of work can be provided upon request.
Rev.160009121(2)_#684340 v14CS

