

## FCC Test Report

**Report No.:** RFBGDGE-WTW-P20080267

**FCC ID:** E2K-DWRFID2001

**Test Model:** DWRFID2001

**Received Date:** Aug. 14, 2020

**Test Date:** Aug. 23 ~ Sep. 10, 2020

**Issued Date:** Sep. 10, 2020

**Applicant:** DELL INC.

**Address:** One Dell Way Round Rock, Texas 78682 United States

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, TAIWAN

**FCC Registration /  
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record</b> .....	<b>3</b>
<b>1 Certificate of Conformity</b> .....	<b>4</b>
<b>2 Summary of Test Results</b> .....	<b>5</b>
2.1 Measurement Uncertainty.....	5
2.2 Modification Record.....	5
<b>3 General Information</b> .....	<b>6</b>
3.1 General Description of EUT.....	6
3.2 Description of Test Modes.....	7
3.2.1 Test Mode Applicability and Tested Channel Data.....	8
3.3 Description of Support Units.....	10
3.3.1 Configuration of System under Test.....	11
3.4 General Description of Applied Standards.....	11
<b>4 Test Types and Results</b> .....	<b>12</b>
4.1 Radiated Emission Measurement.....	12
4.1.1 Limits of Radiated Emission Measurement.....	12
4.1.2 Test Instruments.....	13
4.1.3 Test Procedures.....	14
4.1.4 Deviation from Test Standard.....	14
4.1.5 Test Set Up.....	15
4.1.6 EUT Operating Conditions.....	15
4.1.7 Test Results.....	16
4.2 Conducted Emission Measurement.....	272
4.2.1 Limits of Conducted Emission Measurement.....	272
4.2.2 Test Instruments.....	272
4.2.3 Test Procedures.....	273
4.2.4 Deviation from Test Standard.....	273
4.2.5 Test Setup.....	273
4.2.6 EUT Operating Conditions.....	273
4.2.7 Test Results.....	274
4.3 Frequency Stability.....	286
4.3.1 Limits of Frequency Stability Measurement.....	286
4.3.2 Test Setup.....	286
4.3.3 Test Instruments.....	286
4.3.4 Test Procedure.....	286
4.3.5 Deviation from Test Standard.....	287
4.3.6 EUT Operating Conditions.....	287
4.3.7 Test Result.....	287
4.4 20dB Bandwidth.....	293
4.4.1 Limits of 20dB Bandwidth Measurement.....	293
4.4.2 Test Setup.....	293
4.4.3 Test Instruments.....	293
4.4.4 Test Procedures.....	293
4.4.5 Deviation from Test Standard.....	293
4.4.6 EUT Operating Conditions.....	293
4.4.7 Test Results.....	294
<b>5 Pictures of Test Arrangements</b> .....	<b>302</b>
<b>Appendix – Information of the Testing Laboratories</b> .....	<b>303</b>

### Release Control Record

Issue No.	Description	Date Issued
RFBGDGE-WTW-P20080267	Original release	Sep. 10, 2020

## 1 Certificate of Conformity

**Product:** RFID13.56MHz Wireless Module

**Brand:** DELL

**Model:** DWRFID2001

**Sample Status:** Engineering sample

**Applicant:** DELL INC.

**Test Date:** Aug. 23 ~ Sep. 10, 2020

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.225)  
47 CFR FCC Part 15, Subpart C (Section 15.215)  
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :**

  
Polly Chien / Specialist

**Date:**

Sep. 10, 2020

**Approved by :**



Bruce Chen / Project Engineer

**Date:**

Sep. 10, 2020

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.225, 15.215)			
FCC Clause	Test Item	Result	Remarks
15.207	Conducted emission test	Pass	Meet the requirement of limit. Minimum passing margin is -0.12dB at 13.5600MHz
15.225 (a)	The field strength of any emissions within the band 13.553-13.567 MHz	Pass	Meet the requirement of limit. Minimum passing margin is -50.3dB at 13.56MHz.
15.225 (b)	The field strength of any emissions within the bands 13.410-13.553 MHz and 13.567-13.710 MHz	Pass	Meet the requirement of limit.
15.225 (c)	The field strength of any emissions within the bands 13.110-13.410 MHz and 13.710-14.010 MHz	Pass	Meet the requirement of limit.
15.225 (d)	The field strength of any emissions appearing outside of the 13.110-14.010 MHz band	Pass	Meet the requirement of limit. Minimum passing margin is -3.5dB at 30.00MHz.
15.225 (e)	The frequency tolerance	Pass	Meet the requirement of limit.
15.215 (c)	20dB Bandwidth	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

Note:

Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.94 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.04 dB
	30MHz ~ 200MHz	3.86 dB
	200MHz ~ 1000MHz	3.87 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	RFID13.56MHz Wireless Module
Brand	DELL
Model	DWRFID2001
Sample Status	Engineering sample
Power Supply Rating	5.0 or 9.0 or 15.0 or 20Vdc (adapter)
Modulation Type	PWM
Data Rate	Type A: 106 kbit/s Type B: 106 kbit/s Type F: 424 kbit/s Type V: 848kbit/s
Operating Frequency	13.56MHz
Field Strength	P104F: WNC antenna: 24.6dBuV/m (QP) (30m) Speed antenna: 23.9dBuV/m (QP) (30m) P138G: WNC antenna: 31.8dBuV/m (QP) (30m) Speed antenna: 28.6dBuV/m (QP) (30m) P139G: WNC antenna: 33.7dBuV/m (QP) (30m) Speed antenna: 33.3dBuV/m (QP) (30m)
Antenna Type	Loop antenna (Brand: WNC, Speed)
Accessory Device	NA
Data Cable Supplied	NA

Note:

- The transmitter module is authorized for using in the following specific End-products.

End-product name	Brand	Model	Antenna vendor
Portable Computer	DELL	P104F	WNC
			Speed
		P138G	WNC
			Speed
		P139G	WNC
			Speed

- The End-products consumes power from the following adapters.

Adapter 1 ( For P104F)	
Brand	DELL
Model	DA130PM170
Input Power	100-240Vac~, 1.8A, 50-60Hz
Output Power	5.0Vdc, 1.0A/5.0W; 20Vdc, 6.5A/130.0W
Power Line	1.75m DC power cable without core 0.85m AC power cable without core

Adapter 2 ( For P138G)	
Brand	DELL
Model	LA65NM190
Input Power	100-240Vac~, 1.7A, 50-60Hz
Output Power	5.0Vdc, 3.0A/15.0W; 15Vdc, 3.0A/45.0W; 9.0Vdc, 3.0A/27.0W; 20Vdc, 3.25A/65.0W
Power Line	1.77m DC power cable without core 0.85m AC power cable without core

Adapter 3 ( For P139G)	
Brand	DELL
Model	HA65NM190
Input Power	100-240Vac~, 1.7A, 50-60Hz
Output Power	5.0Vdc, 3.0A/15.0W; 9.0Vdc, 3.0A/27.0W 15Vdc, 3.0A/45.0W; 20Vdc, 3.25A/65.0W
Power Line	1.77m DC power cable without core 0.85m AC power cable without core

3. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible
4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Description of Test Modes

1 channel is provided to this EUT

Channel	Freq. (MHz)
1	13.56

### 3.2.1 Test Mode Applicability and Tested Channel Data

EUT Configure Mode	Applicable to				Description
	RE	PLC	FS	EB	
A1	√	√	√	√	End-product: P104F with WNC antenna
A2	√	√	√	√	End-product: P104F with Speed antenna
B1	√	√	√	√	End-product: P138G with WNC antenna
B2	√	√	√	√	End-product: P138G with Speed antenna
C1	√	√	√	√	End-product: P139G with WNC antenna
C2	√	√	√	√	End-product: P139G with Speed antenna

Where RE: Radiated Emission  
 FS: Frequency Stability  
 PLC: Power Line Conducted Emission  
 EB: 20dB Bandwidth measurement

Note:

- The EUT had been pre-tested on Type A, Type B, Type F. The worst case was found when data rate was Type A, Type A was chosen for final test of Frequency Stability test.
- The antenna had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane (for all mode)** and **Y-plane (for mode C1, C2)**.

#### Radiated Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
A1, A2, B1, B2, C1, C2	1	1	PWM

#### Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
A1, A2, B1, B2, C1, C2	1	1	PWM

#### Frequency Stability:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
A1, A2, B1, B2, C1, C2	1	1	PWM

#### 20dB Bandwidth:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
A1, A2, B1, B2, C1, C2	1	1	PWM



**Test Condition:**

<b>Applicable to</b>	<b>Environmental Conditions</b>	<b>Input Power</b>	<b>Tested by</b>
<b>RE</b>	23 deg. C, 66% RH	120Vac, 60Hz	Adair Peng
<b>PLC</b>	23 deg. C, 66% RH	120Vac, 60Hz	Titan Hsu
<b>FS</b>	23 deg. C, 67% RH	120Vac, 60Hz	Adair Peng
<b>BW</b>	23 deg. C, 66% RH	120Vac, 60Hz	Adair Peng

### 3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

#### End-product Model: P138G, P139G

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Type-C USB	SanDisk	SDDDC3-320G	NA	NA	Provided by client
B.	FLASH	HP	v250W	03	NA	-
	FLASH	HP	v250W	05	NA	-
C.	Earphone	NA	NA	NA	NA	-
D.	Portable Computer	DELL	P138G or P139G	NA	NA	Provided by client
E.	Adapter	DELL	LA65NM190	NA	NA	Provided by client (For P138G)
	Adapter	DELL	HA65NM190	NA	NA	Provided by client (For P139G)

#### End-product Model: P104F


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	FLASH	HP	v250W	NA	NA	Provided by client
B.	Type-C USB	SanDisk	SDDDC3-320G	03	NA	-
C.	Earphone	NA	NA	05	NA	-
D.	Portable Computer	DELL	P104F	NA	NA	Provided by client
E.	Adapter	DELL	DA130PM170	NA	NA	Provided by client
F.	Load	NA	NA	NA	NA	-

Note: All power cords of the above support units are non-shielded (1.8m).


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	Power cable	1	1.77	-	0	Provided by client For P138G, P139G
	Power cable	1	1.75	-	0	Provided by client For P104F
2.	Earphone cable	1	1.2	N	0	-
3.	HDMI cable	1	2	N	0	-
4.	LAN cable	1	1.5	N	0	Cat.5e, RJ45 Provided by Lab

### 3.3.1 Configuration of System under Test

End-product Model: P138G, P139G

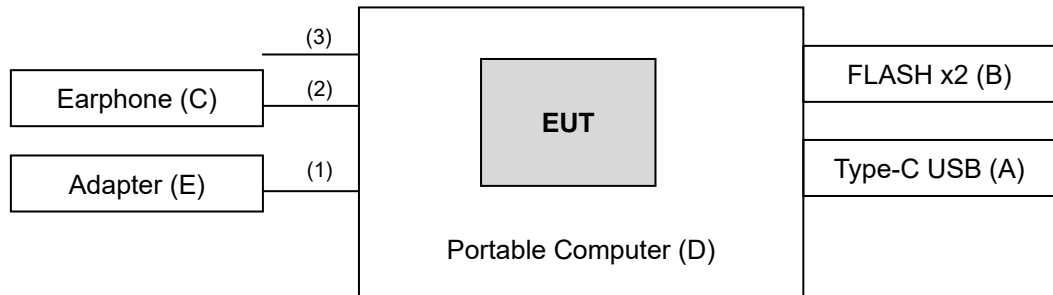

End-product Model: P104F

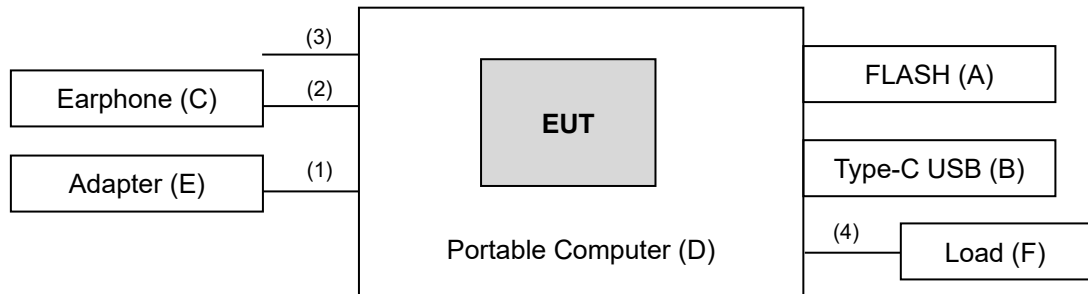

### 3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.225)**

**FCC Part 15, Subpart C (15.215)**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

## 4 Test Types and Results

### 4.1 Radiated Emission Measurement

#### 4.1.1 Limits of Radiated Emission Measurement

The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESR3	102579	Jul. 07, 2020	Jul. 06, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Jun. 09, 2020	Jun. 08, 2021
BILOG Antenna SCHWARZBECK	VULB9168	9168-171	Nov. 11, 2019	Nov. 10, 2020
HORN Antenna SCHWARZBECK	9120D	209	Nov. 24, 2019	Nov. 23, 2020
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 24, 2019	Nov. 23, 2020
Loop Antenna TESEQ	HLA 6121	45745	Jul. 06, 2020	Jul. 05, 2021
Preamplifier Agilent (Below 1GHz)	8447D	2944A10738	Aug. 16, 2020	Aug. 15, 2021
Preamplifier Agilent (Above 1GHz)	8449B	3008A02465	Mar. 23, 2020	Mar. 22, 2021
RF Coaxial Cable WOKEN With 5dB PAD	8D-FB	Cable-CH3-01	Aug. 16, 2020	Aug. 15, 2021
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH3-03 (223653/4)	Aug. 16, 2020	Aug. 15, 2021
RF signal cable HUBER+SUHNER& EMCI	SUCOFLEX 104&EMC104-SM- SM-8000	Cable-CH3-03 (309224+170907)	Aug. 16, 2020	Aug. 15, 2021
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021702	NA	NA
Turn Table BV ADT	TT100	TT93021702	NA	NA
Turn Table Controller BV ADT	SC100	SC93021702	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
USB Wideband Power Sensor KEYSIGHT	U2021XA	MY55050005/MY55190 004/MY55190007/MY55 210005	Jul. 13, 2020	Jul. 12, 2021

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 3.

### 4.1.3 Test Procedures

#### For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

#### For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Set Up

##### For Radiated emission below 30MHz

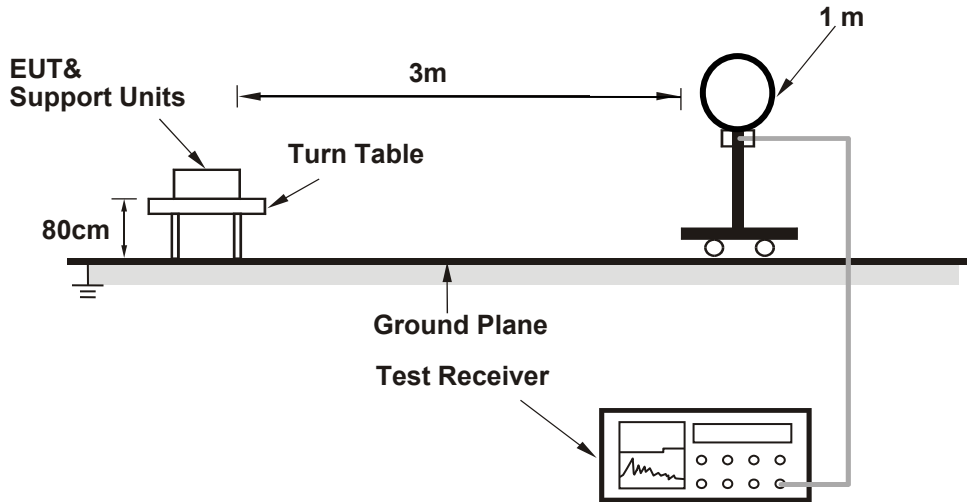

##### For Radiated emission 30MHz to 1GHz

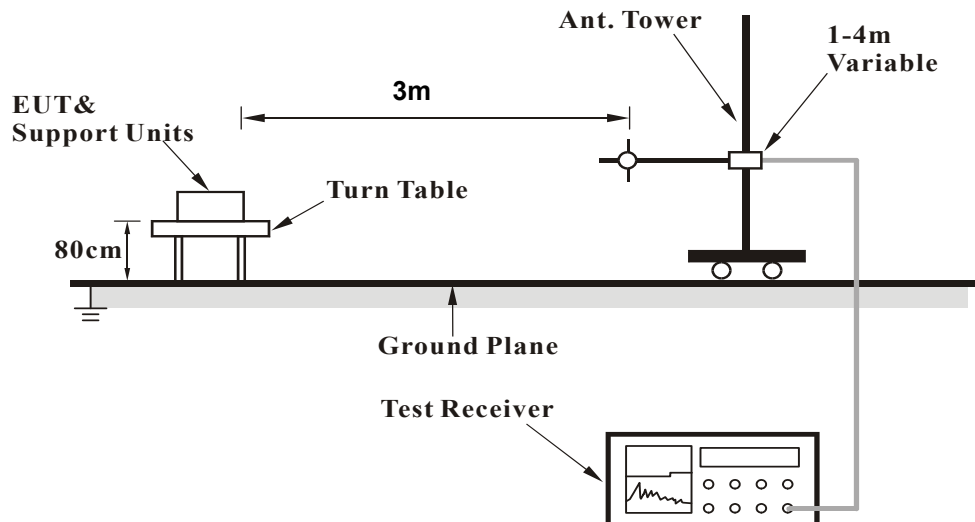

For the actual test configuration, please refer to the attached file (Test Setup Photo).

KDB 414788 OATS and Chamber Correlation Justification

- Based on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in regulations; however, an attempt should be made to avoid making measurements in the near field.
- OATs and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

#### 4.1.6 EUT Operating Conditions

- a. Set the EUT under transmission condition continuously at specific channel frequency.

#### 4.1.7 Test Results

Mode A1

Type A

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	21.9 QP	84.0 QP	-62.1	1.00	145	40.6	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

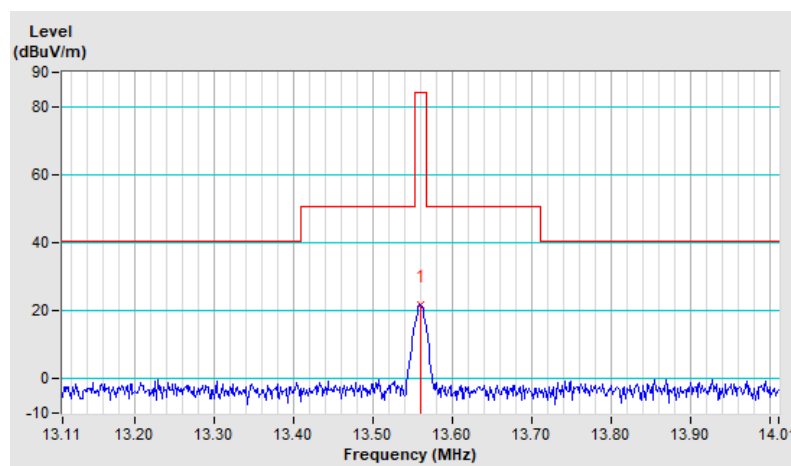



EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	20.7 QP	84.0 QP	-63.3	1.00	233	39.4	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

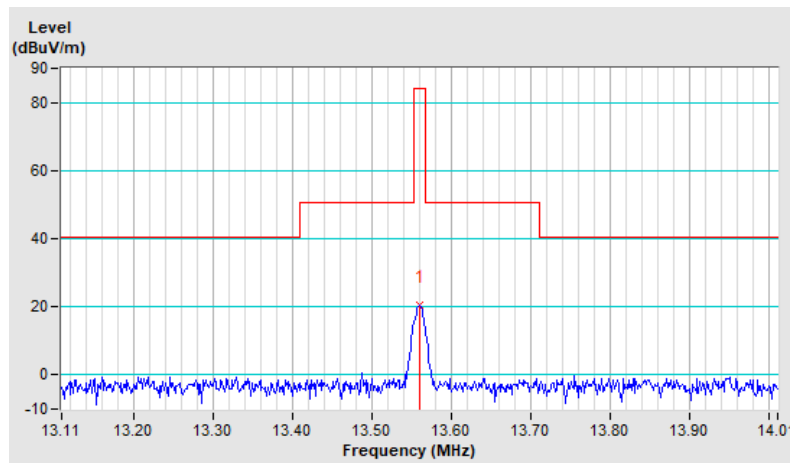

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	24.6 QP	84.0 QP	-59.4	1.00	177	43.3	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

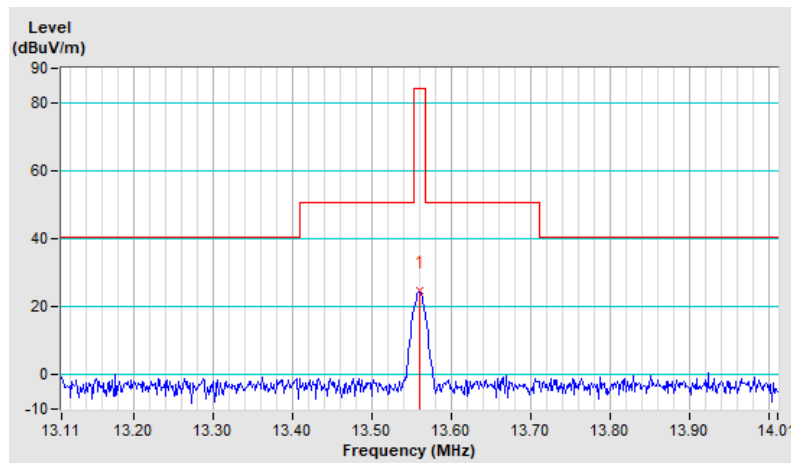

Type B

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	21.8 QP	84.0 QP	-62.2	1.00	143	40.5	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

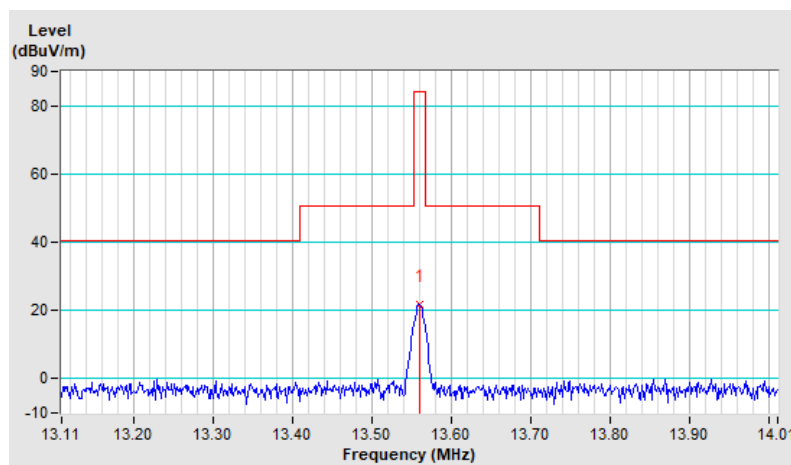

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	20.7 QP	84.0 QP	-63.3	1.00	235	39.4	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

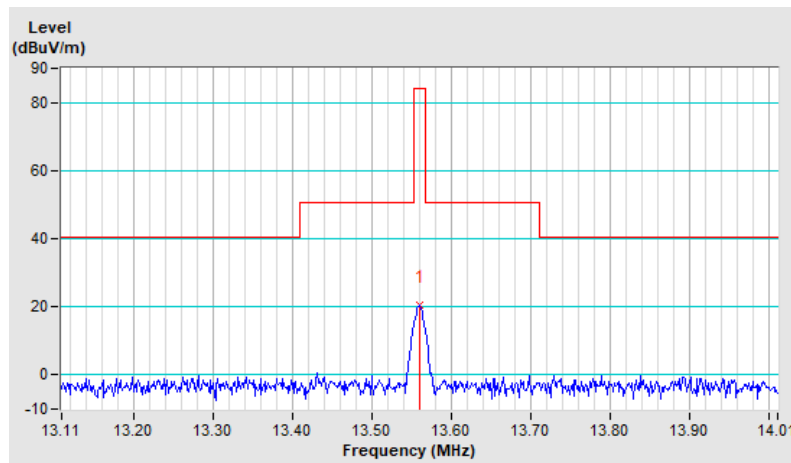

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	24.5 QP	84.0 QP	-59.5	1.00	174	43.2	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

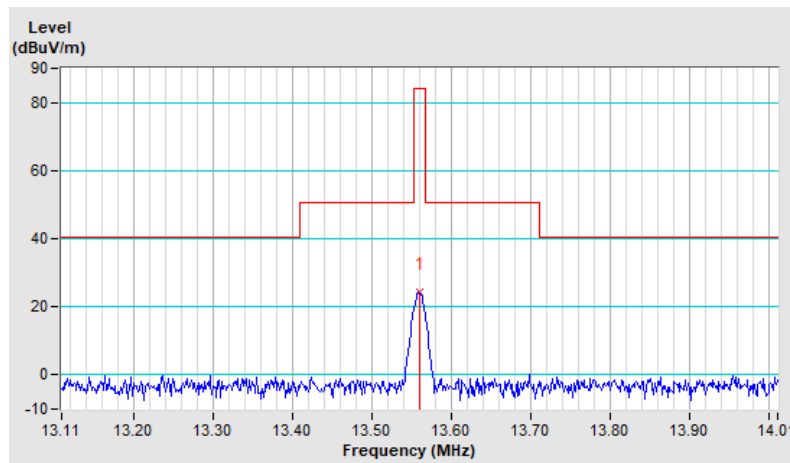

Type F

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	21.8 QP	84.0 QP	-62.2	1.00	149	40.5	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

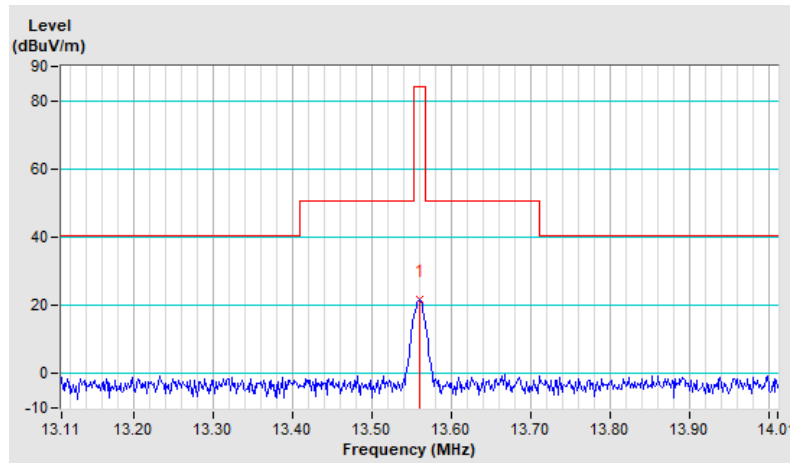

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	20.8 QP	84.0 QP	-63.2	1.00	229	39.5	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

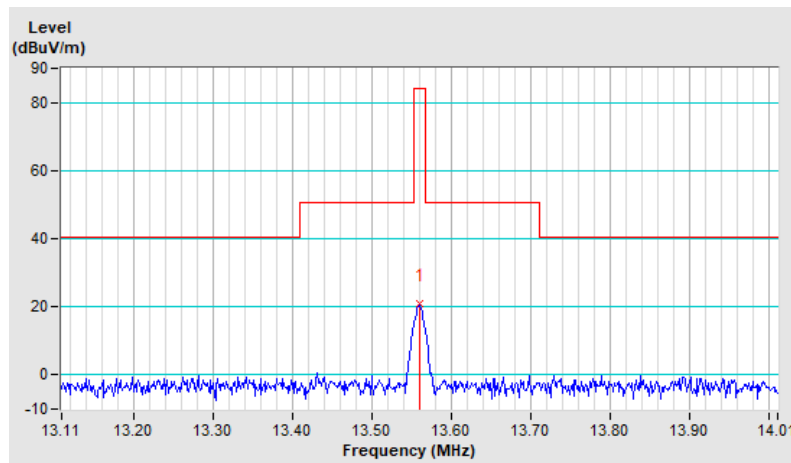

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	24.5 QP	84.0 QP	-59.5	1.00	179	43.2	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

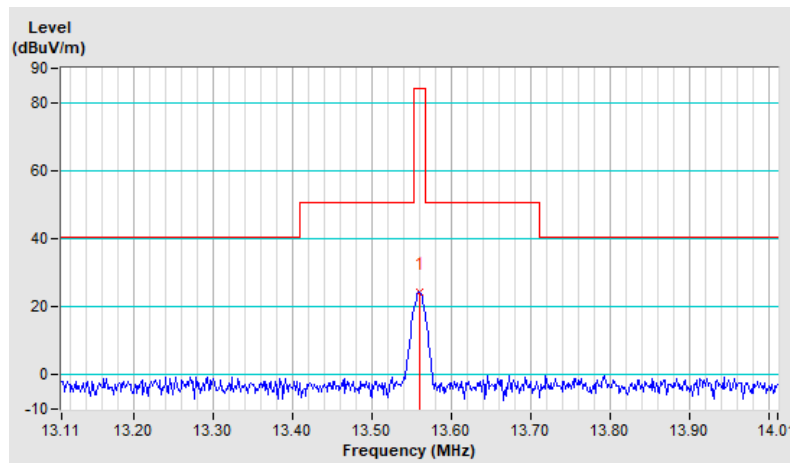



Type V

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	21.7 QP	84.0 QP	-62.3	1.00	151	40.4	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

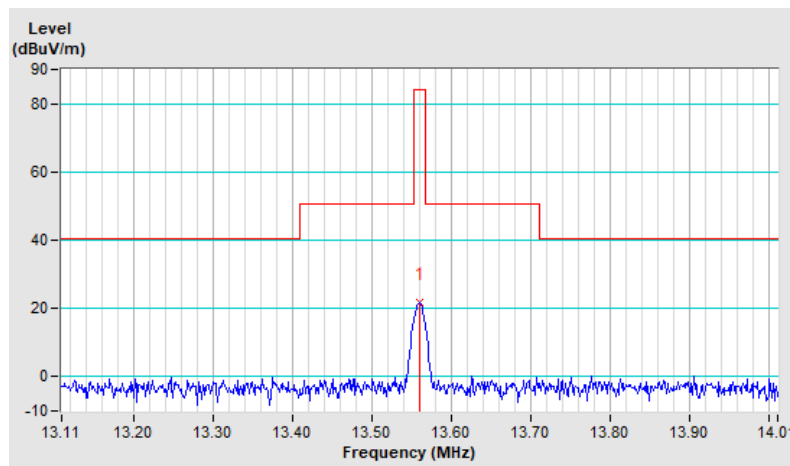

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	20.6 QP	84.0 QP	-63.4	1.00	232	39.3	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

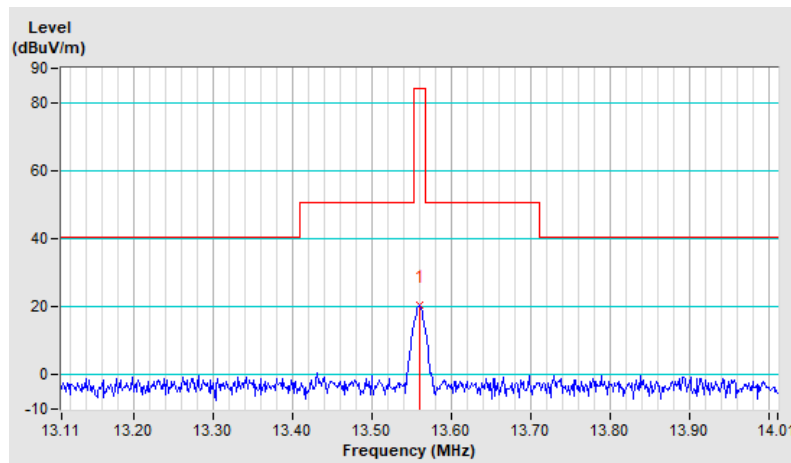

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	24.6 QP	84.0 QP	-59.4	1.00	170	43.3	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

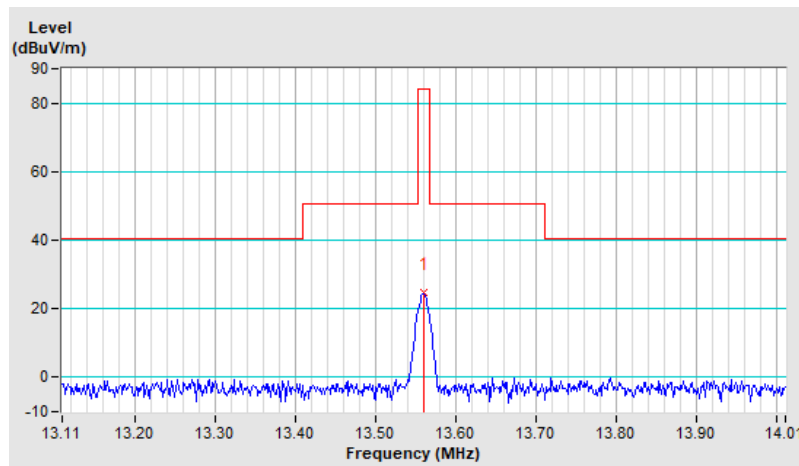


Type A

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2.94	1.90 QP	29.50 QP	-27.60	1.00	155	22.60	-20.70
2	4.38	-3.30 QP	29.50 QP	-32.80	1.00	152	16.80	-20.10
3	5.87	-6.10 QP	29.50 QP	-35.60	1.00	152	13.60	-19.70
4	12.46	-4.80 QP	29.50 QP	-34.30	1.00	206	13.90	-18.70
5	22.12	-3.70 QP	29.50 QP	-33.20	1.00	276	14.70	-18.40
6	25.29	-6.30 QP	29.50 QP	-35.80	1.00	204	12.00	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

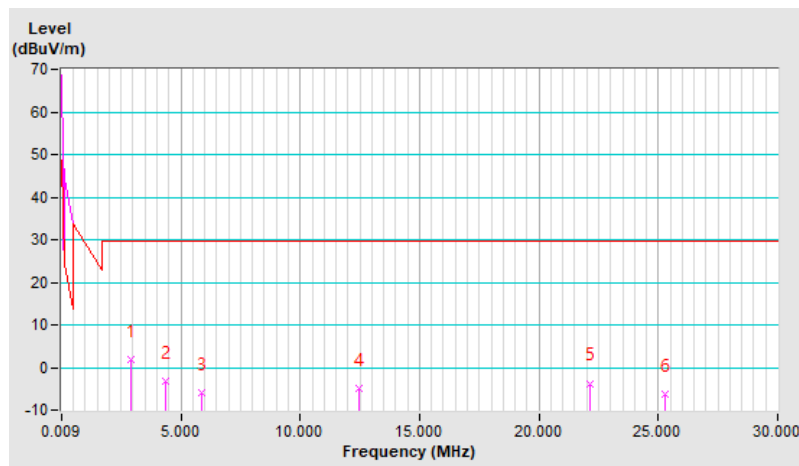


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2.94	0.80 QP	29.50 QP	-28.70	1.00	275	21.50	-20.70
2	3.57	0.00 QP	29.50 QP	-29.50	1.00	211	20.50	-20.50
3	15.77	-2.00 QP	29.50 QP	-31.50	1.00	272	16.60	-18.60
4	20.00	0.40 QP	29.50 QP	-29.10	1.00	182	18.80	-18.40
5	22.12	6.80 QP	29.50 QP	-22.70	1.00	25	25.20	-18.40
6	23.18	8.90 QP	29.50 QP	-20.60	1.00	124	27.20	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

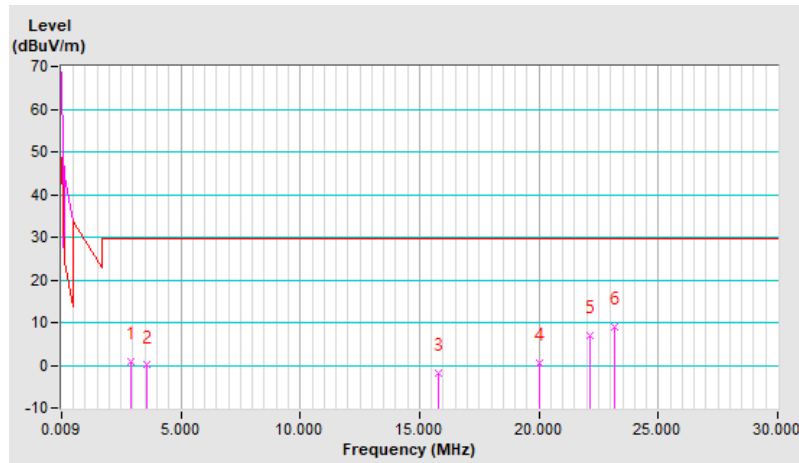


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	9.40 QP	29.50 QP	-20.10	1.00	14	30.00	-20.60
2	3.57	3.30 QP	29.50 QP	-26.20	1.00	14	23.80	-20.50
3	15.77	6.80 QP	29.50 QP	-22.70	1.00	267	25.40	-18.60
4	20.00	13.60 QP	29.50 QP	-15.90	1.00	209	32.00	-18.40
5	22.12	18.20 QP	29.50 QP	-11.30	1.00	52	36.60	-18.40
6	23.18	16.70 QP	29.50 QP	-12.80	1.00	48	35.00	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

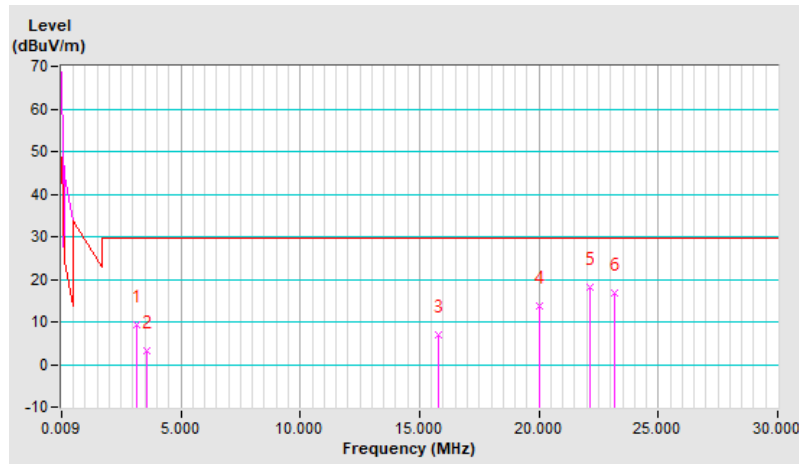


Type B

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2.94	1.80 QP	29.50 QP	-27.70	1.00	174	22.50	-20.70
2	4.38	-1.20 QP	29.50 QP	-30.70	1.00	169	18.90	-20.10
3	10.78	-6.20 QP	29.50 QP	-35.70	1.00	64	12.60	-18.80
4	15.20	-6.80 QP	29.50 QP	-36.30	1.00	316	11.80	-18.60
5	22.12	-4.90 QP	29.50 QP	-34.40	1.00	355	13.50	-18.40
6	24.52	-7.70 QP	29.50 QP	-37.20	1.00	351	10.60	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

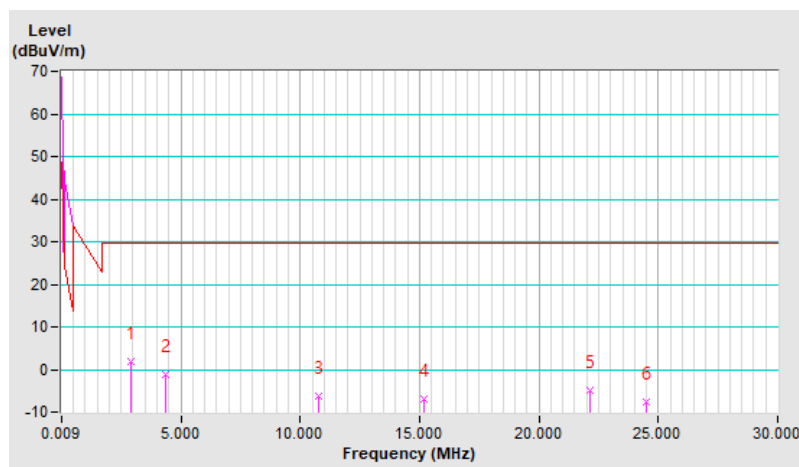


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2.94	0.70 QP	29.50 QP	-28.80	1.00	259	21.40	-20.70
2	3.57	0.50 QP	29.50 QP	-29.00	1.00	150	21.00	-20.50
3	15.77	-4.10 QP	29.50 QP	-33.60	1.00	302	14.50	-18.60
4	22.02	0.80 QP	29.50 QP	-28.70	1.00	354	19.20	-18.40
5	23.18	9.40 QP	29.50 QP	-20.10	1.00	296	27.70	-18.30
6	25.29	1.10 QP	29.50 QP	-28.40	1.00	196	19.40	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

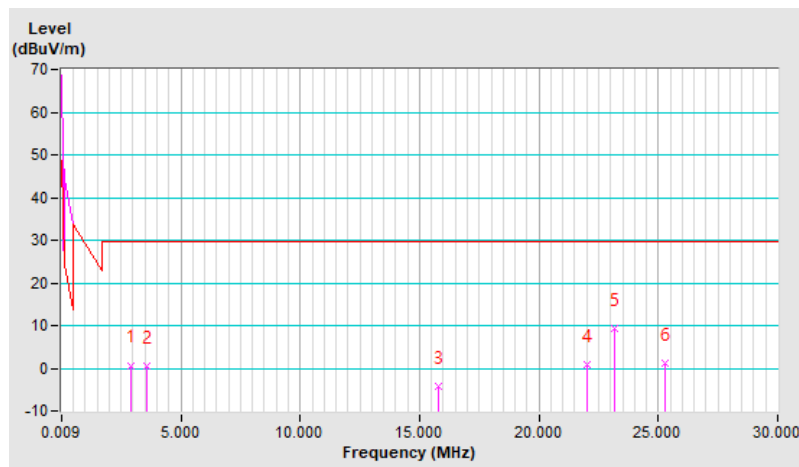




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	9.90 QP	29.50 QP	-19.60	1.00	164	30.50	-20.60
2	11.59	1.30 QP	29.50 QP	-28.20	1.00	76	20.00	-18.70
3	15.77	3.00 QP	29.50 QP	-26.50	1.00	121	21.60	-18.60
4	20.00	10.90 QP	29.50 QP	-18.60	1.00	193	29.30	-18.40
5	22.12	19.90 QP	29.50 QP	-9.60	1.00	237	38.30	-18.40
6	23.18	19.00 QP	29.50 QP	-10.50	1.00	15	37.30	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

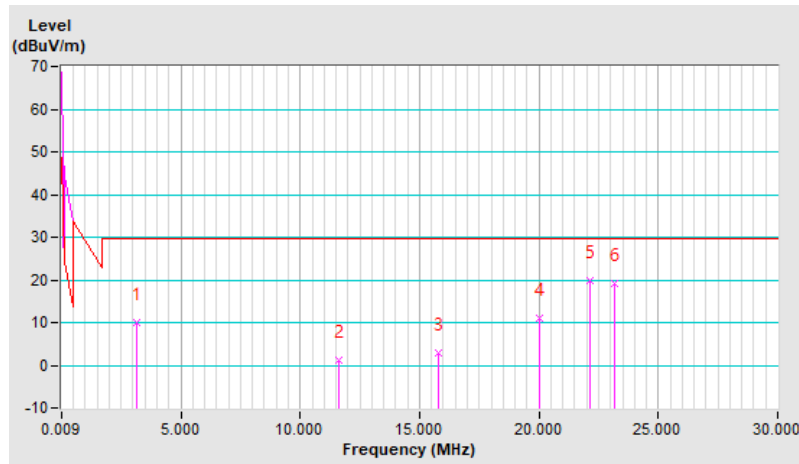


Type F

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2.94	1.90 QP	29.50 QP	-27.60	1.00	170	22.60	-20.70
2	4.38	-2.90 QP	29.50 QP	-32.40	1.00	153	17.20	-20.10
3	10.92	-6.50 QP	29.50 QP	-36.00	1.00	86	12.30	-18.80
4	15.10	-7.50 QP	29.50 QP	-37.00	1.00	258	11.10	-18.60
5	20.77	-7.30 QP	29.50 QP	-36.80	1.00	309	11.10	-18.40
6	22.12	-5.50 QP	29.50 QP	-35.00	1.00	205	12.90	-18.40

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

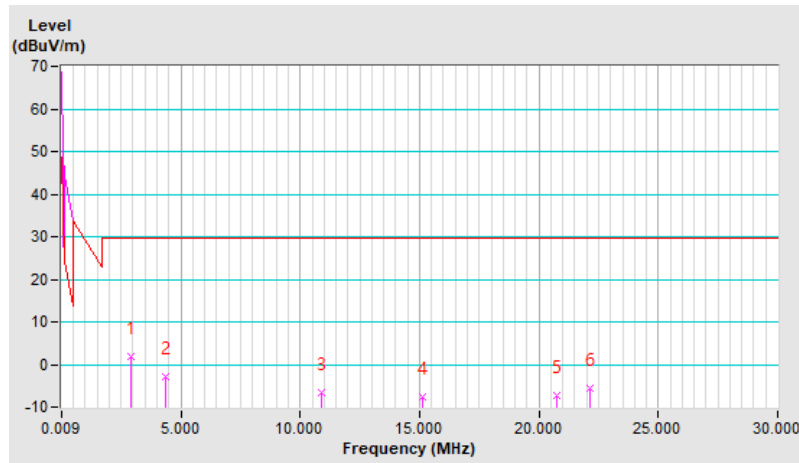


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	2.20 QP	29.50 QP	-27.30	1.00	235	22.80	-20.60
2	3.57	-0.50 QP	29.50 QP	-30.00	1.00	88	20.00	-20.50
3	15.77	-1.70 QP	29.50 QP	-31.20	1.00	91	16.90	-18.60
4	20.00	2.50 QP	29.50 QP	-27.00	1.00	341	20.90	-18.40
5	23.18	7.30 QP	29.50 QP	-22.20	1.00	237	25.60	-18.30
6	25.29	4.10 QP	29.50 QP	-25.40	1.00	115	22.40	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

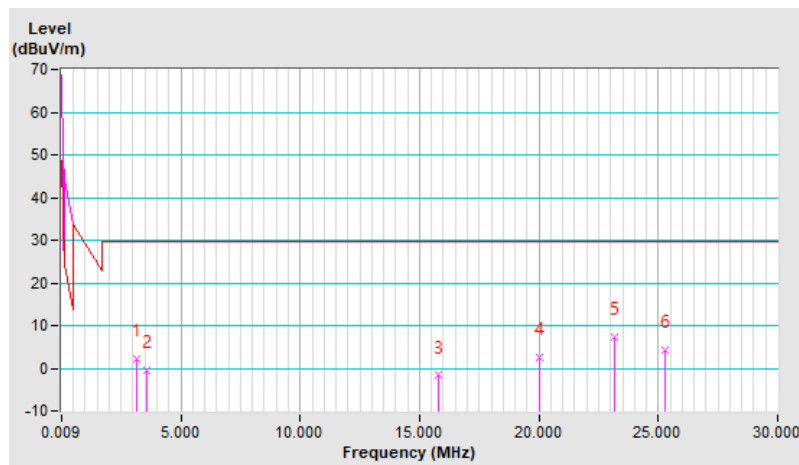


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	9.40 QP	29.50 QP	-20.10	1.00	153	30.00	-20.60
2	3.57	4.10 QP	29.50 QP	-25.40	1.00	25	24.60	-20.50
3	6.31	-2.70 QP	29.50 QP	-32.20	1.00	135	16.90	-19.60
4	15.77	2.80 QP	29.50 QP	-26.70	1.00	172	21.40	-18.60
5	21.06	10.70 QP	29.50 QP	-18.80	1.00	331	29.10	-18.40
6	23.18	12.70 QP	29.50 QP	-16.80	1.00	66	31.00	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

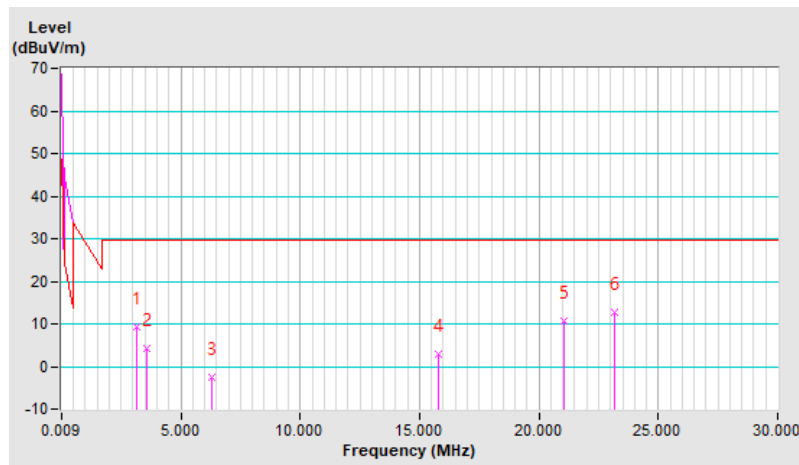


Type V

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2.94	1.60 QP	29.50 QP	-27.90	1.00	165	22.30	-20.70
2	4.38	-1.70 QP	29.50 QP	-31.20	1.00	170	18.40	-20.10
3	9.91	-7.20 QP	29.50 QP	-36.70	1.00	14	11.60	-18.80
4	15.77	-6.20 QP	29.50 QP	-35.70	1.00	158	12.40	-18.60
5	21.30	-6.60 QP	29.50 QP	-36.10	1.00	49	11.80	-18.40
6	23.18	-6.80 QP	29.50 QP	-36.30	1.00	13	11.50	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

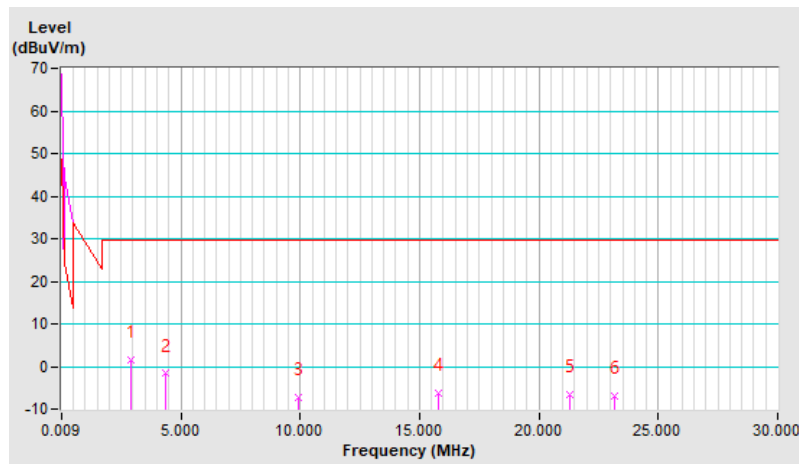


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	1.50 QP	29.50 QP	-28.00	1.00	136	22.10	-20.60
2	3.57	1.60 QP	29.50 QP	-27.90	1.00	55	22.10	-20.50
3	11.16	-5.60 QP	29.50 QP	-35.10	1.00	334	13.20	-18.80
4	20.00	1.50 QP	29.50 QP	-28.00	1.00	297	19.90	-18.40
5	22.12	9.90 QP	29.50 QP	-19.60	1.00	359	28.30	-18.40
6	25.29	2.30 QP	29.50 QP	-27.20	1.00	197	20.60	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

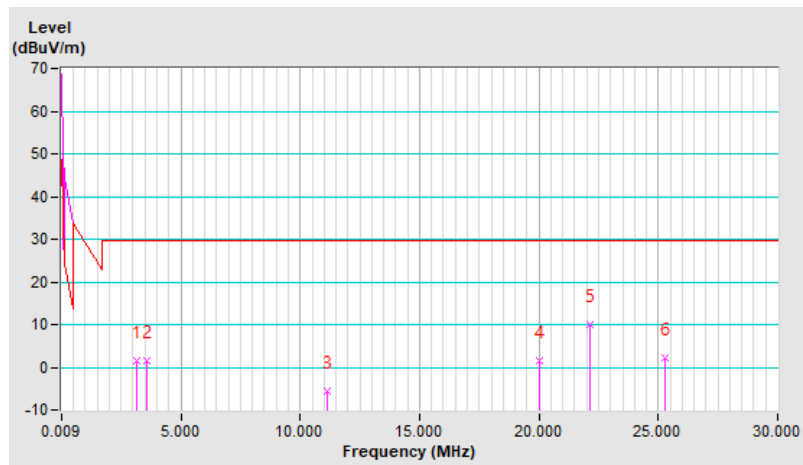


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	9.60 QP	29.50 QP	-19.90	1.00	96	30.20	-20.60
2	3.57	4.10 QP	29.50 QP	-25.40	1.00	132	24.60	-20.50
3	17.89	1.30 QP	29.50 QP	-28.20	1.00	126	19.80	-18.50
4	20.00	12.30 QP	29.50 QP	-17.20	1.00	202	30.70	-18.40
5	22.12	19.70 QP	29.50 QP	-9.80	1.00	260	38.10	-18.40
6	23.18	18.40 QP	29.50 QP	-11.10	1.00	93	36.70	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

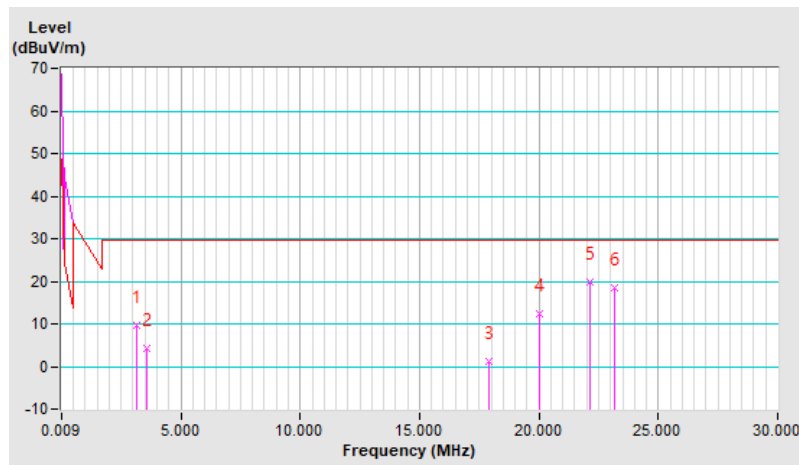


Type A

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	42.65	24.9 QP	40.0	-15.1	1.00 H	277	34.2	-9.3
2	135.45	30.9 QP	43.5	-12.6	1.00 H	114	40.3	-9.4
3	153.72	34.2 QP	43.5	-9.3	1.50 H	109	42.6	-8.4
4	243.70	32.6 QP	46.0	-13.4	1.00 H	248	41.7	-9.1
5	287.29	26.9 QP	46.0	-19.1	1.50 H	149	33.8	-6.9
6	510.83	26.8 QP	46.0	-19.2	1.00 H	353	28.8	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

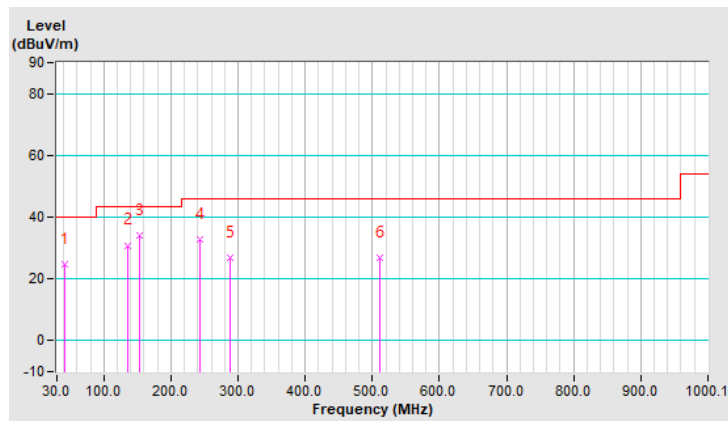




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.47	30.1 QP	40.0	-9.9	1.49 V	10	39.2	-9.1
2	55.31	34.7 QP	40.0	-5.3	1.00 V	53	43.8	-9.1
3	98.89	25.2 QP	43.5	-18.3	1.49 V	10	38.6	-13.4
4	139.66	23.7 QP	43.5	-19.8	1.99 V	260	32.7	-9.0
5	243.70	29.2 QP	46.0	-16.8	1.99 V	3	38.3	-9.1
6	540.36	27.6 QP	46.0	-18.4	1.49 V	10	29.0	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

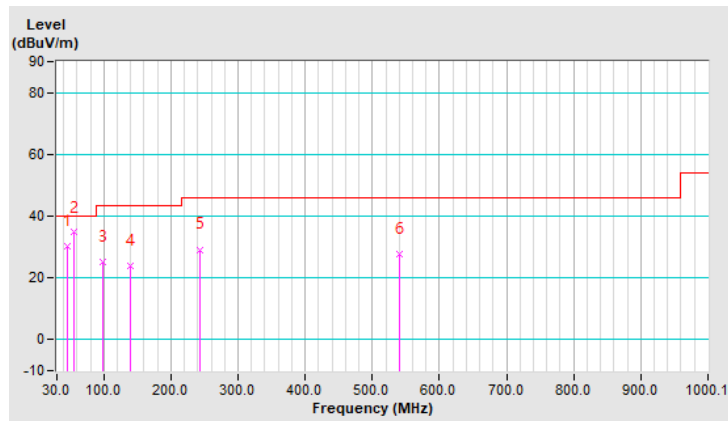


Type B

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.25	24.2 QP	40.0	-15.8	1.00 H	272	33.5	-9.3
2	138.26	28.0 QP	43.5	-15.5	1.50 H	295	37.1	-9.1
3	156.53	33.4 QP	43.5	-10.1	1.50 H	168	41.8	-8.4
4	243.70	31.5 QP	46.0	-14.5	1.00 H	243	40.6	-9.1
5	319.62	26.1 QP	46.0	-19.9	1.00 H	153	32.3	-6.2
6	450.38	26.5 QP	46.0	-19.5	2.00 H	255	29.7	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

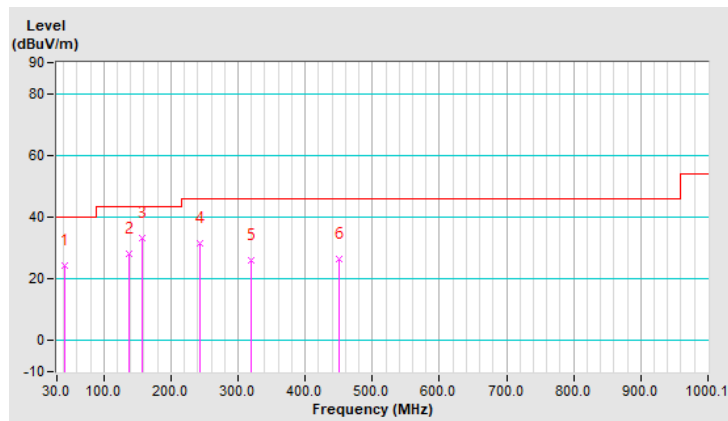


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	42.65	26.5 QP	40.0	-13.5	2.00 V	133	35.8	-9.3
2	53.90	33.3 QP	40.0	-6.7	1.00 V	351	42.4	-9.1
3	134.04	26.9 QP	43.5	-16.6	1.00 V	18	36.4	-9.5
4	155.13	26.3 QP	43.5	-17.2	2.00 V	34	34.7	-8.4
5	378.67	24.3 QP	46.0	-21.7	1.50 V	163	29.3	-5.0
6	540.36	26.6 QP	46.0	-19.4	1.00 V	318	28.0	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

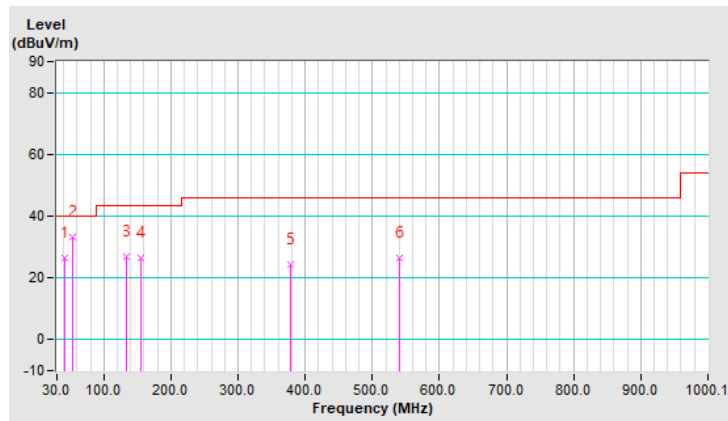


Type F

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.28	24.0 QP	40.0	-16.0	1.00 H	271	33.0	-9.0
2	153.72	35.8 QP	43.5	-7.7	1.00 H	137	44.2	-8.4
3	243.70	30.2 QP	46.0	-15.8	1.00 H	278	39.3	-9.1
4	288.69	26.0 QP	46.0	-20.0	1.00 H	146	32.9	-6.9
5	586.75	28.6 QP	46.0	-17.4	1.00 H	10	28.9	-0.3
6	696.42	30.2 QP	46.0	-15.8	1.00 H	206	28.4	1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

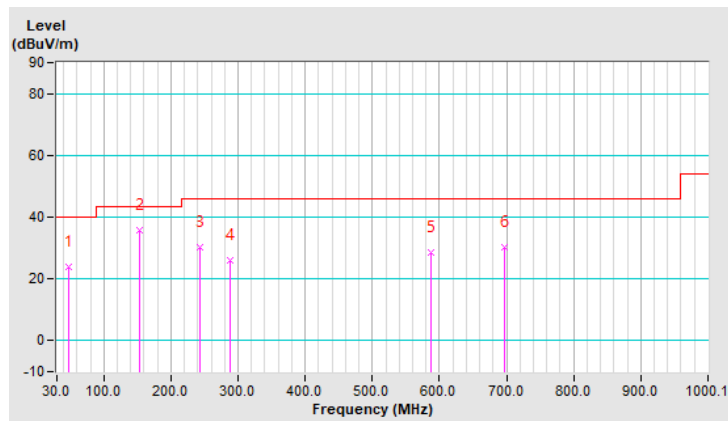


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.25	31.2 QP	40.0	-8.8	1.50 V	354	40.5	-9.3
2	55.31	32.8 QP	40.0	-7.2	1.50 V	58	41.9	-9.1
3	132.63	26.6 QP	43.5	-16.9	1.00 V	60	36.3	-9.7
4	155.13	27.2 QP	43.5	-16.3	1.00 V	7	35.6	-8.4
5	243.70	21.6 QP	46.0	-24.4	1.50 V	322	30.7	-9.1
6	516.46	26.9 QP	46.0	-19.1	1.00 V	72	28.8	-1.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

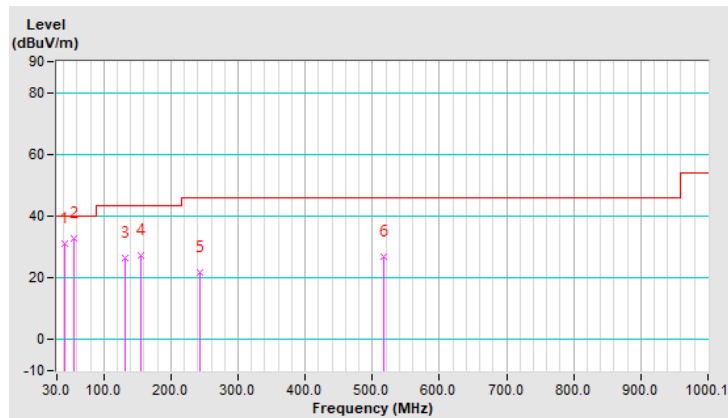


Type V

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.47	26.6 QP	40.0	-13.4	1.50 H	171	35.7	-9.1
2	103.11	29.4 QP	43.5	-14.1	1.00 H	286	42.1	-12.7
3	153.72	29.6 QP	43.5	-13.9	1.50 H	155	38.0	-8.4
4	243.70	31.2 QP	46.0	-14.8	1.00 H	242	40.3	-9.1
5	287.29	27.5 QP	46.0	-18.5	1.00 H	152	34.4	-6.9
6	437.72	26.4 QP	46.0	-19.6	2.00 H	63	29.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

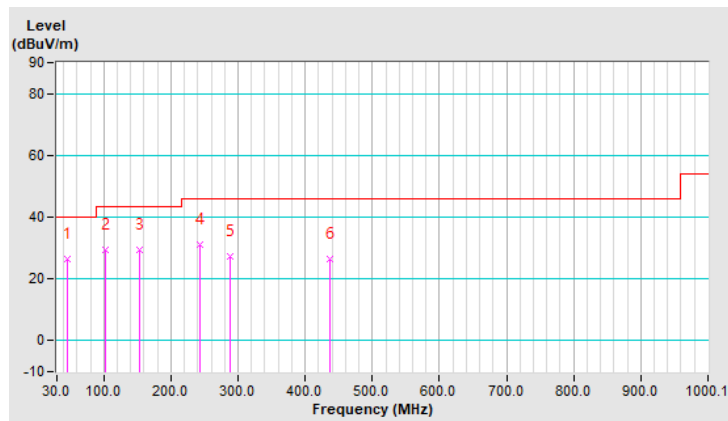


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.90	34.4 QP	40.0	-5.6	1.00 V	299	43.5	-9.1
2	96.08	27.1 QP	43.5	-16.4	1.00 V	41	40.8	-13.7
3	132.63	28.6 QP	43.5	-14.9	2.00 V	51	38.3	-9.7
4	243.70	22.1 QP	46.0	-23.9	1.00 V	3	31.2	-9.1
5	430.69	24.9 QP	46.0	-21.1	1.50 V	112	28.4	-3.5
6	520.67	27.5 QP	46.0	-18.5	1.00 V	341	29.4	-1.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

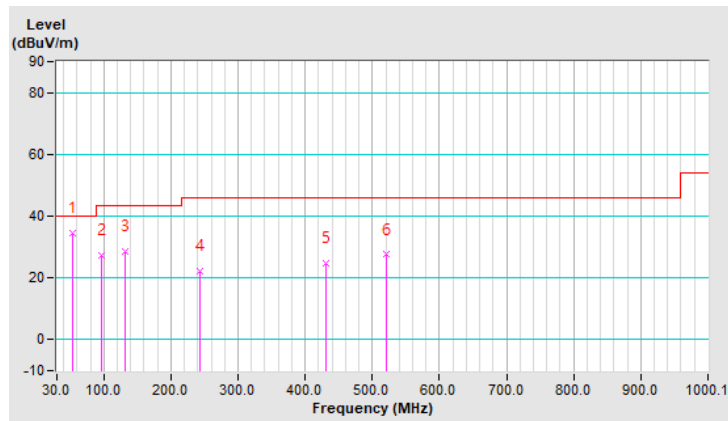

Mode A2  
Type A

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	19.7 QP	84.0 QP	-64.3	1.00	165	38.4	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

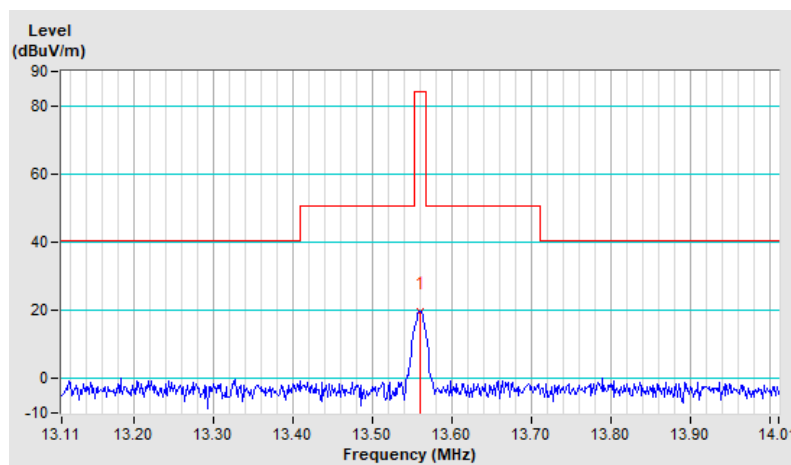



EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	20.3 QP	84.0 QP	-63.7	1.00	194	39.0	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

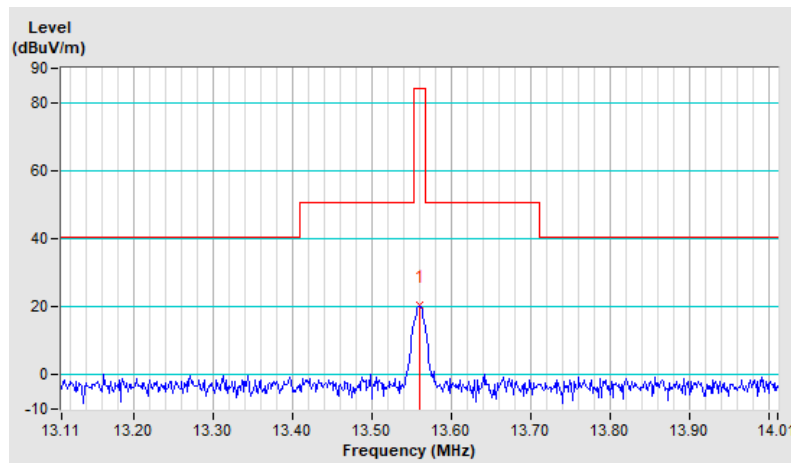

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	23.9 QP	84.0 QP	-60.1	1.00	178	42.6	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

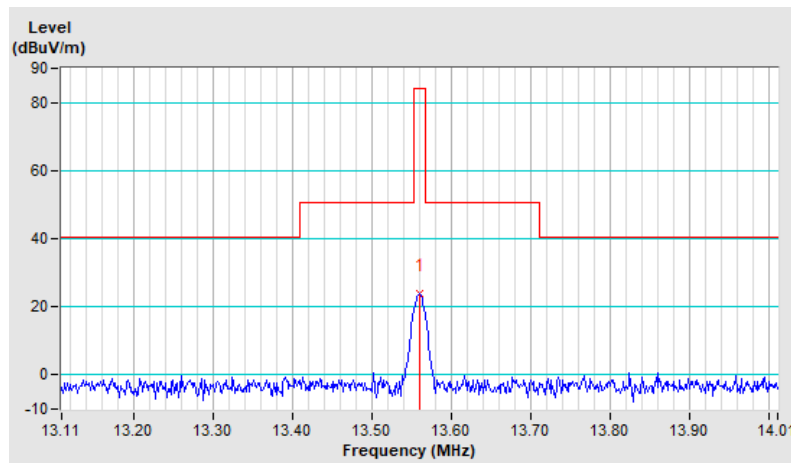

Type B

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	19.6 QP	84.0 QP	-64.4	1.00	166	38.3	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

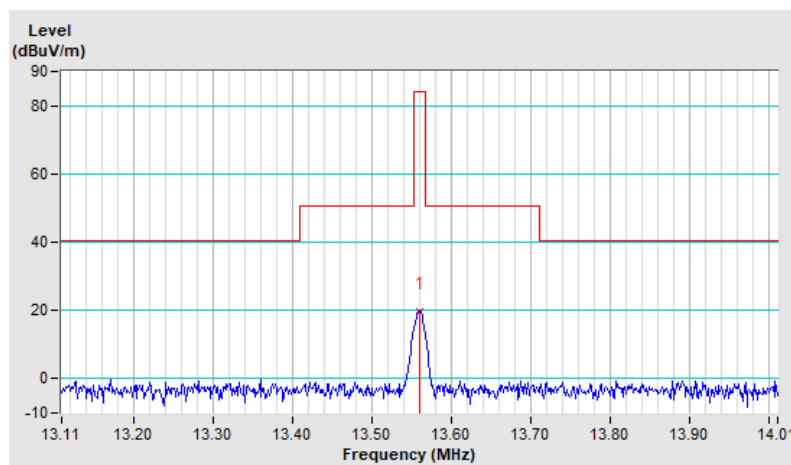

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	20.4 QP	84.0 QP	-63.6	1.00	200	39.1	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

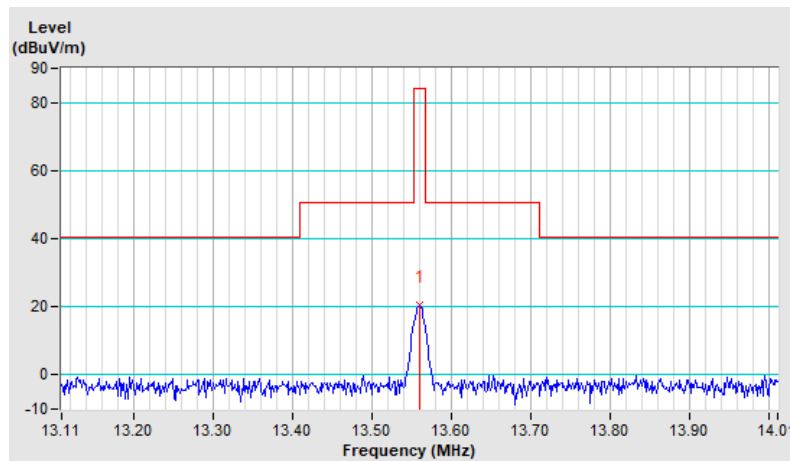

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	23.8 QP	84.0 QP	-60.2	1.00	180	42.5	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

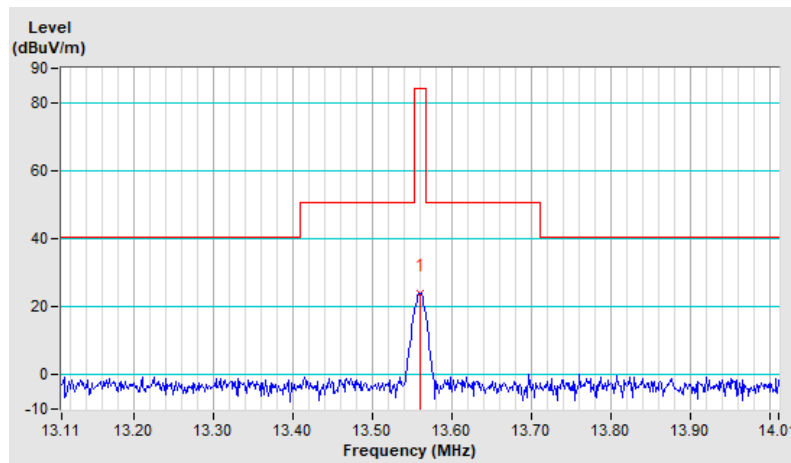

Type F

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	19.5 QP	84.0 QP	-64.5	1.00	161	38.2	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

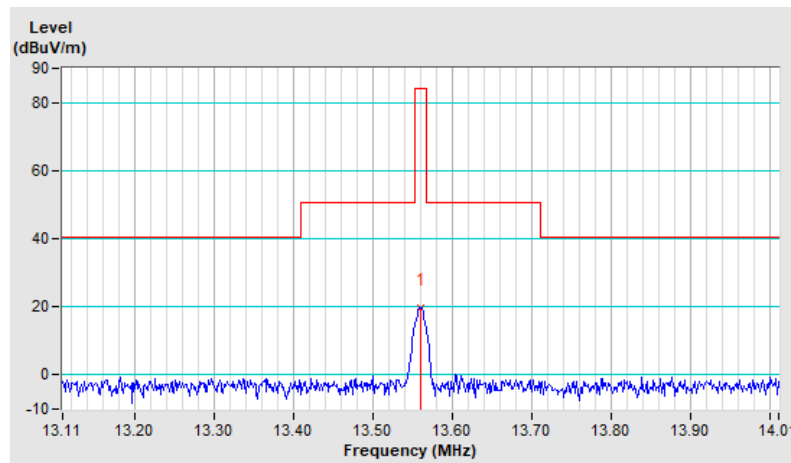

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	20.3 QP	84.0 QP	-63.7	1.00	196	39.0	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

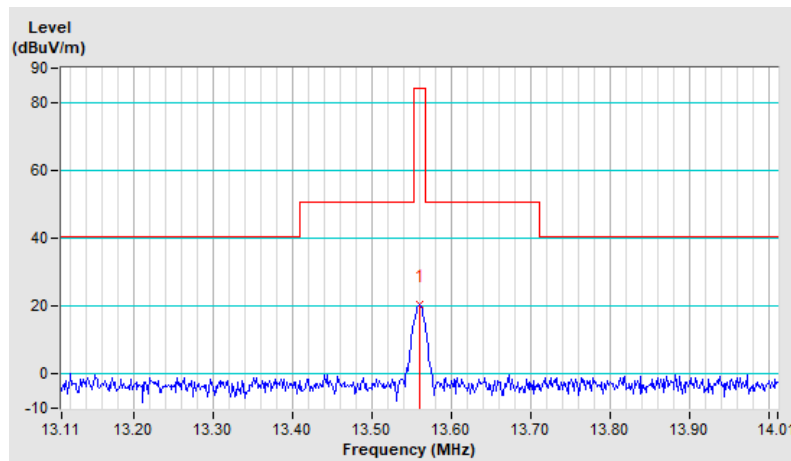

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	23.8 QP	84.0 QP	-60.2	1.00	174	42.5	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

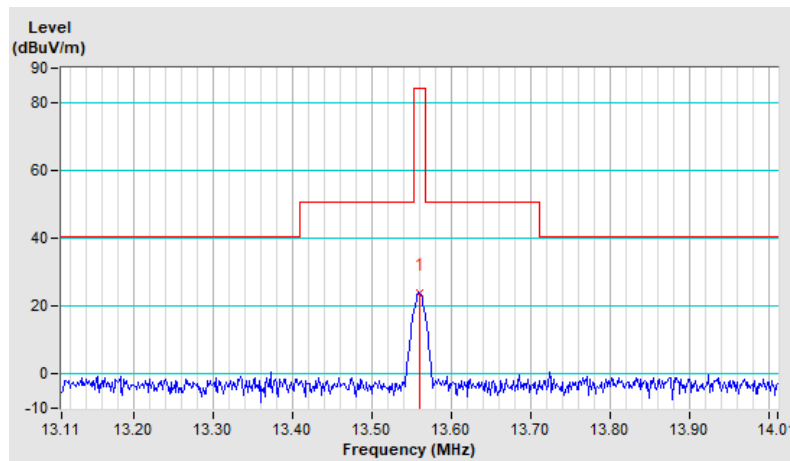



Type V

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	19.7 QP	84.0 QP	-64.3	1.00	166	38.4	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

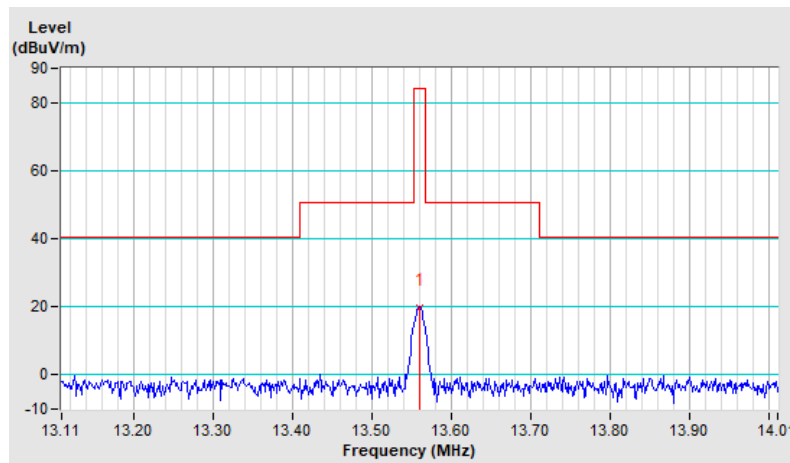

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	20.3 QP	84.0 QP	-63.7	1.00	198	39.0	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

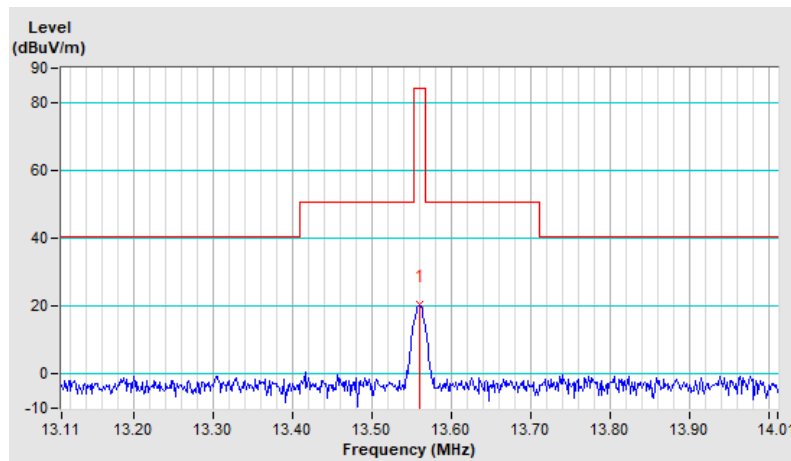

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	23.7 QP	84.0 QP	-60.3	1.00	175	42.4	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

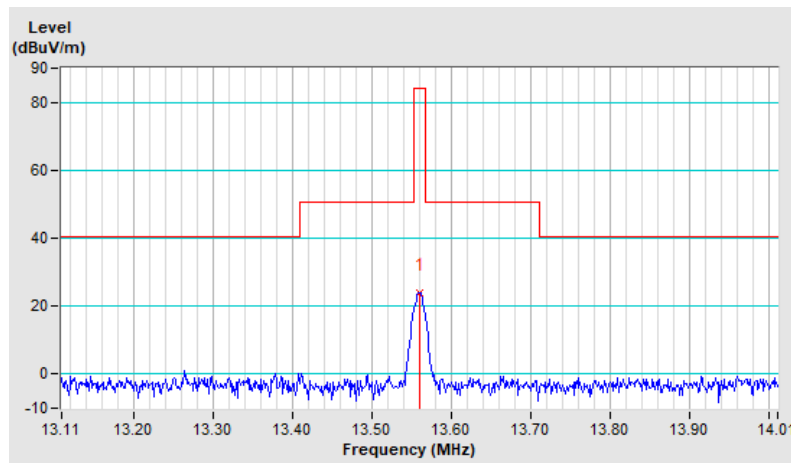


Type A

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2.94	2.00 QP	29.50 QP	-27.50	1.00	189	22.70	-20.70
2	4.38	-2.50 QP	29.50 QP	-32.00	1.00	189	17.60	-20.10
3	10.92	-5.20 QP	29.50 QP	-34.70	1.00	117	13.60	-18.80
4	16.25	-7.10 QP	29.50 QP	-36.60	1.00	321	11.40	-18.50
5	18.61	-6.80 QP	29.50 QP	-36.30	1.00	145	11.70	-18.50
6	22.12	-4.20 QP	29.50 QP	-33.70	1.00	332	14.20	-18.40

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

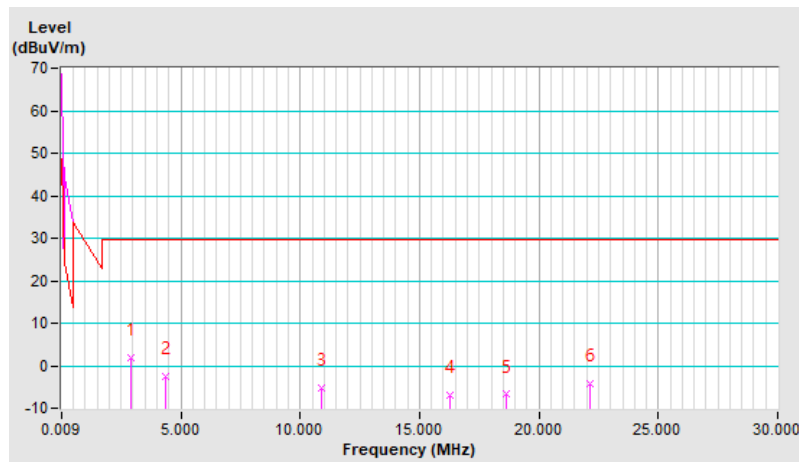


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	1.00 QP	29.50 QP	-28.50	1.00	144	21.60	-20.60
2	3.57	0.60 QP	29.50 QP	-28.90	1.00	102	21.10	-20.50
3	15.77	-2.80 QP	29.50 QP	-32.30	1.00	263	15.80	-18.60
4	20.00	3.40 QP	29.50 QP	-26.10	1.00	169	21.80	-18.40
5	22.12	8.00 QP	29.50 QP	-21.50	1.00	214	26.40	-18.40
6	23.18	9.20 QP	29.50 QP	-20.30	1.00	346	27.50	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

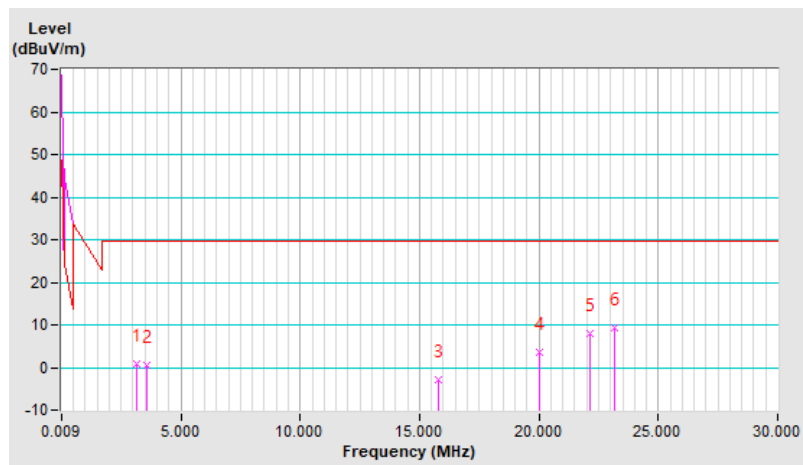


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	9.80 QP	29.50 QP	-19.70	1.00	99	30.40	-20.60
2	3.57	2.90 QP	29.50 QP	-26.60	1.00	0	23.40	-20.50
3	15.77	6.40 QP	29.50 QP	-23.10	1.00	73	25.00	-18.60
4	20.00	13.90 QP	29.50 QP	-15.60	1.00	254	32.30	-18.40
5	22.12	12.10 QP	29.50 QP	-17.40	1.00	241	30.50	-18.40
6	24.23	11.70 QP	29.50 QP	-17.80	1.00	83	30.00	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

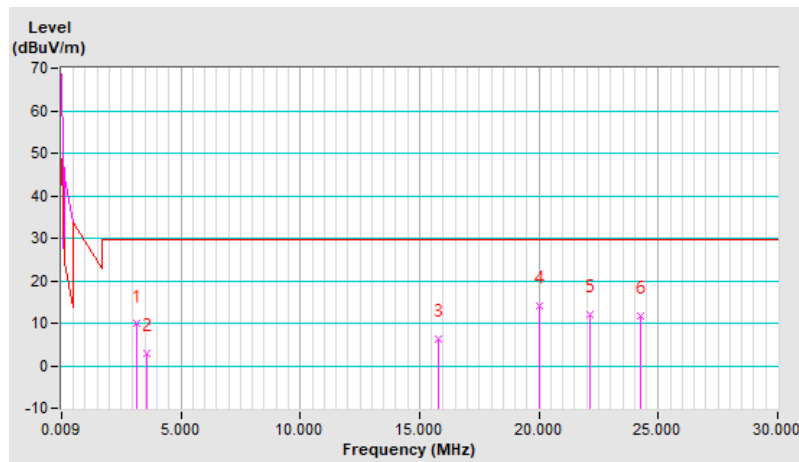


Type B

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2.94	1.80 QP	29.50 QP	-27.70	1.00	164	22.50	-20.70
2	4.38	-2.50 QP	29.50 QP	-32.00	1.00	156	17.60	-20.10
3	5.15	-5.00 QP	29.50 QP	-34.50	1.00	151	14.90	-19.90
4	11.50	-5.90 QP	29.50 QP	-35.40	1.00	348	12.80	-18.70
5	22.12	-5.90 QP	29.50 QP	-35.40	1.00	57	12.50	-18.40
6	23.18	-5.60 QP	29.50 QP	-35.10	1.00	283	12.70	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

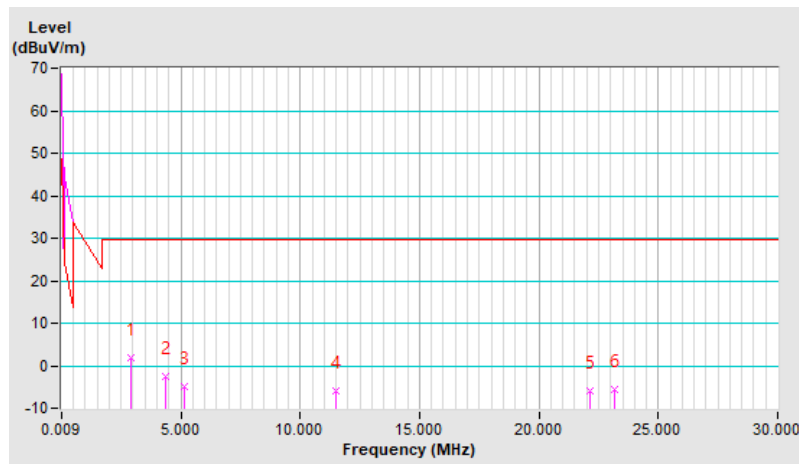


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	-0.30 QP	29.50 QP	-29.80	1.00	244	20.30	-20.60
2	3.57	-0.20 QP	29.50 QP	-29.70	1.00	304	20.30	-20.50
3	15.77	-3.90 QP	29.50 QP	-33.40	1.00	284	14.70	-18.60
4	18.95	-0.30 QP	29.50 QP	-29.80	1.00	346	18.10	-18.40
5	22.12	9.70 QP	29.50 QP	-19.80	1.00	327	28.10	-18.40
6	23.18	4.60 QP	29.50 QP	-24.90	1.00	129	22.90	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

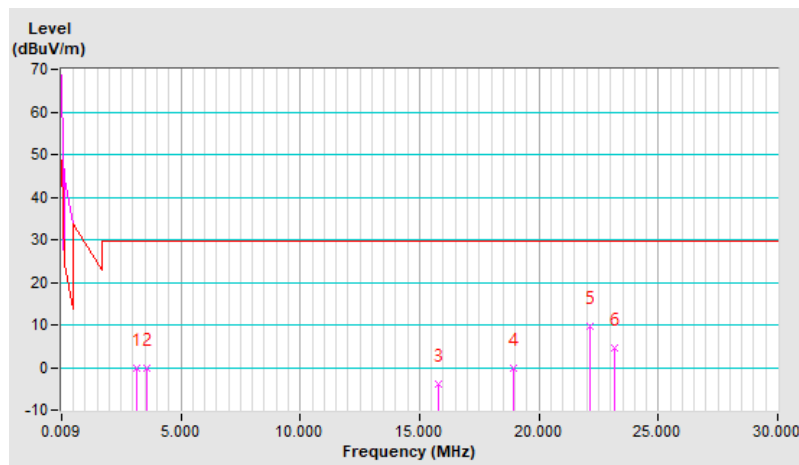




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	10.10 QP	29.50 QP	-19.40	1.00	200	30.70	-20.60
2	5.25	-0.80 QP	29.50 QP	-30.30	1.00	240	19.00	-19.80
3	15.77	2.80 QP	29.50 QP	-26.70	1.00	203	21.40	-18.60
4	20.00	13.70 QP	29.50 QP	-15.80	1.00	7	32.10	-18.40
5	22.12	19.50 QP	29.50 QP	-10.00	1.00	48	37.90	-18.40
6	23.18	18.40 QP	29.50 QP	-11.10	1.00	21	36.70	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

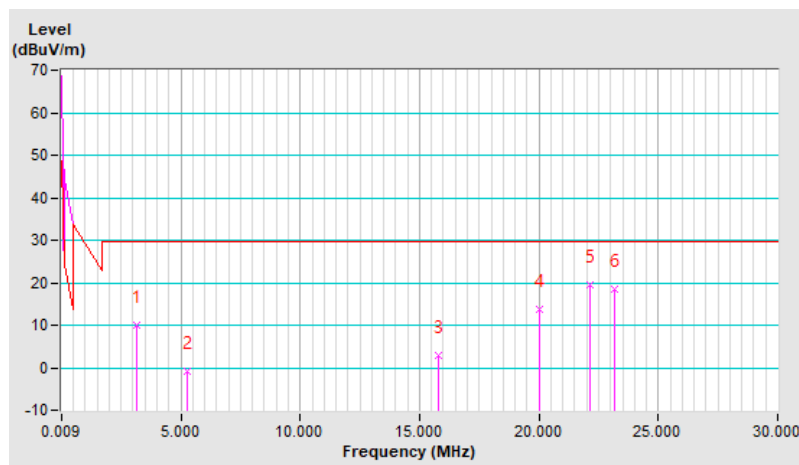


Type F

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2.94	1.90 QP	29.50 QP	-27.60	1.00	188	22.60	-20.70
2	4.38	-2.20 QP	29.50 QP	-31.70	1.00	179	17.90	-20.10
3	5.15	-3.60 QP	29.50 QP	-33.10	1.00	153	16.30	-19.90
4	10.92	-3.90 QP	29.50 QP	-33.40	1.00	330	14.90	-18.80
5	15.77	-6.80 QP	29.50 QP	-36.30	1.00	2	11.80	-18.60
6	22.12	-4.30 QP	29.50 QP	-33.80	1.00	341	14.10	-18.40

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

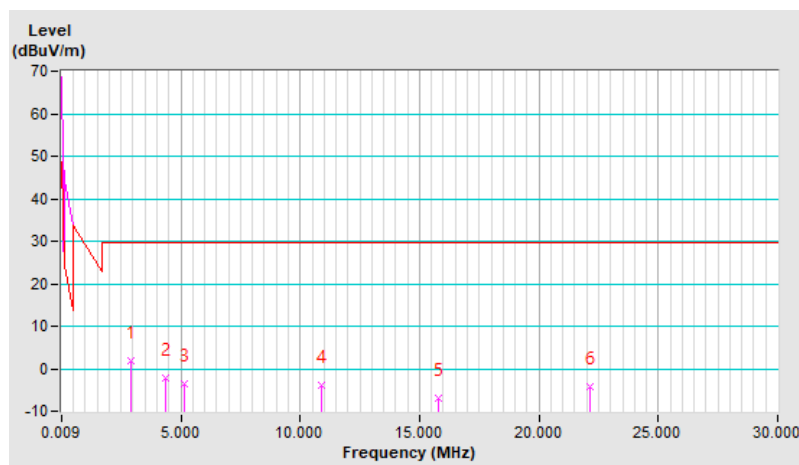


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2.94	-0.50 QP	29.50 QP	-30.00	1.00	256	20.20	-20.70
2	3.57	-0.60 QP	29.50 QP	-30.10	1.00	112	19.90	-20.50
3	15.77	-3.90 QP	29.50 QP	-33.40	1.00	228	14.70	-18.60
4	20.00	3.50 QP	29.50 QP	-26.00	1.00	246	21.90	-18.40
5	22.12	10.60 QP	29.50 QP	-18.90	1.00	300	29.00	-18.40
6	23.18	9.70 QP	29.50 QP	-19.80	1.00	17	28.00	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

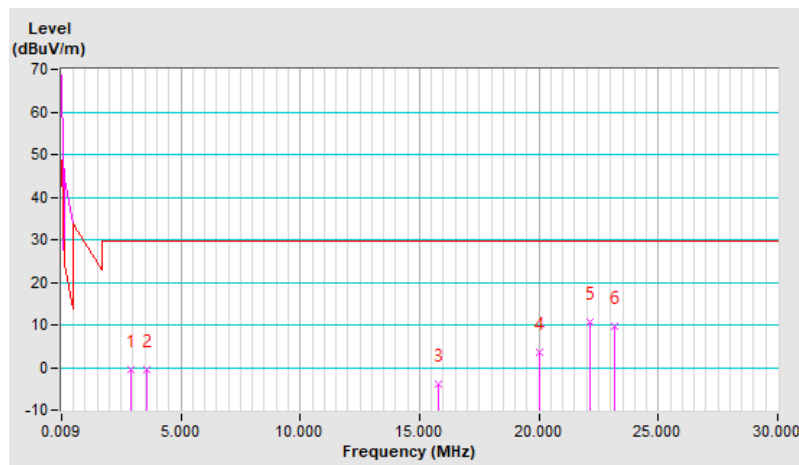


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	9.60 QP	29.50 QP	-19.90	1.00	132	30.20	-20.60
2	11.59	1.10 QP	29.50 QP	-28.40	1.00	211	19.80	-18.70
3	15.77	2.90 QP	29.50 QP	-26.60	1.00	275	21.50	-18.60
4	20.00	10.20 QP	29.50 QP	-19.30	1.00	72	28.60	-18.40
5	22.12	20.10 QP	29.50 QP	-9.40	1.00	217	38.50	-18.40
6	23.18	18.30 QP	29.50 QP	-11.20	1.00	204	36.60	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

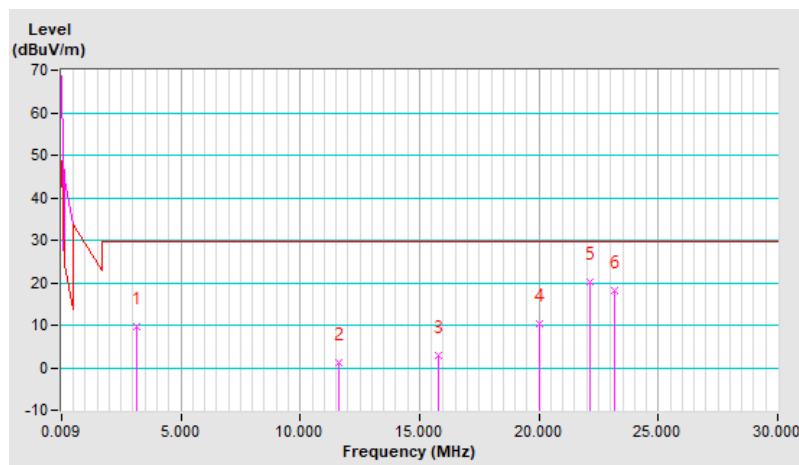


Type V

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2.94	2.00 QP	29.50 QP	-27.50	1.00	179	22.70	-20.70
2	4.38	-1.00 QP	29.50 QP	-30.50	1.00	173	19.10	-20.10
3	5.15	-5.70 QP	29.50 QP	-35.20	1.00	182	14.20	-19.90
4	12.07	-6.30 QP	29.50 QP	-35.80	1.00	335	12.40	-18.70
5	22.12	-3.50 QP	29.50 QP	-33.00	1.00	161	14.90	-18.40
6	23.18	-6.00 QP	29.50 QP	-35.50	1.00	211	12.30	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

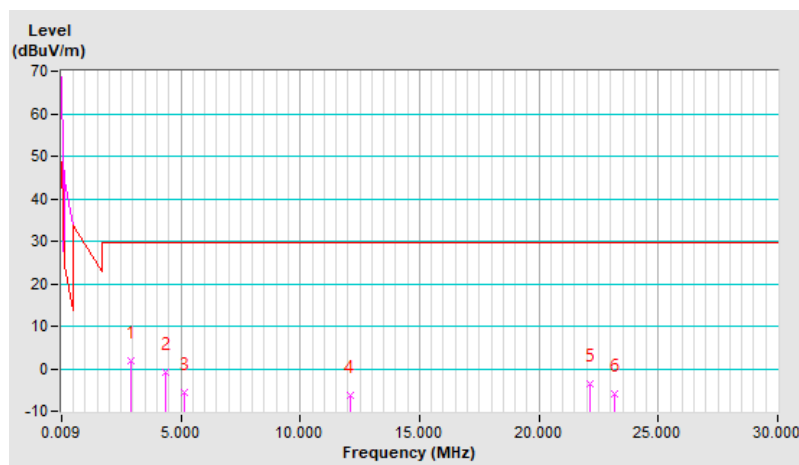


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	0.10 QP	29.50 QP	-29.40	1.00	77	20.70	-20.60
2	3.57	0.10 QP	29.50 QP	-29.40	1.00	92	20.60	-20.50
3	11.69	-5.80 QP	29.50 QP	-35.30	1.00	240	12.90	-18.70
4	20.00	2.30 QP	29.50 QP	-27.20	1.00	239	20.70	-18.40
5	22.12	6.70 QP	29.50 QP	-22.80	1.00	292	25.10	-18.40
6	23.18	9.40 QP	29.50 QP	-20.10	1.00	70	27.70	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

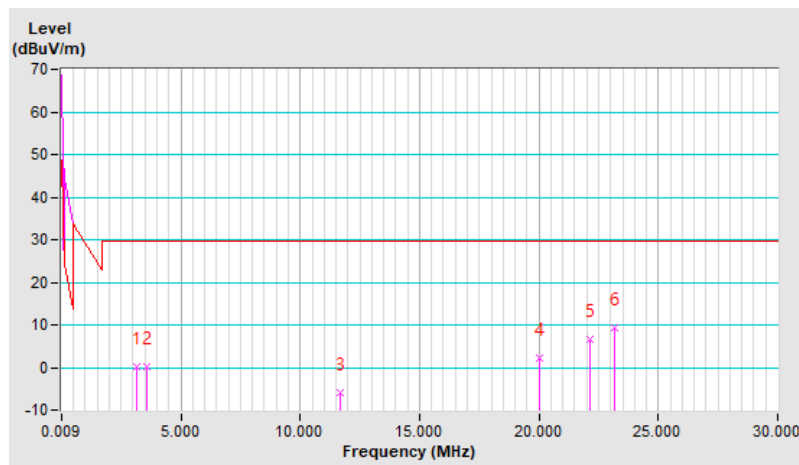


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	9.80 QP	29.50 QP	-19.70	1.00	272	30.40	-20.60
2	3.57	3.60 QP	29.50 QP	-25.90	1.00	11	24.10	-20.50
3	15.77	3.00 QP	29.50 QP	-26.50	1.00	31	21.60	-18.60
4	20.00	11.70 QP	29.50 QP	-17.80	1.00	243	30.10	-18.40
5	22.12	18.50 QP	29.50 QP	-11.00	1.00	265	36.90	-18.40
6	25.29	11.70 QP	29.50 QP	-17.80	1.00	323	30.00	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

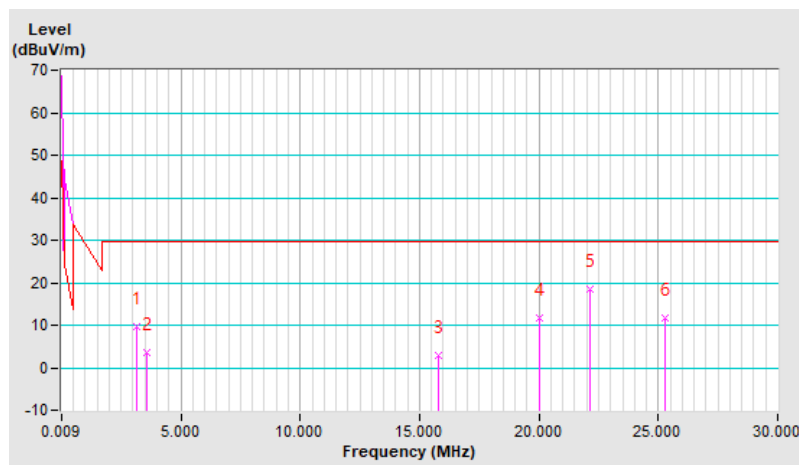


Type A

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.25	24.1 QP	40.0	-15.9	1.00 H	6	33.4	-9.3
2	138.26	30.0 QP	43.5	-13.5	1.00 H	287	39.1	-9.1
3	157.94	36.5 QP	43.5	-7.0	1.50 H	168	44.8	-8.3
4	243.70	30.5 QP	46.0	-15.5	1.50 H	258	39.6	-9.1
5	290.10	24.6 QP	46.0	-21.4	2.00 H	150	31.5	-6.9
6	602.22	30.8 QP	46.0	-15.2	1.50 H	44	30.5	0.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

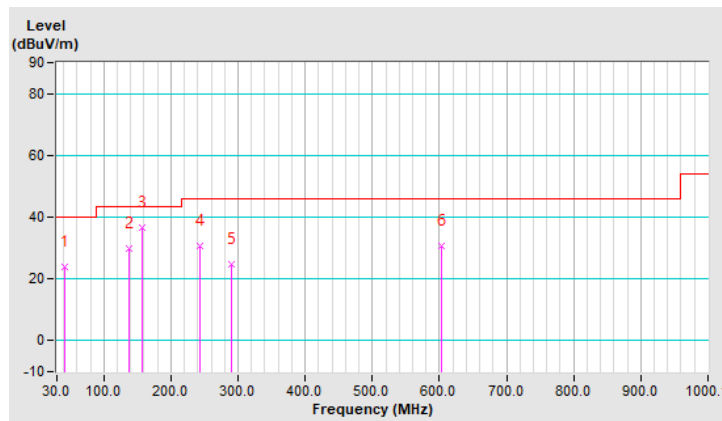




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	55.31	30.7 QP	40.0	-9.3	1.00 V	13	39.8	-9.1
2	125.60	22.2 QP	43.5	-21.3	1.50 V	204	32.5	-10.3
3	156.53	24.8 QP	43.5	-18.7	1.00 V	257	33.2	-8.4
4	243.70	27.6 QP	46.0	-18.4	1.50 V	13	36.7	-9.1
5	270.42	24.6 QP	46.0	-21.4	1.50 V	13	32.3	-7.7
6	456.00	26.7 QP	46.0	-19.3	1.50 V	322	29.8	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

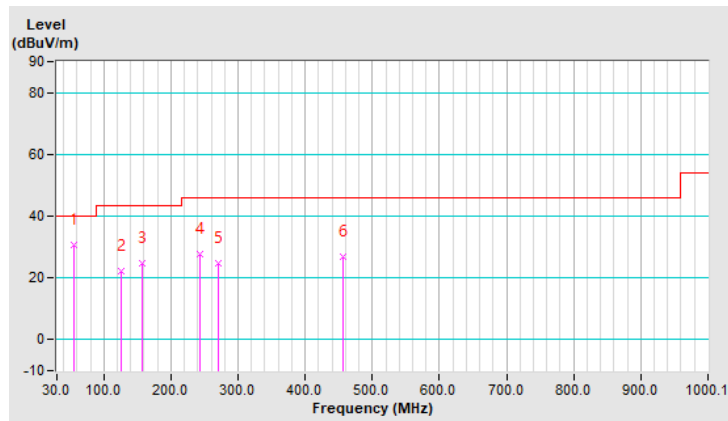


Type B

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	46.87	26.9 QP	40.0	-13.1	1.00 H	126	36.1	-9.2
2	97.49	26.5 QP	43.5	-17.0	1.50 H	280	40.2	-13.7
3	157.94	36.7 QP	43.5	-6.8	1.50 H	157	45.0	-8.3
4	243.70	30.5 QP	46.0	-15.5	1.50 H	265	39.6	-9.1
5	288.69	24.4 QP	46.0	-21.6	1.00 H	168	31.3	-6.9
6	578.32	28.7 QP	46.0	-17.3	1.50 H	301	29.2	-0.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

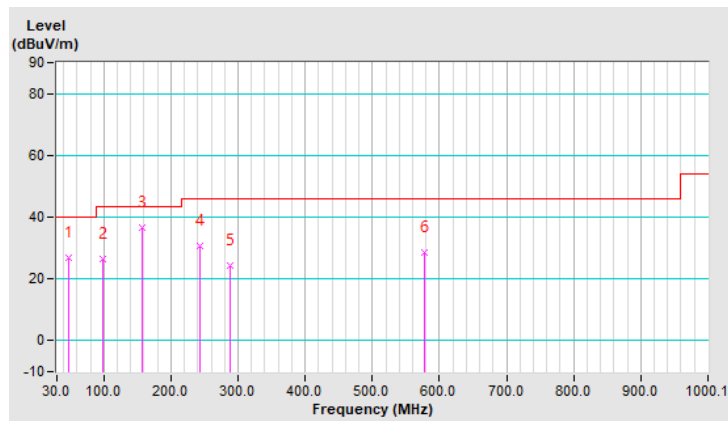


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.90	29.3 QP	40.0	-10.7	1.50 V	6	38.4	-9.1
2	97.49	21.4 QP	43.5	-22.1	1.50 V	189	35.1	-13.7
3	135.45	23.5 QP	43.5	-20.0	1.00 V	193	32.9	-9.4
4	155.13	25.1 QP	43.5	-18.4	2.00 V	192	33.5	-8.4
5	243.70	27.5 QP	46.0	-18.5	1.50 V	6	36.6	-9.1
6	460.22	26.1 QP	46.0	-19.9	1.00 V	133	29.1	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

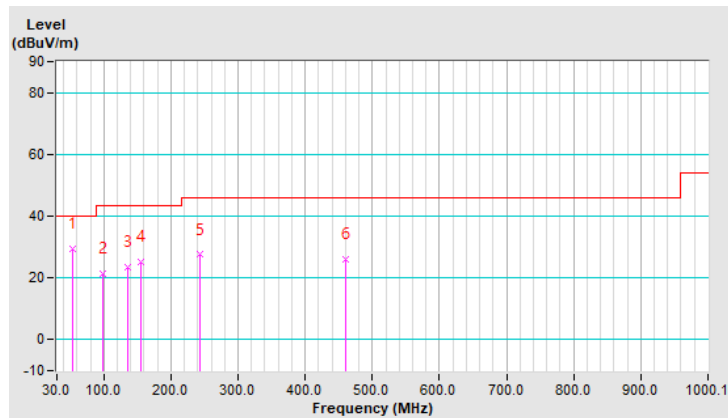


Type F

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	28.0 QP	40.0	-12.0	1.50 H	157	38.6	-10.6
2	48.28	26.2 QP	40.0	-13.8	1.50 H	332	35.2	-9.0
3	135.45	28.9 QP	43.5	-14.6	1.00 H	285	38.3	-9.4
4	157.94	35.1 QP	43.5	-8.4	2.00 H	327	43.4	-8.3
5	243.70	30.5 QP	46.0	-15.5	1.50 H	115	39.6	-9.1
6	287.29	23.8 QP	46.0	-22.2	1.50 H	167	30.7	-6.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

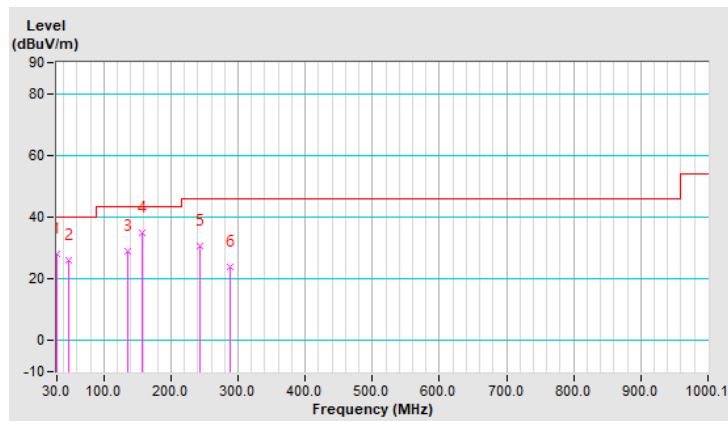


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	55.31	31.5 QP	40.0	-8.5	1.00 V	177	40.6	-9.1
2	98.89	22.3 QP	43.5	-21.2	1.50 V	117	35.7	-13.4
3	132.63	24.2 QP	43.5	-19.3	1.50 V	220	33.9	-9.7
4	243.70	27.3 QP	46.0	-18.7	1.50 V	9	36.4	-9.1
5	270.42	23.8 QP	46.0	-22.2	1.00 V	9	31.5	-7.7
6	531.92	27.1 QP	46.0	-18.9	1.50 V	18	28.7	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

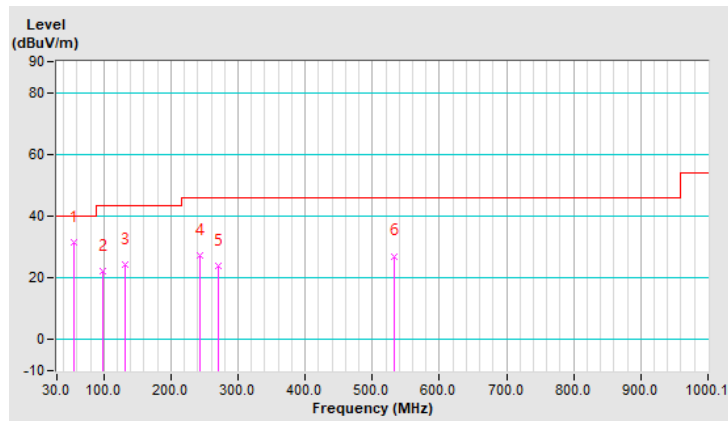


Type V

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.28	33.1 QP	40.0	-6.9	1.00 H	296	42.1	-9.0
2	134.04	29.9 QP	43.5	-13.6	1.00 H	113	39.4	-9.5
3	159.35	34.4 QP	43.5	-9.1	1.50 H	174	42.7	-8.3
4	243.70	30.7 QP	46.0	-15.3	1.50 H	268	39.8	-9.1
5	412.42	23.8 QP	46.0	-22.2	2.00 H	118	28.3	-4.5
6	651.43	29.7 QP	46.0	-16.3	1.50 H	246	28.8	0.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

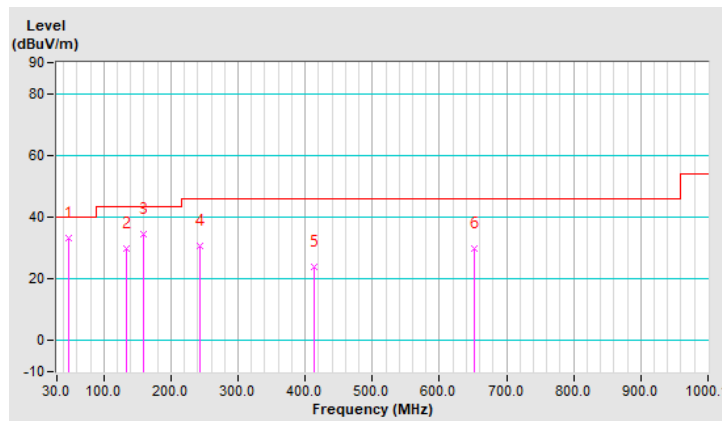


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	55.31	30.1 QP	40.0	-9.9	1.50 V	64	39.2	-9.1
2	96.08	23.4 QP	43.5	-20.1	1.50 V	180	37.1	-13.7
3	155.13	26.4 QP	43.5	-17.1	1.00 V	231	34.8	-8.4
4	243.70	26.9 QP	46.0	-19.1	1.50 V	6	36.0	-9.1
5	419.45	23.5 QP	46.0	-22.5	1.00 V	104	27.5	-4.0
6	468.65	26.8 QP	46.0	-19.2	1.50 V	261	29.6	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

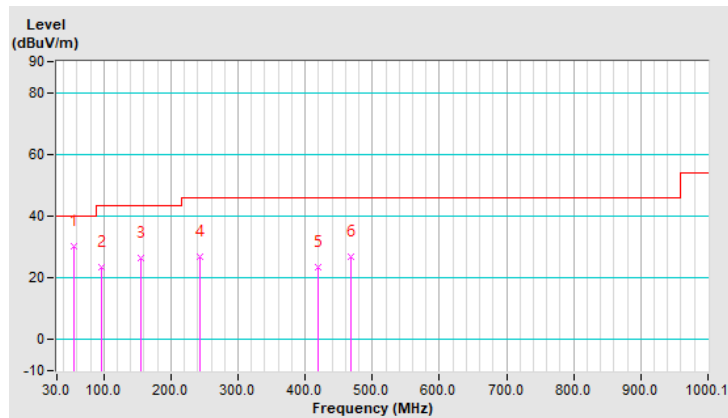

Mode B1  
Type A

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	27.4 QP	84.0 QP	-56.6	1.00	138	46.1	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

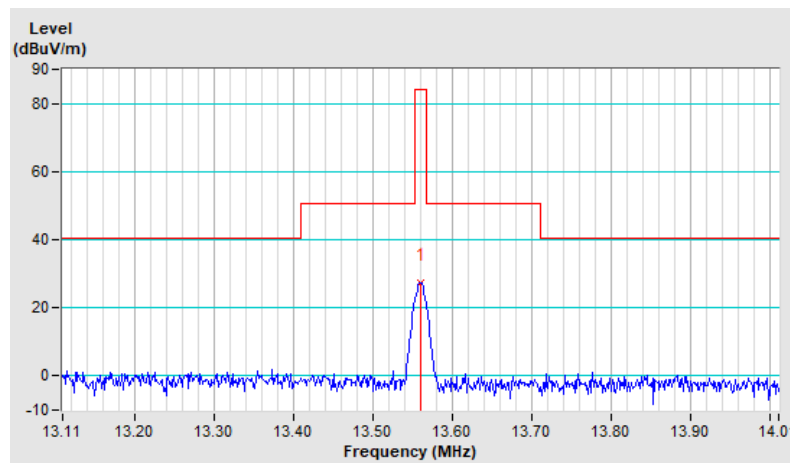



EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	24.4 QP	84.0 QP	-59.6	1.00	205	43.1	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

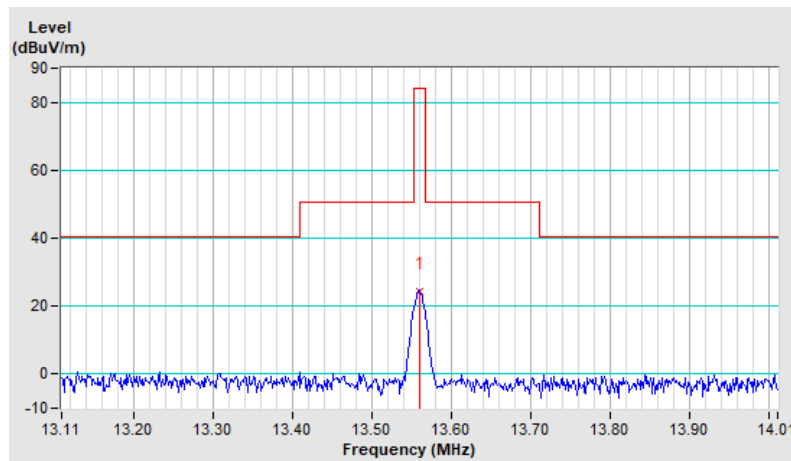

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	31.8 QP	84.0	-52.2 QP	1.00	155	50.5	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

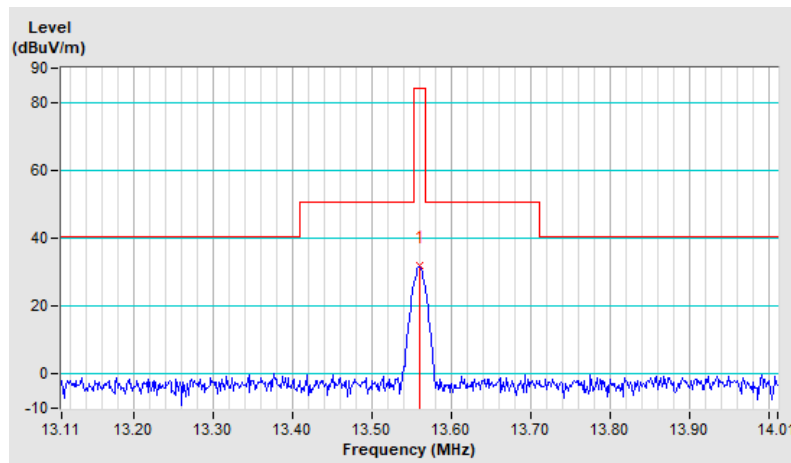

Type B

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	27.3 QP	84.0 QP	-56.7	1.00	141	46.0	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

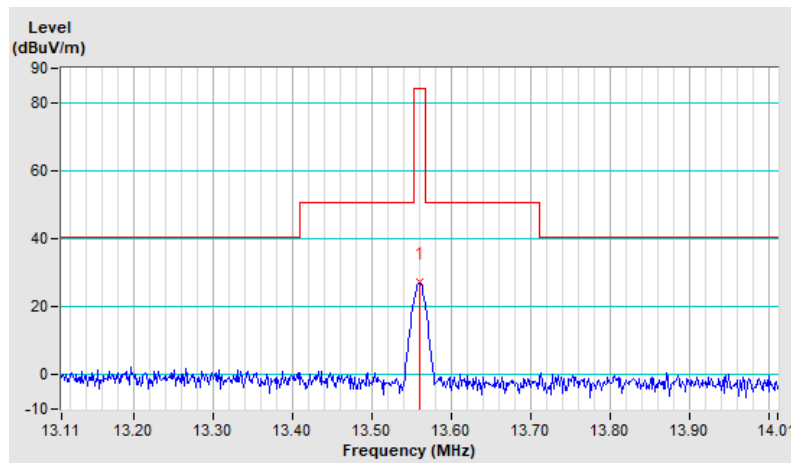

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	24.5 QP	84.0 QP	-59.5	1.00	200	43.2	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

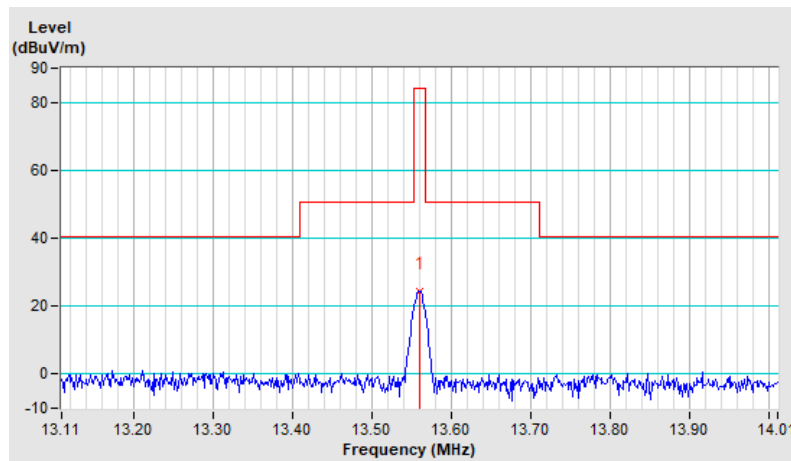

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	31.6 QP	84.0 QP	-52.4	1.00	158	50.3	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

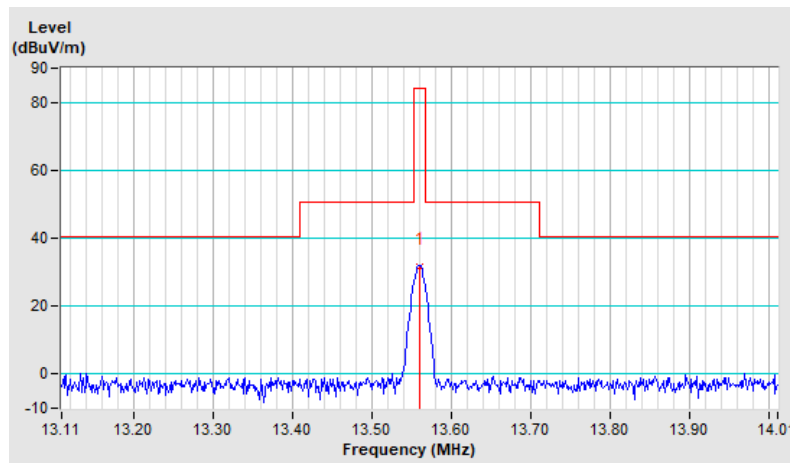

Type F

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	27.4 QP	84.0 QP	-56.6	1.00	140	46.1	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

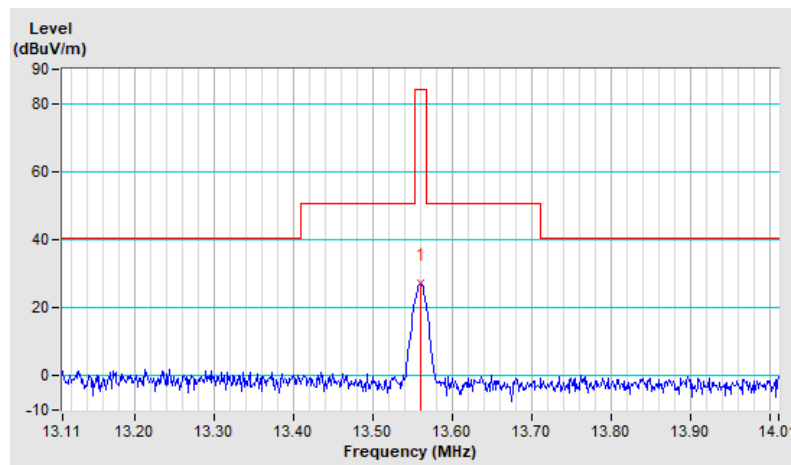

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	24.3 QP	84.0 QP	-59.7	1.00	204	43.0	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

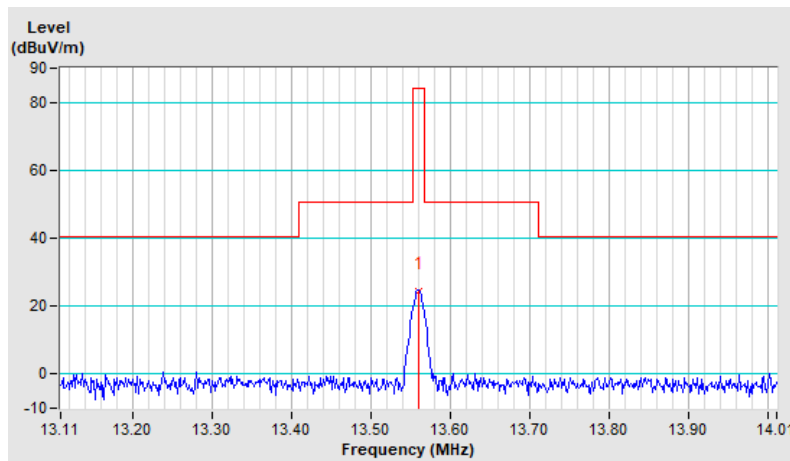

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	31.7 QP	84.0 QP	-52.3	1.00	163	50.4	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

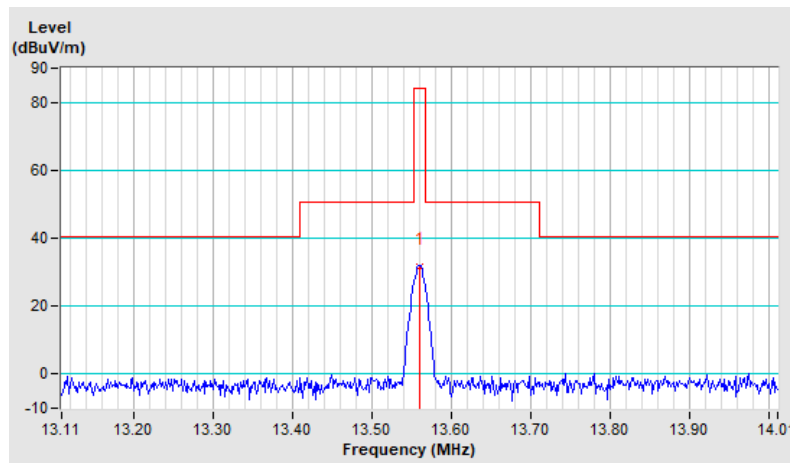



Type V

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	27.4 QP	84.0 QP	-56.6	1.00	138	46.1	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

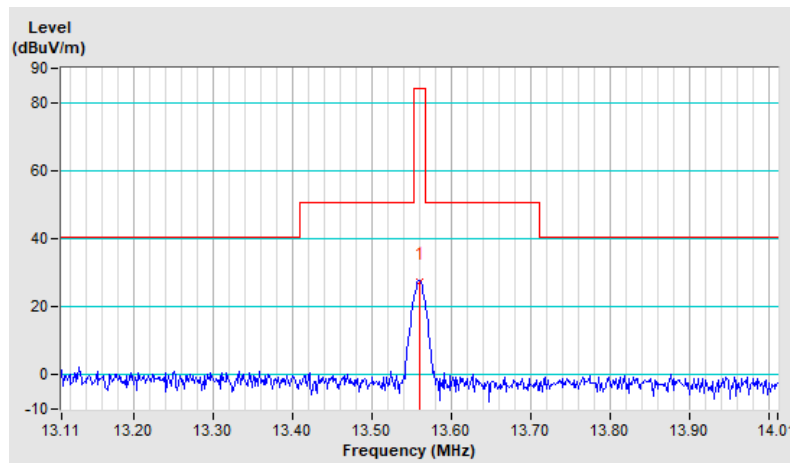

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	24.4 QP	84.0 QP	-59.6	1.00	199	43.1	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

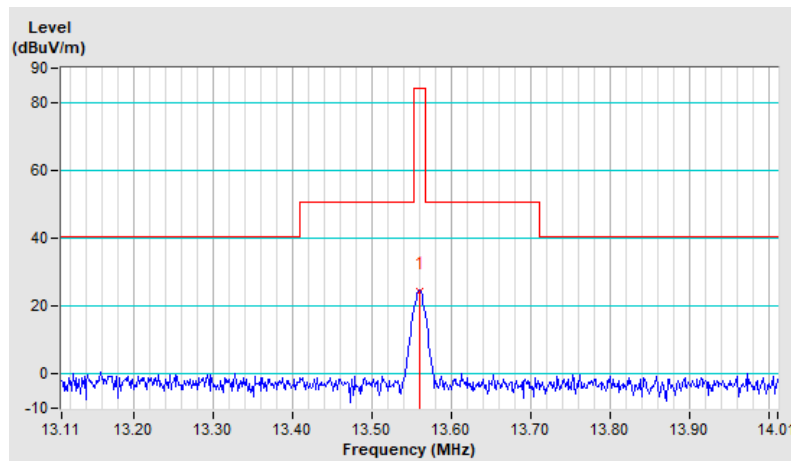

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	31.7 QP	84.0 QP	-52.3	1.00	165	50.4	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

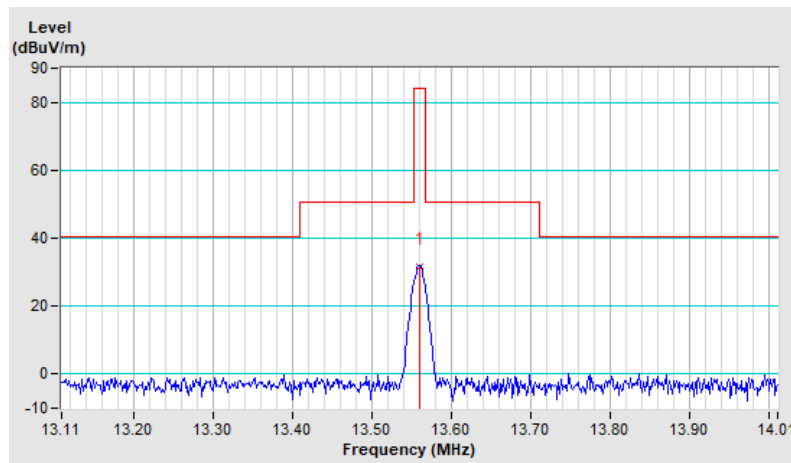


Type A

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	1.40 QP	29.50 QP	-28.10	1.00	40	22.00	-20.60
2	3.57	-3.50 QP	29.50 QP	-33.00	1.00	180	17.00	-20.50
3	15.77	-1.70 QP	29.50 QP	-31.20	1.00	12	16.90	-18.60
4	17.89	0.20 QP	29.50 QP	-29.30	1.00	214	18.70	-18.50
5	22.12	12.70 QP	29.50 QP	-16.80	1.00	318	31.10	-18.40
6	23.18	10.70 QP	29.50 QP	-18.80	1.00	351	29.00	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

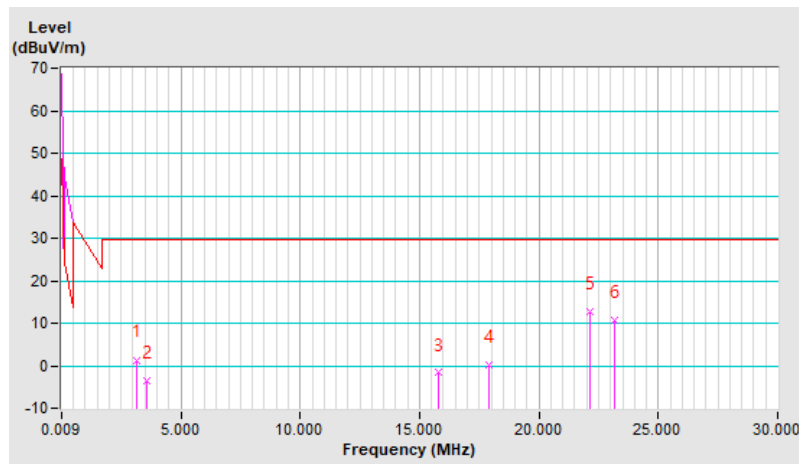


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	2.30 QP	29.50 QP	-27.20	1.00	339	22.90	-20.60
2	3.57	0.50 QP	29.50 QP	-29.00	1.00	14	21.00	-20.50
3	15.77	-0.10 QP	29.50 QP	-29.60	1.00	69	18.50	-18.60
4	21.06	1.30 QP	29.50 QP	-28.20	1.00	151	19.70	-18.40
5	23.18	10.40 QP	29.50 QP	-19.10	1.00	115	28.70	-18.30
6	24.23	3.30 QP	29.50 QP	-26.20	1.00	9	21.60	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

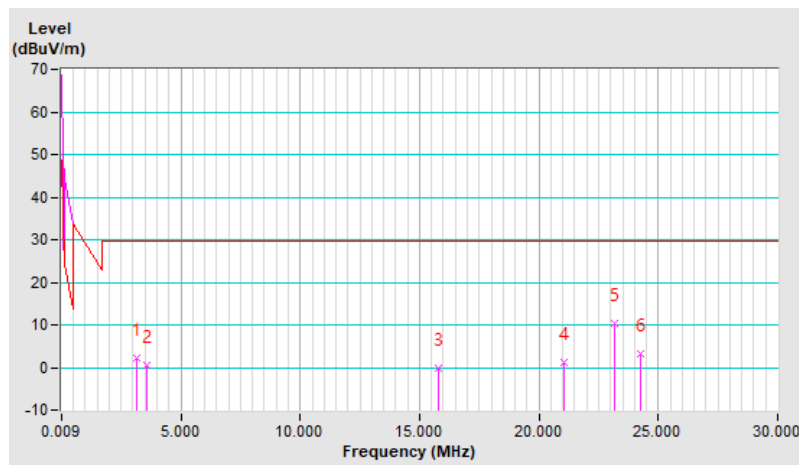


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	-0.30 QP	29.50 QP	-29.80	1.00	6	20.30	-20.60
2	4.09	-7.30 QP	29.50 QP	-36.80	1.00	296	13.00	-20.30
3	20.00	2.10 QP	29.50 QP	-27.40	1.00	164	20.50	-18.40
4	22.12	9.10 QP	29.50 QP	-20.40	1.00	273	27.50	-18.40
5	23.18	1.40 QP	29.50 QP	-28.10	1.00	17	19.70	-18.30
6	25.29	2.60 QP	29.50 QP	-26.90	1.00	147	20.90	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

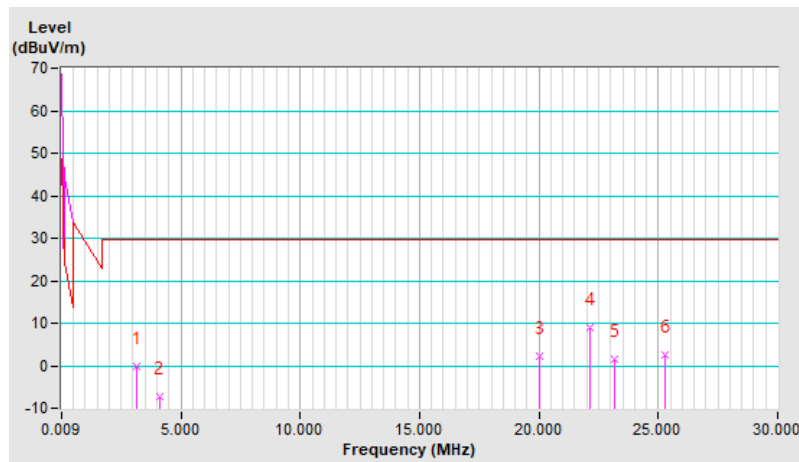


Type B

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	2.20 QP	29.50 QP	-27.30	1.00	5	22.80	-20.60
2	10.39	-6.40 QP	29.50 QP	-35.90	1.00	96	12.40	-18.80
3	15.77	-4.70 QP	29.50 QP	-34.20	1.00	230	13.90	-18.60
4	20.00	4.90 QP	29.50 QP	-24.60	1.00	302	23.30	-18.40
5	23.18	10.10 QP	29.50 QP	-19.40	1.00	98	28.40	-18.30
6	25.29	1.70 QP	29.50 QP	-27.80	1.00	160	20.00	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

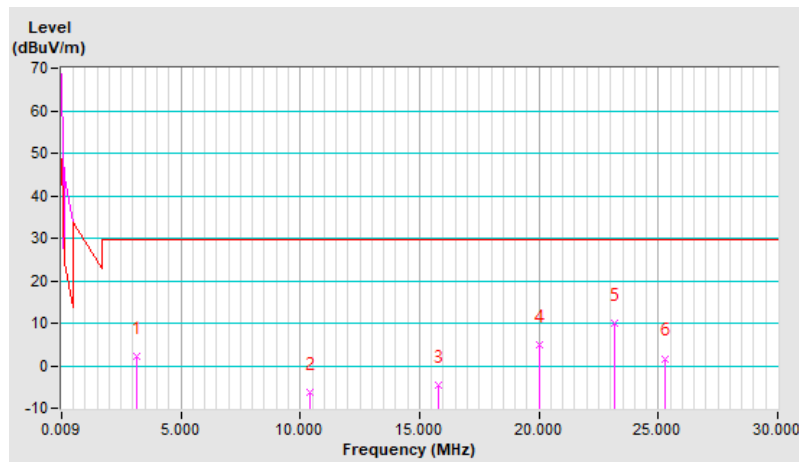


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	0.40 QP	29.50 QP	-29.10	1.00	272	21.00	-20.60
2	3.57	0.20 QP	29.50 QP	-29.30	1.00	228	20.70	-20.50
3	15.77	-0.20 QP	29.50 QP	-29.70	1.00	284	18.40	-18.60
4	20.00	4.40 QP	29.50 QP	-25.10	1.00	224	22.80	-18.40
5	22.12	10.80 QP	29.50 QP	-18.70	1.00	188	29.20	-18.40
6	23.18	9.80 QP	29.50 QP	-19.70	1.00	115	28.10	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

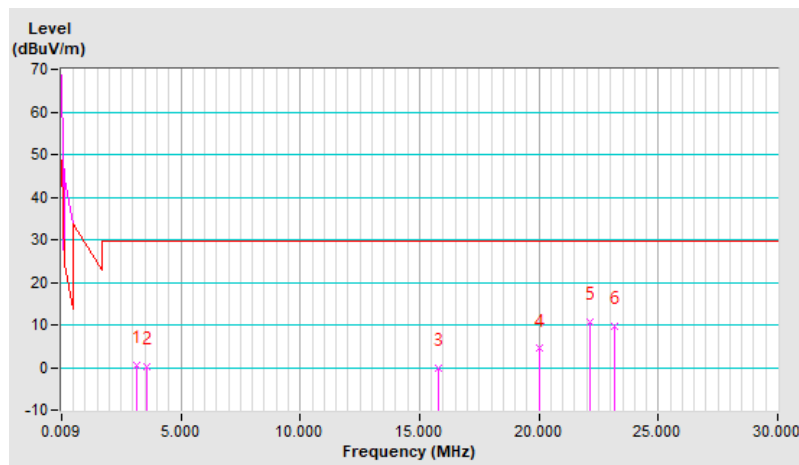




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	-1.10 QP	29.50 QP	-30.60	1.00	132	19.50	-20.60
2	3.57	-4.50 QP	29.50 QP	-34.00	1.00	299	16.00	-20.50
3	15.77	-5.00 QP	29.50 QP	-34.50	1.00	17	13.60	-18.60
4	20.00	2.40 QP	29.50 QP	-27.10	1.00	89	20.80	-18.40
5	22.12	7.70 QP	29.50 QP	-21.80	1.00	359	26.10	-18.40
6	23.18	6.40 QP	29.50 QP	-23.10	1.00	237	24.70	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

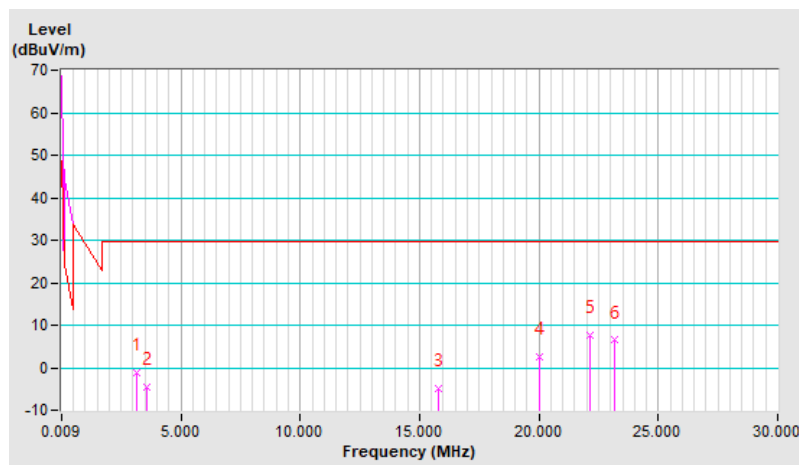


Type F

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	0.10 QP	29.50 QP	-29.40	1.00	157	20.70	-20.60
2	10.05	-7.10 QP	29.50 QP	-36.60	1.00	63	11.70	-18.80
3	17.89	-2.90 QP	29.50 QP	-32.40	1.00	228	15.60	-18.50
4	20.00	5.60 QP	29.50 QP	-23.90	1.00	20	24.00	-18.40
5	22.12	8.40 QP	29.50 QP	-21.10	1.00	173	26.80	-18.40
6	25.29	2.20 QP	29.50 QP	-27.30	1.00	120	20.50	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

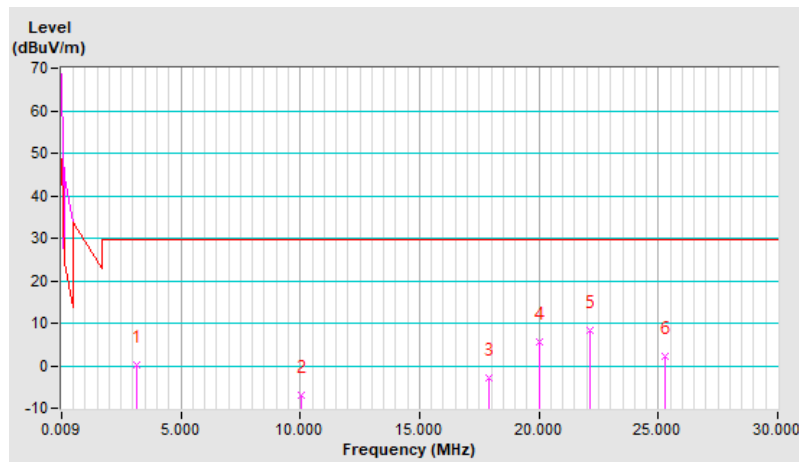


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	0.20 QP	29.50 QP	-29.30	1.00	98	20.80	-20.60
2	3.57	1.00 QP	29.50 QP	-28.50	1.00	283	21.50	-20.50
3	15.77	-1.90 QP	29.50 QP	-31.40	1.00	3	16.70	-18.60
4	18.95	-2.00 QP	29.50 QP	-31.50	1.00	7	16.40	-18.40
5	22.12	11.00 QP	29.50 QP	-18.50	1.00	17	29.40	-18.40
6	23.18	6.00 QP	29.50 QP	-23.50	1.00	12	24.30	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

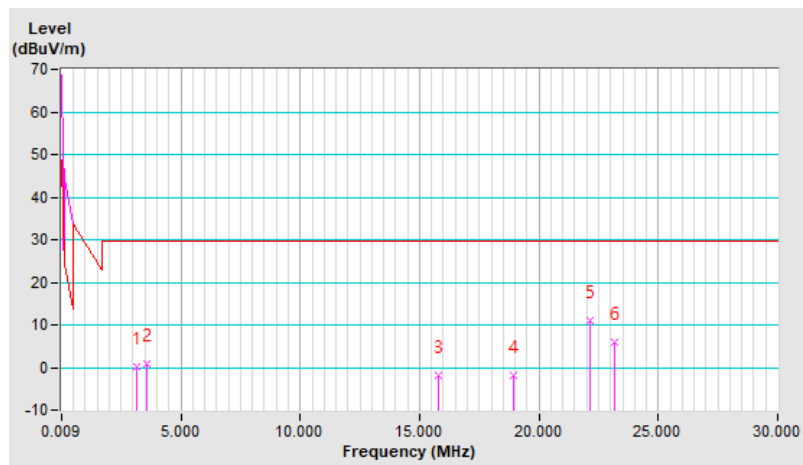


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	-0.90 QP	29.50 QP	-30.40	1.00	166	19.70	-20.60
2	3.57	-4.70 QP	29.50 QP	-34.20	1.00	74	15.80	-20.50
3	21.06	-1.90 QP	29.50 QP	-31.40	1.00	223	16.50	-18.40
4	22.12	3.20 QP	29.50 QP	-26.30	1.00	191	21.60	-18.40
5	23.18	7.10 QP	29.50 QP	-22.40	1.00	38	25.40	-18.30
6	25.29	1.90 QP	29.50 QP	-27.60	1.00	110	20.20	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

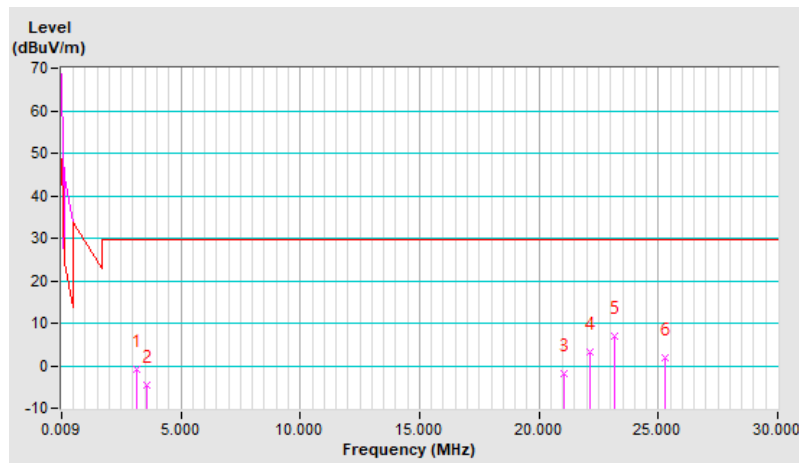


Type V

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	2.30 QP	29.50 QP	-27.20	1.00	286	22.90	-20.60
2	10.82	-6.10 QP	29.50 QP	-35.60	1.00	59	12.70	-18.80
3	18.95	-2.50 QP	29.50 QP	-32.00	1.00	94	15.90	-18.40
4	20.00	5.90 QP	29.50 QP	-23.60	1.00	125	24.30	-18.40
5	22.12	10.80 QP	29.50 QP	-18.70	1.00	156	29.20	-18.40
6	23.18	10.40 QP	29.50 QP	-19.10	1.00	292	28.70	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

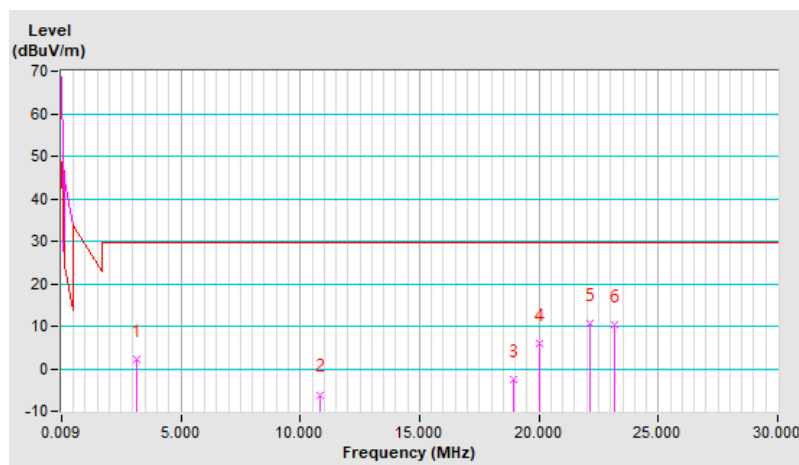


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	0.30 QP	29.50 QP	-29.20	1.00	196	20.90	-20.60
2	3.57	0.90 QP	29.50 QP	-28.60	1.00	214	21.40	-20.50
3	15.77	-3.80 QP	29.50 QP	-33.30	1.00	297	14.80	-18.60
4	20.00	2.30 QP	29.50 QP	-27.20	1.00	0	20.70	-18.40
5	22.12	10.60 QP	29.50 QP	-18.90	1.00	188	29.00	-18.40
6	23.18	10.60 QP	29.50 QP	-18.90	1.00	12	28.90	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

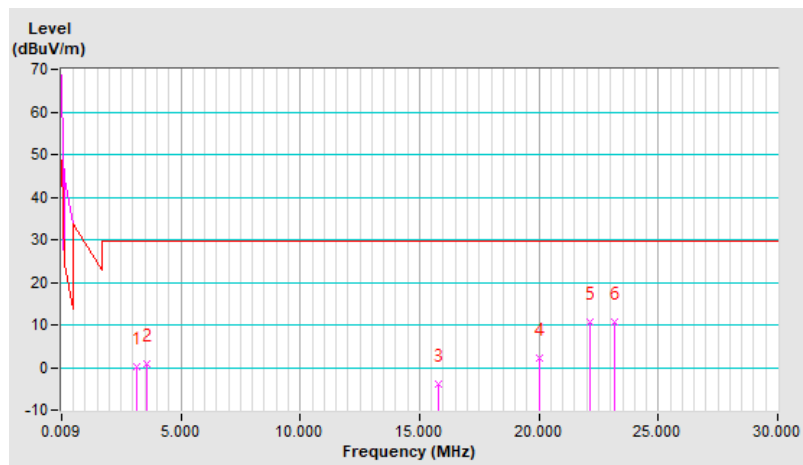


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.57	-2.50 QP	29.50 QP	-32.00	1.00	20	18.00	-20.50
2	8.32	-7.50 QP	29.50 QP	-37.00	1.00	199	11.70	-19.20
3	15.77	-3.90 QP	29.50 QP	-33.40	1.00	85	14.70	-18.60
4	20.00	1.70 QP	29.50 QP	-27.80	1.00	333	20.10	-18.40
5	22.12	8.80 QP	29.50 QP	-20.70	1.00	359	27.20	-18.40
6	23.18	5.60 QP	29.50 QP	-23.90	1.00	71	23.90	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

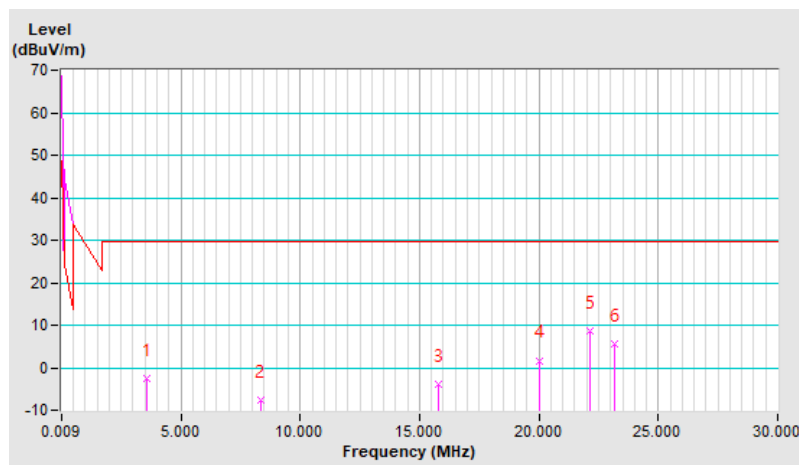


Type A

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.28	32.3 QP	40.0	-7.7	1.50 H	241	41.3	-9.0
2	108.73	30.3 QP	43.5	-13.2	1.00 H	278	42.2	-11.9
3	155.13	31.8 QP	43.5	-11.7	2.00 H	141	40.2	-8.4
4	193.09	29.8 QP	43.5	-13.7	1.00 H	278	40.9	-11.1
5	243.70	30.5 QP	46.0	-15.5	1.00 H	110	39.6	-9.1
6	339.31	28.9 QP	46.0	-17.1	1.00 H	41	34.8	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

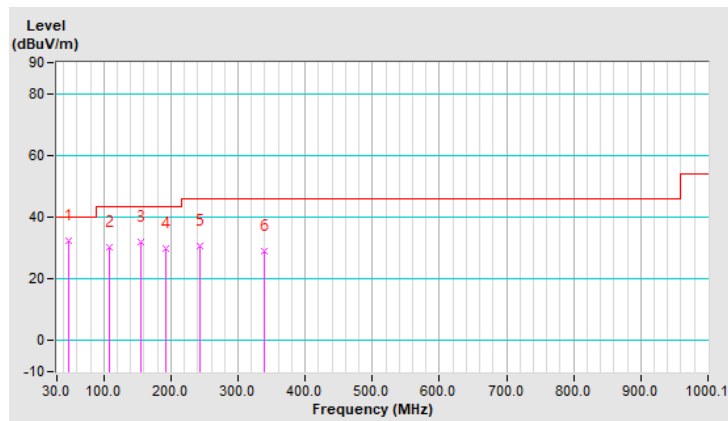




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	35.1 QP	40.0	-4.9	1.00 V	223	45.7	-10.6
2	48.28	32.7 QP	40.0	-7.3	1.49 V	216	41.7	-9.0
3	108.73	31.9 QP	43.5	-11.6	1.00 V	89	43.8	-11.9
4	159.35	28.9 QP	43.5	-14.6	1.00 V	280	37.2	-8.3
5	243.70	27.9 QP	46.0	-18.1	1.99 V	16	37.0	-9.1
6	408.20	31.6 QP	46.0	-14.4	1.00 V	184	36.2	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

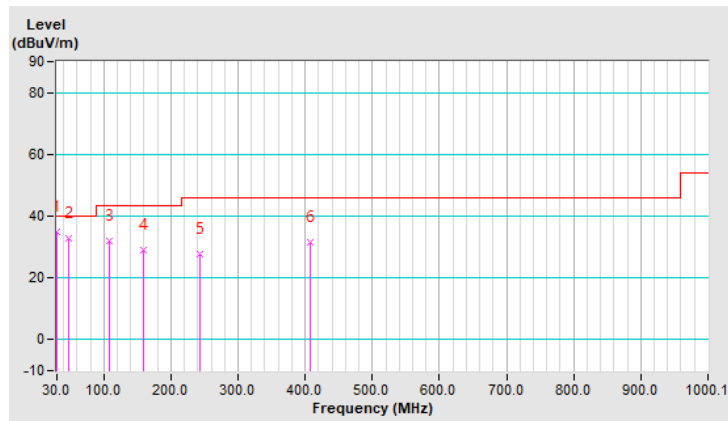


Type B

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.47	32.3 QP	40.0	-7.7	1.50 H	262	41.4	-9.1
2	107.33	30.5 QP	43.5	-13.0	1.00 H	277	42.6	-12.1
3	153.72	32.9 QP	43.5	-10.6	1.00 H	288	41.3	-8.4
4	243.70	30.0 QP	46.0	-16.0	1.00 H	122	39.1	-9.1
5	342.12	30.9 QP	46.0	-15.1	2.00 H	51	36.7	-5.8
6	493.96	27.1 QP	46.0	-18.9	1.00 H	215	29.6	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

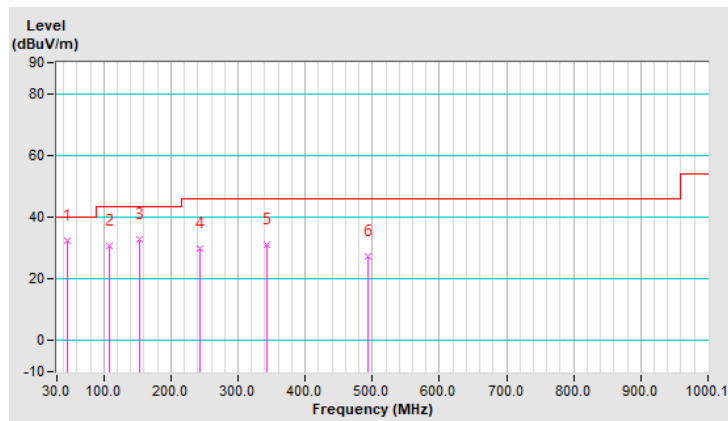


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	49.68	35.9 QP	40.0	-4.1	1.00 V	4	45.0	-9.1
2	110.14	30.9 QP	43.5	-12.6	1.00 V	70	42.7	-11.8
3	157.94	28.8 QP	43.5	-14.7	1.50 V	302	37.1	-8.3
4	270.42	26.5 QP	46.0	-19.5	1.00 V	38	34.2	-7.7
5	332.28	26.7 QP	46.0	-19.3	1.50 V	147	32.6	-5.9
6	529.11	27.0 QP	46.0	-19.0	1.00 V	4	28.6	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

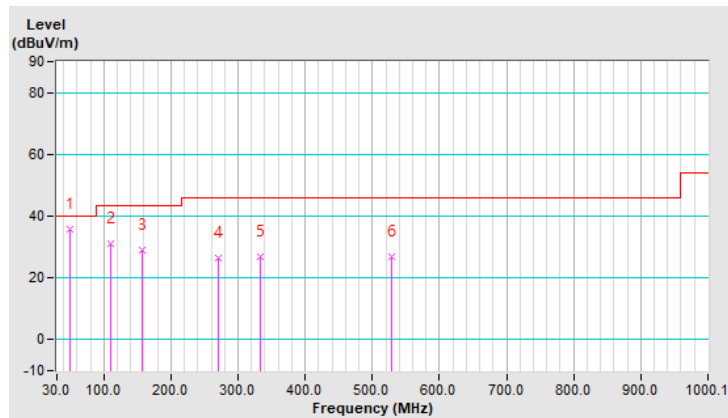


Type F

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.28	29.6 QP	40.0	-10.4	1.00 H	253	38.6	-9.0
2	110.14	29.5 QP	43.5	-14.0	1.00 H	265	41.3	-11.8
3	155.13	32.2 QP	43.5	-11.3	2.00 H	133	40.6	-8.4
4	194.50	31.4 QP	43.5	-12.1	2.00 H	239	42.5	-11.1
5	243.70	29.8 QP	46.0	-16.2	1.00 H	108	38.9	-9.1
6	339.31	26.6 QP	46.0	-19.4	1.50 H	58	32.5	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

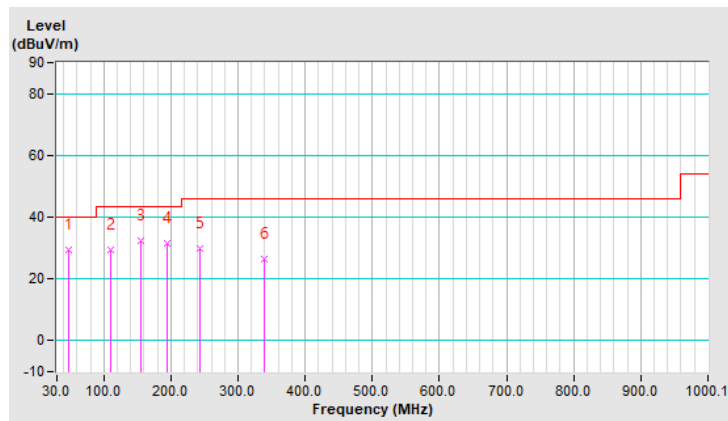


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	49.68	35.5 QP	40.0	-4.5	1.50 V	24	44.6	-9.1
2	107.33	31.2 QP	43.5	-12.3	1.50 V	70	43.3	-12.1
3	155.13	32.0 QP	43.5	-11.5	1.00 V	305	40.4	-8.4
4	274.63	26.3 QP	46.0	-19.7	1.00 V	153	33.8	-7.5
5	371.64	25.9 QP	46.0	-20.1	2.00 V	24	31.0	-5.1
6	468.65	27.3 QP	46.0	-18.7	1.00 V	241	30.1	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

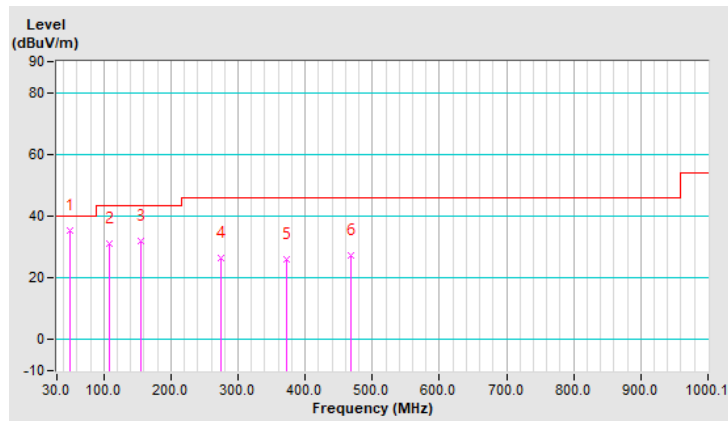


Type V

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.28	30.2 QP	40.0	-9.8	1.50 H	315	39.2	-9.0
2	110.14	29.4 QP	43.5	-14.1	1.00 H	339	41.2	-11.8
3	155.13	33.4 QP	43.5	-10.1	1.50 H	178	41.8	-8.4
4	188.87	29.8 QP	43.5	-13.7	1.00 H	243	40.5	-10.7
5	243.70	30.0 QP	46.0	-16.0	1.00 H	115	39.1	-9.1
6	339.31	30.6 QP	46.0	-15.4	1.00 H	74	36.5	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

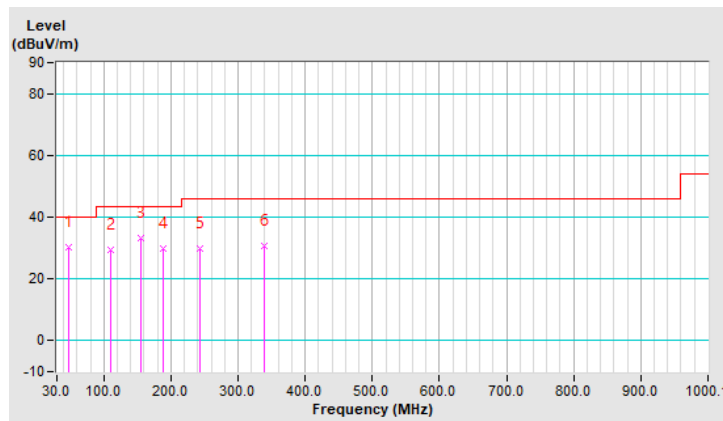


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	33.0 QP	40.0	-7.0	1.50 V	52	43.6	-10.6
2	48.28	30.5 QP	40.0	-9.5	1.00 V	199	39.5	-9.0
3	108.73	30.7 QP	43.5	-12.8	2.00 V	126	42.6	-11.9
4	157.94	28.3 QP	43.5	-15.2	1.50 V	286	36.6	-8.3
5	274.63	26.8 QP	46.0	-19.2	1.00 V	31	34.3	-7.5
6	614.87	30.5 QP	46.0	-15.5	1.00 V	143	29.8	0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

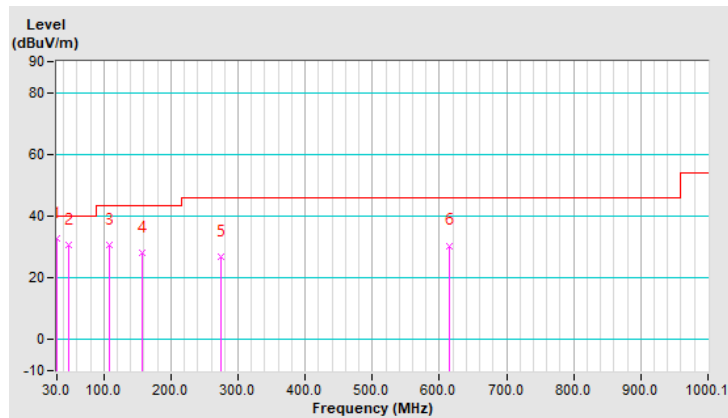

Mode B2  
Type A

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	24.2 QP	84.0 QP	-59.8	1.00	140	42.9	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

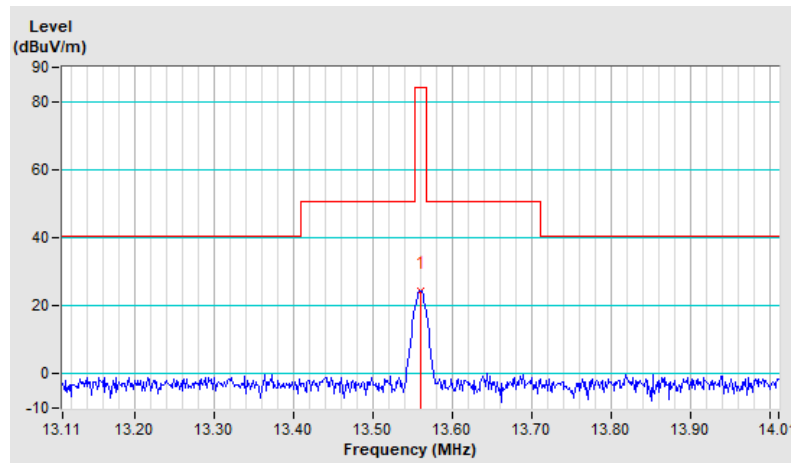



EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	21.3 QP	84.0 QP	-62.7	1.00	204	40.0	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

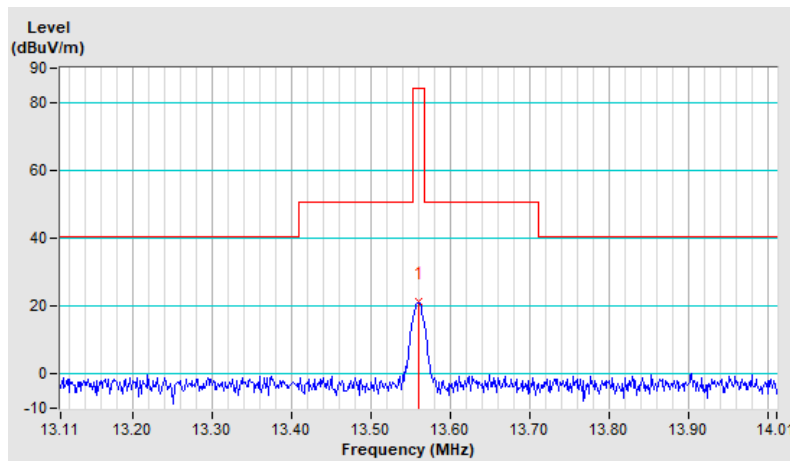

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	28.5 QP	84.0 QP	-55.5	1.00	150	47.2	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

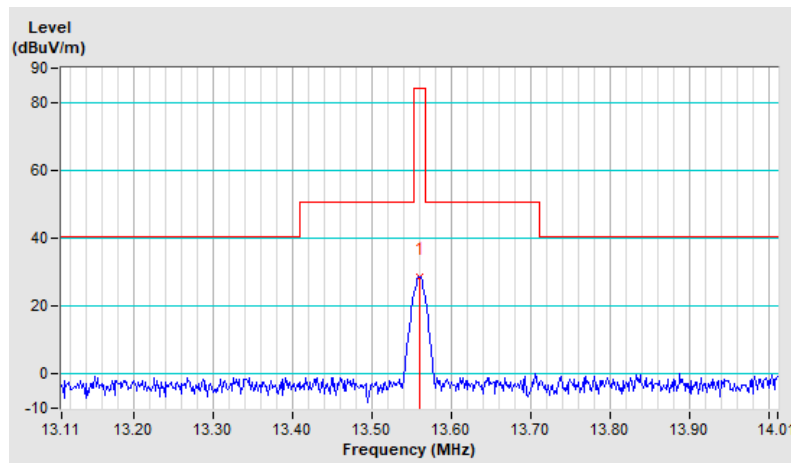

Type B

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	24.4 QP	84.0 QP	-59.6	1.00	145	43.1	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

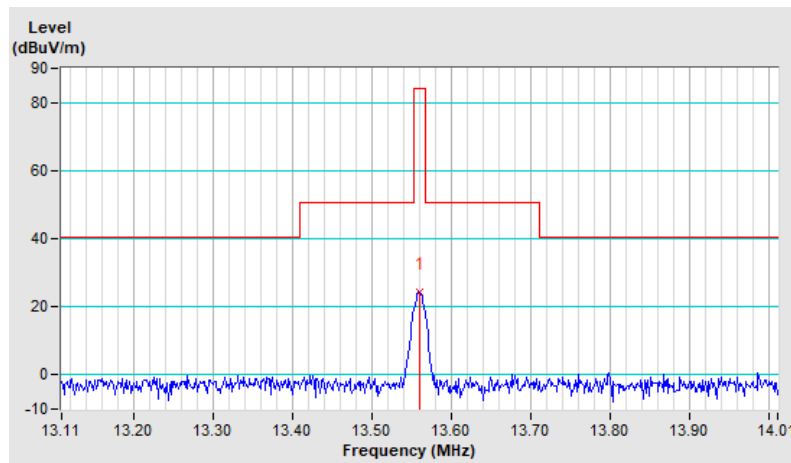

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	21.5 QP	84.0 QP	-62.5	1.00	200	40.2	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

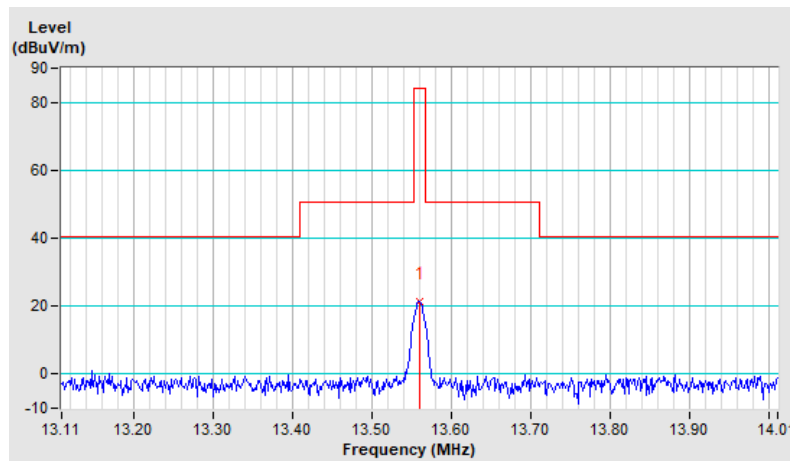

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	28.6 QP	84.0 QP	-55.4	1.00	153	47.3	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

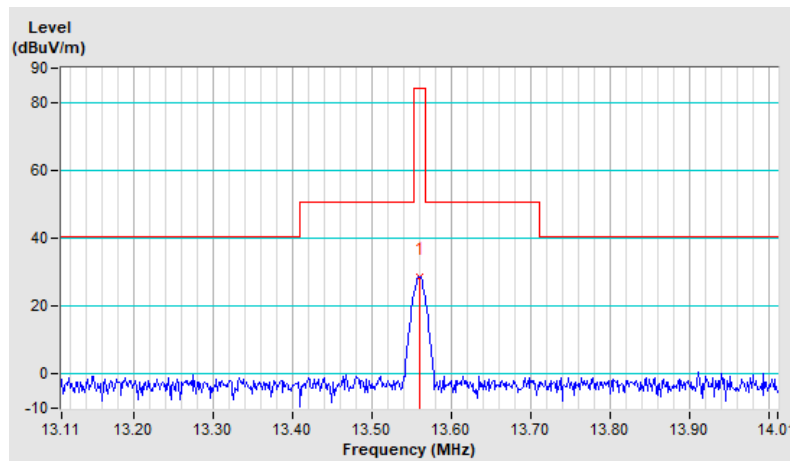

Type F

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	24.1 QP	84.0 QP	-59.9	1.00	145	42.8	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

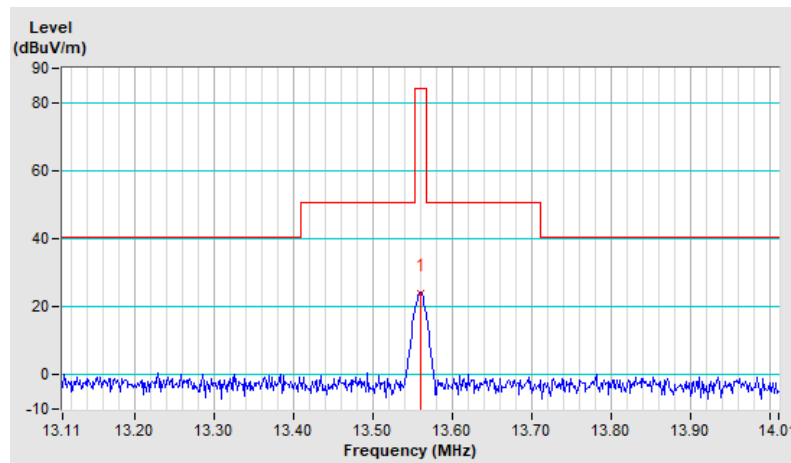

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	21.4 QP	84.0 QP	-62.6	1.00	197	40.1	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

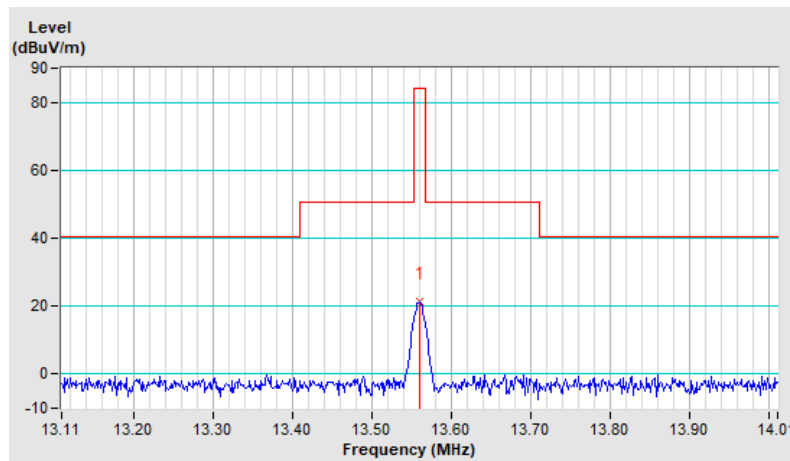

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	28.4 QP	84.0 QP	-55.6	1.00	157	47.1	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

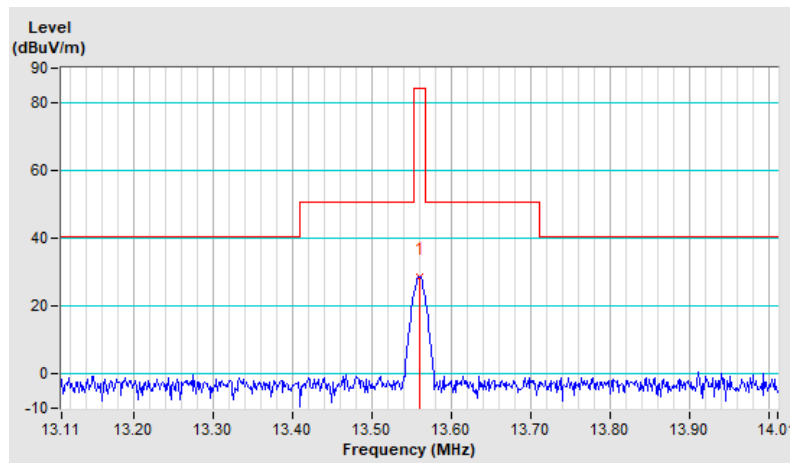



Type V

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	24.2 QP	84.0 QP	-59.8	1.00	142	42.9	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

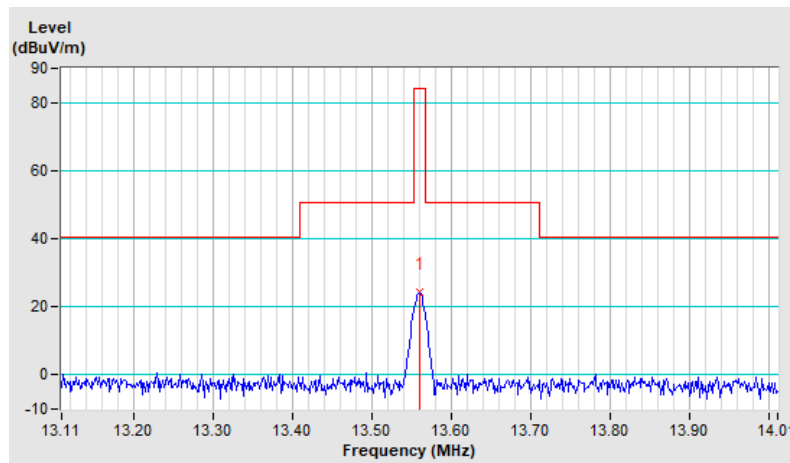

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	21.3 QP	84.0 QP	-62.7	1.00	202	40.0	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

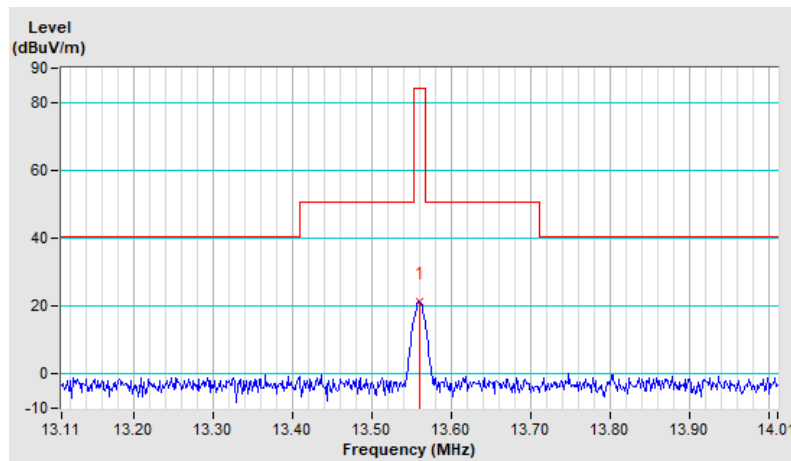

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	28.5 QP	84.0 QP	-55.5	1.00	155	47.2	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

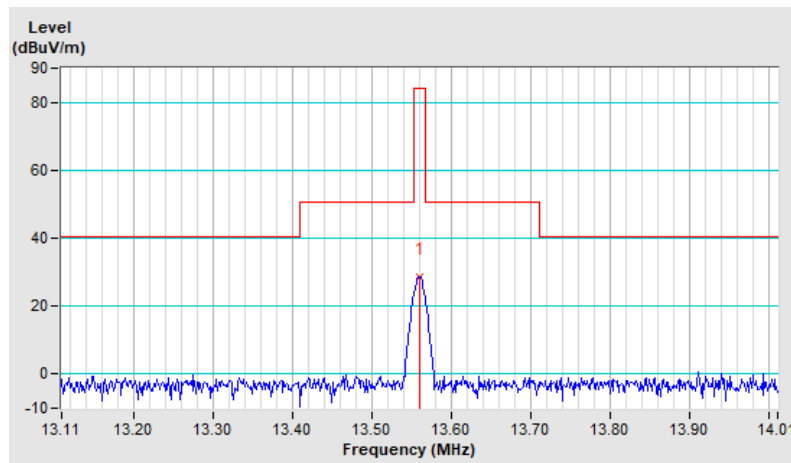


Type A

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	1.30 QP	29.50 QP	-28.20	1.00	180	21.90	-20.60
2	3.57	-1.70 QP	29.50 QP	-31.20	1.00	6	18.80	-20.50
3	15.77	-3.30 QP	29.50 QP	-32.80	1.00	73	15.30	-18.60
4	21.06	2.00 QP	29.50 QP	-27.50	1.00	327	20.40	-18.40
5	22.12	11.40 QP	29.50 QP	-18.10	1.00	313	29.80	-18.40
6	23.18	11.00 QP	29.50 QP	-18.50	1.00	268	29.30	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

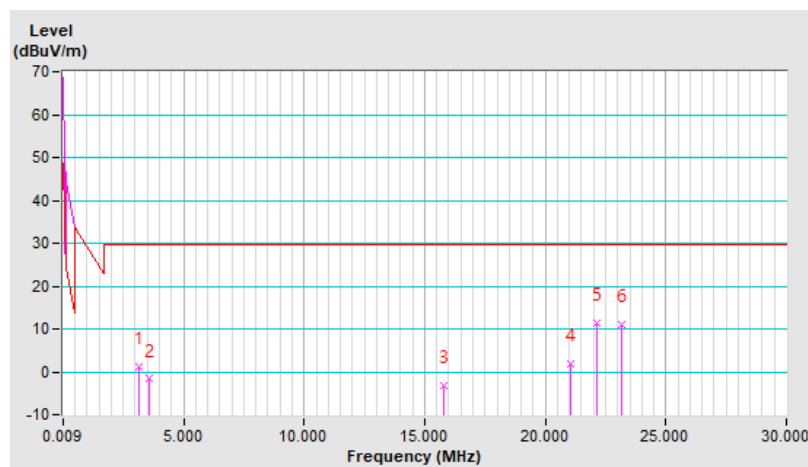


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	1.00 QP	29.50 QP	-28.50	1.00	235	21.60	-20.60
2	3.57	1.00 QP	29.50 QP	-28.50	1.00	148	21.50	-20.50
3	15.77	-1.40 QP	29.50 QP	-30.90	1.00	195	17.20	-18.60
4	18.80	-0.40 QP	29.50 QP	-29.90	1.00	309	18.00	-18.40
5	22.12	11.90 QP	29.50 QP	-17.60	1.00	314	30.30	-18.40
6	23.18	10.40 QP	29.50 QP	-19.10	1.00	282	28.70	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

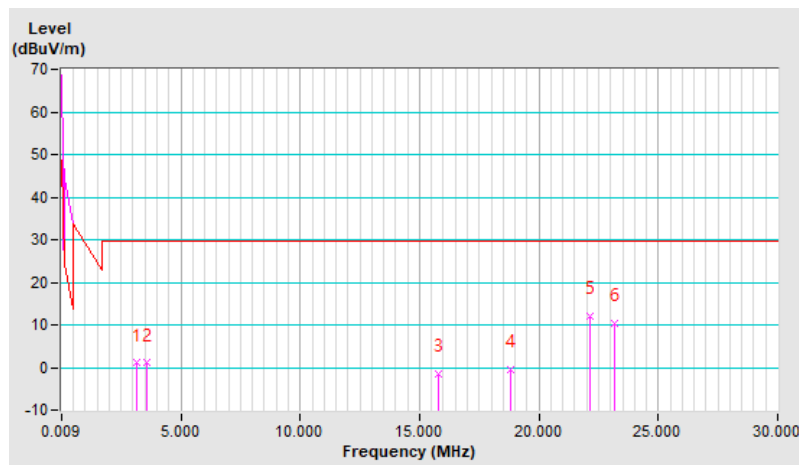


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	-4.30 QP	29.50 QP	-33.80	1.00	280	16.30	-20.60
2	3.57	-3.10 QP	29.50 QP	-32.60	1.00	288	17.40	-20.50
3	11.93	-6.80 QP	29.50 QP	-36.30	1.00	67	11.90	-18.70
4	22.12	8.90 QP	29.50 QP	-20.60	1.00	70	27.30	-18.40
5	23.18	4.60 QP	29.50 QP	-24.90	1.00	66	22.90	-18.30
6	25.29	2.30 QP	29.50 QP	-27.20	1.00	30	20.60	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

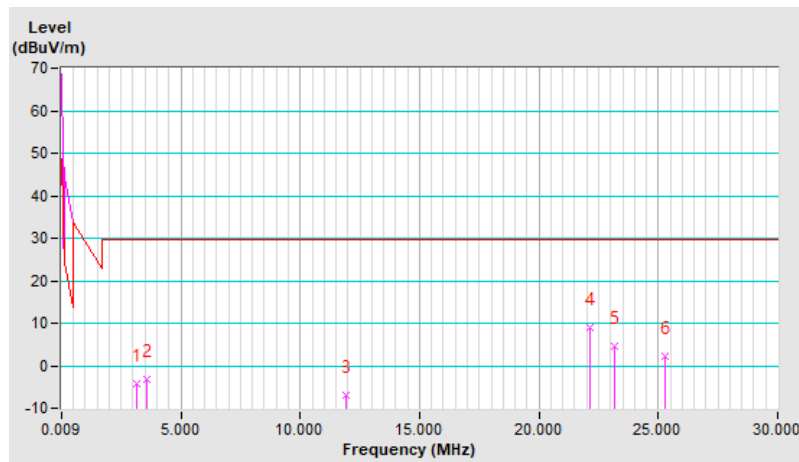


Type B

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	29.50 QP	29.50	-27.00	1.00	2	23.10	-20.60
2	3.57	29.50 QP	29.50	-32.60	1.00	249	17.40	-20.50
3	17.89	29.50 QP	29.50	-30.80	1.00	279	17.20	-18.50
4	20.00	29.50 QP	29.50	-28.10	1.00	161	19.80	-18.40
5	22.12	29.50 QP	29.50	-17.20	1.00	237	30.70	-18.40
6	23.18	29.50 QP	29.50	-18.40	1.00	246	29.40	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

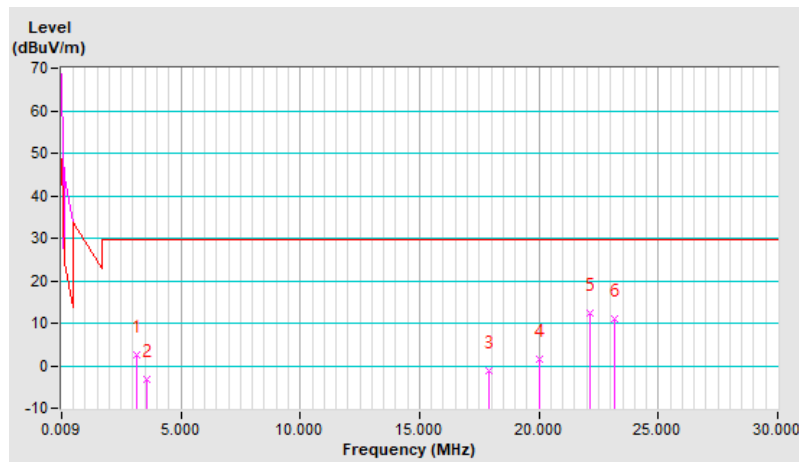


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	2.40 QP	29.50 QP	-27.10	1.00	345	23.00	-20.60
2	3.57	-0.10 QP	29.50 QP	-29.60	1.00	115	20.40	-20.50
3	11.59	-0.70 QP	29.50 QP	-30.20	1.00	177	18.00	-18.70
4	15.77	-2.00 QP	29.50 QP	-31.50	1.00	99	16.60	-18.60
5	23.18	10.30 QP	29.50 QP	-19.20	1.00	13	28.60	-18.30
6	25.29	3.40 QP	29.50 QP	-26.10	1.00	120	21.70	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

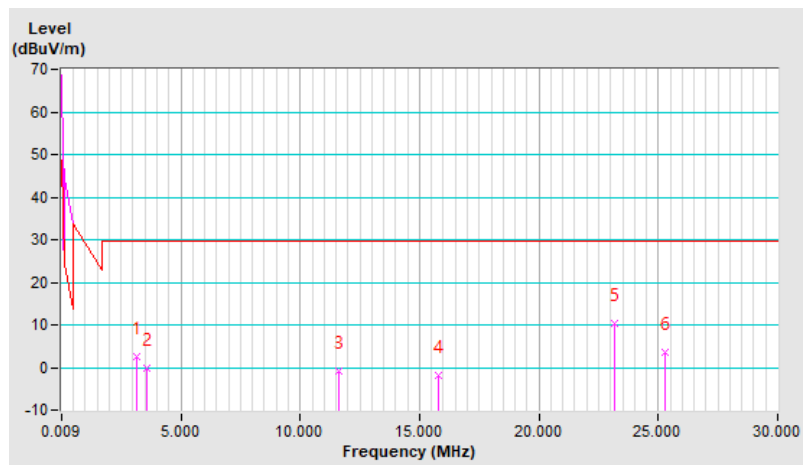




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	-1.60 QP	29.50 QP	-31.10	1.00	67	19.00	-20.60
2	3.57	-4.40 QP	29.50 QP	-33.90	1.00	117	16.10	-20.50
3	10.92	-5.60 QP	29.50 QP	-35.10	1.00	167	13.20	-18.80
4	22.12	8.40 QP	29.50 QP	-21.10	1.00	18	26.80	-18.40
5	23.18	5.10 QP	29.50 QP	-24.40	1.00	219	23.40	-18.30
6	26.35	-0.30 QP	29.50 QP	-29.80	1.00	79	18.00	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

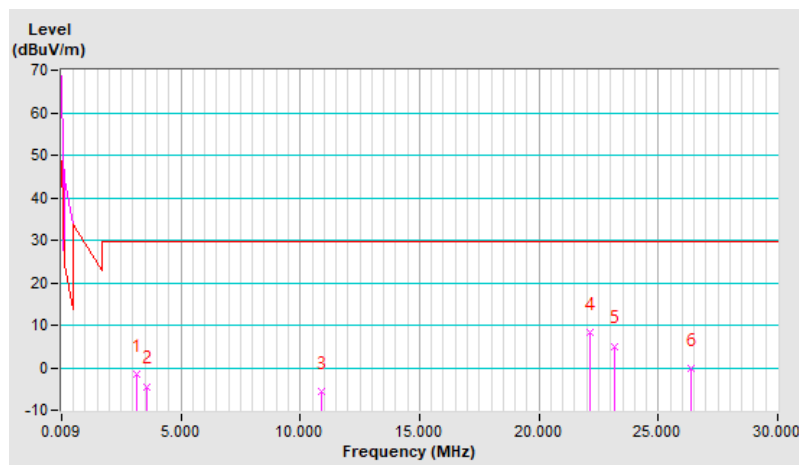


Type F

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	0.80 QP	29.50 QP	-28.70	1.00	162	21.40	-20.60
2	3.57	-3.70 QP	29.50 QP	-33.20	1.00	40	16.80	-20.50
3	15.77	-0.50 QP	29.50 QP	-30.00	1.00	132	18.10	-18.60
4	21.06	3.30 QP	29.50 QP	-26.20	1.00	29	21.70	-18.40
5	22.12	12.10 QP	29.50 QP	-17.40	1.00	205	30.50	-18.40
6	24.23	3.70 QP	29.50 QP	-25.80	1.00	147	22.00	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

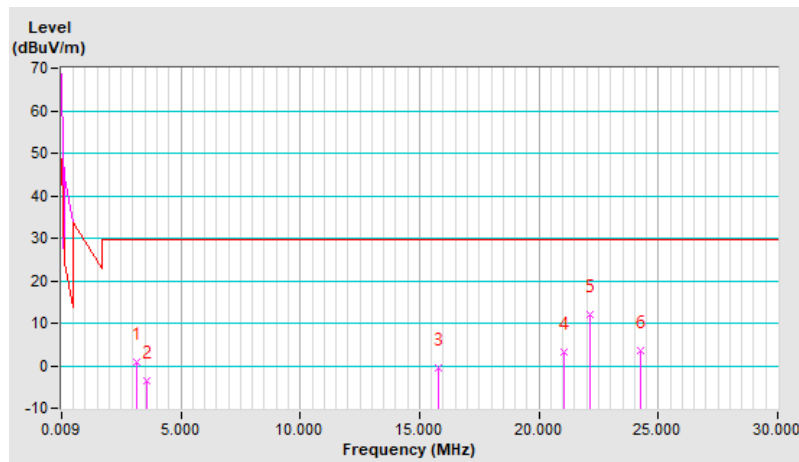


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	1.50 QP	29.50 QP	-28.00	1.00	302	22.10	-20.60
2	3.57	2.20 QP	29.50 QP	-27.30	1.00	193	22.70	-20.50
3	15.77	-1.60 QP	29.50 QP	-31.10	1.00	218	17.00	-18.60
4	18.95	-0.10 QP	29.50 QP	-29.60	1.00	70	18.30	-18.40
5	22.12	12.50 QP	29.50 QP	-17.00	1.00	142	30.90	-18.40
6	23.18	6.00 QP	29.50 QP	-23.50	1.00	309	24.30	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

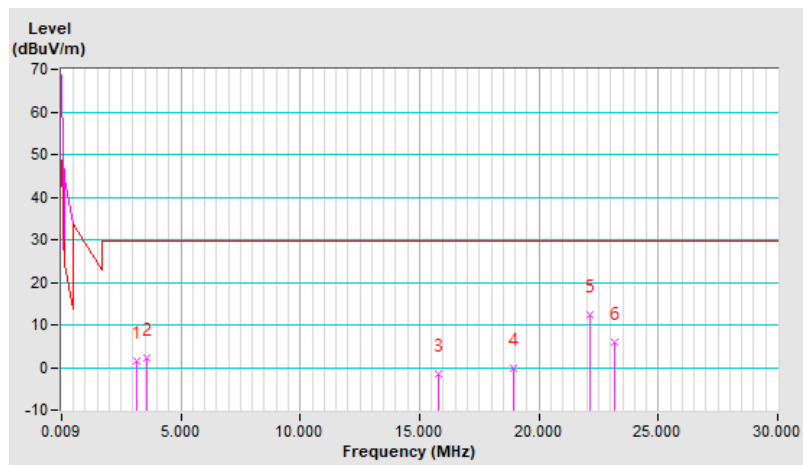


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	-0.70 QP	29.50 QP	-30.20	1.00	28	19.90	-20.60
2	8.71	-8.10 QP	29.50 QP	-37.60	1.00	9	11.00	-19.10
3	15.77	-5.40 QP	29.50 QP	-34.90	1.00	262	13.20	-18.60
4	22.12	6.60 QP	29.50 QP	-22.90	1.00	8	25.00	-18.40
5	23.18	4.70 QP	29.50 QP	-24.80	1.00	13	23.00	-18.30
6	25.29	1.50 QP	29.50 QP	-28.00	1.00	188	19.80	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

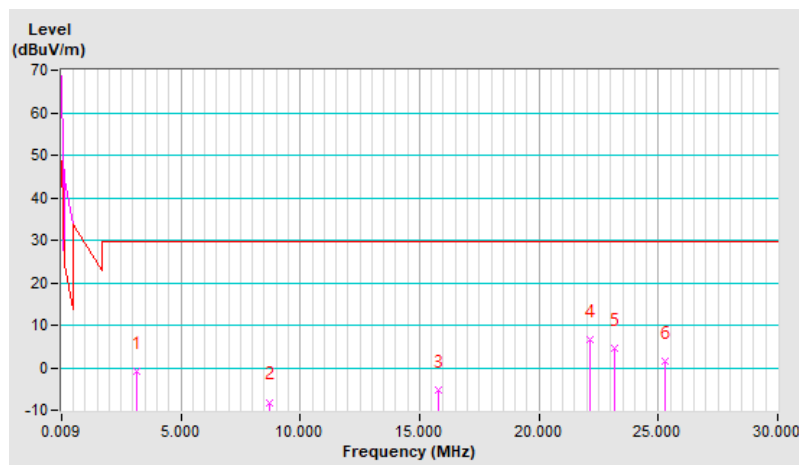


Type V

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.57	-4.80 QP	29.50 QP	-34.30	1.00	276	15.70	-20.50
2	15.77	-0.80 QP	29.50 QP	-30.30	1.00	275	17.80	-18.60
3	17.89	-3.70 QP	29.50 QP	-33.20	1.00	139	14.80	-18.50
4	20.00	4.60 QP	29.50 QP	-24.90	1.00	152	23.00	-18.40
5	24.23	4.20 QP	29.50 QP	-25.30	1.00	310	22.50	-18.30
6	25.29	2.60 QP	29.50 QP	-26.90	1.00	241	20.90	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

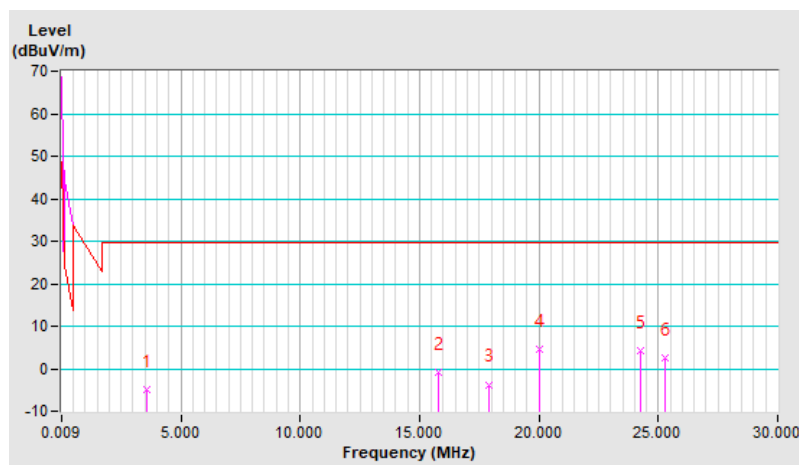


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	1.70 QP	29.50 QP	-27.80	1.00	118	22.30	-20.60
2	3.57	1.80 QP	29.50 QP	-27.70	1.00	305	22.30	-20.50
3	15.77	-2.40 QP	29.50 QP	-31.90	1.00	298	16.20	-18.60
4	18.95	-0.60 QP	29.50 QP	-30.10	1.00	26	17.80	-18.40
5	23.18	9.70 QP	29.50 QP	-19.80	1.00	201	28.00	-18.30
6	25.29	2.60 QP	29.50 QP	-26.90	1.00	350	20.90	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

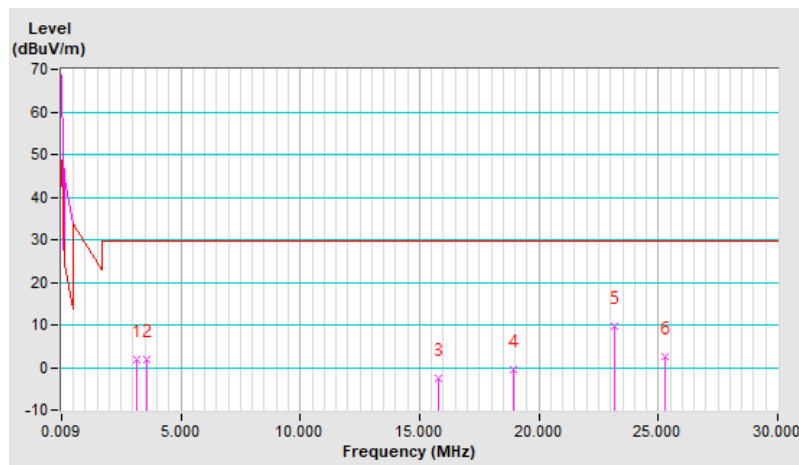


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	-2.10 QP	29.50 QP	-31.60	1.00	343	18.50	-20.60
2	3.57	-2.80 QP	29.50 QP	-32.30	1.00	211	17.70	-20.50
3	20.00	-1.00 QP	29.50 QP	-30.50	1.00	137	17.40	-18.40
4	22.12	9.10 QP	29.50 QP	-20.40	1.00	286	27.50	-18.40
5	23.18	7.30 QP	29.50 QP	-22.20	1.00	345	25.60	-18.30
6	25.29	1.40 QP	29.50 QP	-28.10	1.00	79	19.70	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

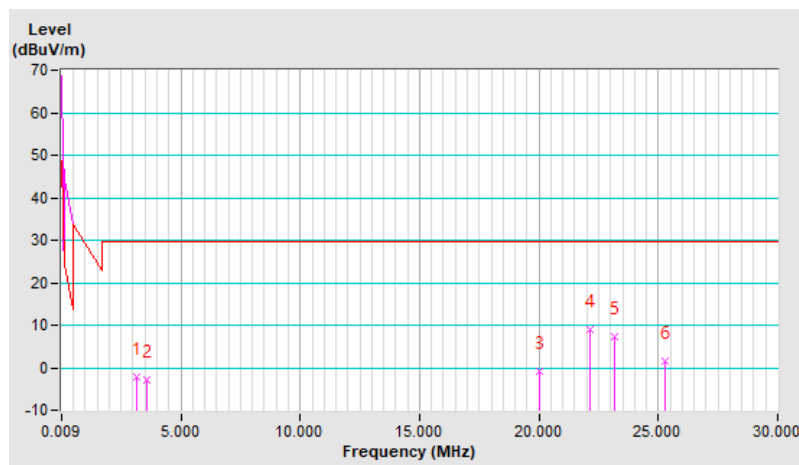


Type A

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	44.06	33.0 QP	40.0	-7.0	1.00 H	239	42.2	-9.2
2	108.73	30.8 QP	43.5	-12.7	1.99 H	6	42.7	-11.9
3	155.13	35.1 QP	43.5	-8.4	1.49 H	164	43.5	-8.4
4	190.28	33.3 QP	43.5	-10.2	1.00 H	250	44.1	-10.8
5	260.57	32.2 QP	46.0	-13.8	1.00 H	89	40.6	-8.4
6	363.21	28.8 QP	46.0	-17.2	1.00 H	101	34.1	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

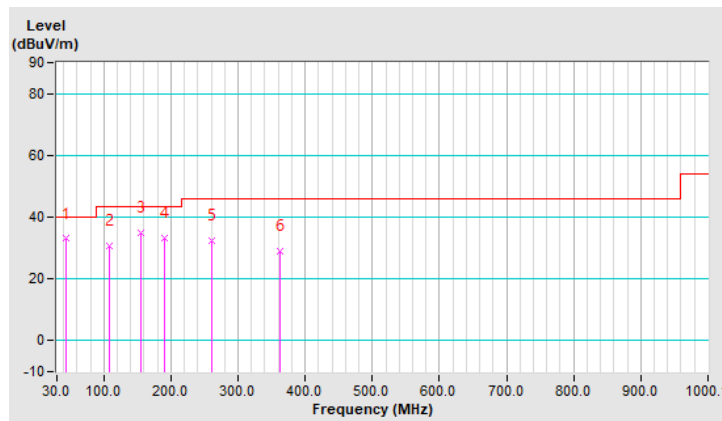




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	35.3 QP	40.0	-4.7	1.50 V	301	45.9	-10.6
2	45.47	29.4 QP	40.0	-10.6	1.00 V	132	38.5	-9.1
3	83.43	28.2 QP	40.0	-11.8	2.00 V	175	42.2	-14.0
4	107.33	31.2 QP	43.5	-12.3	1.50 V	77	43.3	-12.1
5	157.94	30.9 QP	43.5	-12.6	1.00 V	334	39.2	-8.3
6	360.40	27.7 QP	46.0	-18.3	1.00 V	183	33.1	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

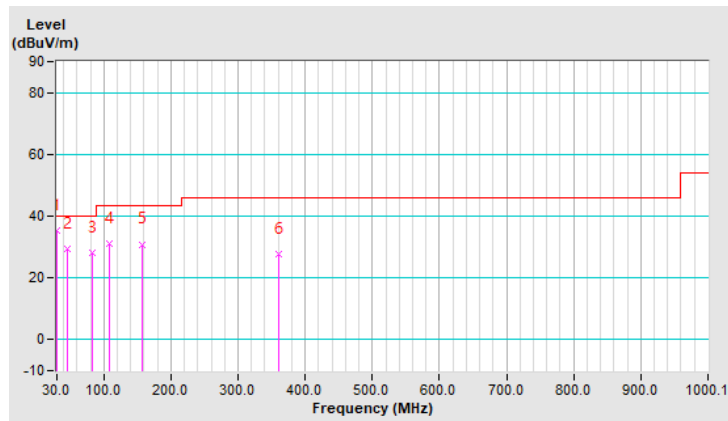


Type B

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	42.65	32.0 QP	40.0	-8.0	1.00 H	249	41.3	-9.3
2	108.73	31.5 QP	43.5	-12.0	1.00 H	279	43.4	-11.9
3	153.72	33.2 QP	43.5	-10.3	1.00 H	172	41.6	-8.4
4	188.87	31.3 QP	43.5	-12.2	1.00 H	244	42.0	-10.7
5	249.33	28.2 QP	46.0	-17.8	2.00 H	175	37.0	-8.8
6	361.80	27.5 QP	46.0	-18.5	1.50 H	70	32.9	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

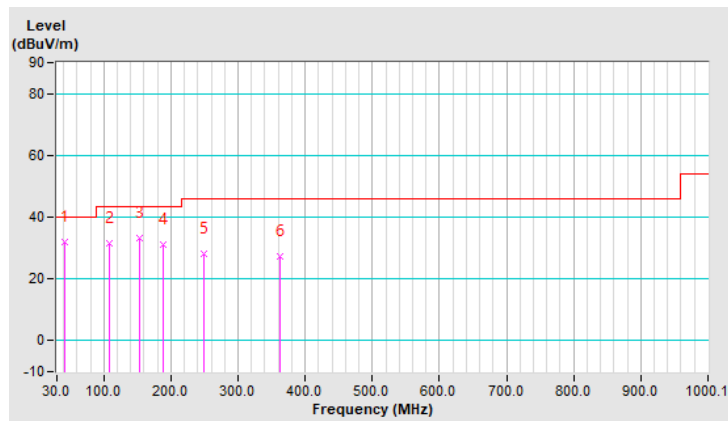


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	36.5 QP	40.0	-3.5	1.00 V	309	47.1	-10.6
2	79.21	27.9 QP	40.0	-12.1	1.00 V	205	41.0	-13.1
3	108.73	32.1 QP	43.5	-11.4	1.00 V	79	44.0	-11.9
4	156.53	30.5 QP	43.5	-13.0	1.00 V	302	38.9	-8.4
5	216.99	27.2 QP	46.0	-18.8	1.00 V	6	37.9	-10.7
6	267.60	26.3 QP	46.0	-19.7	1.00 V	78	34.1	-7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

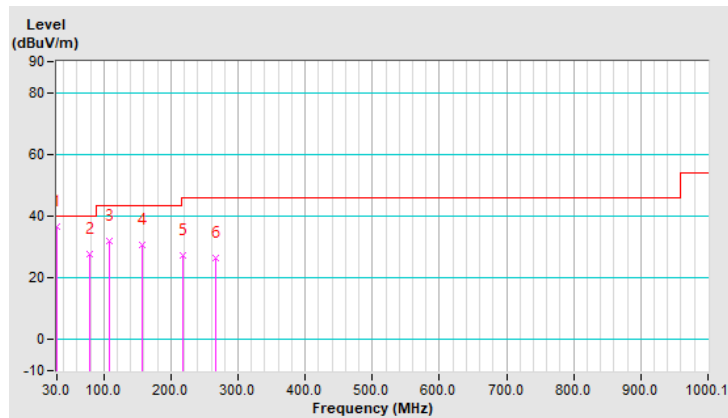


Type F

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.25	31.0 QP	40.0	-9.0	1.00 H	165	40.3	-9.3
2	108.73	31.8 QP	43.5	-11.7	1.50 H	298	43.7	-11.9
3	153.72	33.6 QP	43.5	-9.9	1.00 H	148	42.0	-8.4
4	188.87	30.4 QP	43.5	-13.1	1.00 H	238	41.1	-10.7
5	249.33	28.8 QP	46.0	-17.2	1.50 H	174	37.6	-8.8
6	364.61	27.8 QP	46.0	-18.2	1.00 H	49	33.0	-5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

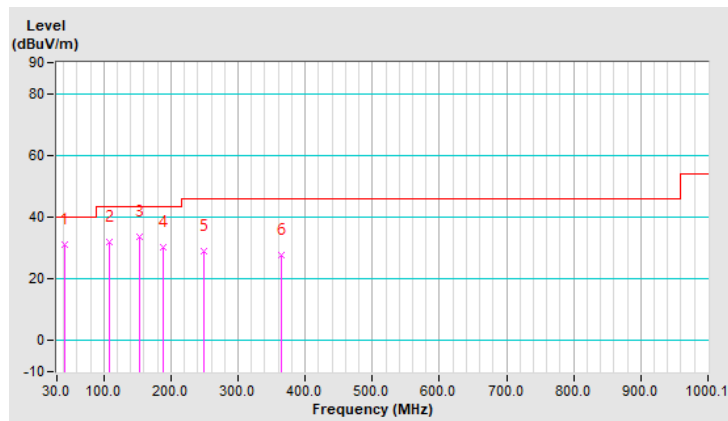


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.25	31.1 QP	40.0	-8.9	1.50 V	115	40.4	-9.3
2	108.73	32.5 QP	43.5	-11.0	1.00 V	83	44.4	-11.9
3	155.13	31.6 QP	43.5	-11.9	2.00 V	289	40.0	-8.4
4	201.52	27.0 QP	43.5	-16.5	1.00 V	83	38.3	-11.3
5	266.20	26.7 QP	46.0	-19.3	2.00 V	25	34.6	-7.9
6	361.80	25.0 QP	46.0	-21.0	1.00 V	148	30.4	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

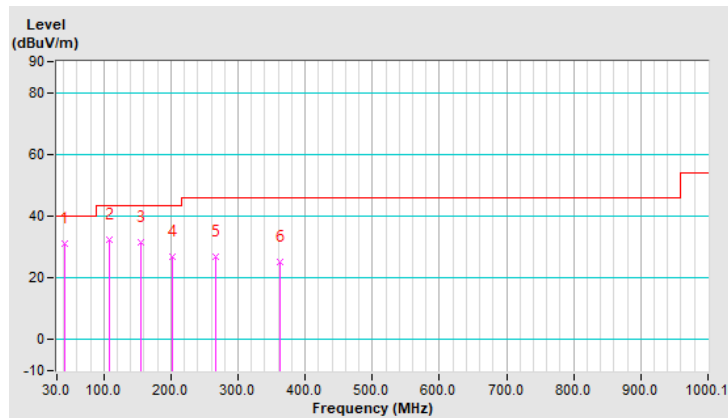


Type V

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	42.65	30.9 QP	40.0	-9.1	1.00 H	240	40.2	-9.3
2	107.33	29.6 QP	43.5	-13.9	1.00 H	282	41.7	-12.1
3	153.72	32.8 QP	43.5	-10.7	1.50 H	152	41.2	-8.4
4	198.71	31.1 QP	43.5	-12.4	1.50 H	256	42.4	-11.3
5	246.52	27.8 QP	46.0	-18.2	1.00 H	116	36.7	-8.9
6	357.58	27.2 QP	46.0	-18.8	1.00 H	54	32.7	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

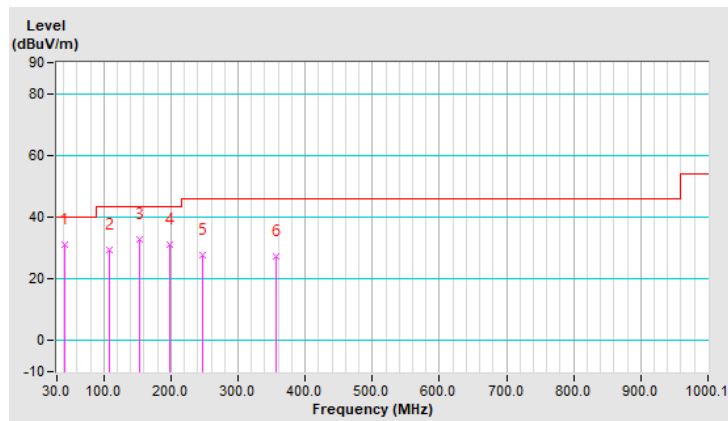


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	35.5 QP	40.0	-4.5	1.00 V	314	46.1	-10.6
2	44.06	32.0 QP	40.0	-8.0	1.00 V	177	41.2	-9.2
3	108.73	30.3 QP	43.5	-13.2	1.00 V	141	42.2	-11.9
4	155.13	32.1 QP	43.5	-11.4	1.00 V	265	40.5	-8.4
5	200.12	27.6 QP	43.5	-15.9	1.00 V	79	38.9	-11.3
6	263.39	28.5 QP	46.0	-17.5	1.00 V	28	36.6	-8.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

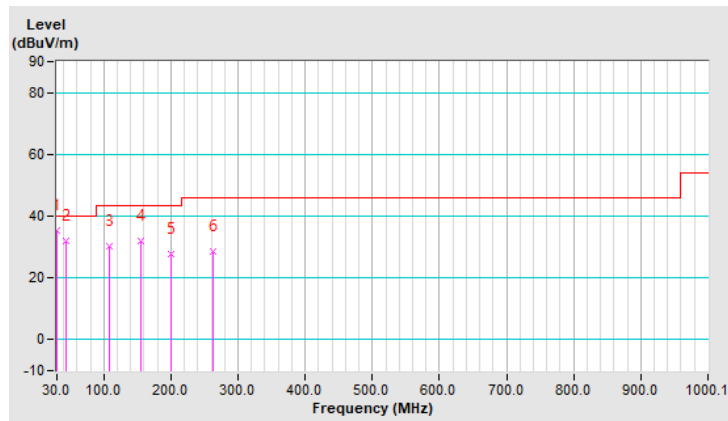

Mode C1  
X-plane  
Type A

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	24.5 QP	84.0 QP	-59.5	1.00	151	43.2	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

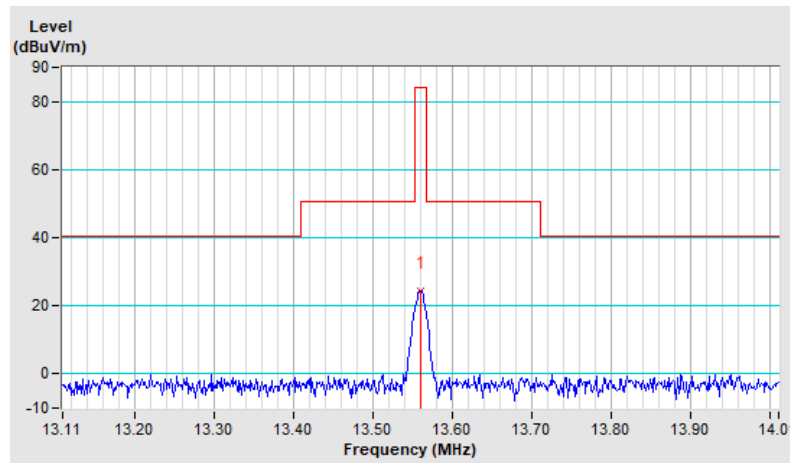



EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	21.7 QP	84.0 QP	-62.3	1.00	196	40.4	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

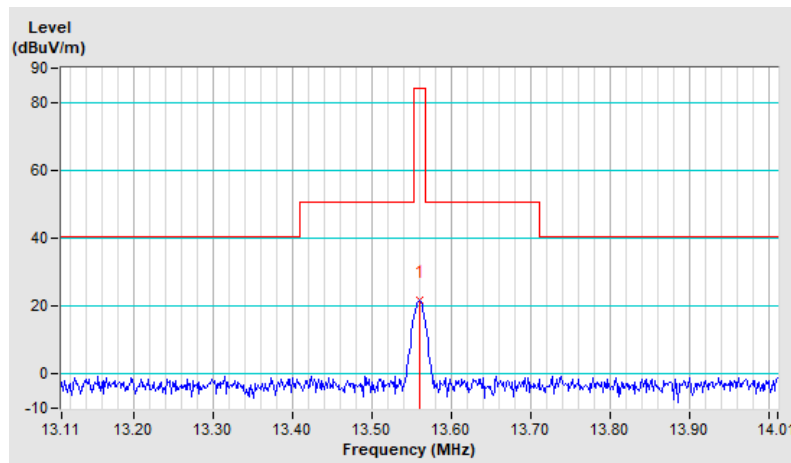

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	29.4 QP	84.0 QP	-54.6	1.00	137	48.1	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

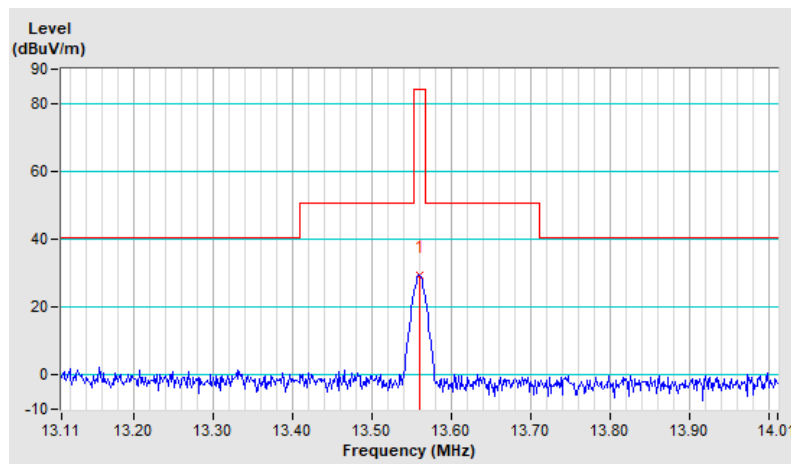

Type B

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	24.6 QP	84.0 QP	-59.4	1.00	149	43.3	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

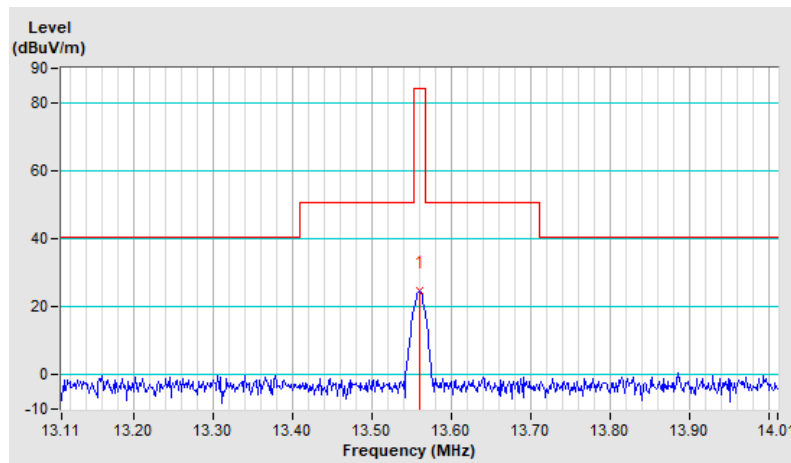

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	21.5 QP	84.0 QP	-62.5	1.00	199	40.2	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

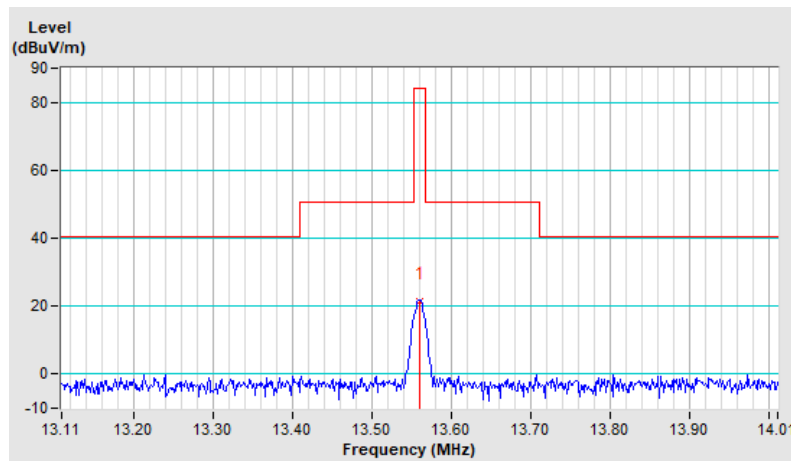

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	29.3 QP	84.0 QP	-54.7	1.00	145	48.0	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

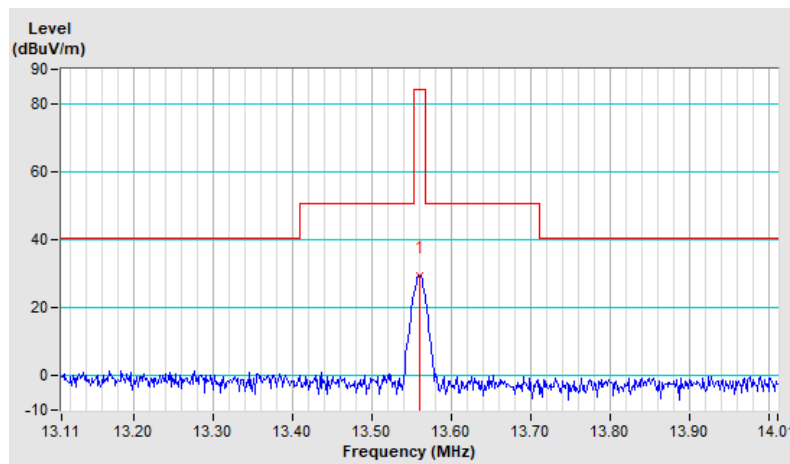

Type F

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	24.6 QP	84.0 QP	-59.4	1.00	153	43.3	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

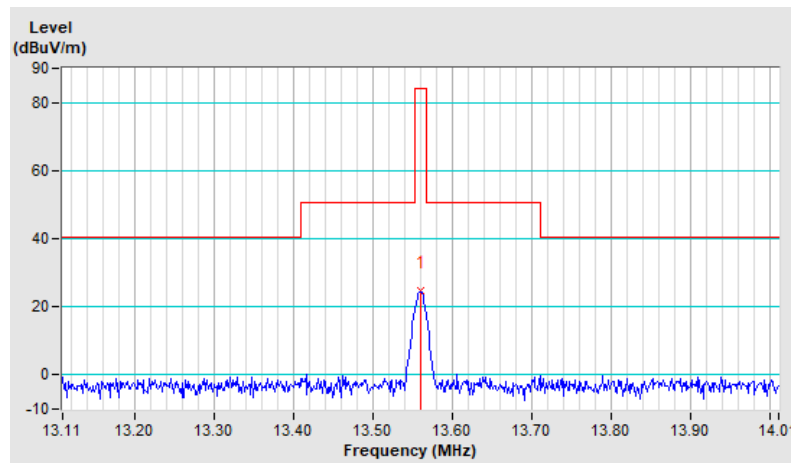

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	21.4 QP	84.0 QP	-62.6	1.00	200	40.1	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

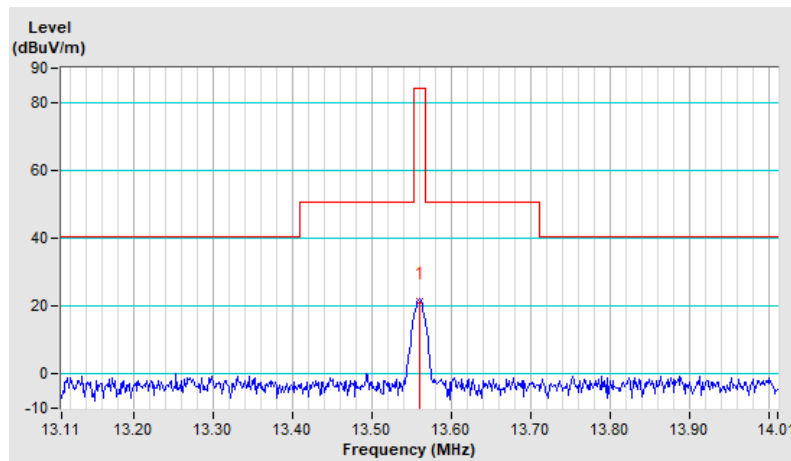

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	29.2 QP	84.0 QP	-54.8	1.00	150	47.9	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

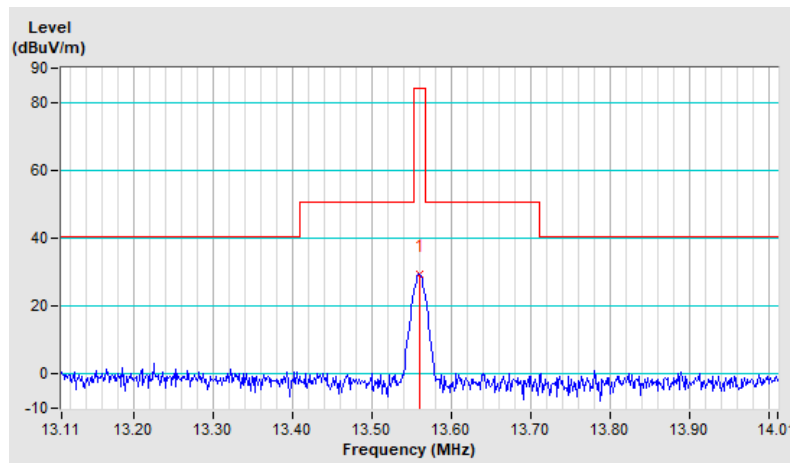



Type V

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	24.6 QP	84.0 QP	-59.4	1.00	151	43.3	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

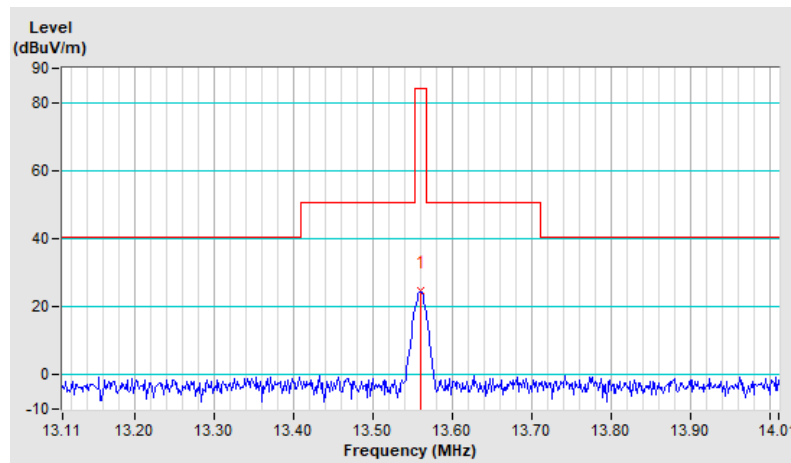

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	21.5 QP	84.0 QP	-62.5	1.00	196	40.2	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

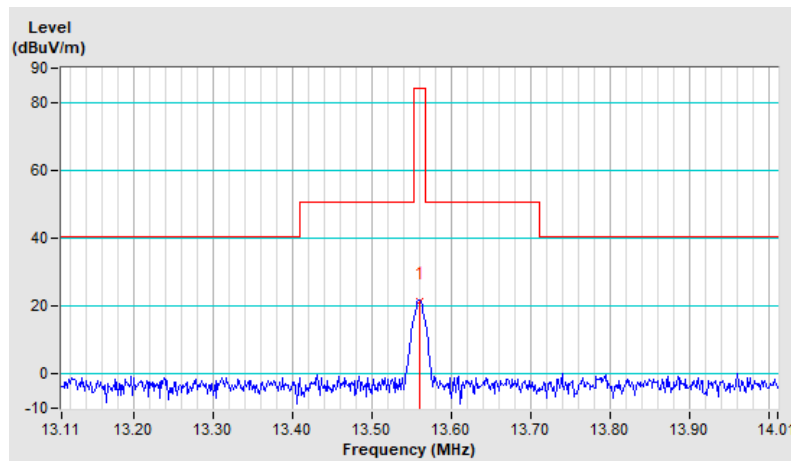

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	29.3 QP	84.0 QP	-54.7	1.00	139	48.0	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

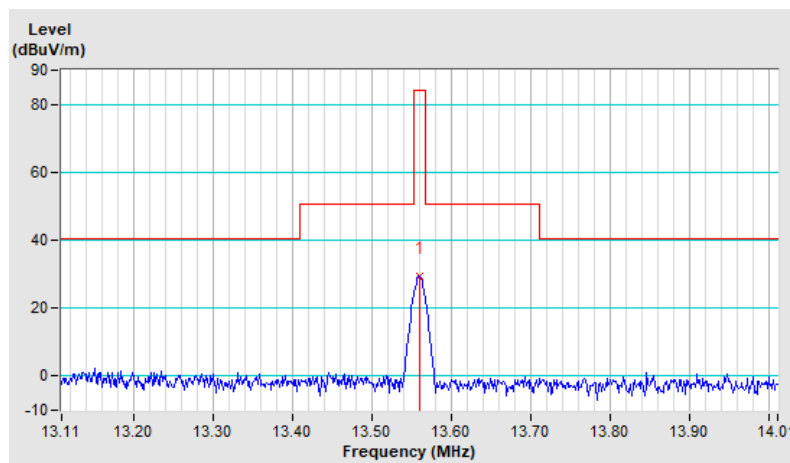


Type A

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2.36	-4.40 QP	29.50 QP	-33.90	1.00	358	16.10	-20.50
2	5.78	-7.60 QP	29.50 QP	-37.10	1.00	127	12.10	-19.70
3	11.59	-5.90 QP	29.50 QP	-35.40	1.00	317	12.80	-18.70
4	15.77	-4.40 QP	29.50 QP	-33.90	1.00	280	14.20	-18.60
5	22.12	8.90 QP	29.50 QP	-20.60	1.00	206	27.30	-18.40
6	23.18	6.10 QP	29.50 QP	-23.40	1.00	269	24.40	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

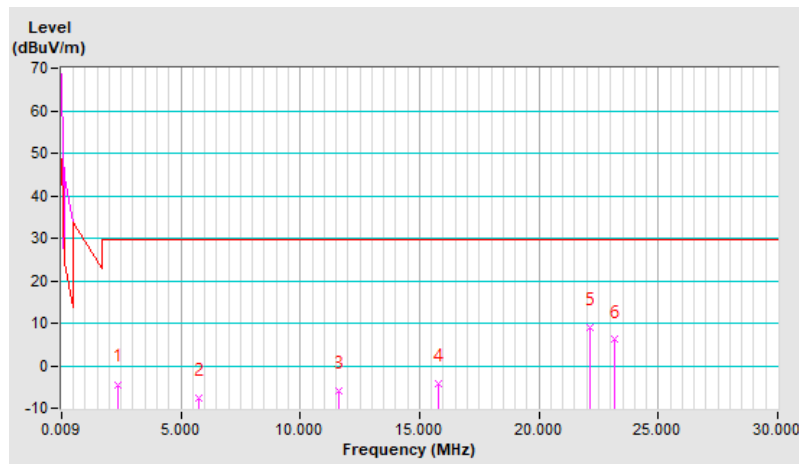


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.57	-2.00 QP	29.50 QP	-31.50	1.00	214	18.50	-20.50
2	6.69	-8.00 QP	29.50 QP	-37.50	1.00	218	11.50	-19.50
3	11.83	-4.90 QP	29.50 QP	-34.40	1.00	231	13.80	-18.70
4	17.02	-7.50 QP	29.50 QP	-37.00	1.00	226	11.00	-18.50
5	22.12	-0.70 QP	29.50 QP	-30.20	1.00	269	17.70	-18.40
6	26.01	-7.80 QP	29.50 QP	-37.30	1.00	206	10.50	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

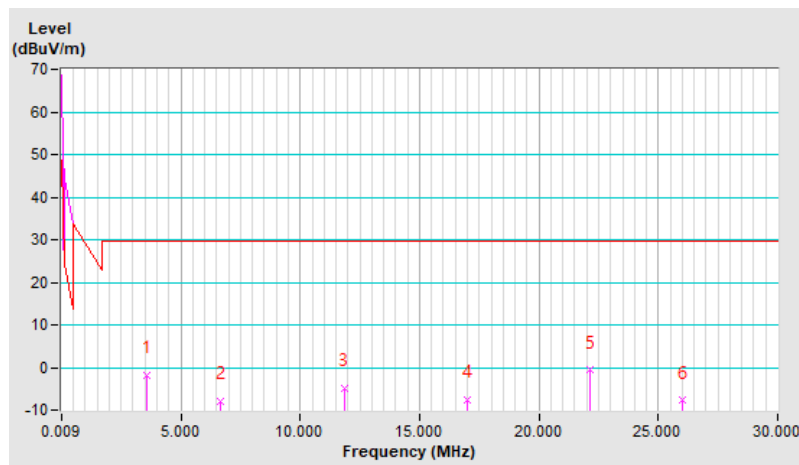


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	-7.50 QP	29.50 QP	-37.00	1.00	32	13.10	-20.60
2	8.28	-8.10 QP	29.50 QP	-37.60	1.00	128	11.10	-19.20
3	12.75	-7.20 QP	29.50 QP	-36.70	1.00	87	11.50	-18.70
4	17.50	-7.70 QP	29.50 QP	-37.20	1.00	262	10.80	-18.50
5	22.12	-1.20 QP	29.50 QP	-30.70	1.00	143	17.20	-18.40
6	25.29	-4.50 QP	29.50 QP	-34.00	1.00	238	13.80	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

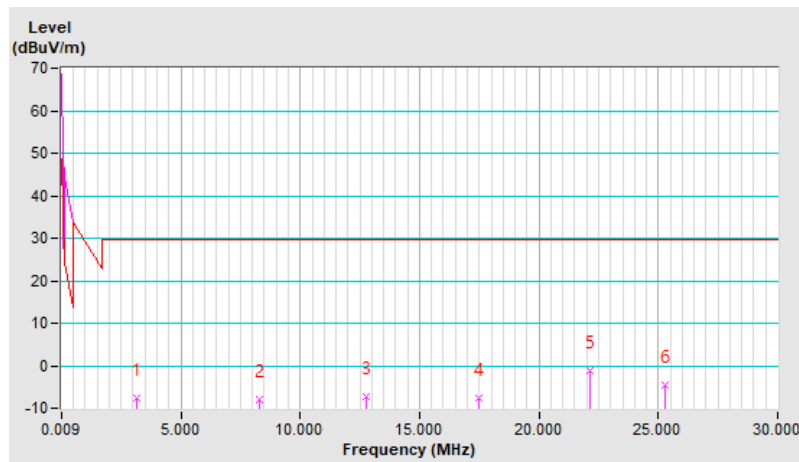


Type B

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	0.10 QP	29.50 QP	-29.40	1.00	135	20.70	-20.60
2	3.57	-2.30 QP	29.50 QP	-31.80	1.00	7	18.20	-20.50
3	15.77	-5.90 QP	29.50 QP	-35.40	1.00	178	12.70	-18.60
4	20.00	2.70 QP	29.50 QP	-26.80	1.00	20	21.10	-18.40
5	22.12	10.20 QP	29.50 QP	-19.30	1.00	97	28.60	-18.40
6	23.18	7.10 QP	29.50 QP	-22.40	1.00	351	25.40	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

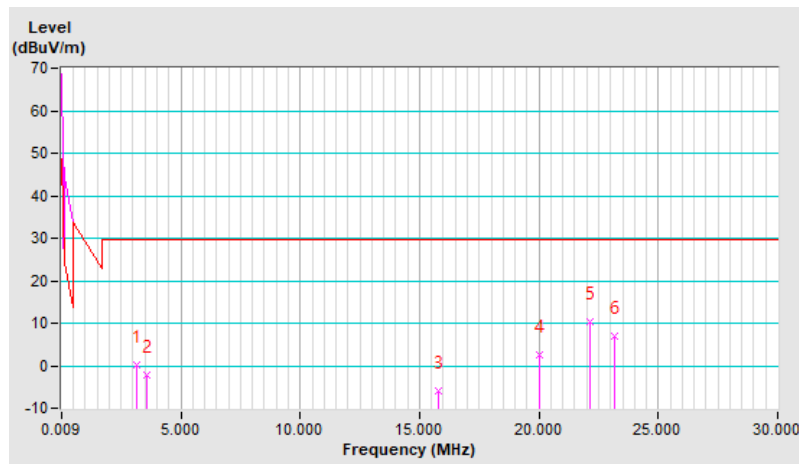


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.57	-1.80 QP	29.50 QP	-31.30	1.00	53	18.70	-20.50
2	7.94	-7.60 QP	29.50 QP	-37.10	1.00	357	11.70	-19.30
3	10.92	-5.40 QP	29.50 QP	-34.90	1.00	348	13.40	-18.80
4	18.75	-6.20 QP	29.50 QP	-35.70	1.00	119	12.20	-18.40
5	21.11	-6.80 QP	29.50 QP	-36.30	1.00	3	11.60	-18.40
6	23.18	-4.80 QP	29.50 QP	-34.30	1.00	129	13.50	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

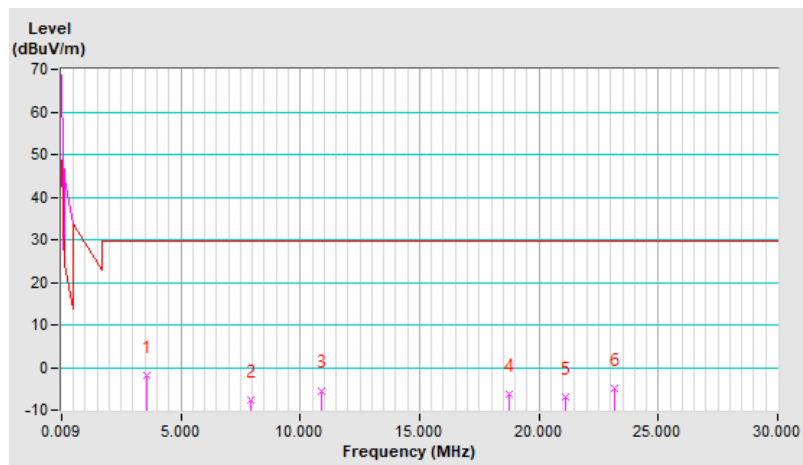




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.57	-6.10 QP	29.50 QP	-35.60	1.00	22	14.40	-20.50
2	12.31	-6.50 QP	29.50 QP	-36.00	1.00	6	12.20	-18.70
3	18.99	-6.10 QP	29.50 QP	-35.60	1.00	6	12.30	-18.40
4	22.12	0.40 QP	29.50 QP	-29.10	1.00	327	18.80	-18.40
5	23.18	-1.70 QP	29.50 QP	-31.20	1.00	296	16.60	-18.30
6	25.29	-1.10 QP	29.50 QP	-30.60	1.00	260	17.20	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

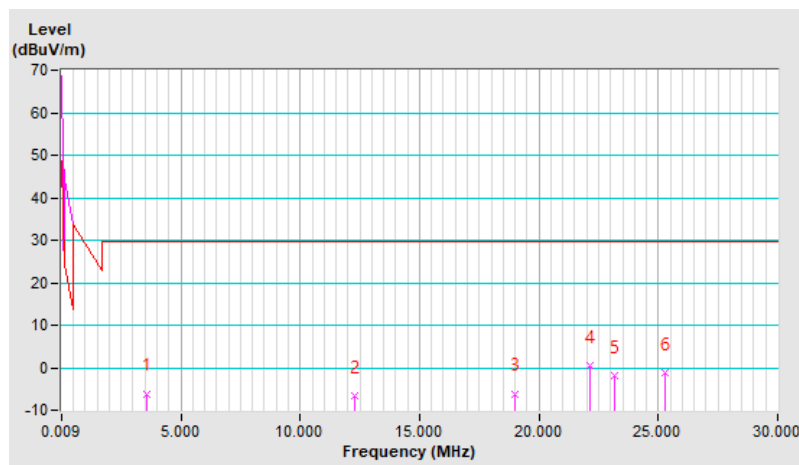


Type F

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	-0.20 QP	29.50 QP	-29.70	1.00	159	20.40	-20.60
2	10.63	-5.70 QP	29.50 QP	-35.20	1.00	81	13.10	-18.80
3	15.77	-5.10 QP	29.50 QP	-34.60	1.00	26	13.50	-18.60
4	21.06	-0.30 QP	29.50 QP	-29.80	1.00	306	18.10	-18.40
5	22.12	6.30 QP	29.50 QP	-23.20	1.00	138	24.70	-18.40
6	23.18	5.60 QP	29.50 QP	-23.90	1.00	319	23.90	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

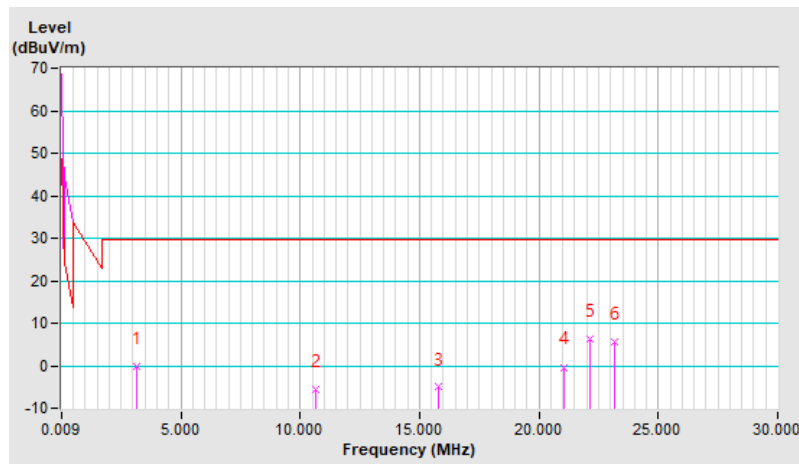


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.57	-2.70 QP	29.50 QP	-32.20	1.00	6	17.80	-20.50
2	6.11	-8.00 QP	29.50 QP	-37.50	1.00	110	11.70	-19.70
3	10.29	-7.00 QP	29.50 QP	-36.50	1.00	244	11.80	-18.80
4	20.00	-4.20 QP	29.50 QP	-33.70	1.00	206	14.20	-18.40
5	22.12	0.40 QP	29.50 QP	-29.10	1.00	350	18.80	-18.40
6	23.18	-2.50 QP	29.50 QP	-32.00	1.00	146	15.80	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

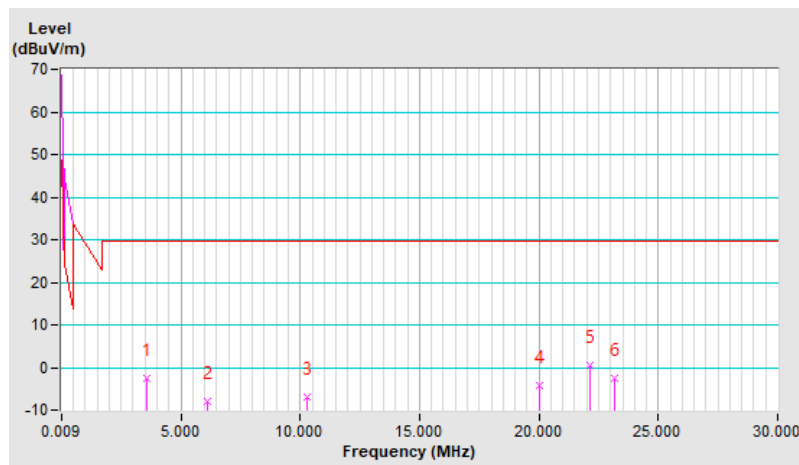


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4.38	-8.40 QP	29.50 QP	-37.90	1.00	64	11.70	-20.10
2	6.31	-7.00 QP	29.50 QP	-36.50	1.00	354	12.60	-19.60
3	10.15	-7.70 QP	29.50 QP	-37.20	1.00	208	11.10	-18.80
4	22.12	0.80 QP	29.50 QP	-28.70	1.00	61	19.20	-18.40
5	23.18	1.10 QP	29.50 QP	-28.40	1.00	292	19.40	-18.30
6	25.29	-3.10 QP	29.50 QP	-32.60	1.00	178	15.20	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

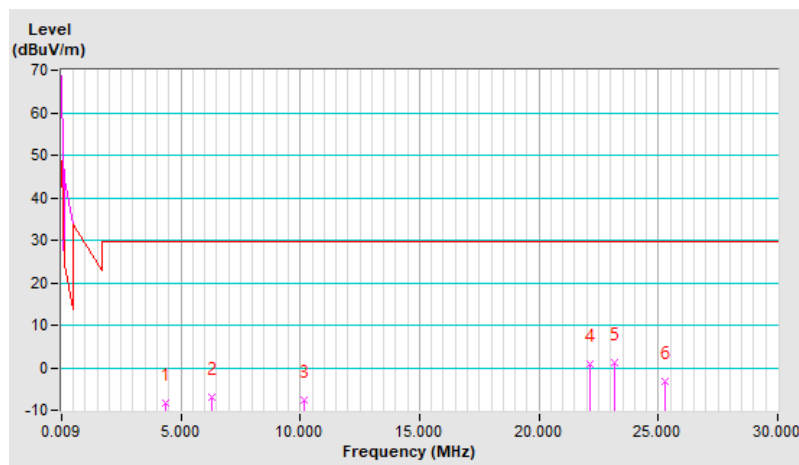


Type V

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	-1.80 QP	29.50 QP	-31.30	1.00	316	18.80	-20.60
2	3.57	-4.50 QP	29.50 QP	-34.00	1.00	323	16.00	-20.50
3	11.26	-6.60 QP	29.50 QP	-36.10	1.00	293	12.10	-18.70
4	15.44	-7.00 QP	29.50 QP	-36.50	1.00	45	11.60	-18.60
5	22.12	3.30 QP	29.50 QP	-26.20	1.00	79	21.70	-18.40
6	23.18	7.30 QP	29.50 QP	-22.20	1.00	196	25.60	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

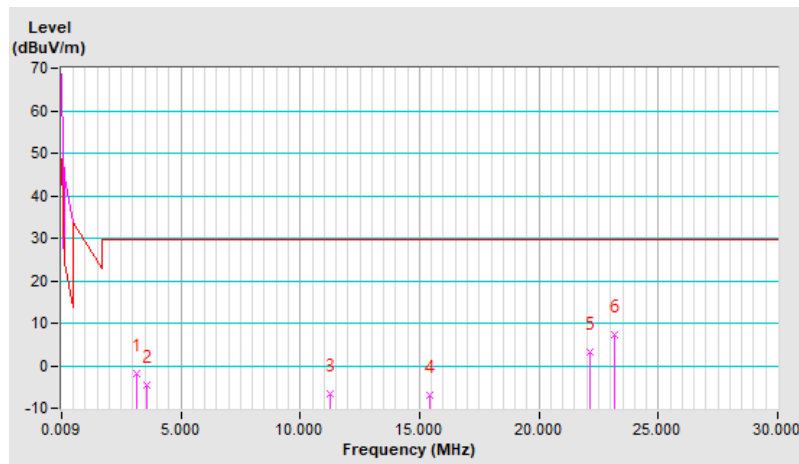


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.57	-1.50 QP	29.50 QP	-31.00	1.00	307	19.00	-20.50
2	8.52	-7.80 QP	29.50 QP	-37.30	1.00	199	11.30	-19.10
3	11.06	-6.30 QP	29.50 QP	-35.80	1.00	172	12.50	-18.80
4	17.65	-6.70 QP	29.50 QP	-36.20	1.00	295	11.80	-18.50
5	22.12	-1.20 QP	29.50 QP	-30.70	1.00	43	17.20	-18.40
6	25.29	-5.50 QP	29.50 QP	-35.00	1.00	247	12.80	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

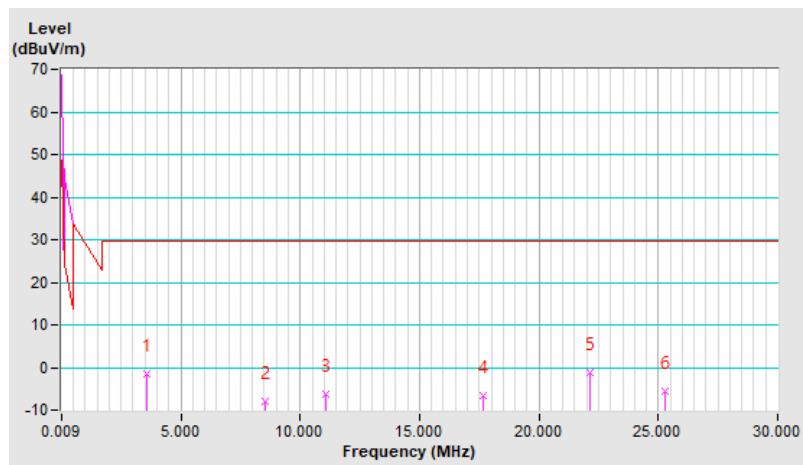


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4.96	-7.70 QP	29.50 QP	-37.20	1.00	306	12.20	-19.90
2	8.04	-7.80 QP	29.50 QP	-37.30	1.00	22	11.40	-19.20
3	16.35	-7.70 QP	29.50 QP	-37.20	1.00	213	10.80	-18.50
4	20.00	-5.40 QP	29.50 QP	-34.90	1.00	65	13.00	-18.40
5	23.18	-0.80 QP	29.50 QP	-30.30	1.00	102	17.50	-18.30
6	25.29	-1.80 QP	29.50 QP	-31.30	1.00	333	16.50	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

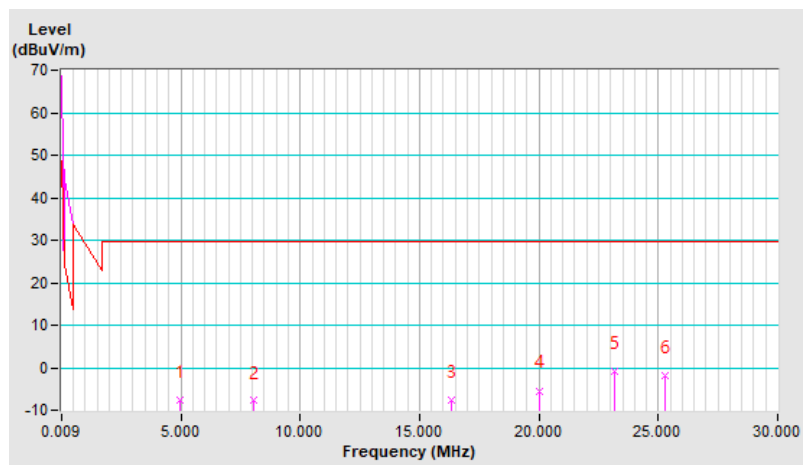


Type A

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.62	29.7 QP	40.0	-10.3	1.50 H	161	39.9	-10.2
2	46.87	30.2 QP	40.0	-9.8	1.50 H	239	39.4	-9.2
3	110.14	29.9 QP	43.5	-13.6	1.50 H	277	41.7	-11.8
4	157.94	34.9 QP	43.5	-8.6	1.99 H	119	43.2	-8.3
5	195.90	32.2 QP	43.5	-11.3	1.50 H	262	43.4	-11.2
6	274.63	32.2 QP	46.0	-13.8	1.00 H	165	39.7	-7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

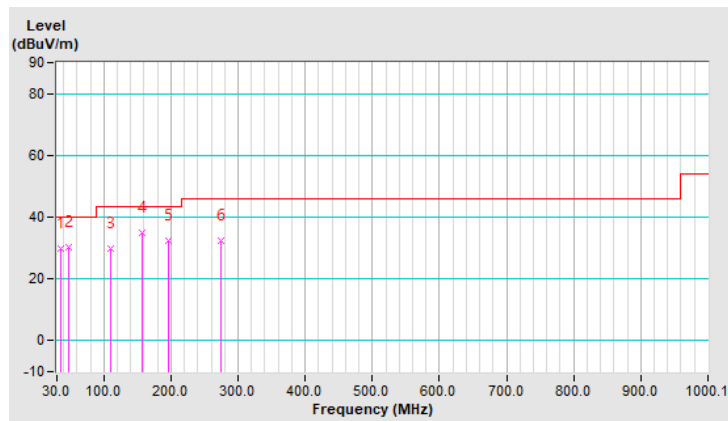




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	49.68	31.3 QP	40.0	-8.7	1.00 V	67	40.4	-9.1
2	58.12	30.8 QP	40.0	-9.2	1.00 V	339	40.1	-9.3
3	79.21	28.1 QP	40.0	-11.9	1.00 V	267	41.2	-13.1
4	107.33	29.4 QP	43.5	-14.1	1.00 V	85	41.5	-12.1
5	156.53	30.4 QP	43.5	-13.1	1.00 V	345	38.8	-8.4
6	280.26	28.2 QP	46.0	-17.8	1.00 V	50	35.4	-7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

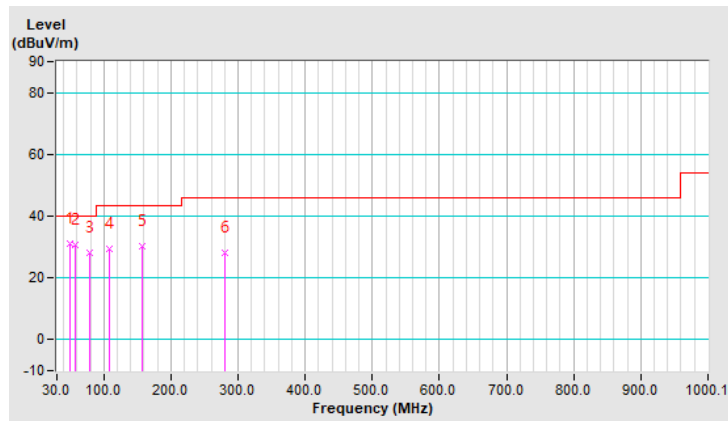


Type B

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.28	32.2 QP	40.0	-7.8	1.00 H	265	41.2	-9.0
2	108.73	30.6 QP	43.5	-12.9	1.50 H	284	42.5	-11.9
3	157.94	32.0 QP	43.5	-11.5	1.50 H	128	40.3	-8.3
4	194.50	31.7 QP	43.5	-11.8	1.50 H	251	42.8	-11.1
5	281.66	31.9 QP	46.0	-14.1	1.50 H	163	39.1	-7.2
6	531.92	27.8 QP	46.0	-18.2	2.00 H	95	29.4	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

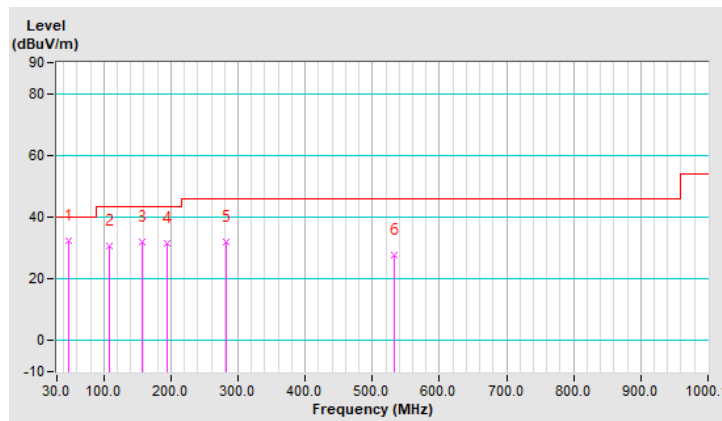


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	49.68	30.7 QP	40.0	-9.3	1.00 V	194	39.8	-9.1
2	80.61	25.6 QP	40.0	-14.4	1.50 V	191	39.1	-13.5
3	108.73	29.6 QP	43.5	-13.9	1.50 V	194	41.5	-11.9
4	157.94	27.1 QP	43.5	-16.4	1.00 V	273	35.4	-8.3
5	191.68	26.5 QP	43.5	-17.0	1.50 V	150	37.4	-10.9
6	277.45	26.9 QP	46.0	-19.1	1.00 V	19	34.3	-7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

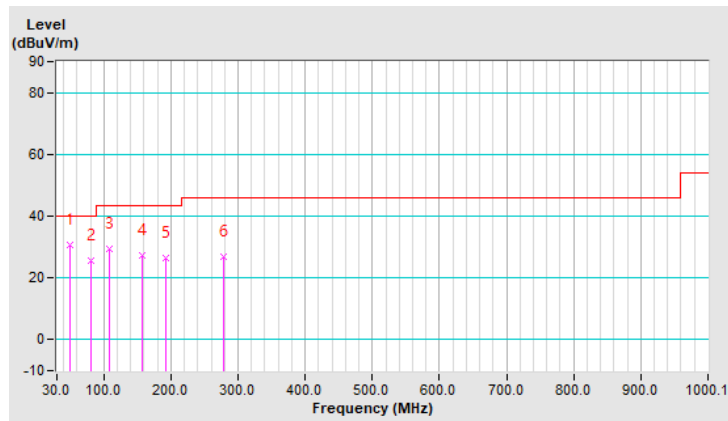


Type F

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.28	31.6 QP	40.0	-8.4	1.50 H	265	40.6	-9.0
2	108.73	32.0 QP	43.5	-11.5	1.50 H	291	43.9	-11.9
3	157.94	32.9 QP	43.5	-10.6	1.50 H	132	41.2	-8.3
4	193.09	31.2 QP	43.5	-12.3	1.00 H	277	42.3	-11.1
5	278.85	31.6 QP	46.0	-14.4	1.50 H	179	38.8	-7.2
6	527.70	26.4 QP	46.0	-19.6	1.00 H	9	28.0	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

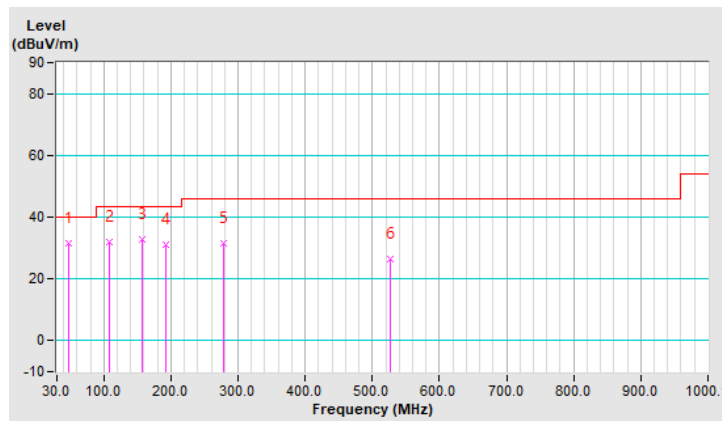


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	49.68	31.8 QP	40.0	-8.2	1.00 V	341	40.9	-9.1
2	108.73	30.3 QP	43.5	-13.2	1.00 V	72	42.2	-11.9
3	157.94	29.1 QP	43.5	-14.4	1.00 V	320	37.4	-8.3
4	195.90	27.3 QP	43.5	-16.2	1.50 V	156	38.5	-11.2
5	278.85	28.0 QP	46.0	-18.0	1.00 V	51	35.2	-7.2
6	609.25	29.1 QP	46.0	-16.9	1.50 V	238	28.5	0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

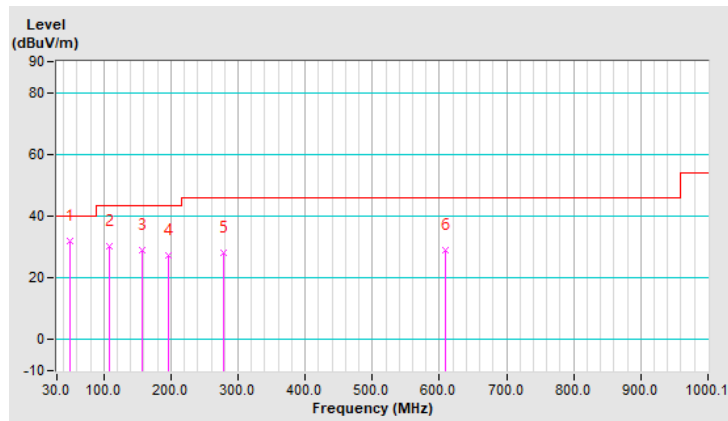


Type V

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.28	32.2 QP	40.0	-7.8	1.50 H	254	41.2	-9.0
2	108.73	31.9 QP	43.5	-11.6	1.50 H	308	43.8	-11.9
3	157.94	32.6 QP	43.5	-10.9	1.50 H	121	40.9	-8.3
4	191.68	31.7 QP	43.5	-11.8	2.00 H	232	42.6	-10.9
5	278.85	31.6 QP	46.0	-14.4	1.00 H	182	38.8	-7.2
6	676.73	30.0 QP	46.0	-16.0	1.50 H	109	28.4	1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

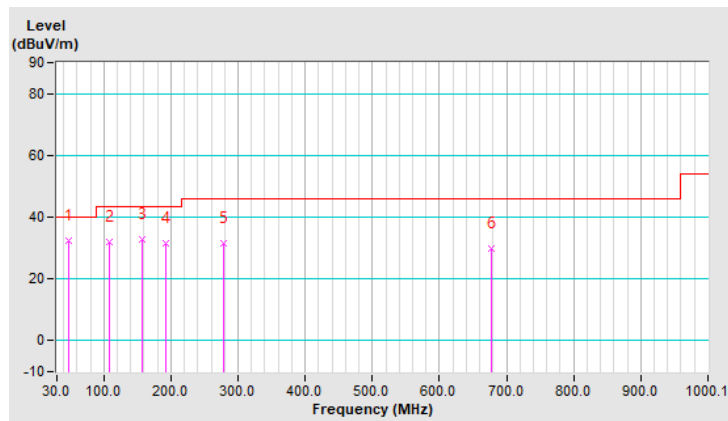


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.47	30.8 QP	40.0	-9.2	1.00 V	114	39.9	-9.1
2	59.52	31.0 QP	40.0	-9.0	1.00 V	16	40.4	-9.4
3	108.73	31.4 QP	43.5	-12.1	1.50 V	212	43.3	-11.9
4	157.94	26.5 QP	43.5	-17.0	1.50 V	231	34.8	-8.3
5	194.50	26.7 QP	43.5	-16.8	1.50 V	220	37.8	-11.1
6	276.04	26.2 QP	46.0	-19.8	1.00 V	25	33.6	-7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

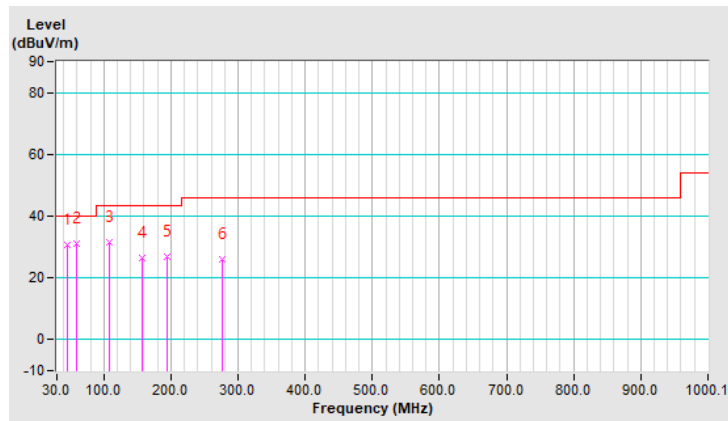

**Y-plane**  
Type A

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	33.7 QP	84.0 QP	-50.3	1.00	160	52.4	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

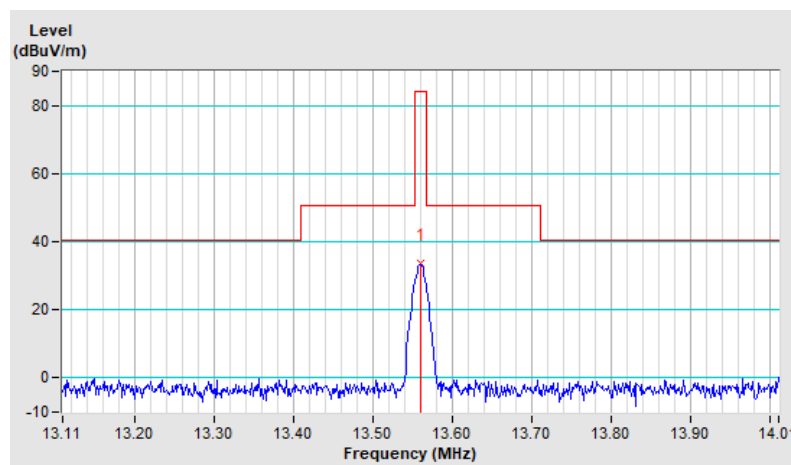



EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	31.1 QP	84.0 QP	-52.9	1.00	80	49.8	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

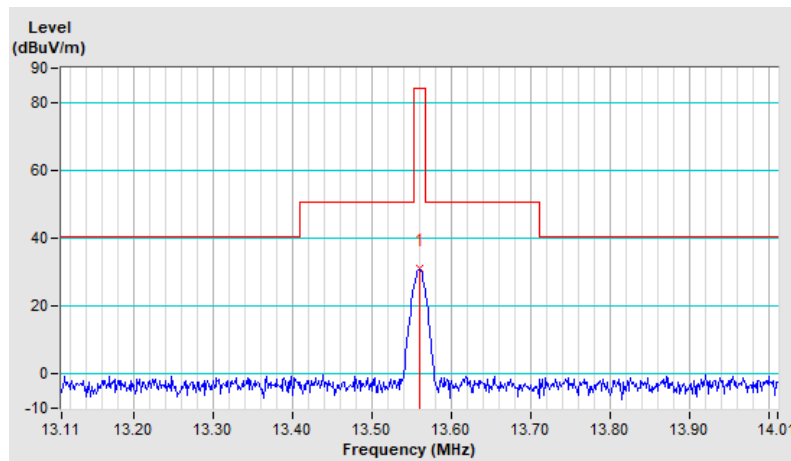

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	25.8 QP	84.0 QP	-58.2	1.00	172	44.5	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

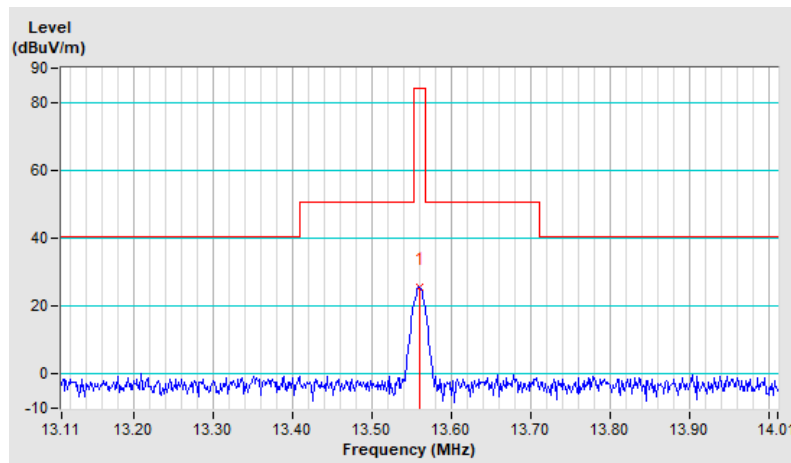

Type B

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	33.6 QP	84.0 QP	-50.4	1.00	163	52.3	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

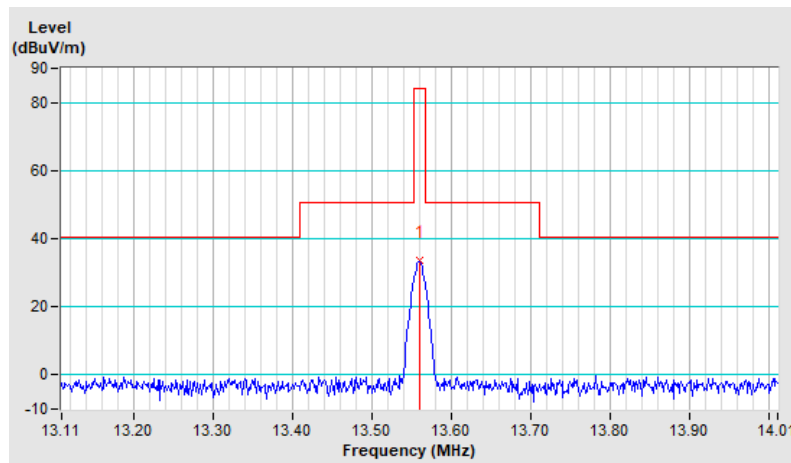

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	30.9 QP	84.0 QP	-53.1	1.00	83	49.6	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

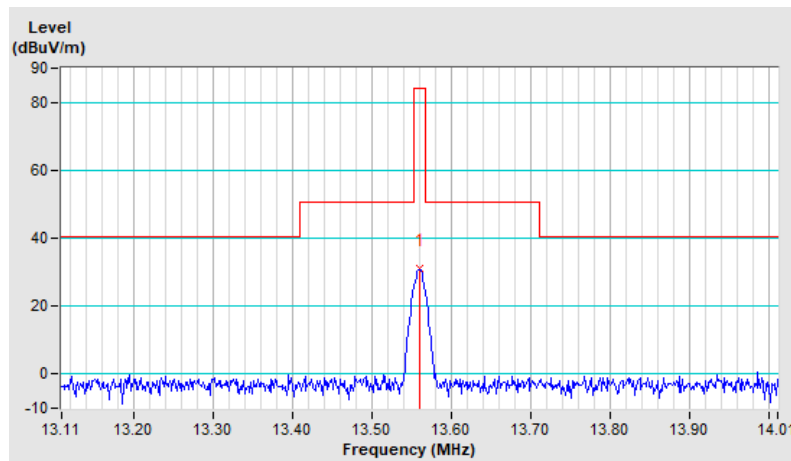

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	26.0 QP	84.0 QP	-58.0	1.00	175	44.7	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

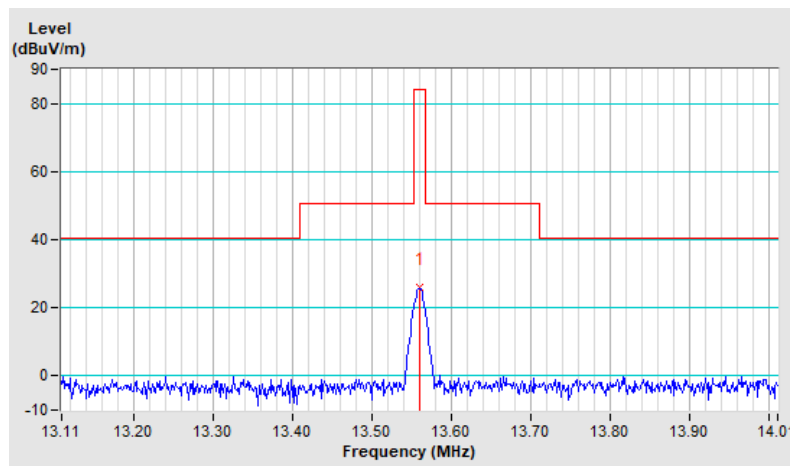

Type F

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	33.7 QP	84.0 QP	-50.3	1.00	157	52.4	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

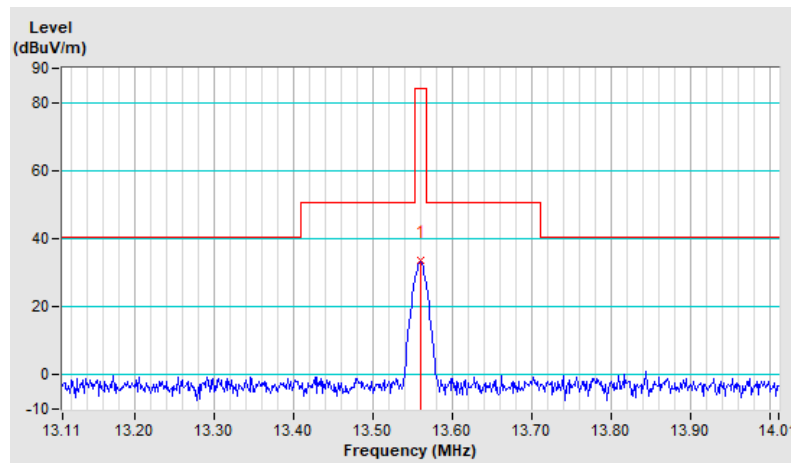

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	31.2 QP	84.0 QP	-52.8	1.00	85	49.9	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

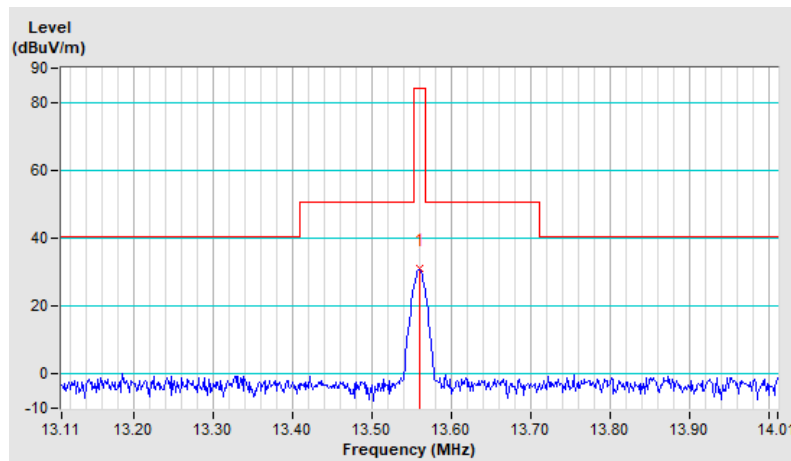

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	25.9 QP	84.0 QP	-58.1	1.00	177	44.6	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

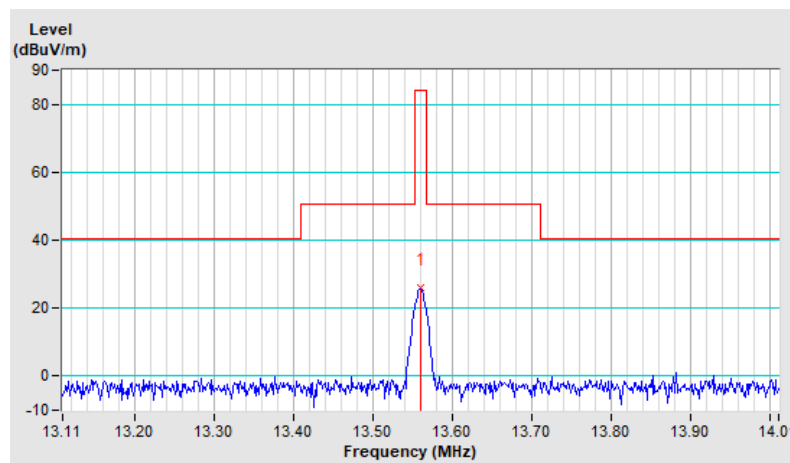



Type V

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	33.5 QP	84.0 QP	-50.5	1.00	162	52.2	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

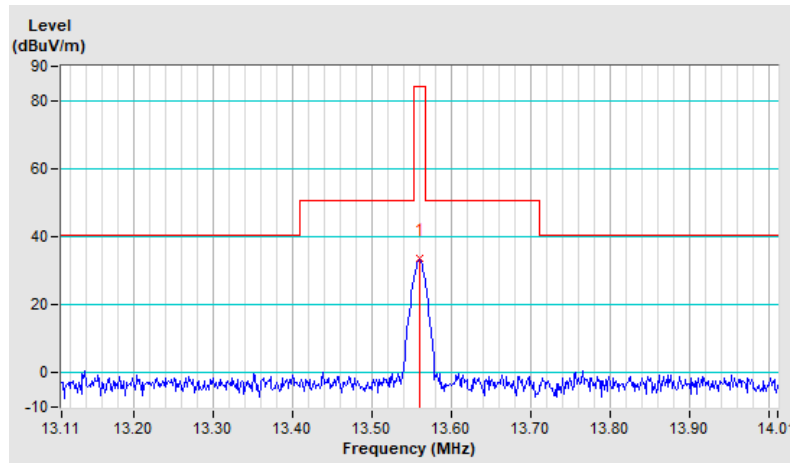

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	31.0 QP	84.0 QP	-53.0	1.00	88	49.7	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

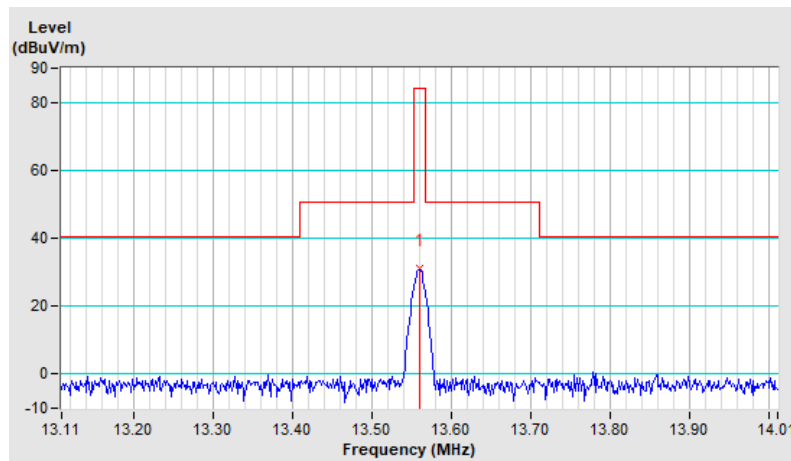

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	25.8 QP	84.0 QP	-58.2	1.00	172	44.5	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

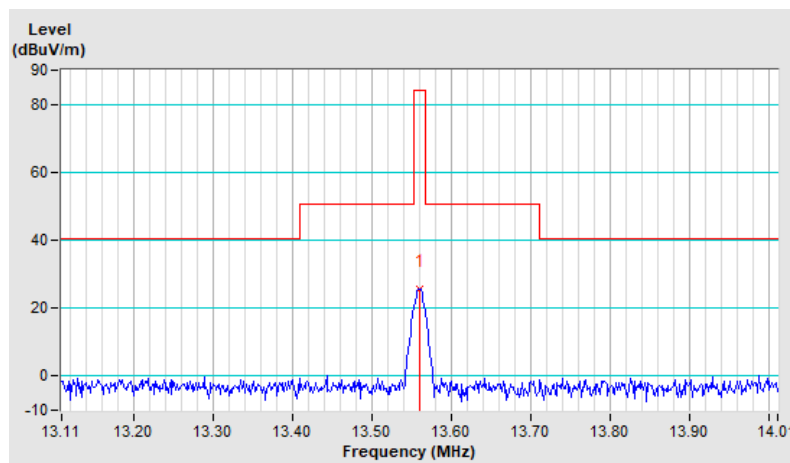


Type A

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	-1.50 QP	29.50 QP	-31.00	1.00	290	19.10	-20.60
2	15.77	-3.60 QP	29.50 QP	-33.10	1.00	189	15.00	-18.60
3	20.00	2.30 QP	29.50 QP	-27.20	1.00	71	20.70	-18.40
4	21.06	-1.40 QP	29.50 QP	-30.90	1.00	256	17.00	-18.40
5	23.18	4.00 QP	29.50 QP	-25.50	1.00	174	22.30	-18.30
6	24.23	-0.30 QP	29.50 QP	-29.80	1.00	188	18.00	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

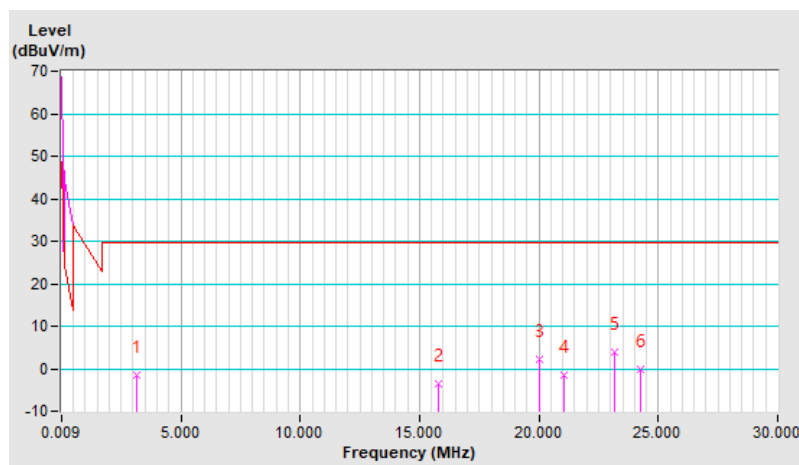


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.57	-1.70 QP	29.50 QP	-31.20	1.00	286	18.80	-20.50
2	8.47	-7.20 QP	29.50 QP	-36.70	1.00	191	11.90	-19.10
3	18.71	-7.10 QP	29.50 QP	-36.60	1.00	149	11.40	-18.50
4	22.12	-0.80 QP	29.50 QP	-30.30	1.00	44	17.60	-18.40
5	23.18	-2.90 QP	29.50 QP	-32.40	1.00	147	15.40	-18.30
6	25.34	-6.50 QP	29.50 QP	-36.00	1.00	225	11.80	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

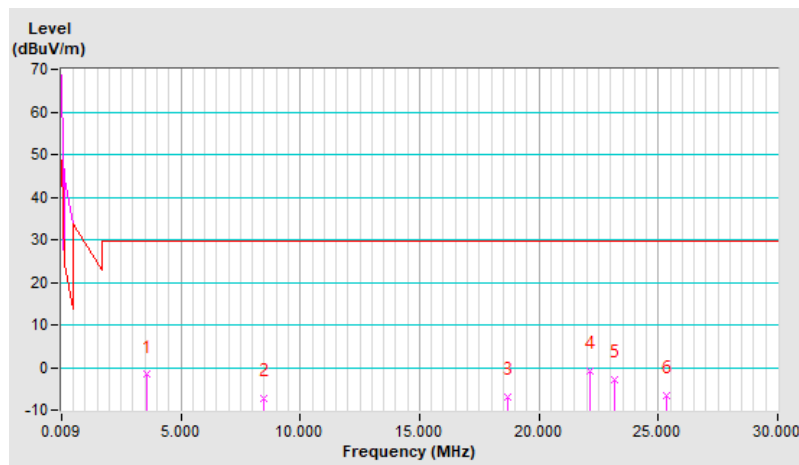


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	-5.50 QP	29.50 QP	-35.00	1.00	42	15.10	-20.60
2	12.02	-7.30 QP	29.50 QP	-36.80	1.00	200	11.40	-18.70
3	20.00	-4.40 QP	29.50 QP	-33.90	1.00	157	14.00	-18.40
4	22.12	3.40 QP	29.50 QP	-26.10	1.00	193	21.80	-18.40
5	23.18	0.60 QP	29.50 QP	-28.90	1.00	34	18.90	-18.30
6	25.29	-0.30 QP	29.50 QP	-29.80	1.00	111	18.00	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

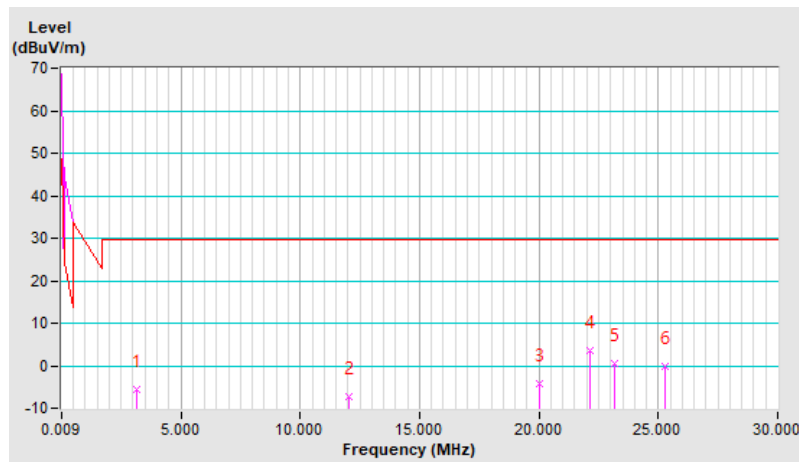


Type B

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	-2.00 QP	29.50 QP	-31.50	1.00	15	18.60	-20.60
2	14.48	-5.90 QP	29.50 QP	-35.40	1.00	352	12.70	-18.60
3	20.00	0.70 QP	29.50 QP	-28.80	1.00	115	19.10	-18.40
4	23.94	-2.80 QP	29.50 QP	-32.30	1.00	350	15.50	-18.30
5	25.29	-0.70 QP	29.50 QP	-30.20	1.00	251	17.60	-18.30
6	27.40	-2.90 QP	29.50 QP	-32.40	1.00	66	15.40	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

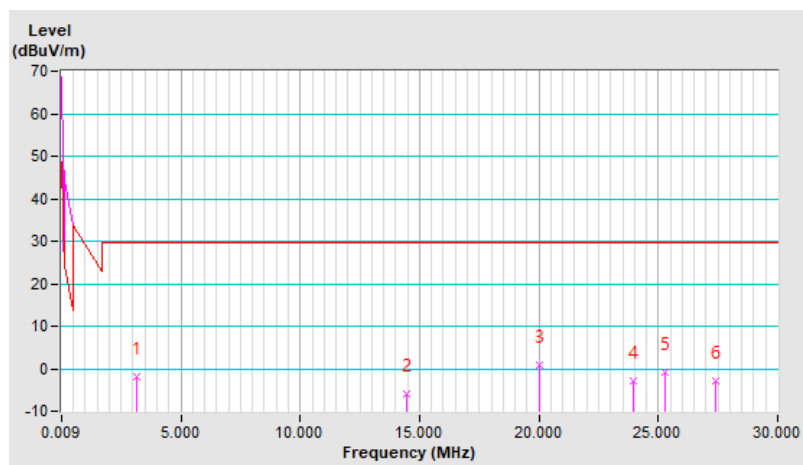


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.57	-2.30 QP	29.50 QP	-31.80	1.00	251	18.20	-20.50
2	9.33	-7.70 QP	29.50 QP	-37.20	1.00	53	11.20	-18.90
3	15.68	-6.90 QP	29.50 QP	-36.40	1.00	344	11.70	-18.60
4	18.85	-6.20 QP	29.50 QP	-35.70	1.00	33	12.20	-18.40
5	23.18	-2.90 QP	29.50 QP	-32.40	1.00	323	15.40	-18.30
6	26.35	-6.30 QP	29.50 QP	-35.80	1.00	182	12.00	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

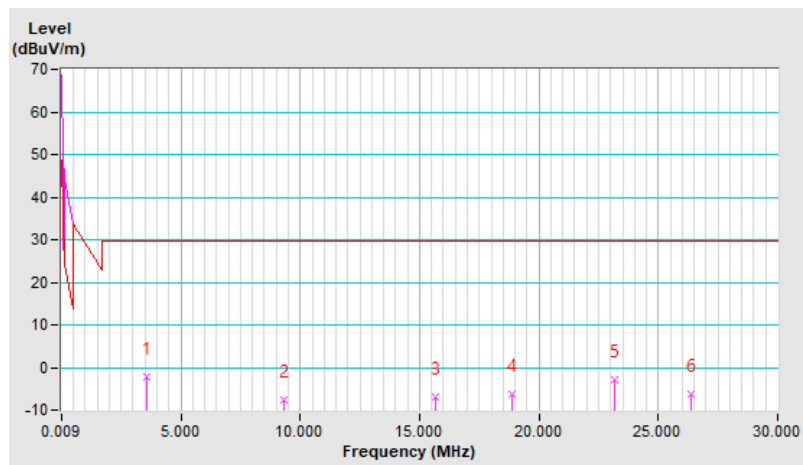




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	-6.20 QP	29.50 QP	-35.70	1.00	271	14.40	-20.60
2	8.56	-8.20 QP	29.50 QP	-37.70	1.00	6	10.90	-19.10
3	20.00	-3.40 QP	29.50 QP	-32.90	1.00	291	15.00	-18.40
4	22.12	1.60 QP	29.50 QP	-27.90	1.00	151	20.00	-18.40
5	23.18	-0.60 QP	29.50 QP	-30.10	1.00	111	17.70	-18.30
6	25.29	-1.40 QP	29.50 QP	-30.90	1.00	98	16.90	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

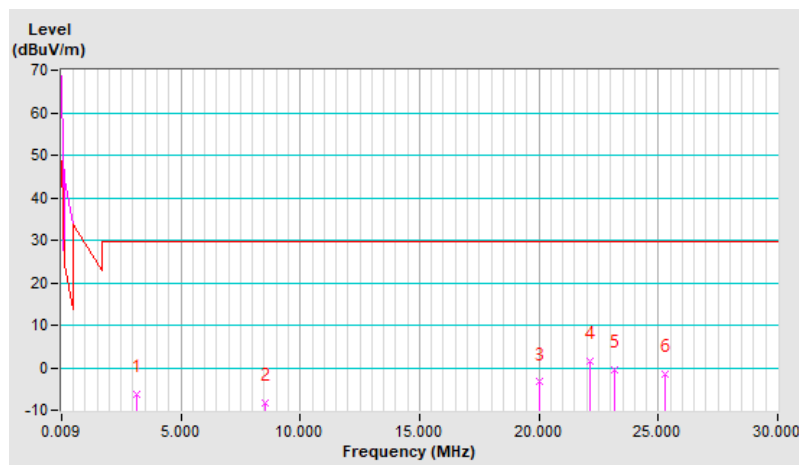


Type F

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	-0.60 QP	29.50 QP	-30.10	1.00	349	20.00	-20.60
2	15.77	-2.60 QP	29.50 QP	-32.10	1.00	262	16.00	-18.60
3	21.06	0.00 QP	29.50 QP	-29.50	1.00	198	18.40	-18.40
4	22.12	9.20 QP	29.50 QP	-20.30	1.00	333	27.60	-18.40
5	23.18	7.40 QP	29.50 QP	-22.10	1.00	13	25.70	-18.30
6	23.94	-2.50 QP	29.50 QP	-32.00	1.00	261	15.80	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

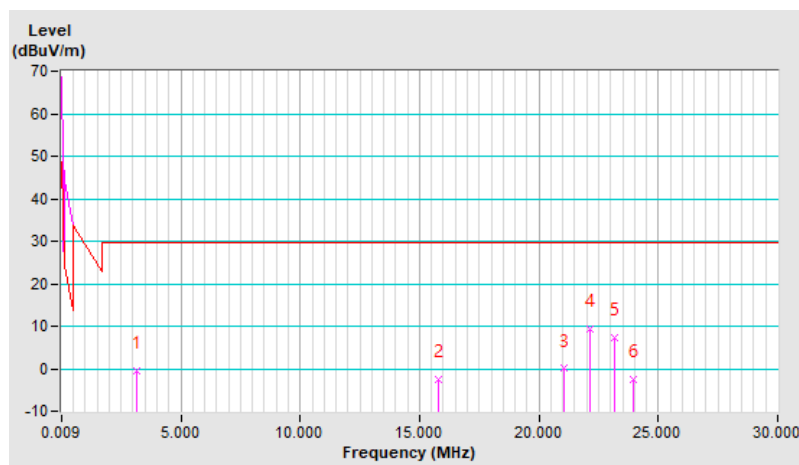


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.57	-1.90 QP	29.50 QP	-31.40	1.00	182	18.60	-20.50
2	10.82	-4.70 QP	29.50 QP	-34.20	1.00	213	14.10	-18.80
3	14.09	-5.60 QP	29.50 QP	-35.10	1.00	45	13.00	-18.60
4	22.12	-1.20 QP	29.50 QP	-30.70	1.00	211	17.20	-18.40
5	23.18	-5.30 QP	29.50 QP	-34.80	1.00	161	13.00	-18.30
6	29.81	-6.80 QP	29.50 QP	-36.30	1.00	223	11.40	-18.20

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

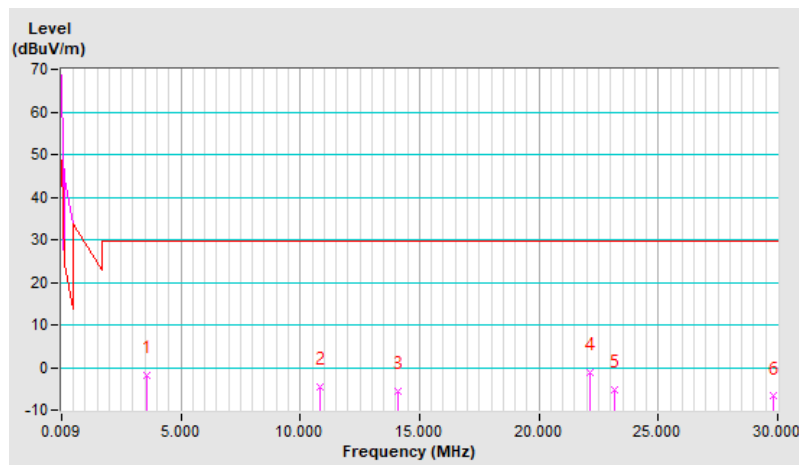


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	-5.50 QP	29.50 QP	-35.00	1.00	214	15.10	-20.60
2	9.77	-6.20 QP	29.50 QP	-35.70	1.00	271	12.70	-18.90
3	22.12	1.30 QP	29.50 QP	-28.20	1.00	305	19.70	-18.40
4	23.18	1.50 QP	29.50 QP	-28.00	1.00	124	19.80	-18.30
5	25.29	-1.60 QP	29.50 QP	-31.10	1.00	102	16.70	-18.30
6	29.52	-5.30 QP	29.50 QP	-34.80	1.00	196	12.90	-18.20

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

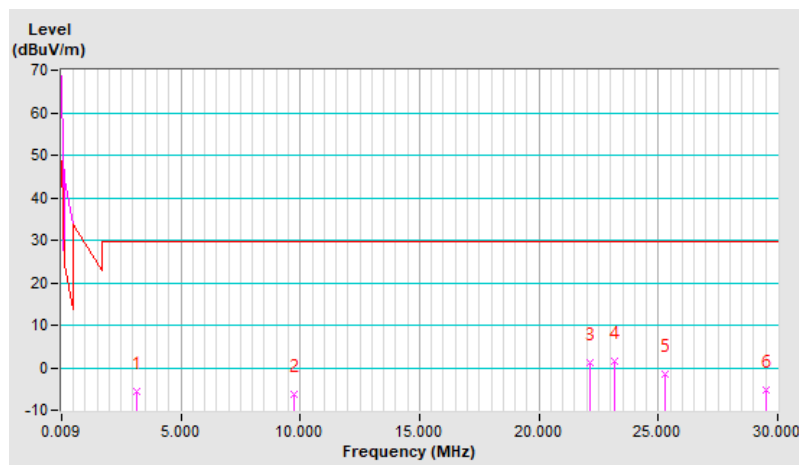


Type V

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	-1.30 QP	29.50 QP	-30.80	1.00	81	19.30	-20.60
2	20.00	3.50 QP	29.50 QP	-26.00	1.00	165	21.90	-18.40
3	22.12	0.90 QP	29.50 QP	-28.60	1.00	133	19.30	-18.40
4	23.18	6.80 QP	29.50 QP	-22.70	1.00	102	25.10	-18.30
5	24.23	2.00 QP	29.50 QP	-27.50	1.00	75	20.30	-18.30
6	25.29	-1.30 QP	29.50 QP	-30.80	1.00	66	17.00	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

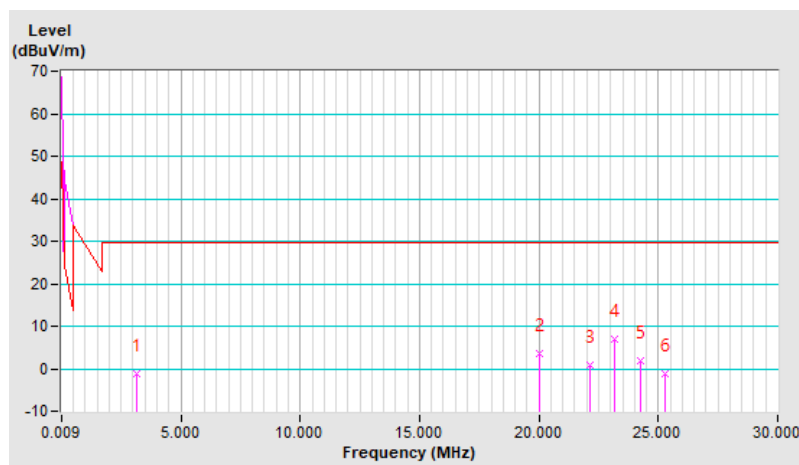


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.57	-2.00 QP	29.50 QP	-31.50	1.00	311	18.50	-20.50
2	9.29	-6.70 QP	29.50 QP	-36.20	1.00	112	12.30	-19.00
3	15.82	-7.00 QP	29.50 QP	-36.50	1.00	259	11.60	-18.60
4	18.61	-6.20 QP	29.50 QP	-35.70	1.00	173	12.30	-18.50
5	22.12	-4.40 QP	29.50 QP	-33.90	1.00	120	14.00	-18.40
6	23.18	-3.80 QP	29.50 QP	-33.30	1.00	345	14.50	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

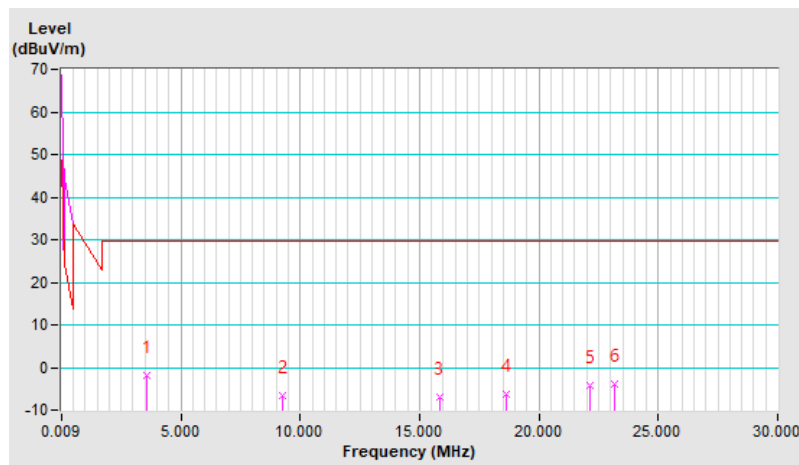


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.08	-6.40 QP	29.50 QP	-35.90	1.00	175	14.30	-20.70
2	11.11	-6.00 QP	29.50 QP	-35.50	1.00	216	12.80	-18.80
3	20.00	-4.50 QP	29.50 QP	-34.00	1.00	150	13.90	-18.40
4	22.12	2.10 QP	29.50 QP	-27.40	1.00	204	20.50	-18.40
5	23.18	-1.90 QP	29.50 QP	-31.40	1.00	168	16.40	-18.30
6	24.23	-2.10 QP	29.50 QP	-31.60	1.00	250	16.20	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

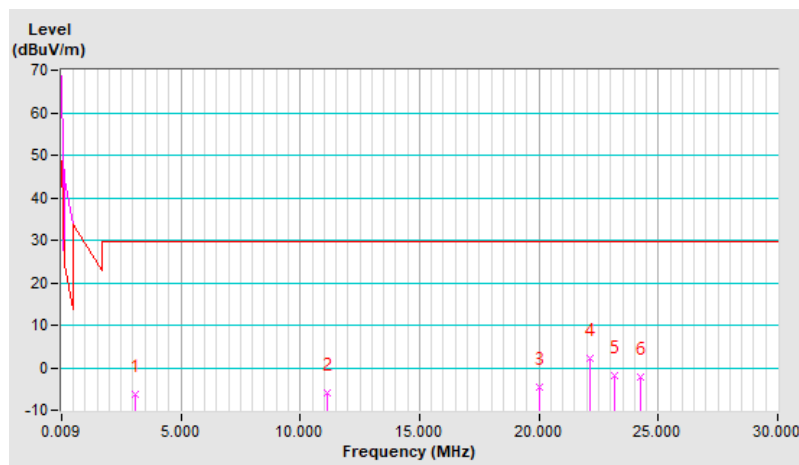


Type A

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	46.87	30.6 QP	40.0	-9.4	1.49 H	253	39.8	-9.2
2	108.73	30.2 QP	43.5	-13.3	1.49 H	282	42.1	-11.9
3	153.72	32.2 QP	43.5	-11.3	1.49 H	315	40.6	-8.4
4	193.09	31.1 QP	43.5	-12.4	2.00 H	253	42.2	-11.1
5	266.20	28.2 QP	46.0	-17.8	1.49 H	174	36.1	-7.9
6	595.19	29.4 QP	46.0	-16.6	1.00 H	293	29.2	0.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

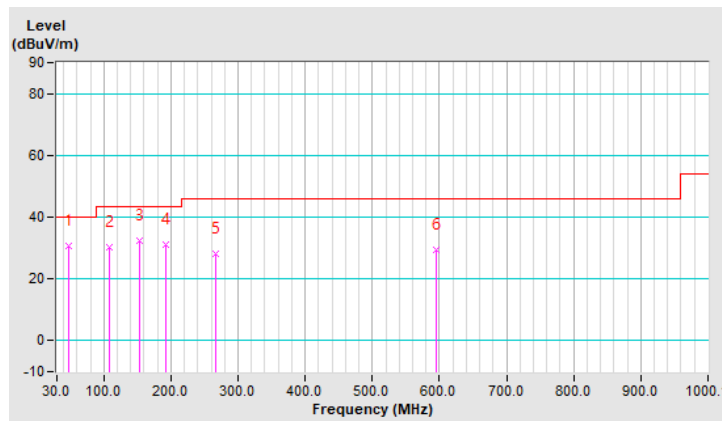




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	49.68	30.2 QP	40.0	-9.8	1.00 V	18	39.3	-9.1
2	108.73	28.8 QP	43.5	-14.7	1.49 V	130	40.7	-11.9
3	162.16	27.4 QP	43.5	-16.1	1.49 V	34	35.8	-8.4
4	191.68	25.7 QP	43.5	-17.8	1.49 V	216	36.6	-10.9
5	274.63	26.4 QP	46.0	-19.6	1.00 V	17	33.9	-7.5
6	595.19	29.3 QP	46.0	-16.7	1.00 V	239	29.1	0.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

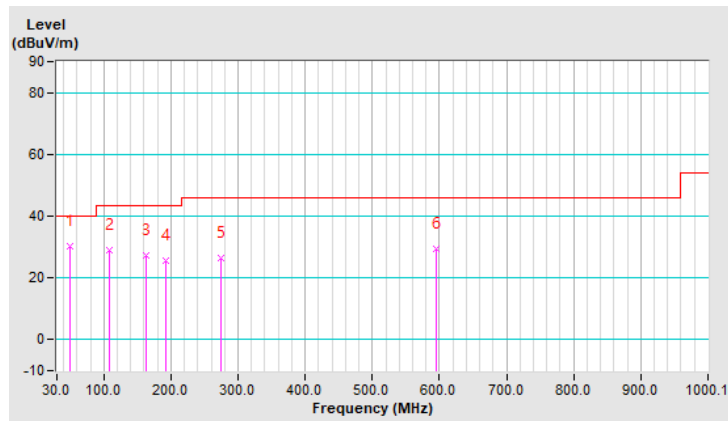


Type B

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.28	29.7 QP	40.0	-10.3	1.00 H	264	38.7	-9.0
2	82.02	22.1 QP	40.0	-17.9	1.49 H	275	35.9	-13.8
3	108.73	29.4 QP	43.5	-14.1	1.00 H	292	41.3	-11.9
4	152.32	29.8 QP	43.5	-13.7	2.00 H	292	38.3	-8.5
5	191.68	30.7 QP	43.5	-12.8	1.49 H	261	41.6	-10.9
6	276.04	30.4 QP	46.0	-15.6	1.49 H	167	37.8	-7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

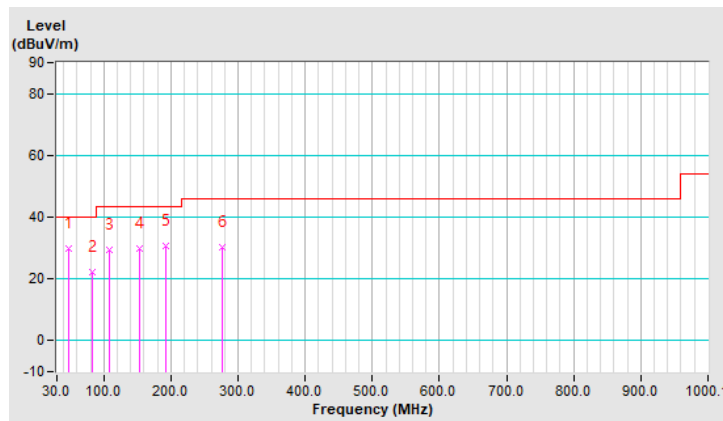


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	49.68	30.6 QP	40.0	-9.4	1.00 V	13	39.7	-9.1
2	107.33	28.9 QP	43.5	-14.6	1.00 V	97	41.0	-12.1
3	152.32	26.9 QP	43.5	-16.6	1.49 V	296	35.4	-8.5
4	191.68	24.5 QP	43.5	-19.0	1.49 V	158	35.4	-10.9
5	273.23	25.3 QP	46.0	-20.7	1.49 V	34	32.8	-7.5
6	465.84	26.3 QP	46.0	-19.7	2.00 V	315	29.2	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

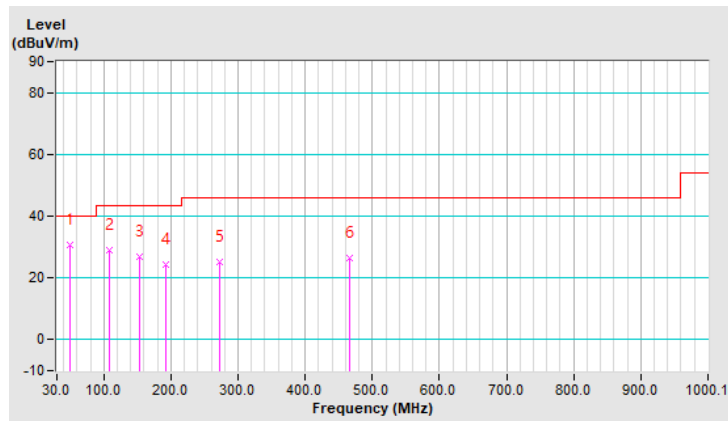


Type F

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.47	32.1 QP	40.0	-7.9	1.49 H	249	41.2	-9.1
2	107.33	29.3 QP	43.5	-14.2	1.49 H	279	41.4	-12.1
3	153.72	29.9 QP	43.5	-13.6	1.49 H	163	38.3	-8.4
4	188.87	31.0 QP	43.5	-12.5	1.49 H	263	41.7	-10.7
5	276.04	27.0 QP	46.0	-19.0	1.00 H	172	34.4	-7.4
6	598.00	29.0 QP	46.0	-17.0	2.00 H	7	28.8	0.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

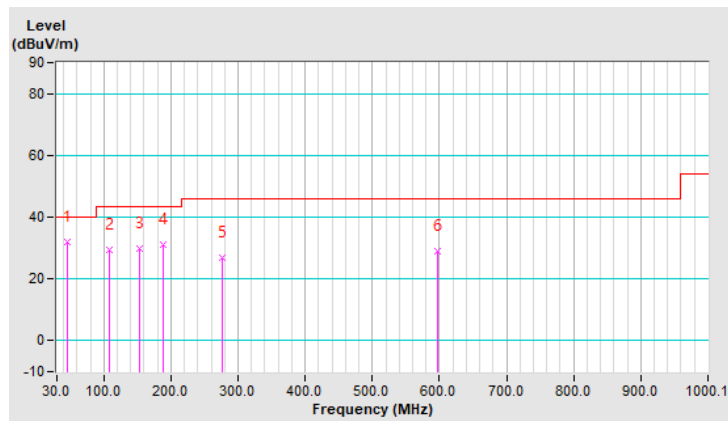


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.62	29.0 QP	40.0	-11.0	1.00 V	212	39.2	-10.2
2	49.68	30.0 QP	40.0	-10.0	1.49 V	282	39.1	-9.1
3	107.33	29.2 QP	43.5	-14.3	1.00 V	113	41.3	-12.1
4	160.75	27.0 QP	43.5	-16.5	1.49 V	321	35.4	-8.4
5	193.09	26.3 QP	43.5	-17.2	1.00 V	153	37.4	-11.1
6	273.23	25.6 QP	46.0	-20.4	2.00 V	6	33.1	-7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

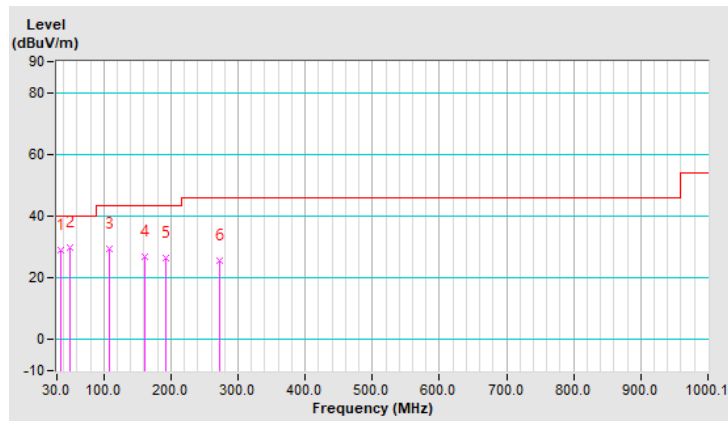


Type V

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.28	29.7 QP	40.0	-10.3	1.49 H	279	38.7	-9.0
2	107.33	29.6 QP	43.5	-13.9	1.49 H	298	41.7	-12.1
3	152.32	28.7 QP	43.5	-14.8	2.00 H	151	37.2	-8.5
4	187.47	30.3 QP	43.5	-13.2	2.00 H	246	40.9	-10.6
5	271.82	31.1 QP	46.0	-14.9	1.49 H	157	38.7	-7.6
6	669.70	30.0 QP	46.0	-16.0	1.49 H	165	28.6	1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

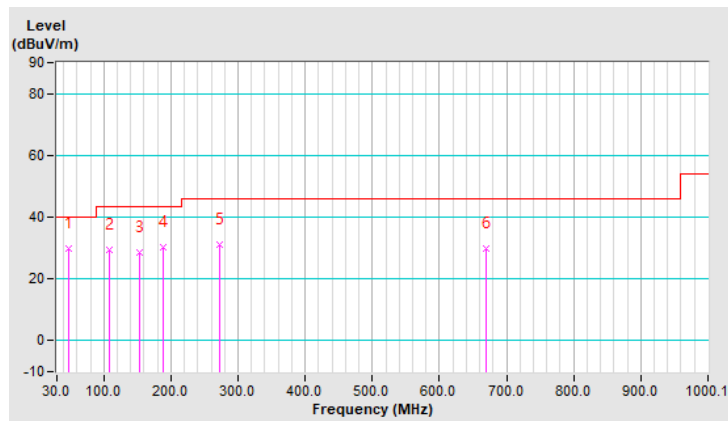


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	49.68	31.7 QP	40.0	-8.3	1.00 V	236	40.8	-9.1
2	82.02	26.6 QP	40.0	-13.4	1.00 V	155	40.4	-13.8
3	108.73	29.7 QP	43.5	-13.8	1.49 V	113	41.6	-11.9
4	150.91	27.2 QP	43.5	-16.3	1.00 V	292	35.7	-8.5
5	193.09	26.0 QP	43.5	-17.5	2.00 V	232	37.1	-11.1
6	273.23	26.2 QP	46.0	-19.8	1.49 V	22	33.7	-7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

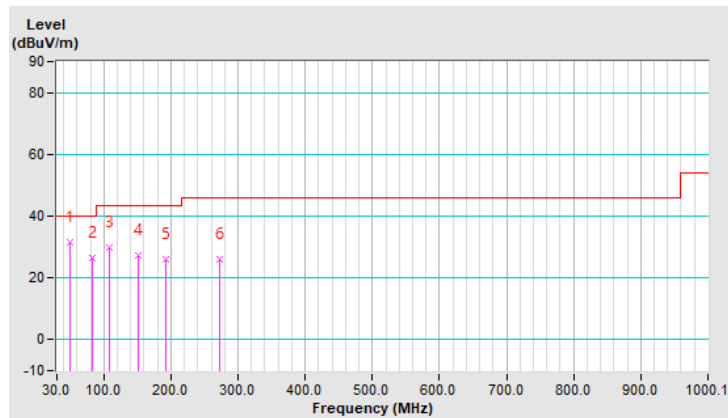

Mode C2  
 X-plane  
 Type A

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	24.4 QP	84.0 QP	-59.6	1.00	150	43.1	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

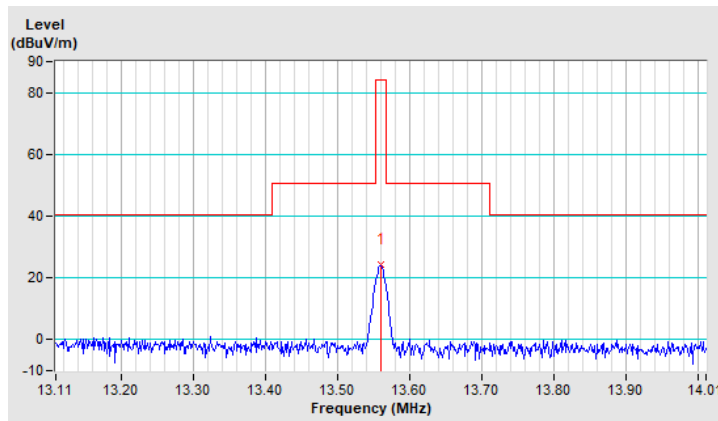



EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	20.4 QP	84.0 QP	-63.6	1.00	205	39.1	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

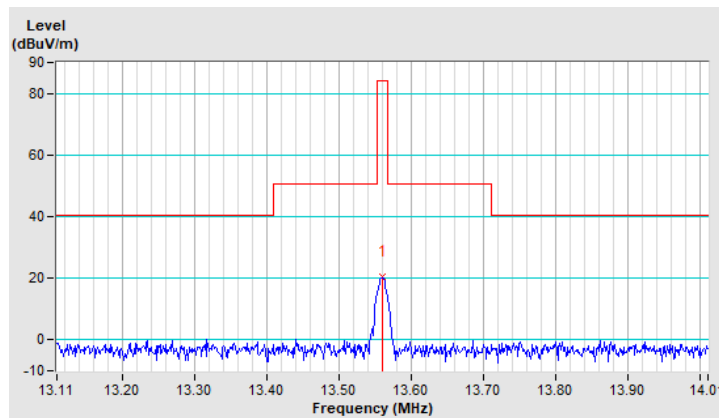

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	28.8 QP	84.0 QP	-55.2	1.00	165	47.5	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

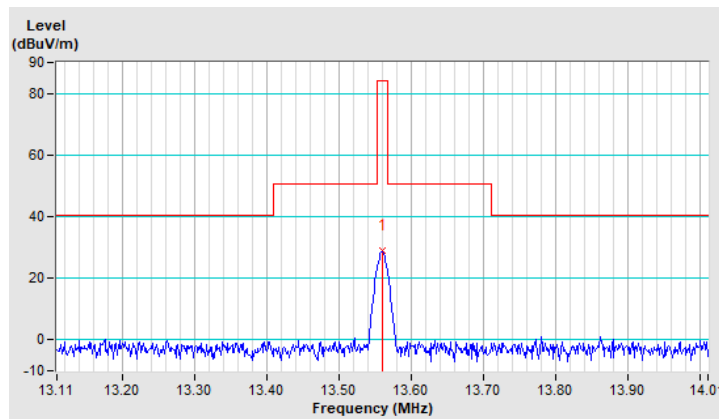

Type B

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	24.4 QP	84.0 QP	-59.6	1.00	153	43.1	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

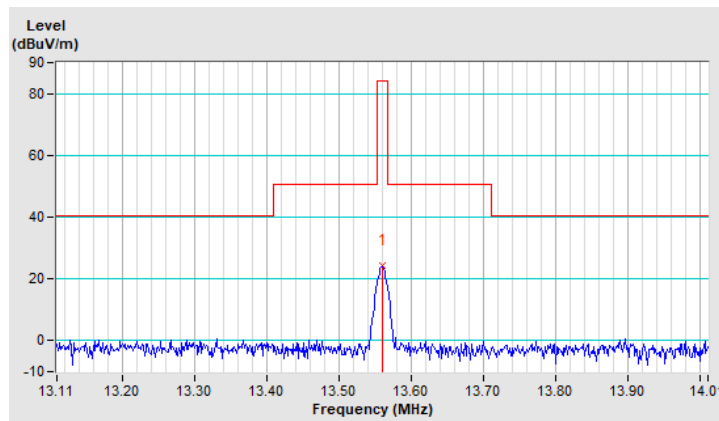

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	20.3 QP	84.0 QP	-63.7	1.00	200	39.0	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

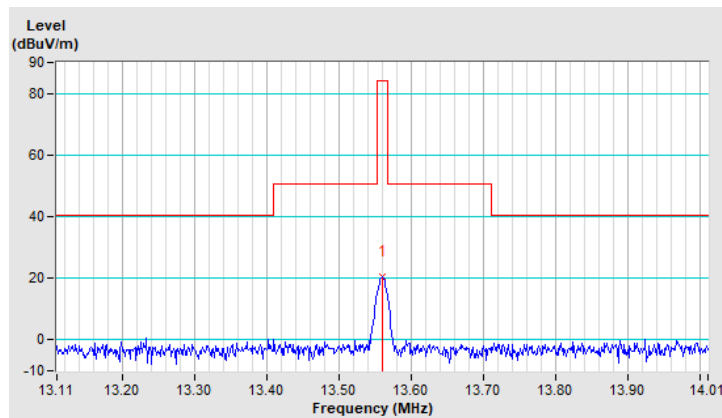

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	28.7 QP	84.0 QP	-55.3	1.00	161	47.4	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

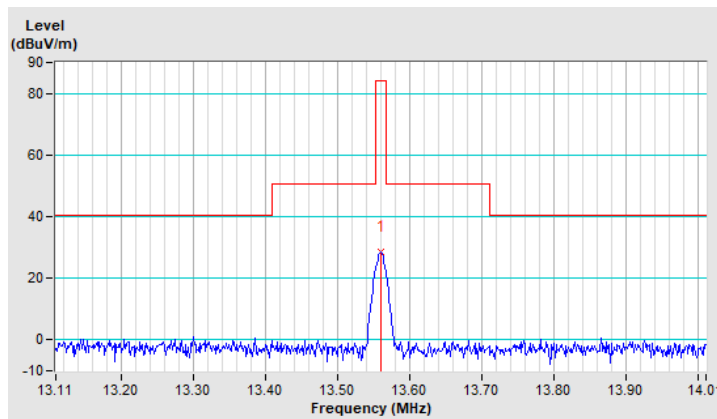

Type F

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	24.3 QP	84.0 QP	-59.7	1.00	149	43.0	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

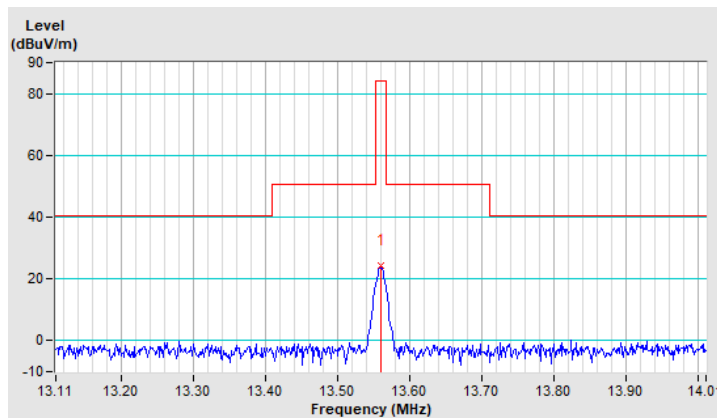

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	20.5 QP	84.0 QP	-63.5	1.00	199	39.2	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

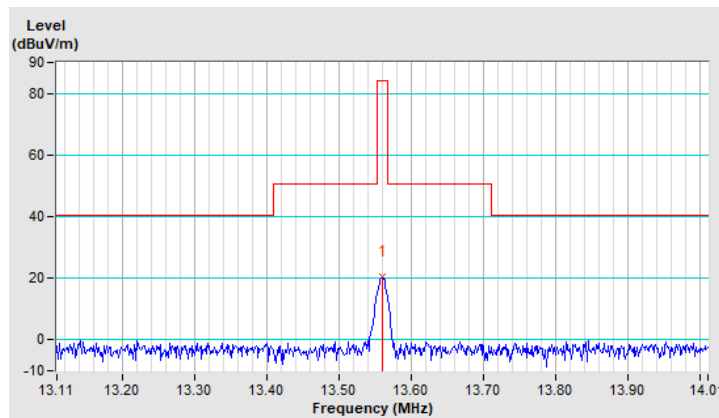

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	28.7 QP	84.0 QP	-55.3	1.00	161	47.4	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

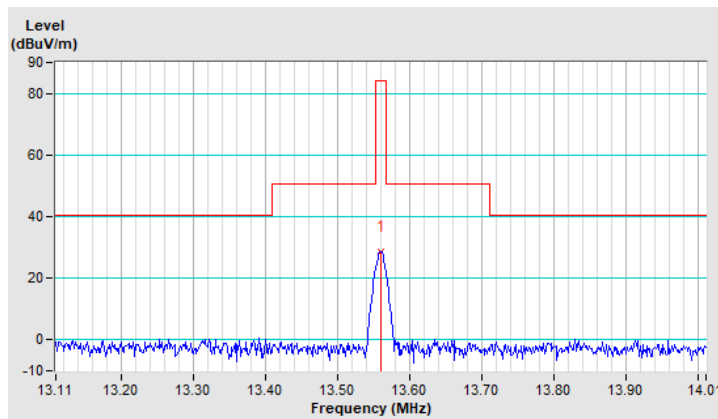



Type V

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	24.3 QP	84.0 QP	-59.7	1.00	155	43.0	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

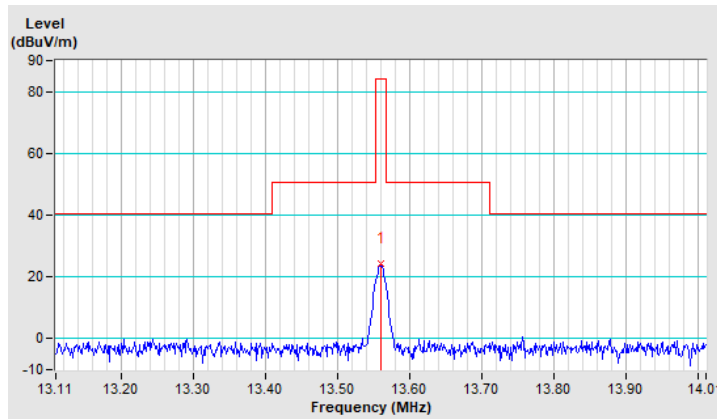

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	20.4 QP	84.0 QP	-63.6	1.00	204	39.1	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

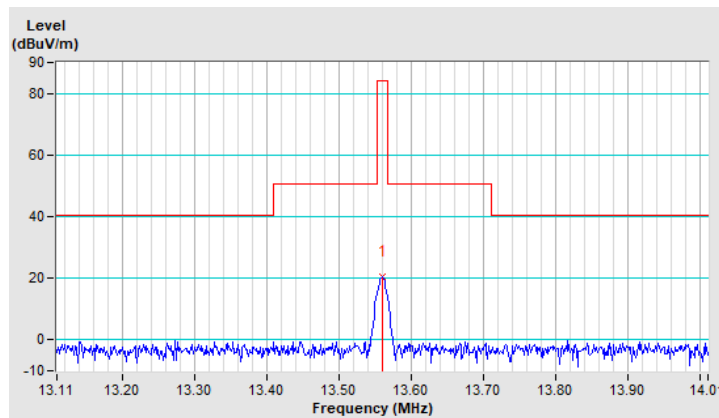

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	28.8 QP	84.0 QP	-55.2	1.00	167	47.5	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

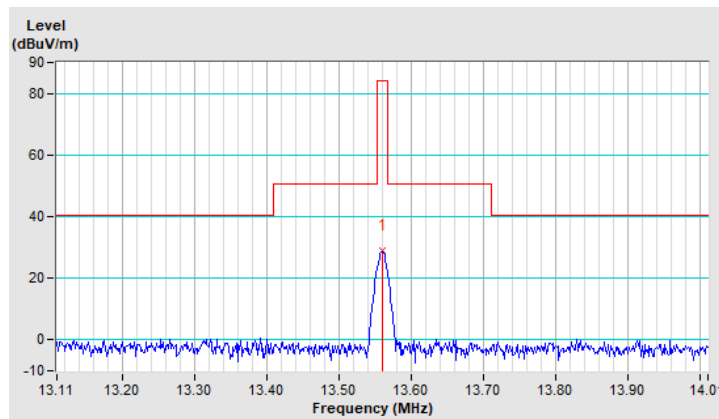


Type A

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	-0.30 QP	29.50 QP	-29.80	1.00	245	20.30	-20.60
2	3.57	-3.90 QP	29.50 QP	-33.40	1.00	229	16.60	-20.50
3	15.77	-4.10 QP	29.50 QP	-33.60	1.00	294	14.50	-18.60
4	22.12	7.10 QP	29.50 QP	-22.40	1.00	102	25.50	-18.40
5	23.18	7.30 QP	29.50 QP	-22.20	1.00	30	25.60	-18.30
6	25.29	0.10 QP	29.50 QP	-29.40	1.00	283	18.40	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

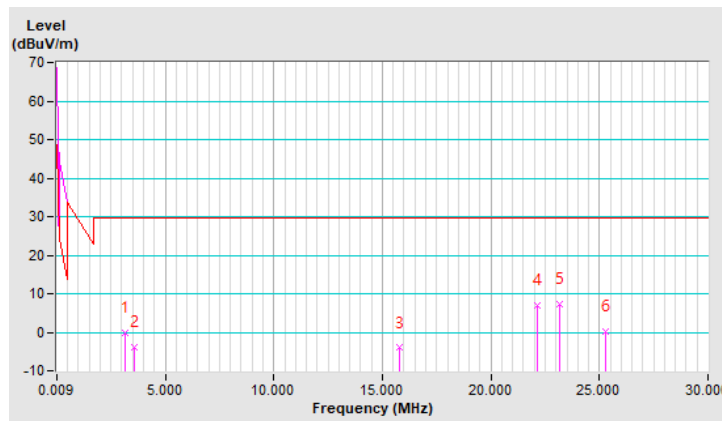


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.57	-2.70 QP	29.50 QP	-32.20	1.00	205	17.80	-20.50
2	8.47	-8.10 QP	29.50 QP	-37.60	1.00	223	11.00	-19.10
3	10.73	-5.90 QP	29.50 QP	-35.40	1.00	11	12.90	-18.80
4	18.42	-6.80 QP	29.50 QP	-36.30	1.00	113	11.70	-18.50
5	22.12	-1.40 QP	29.50 QP	-30.90	1.00	98	17.00	-18.40
6	23.18	-1.20 QP	29.50 QP	-30.70	1.00	120	17.10	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

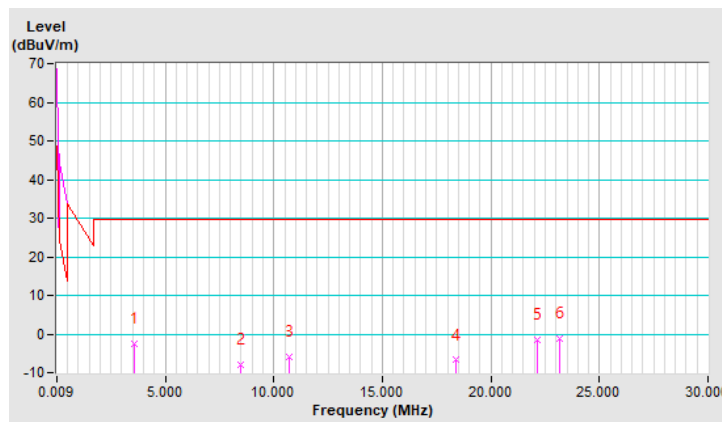


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7.17	-8.00 QP	29.50 QP	-37.50	1.00	128	11.40	-19.40
2	11.64	-6.40 QP	29.50 QP	-35.90	1.00	18	12.30	-18.70
3	18.08	-8.10 QP	29.50 QP	-37.60	1.00	357	10.40	-18.50
4	20.05	-7.10 QP	29.50 QP	-36.60	1.00	90	11.30	-18.40
5	22.12	-1.00 QP	29.50 QP	-30.50	1.00	138	17.40	-18.40
6	25.29	-2.50 QP	29.50 QP	-32.00	1.00	101	15.80	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

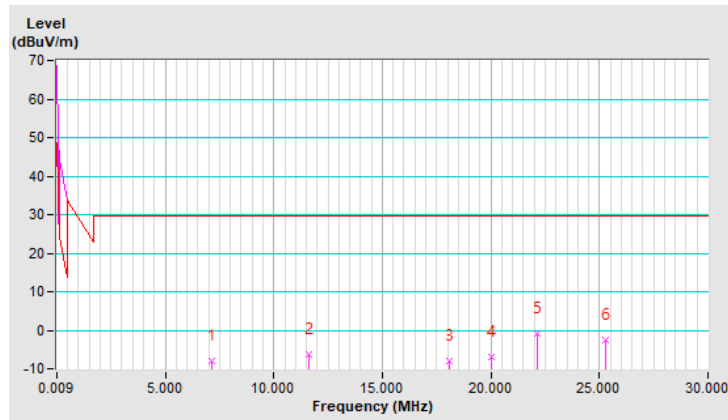


Type B

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	-0.70 QP	29.50 QP	-30.20	1.00	185	19.90	-20.60
2	3.57	-5.00 QP	29.50 QP	-34.50	1.00	6	15.50	-20.50
3	11.06	-6.70 QP	29.50 QP	-36.20	1.00	181	12.10	-18.80
4	15.73	-7.00 QP	29.50 QP	-36.50	1.00	336	11.60	-18.60
5	22.12	7.80 QP	29.50 QP	-21.70	1.00	287	26.20	-18.40
6	23.18	7.20 QP	29.50 QP	-22.30	1.00	201	25.50	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

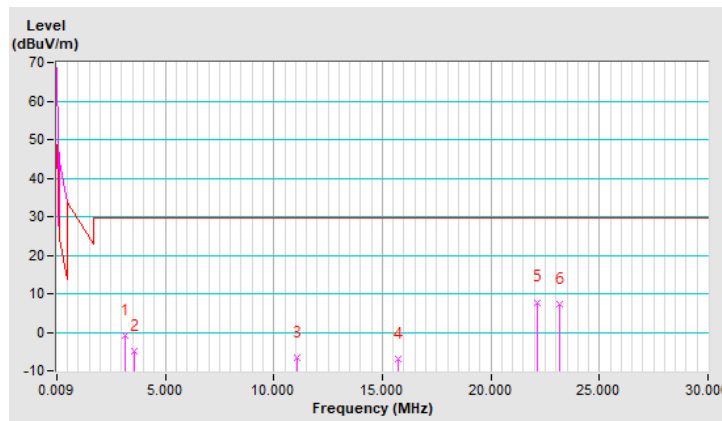


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.57	-2.00 QP	29.50 QP	-31.50	1.00	7	18.50	-20.50
2	7.22	-7.80 QP	29.50 QP	-37.30	1.00	283	11.60	-19.40
3	12.22	-6.40 QP	29.50 QP	-35.90	1.00	135	12.30	-18.70
4	18.85	-4.90 QP	29.50 QP	-34.40	1.00	290	13.50	-18.40
5	22.12	0.30 QP	29.50 QP	-29.20	1.00	223	18.70	-18.40
6	23.18	-2.00 QP	29.50 QP	-31.50	1.00	30	16.30	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

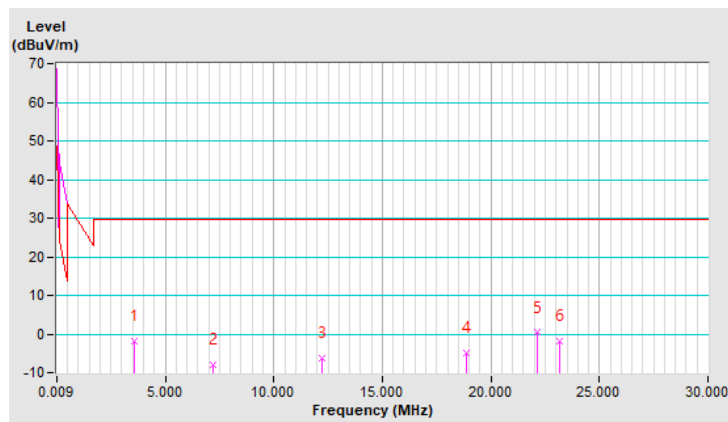




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.57	-6.40 QP	29.50 QP	-35.90	1.00	108	14.10	-20.50
2	10.78	-7.00 QP	29.50 QP	-36.50	1.00	168	11.80	-18.80
3	22.12	0.10 QP	29.50 QP	-29.40	1.00	133	18.50	-18.40
4	23.18	-1.90 QP	29.50 QP	-31.40	1.00	106	16.40	-18.30
5	25.29	-2.30 QP	29.50 QP	-31.80	1.00	319	16.00	-18.30
6	26.35	-5.10 QP	29.50 QP	-34.60	1.00	346	13.20	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

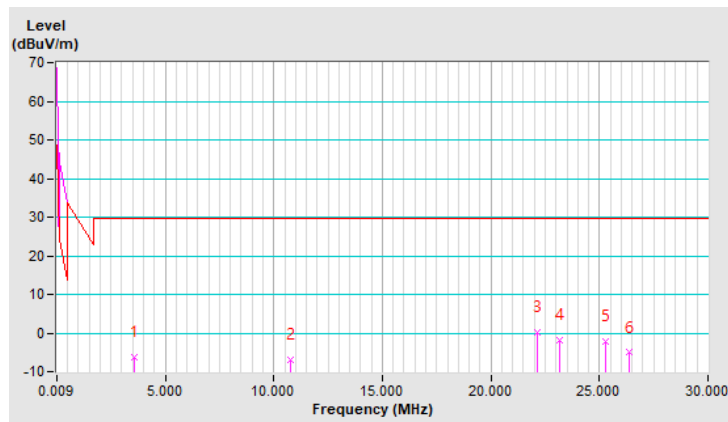


Type F

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	-1.10 QP	29.50 QP	-30.60	1.00	335	19.50	-20.60
2	12.26	-5.70 QP	29.50 QP	-35.20	1.00	168	13.00	-18.70
3	18.85	-4.10 QP	29.50 QP	-33.60	1.00	58	14.30	-18.40
4	22.12	7.10 QP	29.50 QP	-22.40	1.00	288	25.50	-18.40
5	23.18	7.10 QP	29.50 QP	-22.40	1.00	269	25.40	-18.30
6	24.23	-0.30 QP	29.50 QP	-29.80	1.00	242	18.00	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

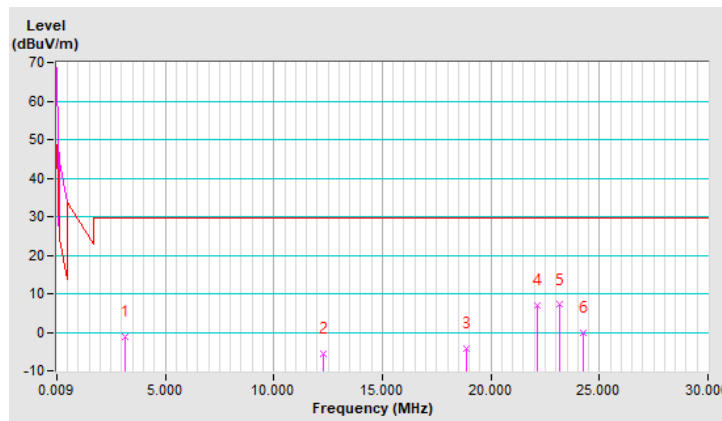


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.57	-1.80 QP	29.50 QP	-31.30	1.00	47	18.70	-20.50
2	9.24	-7.30 QP	29.50 QP	-36.80	1.00	9	11.70	-19.00
3	12.60	-5.20 QP	29.50 QP	-34.70	1.00	172	13.50	-18.70
4	15.73	-7.70 QP	29.50 QP	-37.20	1.00	117	10.90	-18.60
5	22.12	-4.30 QP	29.50 QP	-33.80	1.00	116	14.10	-18.40
6	23.18	-2.00 QP	29.50 QP	-31.50	1.00	183	16.30	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

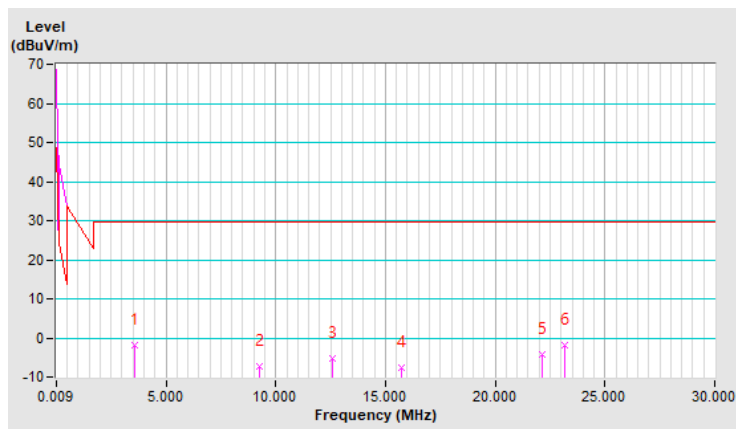


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	-5.80 QP	29.50 QP	-35.30	1.00	19	14.80	-20.60
2	17.41	-6.10 QP	29.50 QP	-35.60	1.00	5	12.40	-18.50
3	21.06	-6.80 QP	29.50 QP	-36.30	1.00	156	11.60	-18.40
4	22.12	-1.40 QP	29.50 QP	-30.90	1.00	297	17.00	-18.40
5	23.18	-1.80 QP	29.50 QP	-31.30	1.00	11	16.50	-18.30
6	25.29	-2.60 QP	29.50 QP	-32.10	1.00	237	15.70	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

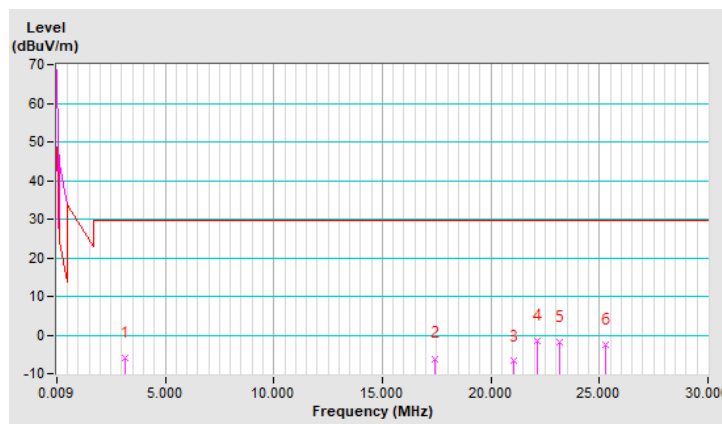


Type V

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	0.00 QP	29.50 QP	-29.50	1.00	63	20.60	-20.60
2	5.25	-6.20 QP	29.50 QP	-35.70	1.00	353	13.60	-19.80
3	20.00	-1.30 QP	29.50 QP	-30.80	1.00	7	17.10	-18.40
4	22.12	9.10 QP	29.50 QP	-20.40	1.00	84	27.50	-18.40
5	23.18	6.60 QP	29.50 QP	-22.90	1.00	21	24.90	-18.30
6	25.29	-0.90 QP	29.50 QP	-30.40	1.00	342	17.40	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

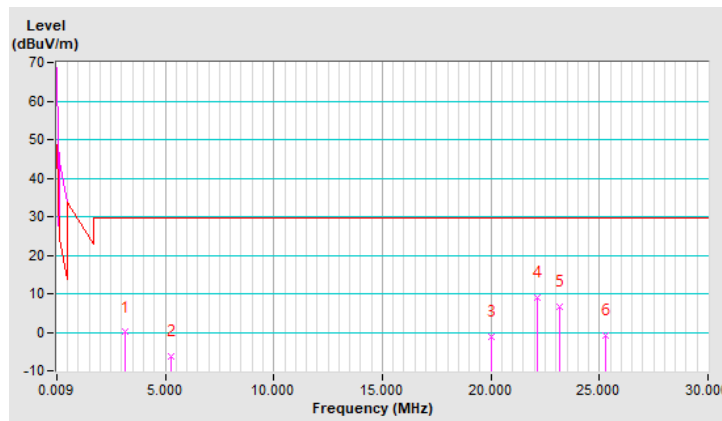


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.57	-1.40 QP	29.50 QP	-30.90	1.00	238	19.10	-20.50
2	10.10	-7.60 QP	29.50 QP	-37.10	1.00	9	11.20	-18.80
3	14.04	-4.70 QP	29.50 QP	-34.20	1.00	173	13.90	-18.60
4	22.12	1.60 QP	29.50 QP	-27.90	1.00	342	20.00	-18.40
5	23.18	-2.30 QP	29.50 QP	-31.80	1.00	333	16.00	-18.30
6	28.99	-7.20 QP	29.50 QP	-36.70	1.00	210	11.00	-18.20

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

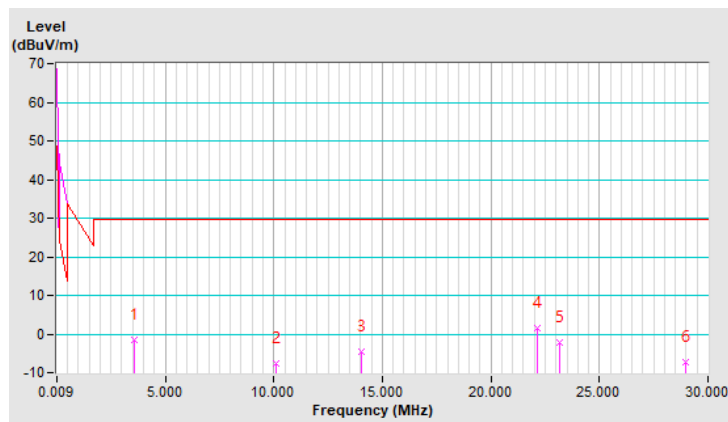


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.04	-6.90 QP	29.50 QP	-36.40	1.00	99	13.80	-20.70
2	10.58	-7.60 QP	29.50 QP	-37.10	1.00	85	11.20	-18.80
3	22.12	0.70 QP	29.50 QP	-28.80	1.00	88	19.10	-18.40
4	23.18	-0.10 QP	29.50 QP	-29.60	1.00	228	18.20	-18.30
5	25.29	-2.70 QP	29.50 QP	-32.20	1.00	134	15.60	-18.30
6	26.35	-5.20 QP	29.50 QP	-34.70	1.00	302	13.10	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

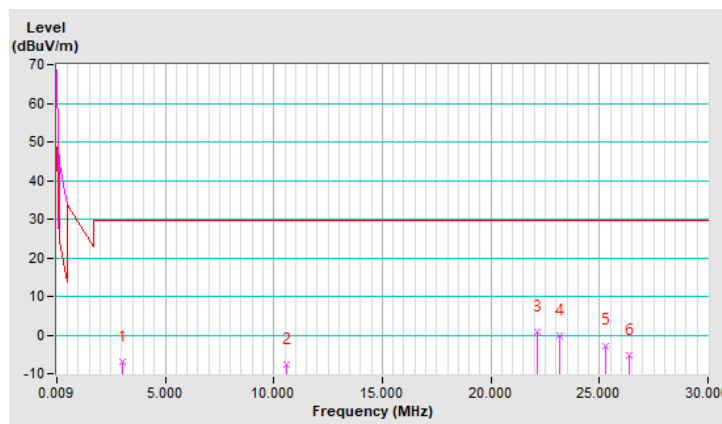


Type A

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.28	31.1 QP	40.0	-8.9	1.50 H	277	40.1	-9.0
2	110.14	32.0 QP	43.5	-11.5	1.50 H	276	43.8	-11.8
3	156.53	32.2 QP	43.5	-11.3	1.50 H	146	40.6	-8.4
4	194.50	30.6 QP	43.5	-12.9	1.00 H	277	41.7	-11.1
5	260.57	26.5 QP	46.0	-19.5	2.00 H	341	34.9	-8.4
6	475.68	25.8 QP	46.0	-20.2	1.50 H	236	28.4	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

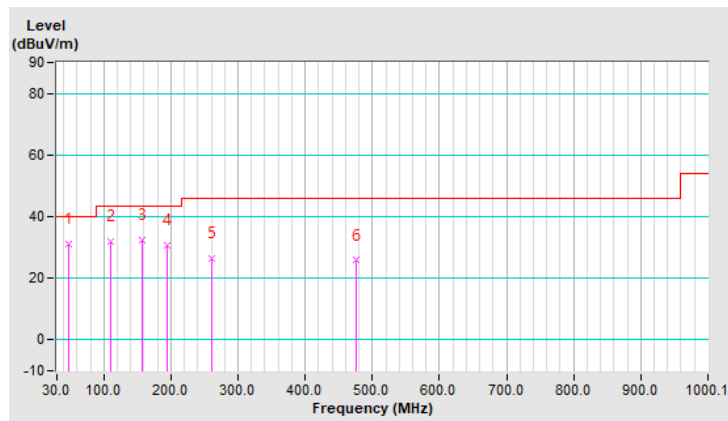




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	49.68	31.1 QP	40.0	-8.9	1.00 V	68	40.2	-9.1
2	108.73	30.3 QP	43.5	-13.2	1.50 V	220	42.2	-11.9
3	157.94	32.0 QP	43.5	-11.5	1.50 V	285	40.3	-8.3
4	267.60	27.9 QP	46.0	-18.1	1.50 V	15	35.7	-7.8
5	332.28	25.5 QP	46.0	-20.5	2.00 V	168	31.4	-5.9
6	515.05	27.7 QP	46.0	-18.3	1.50 V	121	29.7	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

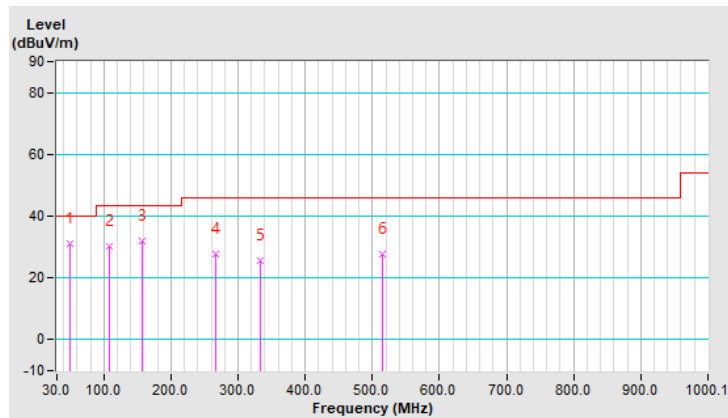


Type B

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.25	31.0 QP	40.0	-9.0	1.00 H	308	40.3	-9.3
2	107.33	31.2 QP	43.5	-12.3	1.50 H	309	43.3	-12.1
3	156.53	32.4 QP	43.5	-11.1	1.50 H	140	40.8	-8.4
4	186.06	31.3 QP	43.5	-12.2	1.00 H	250	41.7	-10.4
5	252.14	27.1 QP	46.0	-18.9	1.50 H	170	35.8	-8.7
6	544.57	26.7 QP	46.0	-19.3	1.50 H	261	28.1	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

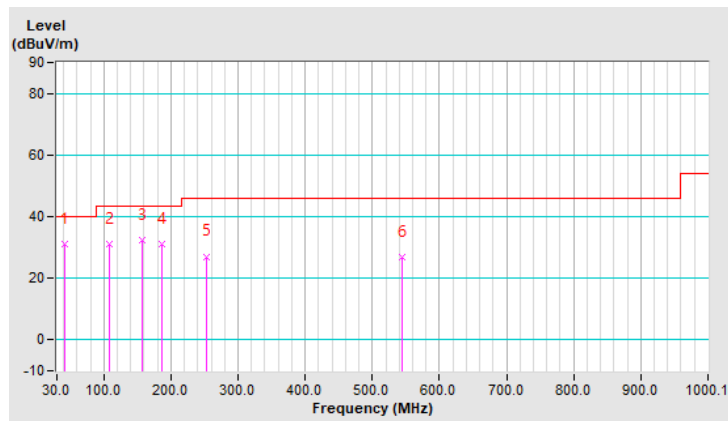


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	49.68	31.7 QP	40.0	-8.3	1.50 V	273	40.8	-9.1
2	108.73	29.8 QP	43.5	-13.7	1.50 V	223	41.7	-11.9
3	157.94	26.5 QP	43.5	-17.0	1.00 V	277	34.8	-8.3
4	271.82	25.6 QP	46.0	-20.4	1.00 V	11	33.2	-7.6
5	333.68	25.1 QP	46.0	-20.9	1.50 V	219	30.9	-5.8
6	530.52	27.1 QP	46.0	-18.9	1.50 V	295	28.7	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

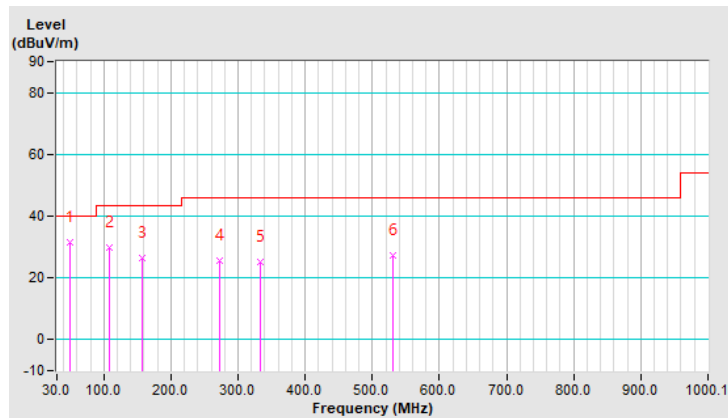


Type F

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.28	29.9 QP	40.0	-10.1	1.00 H	248	38.9	-9.0
2	110.14	31.0 QP	43.5	-12.5	1.50 H	185	42.8	-11.8
3	155.13	36.2 QP	43.5	-7.3	1.50 H	156	44.6	-8.4
4	188.87	29.7 QP	43.5	-13.8	1.00 H	247	40.4	-10.7
5	260.57	25.9 QP	46.0	-20.1	1.50 H	0	34.3	-8.4
6	460.22	25.8 QP	46.0	-20.2	1.50 H	4	28.8	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

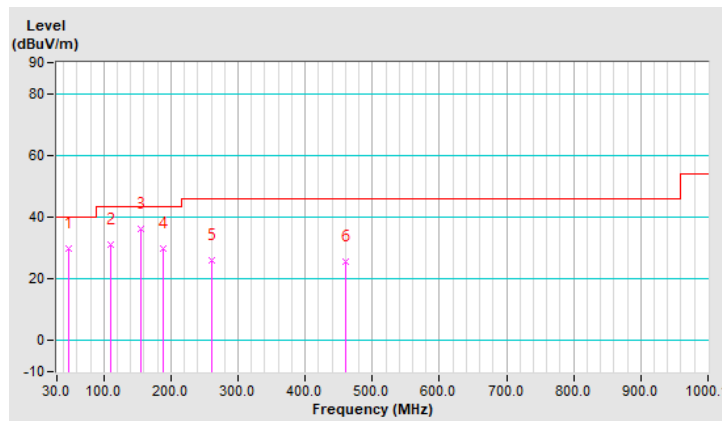


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	49.68	31.5 QP	40.0	-8.5	1.50 V	306	40.6	-9.1
2	79.21	27.5 QP	40.0	-12.5	1.50 V	162	40.6	-13.1
3	108.73	29.8 QP	43.5	-13.7	2.00 V	188	41.7	-11.9
4	155.13	27.5 QP	43.5	-16.0	2.00 V	299	35.9	-8.4
5	194.50	25.2 QP	43.5	-18.3	1.50 V	246	36.3	-11.1
6	273.23	26.9 QP	46.0	-19.1	1.50 V	16	34.4	-7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

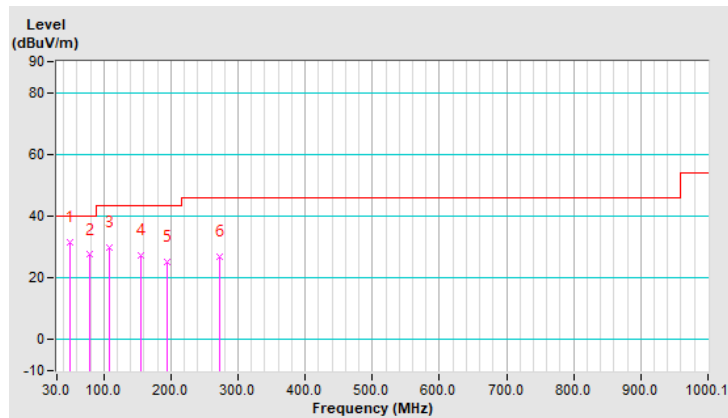


Type V

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.44	29.2 QP	40.0	-10.8	1.50 H	270	39.0	-9.8
2	112.95	31.7 QP	43.5	-11.8	1.50 H	76	43.3	-11.6
3	155.13	31.7 QP	43.5	-11.8	1.50 H	132	40.1	-8.4
4	194.50	28.6 QP	43.5	-14.9	2.00 H	260	39.7	-11.1
5	274.63	27.7 QP	46.0	-18.3	1.00 H	154	35.2	-7.5
6	523.49	27.1 QP	46.0	-18.9	1.00 H	123	29.0	-1.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

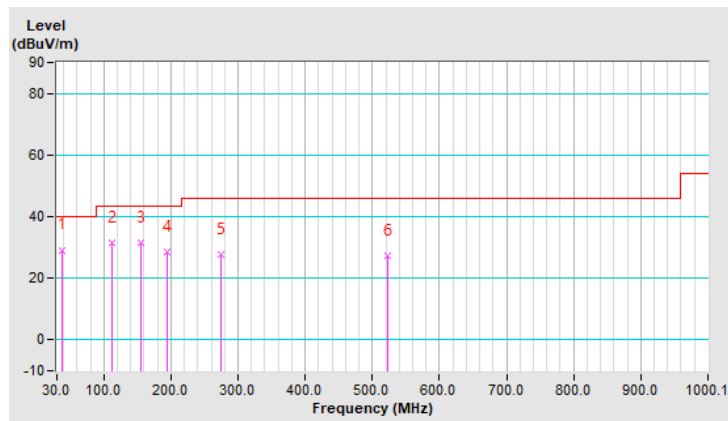


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.62	29.2 QP	40.0	-10.8	1.50 V	123	39.4	-10.2
2	49.68	29.7 QP	40.0	-10.3	1.00 V	120	38.8	-9.1
3	82.02	26.4 QP	40.0	-13.6	1.50 V	205	40.2	-13.8
4	108.73	29.5 QP	43.5	-14.0	1.50 V	115	41.4	-11.9
5	190.28	26.7 QP	43.5	-16.8	1.00 V	217	37.5	-10.8
6	314.00	27.0 QP	46.0	-19.0	1.50 V	225	33.3	-6.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

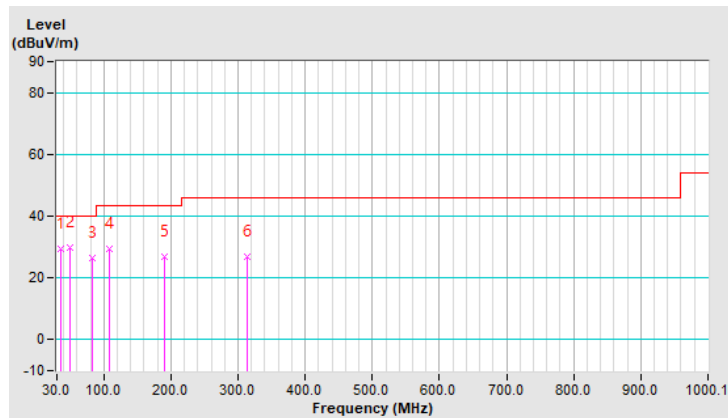

**Y-plane**

Type A

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	33.2 QP	84.0 QP	-50.8	1.00	167	51.9	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

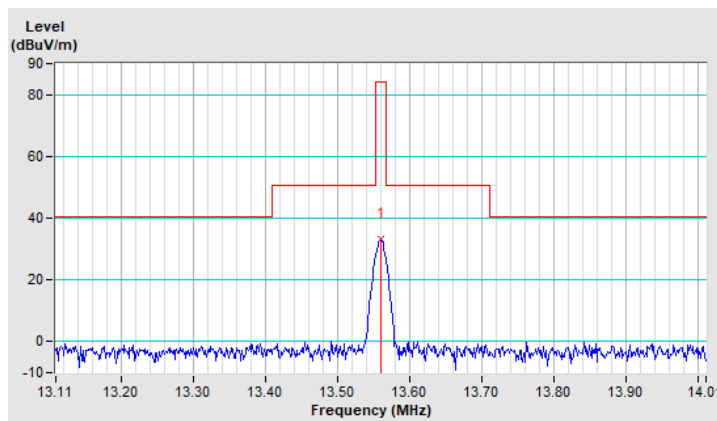



EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	30.8 QP	84.0 QP	-53.2	1.00	60	49.5	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

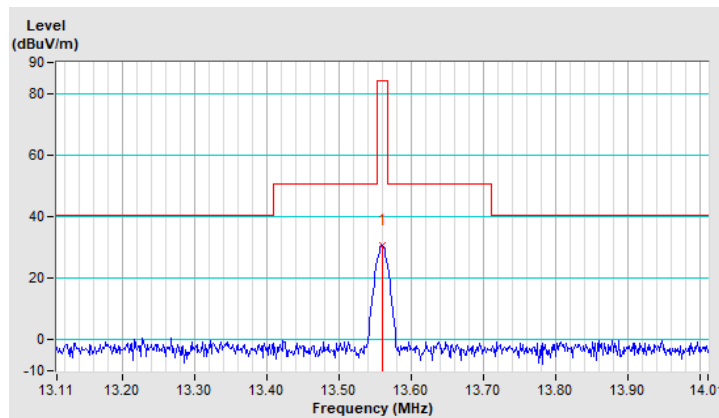

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	25.2 QP	84.0 QP	-58.8	1.00	179	43.9	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

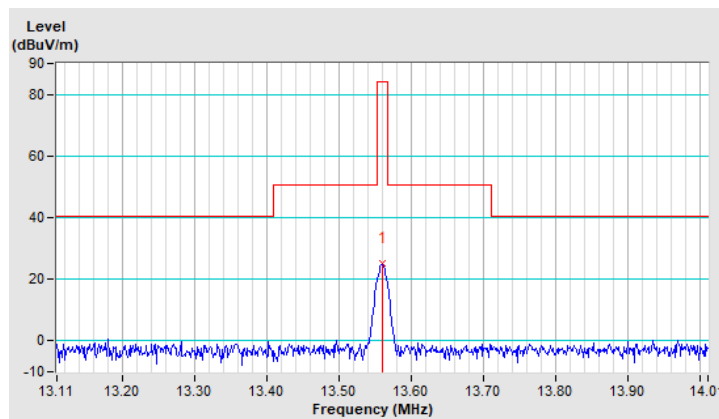

Type B

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	33.1 QP	84.0 QP	-50.9	1.00	170	51.8	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

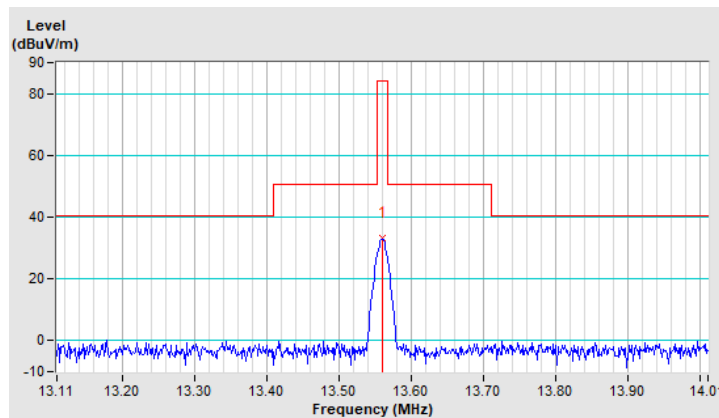

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	30.9 QP	84.0 QP	-53.1	1.00	63	49.6	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

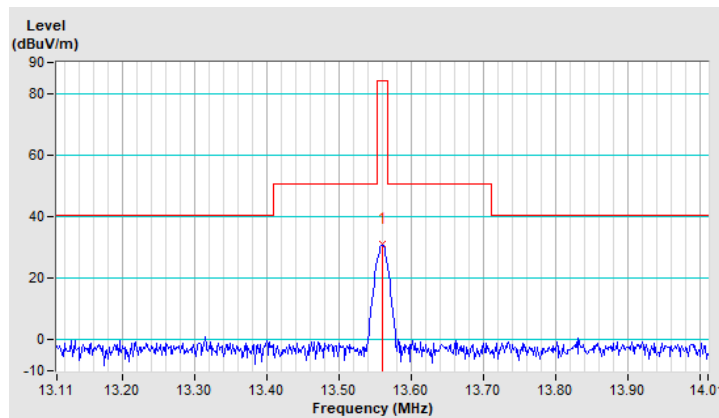

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	25.1 QP	84.0 QP	-58.9	1.00	172	43.8	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

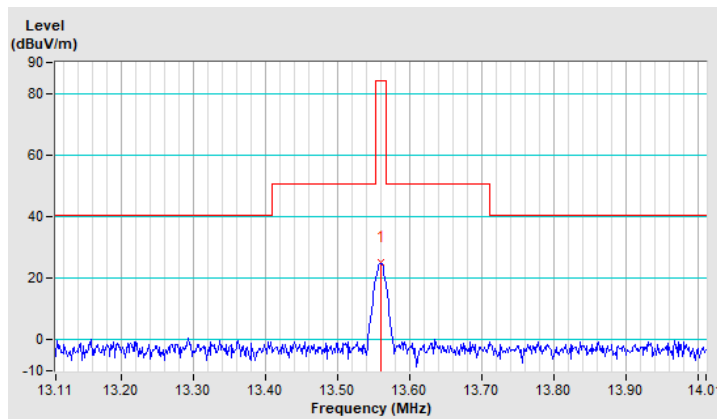

Type F

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	33.3 QP	84.0 QP	-50.7	1.00	173	52.0	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

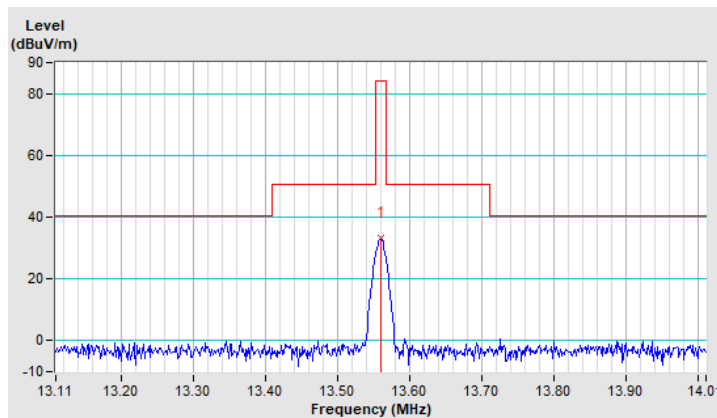

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	30.7 QP	84.0 QP	-53.3	1.00	67	49.4	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

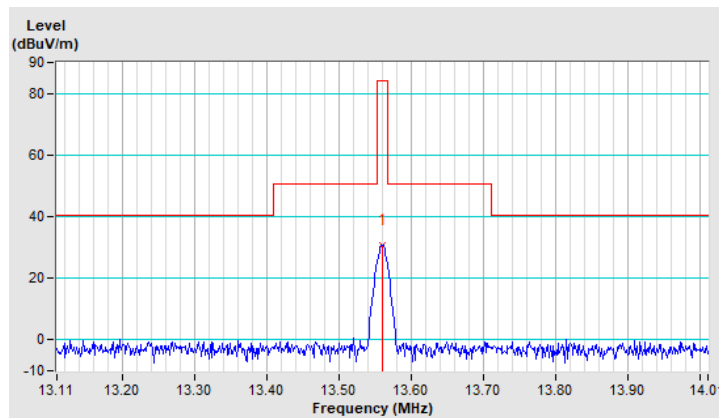

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	25.1 QP	84.0 QP	-58.9	1.00	167	43.8	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

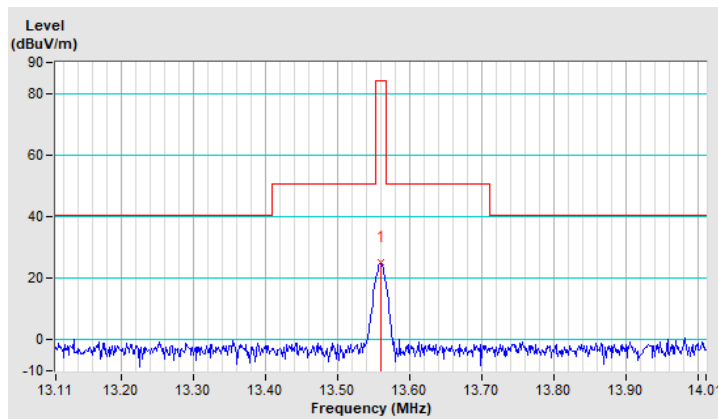



Type V

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	33.2 QP	84.0 QP	-50.8	1.00	169	51.9	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

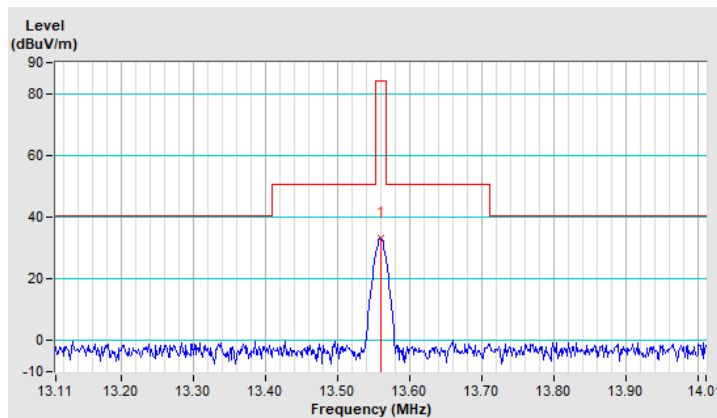

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	30.7 QP	84.0 QP	-53.3	1.00	62	49.4	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

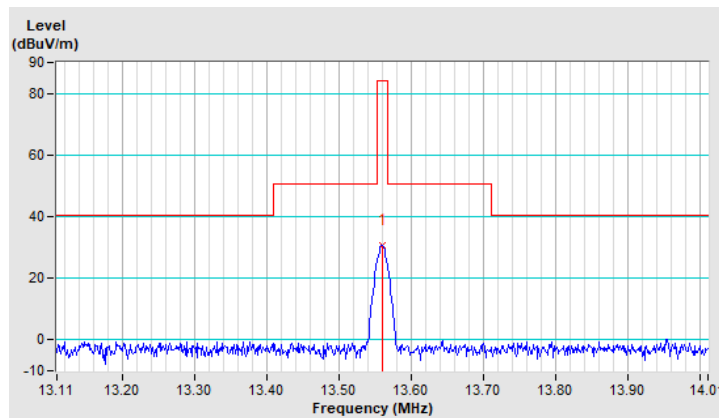

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	25.2 QP	84.0 QP	-58.8	1.00	172	43.9	-18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m}
 \end{aligned}$$

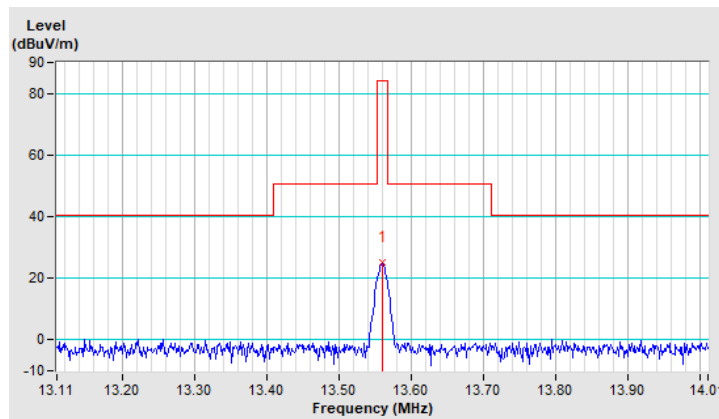


Type A

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	-0.50 QP	29.50 QP	-30.00	1.00	13	20.10	-20.60
2	20.00	-1.00 QP	29.50 QP	-30.50	1.00	310	17.40	-18.40
3	22.12	8.70 QP	29.50 QP	-20.80	1.00	242	27.10	-18.40
4	23.18	8.10 QP	29.50 QP	-21.40	1.00	11	26.40	-18.30
5	25.29	1.40 QP	29.50 QP	-28.10	1.00	119	19.70	-18.30
6	26.35	-2.80 QP	29.50 QP	-32.30	1.00	115	15.50	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

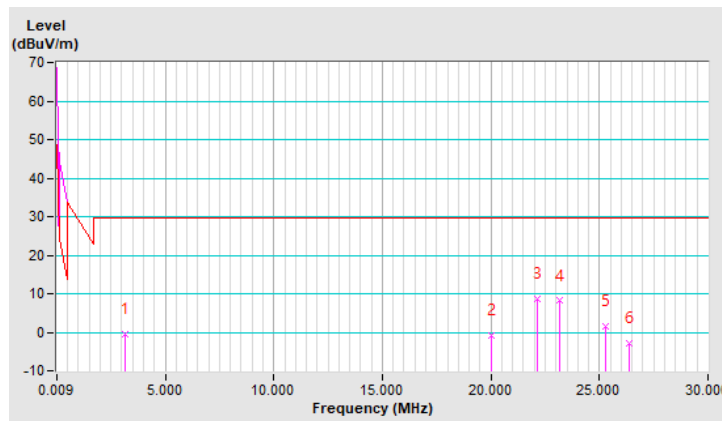


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.57	-1.00 QP	29.50 QP	-30.50	1.00	78	19.50	-20.50
2	10.73	-7.10 QP	29.50 QP	-36.60	1.00	2	11.70	-18.80
3	16.54	-6.00 QP	29.50 QP	-35.50	1.00	163	12.50	-18.50
4	18.56	-6.20 QP	29.50 QP	-35.70	1.00	198	12.30	-18.50
5	20.68	-6.80 QP	29.50 QP	-36.30	1.00	34	11.60	-18.40
6	25.10	-8.00 QP	29.50 QP	-37.50	1.00	56	10.30	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

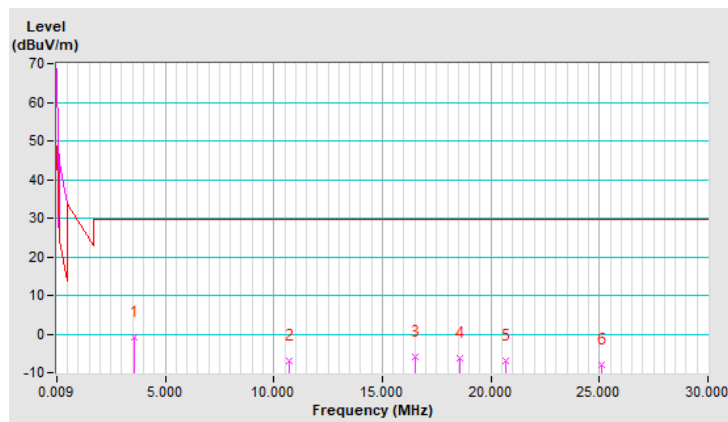


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4.43	-7.80 QP	29.50 QP	-37.30	1.00	181	12.30	-20.10
2	7.27	-7.70 QP	29.50 QP	-37.20	1.00	244	11.70	-19.40
3	15.49	-6.80 QP	29.50 QP	-36.30	1.00	96	11.80	-18.60
4	22.12	1.70 QP	29.50 QP	-27.80	1.00	16	20.10	-18.40
5	23.18	0.70 QP	29.50 QP	-28.80	1.00	201	19.00	-18.30
6	25.29	-1.30 QP	29.50 QP	-30.80	1.00	78	17.00	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

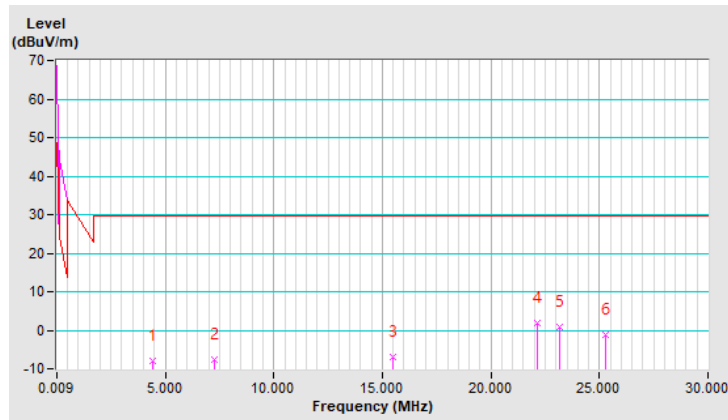


Type B

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	0.10 QP	29.50 QP	-29.40	1.00	225	20.70	-20.60
2	20.00	1.30 QP	29.50 QP	-28.20	1.00	137	19.70	-18.40
3	21.06	0.60 QP	29.50 QP	-28.90	1.00	92	19.00	-18.40
4	22.12	8.00 QP	29.50 QP	-21.50	1.00	314	26.40	-18.40
5	23.18	6.90 QP	29.50 QP	-22.60	1.00	242	25.20	-18.30
6	24.23	-0.50 QP	29.50 QP	-30.00	1.00	210	17.80	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

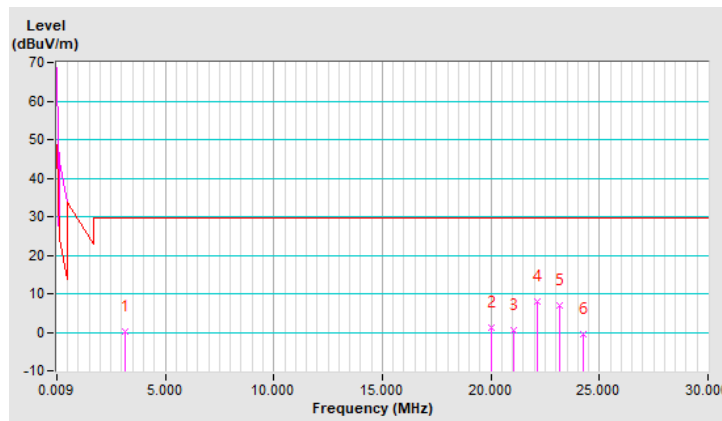


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.57	-2.50 QP	29.50 QP	-32.00	1.00	199	18.00	-20.50
2	11.26	-6.80 QP	29.50 QP	-36.30	1.00	253	11.90	-18.70
3	18.71	-5.20 QP	29.50 QP	-34.70	1.00	227	13.30	-18.50
4	23.18	-5.00 QP	29.50 QP	-34.50	1.00	44	13.30	-18.30
5	25.58	-7.10 QP	29.50 QP	-36.60	1.00	306	11.20	-18.30
6	29.52	-7.70 QP	29.50 QP	-37.20	1.00	201	10.50	-18.20

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

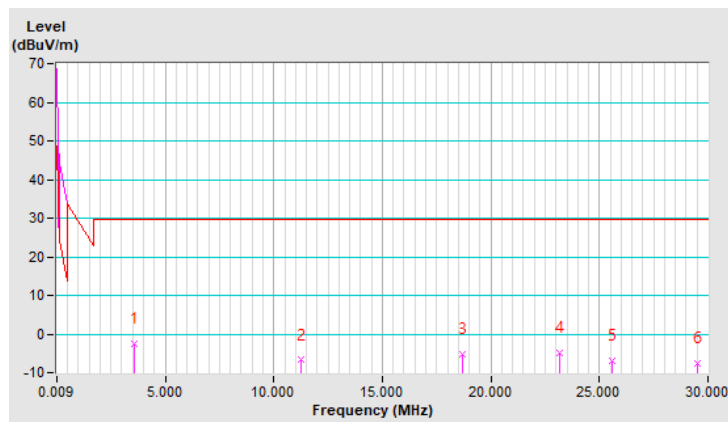




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	-4.90 QP	29.50 QP	-34.40	1.00	321	15.70	-20.60
2	11.69	-7.70 QP	29.50 QP	-37.20	1.00	321	11.00	-18.70
3	17.17	-6.20 QP	29.50 QP	-35.70	1.00	17	12.30	-18.50
4	22.12	0.20 QP	29.50 QP	-29.30	1.00	201	18.60	-18.40
5	23.18	-0.90 QP	29.50 QP	-30.40	1.00	0	17.40	-18.30
6	25.29	-1.50 QP	29.50 QP	-31.00	1.00	215	16.80	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

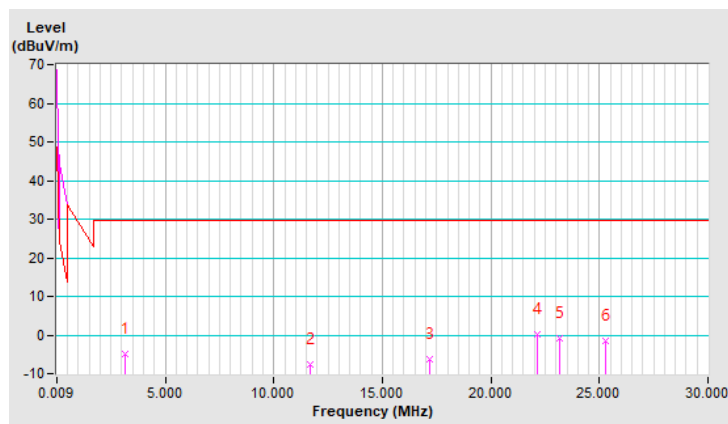


Type F

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	0.20 QP	29.50 QP	-29.30	1.00	68	20.80	-20.60
2	15.77	-1.70 QP	29.50 QP	-31.20	1.00	103	16.90	-18.60
3	21.06	-2.60 QP	29.50 QP	-32.10	1.00	346	15.80	-18.40
4	22.12	3.20 QP	29.50 QP	-26.30	1.00	7	21.60	-18.40
5	23.18	7.40 QP	29.50 QP	-22.10	1.00	24	25.70	-18.30
6	24.23	1.80 QP	29.50 QP	-27.70	1.00	142	20.10	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

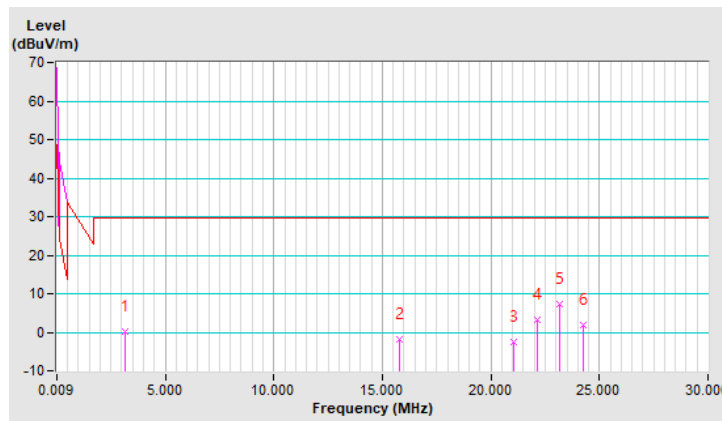


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.57	-3.60 QP	29.50 QP	-33.10	1.00	286	16.90	-20.50
2	9.24	-7.10 QP	29.50 QP	-36.60	1.00	302	11.90	-19.00
3	16.93	-8.20 QP	29.50 QP	-37.70	1.00	30	10.30	-18.50
4	18.66	-6.80 QP	29.50 QP	-36.30	1.00	171	11.70	-18.50
5	22.12	-3.10 QP	29.50 QP	-32.60	1.00	165	15.30	-18.40
6	27.21	-7.20 QP	29.50 QP	-36.70	1.00	83	11.10	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

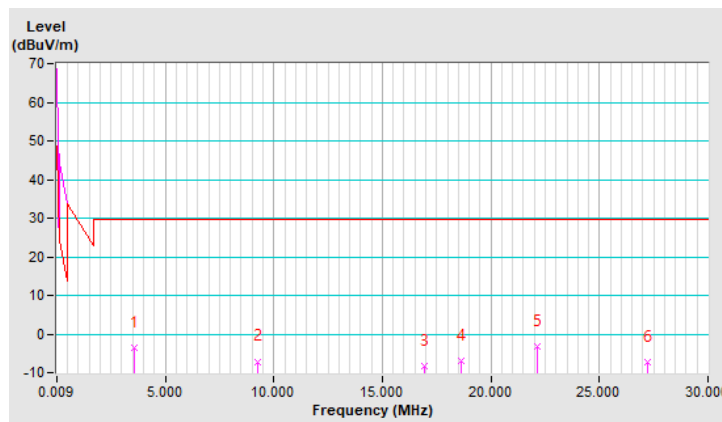


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.57	-6.90 QP	29.50 QP	-36.40	1.00	10	13.60	-20.50
2	5.44	-7.60 QP	29.50 QP	-37.10	1.00	281	12.20	-19.80
3	9.43	-7.70 QP	29.50 QP	-37.20	1.00	149	11.20	-18.90
4	20.00	-3.30 QP	29.50 QP	-32.80	1.00	29	15.10	-18.40
5	22.12	1.80 QP	29.50 QP	-27.70	1.00	228	20.20	-18.40
6	23.18	-0.30 QP	29.50 QP	-29.80	1.00	102	18.00	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

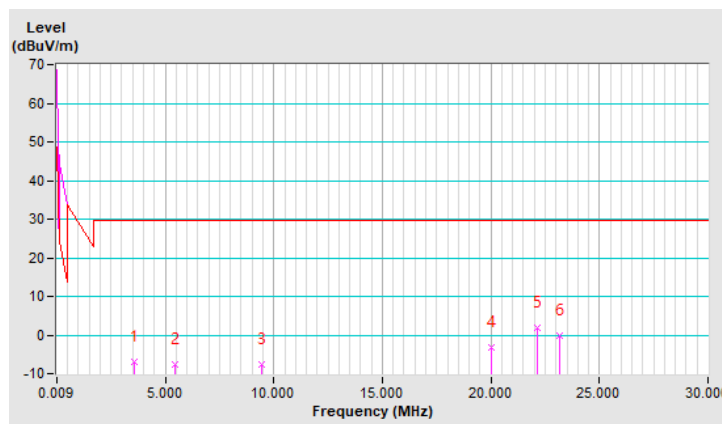


Type V

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.13	-0.20 QP	29.50 QP	-29.70	1.00	71	20.40	-20.60
2	15.77	-4.10 QP	29.50 QP	-33.60	1.00	51	14.50	-18.60
3	22.12	9.50 QP	29.50 QP	-20.00	1.00	128	27.90	-18.40
4	23.18	7.80 QP	29.50 QP	-21.70	1.00	66	26.10	-18.30
5	25.29	-1.40 QP	29.50 QP	-30.90	1.00	323	16.90	-18.30
6	27.40	-4.30 QP	29.50 QP	-33.80	1.00	233	14.00	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

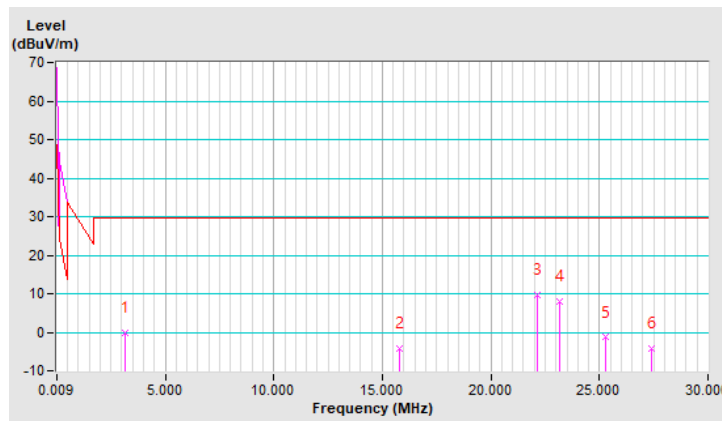


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.57	-2.10 QP	29.50 QP	-31.60	1.00	3	18.40	-20.50
2	12.22	-5.70 QP	29.50 QP	-35.20	1.00	303	13.00	-18.70
3	17.36	-6.70 QP	29.50 QP	-36.20	1.00	7	11.80	-18.50
4	18.37	-5.80 QP	29.50 QP	-35.30	1.00	73	12.70	-18.50
5	22.12	-5.80 QP	29.50 QP	-35.30	1.00	128	12.60	-18.40
6	23.18	-4.90 QP	29.50 QP	-34.40	1.00	272	13.40	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

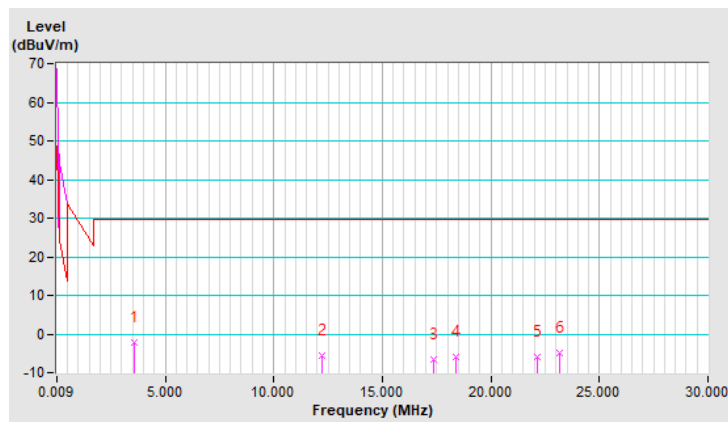


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.57	-6.20 QP	29.50 QP	-35.70	1.00	170	14.30	-20.50
2	8.66	-7.40 QP	29.50 QP	-36.90	1.00	31	11.70	-19.10
3	20.00	-3.10 QP	29.50 QP	-32.60	1.00	277	15.30	-18.40
4	22.12	2.90 QP	29.50 QP	-26.60	1.00	137	21.30	-18.40
5	23.18	-1.50 QP	29.50 QP	-31.00	1.00	246	16.80	-18.30
6	25.29	-1.50 QP	29.50 QP	-31.00	1.00	224	16.80	-18.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. For 0.49 ~ 30MHz, the measured field strength was extrapolated to distance 30 meters Distance factor@3m =  $40 \cdot \log(3/30) = -40\text{dB}$

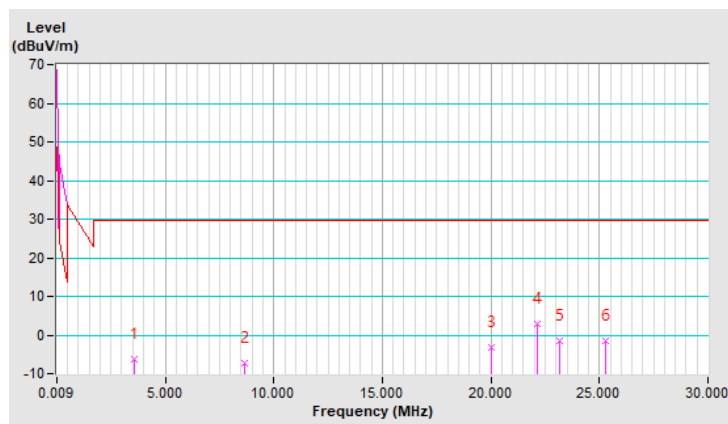


Type A

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.62	33.1 QP	40.0	-6.9	1.50 H	255	43.3	-10.2
2	83.43	25.2 QP	40.0	-14.8	1.99 H	258	39.2	-14.0
3	107.33	30.5 QP	43.5	-13.0	1.50 H	269	42.6	-12.1
4	152.32	32.0 QP	43.5	-11.5	1.50 H	286	40.5	-8.5
5	194.50	29.8 QP	43.5	-13.7	1.01 H	248	40.9	-11.1
6	264.79	28.5 QP	46.0	-17.5	1.01 H	159	36.5	-8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

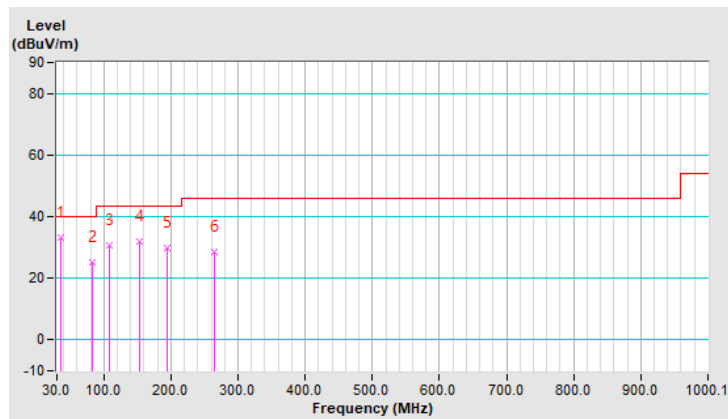




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	49.68	31.2 QP	40.0	-8.8	1.49 V	115	40.3	-9.1
2	107.33	31.8 QP	43.5	-11.7	1.00 V	100	43.9	-12.1
3	155.13	30.7 QP	43.5	-12.8	1.00 V	1	39.1	-8.4
4	193.09	26.7 QP	43.5	-16.8	1.00 V	201	37.8	-11.1
5	273.23	26.7 QP	46.0	-19.3	1.00 V	159	34.2	-7.5
6	613.47	30.6 QP	46.0	-15.4	1.00 V	333	29.9	0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

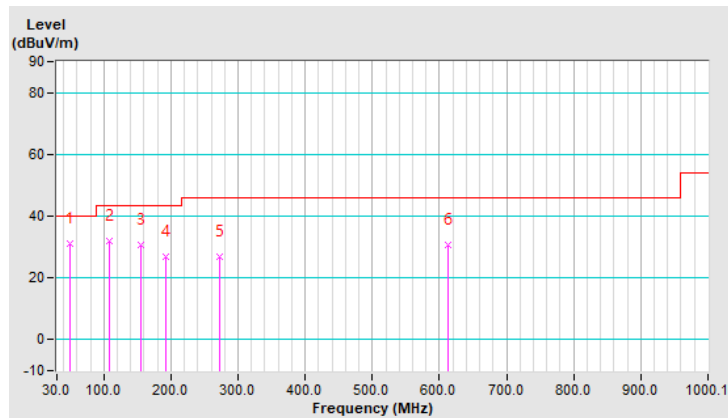


Type B

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	46.87	28.6 QP	40.0	-11.4	1.49 H	230	37.8	-9.2
2	107.33	31.7 QP	43.5	-11.8	1.49 H	107	43.8	-12.1
3	150.91	30.5 QP	43.5	-13.0	1.00 H	250	39.0	-8.5
4	187.47	31.2 QP	43.5	-12.3	1.49 H	237	41.8	-10.6
5	269.01	28.7 QP	46.0	-17.3	2.00 H	342	36.4	-7.7
6	592.38	28.9 QP	46.0	-17.1	1.49 H	278	28.9	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

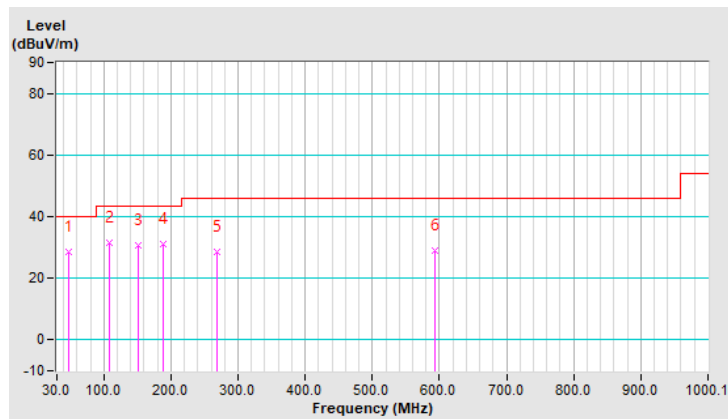


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	34.5 QP	40.0	-5.5	1.49 V	261	45.1	-10.6
2	49.68	31.5 QP	40.0	-8.5	1.49 V	6	40.6	-9.1
3	110.14	30.4 QP	43.5	-13.1	1.49 V	134	42.2	-11.8
4	150.91	26.7 QP	43.5	-16.8	1.49 V	291	35.2	-8.5
5	273.23	25.9 QP	46.0	-20.1	1.49 V	29	33.4	-7.5
6	492.55	26.6 QP	46.0	-19.4	1.49 V	290	29.1	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

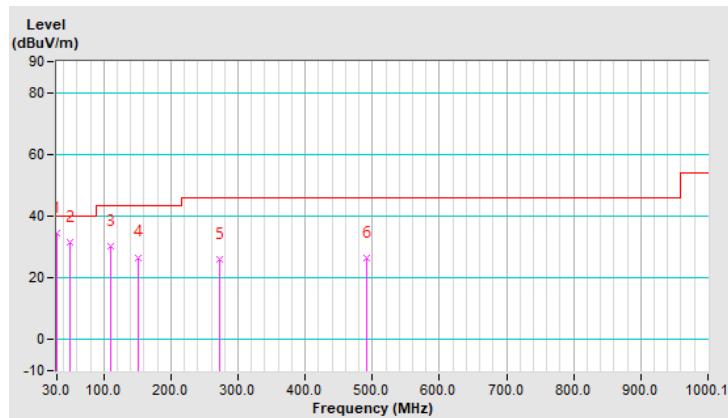


Type F

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	44.06	29.3 QP	40.0	-10.7	1.00 H	237	38.5	-9.2
2	107.33	30.2 QP	43.5	-13.3	1.50 H	102	42.3	-12.1
3	152.32	29.5 QP	43.5	-14.0	2.00 H	152	38.0	-8.5
4	193.09	30.8 QP	43.5	-12.7	1.50 H	270	41.9	-11.1
5	274.63	27.8 QP	46.0	-18.2	1.50 H	4	35.3	-7.5
6	572.69	27.7 QP	46.0	-18.3	1.50 H	238	28.4	-0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

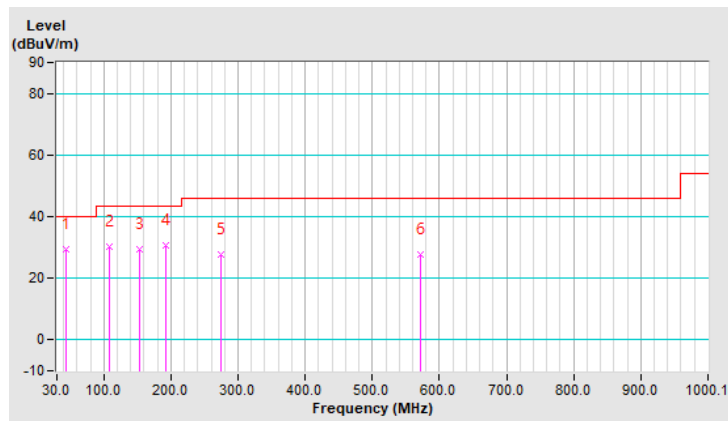


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	35.8 QP	40.0	-4.2	1.99 V	269	46.4	-10.6
2	49.68	31.9 QP	40.0	-8.1	1.00 V	199	41.0	-9.1
3	108.73	30.2 QP	43.5	-13.3	1.00 V	119	42.1	-11.9
4	153.72	31.6 QP	43.5	-11.9	1.00 V	311	40.0	-8.4
5	274.63	27.5 QP	46.0	-18.5	1.00 V	20	35.0	-7.5
6	586.75	28.6 QP	46.0	-17.4	1.99 V	85	28.9	-0.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

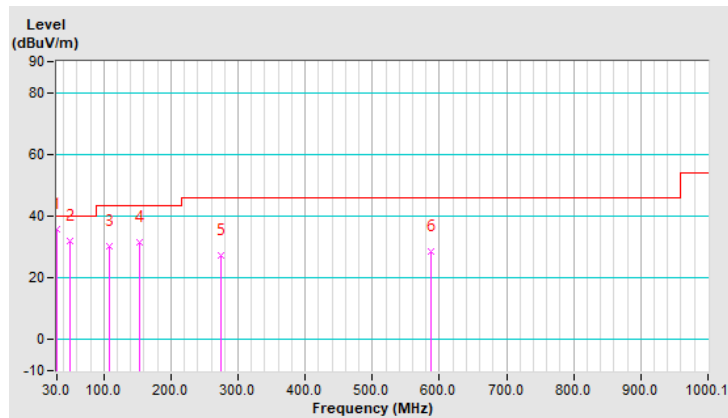


Type V

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.47	29.8 QP	40.0	-10.2	1.50 H	81	38.9	-9.1
2	108.73	32.3 QP	43.5	-11.2	1.50 H	284	44.2	-11.9
3	152.32	30.3 QP	43.5	-13.2	1.00 H	304	38.8	-8.5
4	186.06	27.9 QP	43.5	-15.6	1.00 H	257	38.3	-10.4
5	273.23	28.4 QP	46.0	-17.6	1.50 H	162	35.9	-7.5
6	479.90	26.5 QP	46.0	-19.5	2.00 H	252	29.1	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

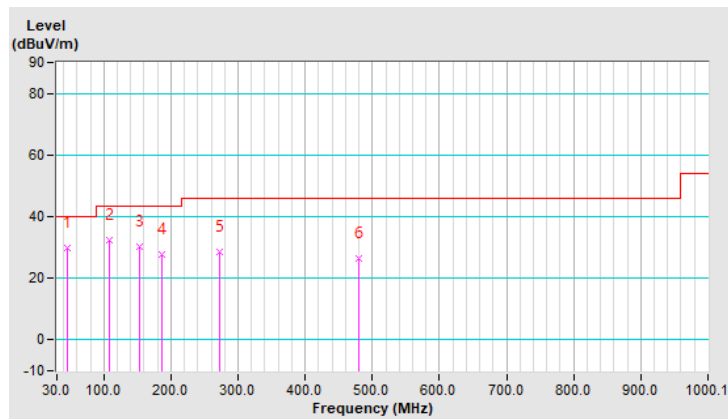


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	23 deg. C, 66% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	49.68	30.9 QP	40.0	-9.1	1.00 V	212	40.0	-9.1
2	108.73	30.2 QP	43.5	-13.3	1.50 V	223	42.1	-11.9
3	156.53	27.7 QP	43.5	-15.8	1.50 V	314	36.1	-8.4
4	194.50	25.0 QP	43.5	-18.5	1.50 V	191	36.1	-11.1
5	263.39	24.3 QP	46.0	-21.7	2.00 V	26	32.4	-8.1
6	531.92	27.6 QP	46.0	-18.4	1.50 V	229	29.2	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

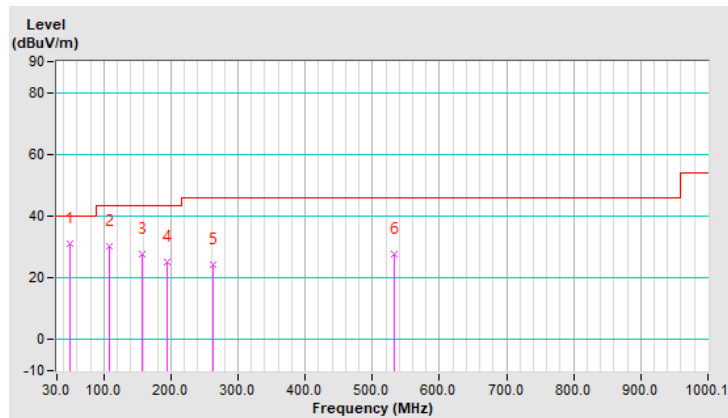

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

Tested date: Set. 10, 2020

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESR3	102412	Feb. 17, 2020	Feb. 16, 2021
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond2-01	Sep. 04, 2020	Sep. 03, 2021
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Jan. 20, 2020	Jan. 19, 2021
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Aug. 18, 2020	Aug. 17, 2021
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 2 (Conduction 2).

3. The VCCI Site Registration No. is C-2047.



#### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

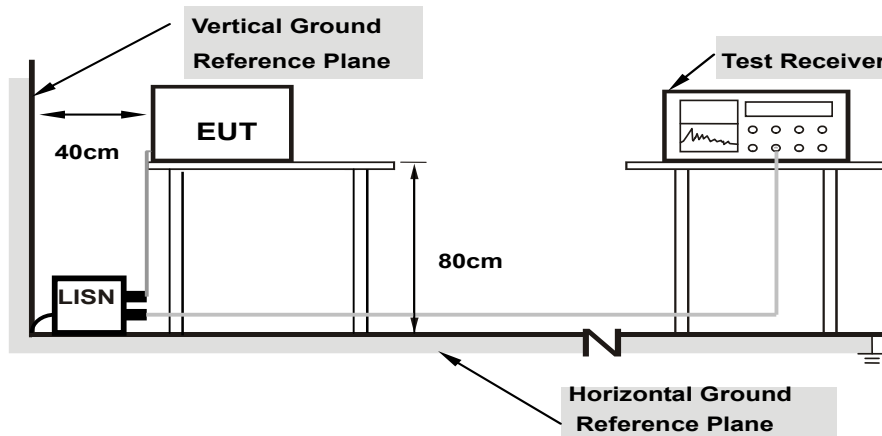

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

Same as 4.1.6.

#### 4.2.7 Test Results


##### Mode A1

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.23100	10.10	38.27	30.37	48.37	40.47	62.41
2	0.35440	10.10	34.70	27.88	44.80	37.98	58.86	48.86	-14.06	-10.88
3	0.77775	10.13	29.04	20.60	39.17	30.73	56.00	46.00	-16.83	-15.27
4	2.24250	10.18	26.23	16.26	36.41	26.44	56.00	46.00	-19.59	-19.56
5	8.61675	10.28	20.57	15.19	30.85	25.47	60.00	50.00	-29.15	-24.53
6	13.56000	10.34	36.28	36.24	46.62	46.58	60.00	50.00	-13.38	-3.42

##### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

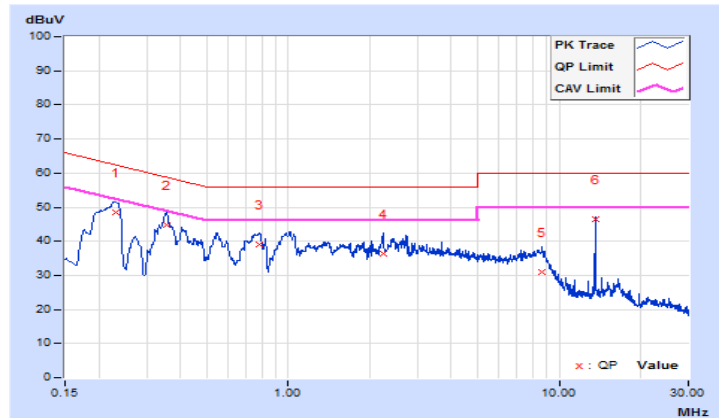


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16307	10.06	21.61	6.38	31.67	16.44	65.31
2	0.21300	10.06	38.27	29.54	48.33	39.60	63.09	53.09	-14.76	-13.49
3	0.31875	10.07	31.29	22.00	41.36	32.07	59.74	49.74	-18.38	-17.67
4	0.77775	10.11	28.07	19.92	38.18	30.03	56.00	46.00	-17.82	-15.97
5	13.56000	10.47	36.85	36.81	47.32	47.28	60.00	50.00	-12.68	-2.72
6	16.41075	10.53	16.79	9.39	27.32	19.92	60.00	50.00	-32.68	-30.08

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

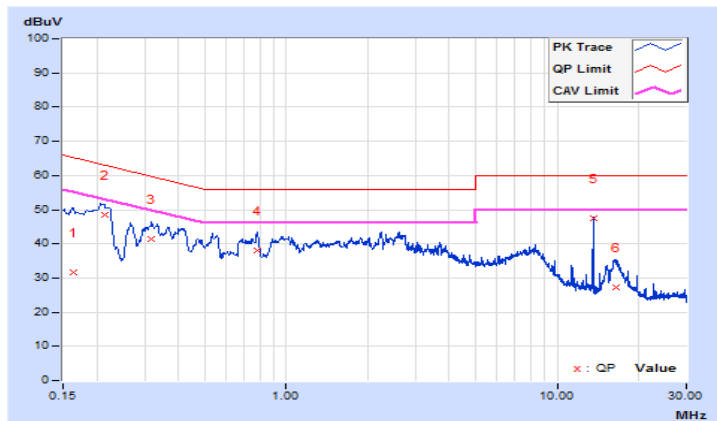


Mode A2

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.23325	10.10	38.60	29.92	48.70	40.02	62.33
2	0.35161	10.10	34.85	26.12	44.95	36.22	58.92	48.92	-13.97	-12.70
3	0.78667	10.13	28.65	18.69	38.78	28.82	56.00	46.00	-17.22	-17.18
4	2.66550	10.19	22.30	15.18	32.49	25.37	56.00	46.00	-23.51	-20.63
5	8.87325	10.29	19.27	13.93	29.56	24.22	60.00	50.00	-30.44	-25.78
6	13.56000	10.34	36.21	36.18	46.55	46.52	60.00	50.00	-13.45	-3.48

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

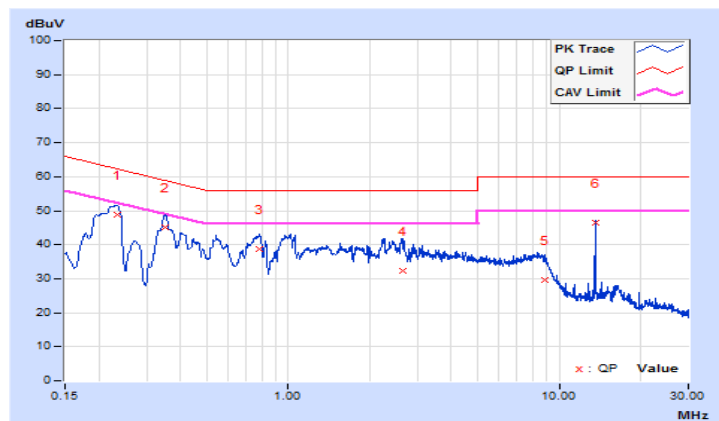


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15000	10.06	17.15	9.12	27.21	19.18	66.00
2	0.21291	10.06	38.41	29.80	48.47	39.86	63.09	53.09	-14.62	-13.23
3	0.33440	10.07	32.98	22.95	43.05	33.02	59.34	49.34	-16.29	-16.32
4	2.23800	10.16	26.62	17.38	36.78	27.54	56.00	46.00	-19.22	-18.46
5	8.20275	10.34	21.17	15.85	31.51	26.19	60.00	50.00	-28.49	-23.81
6	13.56000	10.47	36.35	36.31	46.82	46.78	60.00	50.00	-13.18	-3.22

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

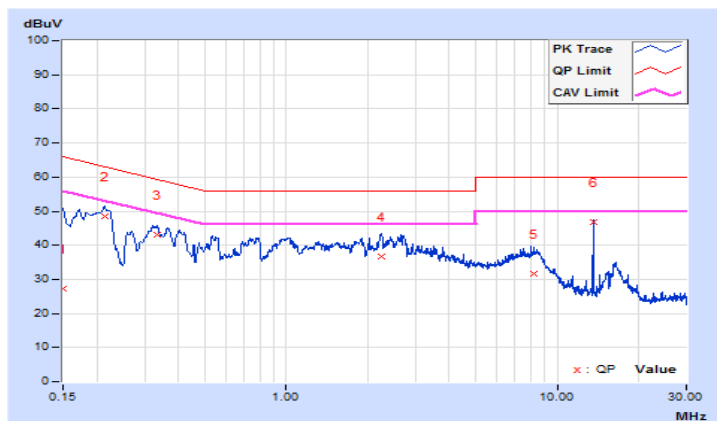


Mode B1

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16743	10.09	35.54	18.38	45.63	28.47	65.09
2	0.22425	10.10	28.58	13.83	38.68	23.93	62.66	52.66	-23.98	-28.73
3	0.38871	10.10	23.63	13.41	33.73	23.51	58.09	48.09	-24.36	-24.58
4	1.11300	10.15	6.79	1.61	16.94	11.76	56.00	46.00	-39.06	-34.24
5	10.81725	10.31	11.14	5.76	21.45	16.07	60.00	50.00	-38.55	-33.93
6	13.56000	10.34	40.74	39.23	51.08	49.57	60.00	50.00	-8.92	-0.43

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

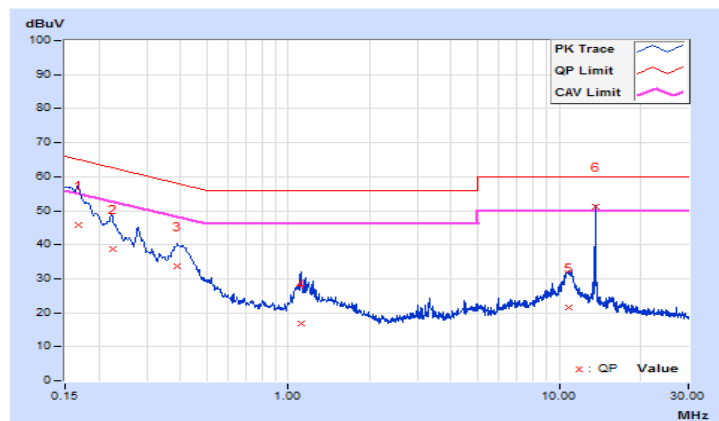


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15675	10.06	41.70	24.38	51.76	34.44	65.63
2	0.18600	10.06	35.47	18.36	45.53	28.42	64.21	54.21	-18.68	-25.79
3	0.40650	10.08	27.37	17.62	37.45	27.70	57.72	47.72	-20.27	-20.02
4	1.11975	10.13	7.53	2.55	17.66	12.68	56.00	46.00	-38.34	-33.32
5	10.86450	10.41	11.11	5.62	21.52	16.03	60.00	50.00	-38.48	-33.97
6	13.56000	10.47	40.56	39.21	51.03	49.68	60.00	50.00	-8.97	-0.32

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

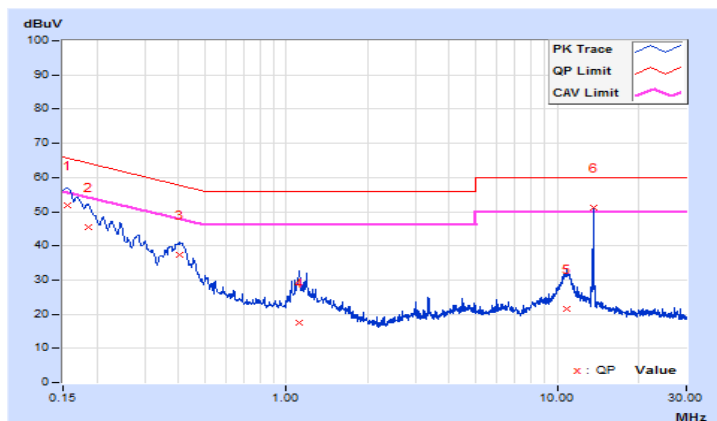

Mode B2

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15225	10.09	38.75	22.45	48.84	32.54	65.88
2	0.20175	10.10	31.27	15.00	41.37	25.10	63.54	53.54	-22.17	-28.44
3	0.35440	10.10	16.38	4.56	26.48	14.66	58.86	48.86	-32.38	-34.20
4	1.17514	10.15	6.67	0.78	16.82	10.93	56.00	46.00	-39.18	-35.07
5	10.74975	10.31	12.39	6.29	22.70	16.60	60.00	50.00	-37.30	-33.40
6	13.56000	10.34	40.76	39.33	51.10	49.67	60.00	50.00	-8.90	-0.33

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.






Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16966	10.06	36.82	19.04	46.88	29.10	64.98
2	0.19721	10.06	33.31	16.76	43.37	26.82	63.73	53.73	-20.36	-26.91
3	0.40017	10.08	26.93	18.52	37.01	28.60	57.85	47.85	-20.84	-19.25
4	2.99400	10.19	6.61	2.57	16.80	12.76	56.00	46.00	-39.20	-33.24
5	10.68900	10.41	11.64	6.08	22.05	16.49	60.00	50.00	-37.95	-33.51
<b>6</b>	<b>13.56000</b>	<b>10.47</b>	<b>40.57</b>	<b>39.41</b>	<b>51.04</b>	<b>49.88</b>	<b>60.00</b>	<b>50.00</b>	<b>-8.96</b>	<b>-0.12</b>

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

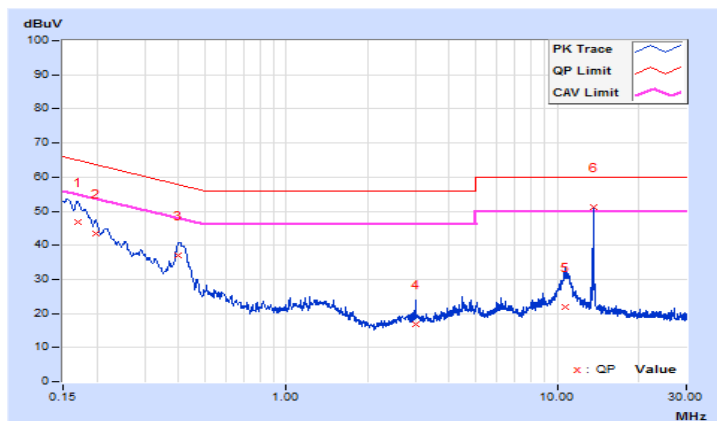


Mode C1

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16093	10.09	40.37	22.80	50.46	32.89	65.42
2	0.27600	10.10	22.70	10.57	32.80	20.67	60.94	50.94	-28.14	-30.27
3	0.39701	10.10	25.26	17.32	35.36	27.42	57.92	47.92	-22.56	-20.50
4	1.16250	10.15	6.28	0.57	16.43	10.72	56.00	46.00	-39.57	-35.28
5	10.72500	10.31	11.41	6.18	21.72	16.49	60.00	50.00	-38.28	-33.51
6	13.56000	10.34	40.22	38.94	50.56	49.28	60.00	50.00	-9.44	-0.72

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

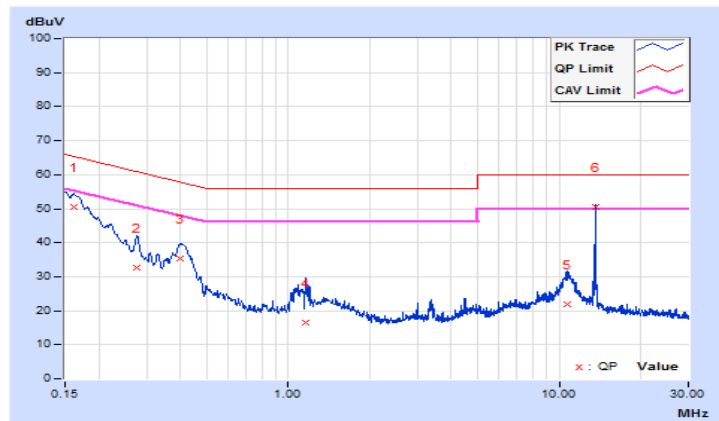


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15427	10.06	41.28	23.84	51.34	33.90	65.77
2	0.19258	10.06	33.47	16.05	43.53	26.11	63.92	53.92	-20.39	-27.81
3	0.41854	10.08	26.00	17.98	36.08	28.06	57.48	47.48	-21.40	-19.42
4	1.17514	10.13	7.17	0.57	17.30	10.70	56.00	46.00	-38.70	-35.30
5	10.84200	10.41	11.35	6.08	21.76	16.49	60.00	50.00	-38.24	-33.51
6	13.56000	10.47	40.15	39.11	50.62	49.58	60.00	50.00	-9.38	-0.42

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

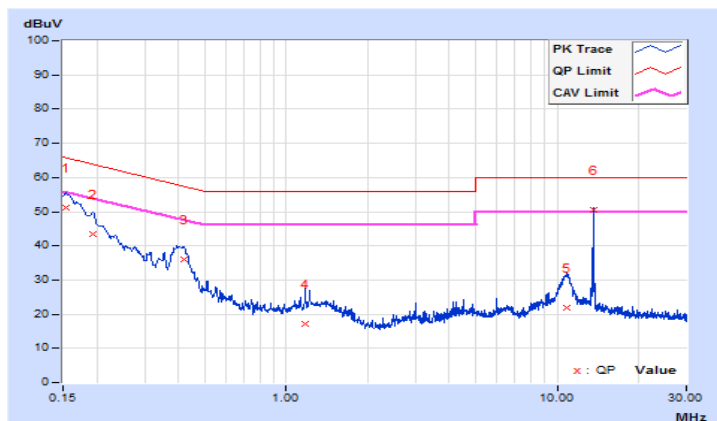


Mode C2

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15674	10.09	40.74	23.87	50.83	33.96	65.63
2	0.29400	10.10	21.75	12.11	31.85	22.21	60.41	50.41	-28.56	-28.20
3	0.40650	10.10	27.29	18.56	37.39	28.66	57.72	47.72	-20.33	-19.06
4	1.16587	10.15	5.90	0.83	16.05	10.98	56.00	46.00	-39.95	-35.02
5	10.62375	10.31	11.29	6.38	21.60	16.69	60.00	50.00	-38.40	-33.31
6	13.56000	10.34	40.31	39.22	50.65	49.56	60.00	50.00	-9.35	-0.44

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

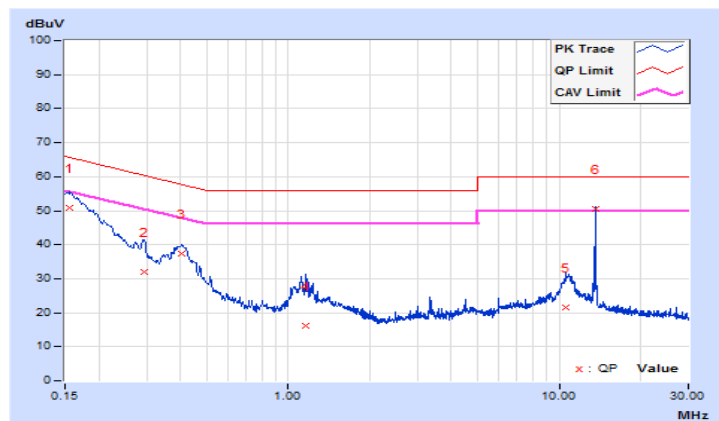


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15225	10.06	39.54	22.90	49.60	32.96	65.88
2	0.18600	10.06	35.56	18.71	45.62	28.77	64.21	54.21	-18.59	-25.44
3	0.40335	10.08	27.57	18.23	37.65	28.31	57.78	47.78	-20.13	-19.47
4	1.27500	10.14	7.87	1.84	18.01	11.98	56.00	46.00	-37.99	-34.02
5	10.69800	10.41	12.08	6.58	22.49	16.99	60.00	50.00	-37.51	-33.01
6	13.56000	10.47	40.48	39.11	50.95	49.58	60.00	50.00	-9.05	-0.42

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

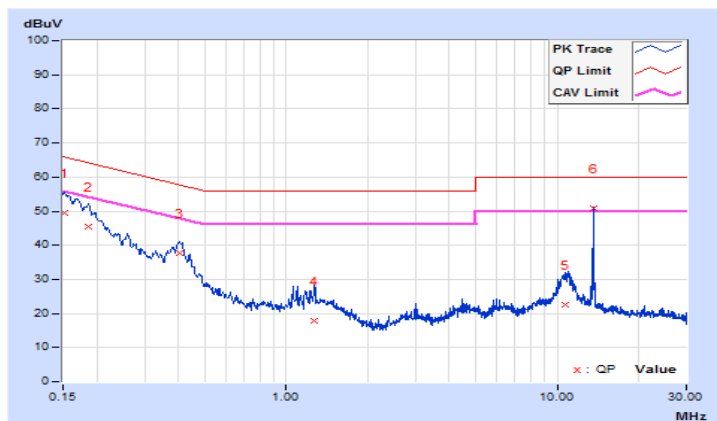


### 4.3 Frequency Stability

#### 4.3.1 Limits of Frequency Stability Measurement

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

#### 4.3.2 Test Setup

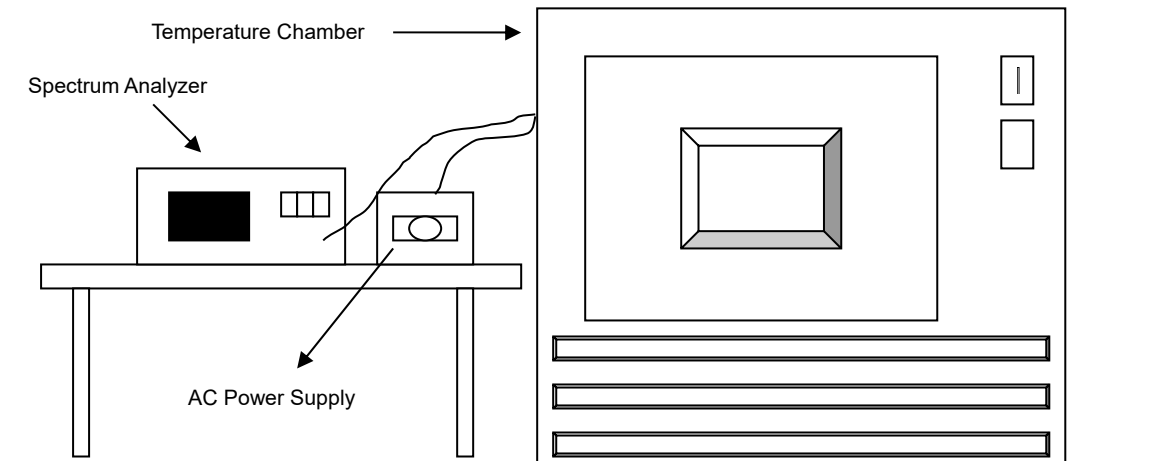

#### 4.3.3 Test Instruments

Tested date: Aug. 26, 2020

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Jun. 12, 2020	Jun. 11, 2021
Standard Temperature And Humidity Chamber	MHU-225AU	920842	May 28, 2020	May 27, 2021
Digital Multimeter Fluke	87-III	70360742	Jun. 23, 2020	Jun. 22, 2021
AC Power Supply Extech	CFW-105	E000603	NA	NA
AC Power Supply Extech	CFW-105	E000603	NA	NA

#### 4.3.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- Turned the EUT on and coupled its output to a spectrum analyzer.
- Turned the EUT off and set the chamber to the highest temperature specified.
- Allowed sufficient time (approximately 30 min) for the temperature of the chamber to stabilize then turned the EUT on and measured the operating frequency after 2, 5, and 10 minutes.
- Repeat step (d) with the temperature chamber set to the next desired temperature until measurements down to the lowest specified temperature have been completed.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions

Same as Item 4.1.6.

#### 4.3.7 Test Result

##### Mode A1

Frequency Stability Versus Temp.									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
50	120	13.56003	0.00022	13.56003	0.00022	13.56003	0.00022	13.56004	0.00029
40	120	13.56003	0.00022	13.56003	0.00022	13.56003	0.00022	13.56003	0.00022
30	120	13.56004	0.00029	13.56005	0.00037	13.56005	0.00037	13.56005	0.00037
20	120	13.55998	-0.00015	13.55998	-0.00015	13.55998	-0.00015	13.55998	-0.00015
10	120	13.56006	0.00044	13.56006	0.00044	13.56006	0.00044	13.56006	0.00044
0	120	13.55996	-0.00029	13.55996	-0.00029	13.55996	-0.00029	13.55995	-0.00037
-10	120	13.55995	-0.00037	13.55996	-0.00029	13.55995	-0.00037	13.55995	-0.00037
-20	120	13.55997	-0.00022	13.55997	-0.00022	13.55998	-0.00015	13.55998	-0.00015

Frequency Stability Versus Voltage									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
20	138	13.55998	-0.00015	13.55998	-0.00015	13.55998	-0.00015	13.55998	-0.00015
	120	13.55998	-0.00015	13.55998	-0.00015	13.55998	-0.00015	13.55998	-0.00015
	102	13.55998	-0.00015	13.55998	-0.00015	13.55998	-0.00015	13.55998	-0.00015

Mode A2

Frequency Stability Versus Temp.									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
50	120	13.55998	-0.00015	13.55997	-0.00022	13.55999	-0.00007	13.55998	-0.00015
40	120	13.55996	-0.00029	13.55996	-0.00029	13.55996	-0.00029	13.55996	-0.00029
30	120	13.55996	-0.00029	13.55996	-0.00029	13.55997	-0.00022	13.55996	-0.00029
20	120	13.56006	0.00044	13.56005	0.00037	13.56007	0.00052	13.56006	0.00044
10	120	13.56001	0.00007	13.56002	0.00015	13.56001	0.00007	13.56001	0.00007
0	120	13.55995	-0.00037	13.55994	-0.00044	13.55996	-0.00029	13.55995	-0.00037
-10	120	13.55993	-0.00052	13.55993	-0.00052	13.55992	-0.00059	13.55993	-0.00052
-20	120	13.55996	-0.00029	13.55996	-0.00029	13.55996	-0.00029	13.55996	-0.00029

Frequency Stability Versus Voltage									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
20	138	13.56006	0.00044	13.56005	0.00037	13.56007	0.00052	13.56006	0.00044
	120	13.56006	0.00044	13.56005	0.00037	13.56007	0.00052	13.56006	0.00044
	102	13.56006	0.00044	13.56005	0.00037	13.56007	0.00052	13.56006	0.00044



Mode B1

Frequency Stability Versus Temp.									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
50	120	13.55994	-0.00044	13.55994	-0.00044	13.55994	-0.00044	13.55993	-0.00052
40	120	13.55994	-0.00044	13.55994	-0.00044	13.55993	-0.00052	13.55994	-0.00044
30	120	13.55998	-0.00015	13.55998	-0.00015	13.55997	-0.00022	13.55998	-0.00015
20	120	13.55997	-0.00022	13.55997	-0.00022	13.55997	-0.00022	13.55997	-0.00022
10	120	13.56005	0.00037	13.56004	0.00029	13.56005	0.00037	13.56005	0.00037
0	120	13.55993	-0.00052	13.55994	-0.00044	13.55994	-0.00044	13.55994	-0.00044
-10	120	13.55995	-0.00037	13.55995	-0.00037	13.55995	-0.00037	13.55995	-0.00037
-20	120	13.56007	0.00052	13.56008	0.00059	13.56007	0.00052	13.56007	0.00052

Frequency Stability Versus Voltage									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
20	138	13.55997	-0.00022	13.55997	-0.00022	13.55997	-0.00022	13.55997	-0.00022
	120	13.55997	-0.00022	13.55997	-0.00022	13.55997	-0.00022	13.55997	-0.00022
	102	13.55997	-0.00022	13.55997	-0.00022	13.55997	-0.00022	13.55997	-0.00022

Mode B2

Frequency Stability Versus Temp.									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
50	120	13.56006	0.00044	13.56007	0.00052	13.56007	0.00052	13.56007	0.00052
40	120	13.56003	0.00022	13.56003	0.00022	13.56003	0.00022	13.56003	0.00022
30	120	13.56004	0.00029	13.56003	0.00022	13.56003	0.00022	13.56004	0.00029
20	120	13.56001	0.00007	13.56002	0.00015	13.56003	0.00022	13.56003	0.00022
10	120	13.56005	0.00037	13.56005	0.00037	13.56005	0.00037	13.56005	0.00037
0	120	13.55995	-0.00037	13.55996	-0.00029	13.55996	-0.00029	13.55996	-0.00029
-10	120	13.56003	0.00022	13.56003	0.00022	13.56003	0.00022	13.56004	0.00029
-20	120	13.55995	-0.00037	13.55995	-0.00037	13.55996	-0.00029	13.55996	-0.00029

Frequency Stability Versus Voltage									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
20	138	13.56001	0.00007	13.56002	0.00015	13.56003	0.00022	13.56003	0.00022
	120	13.56001	0.00007	13.56002	0.00015	13.56003	0.00022	13.56003	0.00022
	102	13.56001	0.00007	13.56002	0.00015	13.56003	0.00022	13.56003	0.00022

Mode C1

Frequency Stability Versus Temp.									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
50	120	13.55999	-0.00007	13.55998	-0.00015	13.55999	-0.00007	13.55999	-0.00007
40	120	13.55996	-0.00029	13.55995	-0.00037	13.55995	-0.00037	13.55995	-0.00037
30	120	13.55995	-0.00037	13.55995	-0.00037	13.55996	-0.00029	13.55995	-0.00037
20	120	13.56001	0.00007	13.56001	0.00007	13.56001	0.00007	13.56001	0.00007
10	120	13.56001	0.00007	13.56002	0.00015	13.56002	0.00015	13.56002	0.00015
0	120	13.56001	0.00007	13.56002	0.00015	13.56001	0.00007	13.56001	0.00007
-10	120	13.55994	-0.00044	13.55994	-0.00044	13.55994	-0.00044	13.55995	-0.00037
-20	120	13.56006	0.00044	13.56006	0.00044	13.56006	0.00044	13.56006	0.00044

Frequency Stability Versus Voltage									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
20	138	13.56001	0.00007	13.56001	0.00007	13.56001	0.00007	13.56001	0.00007
	120	13.56001	0.00007	13.56001	0.00007	13.56001	0.00007	13.56001	0.00007
	102	13.56001	0.00007	13.56001	0.00007	13.56001	0.00007	13.56001	0.00007

Mode C2

Frequency Stability Versus Temp.									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
50	120	13.56007	0.00052	13.56006	0.00044	13.56005	0.00037	13.56006	0.00044
40	120	13.55999	-0.00007	13.55999	-0.00007	13.55999	-0.00007	13.55999	-0.00007
30	120	13.55999	-0.00007	13.55999	-0.00007	13.55998	-0.00015	13.55998	-0.00015
20	120	13.55995	-0.00037	13.55994	-0.00044	13.55994	-0.00044	13.55995	-0.00037
10	120	13.56004	0.00029	13.56005	0.00037	13.56005	0.00037	13.56005	0.00037
0	120	13.56004	0.00029	13.56004	0.00029	13.56004	0.00029	13.56004	0.00029
-10	120	13.55997	-0.00022	13.55998	-0.00015	13.55997	-0.00022	13.55997	-0.00022
-20	120	13.55999	-0.00007	13.55999	-0.00007	13.55999	-0.00007	13.55999	-0.00007


Frequency Stability Versus Voltage									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
20	138	13.55995	-0.00037	13.55994	-0.00044	13.55994	-0.00044	13.55995	-0.00037
	120	13.55995	-0.00037	13.55994	-0.00044	13.55994	-0.00044	13.55995	-0.00037
	102	13.55995	-0.00037	13.55994	-0.00044	13.55994	-0.00044	13.55995	-0.00037

#### 4.4 20dB Bandwidth

##### 4.4.1 Limits of 20dB Bandwidth Measurement

The 20dB bandwidth shall be specified in operating frequency band.

##### 4.4.2 Test Setup

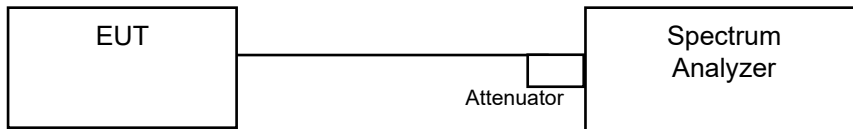

##### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

##### 4.4.4 Test Procedures

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 1kHz RBW and 3kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

##### 4.4.5 Deviation from Test Standard

No deviation.

##### 4.4.6 EUT Operating Conditions


Same as Item 4.1.6.

#### 4.4.7 Test Results

Mode A1

Type A


20dBc point (Low)	20dBc point (High)	Operating frequency band (MHz)	Pass / Fail
13.558621795	13.561217948846	13.553~13.567	Pass

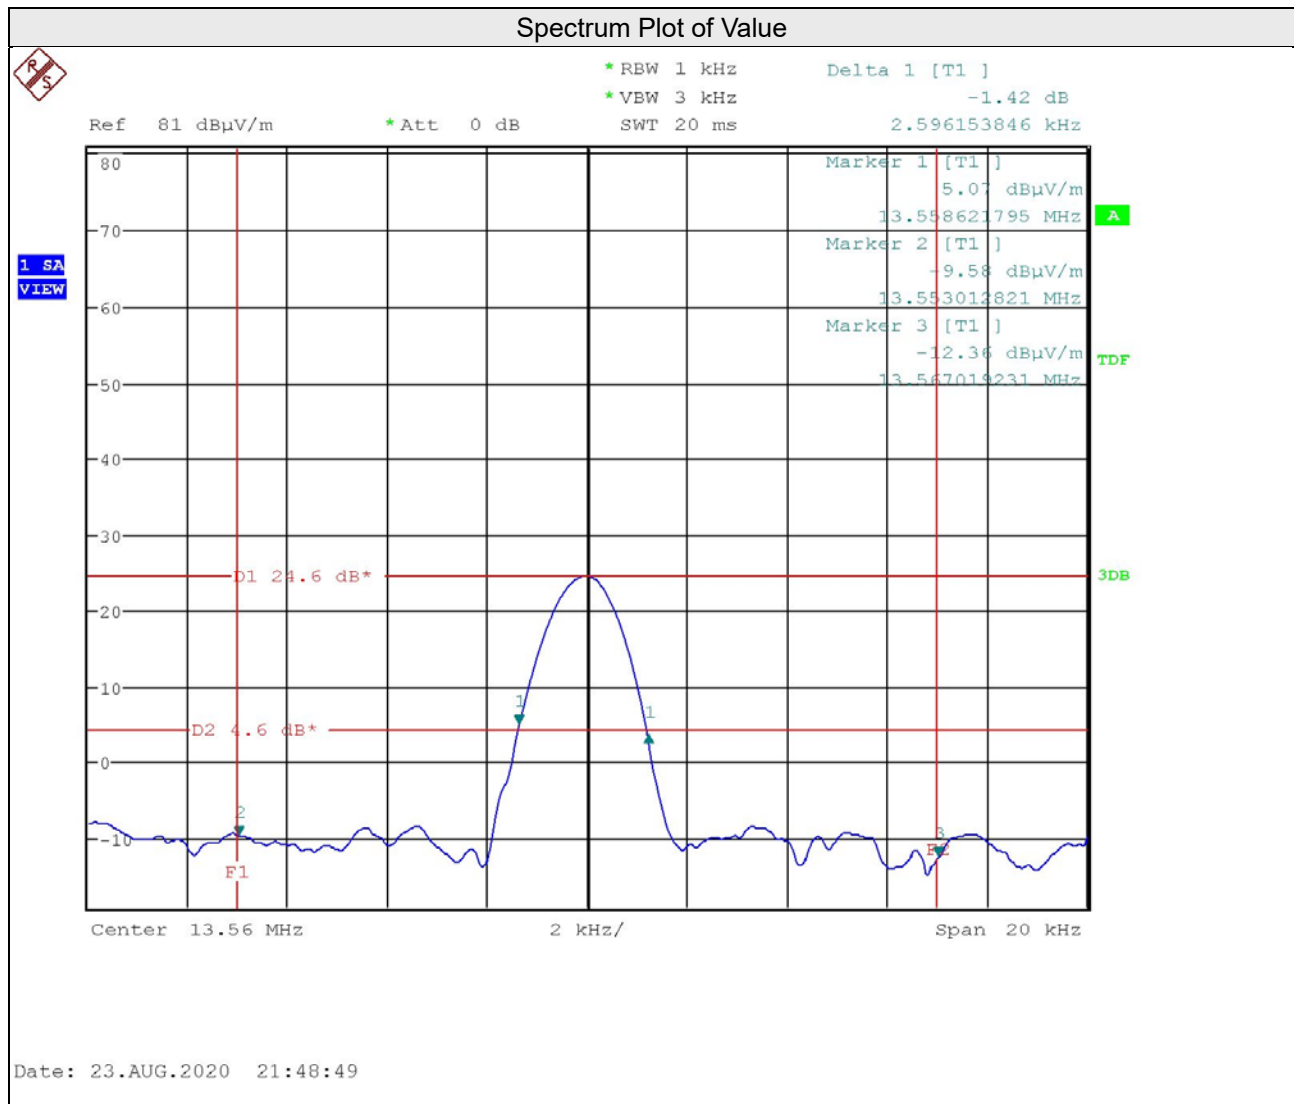

Mode A2

Type A


20dBc point (Low)	20dBc point (High)	Operating frequency band (MHz)	Pass / Fail
13.558589744	13.56125000041	13.553~13.567	Pass

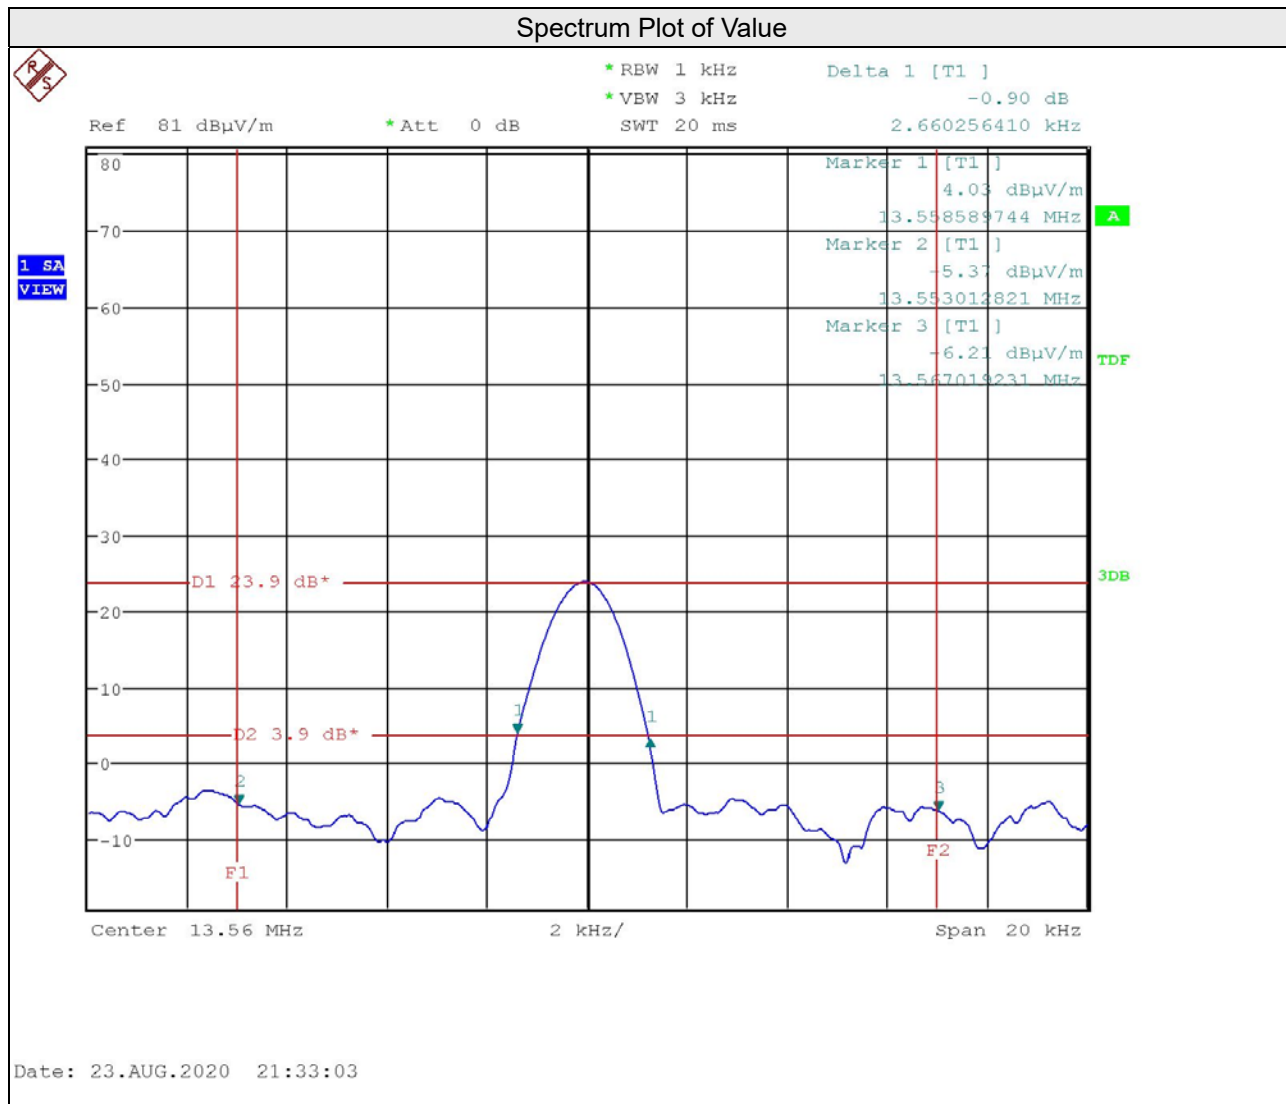

Mode B1

Type A

20dBc point (Low)	20dBc point (High)	Operating frequency band (MHz)	Pass / Fail
13.558429487	13.561378204949	13.553~13.567	Pass

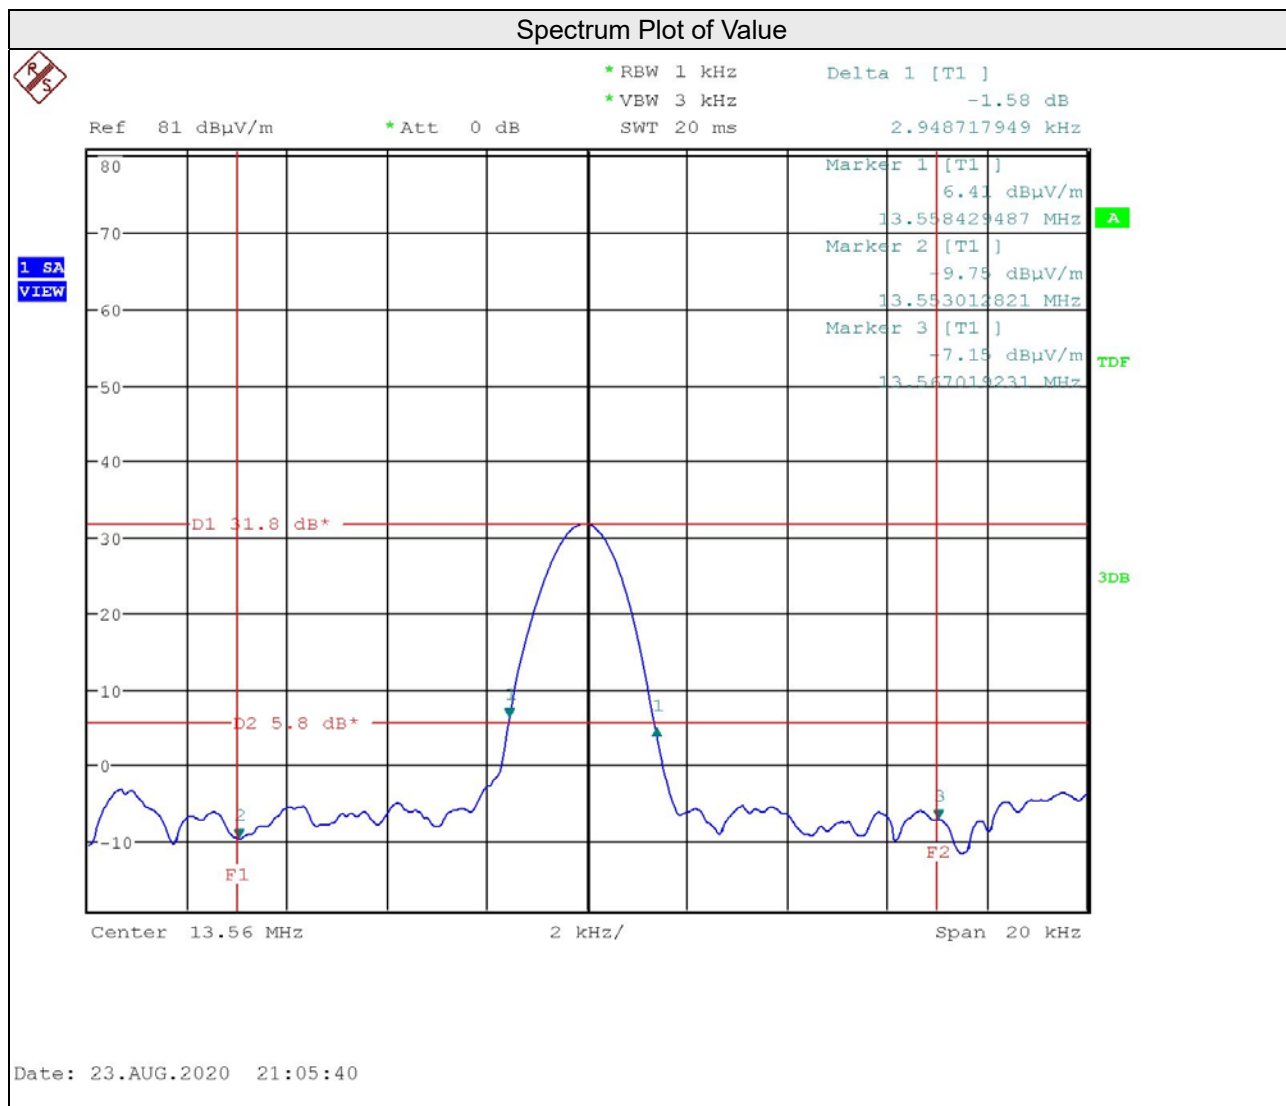




Mode B2

Type A


20dBc point (Low)	20dBc point (High)	Operating frequency band (MHz)	Pass / Fail
13.558621795	13.561217948846	13.553~13.567	Pass

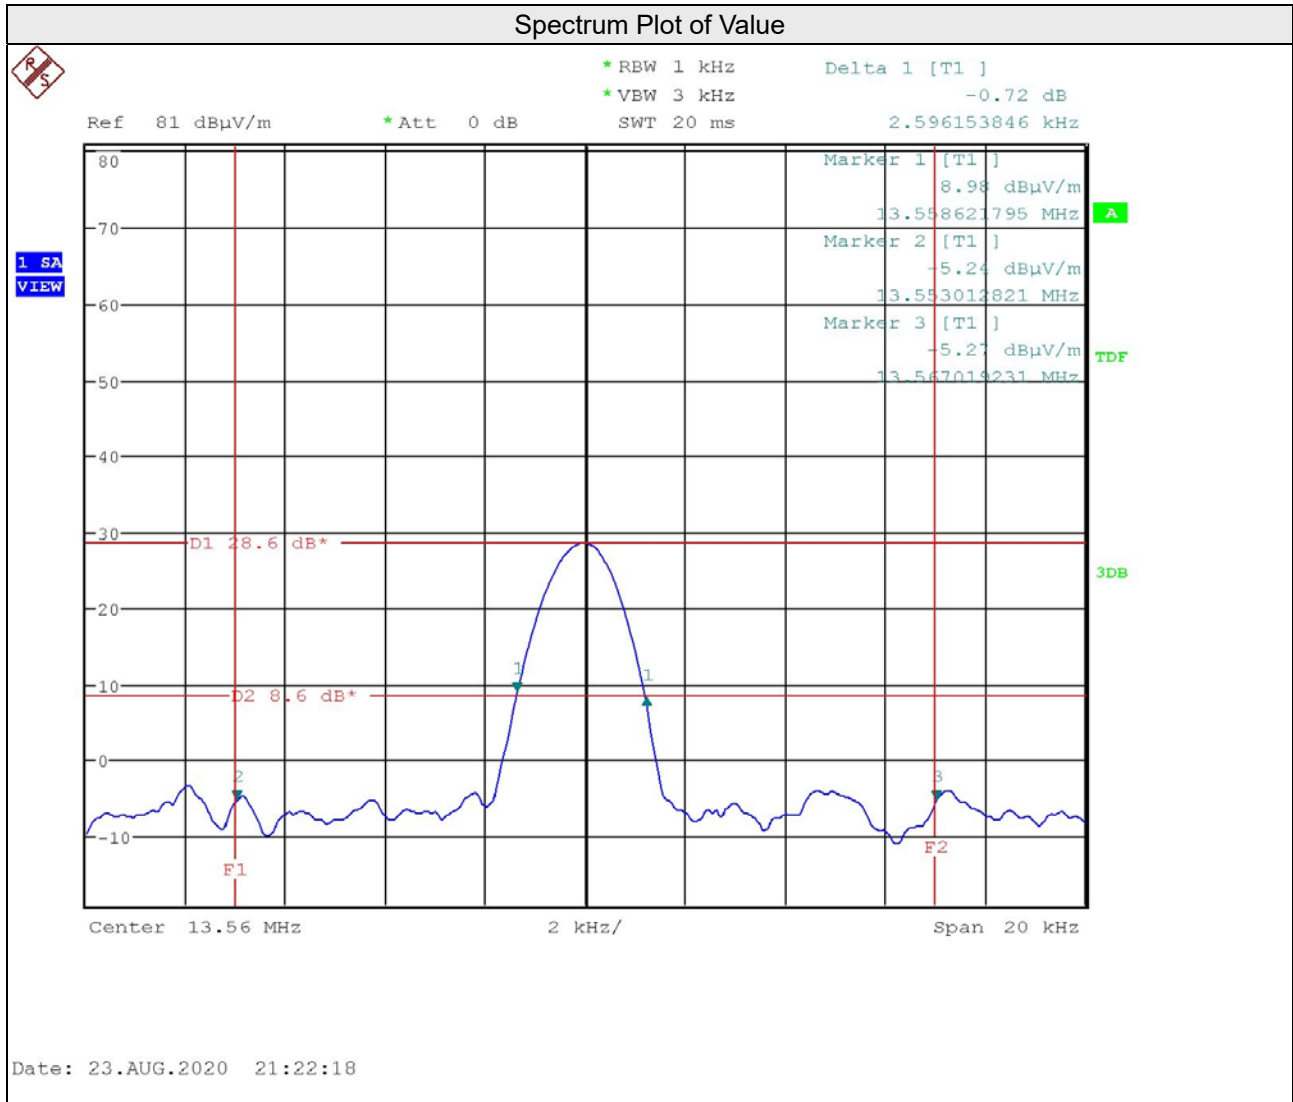

Mode C1  
X-Plane

Type A


20dBc point (Low)	20dBc point (High)	Operating frequency band (MHz)	Pass / Fail
13.558621795	13.561185897564	13.553~13.567	Pass

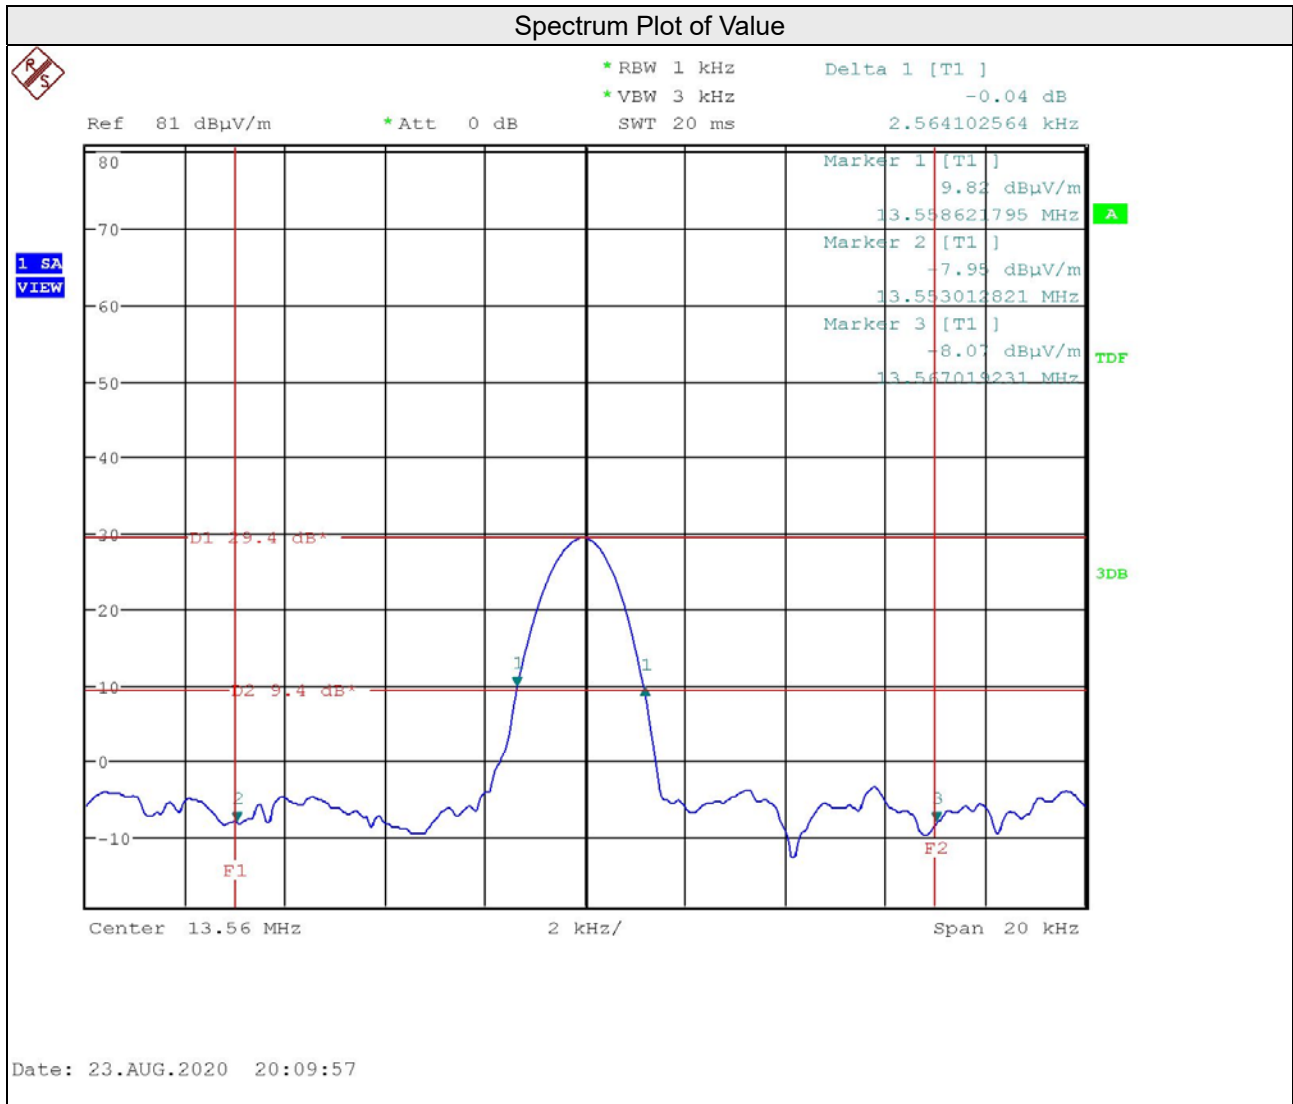

### Y-Plane

Type A

20dBc point (Low)	20dBc point (High)	Operating frequency band (MHz)	Pass / Fail
13.553012821	13.5569487228	13.553~13.567	Pass

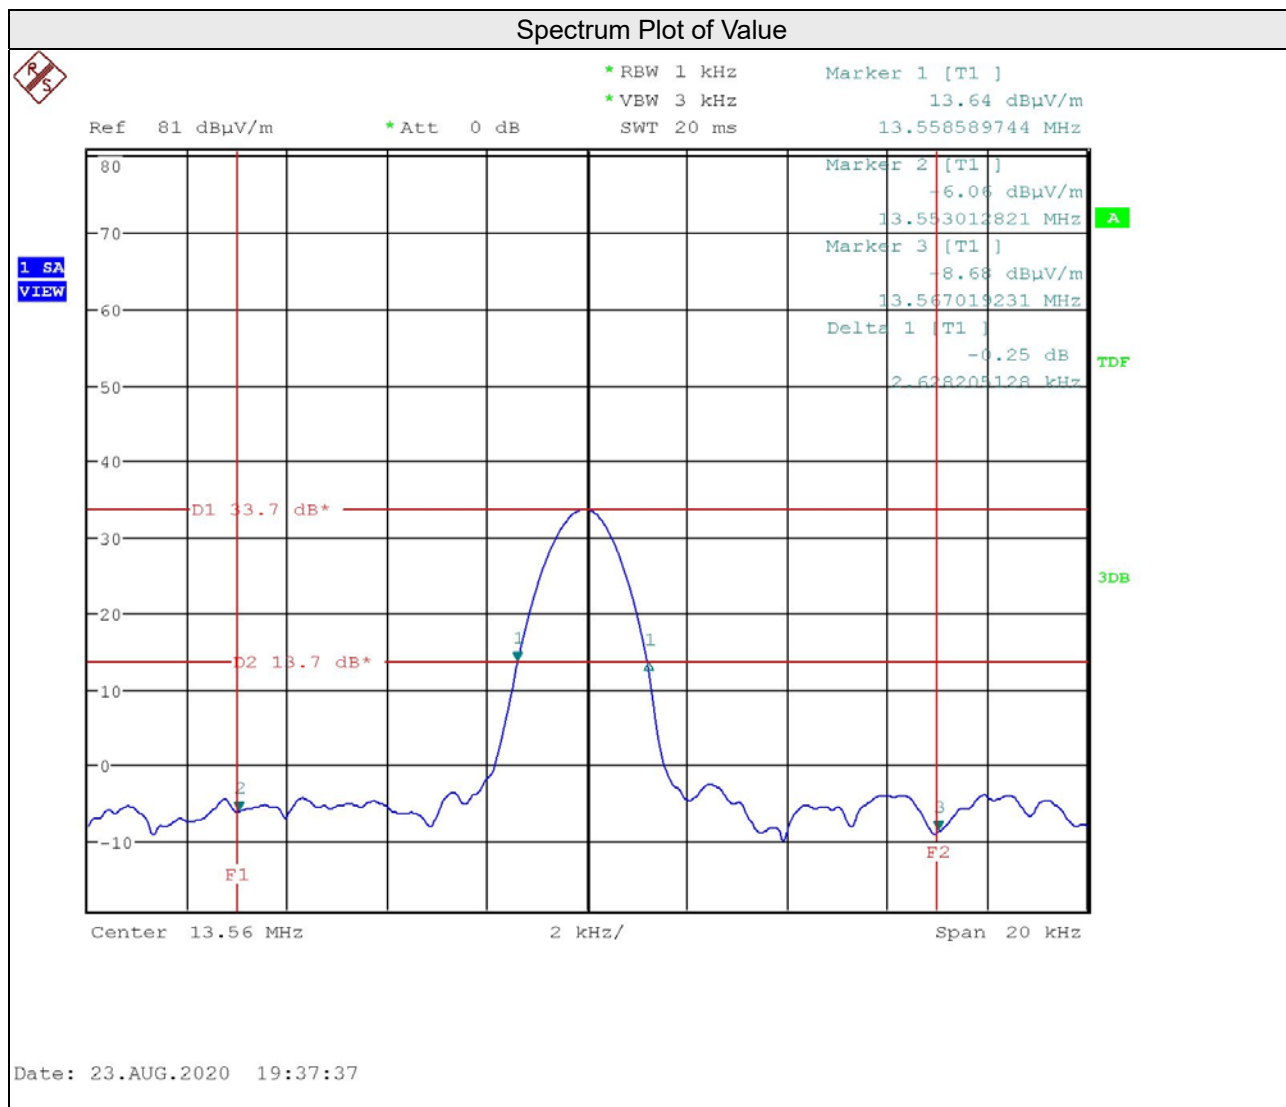


Mode C2

X-Plane

Type A


20dBc point (Low)	20dBc point (High)	Operating frequency band (MHz)	Pass / Fail
13.558621795	13.561217948846	13.553~13.567	Pass

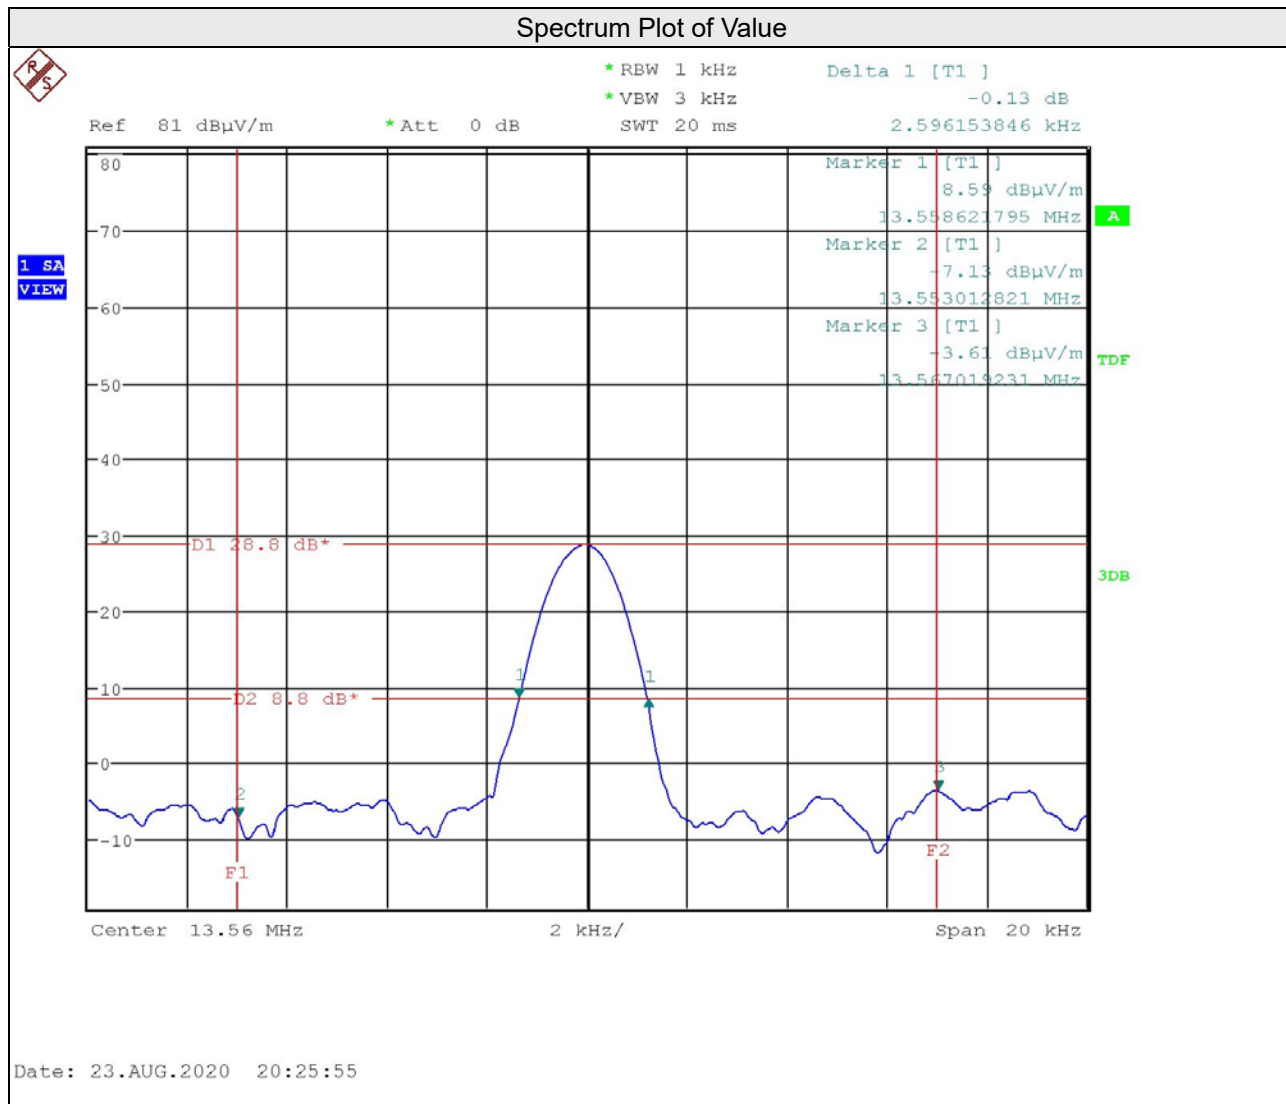

### Y-Plane

Type A

20dBc point (Low)	20dBc point (High)	Operating frequency band (MHz)	Pass / Fail
13.558557692	13.561185897128	13.553~13.567	Pass

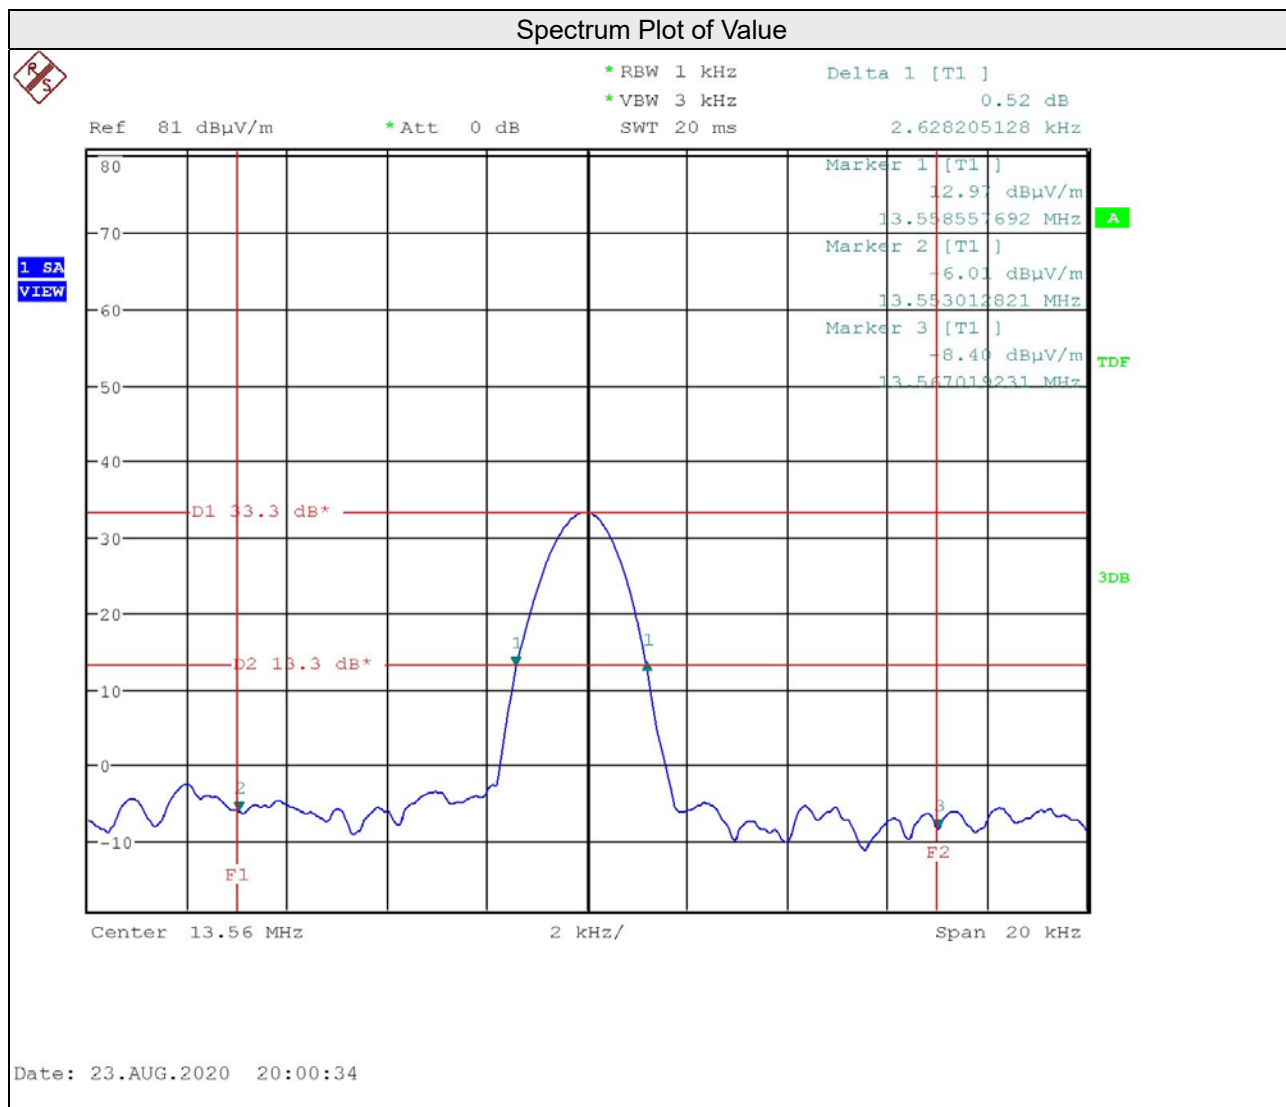

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

### Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

### Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---