

## FCC Test Report

**Report No.:** RFBEDV-WTW-P21060340

**FCC ID:** E2K-DWRFID2021

**Test Model:** DWRFID 2021

**Received Date:** Jun. 09, 2021

**Test Date:** Jun. 11 ~ Jun. 16, 2021

**Issued Date:** Jun. 28, 2021

**Applicant:** Dell Inc.

**Address:** One Dell Way, Round Rock, Texas 78682, USA

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, TAIWAN

**FCC Registration /** 788550 / TW0003  
**Designation Number:**



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

|   |           |
|---|-----------|
| <b>Release Control Record .....</b>                             | <b>3</b>  |
| <b>1 Certificate of Conformity.....</b>                         | <b>4</b>  |
| <b>2 Summary of Test Results .....</b>                          | <b>5</b>  |
| 2.1 Measurement Uncertainty .....                               | 5         |
| 2.2 Modification Record .....                                   | 5         |
| <b>3 General Information.....</b>                               | <b>6</b>  |
| 3.1 General Description of EUT .....                            | 6         |
| 3.2 Description of Test Modes .....                             | 6         |
| 3.2.1 Test Mode Applicability and Tested Channel Deta .....     | 7         |
| 3.3 Description of Support Units .....                          | 8         |
| 3.3.1 Configuration of System under Test .....                  | 8         |
| 3.4 General Description of Applied Standards .....              | 8         |
| <b>4 Test Types and Results .....</b>                           | <b>9</b>  |
| 4.1 Radiated Emission Measurement .....                         | 9         |
| 4.1.1 Limits of Radiated Emission Measurement .....             | 9         |
| 4.1.2 Test Instruments .....                                    | 10        |
| 4.1.3 Test Procedures.....                                      | 11        |
| 4.1.4 Deviation from Test Standard .....                        | 11        |
| 4.1.5 Test Set Up .....   | 12        |
| 4.1.6 EUT Operating Conditions.....                             | 12        |
| 4.1.7 Test Results .....  | 13        |
| 4.2 Conducted Emission Measurement .....                        | 30        |
| 4.2.1 Limits of Conducted Emission Measurement .....            | 30        |
| 4.2.2 Test Instruments .....                                    | 30        |
| 4.2.3 Test Procedures.....                                      | 31        |
| 4.2.4 Deviation from Test Standard .....                        | 31        |
| 4.2.5 Test Setup.....   | 31        |
| 4.2.6 EUT Operating Conditions.....                             | 31        |
| 4.2.7 Test Results .....  | 32        |
| 4.3 Frequency Stability.....                                    | 34        |
| 4.3.1 Limits of Frequency Stability Measurement .....           | 34        |
| 4.3.2 Test Setup.....   | 34        |
| 4.3.3 Test Instruments .....                                    | 34        |
| 4.3.4 Test Procedure .....                                      | 34        |
| 4.3.5 Deviation fromTest Standard .....                         | 35        |
| 4.3.6 EUT Operating Conditions.....                             | 35        |
| 4.3.7 Test Result.....  | 35        |
| 4.4 20dB Bandwidth .....  | 36        |
| 4.4.1 Limits of 20dB Bandwidth Measurement .....                | 36        |
| 4.4.2 Test Setup.....   | 36        |
| 4.4.3 Test Instruments .....                                    | 36        |
| 4.4.4 Test Procedures.....                                      | 36        |
| 4.4.5 Deviation from Test Standard .....                        | 36        |
| 4.4.6 EUT Operating Conditions.....                             | 36        |
| 4.4.7 Test Results .....  | 37        |
| <b>5 Pictures of Test Arrangements.....</b>                     | <b>38</b> |
| <b>Appendix – Information of the Testing Laboratories .....</b> | <b>39</b> |

### Release Control Record

| Issue No.            | Description      | Date Issued   |
|----------------------|------------------|---------------|
| RFBEDV-WTW-P21060340 | Original release | Jun. 28, 2021 |

## 1 Certificate of Conformity

**Product:** RFID 13.56MHz Wireless Module

**Brand:** DELL

**Test Model:** DWRFID 2021

**Sample Status:** Engineering sample

**Applicant:** Dell Inc.

**Test Date:** Jun. 11 ~ Jun. 16, 2021

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.225)  
47 CFR FCC Part 15, Subpart C (Section 15.215)  
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :** Celine Chou , **Date:** Jun. 28, 2021  
Celine Chou / Senior Specialist

**Approved by :** Bruce Chen , **Date:** Jun. 28, 2021  
Bruce Chen / Senior Project Engineer

## 2 Summary of Test Results

### 47 CFR FCC Part 15, Subpart C (Section 15.225, 15.215)

| FCC Clause | Test Item  | Result | Remarks  |
|------------|--|--------|--|
| 15.207     | Conducted emission test  | Pass   | Meet the requirement of limit.<br>Minimum passing margin is -7.08dB at 13.56130MHz |
| 15.225 (a) | The field strength of any emissions within the band 13.553-13.567 MHz                        | Pass   | Meet the requirement of limit.<br>Minimum passing margin is -74.5dB at 13.56MHz.   |
| 15.225 (b) | The field strength of any emissions within the bands 13.410-13.553 MHz and 13.567-13.710 MHz | Pass   | Meet the requirement of limit.   |
| 15.225 (c) | The field strength of any emissions within the bands 13.110-13.410 MHz and 13.710-14.010 MHz | Pass   | Meet the requirement of limit.   |
| 15.225 (d) | The field strength of any emissions appearing outside of the 13.110-14.010 MHz band          | Pass   | Meet the requirement of limit.<br>Minimum passing margin is -10.1dB at 303.57MHz.  |
| 15.225 (e) | The frequency tolerance  | Pass   | Meet the requirement of limit.   |
| 15.215 (c) | 20dB Bandwidth   | Pass   | Meet the requirement of limit.   |

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| Measurement                        | Frequency        | Expanded Uncertainty (k=2) ( $\pm$ ) |
|------------------------------------|------------------|--------------------------------------|
| Conducted Emissions at mains ports | 150kHz ~ 30MHz   | 2.79 dB                              |
| Radiated Emissions up to 1 GHz     | 9kHz ~ 30MHz     | 3.04 dB                              |
|                                    | 30MHz ~ 200MHz   | 3.63 dB                              |
|                                    | 200MHz ~ 1000MHz | 3.64 dB                              |

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

|                     |  |
|---------------------|--|
| Product             | RFID 13.56MHz Wireless Module  |
| Brand               | DELL   |
| Test Model          | DWRFID 2021  |
| Sample Status       | Engineering sample   |
| Power Supply Rating | 5 or 9 or 15 or 20Vdc (adapter) for End-product<br>11.4Vdc (battery) for End-product   |
| Modulation Type     | ASK  |
| Data Rate           | Type A: 106 kbit/s<br>Type B: 106 kbit/s<br>Type F: 212 kbit/s, 424 kbit/s<br>Type V: 848 kbit/s   |
| Operating Frequency | 13.56MHz   |
| Field Strength      | 9.5dBuV/m (30m)  |
| Antenna Type        | Loop antenna<br>(The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.) |
| Accessory Device    | NA   |
| Data Cable Supplied | NA   |

Note:

1. The EUT is authorized for use in specific End-product. Please refer to below table for further details.

| Product Name      | Brand | Model           |
|-------------------|-------|-----------------|
| Notebook Computer | DELL  | P149G, P149G001 |

2. The End-product contains following accessory devices.

| Product | Brand | Model     | Description  |
|---------|-------|-----------|--|
| Adapter | DELL  | LA65NM190 | I/P: 100-240Vac, 1.7A, 50-60Hz<br>O/P: 5Vdc, 3A, 15W; 9Vdc, 3A, 27W;<br>15Vdc, 3A, 45W; 20Vdc, 3.25A, 65W<br>1.76m DC cable without core attached on adapter |
| Battery | DELL  | XVJNP     | 3cell 53.5Wh (11.4Vdc, 4457mAh)  |

#### 3.2 Description of Test Modes

1 channel is provided to this EUT

| Channel | Freq. (MHz) |
|---------|-------------|
| 1       | 13.56       |

### 3.2.1 Test Mode Applicability and Tested Channel Data

| EUT Configure Mode | Applicable to |     |    |    | Description                |
|--------------------|---------------|-----|----|----|----------------------------|
|                    | RE            | PLC | FS | EB |                            |
| -                  | √             | √   | √  | √  | EUT with End-product P149G |

Where

RE: Radiated Emission

PLC: Power Line Conducted Emission

FS: Frequency Stability

EB: 20dB Bandwidth measurement

#### **Radiated Emission Test:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT Configure Mode | Available Channel | Tested Channel | Modulation Type |
|--------------------|-------------------|----------------|-----------------|
| -                  | 1                 | 1              | ASK             |

#### **Power Line Conducted Emission Test:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT Configure Mode | Available Channel | Tested Channel | Modulation Type |
|--------------------|-------------------|----------------|-----------------|
| -                  | 1                 | 1              | ASK             |

#### **Frequency Stability:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT Configure Mode | Available Channel | Tested Channel | Modulation Type |
|--------------------|-------------------|----------------|-----------------|
| -                  | 1                 | 1              | ASK             |

#### **20dB Bandwidth:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT Configure Mode | Available Channel | Tested Channel | Modulation Type |
|--------------------|-------------------|----------------|-----------------|
| -                  | 1                 | 1              | ASK             |

#### **Test Condition:**

| Applicable to | Environmental Conditions | Input Power (System) | Tested by |
|---------------|--------------------------|----------------------|-----------|
| RE            | 25 deg. C, 70% RH        | 120Vac, 60Hz         | Hans Wu   |
| PLC           | 25 deg. C, 75% RH        | 120Vac, 60Hz         | Hans Wu   |
| FS            | 25 deg. C, 70% RH        | 120Vac, 60Hz         | Hans Wu   |
| BW            | 25 deg. C, 70% RH        | 120Vac, 60Hz         | Hans Wu   |


### 3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| ID | Product           | Brand   | Model No.   | Serial No.                   | FCC ID           | Remarks                  |
|----|-------------------|---------|-------------|------------------------------|------------------|--------------------------|
| A. | Notebook Computer | DELL    | P149G       | NA                           | NA               | Provided by Manufacturer |
| B. | Adapter           | DELL    | LA90PM170   | NA                           | NA               | Provided by Manufacturer |
| C. | Type C Flash      | SanDisk | SDDDC3-032G | NA                           | NA               | -                        |
| D. | USB Flash         | HP      | v250W       | 05                           | NA               | -                        |
| E. | Earphone          | APPLE   | MB770FE     | NA                           | NA               | -                        |
| F. | Mouse             | DELL    | MS111-P     | CN-011D3V-71581-1CJ-019A     | FCC DoC Approved | -                        |
| G. | Monitor           | DELL    | SE2416Hc    | CN-OWJKMC-64180-66D-013B-A00 | FCC DoC Approved | -                        |
| H. | Load              | NA      | NA          | NA                           | NA               | -                        |

| ID | Descriptions   | Qty. | Length (m) | Shielding (Yes/No) | Cores (Qty.) | Remarks |
|----|----------------|------|------------|--------------------|--------------|---------|
| 1. | AC Power Cable | 1    | 1.8        | N                  | 0            | -       |
| 2. | Earphone cable | 1    | 1.0        | N                  | 0            | -       |
| 3. | USB cable      | 1    | 1.8        | Y                  | 0            | -       |
| 4. | HDMI cable     | 1    | 1.0        | Y                  | 0            | -       |
| 5. | Console cable  | 2    | 1.5        | N                  | 0            | -       |
|    | LAN cable      | 1    | 1.5        | N                  | 0            | -       |

#### 3.3.1 Configuration of System under Test

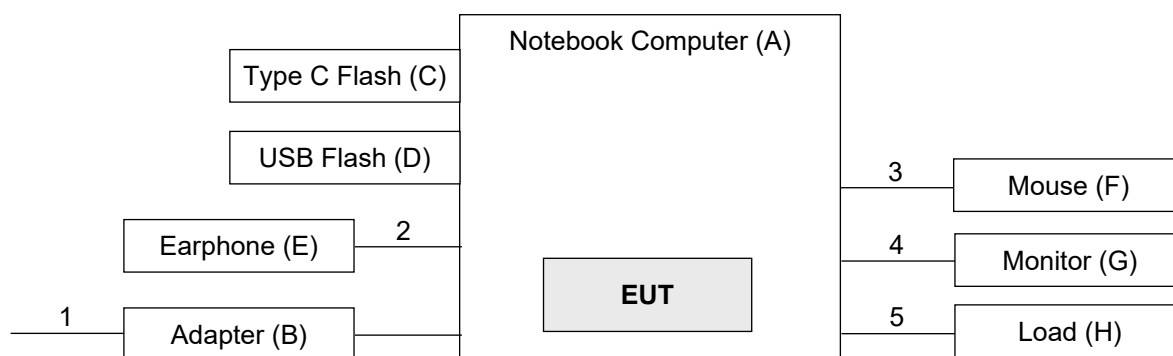

### 3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.225)**

**FCC Part 15, Subpart C (15.215)**

ANSI C63.10:2013

All test items have been performed and recorded as per the above standards.



## 4 Test Types and Results

### 4.1 Radiated Emission Measurement

#### 4.1.1 Limits of Radiated Emission Measurement

The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490     | 2400/F(kHz)                       | 300                           |
| 0.490 ~ 1.705     | 24000/F(kHz)                      | 30                            |
| 1.705 ~ 30.0      | 30                                | 30                            |
| 30 ~ 88           | 100                               | 3                             |
| 88 ~ 216          | 150                               | 3                             |
| 216 ~ 960         | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 Test Instruments

| Description & Manufacturer                | Model No.                    | Serial No.            | Cal. Date     | Cal. Due      |
|---|------------------------------|-----------------------|---------------|---------------|
| Test Receiver<br>ROHDE & SCHWARZ          | ESCI                         | 100424                | Dec. 31, 2020 | Dec. 30, 2021 |
| Spectrum Analyzer<br>ROHDE & SCHWARZ      | FSP40                        | 100040                | Sep. 16, 2020 | Sep. 15, 2021 |
| BILOG Antenna<br>SCHWARZBECK              | VULB9168                     | 9168-155              | Nov. 03, 2020 | Nov. 02, 2021 |
| HORN Antenna<br>SCHWARZBECK               | BBHA 9120D                   | 9120D-1170            | Nov. 22, 2020 | Nov. 21, 2021 |
| HORN Antenna<br>SCHWARZBECK               | BBHA 9170                    | BBHA9170241           | Nov. 22, 2020 | Nov. 21, 2021 |
| Loop Antenna<br>TESEQ                     | HLA 6121                     | 45745                 | Jul. 06, 2020 | Jul. 05, 2021 |
| Preamplifier<br>Agilent<br>(Below 1GHz)   | 8447D                        | 2944A10631            | Jun. 08, 2020 | Jun. 07, 2021 |
|   |                              |                       | Jun. 05, 2021 | Jun. 04, 2022 |
| Preamplifier<br>KEYSIGHT<br>(Above 1GHz)  | 83017A                       | MY53270295            | Jun. 08, 2020 | Jun. 07, 2021 |
|   |                              |                       | Jun. 05, 2021 | Jun. 04, 2022 |
| RF Coaxial Cable<br>WOKEN<br>With 5dB PAD | 8D-FB                        | Cable-CH4-01          | Aug. 16, 2020 | Aug. 15, 2021 |
| RF Coaxial Cable<br>EMCI                  | EMC102-KM-KM-3<br>000        | 150929                | Aug. 16, 2020 | Aug. 15, 2021 |
| RF Coaxial Cable<br>EMCI                  | EMC102-KM-KM-6<br>00         | 150928                | Aug. 16, 2020 | Aug. 15, 2021 |
| RF signal cable<br>HUBER+SUHNER           | SUCOFLEX 104                 | MY 13380+295012/04    | Jun. 08, 2020 | Jun. 07, 2021 |
|   |                              |                       | Jun. 05, 2021 | Jun. 04, 2022 |
| RF signal cable<br>HUBER+SUHNER           | SUCOFLEX 104                 | Cable-CH4-03 (250724) | Jun. 08, 2020 | Jun. 07, 2021 |
|   |                              |                       | Jun. 05, 2021 | Jun. 04, 2022 |
| Software<br>BV ADT                        | ADT_Radiated_<br>V7.6.15.9.5 | NA                    | NA            | NA            |
| Antenna Tower<br>inn-co GmbH              | MA 4000                      | 010303                | NA            | NA            |
| Antenna Tower Controller<br>BV ADT        | AT100                        | AT93021703            | NA            | NA            |
| Turn Table<br>BV ADT                      | TT100                        | TT93021703            | NA            | NA            |
| Turn Table Controller<br>BV ADT           | SC100                        | SC93021703            | NA            | NA            |
| Boresight Antenna Fixture                 | FBA-01                       | FBA-SIP01             | NA            | NA            |

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The test was performed in HwaYa Chamber 4.

#### 4.1.3 Test Procedures

##### For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz-90 kHz, 110 kHz-490 kHz) set to average detect function and peak detect function.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.
2. There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

##### For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Set Up

##### For Radiated emission below 30MHz

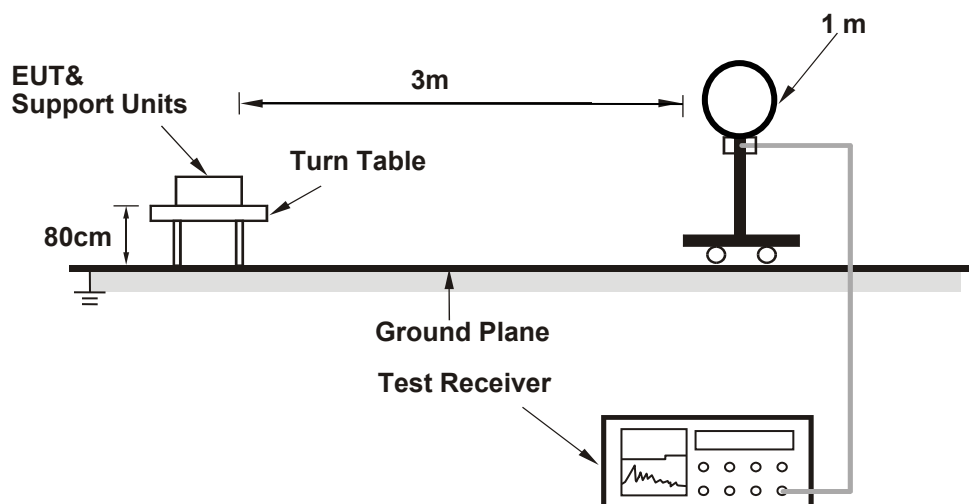

##### For Radiated emission 30MHz to 1GHz

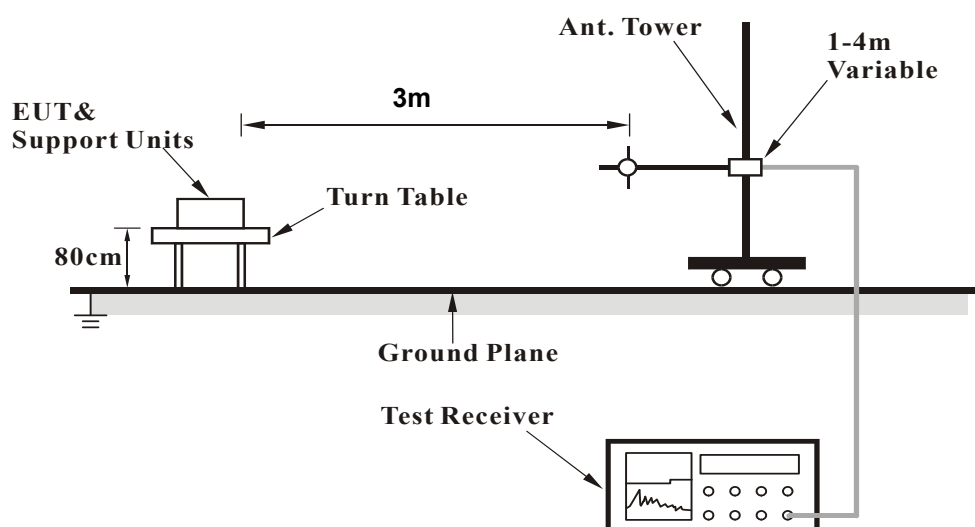

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### KDB 414788 OFS and Chamber Correlation Justification

- Based on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in regulations; however, an attempt should be made to avoid making measurements in the near field.
- Parallel-field site and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

#### 4.1.6 EUT Operating Conditions

- Set the EUT under transmission condition continuously at specific channel frequency.

#### 4.1.7 Test Results

##### Type A

| EUT Test Condition       |                       | Measurement Detail |                    |
|--------------------------|-----------------------|--------------------|--------------------|
| Channel                  | Channel 1             | Frequency Range    | 13.553 ~ 13.567MHz |
| Input Power              | 120Vac, 60Hz (System) | Detector Function  | Quasi-Peak         |
| Environmental Conditions | 25 deg. C, 70% RH     | Tested By          | Han Wu             |

| Antenna Polarity & Test Distance: Loop Antenna Parallel at 30 m |                 |                         |                |             |                    |                      |                  |                          |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1   | *13.56          | 9.5 QP                  | 84.0           | -74.5       | 1.00               | 18                   | 28.2             | -18.7                    |


##### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance conversion factor.
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. “ \* ” : Fundamental frequency.
6. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

##### Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} & 30\text{m} \\
 &= 84\text{dBuV/m} & 30\text{m}
 \end{aligned}$$

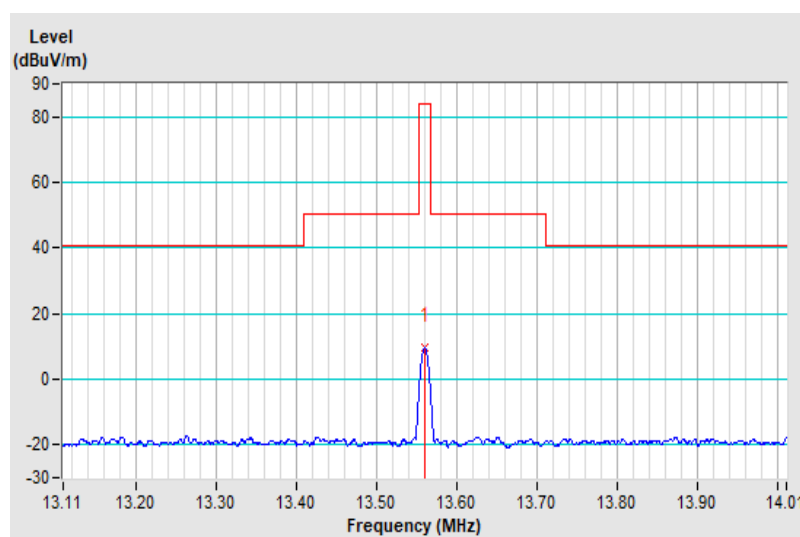

| EUT Test Condition       |                       | Measurement Detail |                    |
|--------------------------|-----------------------|--------------------|--------------------|
| Channel                  | Channel 1             | Frequency Range    | 13.553 ~ 13.567MHz |
| Input Power              | 120Vac, 60Hz (System) | Detector Function  | Quasi-Peak         |
| Environmental Conditions | 25 deg. C, 70% RH     | Tested By          | Han Wu             |

| Antenna Polarity & Test Distance: Loop Antenna Perpendicular at 30 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | *13.56          | 6.6 QP                  | 84.0           | -77.4       | 1.00               | 294                  | 25.3             | -18.7                    |


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance conversion factor.
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. “ \* ” : Fundamental frequency.
6. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} & 30\text{m} \\
 &= 84\text{dBuV/m} & 30\text{m}
 \end{aligned}$$

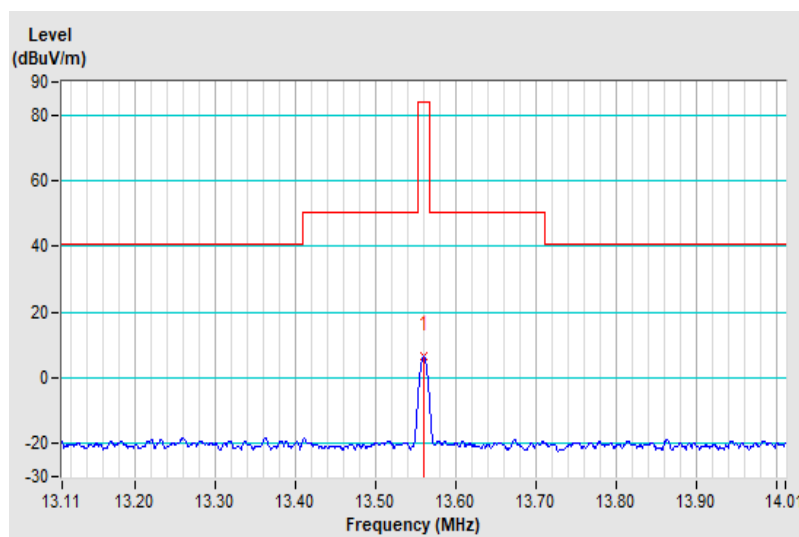

| EUT Test Condition       |                       | Measurement Detail |                    |
|--------------------------|-----------------------|--------------------|--------------------|
| Channel                  | Channel 1             | Frequency Range    | 13.553 ~ 13.567MHz |
| Input Power              | 120Vac, 60Hz (System) | Detector Function  | Quasi-Peak         |
| Environmental Conditions | 25 deg. C, 70% RH     | Tested By          | Han Wu             |

| Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel at 30 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | *13.56          | 5.5 QP                  | 84.0           | -78.5       | 1.00               | 15                   | 24.2             | -18.7                    |


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance conversion factor.
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. “ \* ” : Fundamental frequency.
6. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

13.56MHz = 15848uV/m                      30m  
               = 84dBuV/m                        30m

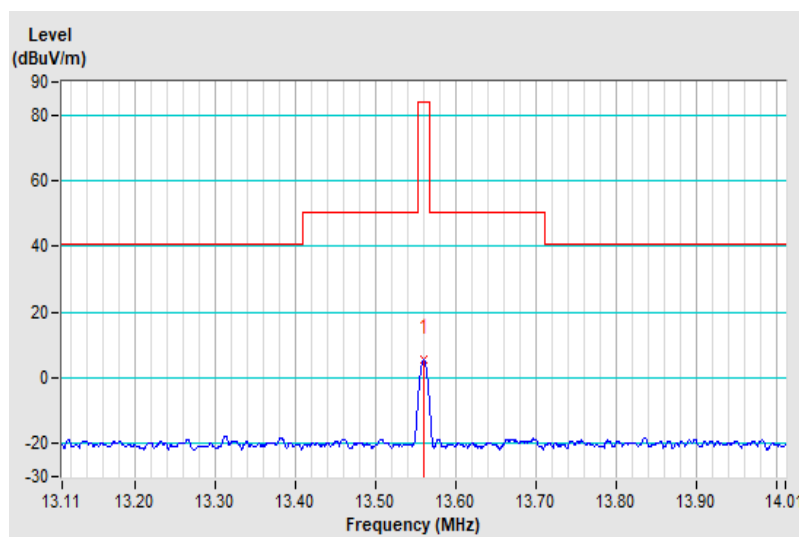

## Type B

| EUT Test Condition       |                       | Measurement Detail |                    |
|--------------------------|-----------------------|--------------------|--------------------|
| Channel                  | Channel 1             | Frequency Range    | 13.553 ~ 13.567MHz |
| Input Power              | 120Vac, 60Hz (System) | Detector Function  | Quasi-Peak         |
| Environmental Conditions | 25 deg. C, 70% RH     | Tested By          | Han Wu             |

| Antenna Polarity & Test Distance: Loop Antenna Parallel at 30 m |                 |                         |                |             |                    |                      |                  |                          |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1   | *13.56          | 9.3 QP                  | 84.0           | -74.7       | 1.00               | 5                    | 28.0             | -18.7                    |


### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance conversion factor.
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. “ \* ” : Fundamental frequency.
6. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

### Example:

13.56MHz = 15848uV/m                      30m  
               = 84dBuV/m                      30m

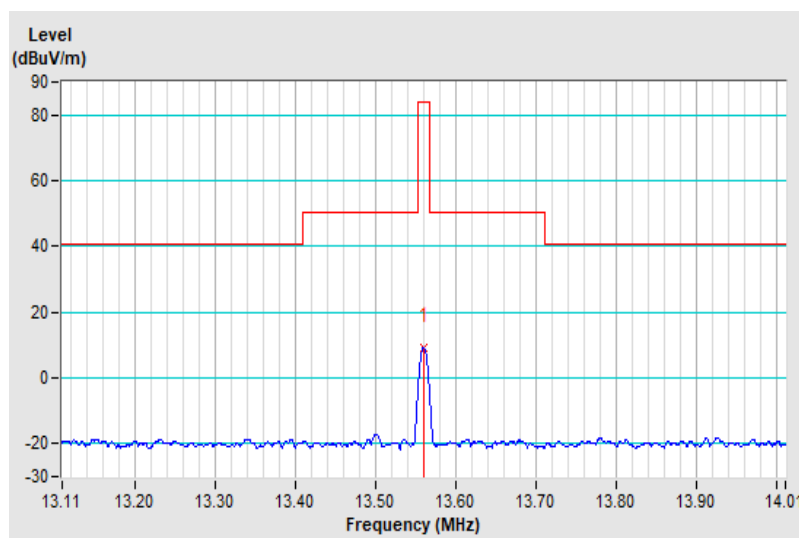



| EUT Test Condition       |                       | Measurement Detail |                    |
|--------------------------|-----------------------|--------------------|--------------------|
| Channel                  | Channel 1             | Frequency Range    | 13.553 ~ 13.567MHz |
| Input Power              | 120Vac, 60Hz (System) | Detector Function  | Quasi-Peak         |
| Environmental Conditions | 25 deg. C, 70% RH     | Tested By          | Han Wu             |

| Antenna Polarity & Test Distance: Loop Antenna Perpendicular at 30 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | *13.56          | 6.4 QP                  | 84.0           | -77.6       | 1.00               | 288                  | 25.1             | -18.7                    |


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance conversion factor.
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. “ \* ” : Fundamental frequency.
6. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} & 30\text{m} \\
 &= 84\text{dBuV/m} & 30\text{m}
 \end{aligned}$$

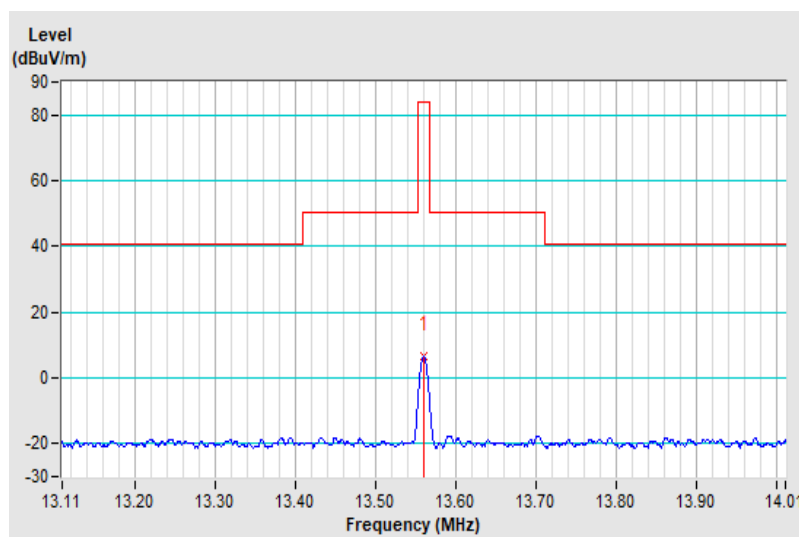

| EUT Test Condition       |                       | Measurement Detail |                    |
|--------------------------|-----------------------|--------------------|--------------------|
| Channel                  | Channel 1             | Frequency Range    | 13.553 ~ 13.567MHz |
| Input Power              | 120Vac, 60Hz (System) | Detector Function  | Quasi-Peak         |
| Environmental Conditions | 25 deg. C, 70% RH     | Tested By          | Han Wu             |

| Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel at 30 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | *13.56          | 5.3 QP                  | 84.0           | -78.7       | 1.00               | 9                    | 24.0             | -18.7                    |


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance conversion factor.
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. “ \* ” : Fundamental frequency.
6. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

13.56MHz = 15848uV/m                      30m  
= 84dBuV/m                                  30m

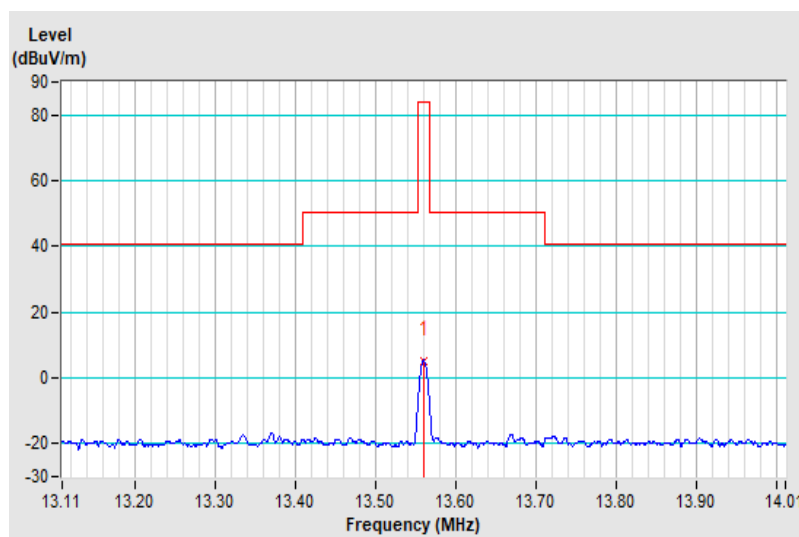

## Type F

| EUT Test Condition       |                       | Measurement Detail |                    |
|--------------------------|-----------------------|--------------------|--------------------|
| Channel                  | Channel 1             | Frequency Range    | 13.553 ~ 13.567MHz |
| Input Power              | 120Vac, 60Hz (System) | Detector Function  | Quasi-Peak         |
| Environmental Conditions | 25 deg. C, 70% RH     | Tested By          | Han Wu             |

| Antenna Polarity & Test Distance: Loop Antenna Parallel at 30 m |                 |                         |                |             |                    |                      |                  |                          |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1   | *13.56          | 9.4 QP                  | 84.0           | -74.6       | 1.00               | 9                    | 28.1             | -18.7                    |


### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance conversion factor.
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. “ \* ” : Fundamental frequency.
6. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

### Example:

13.56MHz = 15848uV/m                      30m  
               = 84dBuV/m                      30m

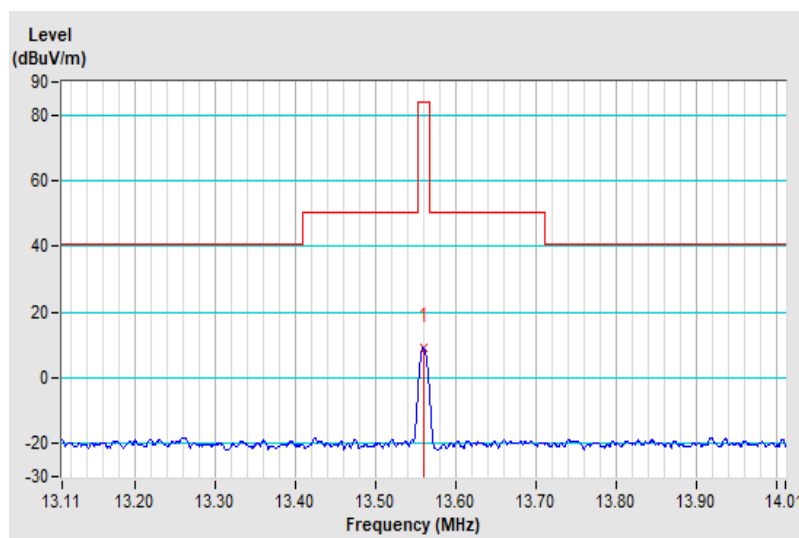

| EUT Test Condition       |                       | Measurement Detail |                    |
|--------------------------|-----------------------|--------------------|--------------------|
| Channel                  | Channel 1             | Frequency Range    | 13.553 ~ 13.567MHz |
| Input Power              | 120Vac, 60Hz (System) | Detector Function  | Quasi-Peak         |
| Environmental Conditions | 25 deg. C, 70% RH     | Tested By          | Han Wu             |

| Antenna Polarity & Test Distance: Loop Antenna Perpendicular at 30 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | *13.56          | 6.5 QP                  | 84.0           | -77.5       | 1.00               | 289                  | 25.2             | -18.7                    |


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance conversion factor.
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. “ \* ” : Fundamental frequency.
6. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

13.56MHz = 15848uV/m                      30m  
               = 84dBuV/m                        30m

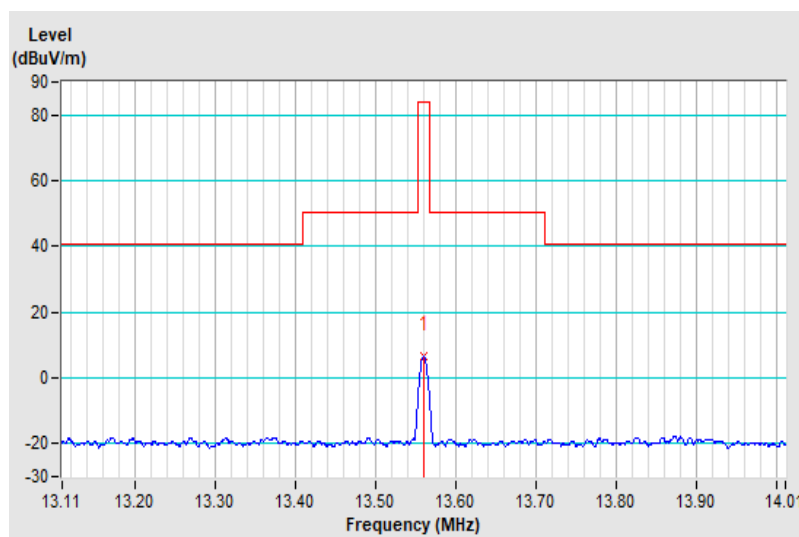

| EUT Test Condition       |                       | Measurement Detail |                    |
|--------------------------|-----------------------|--------------------|--------------------|
| Channel                  | Channel 1             | Frequency Range    | 13.553 ~ 13.567MHz |
| Input Power              | 120Vac, 60Hz (System) | Detector Function  | Quasi-Peak         |
| Environmental Conditions | 25 deg. C, 70% RH     | Tested By          | Han Wu             |

| Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel at 30 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | *13.56          | 5.1 QP                  | 84.0           | -78.9       | 1.00               | 13                   | 23.8             | -18.7                    |


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance conversion factor.
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. “ \* ” : Fundamental frequency.
6. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

13.56MHz = 15848uV/m                      30m  
               = 84dBuV/m                        30m

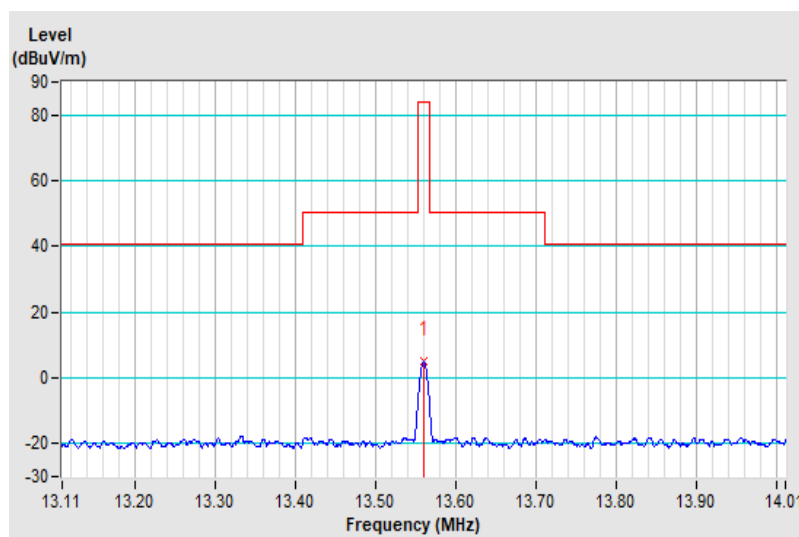

## Type V

| EUT Test Condition       |                       | Measurement Detail |                    |
|--------------------------|-----------------------|--------------------|--------------------|
| Channel                  | Channel 1             | Frequency Range    | 13.553 ~ 13.567MHz |
| Input Power              | 120Vac, 60Hz (System) | Detector Function  | Quasi-Peak         |
| Environmental Conditions | 25 deg. C, 70% RH     | Tested By          | Han Wu             |

| Antenna Polarity & Test Distance: Loop Antenna Parallel at 30 m |                 |                         |                |             |                    |                      |                  |                          |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1   | *13.56          | 9.1 QP                  | 84.0           | -74.9       | 1.00               | 10                   | 27.8             | -18.7                    |


### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance conversion factor.
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. “ \* ” : Fundamental frequency.
6. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

### Example:

13.56MHz = 15848uV/m                      30m  
               = 84dBuV/m                      30m

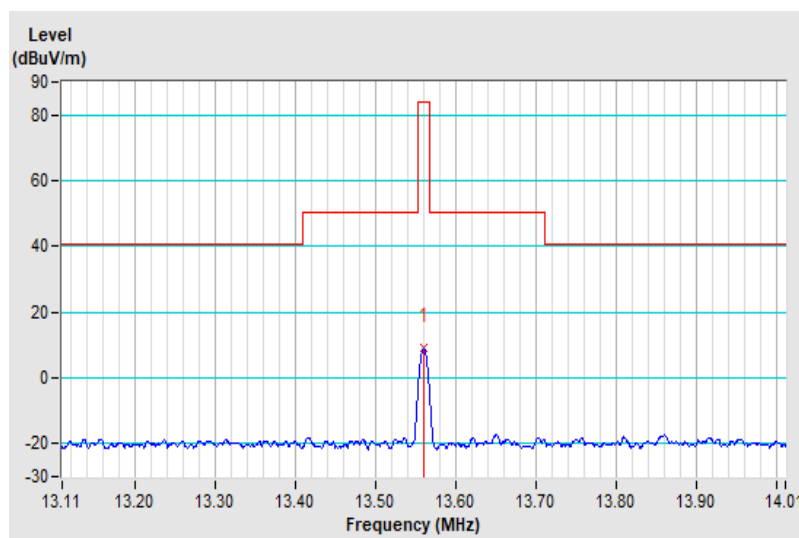

| EUT Test Condition       |                       | Measurement Detail |                    |
|--------------------------|-----------------------|--------------------|--------------------|
| Channel                  | Channel 1             | Frequency Range    | 13.553 ~ 13.567MHz |
| Input Power              | 120Vac, 60Hz (System) | Detector Function  | Quasi-Peak         |
| Environmental Conditions | 25 deg. C, 70% RH     | Tested By          | Han Wu             |

| Antenna Polarity & Test Distance: Loop Antenna Perpendicular at 30 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | *13.56          | 6.7 QP                  | 84.0           | -77.3       | 1.00               | 301                  | 25.4             | -18.7                    |


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance conversion factor.
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. “ \* ” : Fundamental frequency.
6. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} & 30\text{m} \\
 &= 84\text{dBuV/m} & 30\text{m}
 \end{aligned}$$

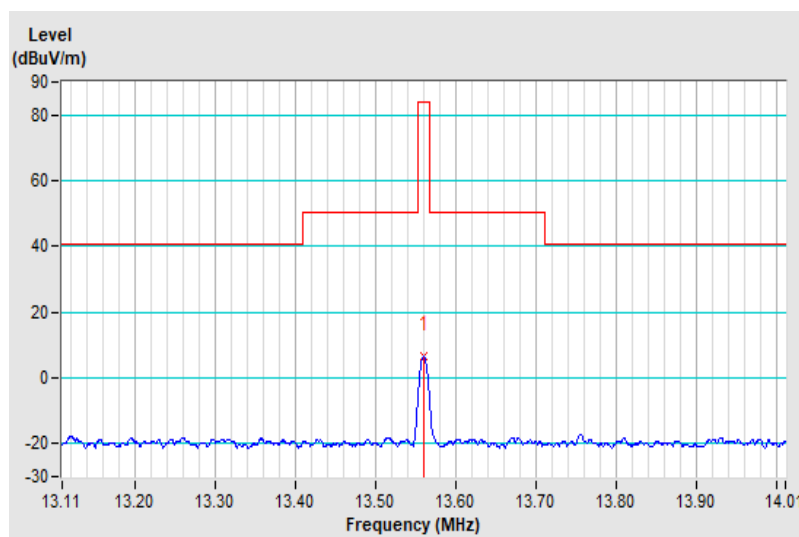

| EUT Test Condition       |                       | Measurement Detail |                    |
|--------------------------|-----------------------|--------------------|--------------------|
| Channel                  | Channel 1             | Frequency Range    | 13.553 ~ 13.567MHz |
| Input Power              | 120Vac, 60Hz (System) | Detector Function  | Quasi-Peak         |
| Environmental Conditions | 25 deg. C, 70% RH     | Tested By          | Han Wu             |

| Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel at 30 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | *13.56          | 5.0 QP                  | 84.0           | -79.0       | 1.00               | 7                    | 23.7             | -18.7                    |


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance conversion factor.
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. “ \* ” : Fundamental frequency.
6. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} & 30\text{m} \\
 &= 84\text{dBuV/m} & 30\text{m}
 \end{aligned}$$

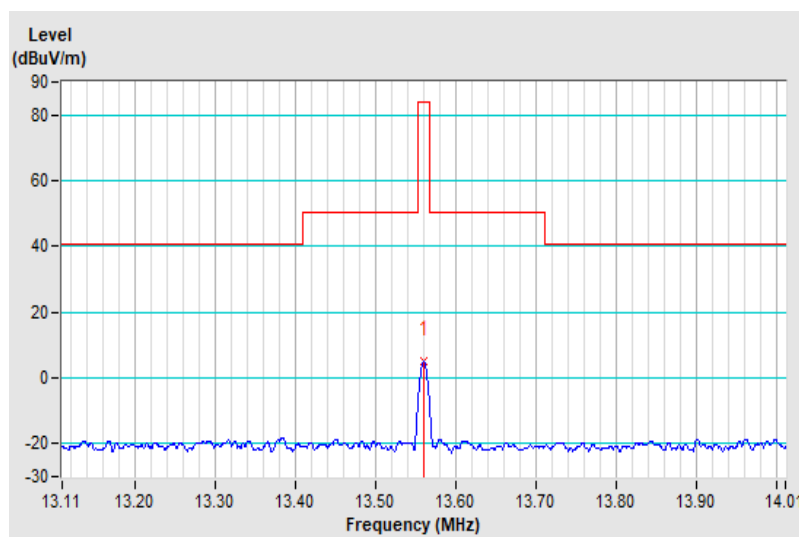





| EUT Test Condition       |                       | Measurement Detail |             |
|--------------------------|-----------------------|--------------------|-------------|
| Channel                  | Channel 1             | Frequency Range    | Below 30MHz |
| Input Power              | 120Vac, 60Hz (System) | Detector Function  | Quasi-Peak  |
| Environmental Conditions | 25 deg. C, 70% RH     | Tested By          | Han Wu      |

| Antenna Polarity & Test Distance: Loop Antenna Perpendicular at 30 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | 4.78            | 0.6 QP                  | 29.5           | -28.9       | 1.00               | 180                  | 20.6             | -20.0                    |
| 2  | 7.30            | 2.3 QP                  | 29.5           | -27.2       | 1.00               | 29                   | 21.7             | -19.4                    |
| 3  | 15.81           | 5.2 QP                  | 29.5           | -24.3       | 1.00               | 359                  | 23.8             | -18.6                    |
| 4  | 16.44           | 4.9 QP                  | 29.5           | -24.6       | 1.00               | 10                   | 23.4             | -18.5                    |
| 5  | 18.42           | 5.2 QP                  | 29.5           | -24.3       | 1.00               | 19                   | 23.7             | -18.5                    |
| 6  | 23.13           | 4.2 QP                  | 29.5           | -25.3       | 1.00               | 238                  | 22.5             | -18.3                    |


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance conversion factor.
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

1.705 MHz ~ 30 MHz = 30 uV/m      30m (except 13.110MHz ~ 14.010MHz)  
= 29.5 dBuV/m      30m

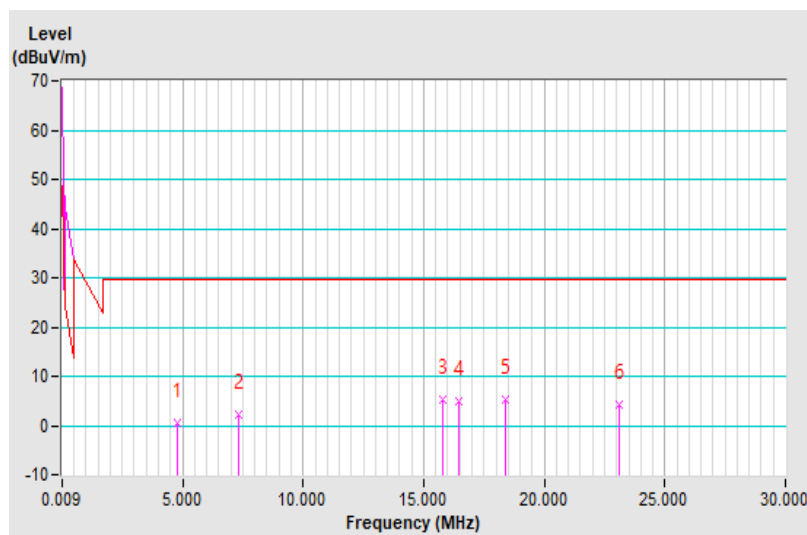

| EUT Test Condition       |                       | Measurement Detail |             |
|--------------------------|-----------------------|--------------------|-------------|
| Channel                  | Channel 1             | Frequency Range    | Below 30MHz |
| Input Power              | 120Vac, 60Hz (System) | Detector Function  | Quasi-Peak  |
| Environmental Conditions | 25 deg. C, 70% RH     | Tested By          | Han Wu      |

| Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 30m |                 |                         |                |             |                    |                      |                  |                          |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1   | 3.58            | 0.9 QP                  | 29.5           | -28.6       | 1.00               | 298                  | 21.4             | -20.5                    |
| 2   | 7.81            | 3.4 QP                  | 29.5           | -26.1       | 1.00               | 149                  | 22.7             | -19.3                    |
| 3   | 11.14           | 3.3 QP                  | 29.5           | -26.2       | 1.00               | 205                  | 22.1             | -18.8                    |
| 4   | 20.61           | 2.3 QP                  | 29.5           | -27.2       | 1.00               | 351                  | 20.7             | -18.4                    |
| 5   | 22.80           | 3.8 QP                  | 29.5           | -25.7       | 1.00               | 23                   | 22.1             | -18.3                    |
| 6   | 25.92           | 2.2 QP                  | 29.5           | -27.3       | 1.00               | 5                    | 20.5             | -18.3                    |


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance conversion factor.
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

1.705 MHz ~ 30 MHz = 30 uV/m      30m (except 13.110MHz ~ 14.010MHz)  
= 29.5 dBuV/m      30m

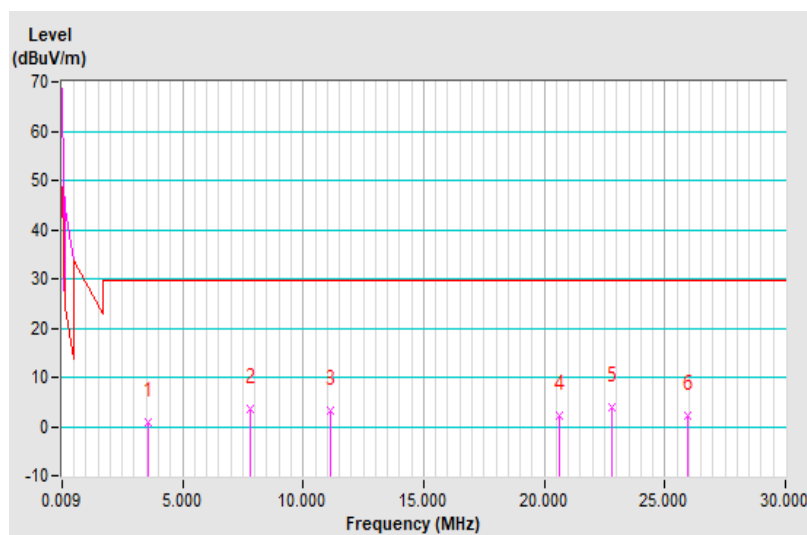


## Type A

| EUT Test Condition       |                       | Measurement Detail |               |
|--------------------------|-----------------------|--------------------|---------------|
| Channel                  | Channel 1             | Frequency Range    | Below 1000MHz |
| Input Power              | 120Vac, 60Hz (System) | Detector Function  | Quasi-Peak    |
| Environmental Conditions | 25 deg. C, 70% RH     | Tested By          | Han Wu        |

| Antenna Polarity & Test Distance: Horizontal At 3m |                 |                         |                |              |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|--------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB)  | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | 269.61          | 34.8 QP                 | 46.0           | -11.2        | 1.00 H             | 101                  | 43.0             | -8.2                     |
| 2  | <b>303.57</b>   | <b>35.9 QP</b>          | <b>46.0</b>    | <b>-10.1</b> | <b>1.00 H</b>      | <b>101</b>           | <b>43.1</b>      | <b>-7.2</b>              |
| 3  | 552.88          | 26.1 QP                 | 46.0           | -19.9        | 1.00 H             | 276                  | 28.6             | -2.5                     |
| 4  | 666.39          | 28.3 QP                 | 46.0           | -17.7        | 1.00 H             | 186                  | 28.2             | 0.1                      |
| 5  | 862.35          | 31.8 QP                 | 46.0           | -14.2        | 1.00 H             | 263                  | 26.6             | 5.2                      |
| 6  | 977.79          | 34.0 QP                 | 54.0           | -20.0        | 1.00 H             | 242                  | 27.1             | 6.9                      |

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz.

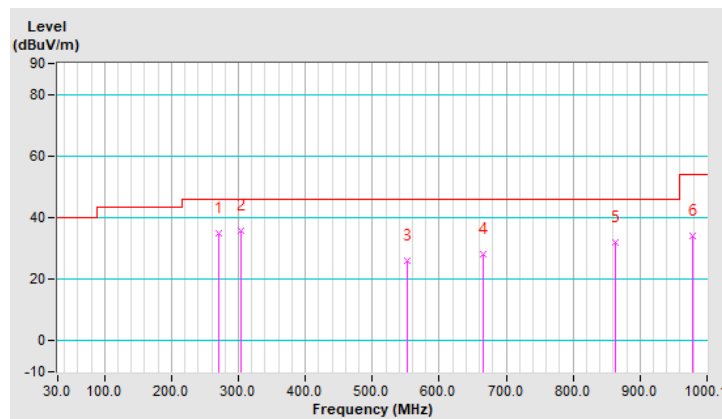


| EUT Test Condition       |                       | Measurement Detail |               |
|--------------------------|-----------------------|--------------------|---------------|
| Channel                  | Channel 1             | Frequency Range    | Below 1000MHz |
| Input Power              | 120Vac, 60Hz (System) | Detector Function  | Quasi-Peak    |
| Environmental Conditions | 25 deg. C, 70% RH     | Tested By          | Han Wu        |

| Antenna Polarity & Test Distance: Vertical At 3m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | 159.02          | 30.6 QP                 | 43.5           | -12.9       | 1.50 V             | 267                  | 39.0             | -8.4                     |
| 2  | 271.55          | 27.5 QP                 | 46.0           | -18.5       | 1.00 V             | 267                  | 35.6             | -8.1                     |
| 3  | 325.88          | 30.1 QP                 | 46.0           | -15.9       | 1.00 V             | 247                  | 36.6             | -6.5                     |
| 4  | 574.23          | 27.5 QP                 | 46.0           | -18.5       | 1.00 V             | 253                  | 29.5             | -2.0                     |
| 5  | 755.63          | 30.0 QP                 | 46.0           | -16.0       | 1.00 V             | 68                   | 27.1             | 2.9                      |
| 6  | 855.56          | 31.7 QP                 | 46.0           | -14.3       | 1.00 V             | 319                  | 26.7             | 5.0                      |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz.

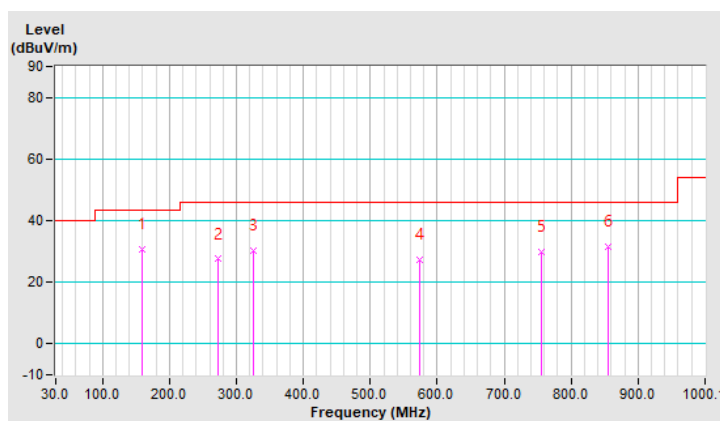

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

| Frequency (MHz) | Conducted Limit (dBuV) |         |
|-----------------|------------------------|---------|
|                 | Quasi-peak             | Average |
| 0.15 - 0.5      | 66 - 56                | 56 - 46 |
| 0.50 - 5.0      | 56                     | 46      |
| 5.0 - 30.0      | 60                     | 50      |

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

| Description & Manufacturer              | Model No.                | Serial No.     | Cal. Date     | Cal. Due      |
|---|--------------------------|----------------|---------------|---------------|
| Test Receiver<br>ROHDE & SCHWARZ        | ESCI                     | 100613         | Dec. 04, 2020 | Dec. 03, 2021 |
| RF signal cable<br>Woken                | 5D-FB                    | Cable-cond1-01 | Jan. 16, 2021 | Jan. 15, 2022 |
| LISN<br>ROHDE & SCHWARZ<br>(EUT)        | ENV216                   | 101826         | Feb. 25, 2021 | Feb. 24, 2022 |
| LISN<br>ROHDE & SCHWARZ<br>(Peripheral) | ESH3-Z5                  | 100311         | Aug. 28, 2020 | Aug. 27, 2021 |
| Software<br>ADT                         | BV ADT_Conf_<br>V7.3.7.4 | NA             | NA            | NA            |

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 1 (Conduction 1).

3. The VCCI Site Registration No. is C-12040.

#### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

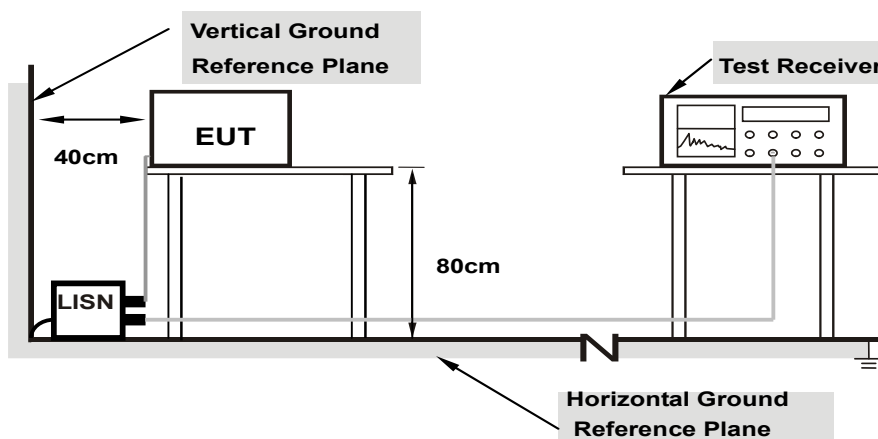

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

Same as 4.1.6.


#### 4.2.7 Test Results

| Phase | Line (L) | Detector Function | Quasi-Peak (QP) / Average (AV) |
|-------|----------|-------------------|--------------------------------|
|-------|----------|-------------------|--------------------------------|

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value<br>[dB (uV)] |       | Emission Level<br>[dB (uV)] |       | Limit<br>[dB (uV)] |       | Margin<br>(dB) |        |
|----|----------------|-------------------------|----------------------------|-------|-----------------------------|-------|--------------------|-------|----------------|--------|
|    |                |                         | Q.P.                       | AV.   | Q.P.                        | AV.   | Q.P.               | AV.   | Q.P.           | AV.    |
|    |                |                         |                            |       |                             |       |                    |       |                |        |
| 1  | 0.15782        | 9.67                    | 22.04                      | 14.49 | 31.71                       | 24.16 | 65.58              | 55.58 | -33.87         | -31.42 |
| 2  | 0.44325        | 9.69                    | 22.78                      | 20.21 | 32.47                       | 29.90 | 57.00              | 47.00 | -24.53         | -17.10 |
| 3  | 0.47039        | 9.69                    | 21.84                      | 19.51 | 31.53                       | 29.20 | 56.51              | 46.51 | -24.98         | -17.31 |
| 4  | 6.48029        | 9.77                    | 19.20                      | 13.52 | 28.97                       | 23.29 | 60.00              | 50.00 | -31.03         | -26.71 |
| 5  | 12.60335       | 9.79                    | 25.14                      | 10.83 | 34.93                       | 20.62 | 60.00              | 50.00 | -25.07         | -29.38 |
| 6  | 13.56130       | 9.79                    | 33.88                      | 33.13 | 43.67                       | 42.92 | 60.00              | 50.00 | -16.33         | -7.08  |

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

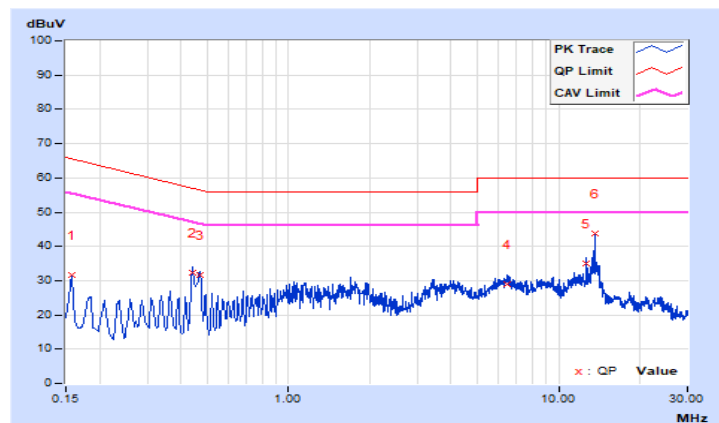




|       |             |                   |                                |
|-------|-------------|-------------------|--------------------------------|
| Phase | Neutral (N) | Detector Function | Quasi-Peak (QP) / Average (AV) |
|-------|-------------|-------------------|--------------------------------|

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value<br>[dB (uV)] |       | Emission Level<br>[dB (uV)] |       | Limit<br>[dB (uV)] |       | Margin<br>(dB) |        |
|----|----------------|-------------------------|----------------------------|-------|-----------------------------|-------|--------------------|-------|----------------|--------|
|    |                |                         |                            |       |                             |       |                    |       |                |        |
|    |                |                         | Q.P.                       | AV.   | Q.P.                        | AV.   | Q.P.               | AV.   | Q.P.           | AV.    |
| 1  | 0.44325        | 9.76                    | 23.25                      | 22.57 | 33.01                       | 32.33 | 57.00              | 47.00 | -23.99         | -14.67 |
| 2  | 0.47039        | 9.76                    | 22.39                      | 19.96 | 32.15                       | 29.72 | 56.51              | 46.51 | -24.36         | -16.79 |
| 3  | 1.84694        | 9.80                    | 15.82                      | 14.38 | 25.62                       | 24.18 | 56.00              | 46.00 | -30.38         | -21.82 |
| 4  | 6.82046        | 9.86                    | 13.08                      | 11.47 | 22.94                       | 21.33 | 60.00              | 50.00 | -37.06         | -28.67 |
| 5  | 12.51342       | 9.90                    | 22.44                      | 16.11 | 32.34                       | 26.01 | 60.00              | 50.00 | -27.66         | -23.99 |
| 6  | 13.56130       | 9.90                    | 30.52                      | 29.58 | 40.42                       | 39.48 | 60.00              | 50.00 | -19.58         | -10.52 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

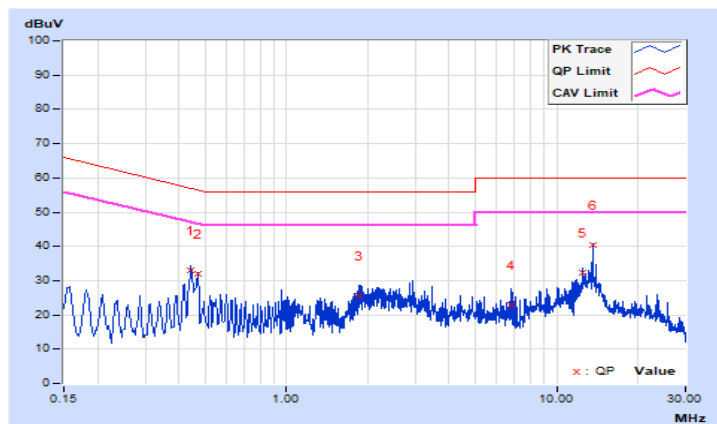


### 4.3 Frequency Stability

#### 4.3.1 Limits of Frequency Stability Measurement

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of  $-20$  degrees to  $50$  degrees C at normal supply voltage, and for a variation in the primary supply voltage from  $85\%$  to  $115\%$  of the rated supply voltage at a temperature of  $20$  degrees C.

#### 4.3.2 Test Setup

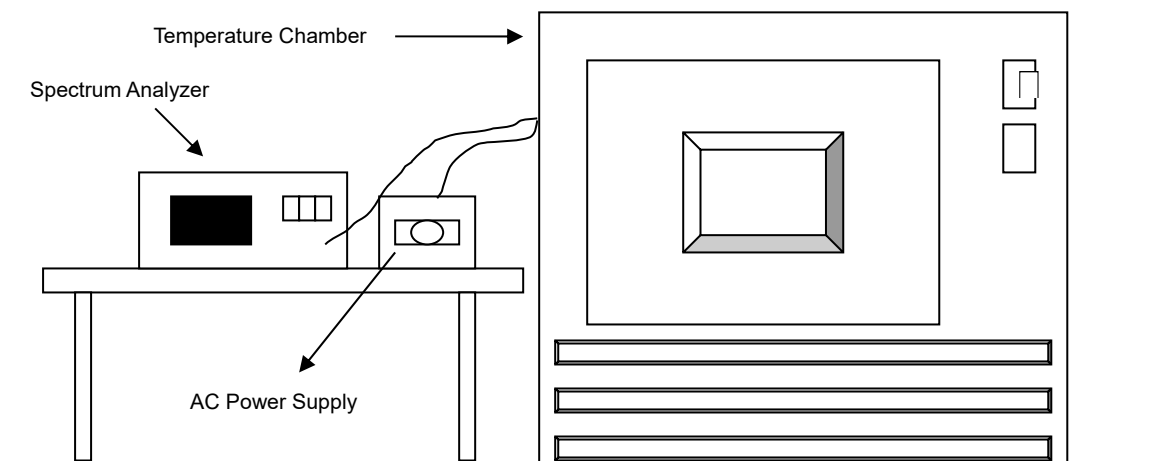

#### 4.3.3 Test Instruments

| Description & Manufacturer               | Model No. | Serial No. | Cal. Date     | Cal. Due      |
|--|-----------|------------|---------------|---------------|
| Spectrum Analyzer<br>ROHDE & SCHWARZ     | FSP40     | 100040     | Sep. 16, 2020 | Sep. 15, 2021 |
| Temperature & Humidity Chamber<br>TERCHY | HRM-120RF | 931022     | Dec. 24, 2020 | Dec. 23, 2021 |
| Digital Multimeter<br>Fluke              | 87-III    | 70360755   | Jul. 10, 2020 | Jul. 09, 2021 |
| AC Power Supply<br>Extech                | CFW-105   | E000603    | NA            | NA            |

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.3.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turned the EUT on and coupled its output to a spectrum analyzer.
- Turned the EUT off and set the chamber to the highest temperature specified.
- Allowed sufficient time (approximately 30 min) for the temperature of the chamber to stabilize then turned the EUT on and measured the operating frequency after 2, 5, and 10 minutes.
- Repeat step d with every 10 degrees reduction until the lowest temperature achieved.
- The test chamber was allowed to stabilize at  $+20$  degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from  $85\%$  to  $115\%$  and the frequency record.

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions

Same as Item 4.1.6.

#### 4.3.7 Test Result

| Frequency Stability Versus Temp. |                          |                       |                    |                       |                    |                       |                    |                       |                    |
|----------------------------------|--------------------------|-----------------------|--------------------|-----------------------|--------------------|-----------------------|--------------------|-----------------------|--------------------|
| Temp.<br>(°C)                    | Power<br>Supply<br>(Vac) | 0 Minute              |                    | 2 Minute              |                    | 5 Minute              |                    | 10 Minute             |                    |
|                                  |                          | Measured<br>Frequency | Frequency<br>Drift | Measured<br>Frequency | Frequency<br>Drift | Measured<br>Frequency | Frequency<br>Drift | Measured<br>Frequency | Frequency<br>Drift |
|                                  |                          | (MHz)                 | %                  | (MHz)                 | %                  | (MHz)                 | %                  | (MHz)                 | %                  |
| 50                               | 120                      | 13.55992              | -0.00059           | 13.55993              | -0.00052           | 13.55992              | -0.00059           | 13.55993              | -0.00052           |
| 40                               | 120                      | 13.55994              | -0.00044           | 13.55996              | -0.00029           | 13.55995              | -0.00037           | 13.55995              | -0.00037           |
| 30                               | 120                      | 13.56007              | 0.00052            | 13.56007              | 0.00052            | 13.56007              | 0.00052            | 13.56006              | 0.00044            |
| 20                               | 120                      | 13.55996              | -0.00029           | 13.55996              | -0.00029           | 13.55996              | -0.00029           | 13.55995              | -0.00037           |
| 10                               | 120                      | 13.56001              | 0.00007            | 13.56001              | 0.00007            | 13.56001              | 0.00007            | 13.56002              | 0.00015            |
| 0                                | 120                      | 13.56006              | 0.00044            | 13.56006              | 0.00044            | 13.56006              | 0.00044            | 13.56006              | 0.00044            |
| -10                              | 120                      | 13.55999              | -0.00007           | 13.55999              | -0.00007           | 13.55999              | -0.00007           | 13.55999              | -0.00007           |
| -20                              | 120                      | 13.55996              | -0.00029           | 13.55995              | -0.00037           | 13.55995              | -0.00037           | 13.55995              | -0.00037           |

| Frequency Stability Versus Voltage |                          |                       |                    |                       |                    |                       |                    |                       |                    |
|------------------------------------|--------------------------|-----------------------|--------------------|-----------------------|--------------------|-----------------------|--------------------|-----------------------|--------------------|
| Temp.<br>(°C)                      | Power<br>Supply<br>(Vac) | 0 Minute              |                    | 2 Minute              |                    | 5 Minute              |                    | 10 Minute             |                    |
|                                    |                          | Measured<br>Frequency | Frequency<br>Drift | Measured<br>Frequency | Frequency<br>Drift | Measured<br>Frequency | Frequency<br>Drift | Measured<br>Frequency | Frequency<br>Drift |
|                                    |                          | (MHz)                 | %                  | (MHz)                 | %                  | (MHz)                 | %                  | (MHz)                 | %                  |
| 20                                 | 138                      | 13.55996              | -0.00029           | 13.55996              | -0.00029           | 13.55996              | -0.00029           | 13.55995              | -0.00037           |
|                                    | 120                      | 13.55996              | -0.00029           | 13.55996              | -0.00029           | 13.55996              | -0.00029           | 13.55995              | -0.00037           |
|                                    | 102                      | 13.55996              | -0.00029           | 13.55996              | -0.00029           | 13.55996              | -0.00029           | 13.55995              | -0.00037           |

#### **4.4 20dB Bandwidth**

##### **4.4.1 Limits of 20dB Bandwidth Measurement**

The 20dB bandwidth shall be specified in operating frequency band.

##### **4.4.2 Test Setup**



##### **4.4.3 Test Instruments**

Refer to section 4.1.2 to get information of above instrument.

##### **4.4.4 Test Procedures**

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 1kHz RBW and 3kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

##### **4.4.5 Deviation from Test Standard**


No deviation.

##### **4.4.6 EUT Operating Conditions**

Same as Item 4.1.6.

#### 4.4.7 Test Results

| 20dBc point (Low) | 20dBc point (High) | Operating frequency band (MHz) | Pass / Fail |
|-------------------|--------------------|--------------------------------|-------------|
| 13.55992          | 13.56018           | 13.553~13.567                  | Pass        |

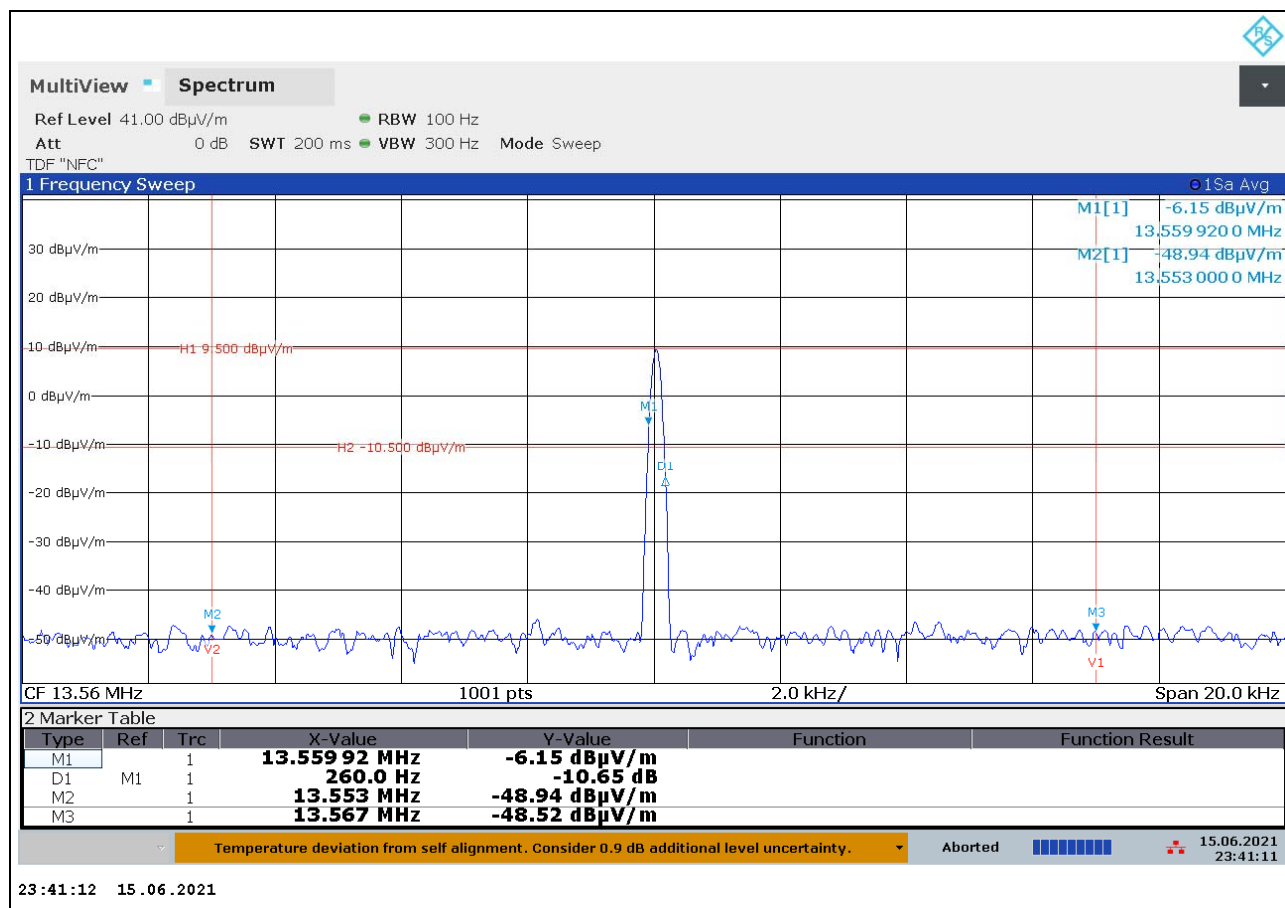

Note: The signal look like CW signal, so RBW can't be match 1~5 % OBW.

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

### Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

### Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---