

FCC Test Report

Product Name	Portable computer
Model No.	P102F
FCC ID.	E2K-P102F00401

Applicant	Dell Inc.
Address	One Dell Way, Round Rock, Texas 78682, United States.

Date of Receipt	Mar. 20, 2020
Issued Date	May 28, 2020
Report No.	2030634R-RFUSP23V00
Report Version	V1.0



The test results relate only to the samples tested.
 The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.
 This report must not be used to claim product endorsement by TAF or any agency of the government.
 The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.
 Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test Report

Issued Date: May 28, 2020
 Report No.: 2030634R-RFUSP23V00



Product Name	Portable computer
Applicant	Dell Inc.
Address	One Dell Way, Round Rock, Texas 78682, United States.
Manufacturer	Dell Inc.
Model No.	P102F
FCC ID.	E2K-P102F00401
EUT Rated Voltage	AC 100-240V, 50-60Hz
EUT Test Voltage	AC 120V / 60Hz
Trade Name	DELL
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By : Rita Huang
 (Senior Adm. Specialist / Rita Huang)

Tested By : Boris Hsu
 (Engineer / Boris Hsu)

Approved By : Vincent Lin
 (Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Operational Description.....	7
1.3. Tested System Details.....	8
1.4. Configuration of Tested System	8
1.5. EUT Exercise Software	9
1.6. Test Facility	10
1.7. List of Test Equipment.....	11
1.8. Uncertainty	13
2. CONDUCTED EMISSION	14
2.1. Test Setup	14
2.2. Limits.....	14
2.3. Test Procedure	15
2.4. Uncertainty	15
2.5. Test Result of Conducted Emission	16
3. PEAK POWER OUTPUT	18
3.1. Test Setup	18
3.2. Limit	18
3.3. Test Procedure	18
3.4. Uncertainty	18
3.5. Test Result of Peak Power Output	19
4. RADIATED EMISSION	22
4.1. Test Setup	22
4.2. Limits.....	23
4.3. Test Procedure	24
4.4. Uncertainty	24
4.5. Test Result of Radiated Emission	25
5. RF ANTENNA CONDUCTED TEST	49
5.1. Test Setup	49
5.2. Limits.....	49
5.3. Test Procedure	49
5.4. Uncertainty	49
5.5. Test Result of RF Antenna Conducted Test	50
6. BAND EDGE	53
6.1. Test Setup	53
6.2. Limit	54
6.3. Test Procedure	54
6.4. Uncertainty	54
6.5. Test Result of Band Edge	55
7. CHANNEL NUMBER.....	61
7.1. Test Setup	61

7.2.	Limit	61
7.3.	Test Procedure	61
7.4.	Uncertainty	61
7.5.	Test Result of Channel Number.....	62
8.	CHANNEL SEPARATION.....	65
8.1.	Test Setup	65
8.2.	Limit	65
8.3.	Test Procedure	65
8.4.	Uncertainty	65
8.5.	Test Result of Channel Separation.....	66
9.	DWELL TIME.....	72
9.1.	Test Setup	72
9.2.	Limit	72
9.3.	Test Procedure	72
9.4.	Uncertainty	72
9.5.	Test Result of Dwell Time	73
10.	OCCUPIED BANDWIDTH	79
10.1.	Test Setup	79
10.2.	Limits.....	79
10.3.	Test Procedure	79
10.4.	Uncertainty	79
10.5.	Test Result of Occupied Bandwidth	80
11.	DUTY CYCLE.....	86
11.1.	Test Setup	86
11.2.	Test Procedure	86
11.3.	Uncertainty	86
11.4.	Test Result of Duty Cycle.....	87
12.	EMI REDUCTION METHOD DURING COMPLIANCE TESTING	90
Attachment 1: EUT Test Photographs		
Attachment 2: EUT Detailed Photographs		

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Portable computer
Trade Name	DELL
Model No.	P102F
FCC ID.	E2K-P102F00401
Frequency Range	2402 – 2480MHz
Channel Number	79
Type of Modulation	FHSS: GFSK(1Mbps) / π / 4DQPSK(2Mbps) / 8DPSK(3Mbps)
Antenna Type	PIFA Antenna
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”
Power Adapter	MFR: Chiconypower, M/N: HA65NS5-00 Input: AC 100-240V~50-60Hz 1.7A Output: 19V $\overline{=}$ 3.34A Cable Out: Shielded, 1.7m, with one ferrite core bonded

Antenna List

No.	Manufacturer	Part No. (Vendor)	Antenna Type	Peak Gain
1	SPEED	025.901MP.0001 (Main) 025.901MP.0001 (Aux)	PIFA Antenna	-0.24dBi in 2.4 GHz
2	WNC	025.901MP.0011 (Main) 025.901MP.0011 (Aux)	PIFA Antenna	-0.40dBi in 2.4 GHz

Note: The antenna of EUT is conforming to FCC 15.203.

Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 20:	2422 MHz	Channel 40:	2442 MHz	Channel 60:	2462 MHz
Channel 01:	2403 MHz	Channel 21:	2423 MHz	Channel 41:	2443 MHz	Channel 61:	2463 MHz
Channel 02:	2404 MHz	Channel 22:	2424 MHz	Channel 42:	2444 MHz	Channel 62:	2464 MHz
Channel 03:	2405 MHz	Channel 23:	2425 MHz	Channel 43:	2445 MHz	Channel 63:	2465 MHz
Channel 04:	2406 MHz	Channel 24:	2426 MHz	Channel 44:	2446 MHz	Channel 64:	2466 MHz
Channel 05:	2407 MHz	Channel 25:	2427 MHz	Channel 45:	2447 MHz	Channel 65:	2467 MHz
Channel 06:	2408 MHz	Channel 26:	2428 MHz	Channel 46:	2448 MHz	Channel 66:	2468 MHz
Channel 07:	2409 MHz	Channel 27:	2429 MHz	Channel 47:	2449 MHz	Channel 67:	2469 MHz
Channel 08:	2410 MHz	Channel 28:	2430 MHz	Channel 48:	2450 MHz	Channel 68:	2470 MHz
Channel 09:	2411 MHz	Channel 29:	2431 MHz	Channel 49:	2451 MHz	Channel 69:	2471 MHz
Channel 10:	2412 MHz	Channel 30:	2432 MHz	Channel 50:	2452 MHz	Channel 70:	2472 MHz
Channel 11:	2413 MHz	Channel 31:	2433 MHz	Channel 51:	2453 MHz	Channel 71:	2473 MHz
Channel 12:	2414 MHz	Channel 32:	2434 MHz	Channel 52:	2454 MHz	Channel 72:	2474 MHz
Channel 13:	2415 MHz	Channel 33:	2435 MHz	Channel 53:	2455 MHz	Channel 73:	2475 MHz
Channel 14:	2416 MHz	Channel 34:	2436 MHz	Channel 54:	2456 MHz	Channel 74:	2476 MHz
Channel 15:	2417 MHz	Channel 35:	2437 MHz	Channel 55:	2457 MHz	Channel 75:	2477 MHz
Channel 16:	2418 MHz	Channel 36:	2438 MHz	Channel 56:	2458 MHz	Channel 76:	2478 MHz
Channel 17:	2419 MHz	Channel 37:	2439 MHz	Channel 57:	2459 MHz	Channel 77:	2479 MHz
Channel 18:	2420 MHz	Channel 38:	2440 MHz	Channel 58:	2460 MHz	Channel 78:	2480 MHz
Channel 19:	2421 MHz	Channel 39:	2441 MHz	Channel 59:	2461 MHz		

Note:

1. The EUT is a Portable computer with built-in WLAN and Bluetooth transceiver, this report for Bluetooth.
2. These tests were conducted on a sample for the purpose of demonstrating compliance of Bluetooth transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.

Test Mode	Mode 1: Transmit - 1Mbps Mode 2: Transmit - 2Mbps Mode 3: Transmit - 3Mbps
-----------	--


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	LED Monitor	ViewSonic	VX2257-mhd	UFY163502150	Non-Shielded, 1.8m
2	External HDD	Transcend	TS1TSJ25H3B	F21786-0125	N/A
3	External HDD	Transcend	TS1TSJ25MC	F30467-0011	N/A
4	Microphone & Earphone	RONEVER	MOE241	N/A	N/A
5	External HDD	Transcend	TS1TSJ25H3B	F21786-0019	N/A

Signal Cable Type	Signal cable Description
A	HDMI Cable Shielded, 1.8m
B	USB Cable Shielded, 0.5m
C	USB to Type-C Cable Shielded, 0.5m
D	Microphone & Earphone Cable Non-Shielded, 1.2m
E	USB Cable Shielded, 0.5m

1.4. Configuration of Tested System

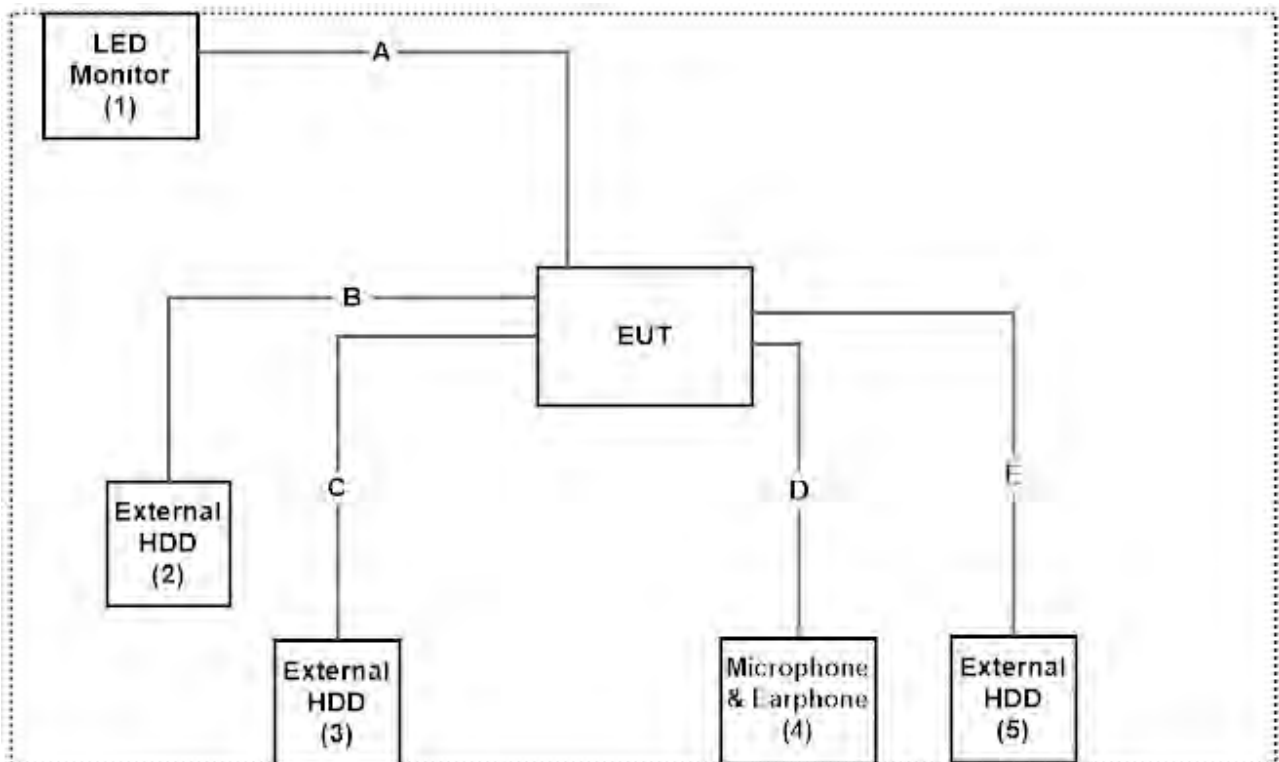

1.5. EUT Exercise Software

1. Setup the EUT as shown in Section 1.4.
2. Execute software “DRTU Ver.11.1941.0-10270” on the EUT.
3. Configure the test mode, the test channel, and the data rate.
4. Press “OK” to start the continuous Transmit.
5. Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	10~40 °C	24.9 °C
	Humidity (%RH)	10~90 %	60 %
Radiated Emission	Temperature (°C)	10~40 °C	20.5 °C
	Humidity (%RH)	10~90 %	65.2 %
Conductive	Temperature (°C)	10~40 °C	21.1 °C
	Humidity (%RH)	10~90 %	71.7 %

USA : FCC Registration Number: TW3023

Canada : IC Registration Number: 4075A

Site Description: Accredited by TAF
Accredited Number: 3023

Test Laboratory: DEKRA Testing and Certification Co., Ltd
Address: No.5-22, Ruishukeng, Linkou Dist., New Taipei City 24451,
Taiwan, R.O.C.

Phone number: 886-2-8601-3788

Fax number: 886-2-8601-3789

Email address: info.tw@dekra.com

Website: <http://www.dekra.com.tw>

1.7. List of Test Equipment

For Conducted measurements /CB3/SR8

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Date	Due. Date
	Temperature Chamber	WIT GROUP	TH-1S-B	EQ-201-00146	2020/04/06	2021/04/05
X	Spectrum Analyzer	Agilent	N9010A	MY53470892	2019/09/25	2020/09/24
X	Peak Power Analyzer	Keysight	8990B	MY51000410	2019/07/30	2020/07/29
X	Wideband Power Sensor	Keysight	N1923A	MY56080003	2019/07/30	2020/07/29
X	Wideband Power Sensor	Keysight	N1923A	MY56080004	2019/07/30	2020/07/29
X	EMI Test Receiver	R&S	ESCS 30	100369	2019/11/27	2020/11/26
X	LISN	R&S	ENV216	101105	2020/04/27	2021/04/26
X	LISN	R&S	ESH3-Z5	836679/014	2020/04/26	2021/04/25
X	Coaxial Cable	DEKRA	RG 400	LC018-RG	2019/06/20	2020/06/19

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Conduction Test SystemV9.0.5.

For Radiated measurements /Site3/CB8

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Date	Due. Date
X	Test Receiver	R&S	ESR7	101602	2019/12/16	2020/12/15
X	Signal Analyzer	R&S	FSV40	101869	2019/07/04	2020/07/03
X	Loop Antenna	Teseq	HLA6121	37133	2019/10/15	2021/10/14
X	Bilog Antenna	Schaffner Chase	CBL6112B	2916	2020/01/20	2021/01/19
X	Coaxial Cable	DEKRA	L1907-001C	280280.F141.1000D	2019/07/10	2020/07/09
X	Amplifier	EMCI	EMC001330	980254	2019/08/22	2020/08/21
X	Horn Antenna	ETS-LINDGREN	3117	00228113	2020/05/01	2021/04/30
X	Coaxial Cable	DEKRA	L1907-002C	280280.F141.1000D	2019/07/10	2020/07/09
X	Amplifier	EMCI	EMC05820SE	980362	2019/06/26	2020/06/25
X	Amplifier	EMCI	EMC051845SE	980632	2019/08/08	2020/08/07
	Horn Antenna	Com-Power	AH-1840	101101	2019/10/31	2020/10/30
	Amplifier + Cable	EMCI	EMC184045SE	980369	2020/04/23	2021/04/22
	Bilog Antenna	Schaffner Chase	CBL6112B	2925	2020/02/20	2021/02/19
	Coaxial Cable	DEKRA	L1907-003C	00100A1B3A120M	2019/07/10	2020/07/09
	Amplifier	EMCI	EMC001330	980255	2020/03/17	2021/03/16
X	Filter	MICRO-TRONICS	BRM50702	G270	2019/08/08	2020/08/07
	Filter	MICRO-TRONICS	BRM50716	G196	2019/08/08	2020/08/07

Note:

1. Loop Antenna is calibrated every two years, the other equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Test SystemV1.1.

1.8. Uncertainty


Uncertainties have been calculated according to the DEKRA internal document, and is described in each test chapter of this report.

The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

2. Conducted Emission

2.1. Test Setup

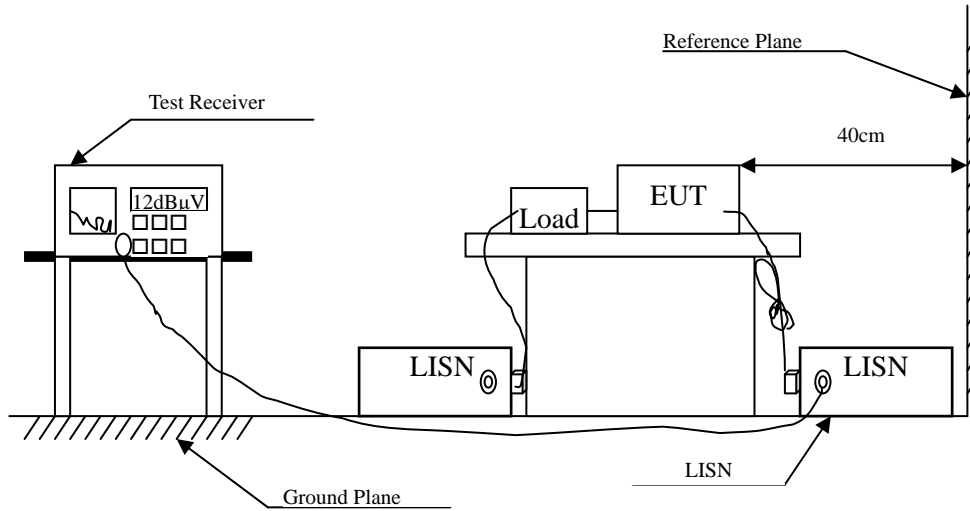

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dB μ V) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The EUT setup and the test procedure are according to ANSI C63.4, 2014 to comply with the requirements of FCC 47CFR Subpart C.


2.4. Uncertainty

±2.26dB

2.5. Test Result of Conducted Emission

Product : Portable computer
 Test Item : Conducted Emission Test
 Test date : 2020/05/28
 Test Mode : Mode 3: Transmit - 3Mbps (2441MHz)

Line1

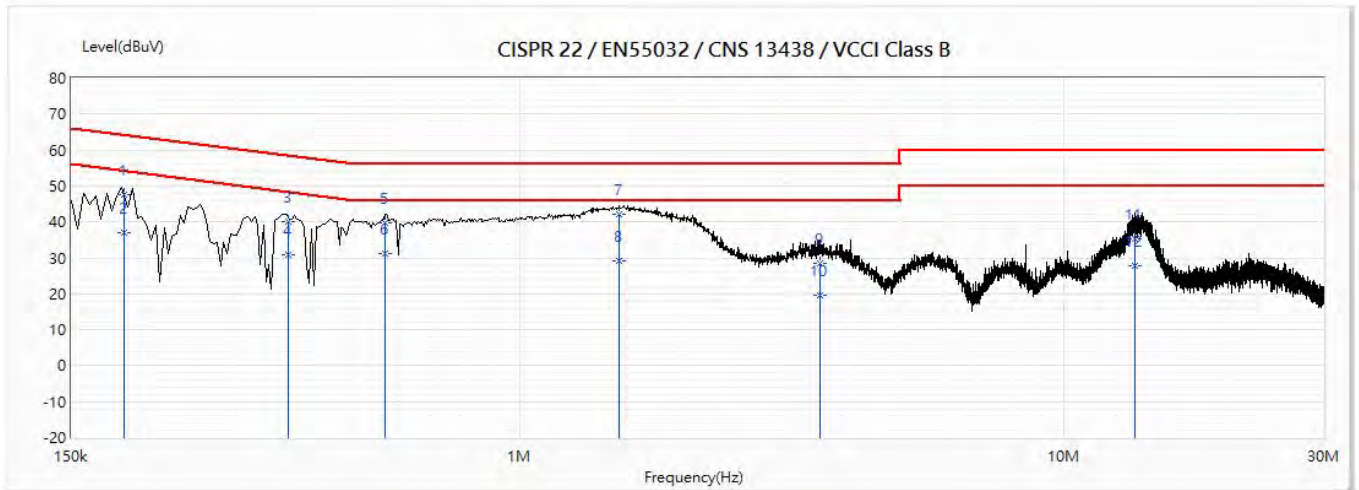


No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	0.188	47.54	64.13	-16.58	37.75	9.79	QP
2	0.188	36.93	54.13	-17.20	27.13	9.79	AV
3	0.375	40.20	58.40	-18.20	30.41	9.79	QP
4	0.375	31.02	48.40	-17.38	21.23	9.79	AV
5	0.565	39.68	56.00	-16.32	29.89	9.79	QP
6	0.565	31.03	46.00	-14.97	21.24	9.79	AV
*7	1.52	42.04	56.00	-13.96	32.19	9.85	QP
8	1.52	29.28	46.00	-16.72	19.43	9.85	AV
9	3.56	28.38	56.00	-27.62	18.46	9.93	QP
10	3.56	19.56	46.00	-26.44	9.63	9.93	AV
11	13.523	35.22	60.00	-24.78	25.06	10.15	QP
12	13.523	27.83	50.00	-22.17	17.67	10.15	AV

Remark:

1. "*" means this data is the worst emission level; "!" means this data is over limit.
2. Emission Level=Reading Level + Correct Factor(Correct Factor=LISN Factor+Cable Loss).
3. Margin=Emission Level-Limit

Product : Portable computer
 Test Item : Conducted Emission Test
 Test date : 2020/05/28
 Test Mode : Mode 3: Transmit - 3Mbps (2441MHz)

N

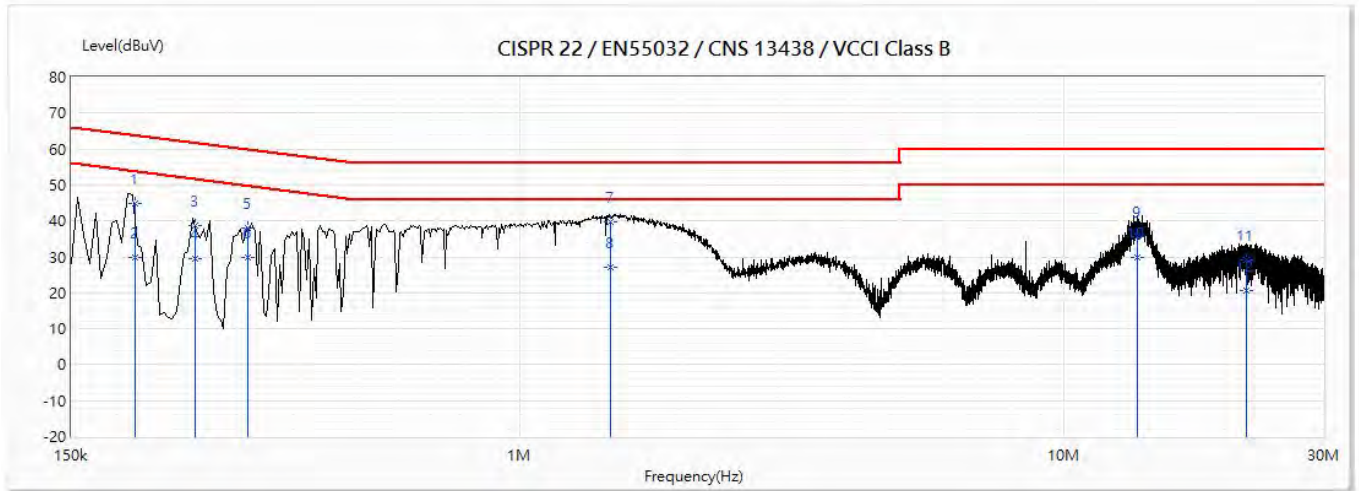


No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	0.197	44.83	63.76	-18.92	35.06	9.77	QP
2	0.197	29.75	53.76	-24.00	19.98	9.77	AV
3	0.253	38.83	61.66	-22.83	29.06	9.77	QP
4	0.253	29.34	51.66	-22.32	19.57	9.77	AV
5	0.317	38.14	59.78	-21.64	28.36	9.77	QP
6	0.317	29.97	49.78	-19.81	20.20	9.77	AV
*7	1.467	39.62	56.00	-16.38	29.79	9.83	QP
8	1.467	27.08	46.00	-18.92	17.25	9.83	AV
9	13.608	35.71	60.00	-24.29	25.50	10.22	QP
10	13.608	29.72	50.00	-20.28	19.50	10.22	AV
11	21.685	28.99	60.00	-31.01	18.58	10.41	QP
12	21.685	20.58	50.00	-29.42	10.17	10.41	AV

Remark:

1. "*" means this data is the worst emission level; "!" means this data is over limit.
2. Emission Level=Reading Level + Correct Factor(Correct Factor=LISN Factor+Cable Loss).
3. Margin=Emission Level-Limit

3. Peak Power Output

3.1. Test Setup

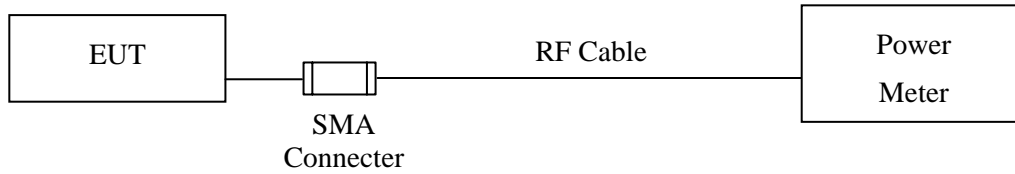

3.2. Limit

The maximum peak power shall be less 1Watt.

3.3. Test Procedure

Tested according to FHSS test procedure of KDB 558074 section 9 (b for compliance to FCC 47CFR 15.247 requirements.

3.4. Uncertainty

±1.19 dB

3.5. Test Result of Peak Power Output

Product : Portable computer
Test Item : Peak Power Output
Test Mode : Mode 1: Transmit - 1Mbps
Test Date : 2020/05/14

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	10.51	1 Watt= 30 dBm	Pass
Channel 39	2441.00	10.56	1 Watt= 30 dBm	Pass
Channel 78	2480.00	10.62	1 Watt= 30 dBm	Pass

Product : Portable computer
Test Item : Peak Power Output
Test Mode : Mode 2: Transmit - 2Mbps
Test Date : 2020/05/14

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	10.09	1 Watt= 30 dBm	Pass
Channel 39	2441.00	10.14	1 Watt= 30 dBm	Pass
Channel 78	2480.00	10.36	1 Watt= 30 dBm	Pass


Product : Portable computer
Test Item : Peak Power Output
Test Mode : Mode 3: Transmit - 3Mbps
Test Date : 2020/05/14

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	10.01	1 Watt= 30 dBm	Pass
Channel 39	2441.00	10.07	1 Watt= 30 dBm	Pass
Channel 78	2480.00	10.25	1 Watt= 30 dBm	Pass


4. Radiated Emission

4.1. Test Setup


Radiated Emission Under 30MHz

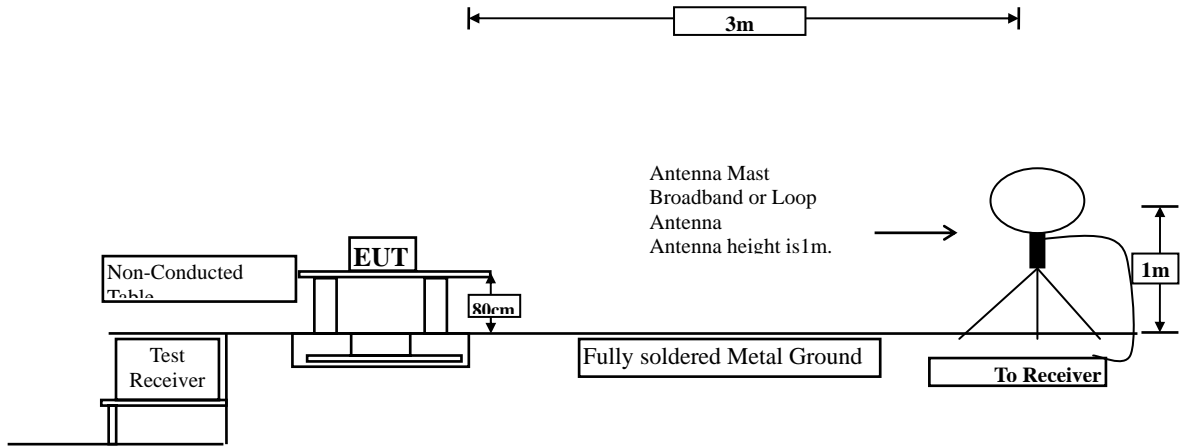

Radiated Emission Below 1GHz

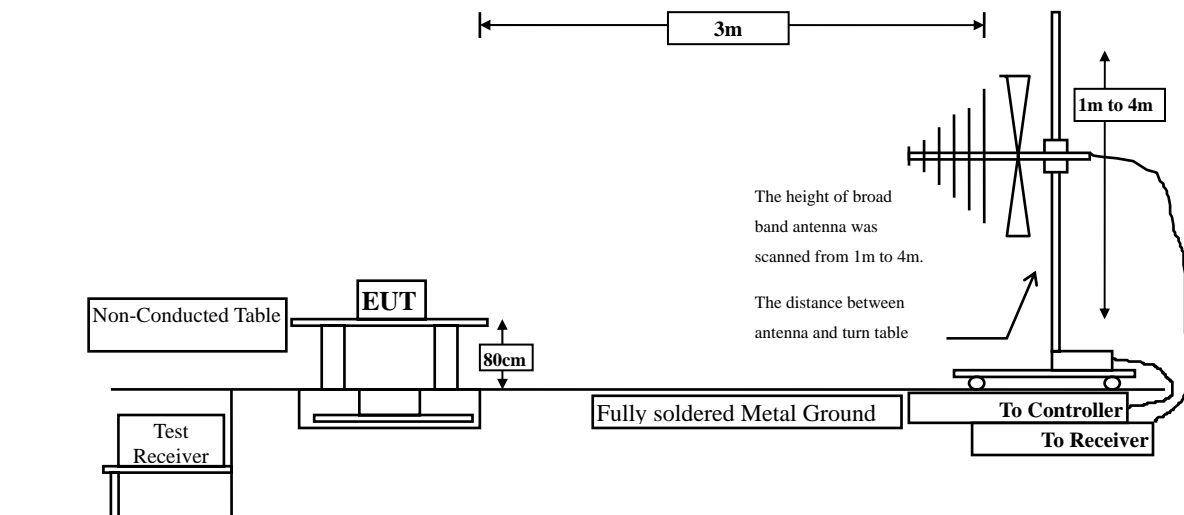

Radiated Emission Above 1GHz

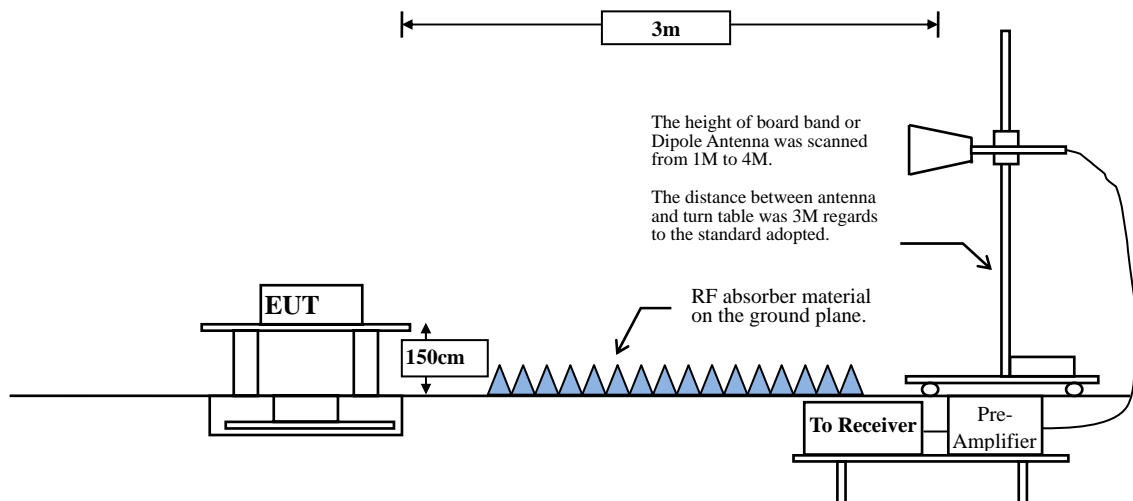

4.2. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remarks:
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

4.4. Uncertainty


± 4.08 dB above 1GHz

± 4.22 dB below 1GHz

4.5. Test Result of Radiated Emission

Product : Portable computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps(2402MHz)
 Test Date : 2020/05/08

Horizontal

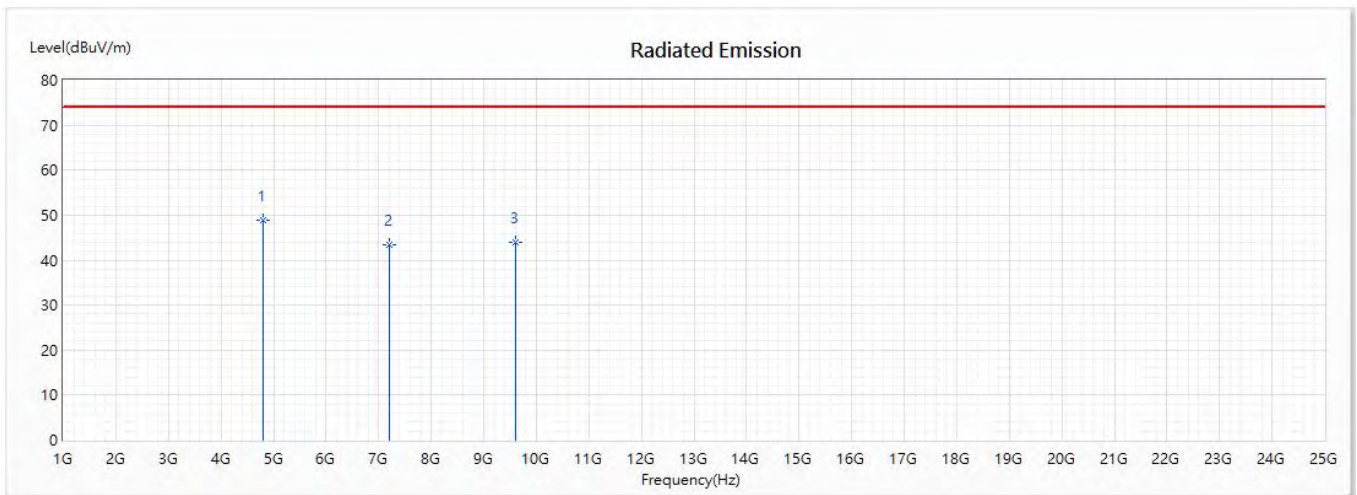

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	4804	48.81	74.00	-25.19	60.96	-12.15	PK
2	7206	43.52	74.00	-30.48	56.66	-13.14	PK
3	9608	43.93	74.00	-30.07	57.35	-13.42	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
1 (Average)	4804	48.81	-31.057	17.753	-36.247	54.000
2 (Average)	7206	43.52	-31.057	12.463	-41.537	54.000
3 (Average)	9608	43.93	-31.057	12.873	-41.127	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Portable computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps(2402MHz)
 Test Date : 2020/05/08

Vertical

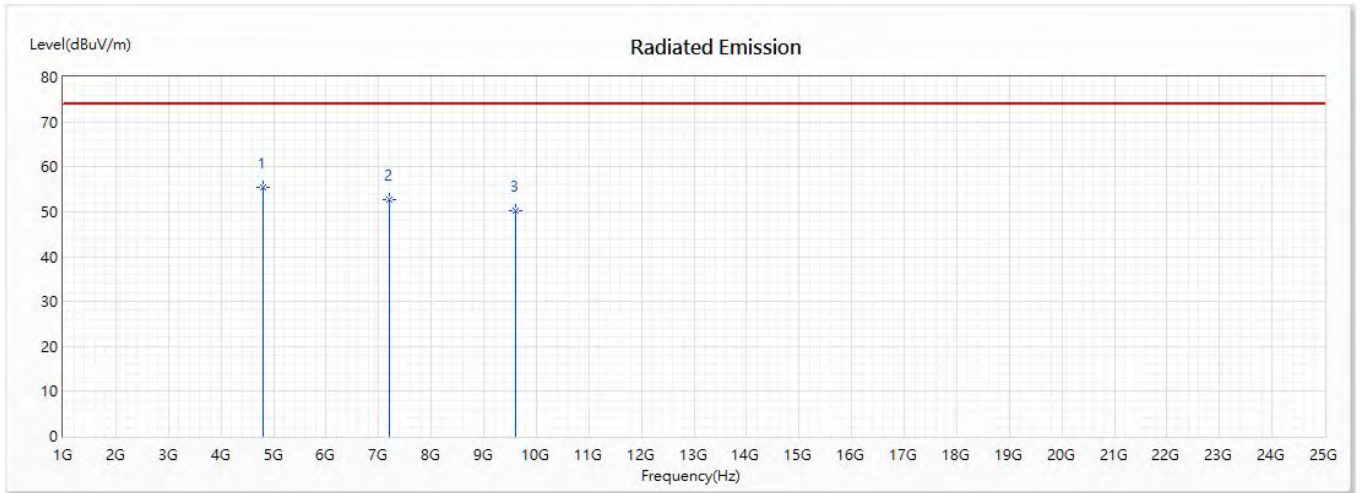

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	4804	55.51	74.00	-18.49	67.66	-12.15	PK
2	7206	52.67	74.00	-21.33	65.81	-13.14	PK
3	9608	50.29	74.00	-23.71	63.71	-13.42	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
1 (Average)	4804	55.51	-31.057	24.453	-29.547	54.000
2 (Average)	7206	52.67	-31.057	21.613	-32.387	54.000
3 (Average)	9608	50.29	-31.057	19.233	-34.767	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Portable computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps(2441MHz)
 Test Date : 2020/05/08

Horizontal

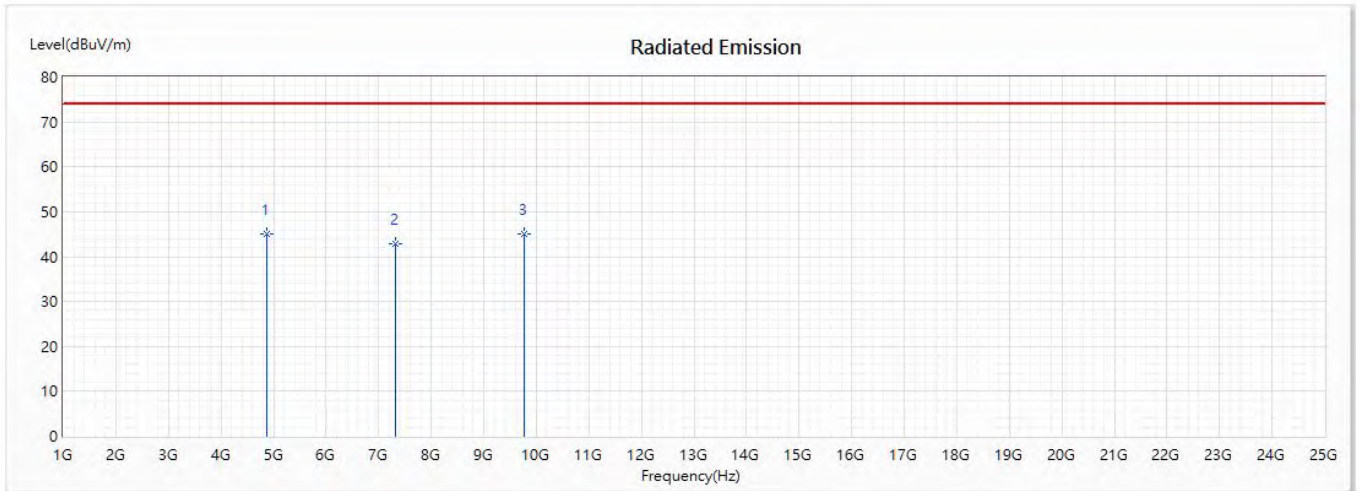

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4882	44.93	74.00	-29.07	56.52	-11.59	PK
2	7323	42.75	74.00	-31.25	56.32	-13.57	PK
* 3	9764	45.13	74.00	-28.87	57.65	-12.52	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
1 (Average)	4882	44.93	-31.057	13.873	-40.127	54.000
2 (Average)	7323	42.75	-31.057	11.693	-42.307	54.000
3 (Average)	9764	45.13	-31.057	14.073	-39.927	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Portable computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps(2441MHz)
 Test Date : 2020/05/08

Vertical

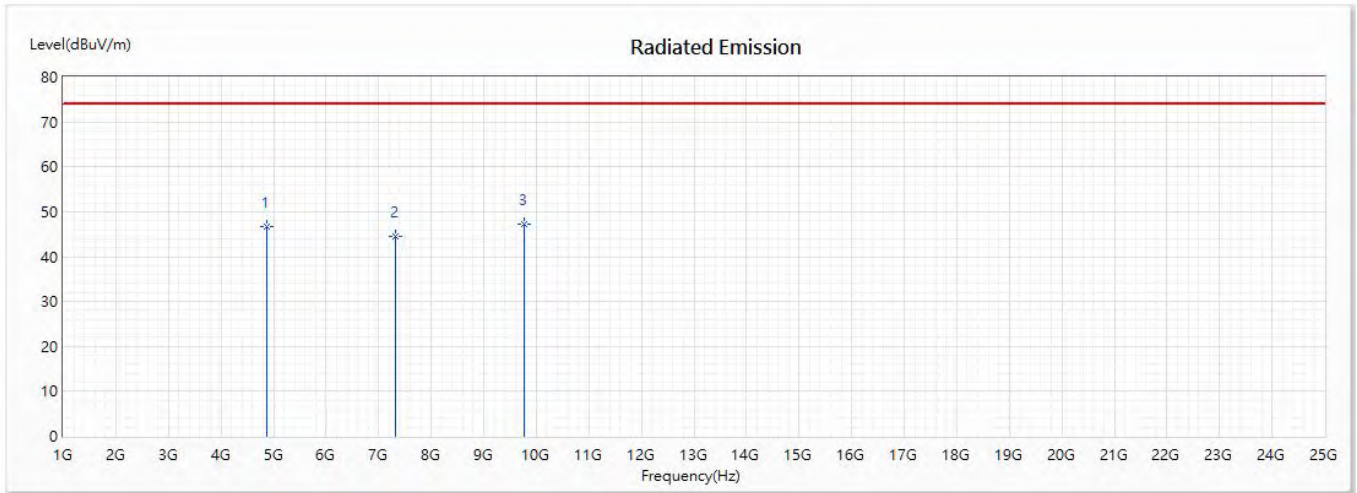

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4882	46.63	74.00	-27.37	58.22	-11.59	PK
2	7323	44.55	74.00	-29.45	58.12	-13.57	PK
* 3	9764	47.25	74.00	-26.75	59.77	-12.52	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
1 (Average)	4882	46.63	-31.057	15.573	-38.427	54.000
2 (Average)	7323	44.55	-31.057	13.493	-40.507	54.000
3 (Average)	9764	47.25	-31.057	16.193	-37.807	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Portable computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps(2480MHz)
 Test Date : 2020/05/08

Horizontal

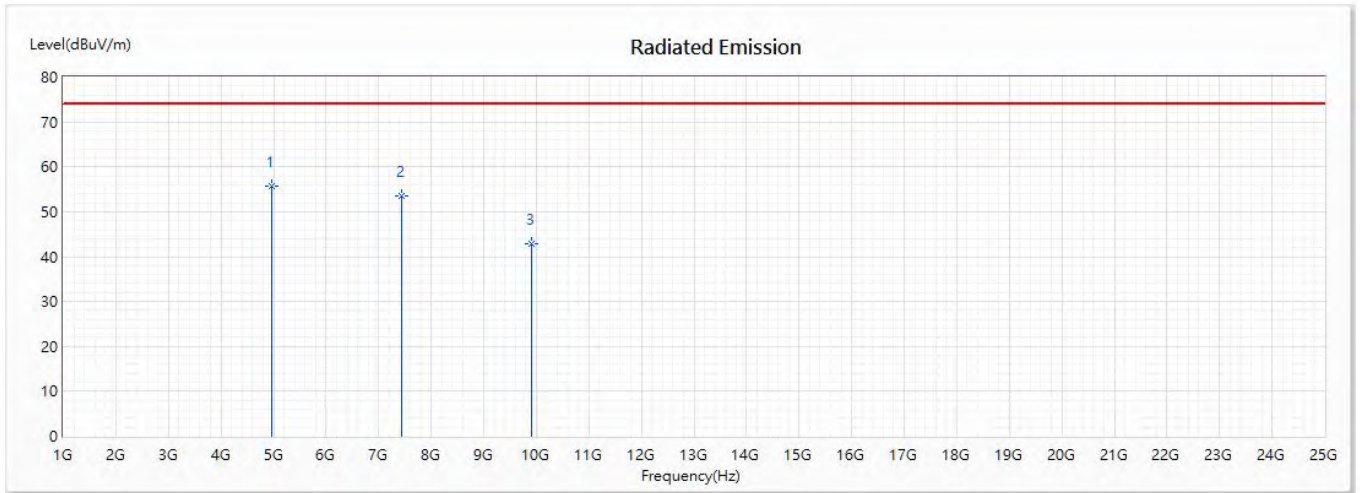

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	4960	55.72	74.00	-18.28	66.61	-10.89	PK
2	7440	53.42	74.00	-20.58	68.04	-14.62	PK
3	9920	42.75	74.00	-31.25	56.98	-14.23	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
1 (Average)	4960	55.72	-31.057	24.663	-29.337	54.000
2 (Average)	7440	53.42	-31.057	22.363	-31.637	54.000
3 (Average)	9920	42.75	-31.057	11.693	-42.307	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Portable computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps(2480MHz)
 Test Date : 2020/05/08

Vertical

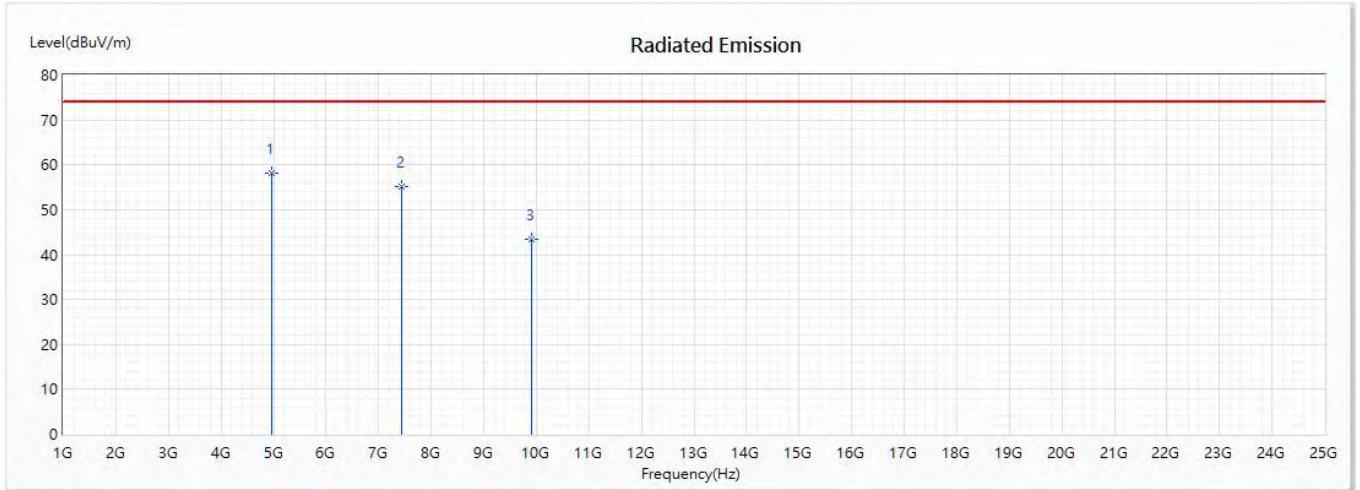

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	4960	58.17	74.00	-15.83	69.06	-10.89	PK
2	7440	55.10	74.00	-18.90	69.72	-14.62	PK
3	9920	43.32	74.00	-30.68	57.55	-14.23	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
1 (Average)	4960	58.17	-31.057	27.113	-26.887	54.000
2 (Average)	7440	55.10	-31.057	24.043	-29.957	54.000
3 (Average)	9920	43.32	-31.057	12.263	-41.737	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Portable computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 2Mbps(2402MHz)
 Test Date : 2020/05/08

Horizontal

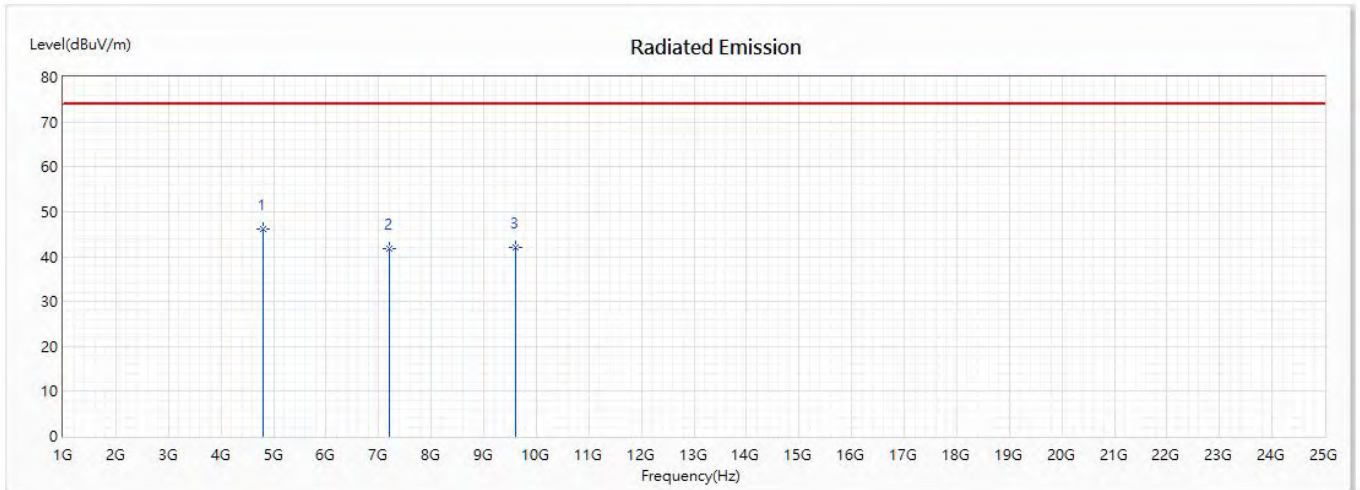

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	4804	46.25	74.00	-27.75	58.40	-12.15	PK
2	7206	41.78	74.00	-32.22	54.92	-13.14	PK
3	9608	42.05	74.00	-31.95	55.47	-13.42	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
1 (Average)	4804	46.25	-31.057	15.193	-38.807	54.000
2 (Average)	7206	41.78	-31.057	10.723	-43.277	54.000
3 (Average)	9608	42.05	-31.057	10.993	-43.007	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Portable computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 2Mbps(2402MHz)
 Test Date : 2020/05/08

Vertical

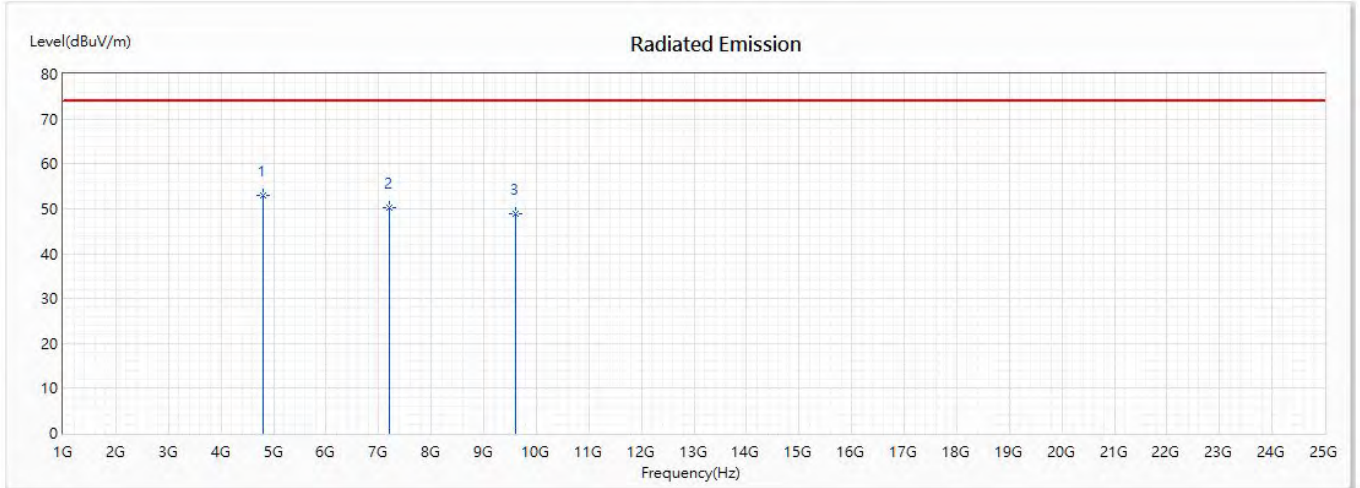

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	4804	52.85	74.00	-21.15	65.00	-12.15	PK
2	7206	50.11	74.00	-23.89	63.25	-13.14	PK
3	9608	48.87	74.00	-25.13	62.29	-13.42	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
1 (Average)	4804	52.85	-31.057	21.793	-32.207	54.000
2 (Average)	7206	50.11	-31.057	19.053	-34.947	54.000
3 (Average)	9608	48.87	-31.057	17.813	-36.187	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Portable computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 2Mbps (2441MHz)
 Test Date : 2020/05/08

Horizontal

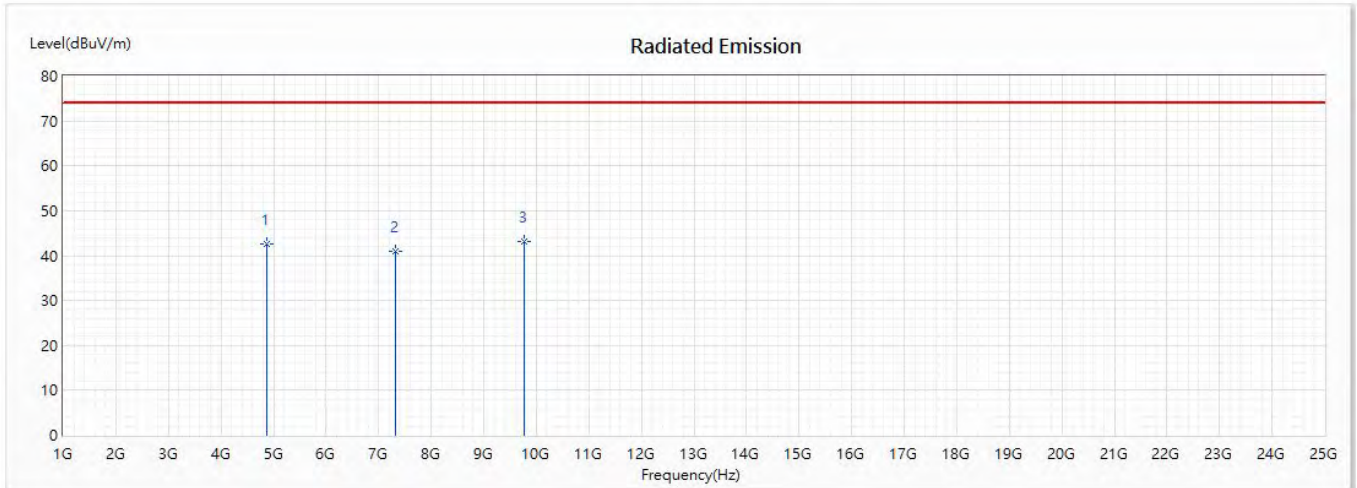

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4882	42.47	74.00	-31.53	54.06	-11.59	PK
2	7323	40.82	74.00	-33.18	54.39	-13.57	PK
* 3	9764	43.17	74.00	-30.83	55.69	-12.52	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
1 (Average)	4882	42.47	-31.057	11.413	-42.587	54.000
2 (Average)	7323	40.82	-31.057	9.763	-44.237	54.000
3 (Average)	9764	43.17	-31.057	12.113	-41.887	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Portable computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 2Mbps (2441MHz)
 Test Date : 2020/05/08

Vertical

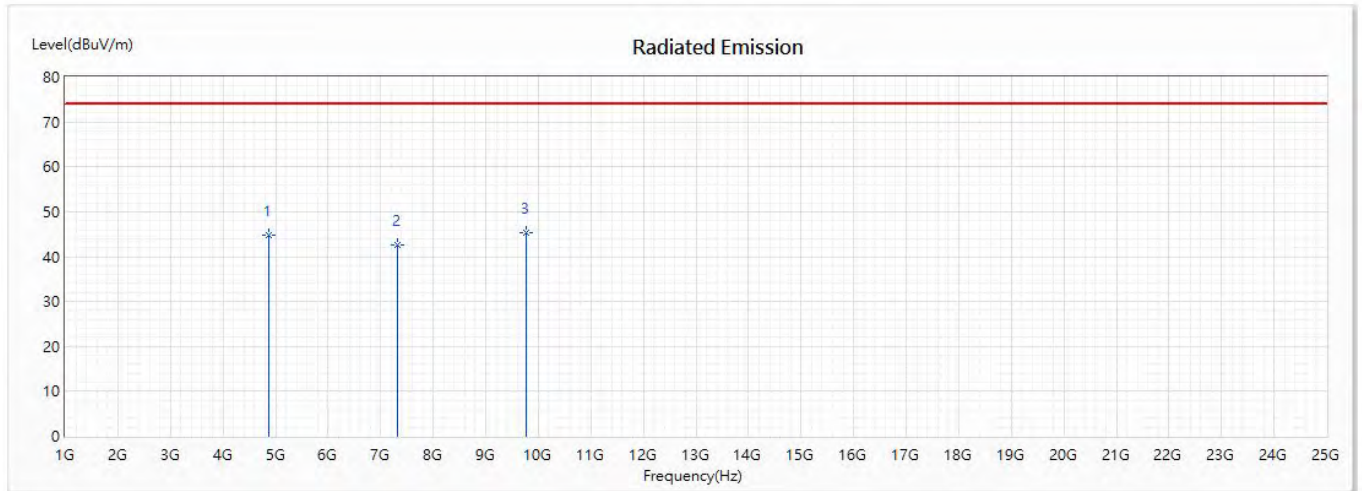

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4882	44.76	74.00	-29.24	56.35	-11.59	PK
2	7323	42.68	74.00	-31.32	56.25	-13.57	PK
* 3	9764	45.35	74.00	-28.65	57.87	-12.52	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
1 (Average)	4882	44.76	-31.057	13.703	-40.297	54.000
2 (Average)	7323	42.68	-31.057	11.623	-42.377	54.000
3 (Average)	9764	45.35	-31.057	14.293	-39.707	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Portable computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 2Mbps (2480MHz)
 Test Date : 2020/05/08

Horizontal

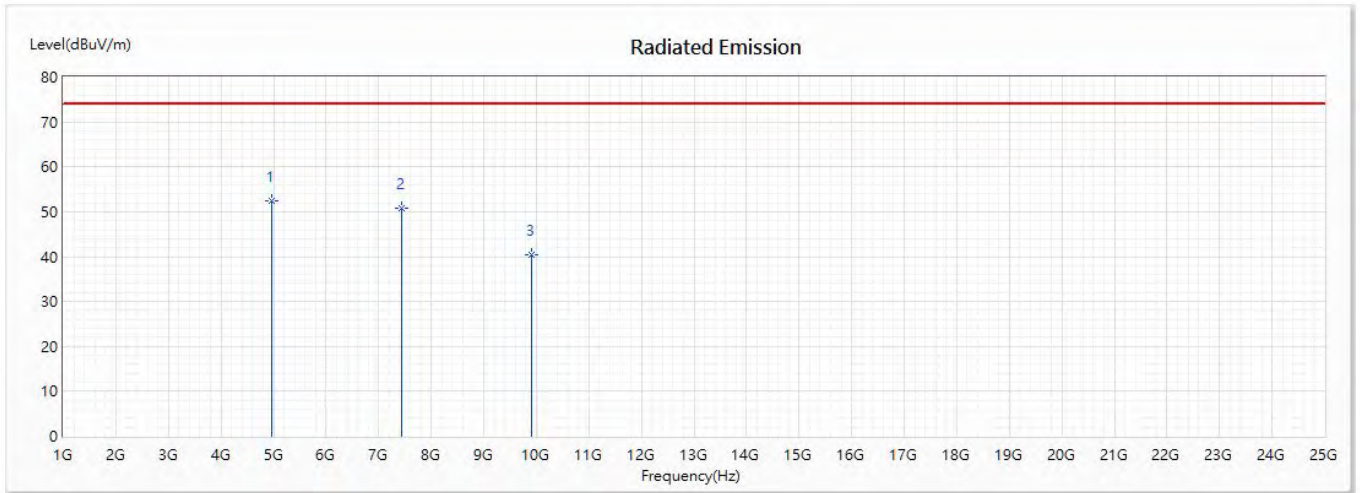

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	4960	52.31	74.00	-21.69	63.20	-10.89	PK
2	7440	50.78	74.00	-23.22	65.40	-14.62	PK
3	9920	40.33	74.00	-33.67	54.56	-14.23	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
1 (Average)	4960	52.31	-31.057	21.253	-32.747	54.000
2 (Average)	7440	50.78	-31.057	19.723	-34.277	54.000
3 (Average)	9920	40.33	-31.057	9.273	-44.727	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Portable computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 2Mbps (2480MHz)
 Test Date : 2020/05/08

Vertical

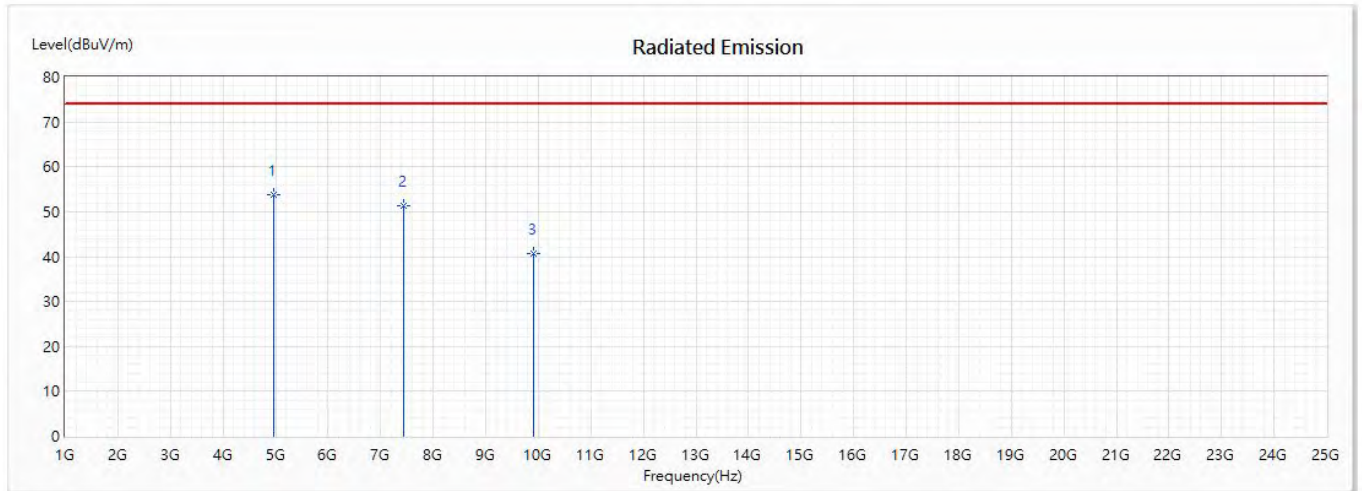

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	4960	53.83	74.00	-20.17	64.72	-10.89	PK
2	7440	51.39	74.00	-22.61	66.01	-14.62	PK
3	9920	40.62	74.00	-33.38	54.85	-14.23	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
1 (Average)	4960	53.83	-31.057	22.773	-31.227	54.000
2 (Average)	7440	51.39	-31.057	20.333	-33.667	54.000
3 (Average)	9920	40.62	-31.057	9.563	-44.437	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Portable computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps (2402MHz)
 Test Date : 2020/05/08

Horizontal

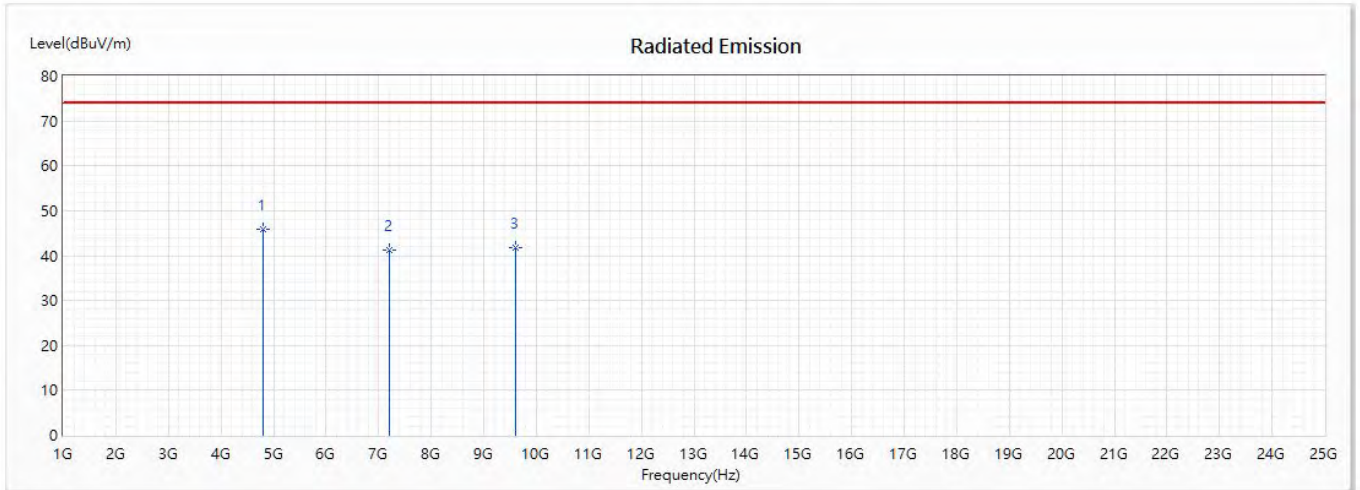

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	4804	45.91	74.00	-28.09	58.06	-12.15	PK
2	7206	41.27	74.00	-32.73	54.41	-13.14	PK
3	9608	41.85	74.00	-32.15	55.27	-13.42	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
1 (Average)	4804	45.91	-31.057	14.853	-39.147	54.000
2 (Average)	7206	41.27	-31.057	10.213	-43.787	54.000
3 (Average)	9608	41.85	-31.057	10.793	-43.207	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Portable computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps (2402MHz)
 Test Date : 2020/05/08

Vertical

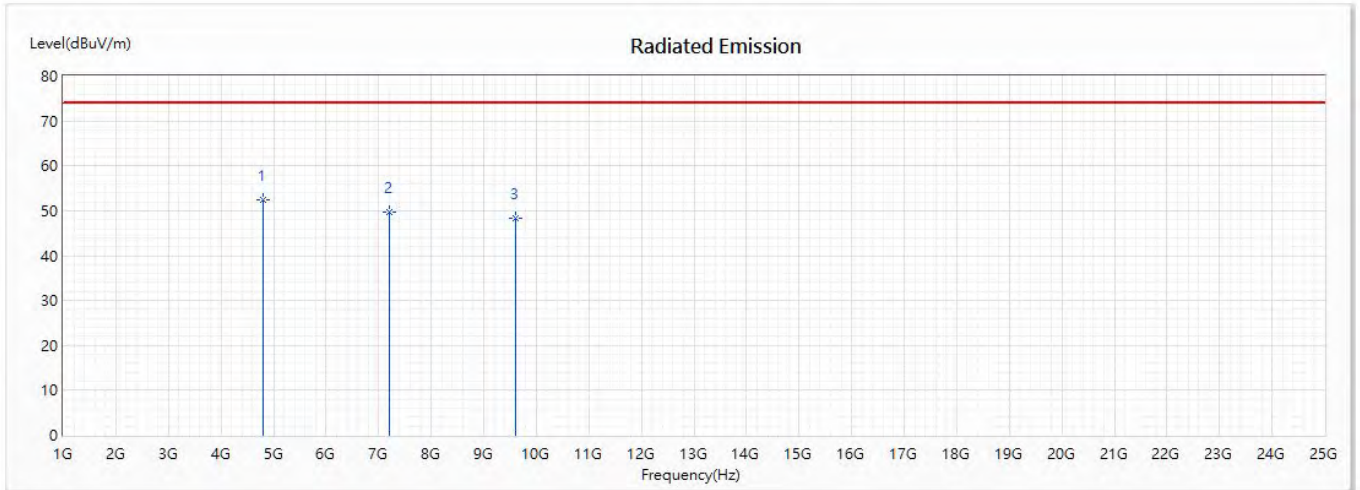

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	4804	52.39	74.00	-21.61	64.54	-12.15	PK
2	7206	49.76	74.00	-24.24	62.90	-13.14	PK
3	9608	48.35	74.00	-25.65	61.77	-13.42	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
1 (Average)	4804	52.39	-31.057	21.333	-32.667	54.000
2 (Average)	7206	49.76	-31.057	18.703	-35.297	54.000
3 (Average)	9608	48.35	-31.057	17.293	-36.707	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Portable computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps (2441MHz)
 Test Date : 2020/05/08

Horizontal

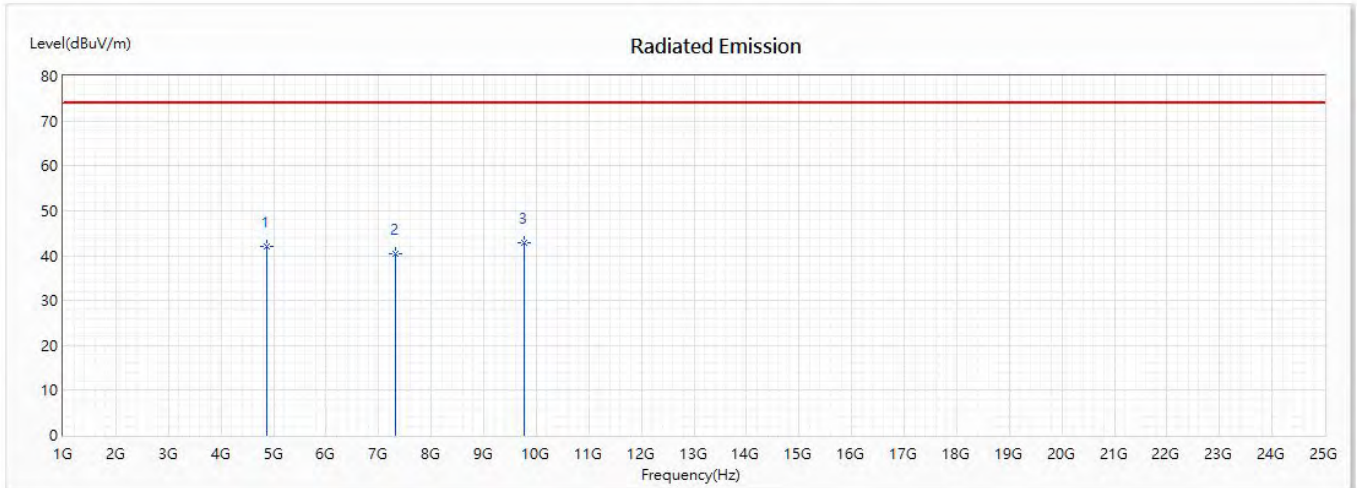

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4882	42.17	74.00	-31.83	53.76	-11.59	PK
2	7323	40.45	74.00	-33.55	54.02	-13.57	PK
* 3	9764	42.82	74.00	-31.18	55.34	-12.52	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
1 (Average)	4882	42.17	-31.057	11.113	-42.887	54.000
2 (Average)	7323	40.45	-31.057	9.393	-44.607	54.000
3 (Average)	9764	42.82	-31.057	11.763	-42.237	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Portable computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps (2441MHz)
 Test Date : 2020/05/08

Vertical

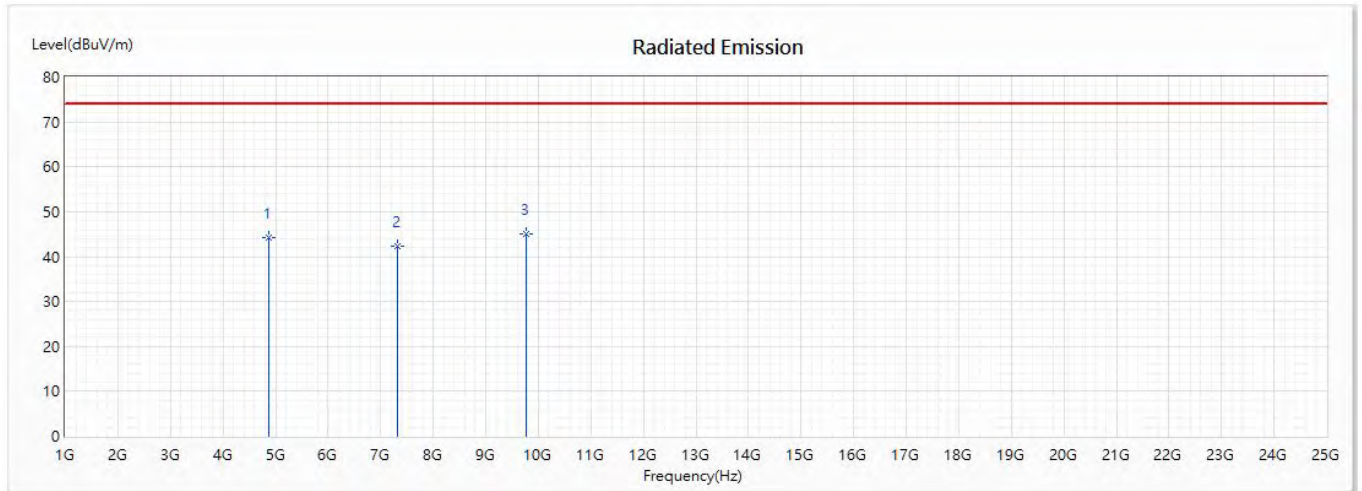

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4882	44.28	74.00	-29.72	55.87	-11.59	PK
2	7323	42.31	74.00	-31.69	55.88	-13.57	PK
* 3	9764	45.03	74.00	-28.97	57.55	-12.52	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
1 (Average)	4882	44.28	-31.057	13.223	-40.777	54.000
2 (Average)	7323	42.31	-31.057	11.253	-42.747	54.000
3 (Average)	9764	45.03	-31.057	13.973	-40.027	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Portable computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps (2480MHz)
 Test Date : 2020/05/08

Horizontal

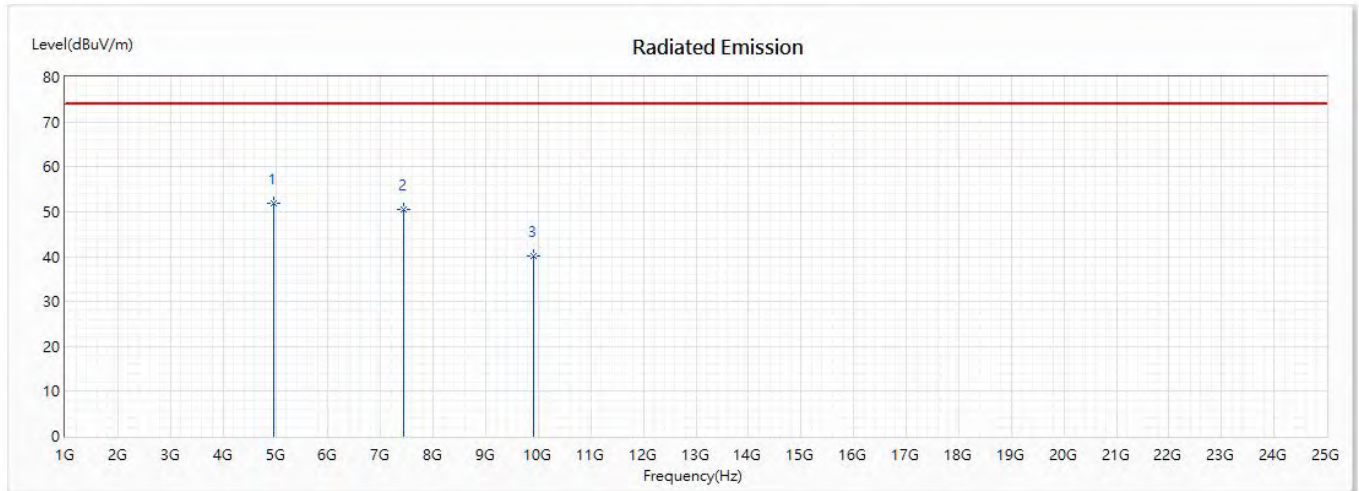

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	4960	51.95	74.00	-22.05	62.84	-10.89	PK
2	7440	50.51	74.00	-23.49	65.13	-14.62	PK
3	9920	40.07	74.00	-33.93	54.30	-14.23	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
1 (Average)	4960	51.95	-31.057	20.893	-33.107	54.000
2 (Average)	7440	50.51	-31.057	19.453	-34.547	54.000
3 (Average)	9920	40.07	-31.057	9.013	-44.987	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Portable computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps (2480MHz)
 Test Date : 2020/05/08

Vertical

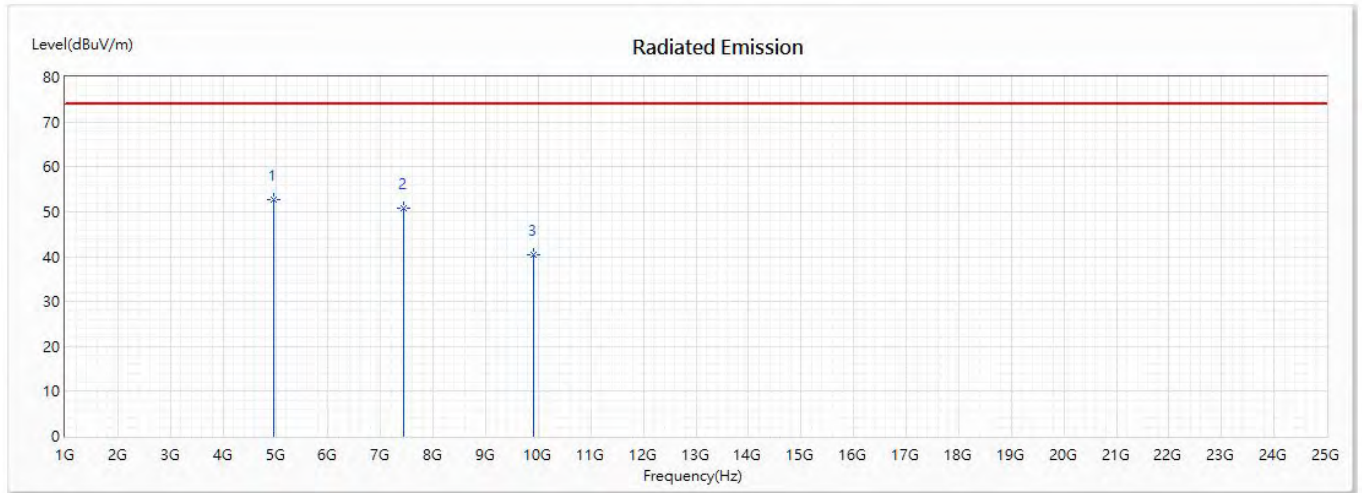

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	4960	52.56	74.00	-21.44	63.45	-10.89	PK
2	7440	50.67	74.00	-23.33	65.29	-14.62	PK
3	9920	40.31	74.00	-33.69	54.54	-14.23	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
1 (Average)	4960	52.56	-31.057	21.503	-32.497	54.000
2 (Average)	7440	50.67	-31.057	19.613	-34.387	54.000
3 (Average)	9920	40.31	-31.057	9.253	-44.747	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Portable computer
 Test Item : General Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps
 Test Date : 2020/05/13

Horizontal

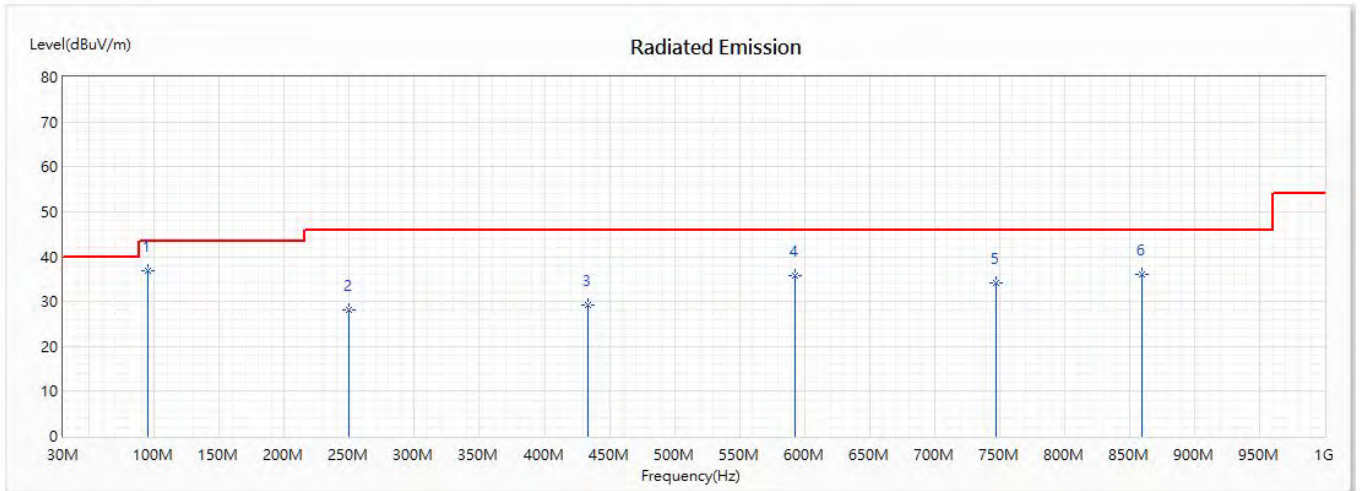


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	94.99	36.92	43.50	-6.58	46.29	-9.37	QP
2	249.22	28.07	46.00	-17.93	39.52	-11.45	QP
3	433.52	29.22	46.00	-16.78	33.28	-4.06	QP
4	592.6	35.65	46.00	-10.35	36.13	-0.48	QP
5	747.8	34.12	46.00	-11.88	34.32	-0.20	QP
6	859.35	36.11	46.00	-9.89	38.22	-2.11	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable computer
 Test Item : General Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps
 Test Date : 2020/05/13

Vertical

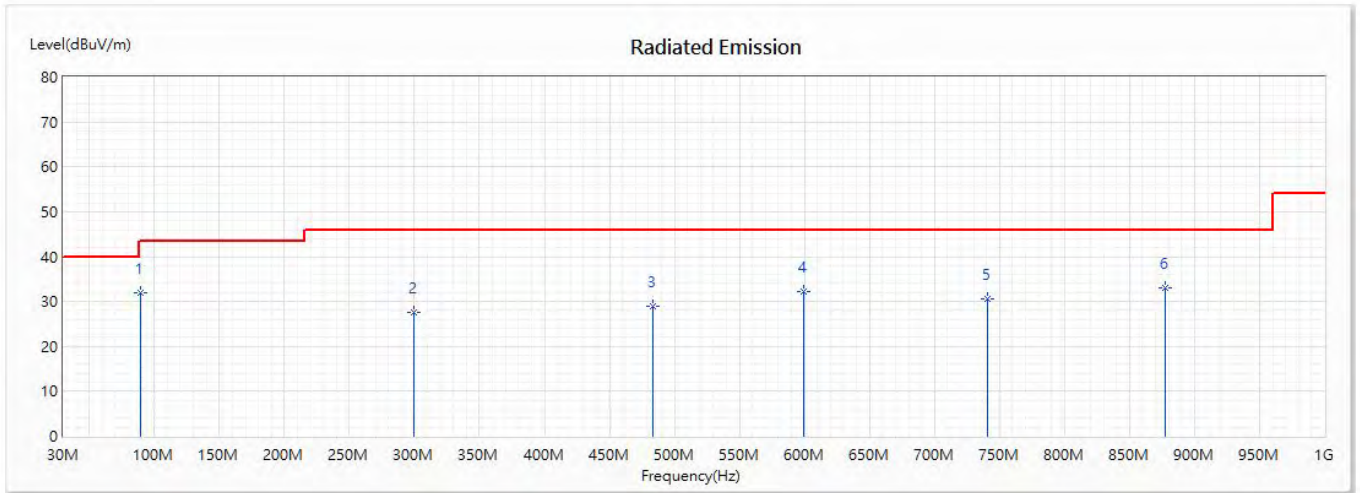


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	89.17	31.86	43.50	-11.64	41.26	-9.40	QP
2	299.66	27.53	46.00	-18.47	35.81	-8.28	QP
3	482.99	28.98	46.00	-17.02	34.50	-5.52	QP
4	599.39	32.18	46.00	-13.82	32.36	-0.18	QP
5	741.01	30.70	46.00	-15.30	30.13	0.57	QP
6	877.78	33.03	46.00	-12.97	35.14	-2.11	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable computer
 Test Item : General Radiated Emission
 Test Mode : Mode 2: Transmit - 2Mbps
 Test Date : 2020/05/13

Horizontal

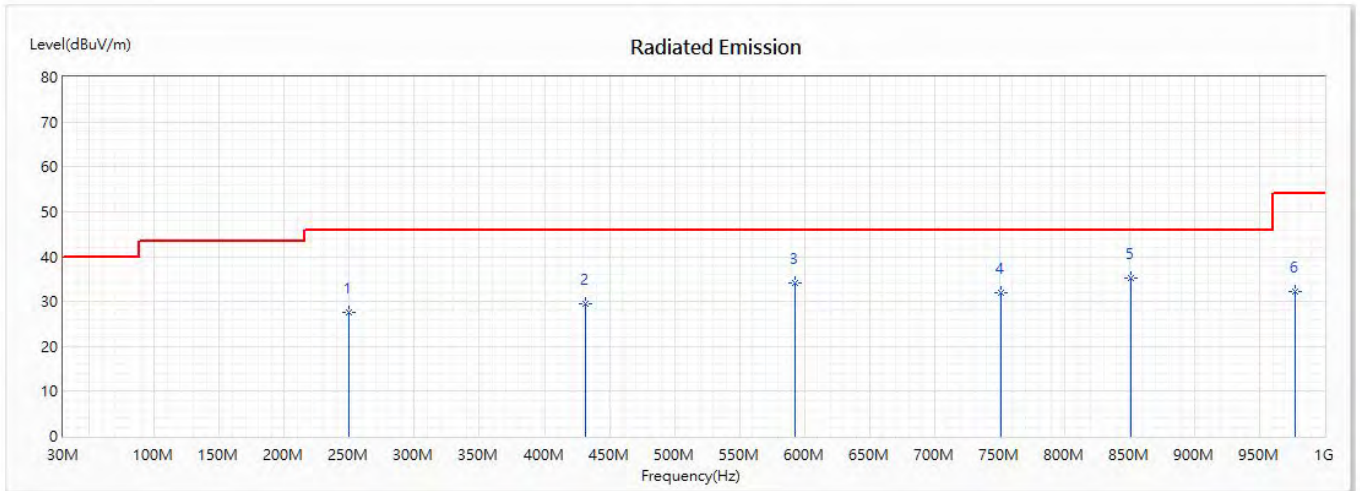


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	249.22	27.57	46.00	-18.43	39.02	-11.45	QP
2	431.58	29.59	46.00	-16.41	33.83	-4.24	QP
3	592.6	34.10	46.00	-11.90	34.58	-0.48	QP
4	750.71	31.87	46.00	-14.13	32.41	-0.54	QP
* 5	850.62	35.15	46.00	-10.85	37.27	-2.12	QP
6	977.69	32.24	54.00	-21.76	33.88	-1.64	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable computer
 Test Item : General Radiated Emission
 Test Mode : Mode 2: Transmit - 2Mbps
 Test Date : 2020/05/13

Vertical

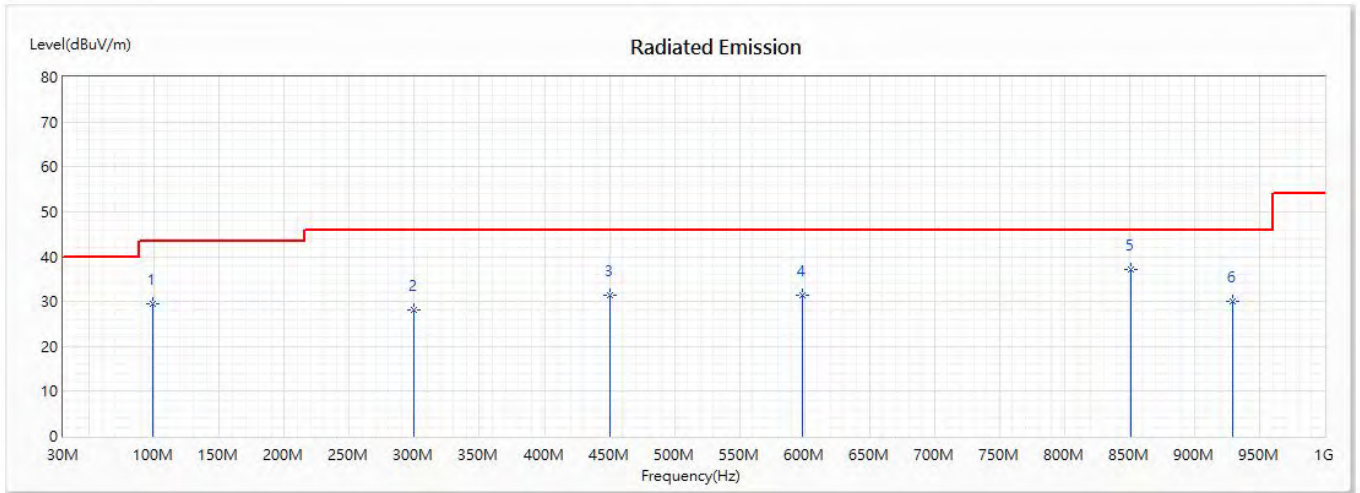


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	98.87	29.56	43.50	-13.94	38.22	-8.66	QP
2	299.66	28.03	46.00	-17.97	36.31	-8.28	QP
3	450.01	31.27	46.00	-14.73	35.07	-3.80	QP
4	598.42	31.30	46.00	-14.70	31.52	-0.22	QP
* 5	850.62	37.25	46.00	-8.75	39.37	-2.12	QP
6	929.19	29.90	46.00	-16.10	33.14	-3.24	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable computer
 Test Item : General Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps
 Test Date : 2020/05/13

Horizontal

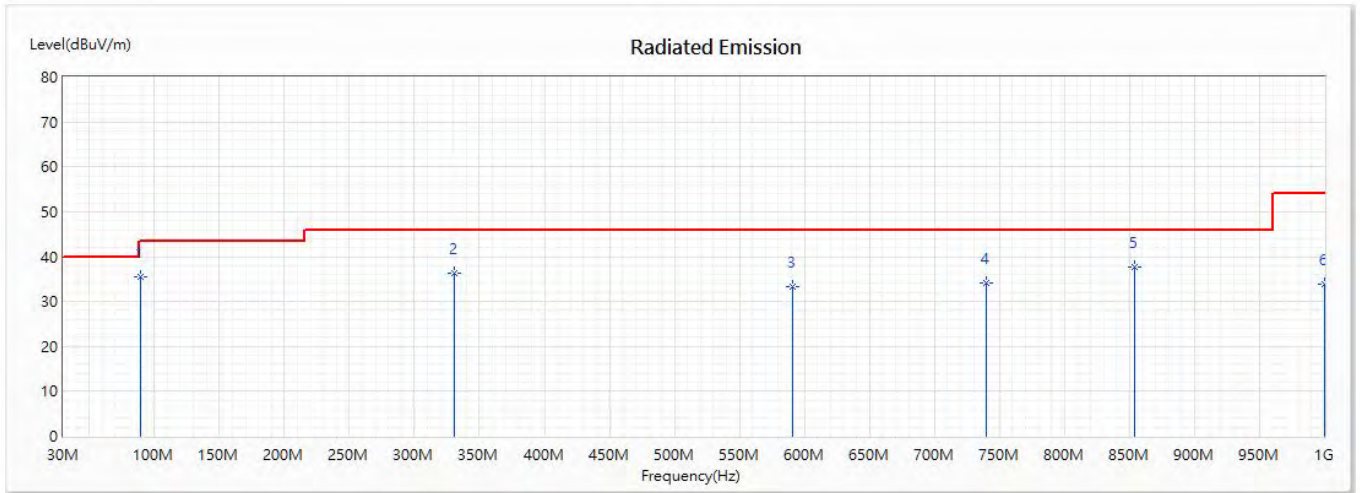


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	89.17	35.52	43.50	-7.98	44.92	-9.40	QP
2	330.7	36.32	46.00	-9.68	44.03	-7.71	QP
3	590.66	33.24	46.00	-12.76	33.81	-0.57	QP
4	740.04	34.07	46.00	-11.93	33.38	0.69	QP
5	853.53	37.57	46.00	-8.43	39.69	-2.12	QP
6	1000	33.78	54.00	-20.22	35.61	-1.83	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable computer
 Test Item : General Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps
 Test Date : 2020/05/13

Vertical

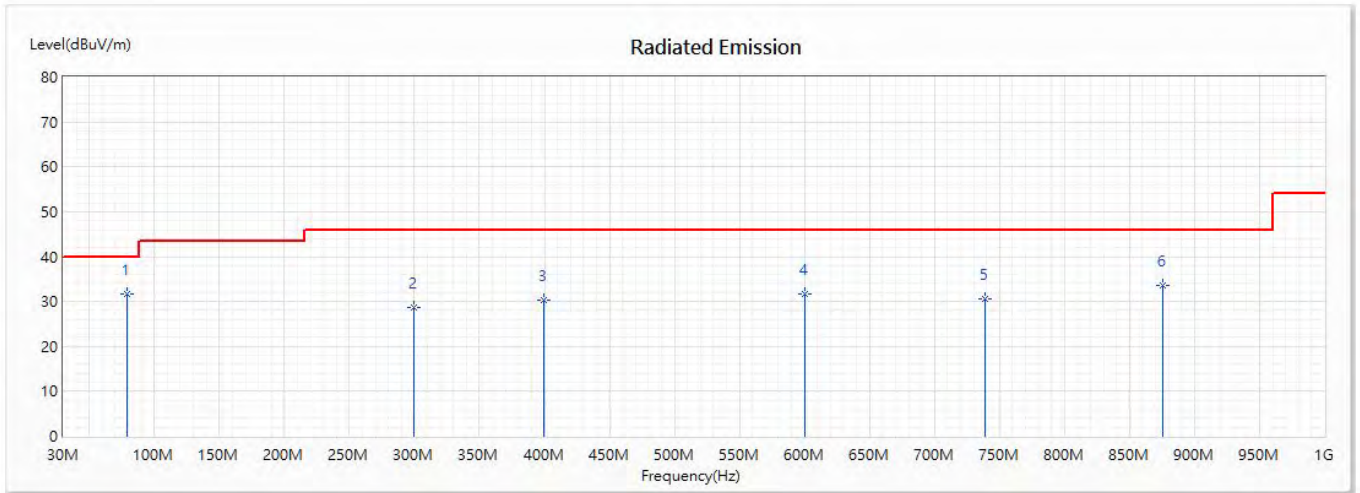


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	79.47	31.63	40.00	-8.37	43.73	-12.10	QP
2	299.66	28.78	46.00	-17.22	37.06	-8.28	QP
3	399.57	30.33	46.00	-15.67	37.64	-7.31	QP
4	600.36	31.64	46.00	-14.36	31.82	-0.18	QP
5	739.07	30.67	46.00	-15.33	30.14	0.53	QP
6	875.84	33.64	46.00	-12.36	35.75	-2.11	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

5. RF Antenna Conducted Test

5.1. Test Setup

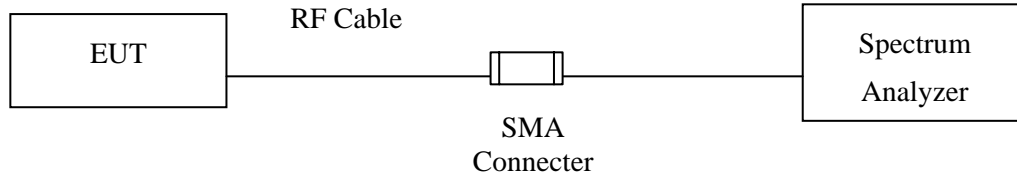

5.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.3. Test Procedure

Tested according to FHSS test procedure of KDB558074 section 9 b) for compliance to FCC 47CFR 15.247 requirements.

5.4. Uncertainty

$\pm 1.20\text{dB}$

5.5. Test Result of RF Antenna Conducted Test

Product : Portable computer
 Test Item : RF Antenna Conducted Test
 Test Mode : Mode 1: Transmit - 1Mbps
 Test Date : 2020/05/13

Figure Channel 00:

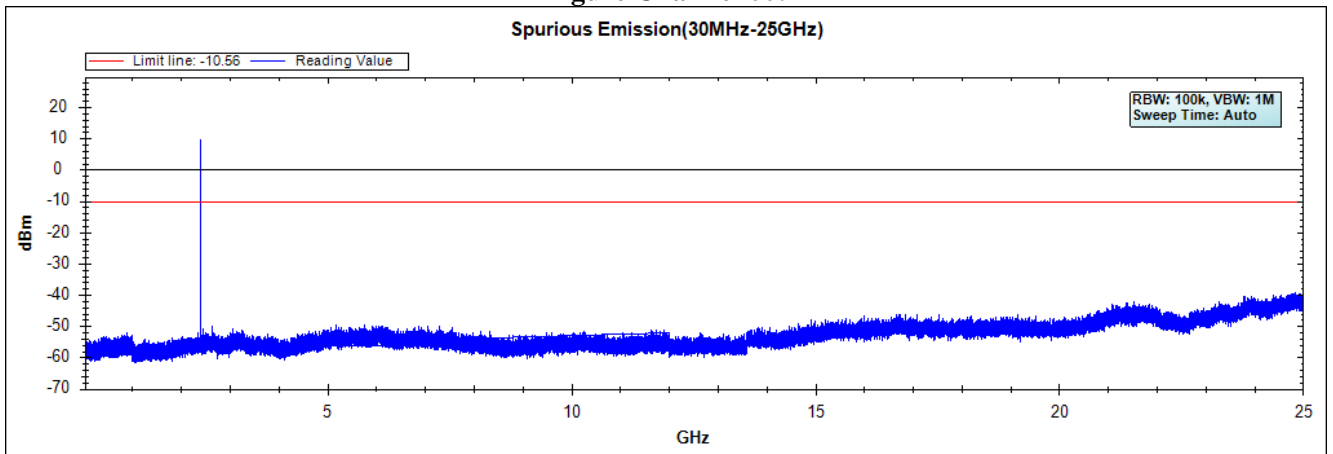


Figure Channel 39:


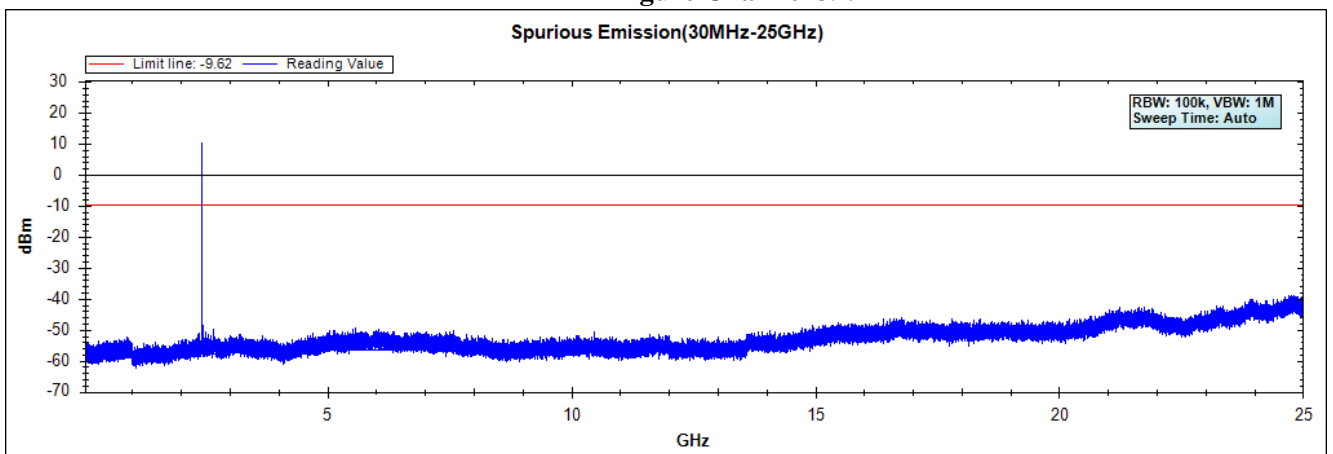


Figure Channel 78:

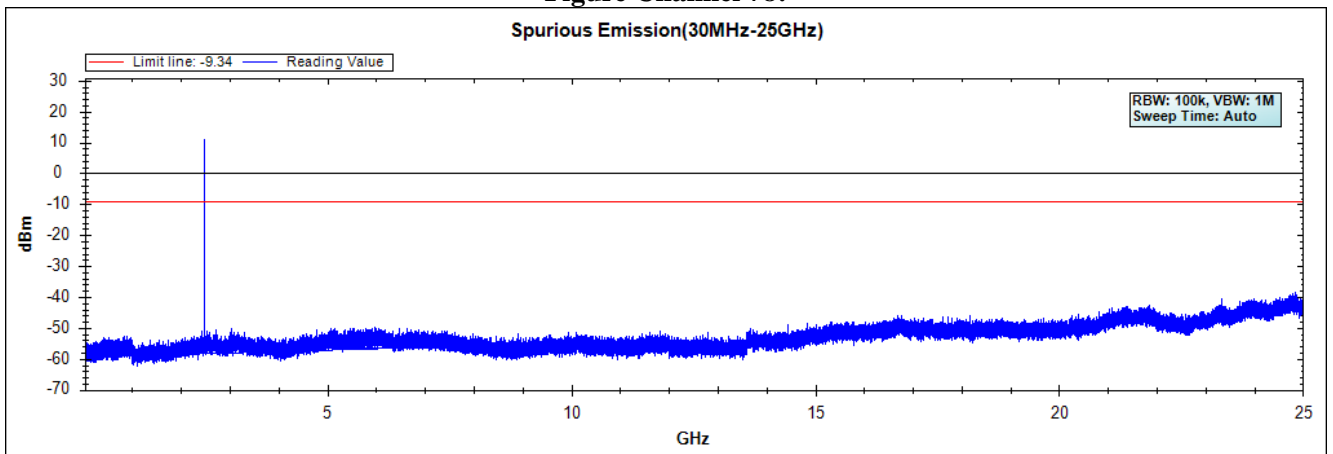

Note: The above test pattern is synthesized by multiple of the frequency range.

Product : Portable computer
Test Item : RF Antenna Conducted Test
Test Mode : Mode 2: Transmit - 2Mbps
Test Date : 2020/05/13

Figure Channel 00:

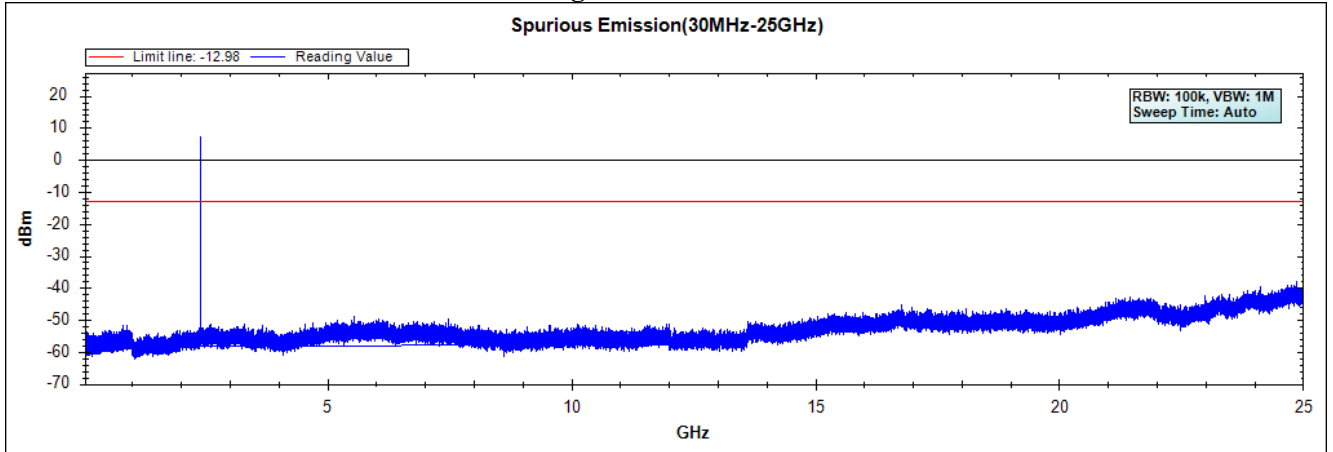


Figure Channel 39:


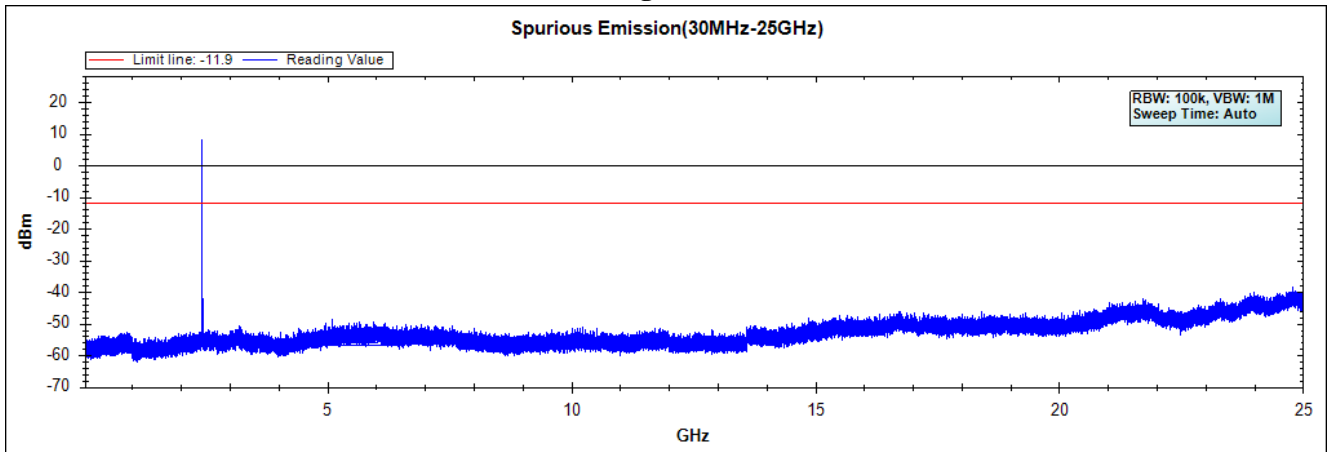


Figure Channel 78:

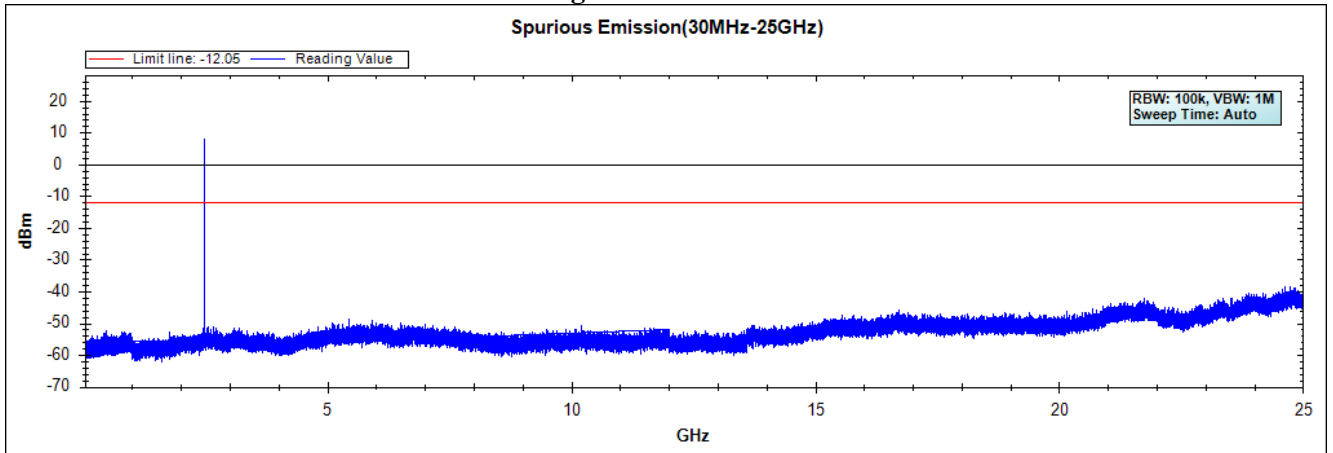

Note: The above test pattern is synthesized by multiple of the frequency range.

Product : Portable computer
Test Item : RF Antenna Conducted Test
Test Mode : Mode 3: Transmit - 3Mbps
Test Date : 2020/05/13

Figure Channel 00:

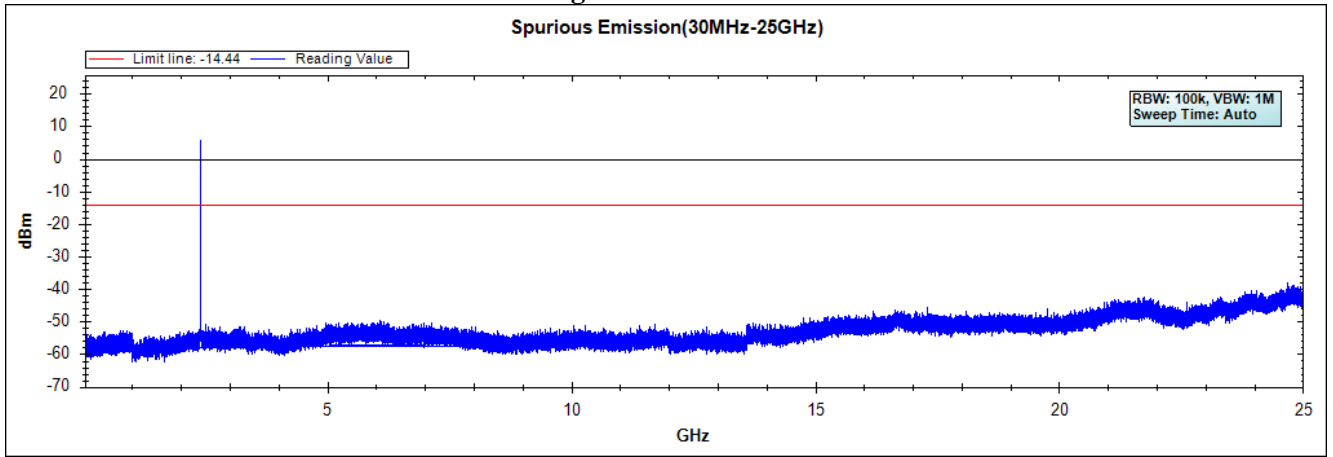


Figure Channel 39:


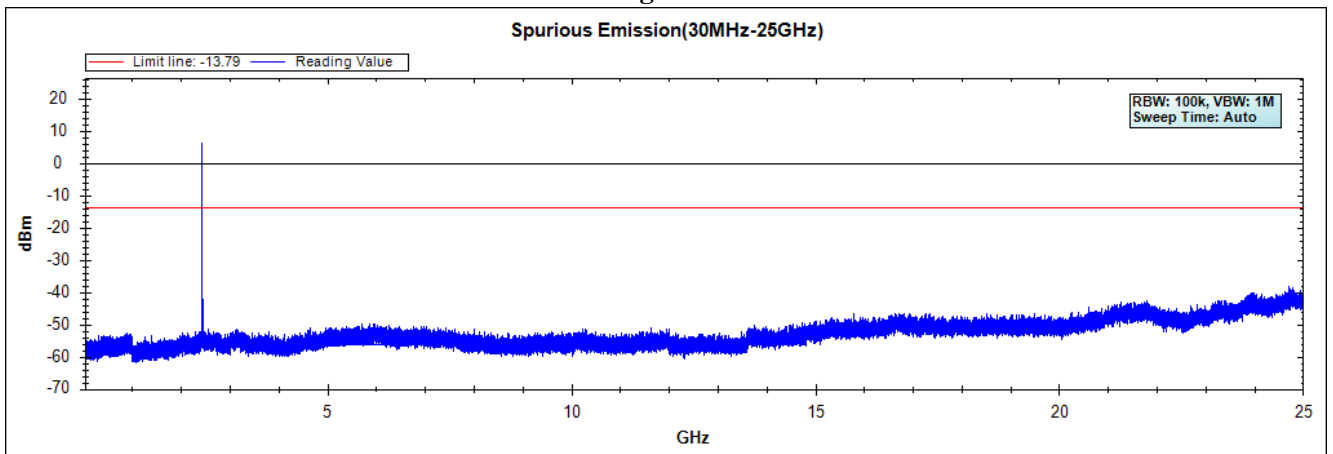


Figure Channel 78:

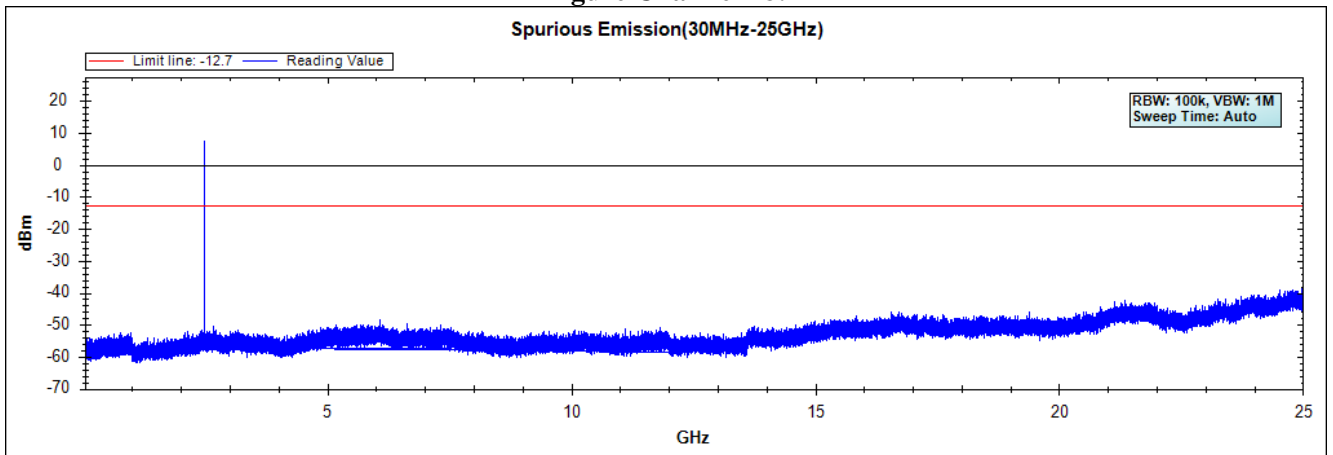


Note: The above test pattern is synthesized by multiple of the frequency range.


6. Band Edge

6.1. Test Setup

RF Conducted Measurement

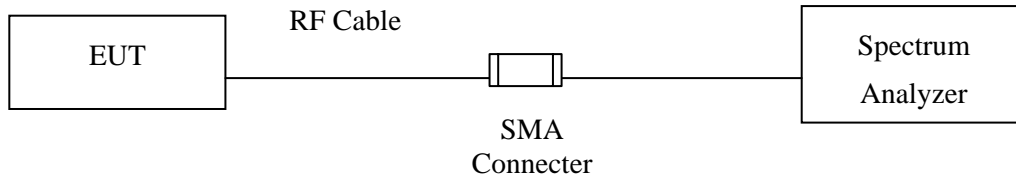

RF Radiated Measurement:

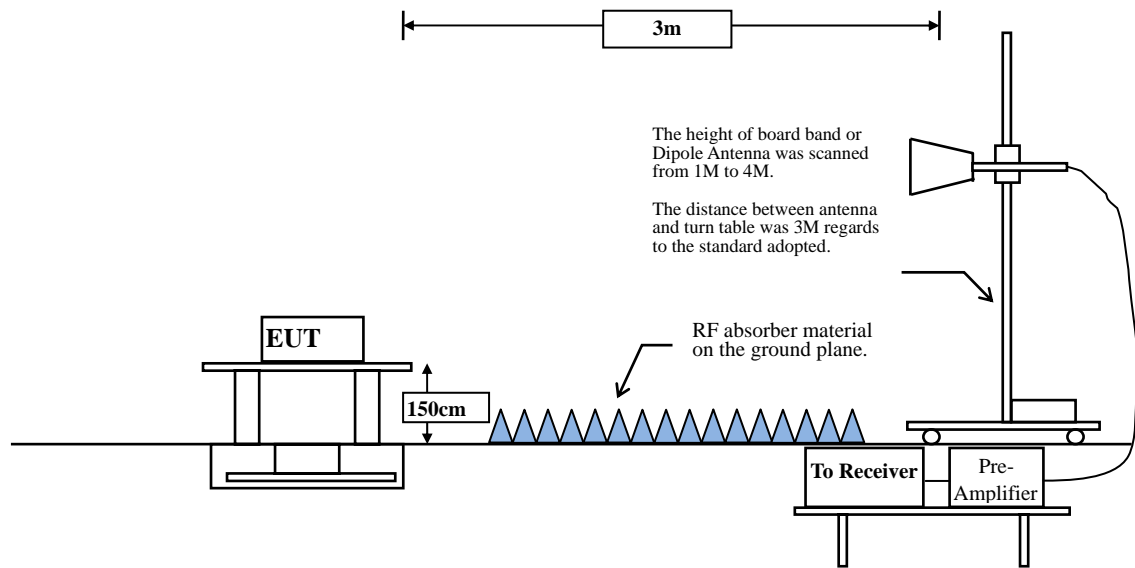

6.2. Limit

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.3. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The bandwidth setting below 1GHz and above 1GHz on the field strength meter is 120 kHz and 1MHz, respectively.

6.4. Uncertainty


± 4.08 dB above 1GHz

± 4.22 dB below 1GHz

6.5. Test Result of Band Edge

Product : Portable computer
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps (2402MHz)
 Test Date : 2020/05/13

Peak:

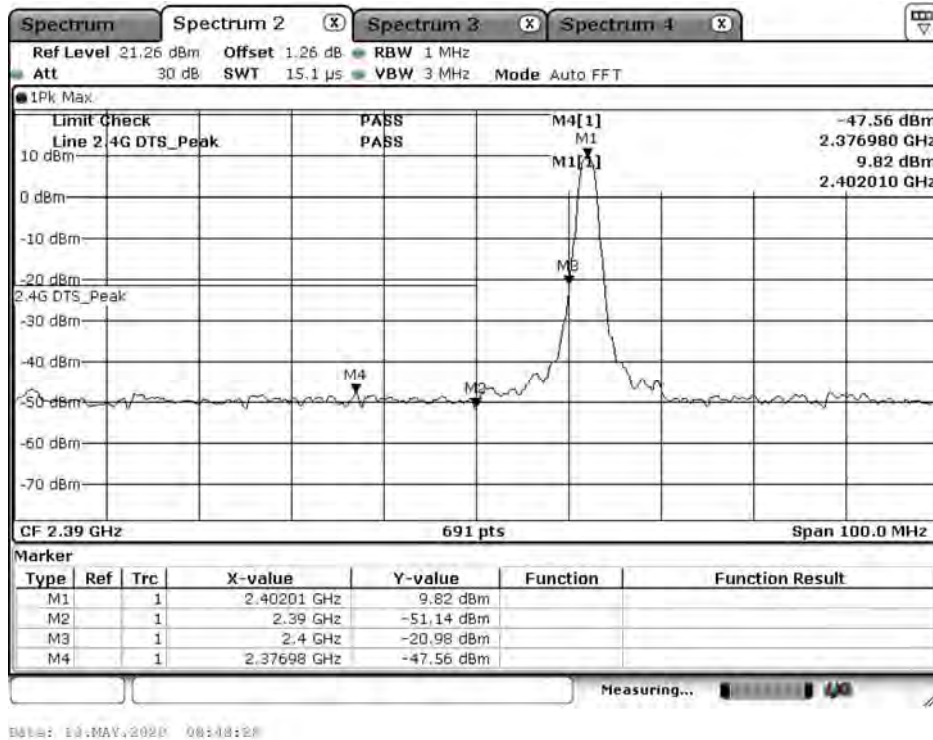


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
00 (Average)	2376.980	-47.560	-31.057	-78.617	-37.397	-41.220
00 (Average)	2390.000	-51.140	-31.057	-82.197	-40.977	-41.220
00 (Average)	2400.000	-20.980	-31.057	-52.037	--	--
00 (Average)	2402.010	9.820	-31.057	-21.237	--	--

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Portable computer
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps (2480MHz)
 Test Date : 2020/05/13

Peak:

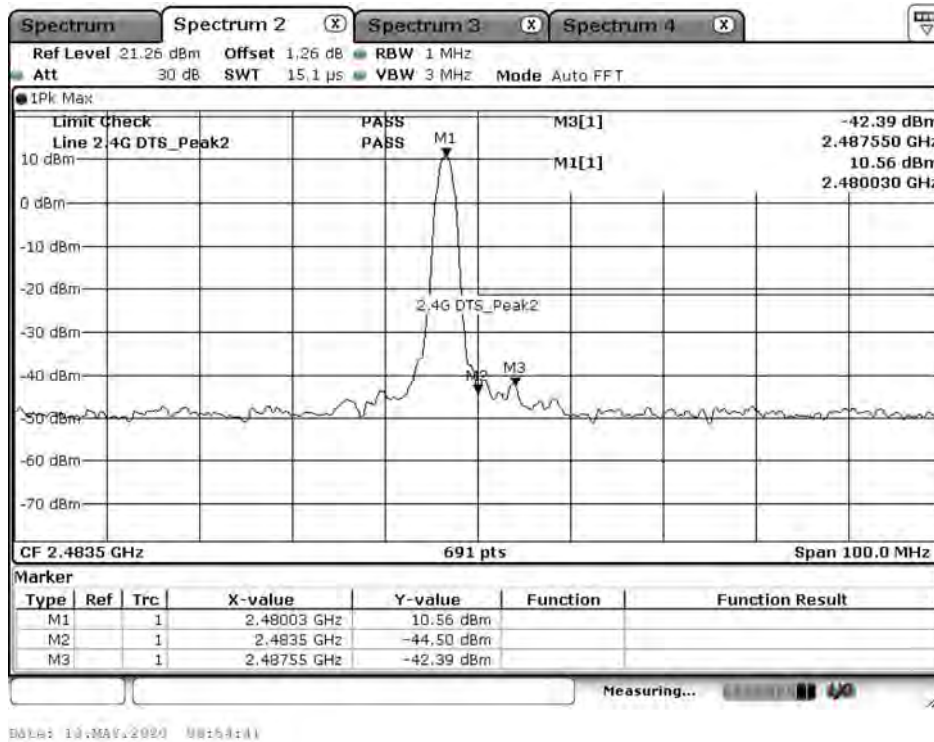


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)
78 (Average)	2480.030	10.560	-31.057	-20.497	--	--
78 (Average)	2483.500	-44.500	-31.057	-75.557	-34.337	-41.220
78 (Average)	2487.550	-42.390	-31.057	-73.447	-32.227	-41.220

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Portable computer
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - 2Mbps (2402MHz)
 Test Date : 2020/05/13

Peak:

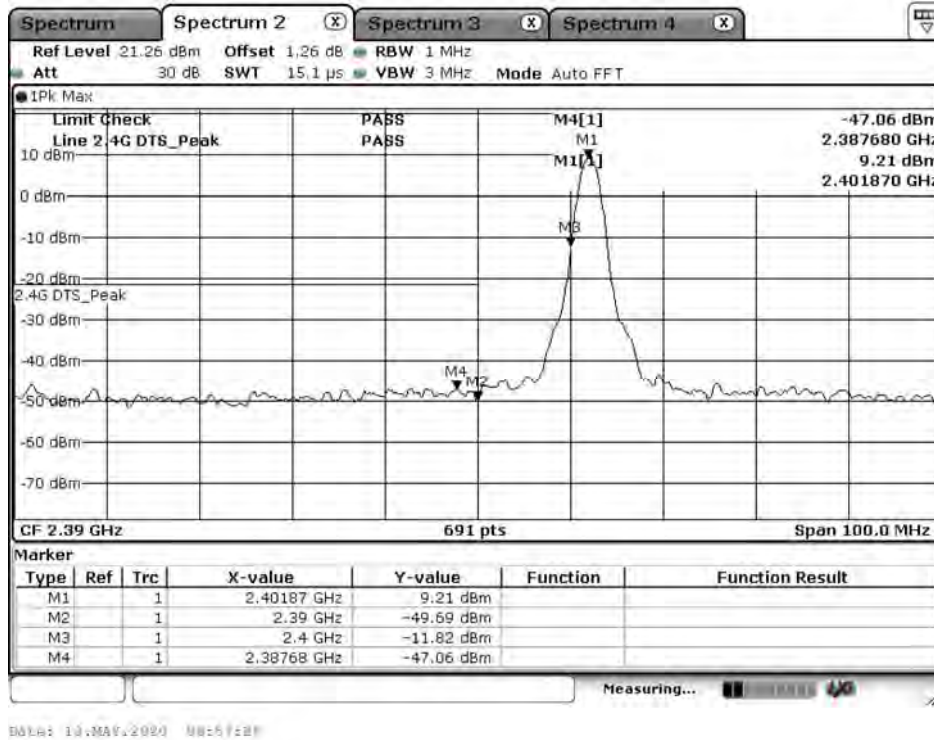


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
00 (Average)	2387.680	-47.060	-31.057	-78.117	-36.897	-41.220
00 (Average)	2390.000	-49.690	-31.057	-80.747	-39.527	-41.220
00 (Average)	2400.000	-11.820	-31.057	-42.877	--	--
00 (Average)	2401.870	9.210	-31.057	-21.847	--	--

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Portable computer
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - 2Mbps (2480MHz)
 Test Date : 2020/05/13

Peak:

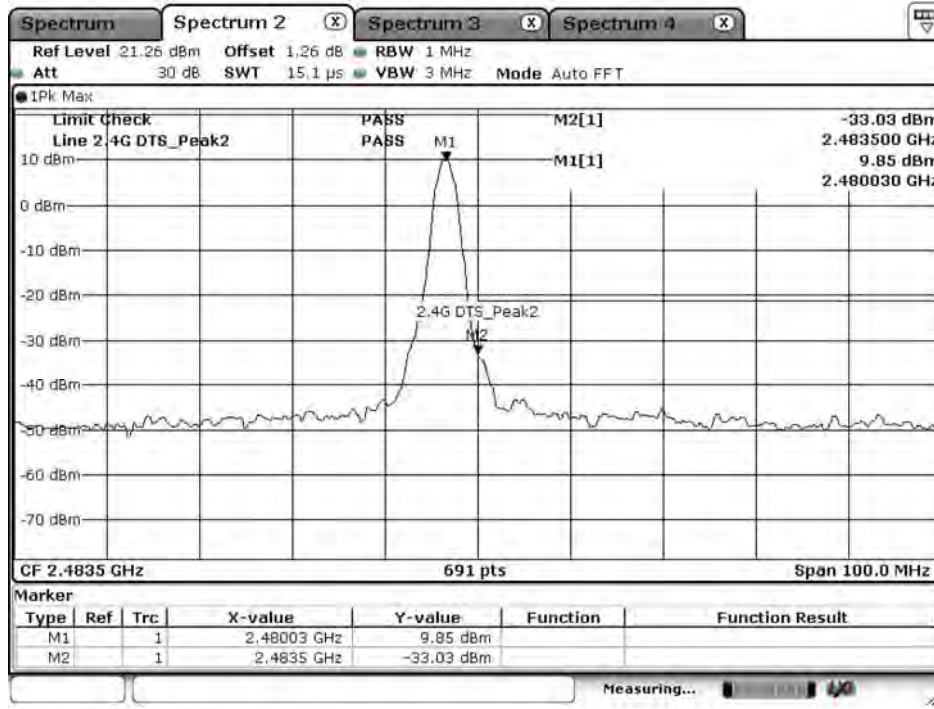

DATE: 13.MAY.2020 08:55:33


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)
78 (Average)	2480.030	9.850	-31.057	-21.207	--	--
78 (Average)	2483.500	-33.030	-31.057	-64.087	-22.867	-41.220

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Portable computer
 Test Item : Band Edge
 Test Mode : Mode 3: Transmit - 3Mbps (2402MHz)
 Test Date : 2020/05/13

Peak:

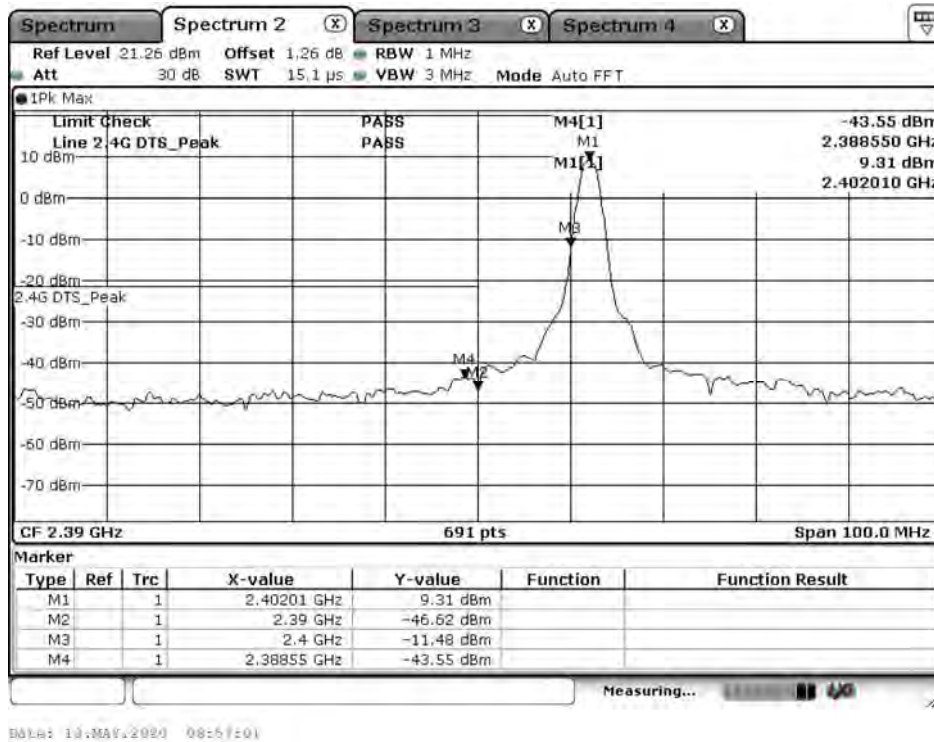


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
00 (Average)	2388.550	-43.550	-31.057	-74.607	-33.387	-41.220
00 (Average)	2390.000	-46.620	-31.057	-77.677	-36.457	-41.220
00 (Average)	2400.000	-11.480	-31.057	-42.537	--	--
00 (Average)	2402.010	9.310	-31.057	-21.747	--	--

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Portable computer
 Test Item : Band Edge
 Test Mode : Mode 3: Transmit - 3Mbps (2480MHz)
 Test Date : 2020/05/13

Peak:

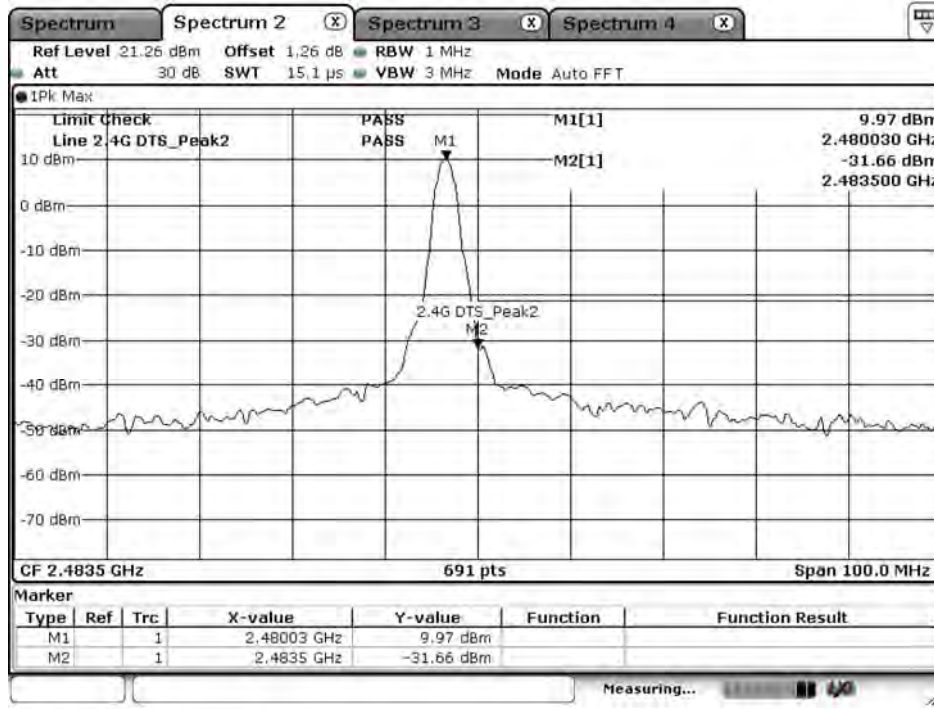

DATE: 13.MAY.2020 08:56:27


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)
78 (Average)	2480.030	9.970	-31.057	-21.087	--	--
78 (Average)	2483.500	-31.660	-31.057	-62.717	-21.497	-41.220

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

7. Channel Number

7.1. Test Setup

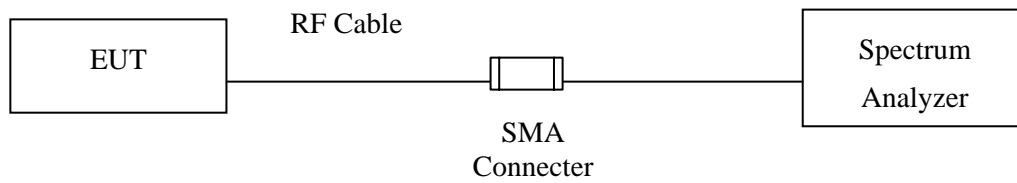

7.2. Limit

Frequency hopping systems operating in the 2400-2483.5 MHz bands shall use at least 75 hopping frequencies.

7.3. Test Procedure

Tested according to FHSS test procedure of KDB558074 section 9 (b for compliance to FCC 47CFR 15.247 requirements.

7.4. Uncertainty


N/A

7.5. Test Result of Channel Number


Product : Portable computer
 Test Item : Channel Number
 Test Mode : Mode 1: Transmit - 1Mbps
 Test Date : 2020/05/13

Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass


2402-2421MHz

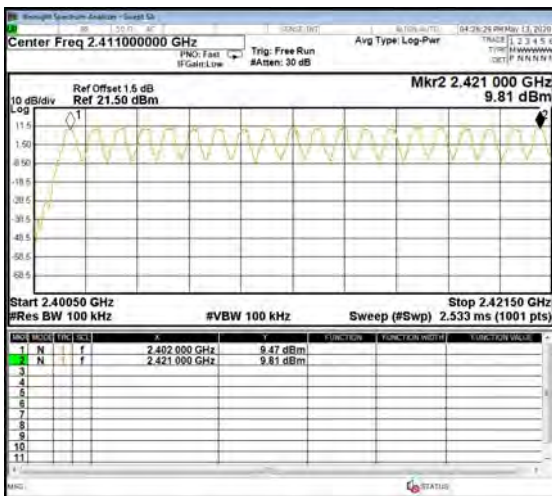


2422-2441MHz

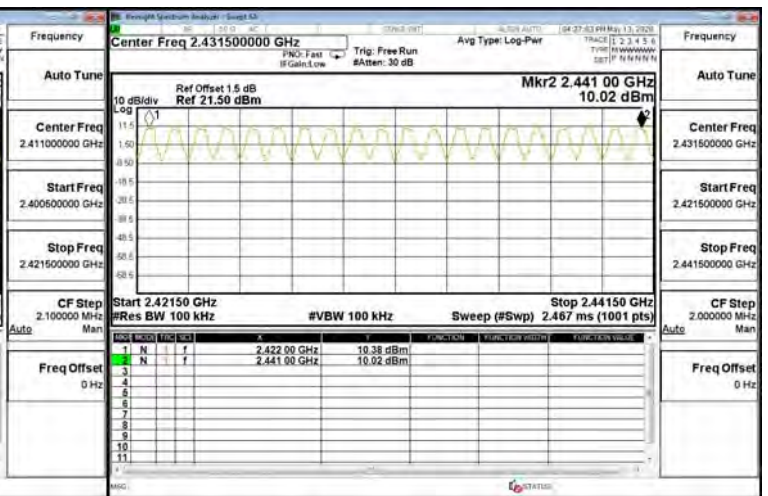

2442-2461MHz

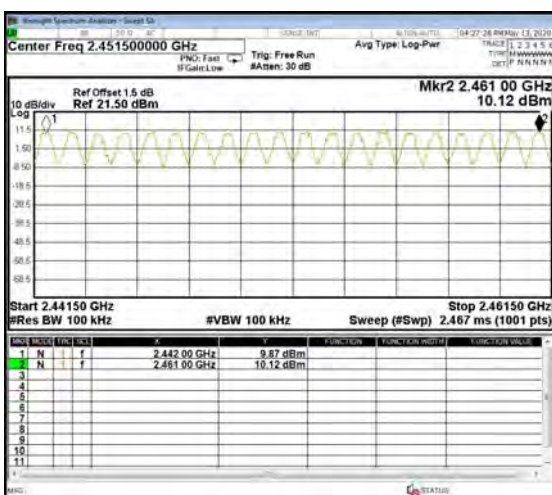


2462-2480MHz

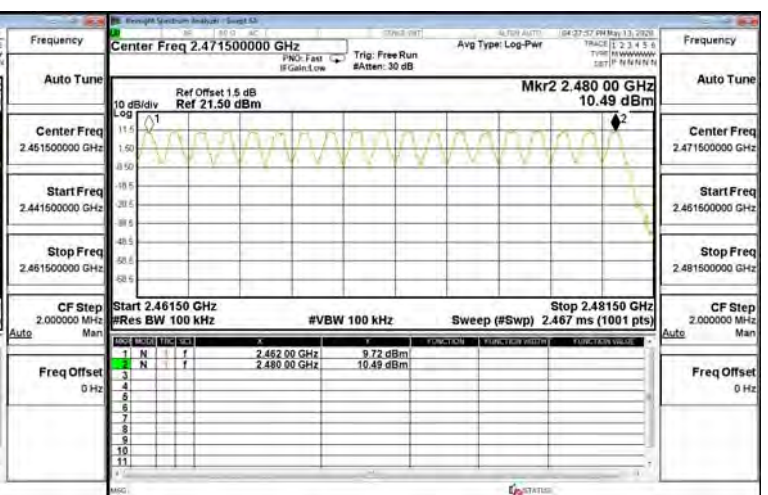


Product : Portable computer
 Test Item : Channel Number
 Test Mode : Mode 2: Transmit - 2Mbps
 Test Date : 2020/05/13

Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass


2402-2421MHz

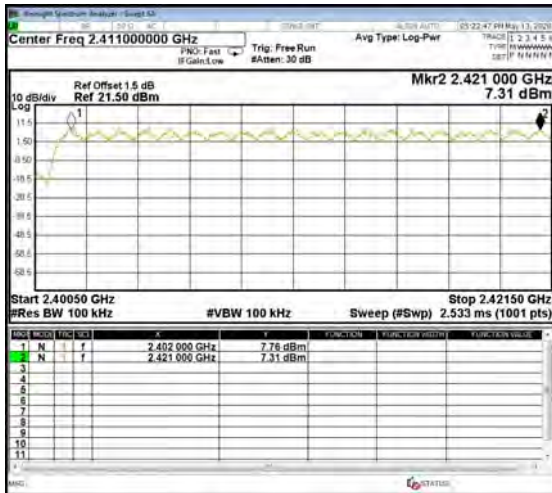


2422-2441MHz

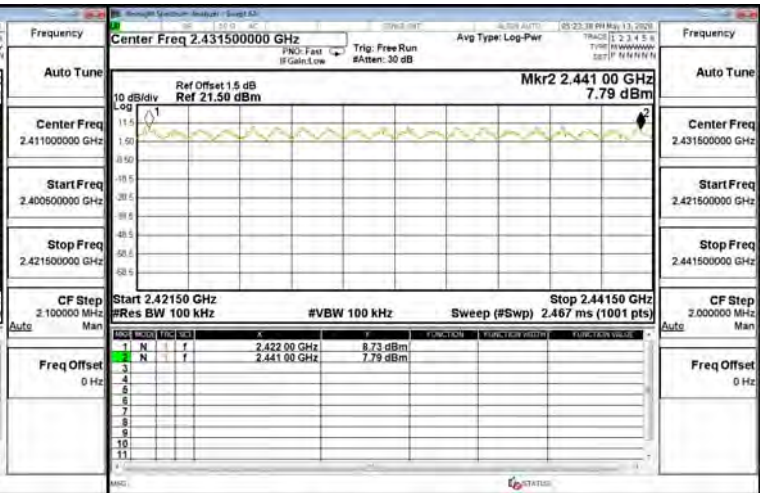

2442-2461MHz

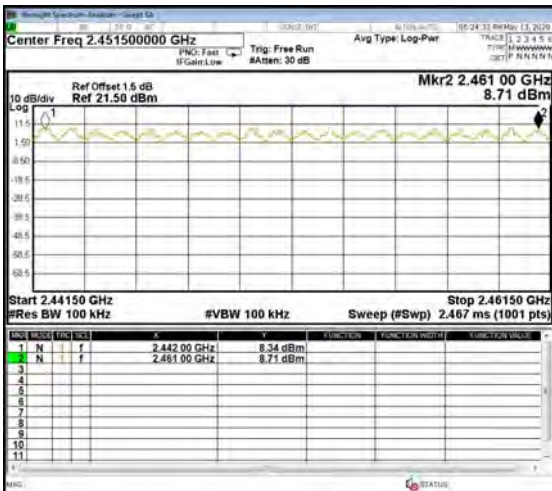


2462-2480MHz

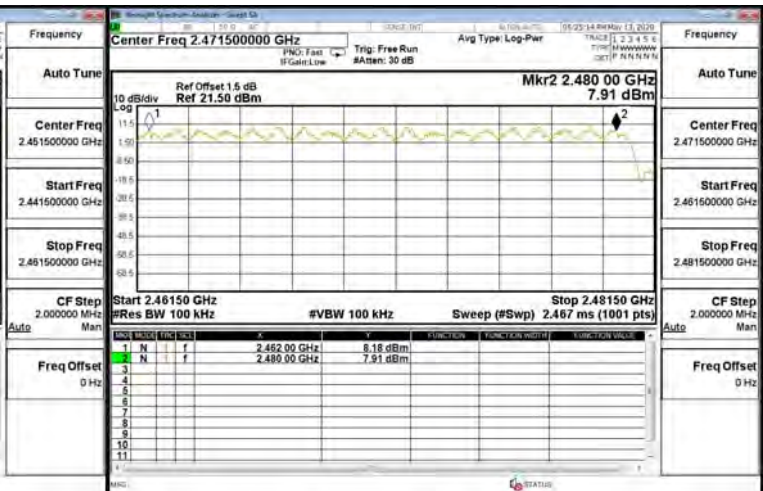


Product : Portable computer
 Test Item : Channel Number
 Test Mode : Mode 3: Transmit - 3Mbps
 Test Date : 2020/05/13

Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass


2402-2421MHz

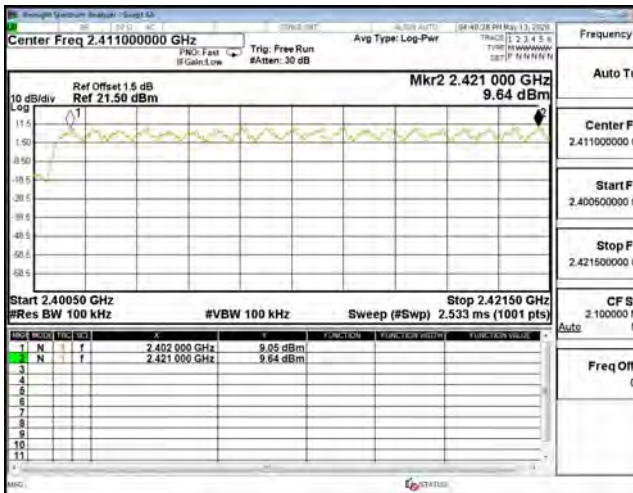


2422-2441MHz

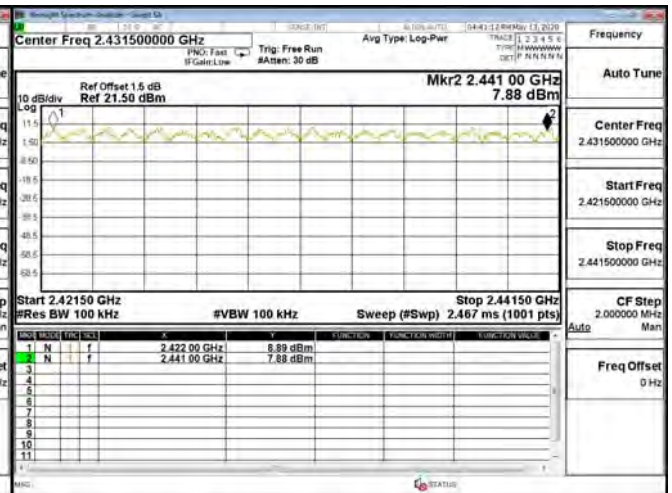

2442-2461MHz

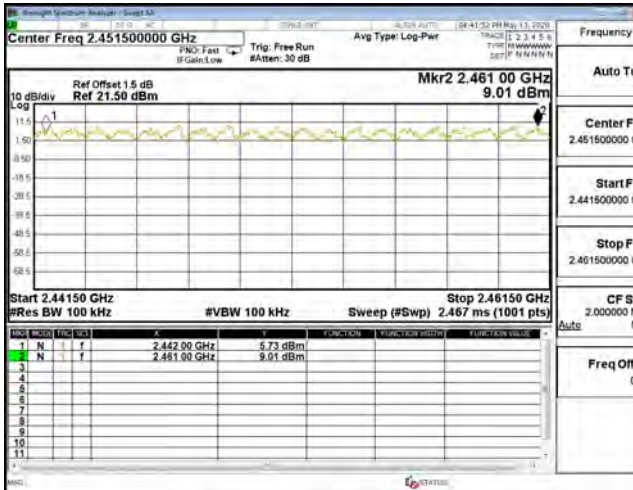


2462-2480MHz

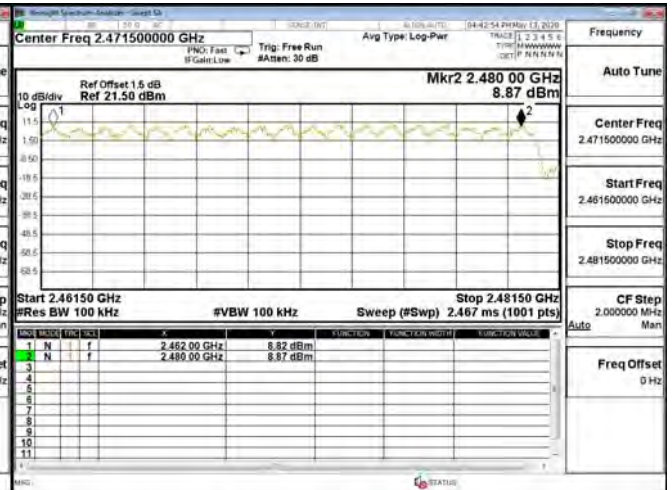

8. Channel Separation

8.1. Test Setup

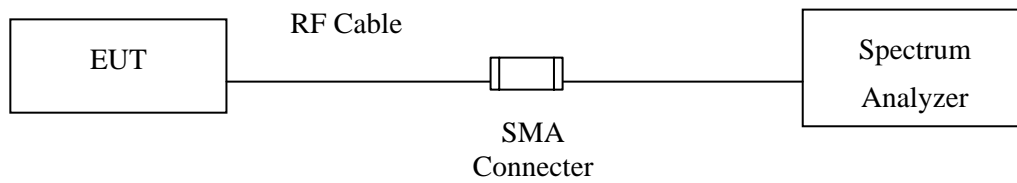

8.2. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

8.3. Test Procedure

Tested according to FHSS test procedure of KDB558074 section 9 (b for compliance to FCC 47CFR 15.247 requirements).

8.4. Uncertainty

$\pm 283\text{Hz}$


8.5. Test Result of Channel Separation

Product : Portable computer
 Test Item : Channel Separation
 Test Mode : Mode 1: Transmit - 1Mbps
 Test Date : 2020/05/13


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Limit (kHz)	Limit of (2/3)*20dB Bandwidth (kHz)	Result
00	2402	1000	>25 kHz	644.0	Pass
39	2441	1000	>25 kHz	642.0	Pass
78	2480	1000	>25 kHz	640.0	Pass

NOTE: The 20dB Bandwidth is refer to section 10.


Channel 00 (2402MHz)

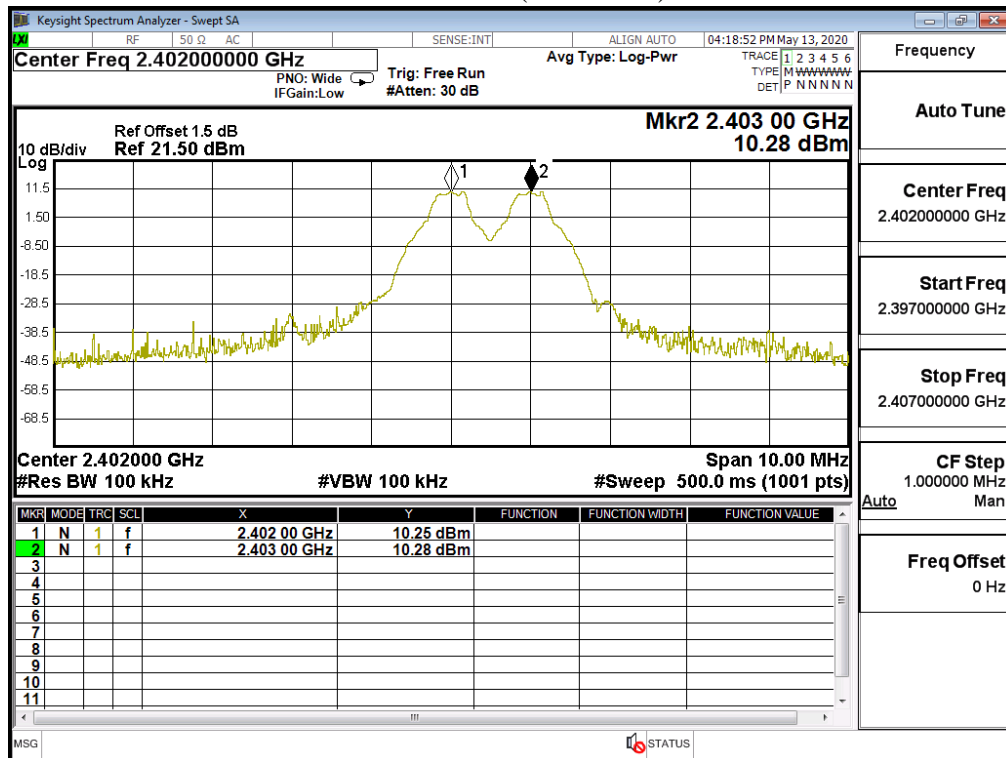

Channel 39 (2441MHz)

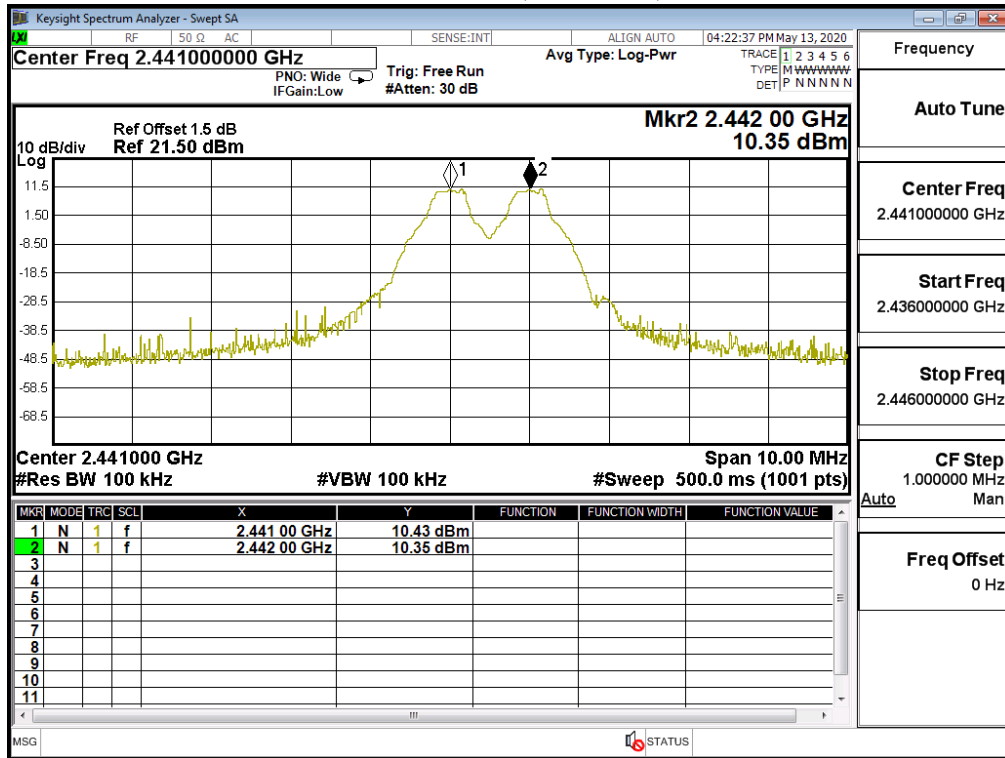

Channel 78 (2480MHz)

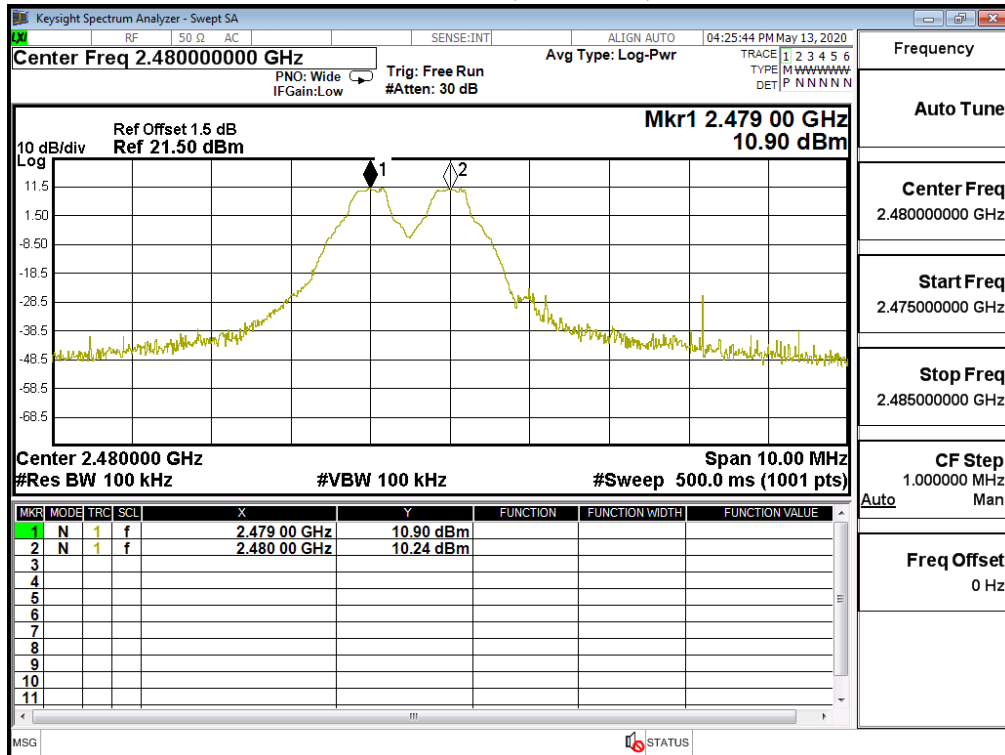


Product : Portable computer
 Test Item : Channel Separation
 Test Mode : Mode 2: Transmit - 2Mbps
 Test Date : 2020/05/13


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Limit (kHz)	Limit of (2/3)*20dB Bandwidth (kHz)	Result
00	2402	1000	>25 kHz	940.0	Pass
39	2441	1000	>25 kHz	942.0	Pass
78	2480	1000	>25 kHz	940.0	Pass

NOTE: The 20dB Bandwidth is refer to section 10.


Channel 00 (2402MHz)

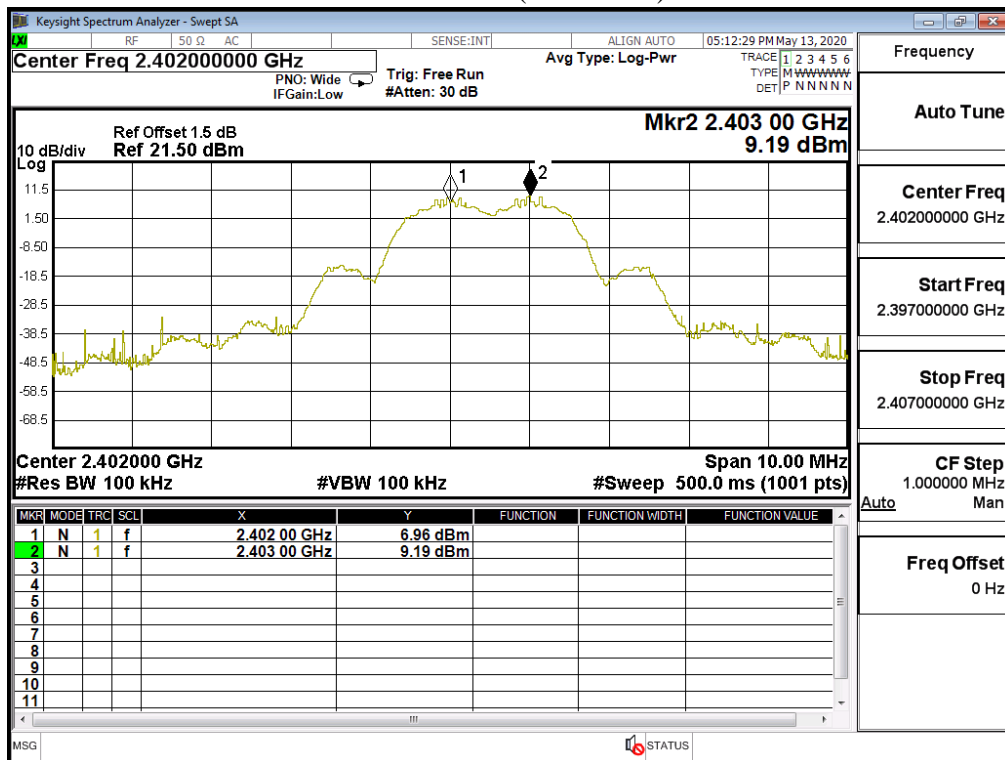

Channel 39 (2441MHz)

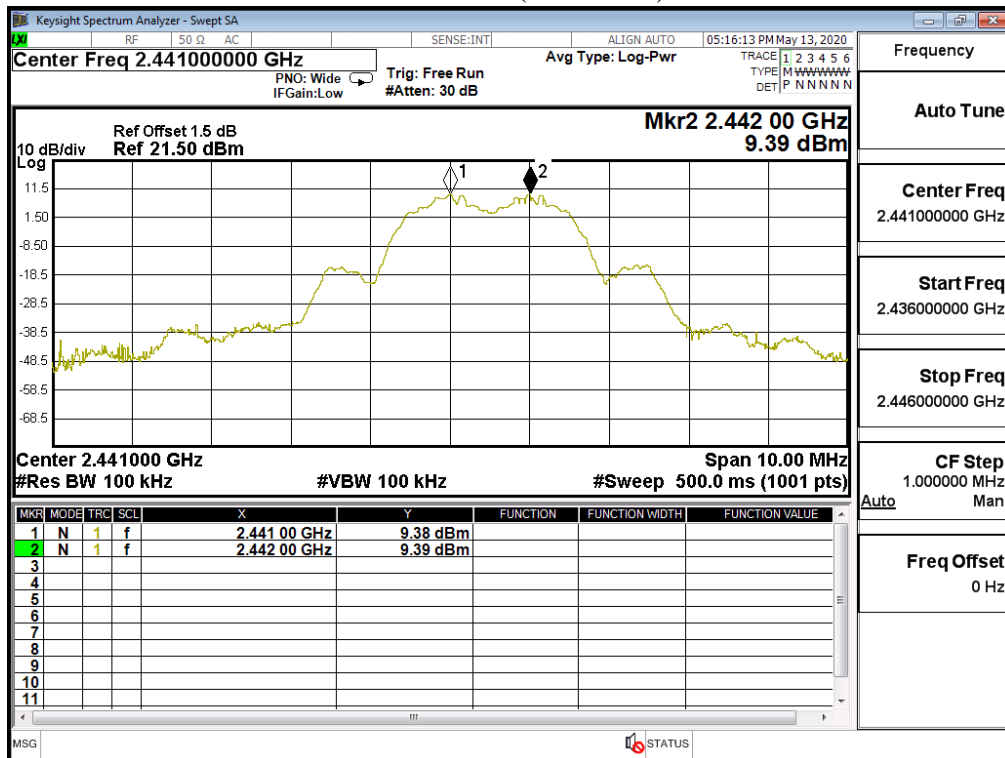

Channel 78 (2480MHz)

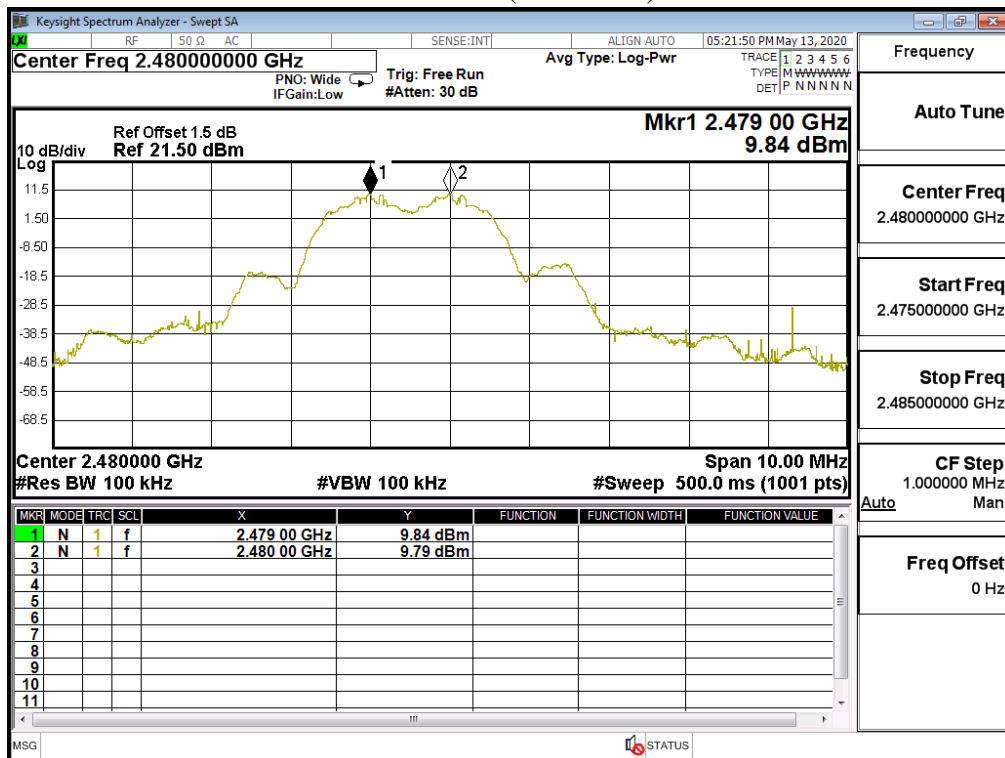


Product : Portable computer
 Test Item : Channel Separation
 Test Mode : Mode 3: Transmit - 3Mbps
 Test Date : 2020/05/13


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Limit (kHz)	Limit of (2/3)*20dB Bandwidth (kHz)	Result
00	2402	1000	>25 kHz	958.0	Pass
39	2441	1000	>25 kHz	960.0	Pass
78	2480	1000	>25 kHz	960.0	Pass

NOTE: The 20dB Bandwidth is refer to section 10.


Channel 00 (2402MHz)

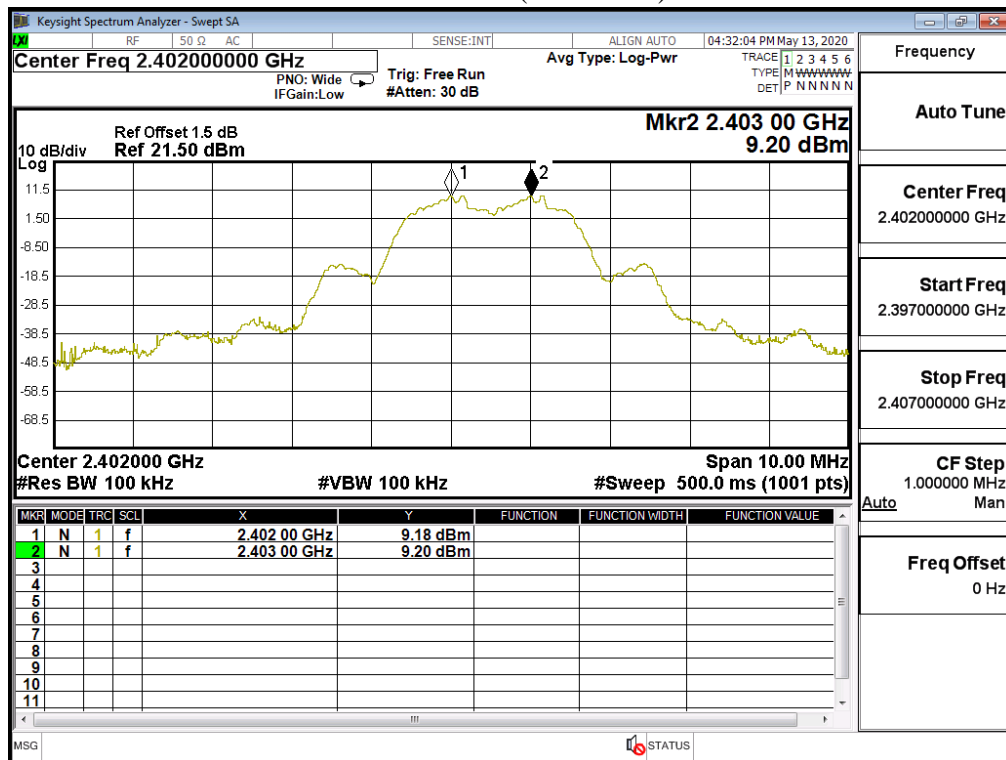

Channel 39 (2441MHz)

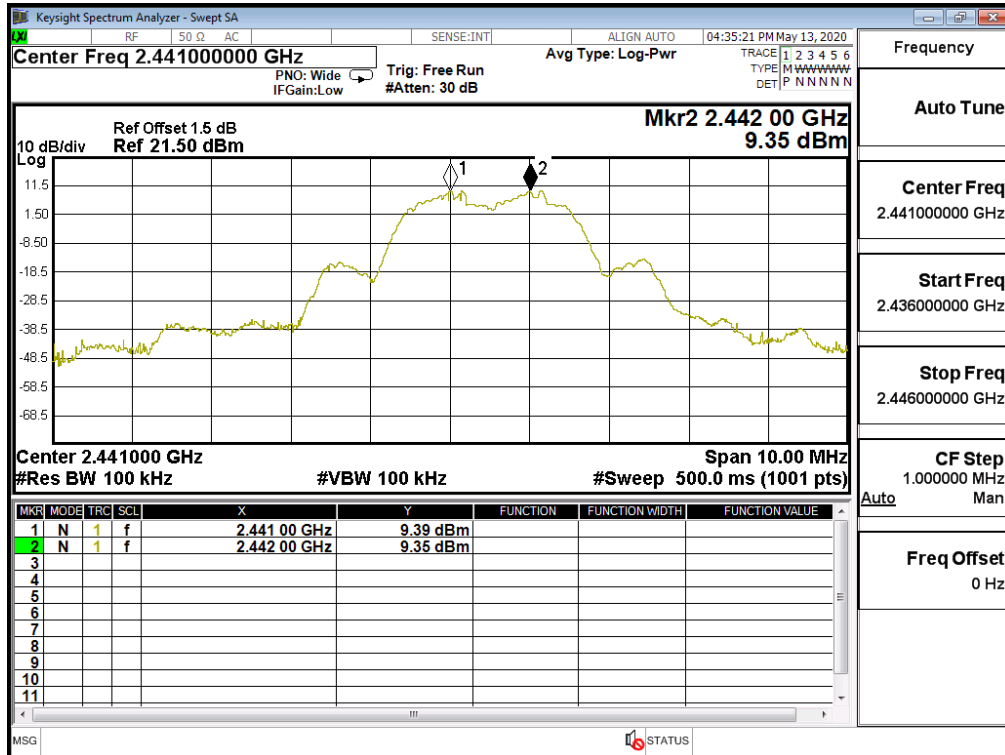


Channel 78 (2480MHz)

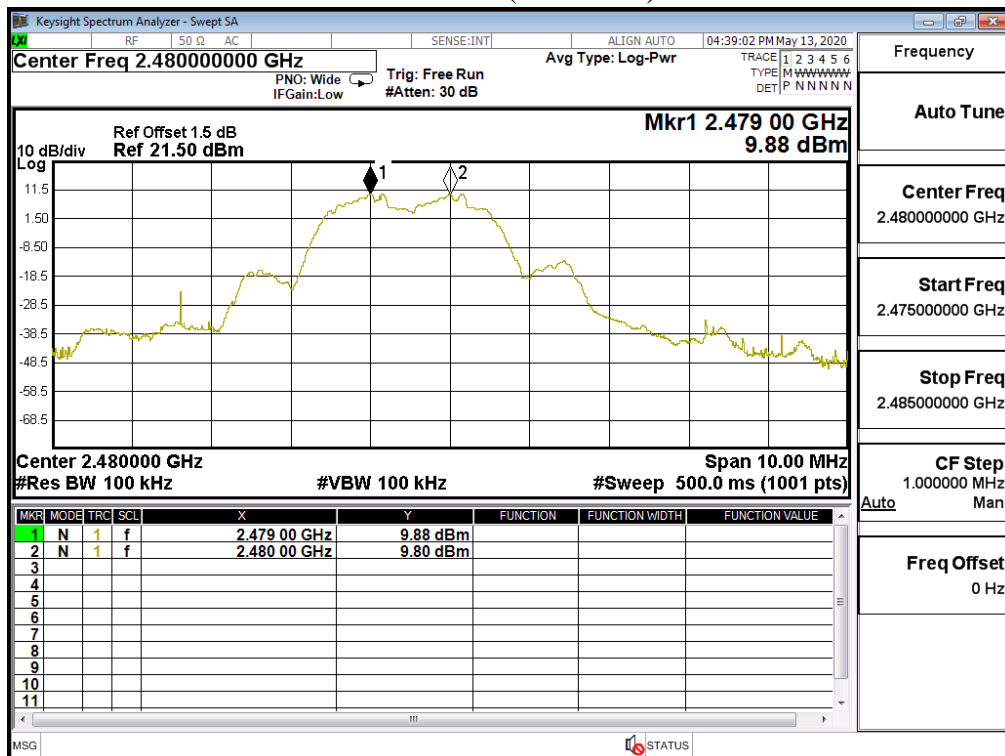

9. Dwell Time

9.1. Test Setup

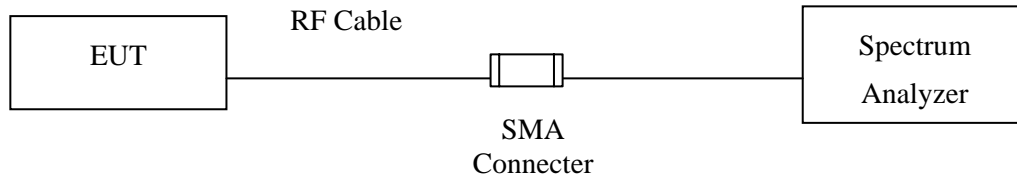

9.2. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

9.3. Test Procedure

Tested according to FHSS test procedure of KDB558074 section 9 (b for compliance to FCC 47CFR 15.247 requirements).

9.4. Uncertainty

± 25 msec


9.5. Test Result of Dwell Time

Product : Portable computer
 Test Item : Dwell Time
 Test Mode : Mode 1: Transmit - 1Mbps (Channel 00,39,78)
 Test Date : 2020/05/13


Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Dwell Time (ms)	Limit (ms)	Result
2402	2.880	86	31600	247.680	400	Pass
2441	2.890	81	31600	234.090	400	Pass
2480	2.880	84	31600	241.920	400	Pass

Dwell time = Time slot length(ms)*Hopping of Number


CH 00 Hopping of Number

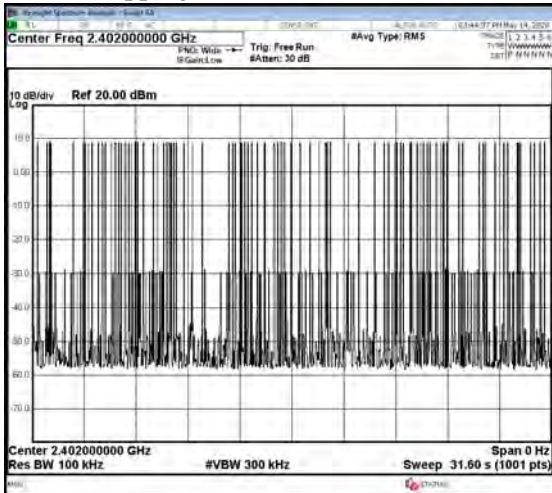


CH 00 Time slot length

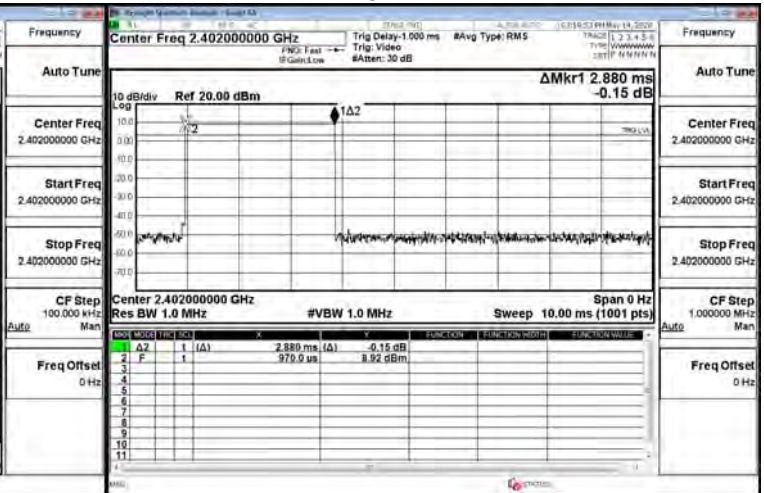

CH39 Hopping of Number

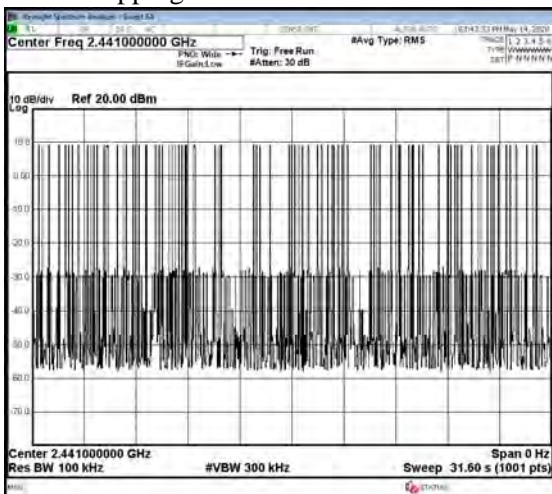


CH 39 Time slot length

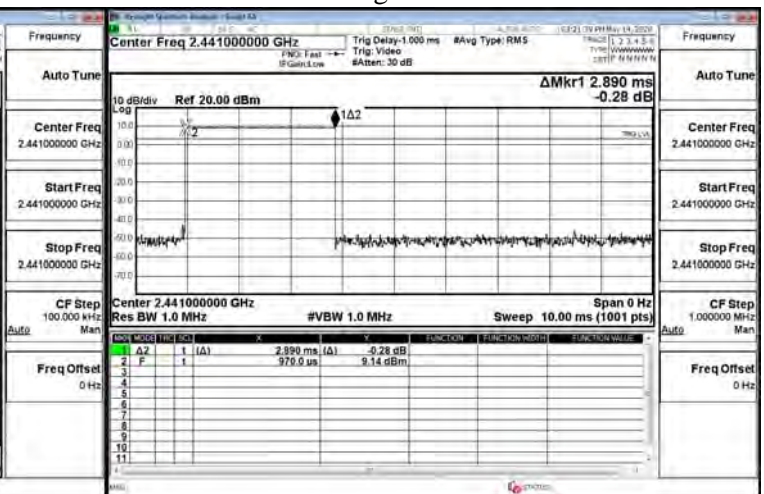

CH 78 Hopping of Number

CH 78 Time slot length

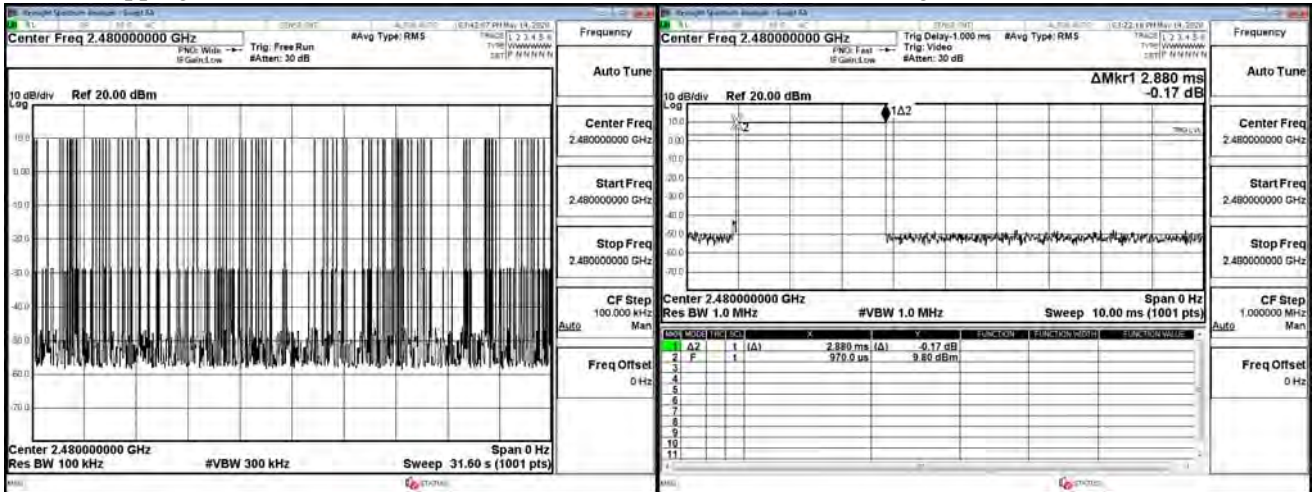

Note:

The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.


Product : Portable computer
 Test Item : Dwell Time
 Test Mode : Mode 2: Transmit - 2Mbps (Channel 00,39,78)
 Test Date : 2020/05/13

Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Dwell Time (ms)	Limit (ms)	Result
2402	2.890	86	31600	248.540	400	Pass
2441	2.890	86	31600	248.540	400	Pass
2480	2.890	79	31600	228.310	400	Pass

Dwell time = Time slot length(ms)*Hopping of Number


CH 00 Hopping of Number

CH 00 Time slot length

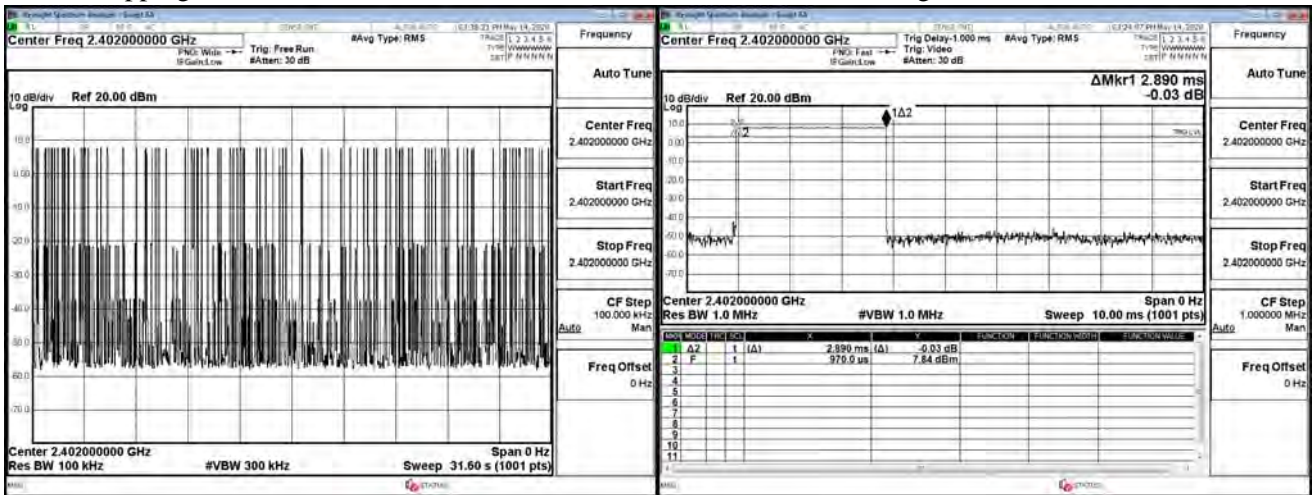


CH39 Hopping of Number

CH 39 Time slot length

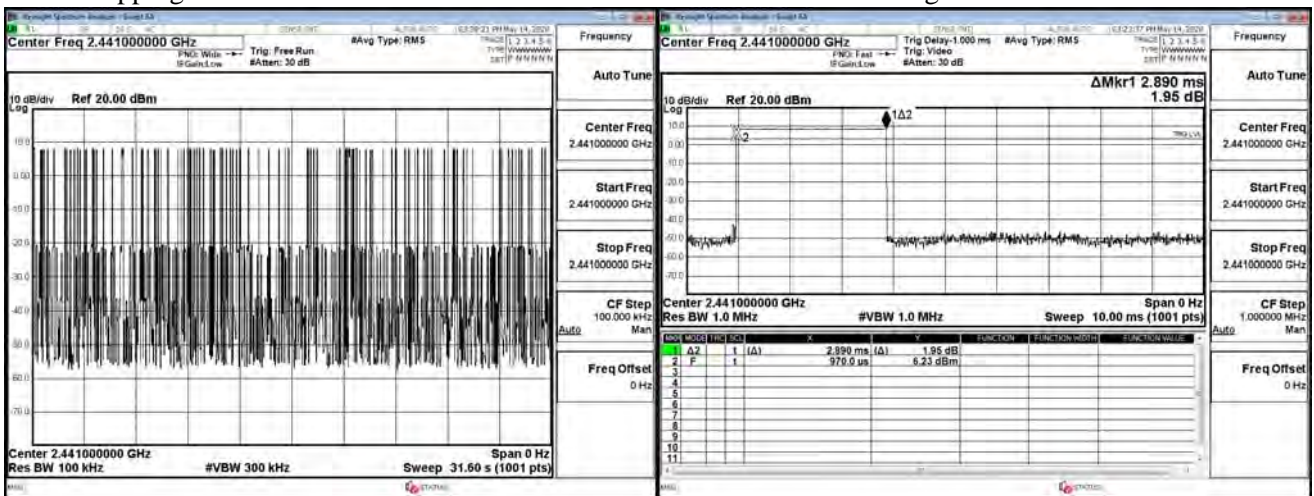

CH 78 Hopping of Number

CH 78 Time slot length

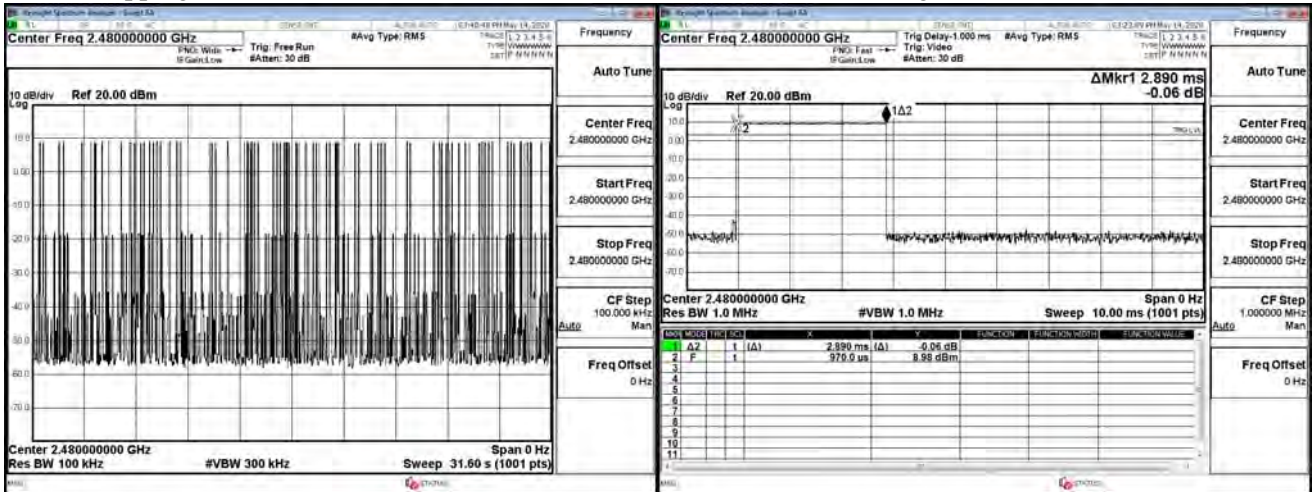

Note:


The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.

Product : Portable computer
 Test Item : Dwell Time
 Test Mode : Mode 3: Transmit - 3Mbps (Channel 00,39,78)
 Test Date : 2020/05/13

Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Dwell Time (ms)	Limit (ms)	Result
2402	2.890	92	31600	265.880	400	Pass
2441	2.890	81	31600	234.090	400	Pass
2480	2.890	91	31600	262.990	400	Pass


Dwell time = Time slot length(ms)*Hopping of Number

CH 00 Hopping of Number

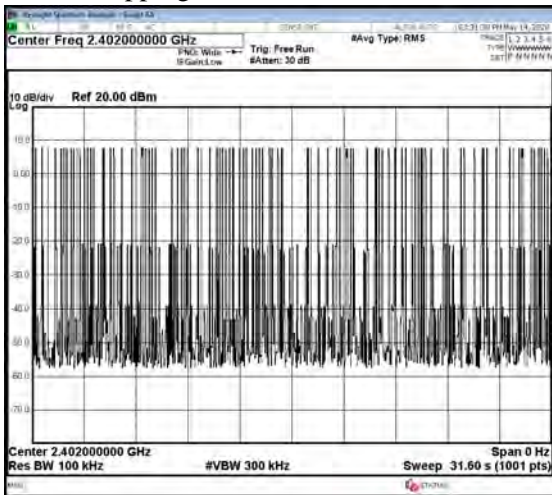


Frequency	Auto Tune
Center Freq	2.402000000 GHz
Start Freq	2.402000000 GHz
Stop Freq	2.402000000 GHz
CF Step	100.000 kHz
Freq Offset	0 Hz

CH 00 Time slot length

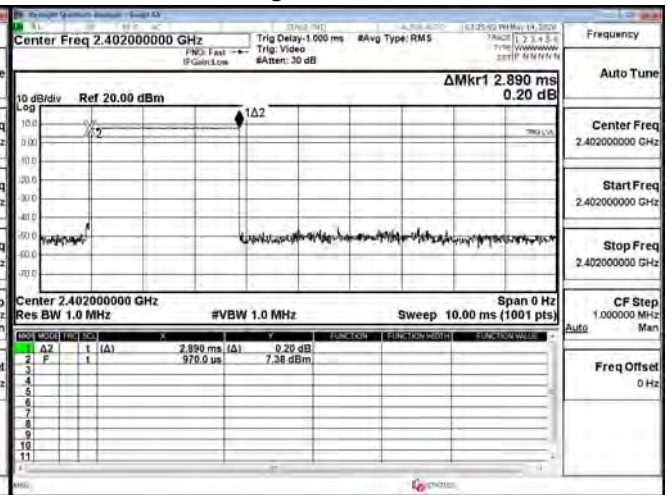


MOI	MODE	FR	SC	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	F	1	(A)	2.890 ms (A)	0.20 dB			
2	F	1	(A)	979.9 us	7.38 dBm			

CH39 Hopping of Number

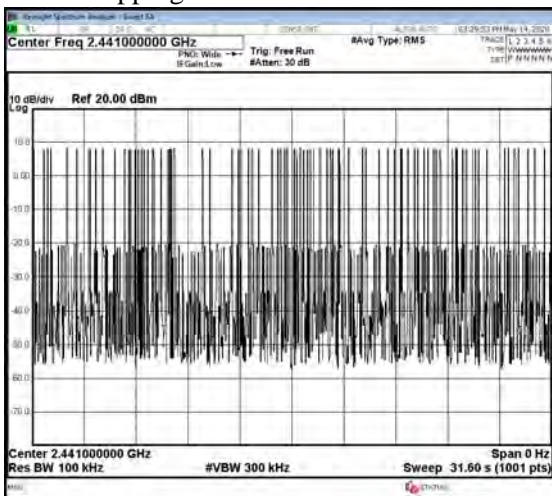

Frequency	Auto Tune
Center Freq	2.441000000 GHz
Start Freq	2.441000000 GHz
Stop Freq	2.441000000 GHz
CF Step	100.000 kHz
Freq Offset	0 Hz


CH 39 Time slot length

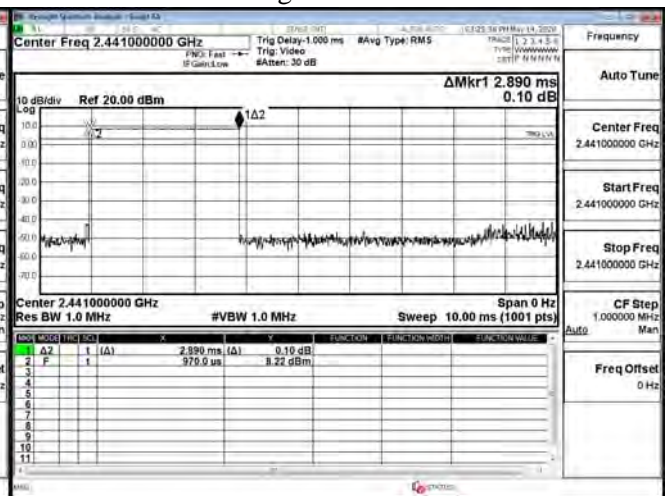

MOI	MODE	FR	SC	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	F	1	(A)	2.890 ms (A)	0.10 dB			
2	F	1	(A)	979.9 us	8.22 dBm			

CH 78 Hopping of Number

CH 78 Time slot length

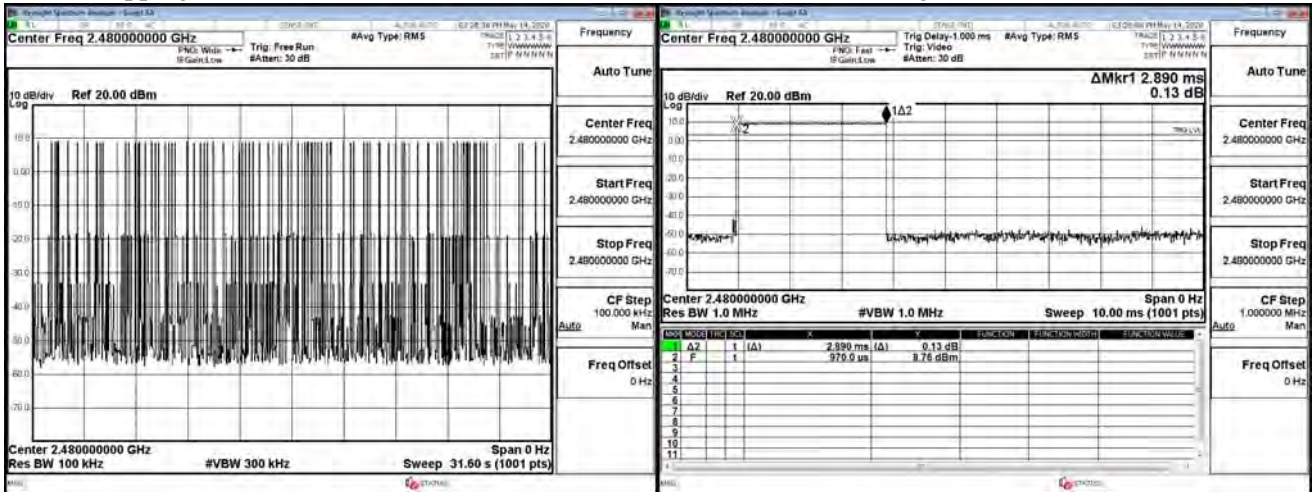


Note:

The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.

10. Occupied Bandwidth

10.1. Test Setup

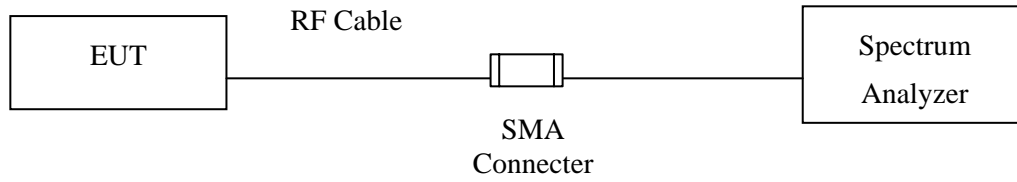

10.2. Limits

N/A

10.3. Test Procedure

Tested according to FHSS test procedure of KDB558074 section 9 (b for compliance to FCC 47CFR 15.247 requirements.

10.4. Uncertainty

$\pm 283\text{Hz}$

10.5. Test Result of Occupied Bandwidth

Product : Portable computer
 Test Item : Occupied Bandwidth Data
 Test Mode : Mode 1: Transmit - 1Mbps
 Test Date : 2020/05/13

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	966	--	NA
39	2441	963	--	NA
78	2480	960	--	NA

Figure Channel 00:

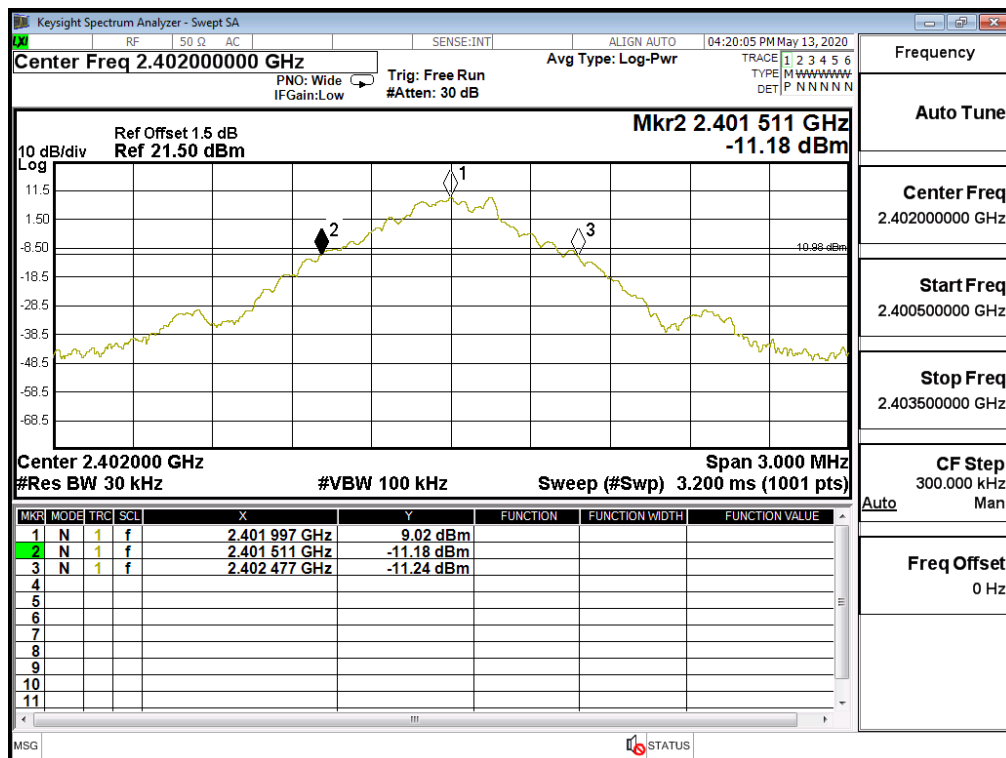


Figure Channel 39:


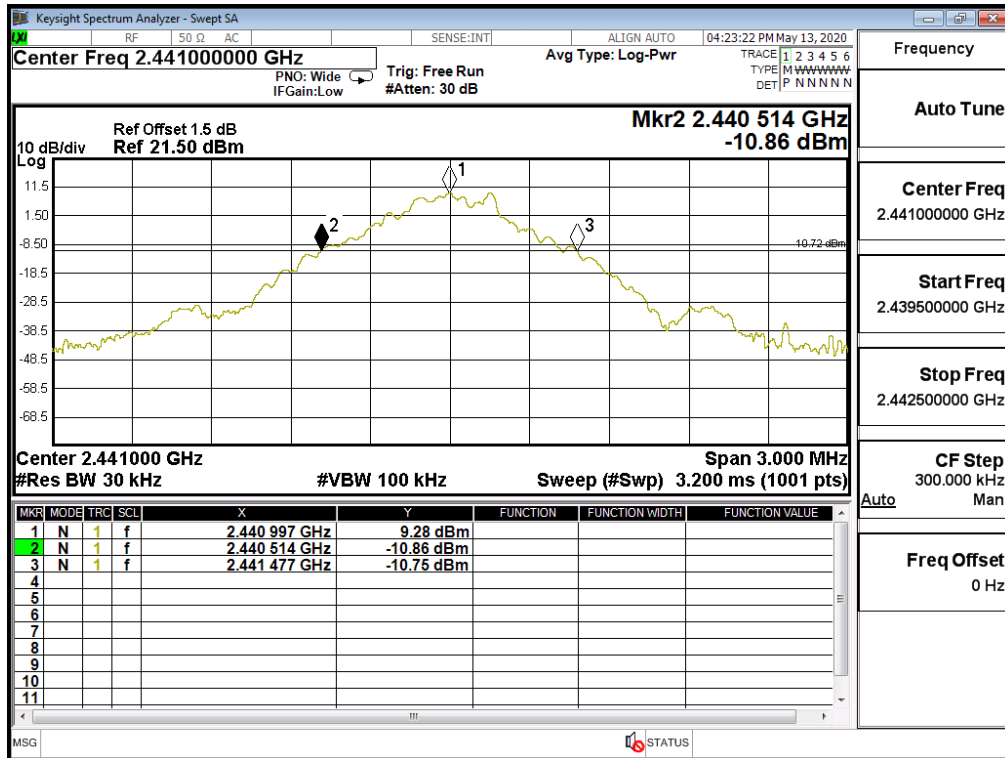


Figure Channel 78:

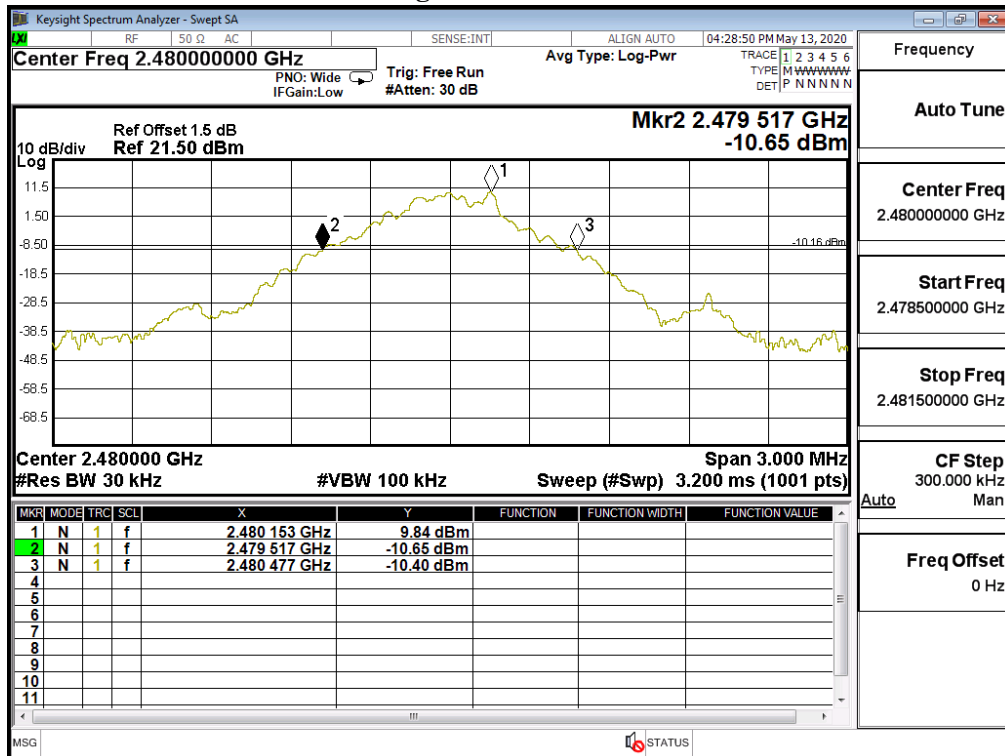

Product : Portable computer
 Test Item : Occupied Bandwidth Data
 Test Mode : Mode 2: Transmit - 2Mbps (2402MHz)
 Test Date : 2020/05/13

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1410	--	NA
39	2441	1413	--	NA
78	2480	1410	--	NA

Figure Channel 00:

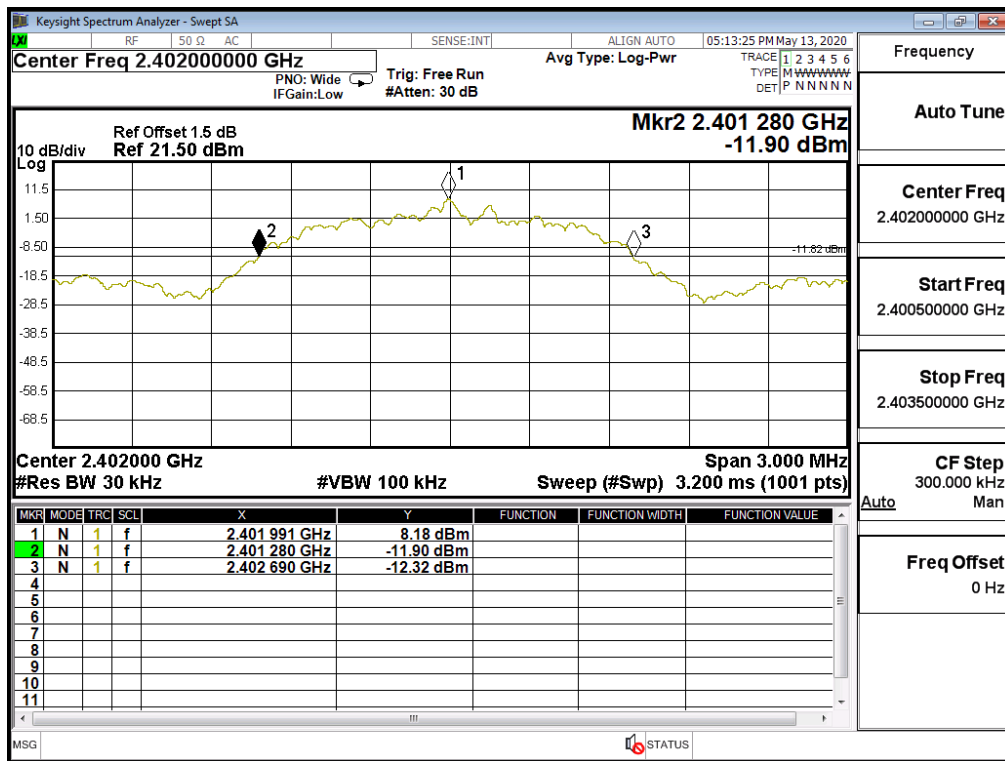


Figure Channel 39:


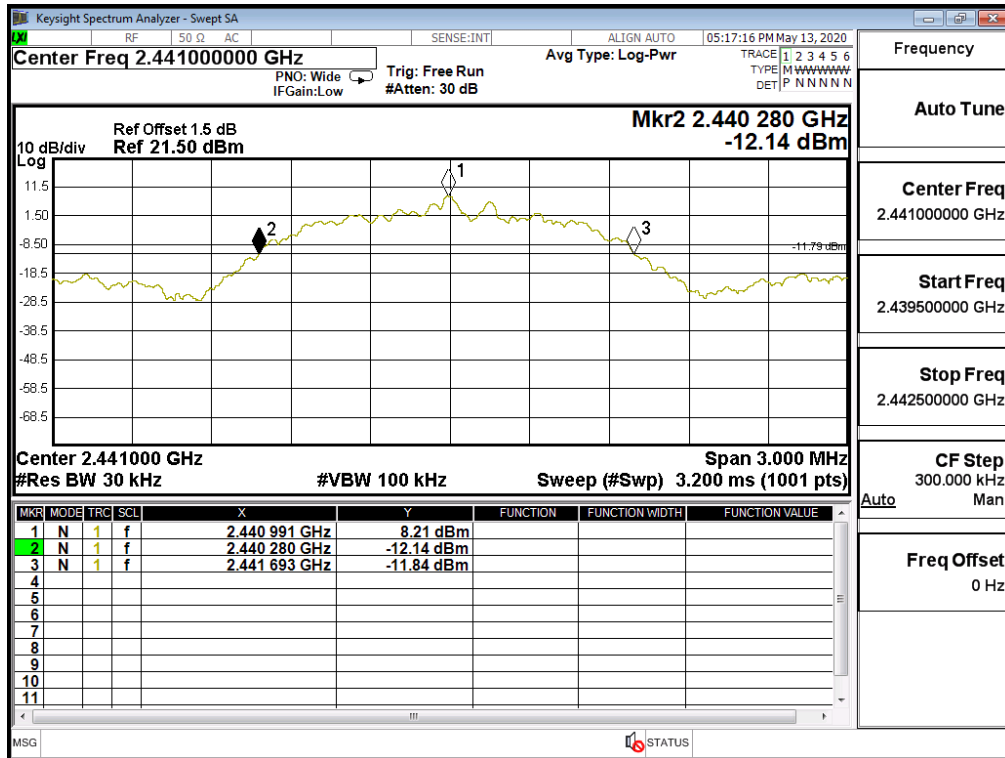


Figure Channel 78:

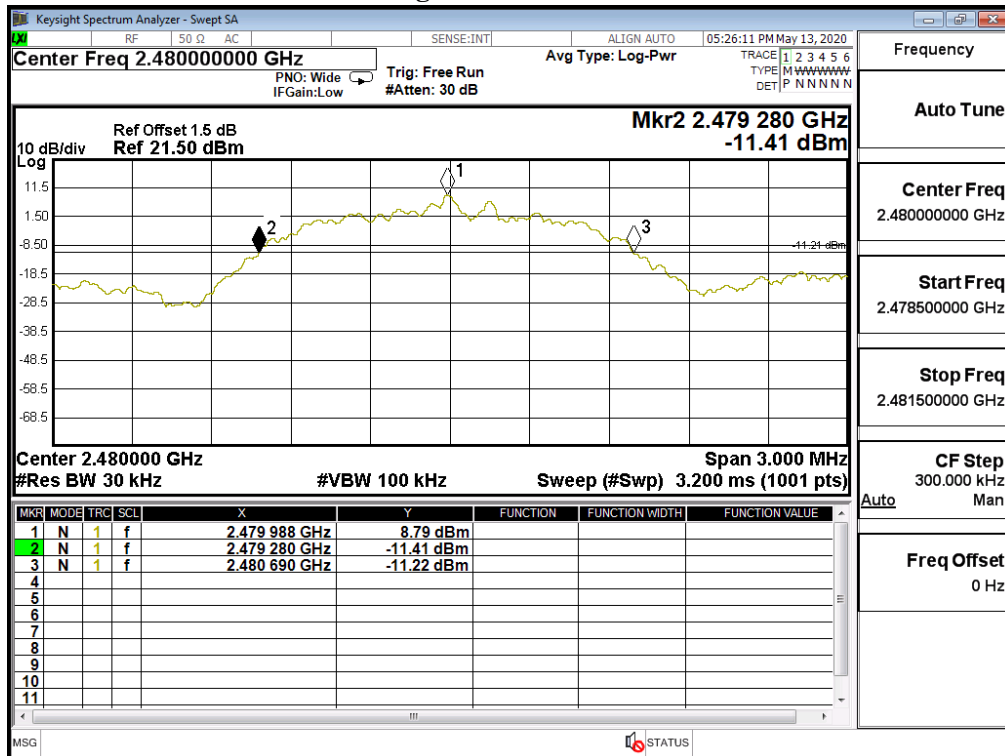

Product : Portable computer
 Test Item : Occupied Bandwidth Data
 Test Mode : Mode 3: Transmit - 3Mbps (2402MHz)
 Test Date : 2020/05/13

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1437	--	NA
39	2441	1440	--	NA
78	2480	1440	--	NA

Figure Channel 00:

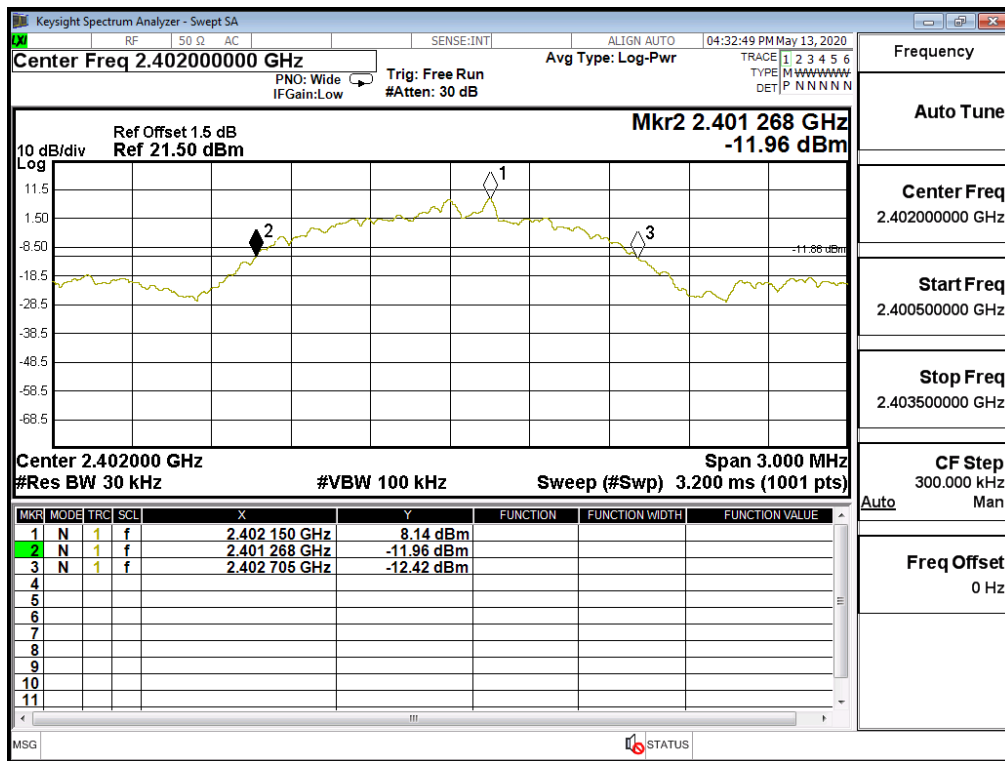


Figure Channel 39:



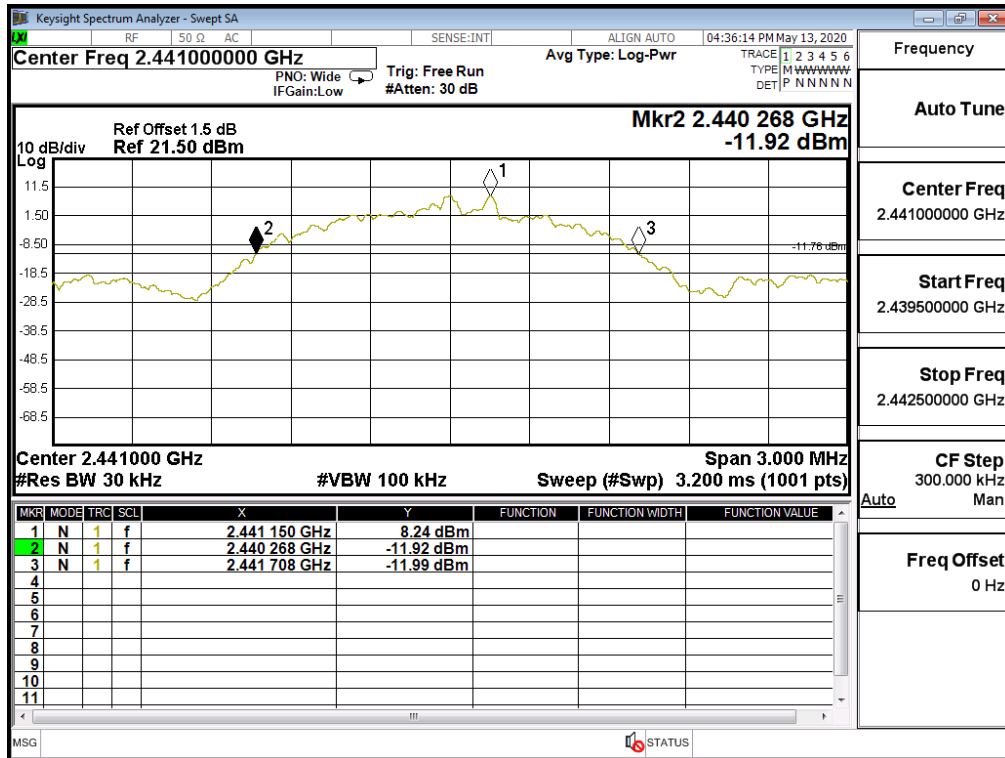


Figure Channel 78:

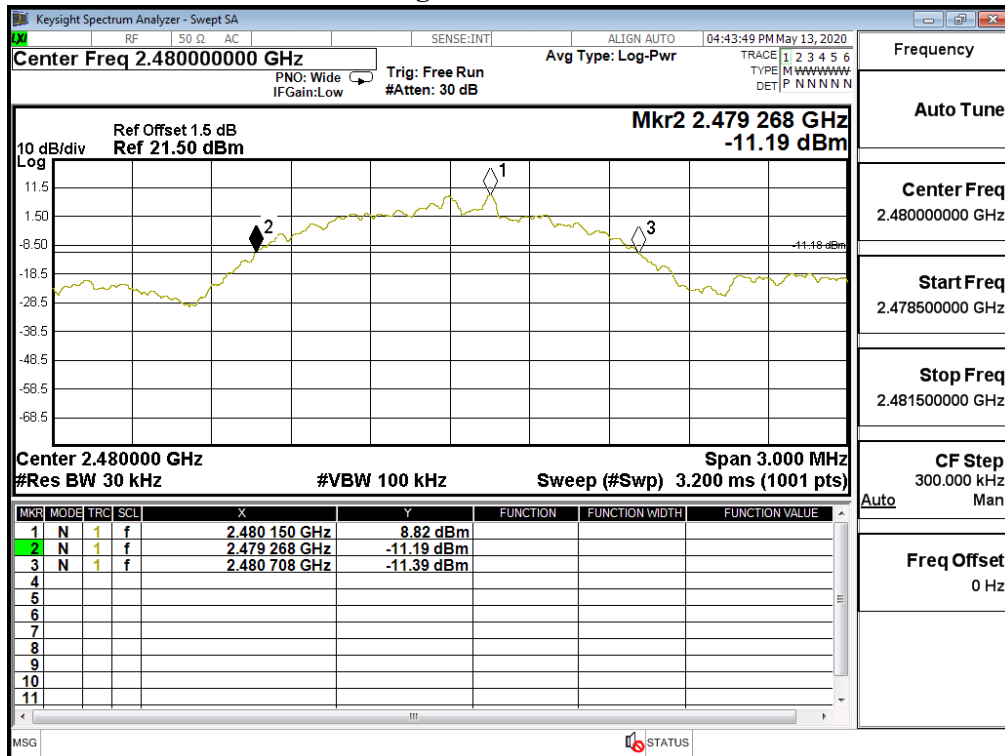

11. Duty Cycle

11.1. Test Setup

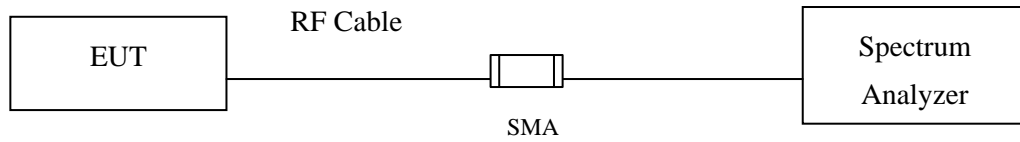

11.2. Test Procedure


The EUT was setup according to ANSI C63.10 2013; tested according to ANSI C63.10 2013 for compliance to FCC 47CFR 15.247 requirements.

11.3. Uncertainty

$\pm 2.31\text{msec}$

11.4. Test Result of Duty Cycle

Product : Portable computer
 Test Item : Duty Cycle
 Test Mode : Mode 1: Transmit - 1Mbps

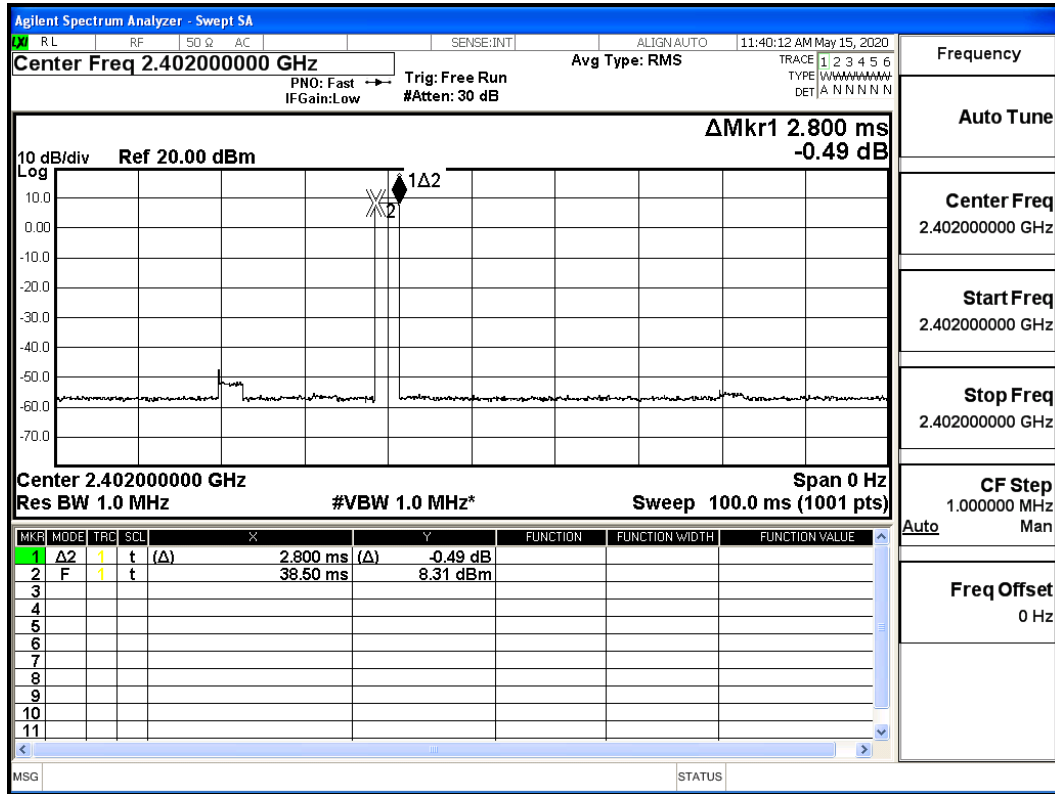


Time on of 100ms=2.8ms

Duty Cycle=2.8ms / 100ms= 0.028

Duty Cycle correction factor= 20 LOG 0.028= -31.057 dB

Duty Cycle correction factor	-31.057	dB
------------------------------	---------	----

Product : Portable computer
 Test Item : Duty Cycle
 Test Mode : Mode 2: Transmit - 2Mbps

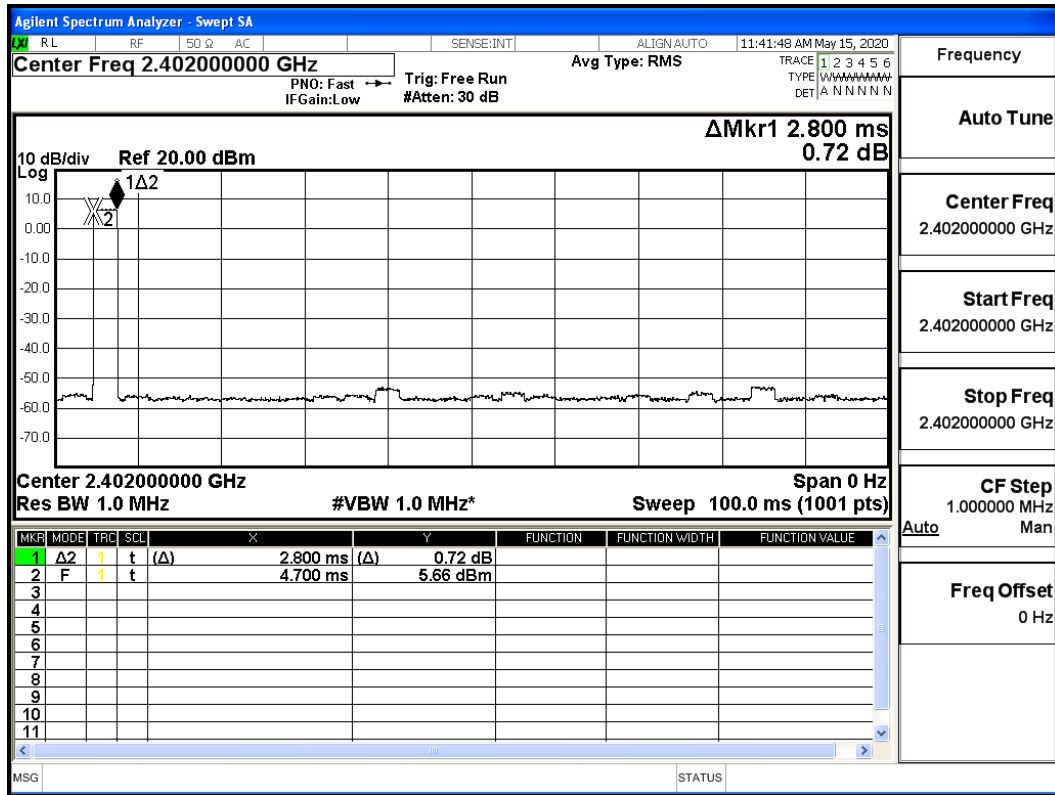


Time on of 100ms=2.8ms

Duty Cycle=2.8ms / 100ms= 0.028

Duty Cycle correction factor= 20 LOG 0.028= -31.057 dB

Duty Cycle correction factor	-31.057	dB
------------------------------	---------	----

Product : Portable computer
 Test Item : Duty Cycle
 Test Mode : Mode 3: Transmit - 3Mbps

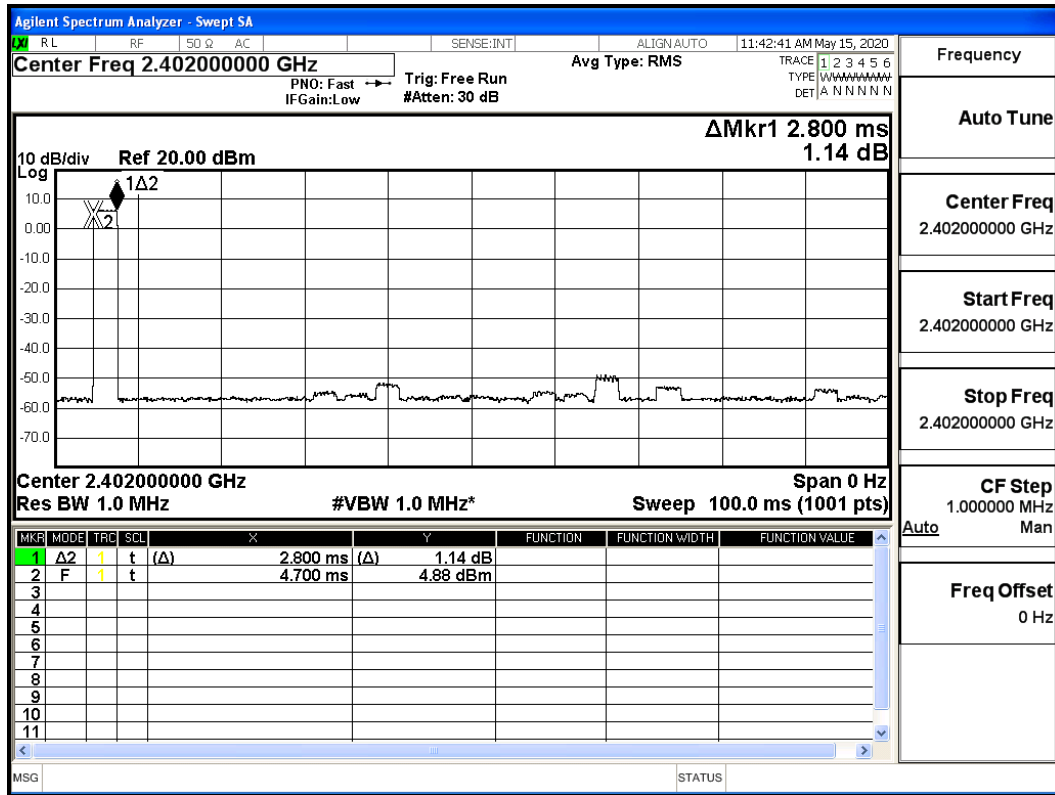

Time on of 100ms=2.8ms

Duty Cycle=2.8ms / 100ms= 0.028

Duty Cycle correction factor= 20 LOG 0.028= -31.057 dB

Duty Cycle correction factor	-31.057	dB
------------------------------	---------	----

12. EMI Reduction Method During Compliance Testing

No modification was made during testing.