


Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5300MHz)

Horizontal

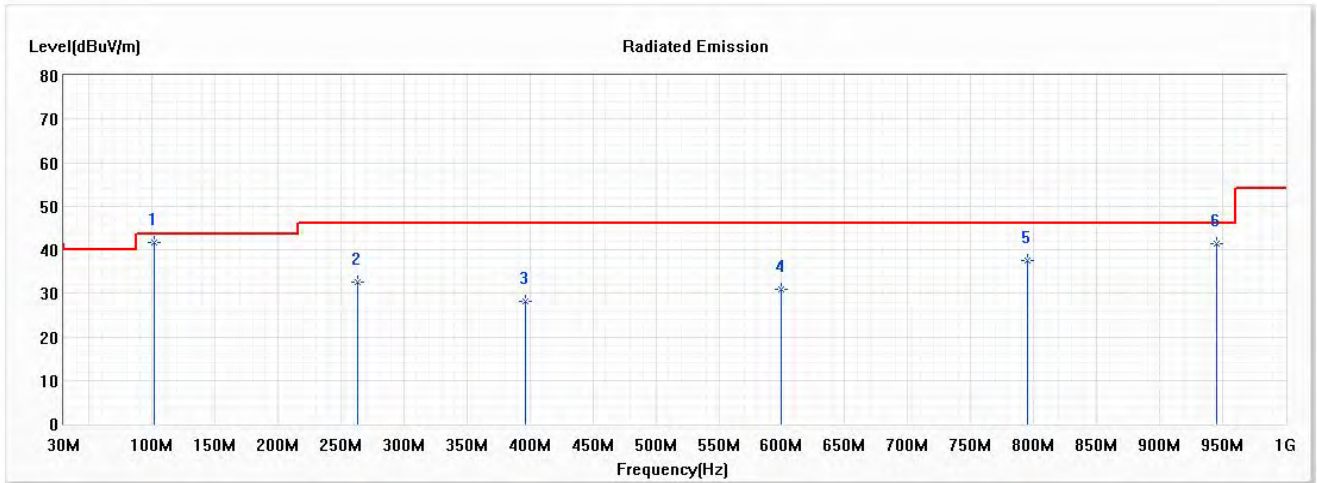


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	41.75	43.50	-1.75	56.91	-15.16	QP
2	263.362	32.59	46.00	-13.41	43.61	-11.02	QP
3	396.913	28.23	46.00	-17.77	35.58	-7.35	QP
4	599.348	30.90	46.00	-15.10	34.09	-3.19	QP
5	794.754	37.40	46.00	-8.60	37.79	-0.39	QP
6	945.174	41.40	46.00	-4.60	39.90	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5300MHz)

Vertical

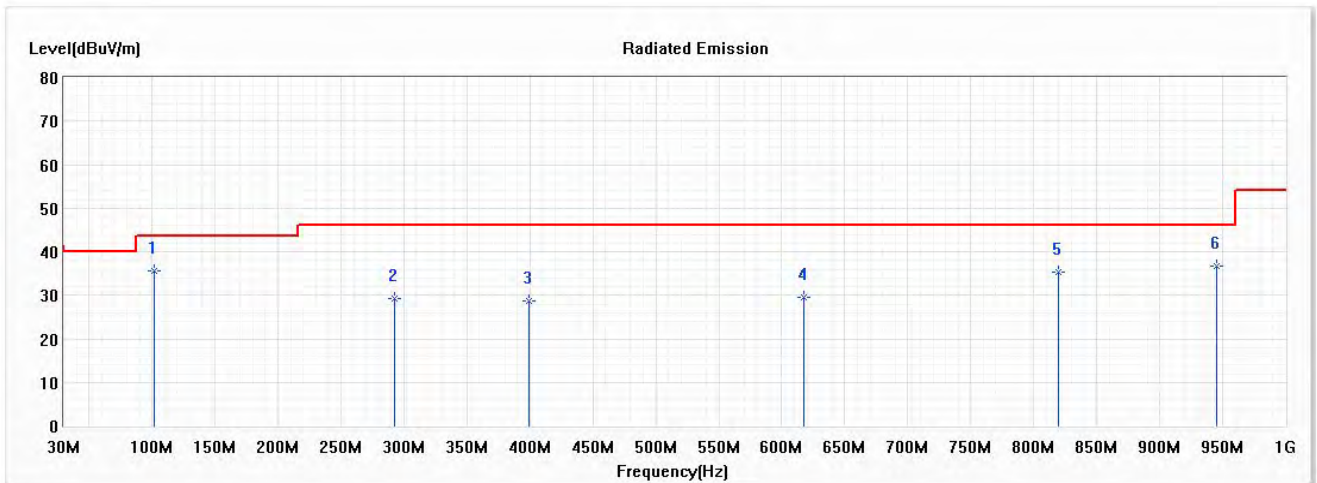


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	35.66	43.50	-7.84	50.82	-15.16	QP
2	292.884	29.11	46.00	-16.89	39.01	-9.90	QP
3	399.725	28.67	46.00	-17.33	35.97	-7.30	QP
4	617.623	29.59	46.00	-16.41	32.61	-3.02	QP
5	820.058	35.32	46.00	-10.68	35.64	-0.32	QP
6	945.174	36.79	46.00	-9.21	35.29	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5600MHz)

Horizontal

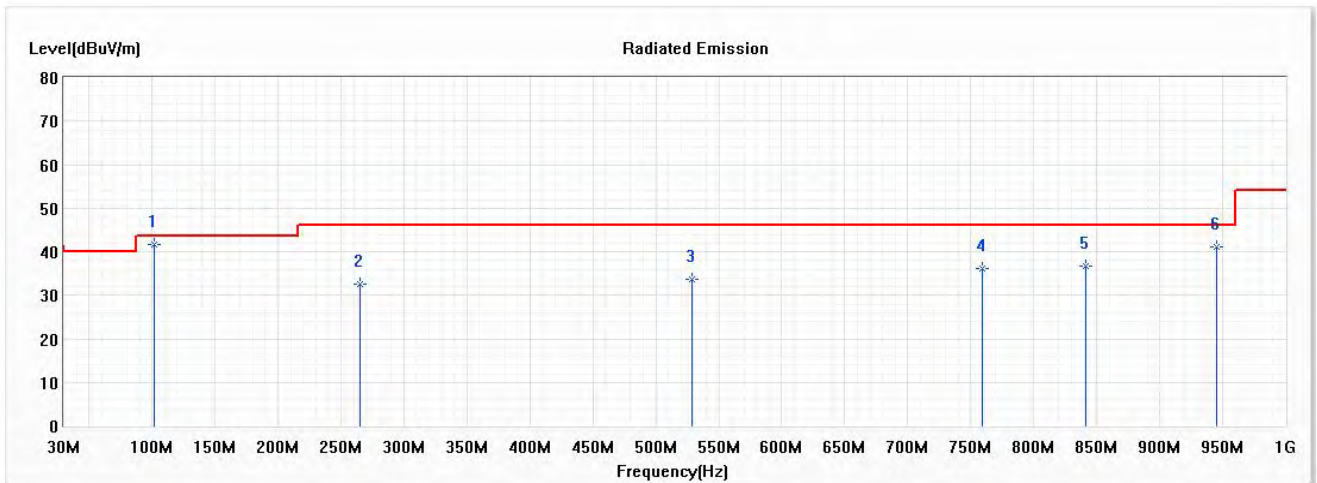


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	41.74	43.50	-1.76	56.90	-15.16	QP
2	264.768	32.61	46.00	-13.39	43.56	-10.95	QP
3	529.058	33.75	46.00	-12.25	38.50	-4.75	QP
4	759.609	36.21	46.00	-9.79	37.07	-0.86	QP
5	841.145	36.78	46.00	-9.22	36.74	0.04	QP
6	945.174	41.16	46.00	-4.84	39.66	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5600MHz)

Vertical

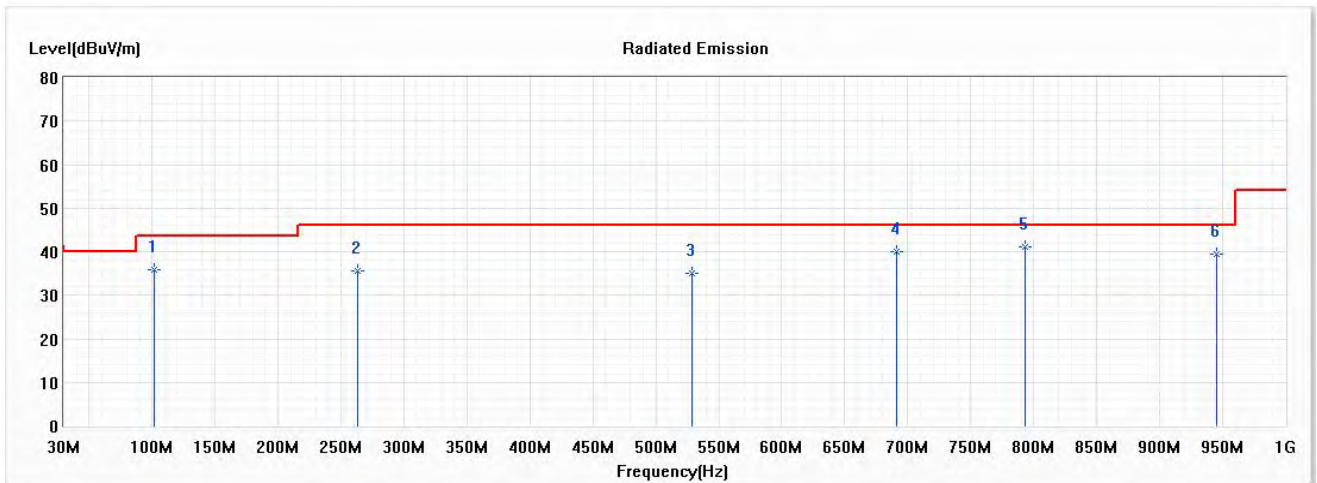


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	35.77	43.50	-7.73	50.93	-15.16	QP
2	263.362	35.45	46.00	-10.55	46.47	-11.02	QP
3	529.058	34.90	46.00	-11.10	39.65	-4.75	QP
4	690.725	39.93	46.00	-6.07	42.11	-2.18	QP
* 5	793.348	40.98	46.00	-5.02	41.40	-0.42	QP
6	945.174	39.57	46.00	-6.43	38.07	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5720MHz)

Horizontal

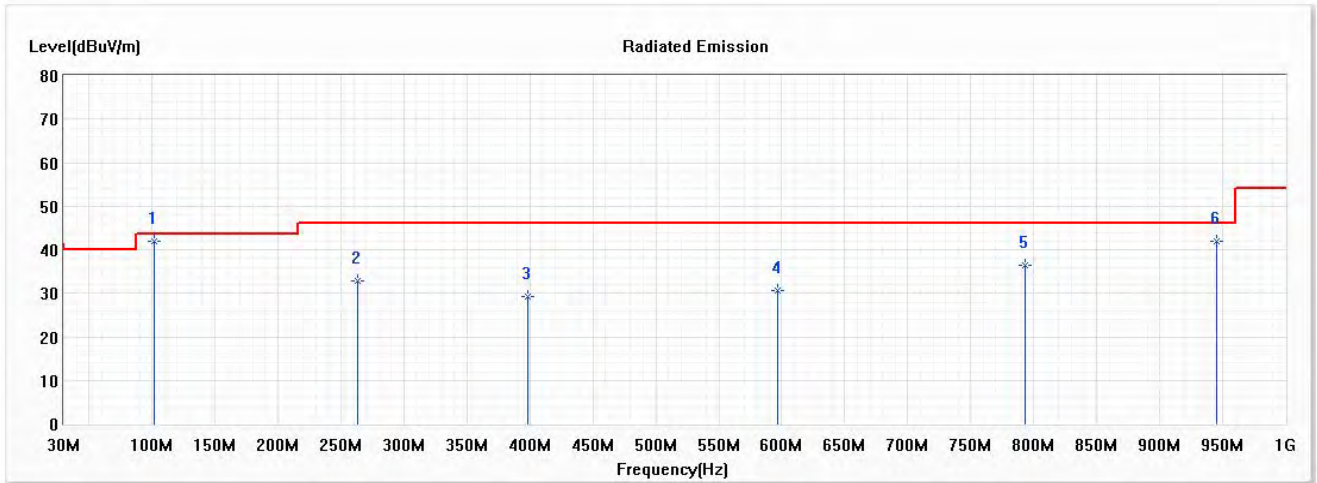


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	41.84	43.50	-1.66	57.00	-15.16	QP
2	263.362	32.87	46.00	-13.13	43.89	-11.02	QP
3	398.319	29.17	46.00	-16.83	36.49	-7.32	QP
4	596.536	30.54	46.00	-15.46	33.74	-3.20	QP
5	793.348	36.34	46.00	-9.66	36.76	-0.42	QP
6	945.174	41.86	46.00	-4.14	40.36	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5720MHz)

Vertical

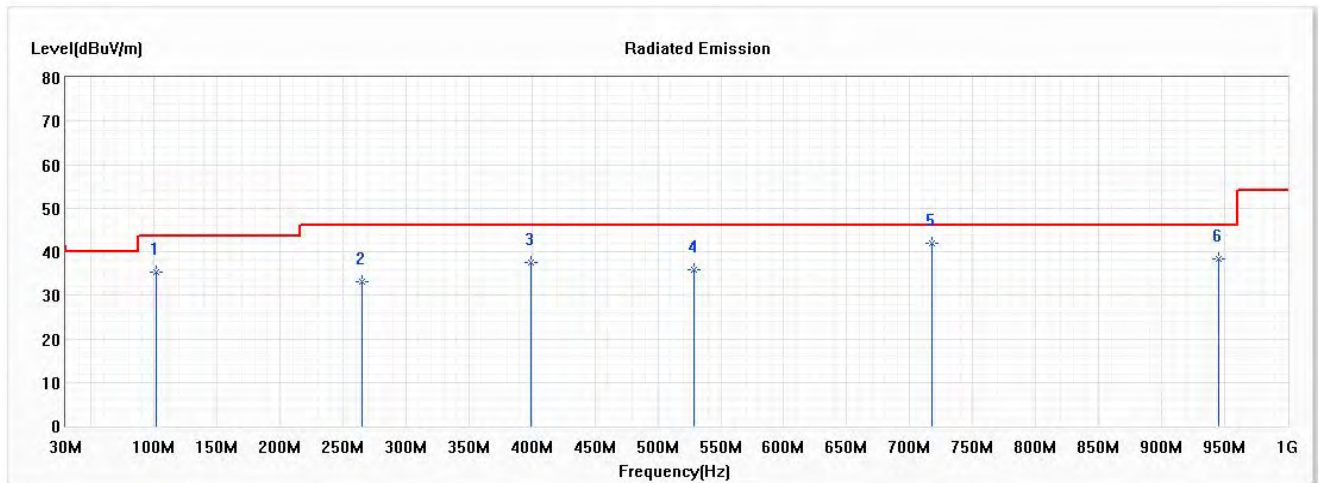


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	35.40	43.50	-8.10	50.56	-15.16	QP
2	264.768	32.99	46.00	-13.01	43.94	-10.95	QP
3	399.725	37.46	46.00	-8.54	44.76	-7.30	QP
4	529.058	35.97	46.00	-10.03	40.72	-4.75	QP
* 5	717.435	41.94	46.00	-4.06	43.58	-1.64	QP
6	945.174	38.44	46.00	-7.56	36.94	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5785MHz)

Horizontal

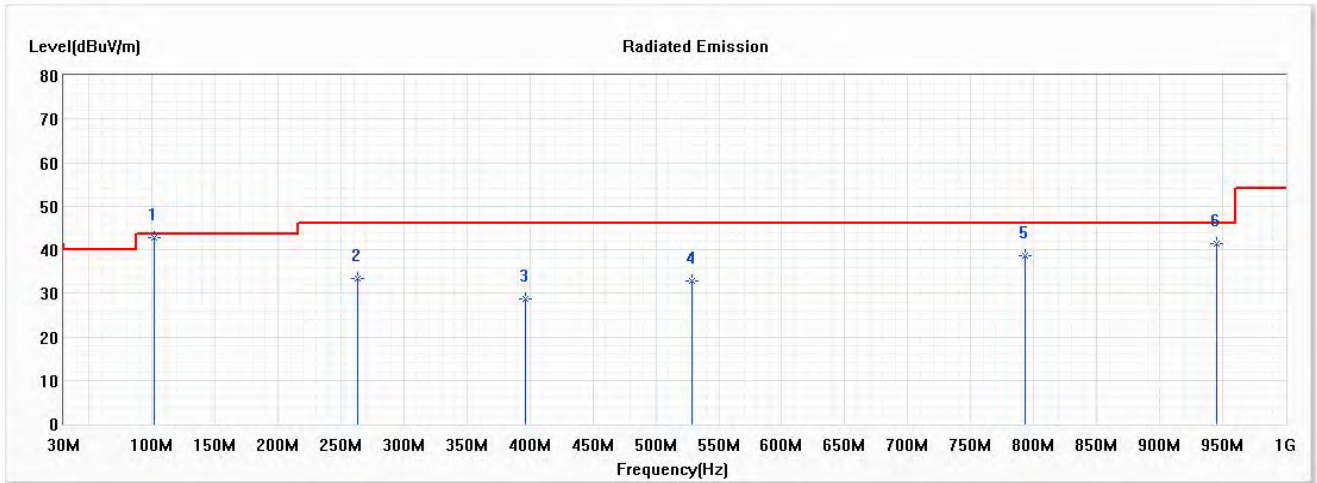


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	42.66	43.50	-0.84	57.82	-15.16	QP
2	263.362	33.37	46.00	-12.63	44.39	-11.02	QP
3	396.913	28.77	46.00	-17.23	36.12	-7.35	QP
4	529.058	32.87	46.00	-13.13	37.62	-4.75	QP
5	793.348	38.67	46.00	-7.33	39.09	-0.42	QP
6	945.174	41.31	46.00	-4.69	39.81	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5785MHz)

Vertical

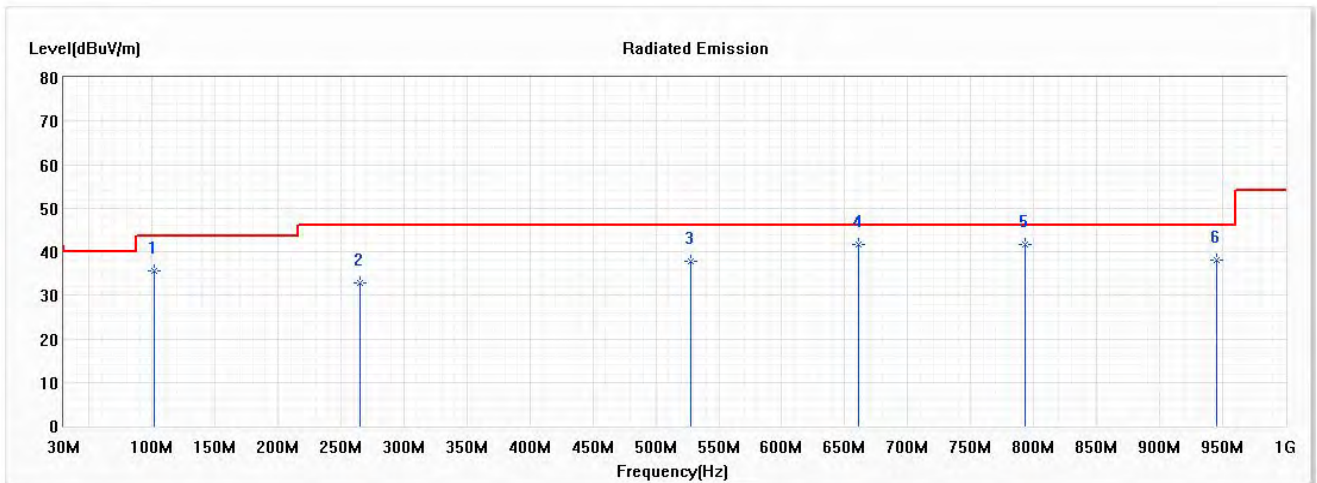


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	35.67	43.50	-7.83	50.83	-15.16	QP
2	264.768	32.88	46.00	-13.12	43.83	-10.95	QP
3	527.652	37.69	46.00	-8.31	42.44	-4.75	QP
* 4	661.203	41.77	46.00	-4.23	44.30	-2.53	QP
5	793.348	41.64	46.00	-4.36	42.06	-0.42	QP
6	945.174	38.03	46.00	-7.97	36.53	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5230MHz)

Horizontal

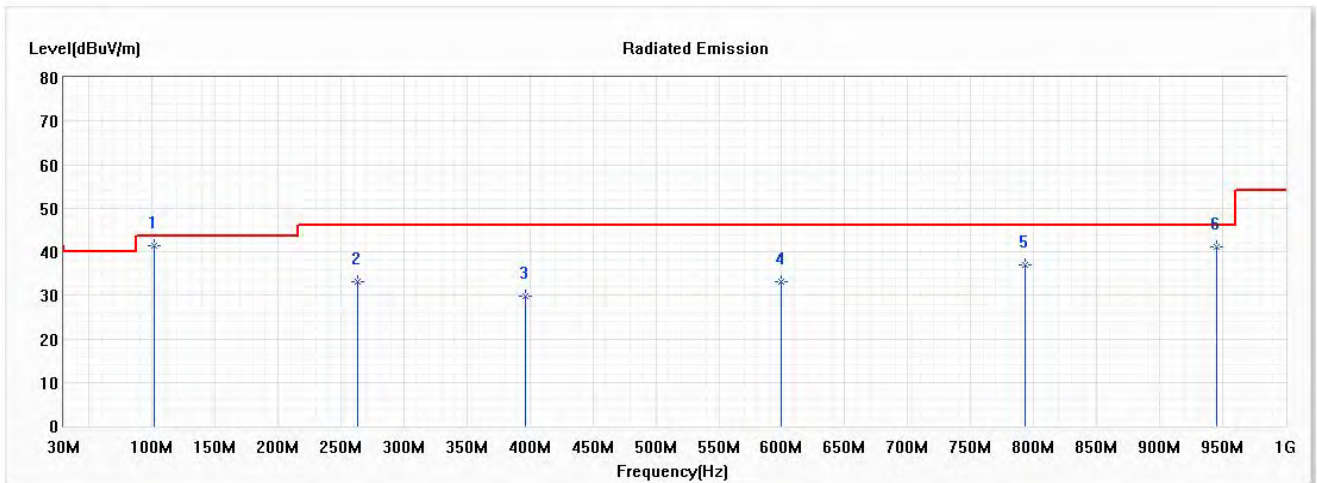


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	41.48	43.50	-2.02	56.64	-15.16	QP
2	263.362	33.13	46.00	-12.87	44.15	-11.02	QP
3	396.913	29.70	46.00	-16.30	37.05	-7.35	QP
4	599.348	32.97	46.00	-13.03	36.16	-3.19	QP
5	793.348	36.86	46.00	-9.14	37.28	-0.42	QP
6	945.174	41.02	46.00	-4.98	39.52	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5230MHz)

Vertical

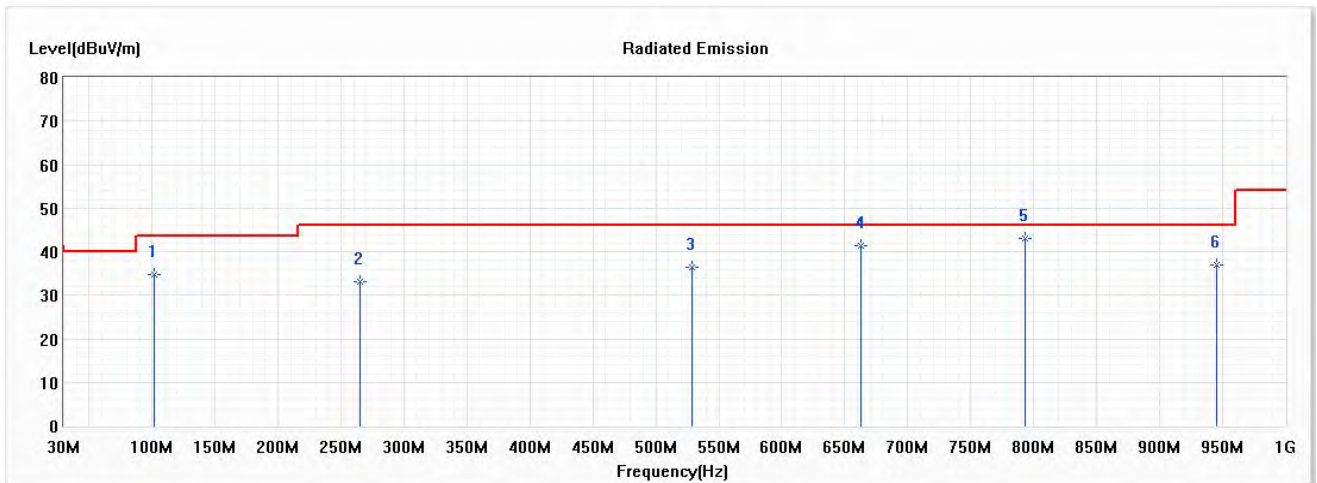


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	34.66	43.50	-8.84	49.82	-15.16	QP
2	264.768	33.00	46.00	-13.00	43.95	-10.95	QP
3	529.058	36.29	46.00	-9.71	41.04	-4.75	QP
4	662.609	41.35	46.00	-4.65	43.92	-2.57	QP
* 5	793.348	42.90	46.00	-3.10	43.32	-0.42	QP
6	945.174	37.05	46.00	-8.95	35.55	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5310MHz)

Horizontal

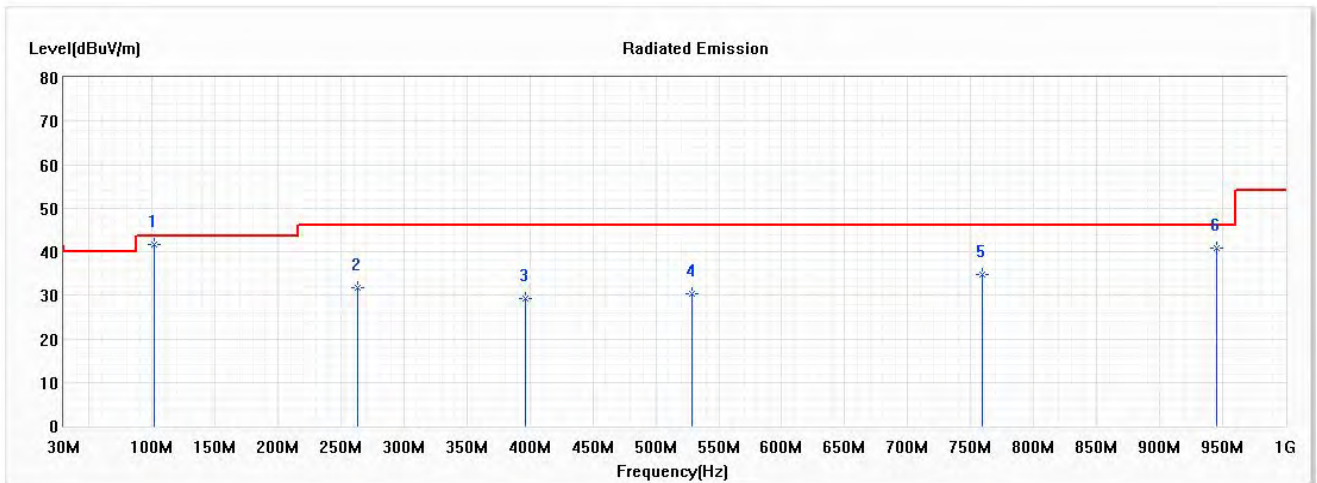


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	41.65	43.50	-1.85	56.81	-15.16	QP
2	263.362	31.75	46.00	-14.25	42.77	-11.02	QP
3	396.913	29.31	46.00	-16.69	36.66	-7.35	QP
4	529.058	30.46	46.00	-15.54	35.21	-4.75	QP
5	759.609	34.72	46.00	-11.28	35.58	-0.86	QP
6	945.174	40.84	46.00	-5.16	39.34	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5310MHz)

Vertical

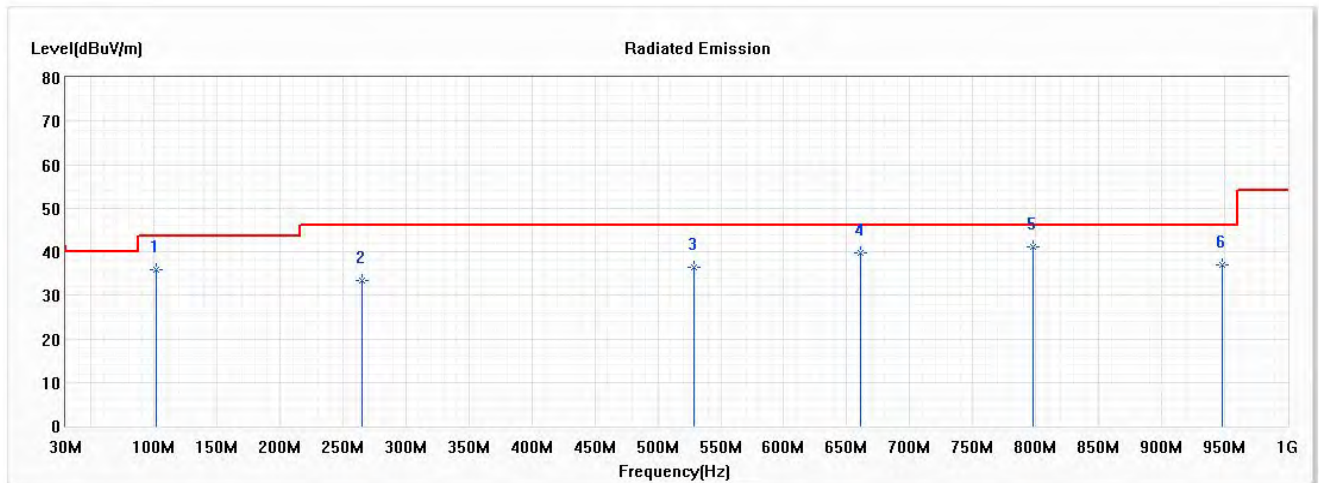


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	35.92	43.50	-7.58	51.08	-15.16	QP
2	264.768	33.48	46.00	-12.52	44.43	-10.95	QP
3	529.058	36.34	46.00	-9.66	41.09	-4.75	QP
4	661.203	39.68	46.00	-6.32	42.21	-2.53	QP
* 5	797.565	41.11	46.00	-4.89	41.49	-0.38	QP
6	947.986	36.85	46.00	-9.15	35.28	1.57	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5590MHz)

Horizontal

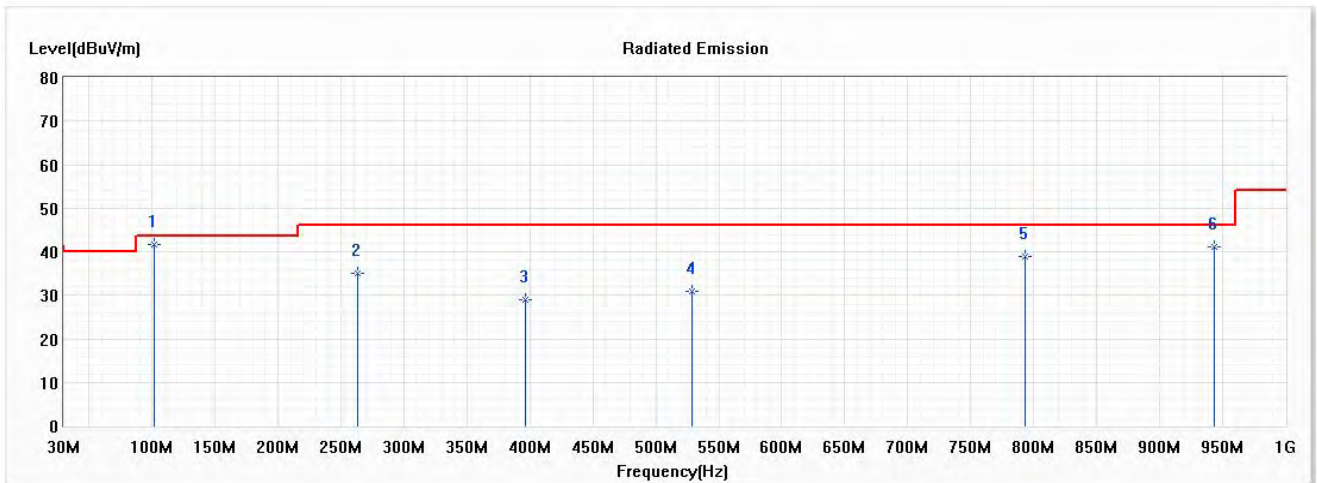


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	41.76	43.50	-1.74	56.92	-15.16	QP
2	263.362	34.90	46.00	-11.10	45.92	-11.02	QP
3	396.913	28.83	46.00	-17.17	36.18	-7.35	QP
4	529.058	30.83	46.00	-15.17	35.58	-4.75	QP
5	793.348	38.86	46.00	-7.14	39.28	-0.42	QP
6	943.768	41.14	46.00	-4.86	39.66	1.48	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5590MHz)

Vertical

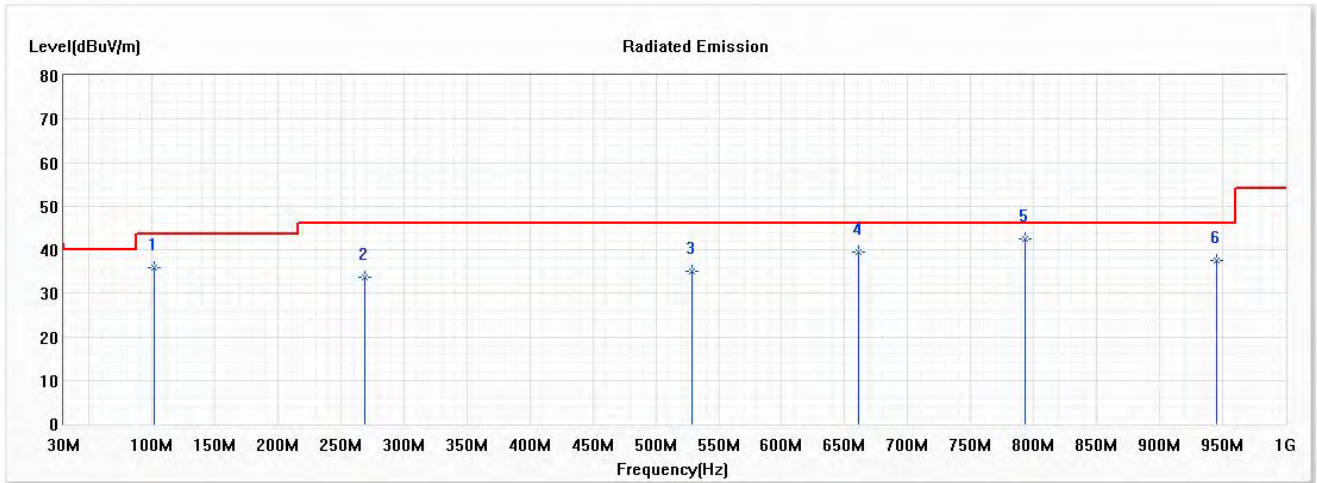


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	35.87	43.50	-7.63	51.03	-15.16	QP
2	268.986	33.53	46.00	-12.47	44.29	-10.76	QP
3	529.058	35.08	46.00	-10.92	39.83	-4.75	QP
4	661.203	39.56	46.00	-6.44	42.09	-2.53	QP
* 5	793.348	42.57	46.00	-3.43	42.99	-0.42	QP
6	945.174	37.53	46.00	-8.47	36.03	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5710MHz)

Horizontal

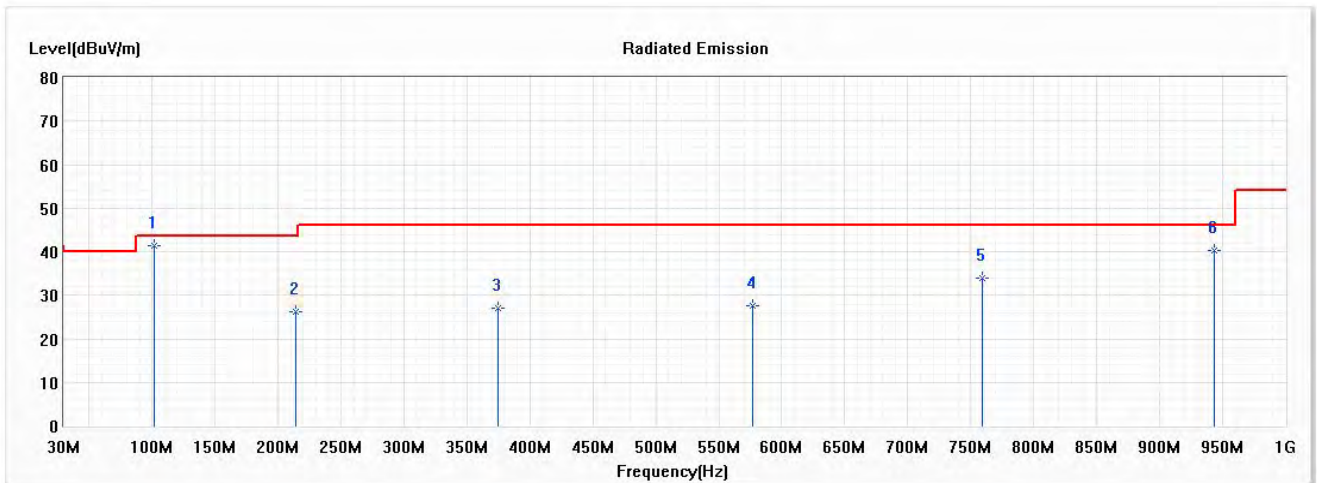


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	41.32	43.50	-2.18	56.48	-15.16	QP
2	214.159	26.08	43.50	-17.42	39.11	-13.03	QP
3	374.420	26.91	46.00	-19.09	34.78	-7.87	QP
4	576.855	27.58	46.00	-18.42	31.38	-3.80	QP
5	759.609	33.89	46.00	-12.11	34.75	-0.86	QP
6	943.768	40.24	46.00	-5.76	38.76	1.48	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5710MHz)

Vertical

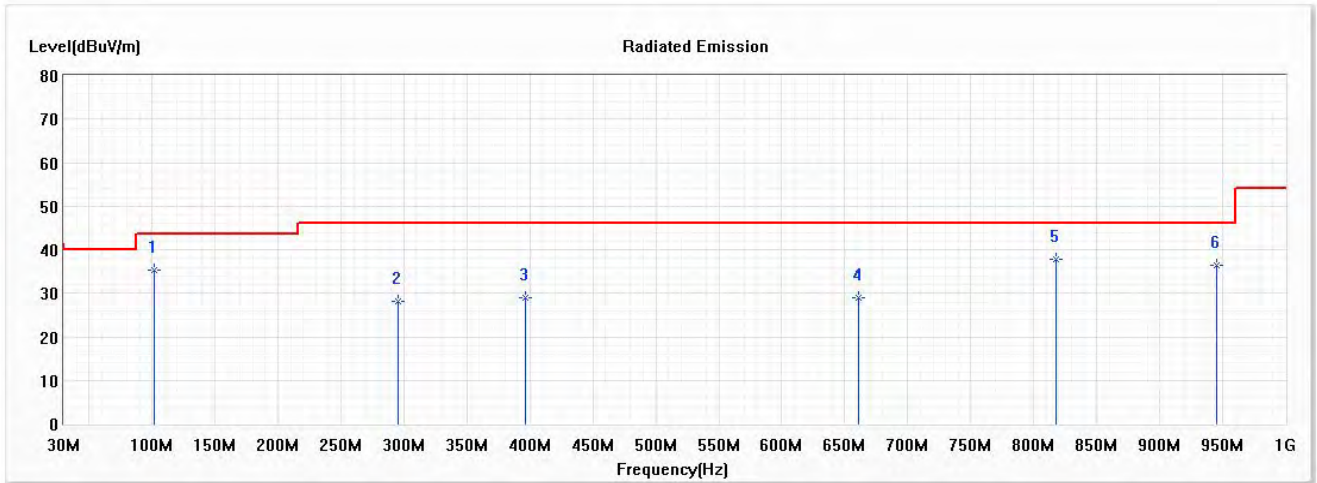


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	35.34	43.50	-8.16	50.50	-15.16	QP
2	295.696	28.05	46.00	-17.95	37.89	-9.84	QP
3	396.913	29.04	46.00	-16.96	36.39	-7.35	QP
4	661.203	28.93	46.00	-17.07	31.46	-2.53	QP
5	817.246	37.77	46.00	-8.23	38.04	-0.27	QP
6	945.174	36.33	46.00	-9.67	34.83	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5795MHz)

Horizontal

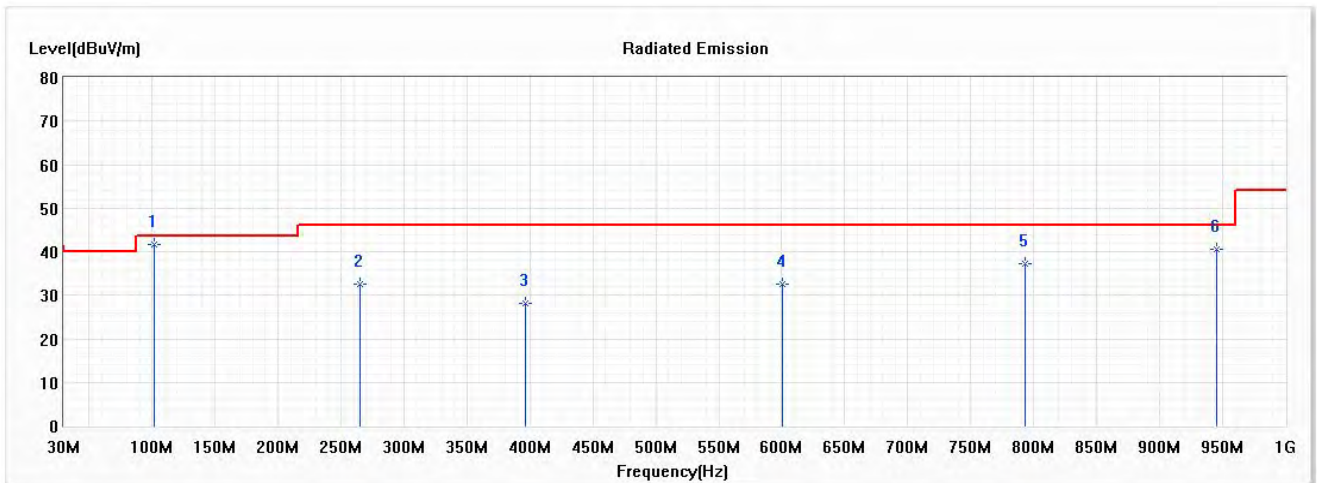


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	41.79	43.50	-1.71	56.95	-15.16	QP
2	264.768	32.58	46.00	-13.42	43.53	-10.95	QP
3	396.913	28.07	46.00	-17.93	35.42	-7.35	QP
4	600.754	32.52	46.00	-13.48	35.69	-3.17	QP
5	793.348	37.16	46.00	-8.84	37.58	-0.42	QP
6	945.174	40.44	46.00	-5.56	38.94	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5795MHz)

Vertical

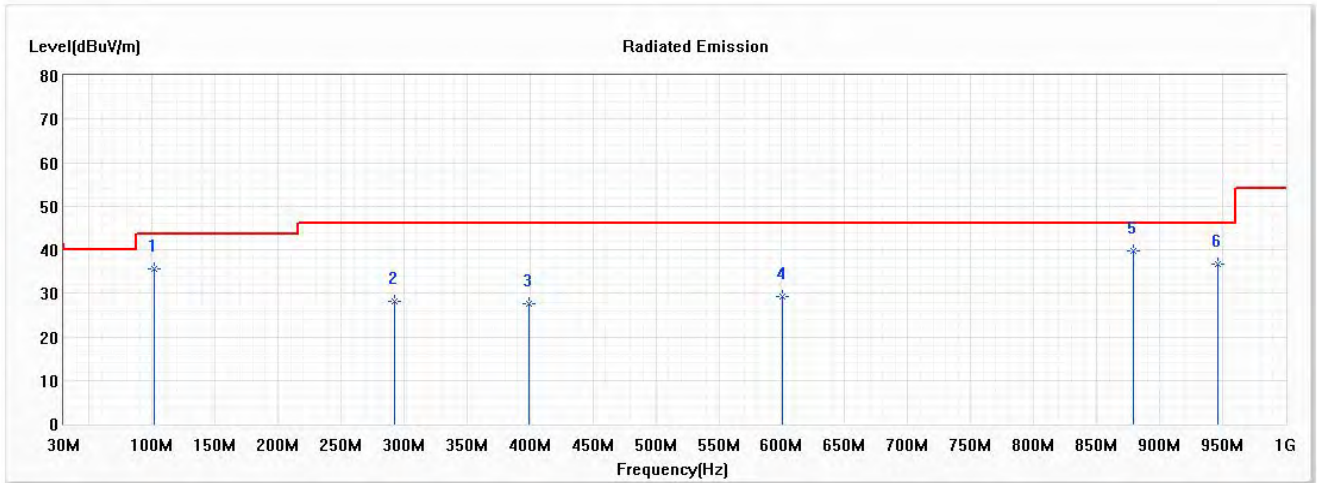


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	35.53	43.50	-7.97	50.69	-15.16	QP
2	292.884	28.16	46.00	-17.84	38.06	-9.90	QP
3	399.725	27.66	46.00	-18.34	34.96	-7.30	QP
4	600.754	29.17	46.00	-16.83	32.34	-3.17	QP
* 5	879.101	39.71	46.00	-6.29	39.31	0.40	QP
6	946.580	36.68	46.00	-9.32	35.14	1.54	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps) (5210MHz)

Horizontal

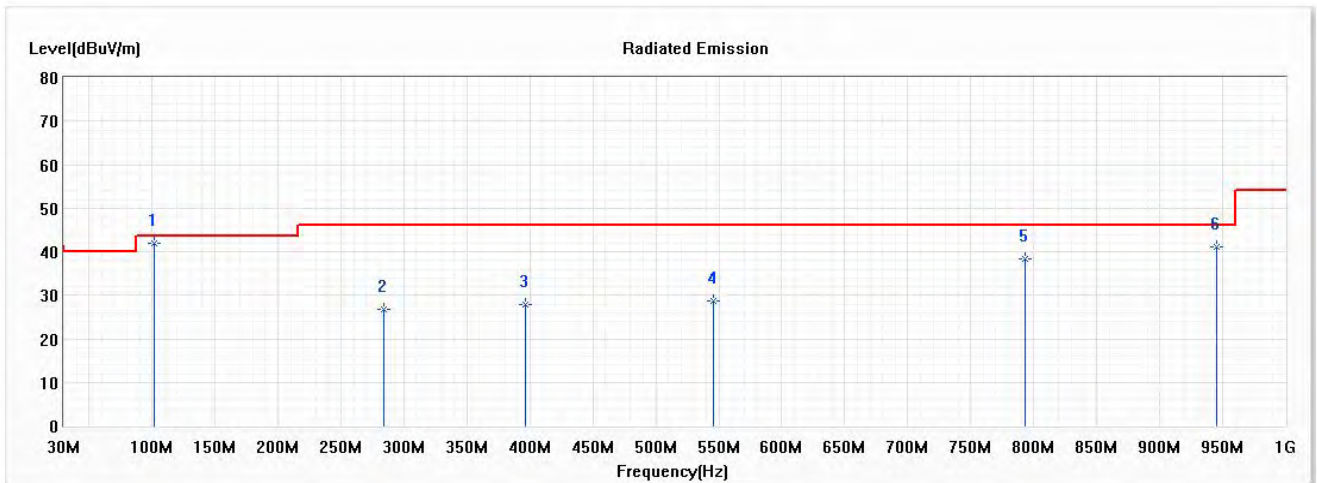


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	41.92	43.50	-1.58	57.08	-15.16	QP
2	284.449	26.88	46.00	-19.12	36.97	-10.09	QP
3	396.913	27.88	46.00	-18.12	35.23	-7.35	QP
4	545.928	28.71	46.00	-17.29	33.09	-4.38	QP
5	793.348	38.35	46.00	-7.65	38.77	-0.42	QP
6	945.174	41.06	46.00	-4.94	39.56	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps) (5210MHz)

Vertical

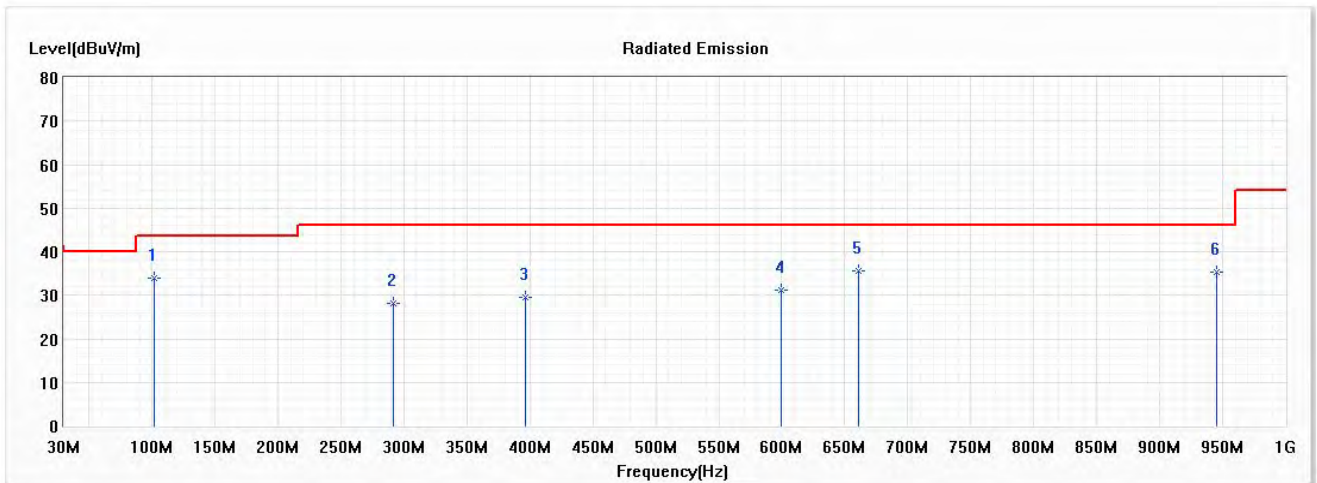


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	33.96	43.50	-9.54	49.12	-15.16	QP
2	291.478	28.13	46.00	-17.87	38.06	-9.93	QP
3	396.913	29.42	46.00	-16.58	36.77	-7.35	QP
4	599.348	31.05	46.00	-14.95	34.24	-3.19	QP
5	661.203	35.52	46.00	-10.48	38.05	-2.53	QP
6	945.174	35.29	46.00	-10.71	33.79	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps) (5290MHz)

Horizontal

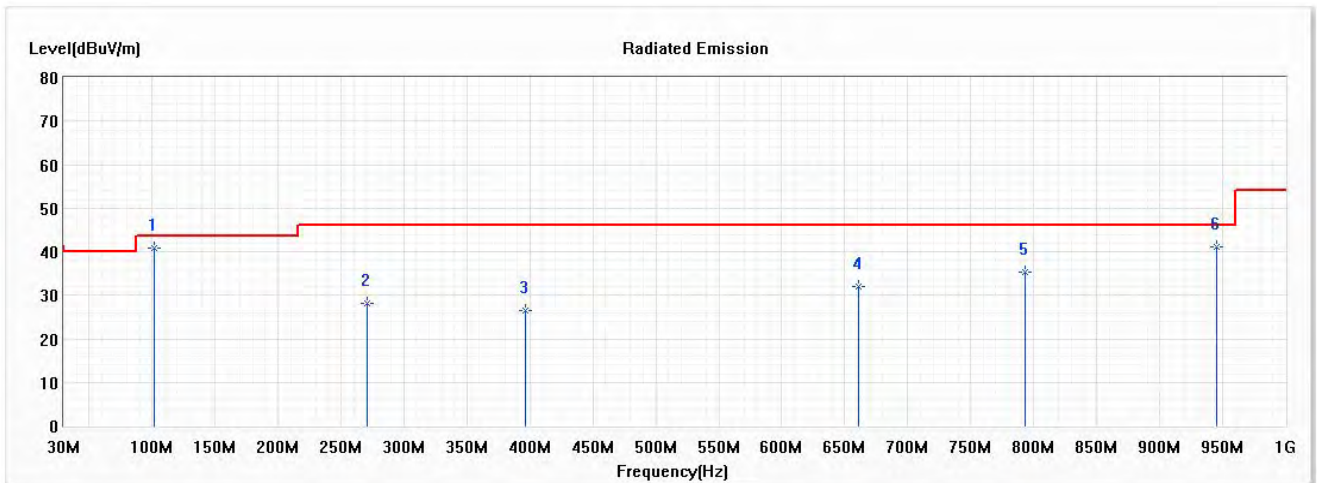


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	40.83	43.50	-2.67	55.99	-15.16	QP
2	270.391	28.10	46.00	-17.90	38.80	-10.70	QP
3	396.913	26.54	46.00	-19.46	33.89	-7.35	QP
4	661.203	32.07	46.00	-13.93	34.60	-2.53	QP
5	793.348	35.42	46.00	-10.58	35.84	-0.42	QP
6	945.174	41.15	46.00	-4.85	39.65	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps) (5290MHz)

Vertical

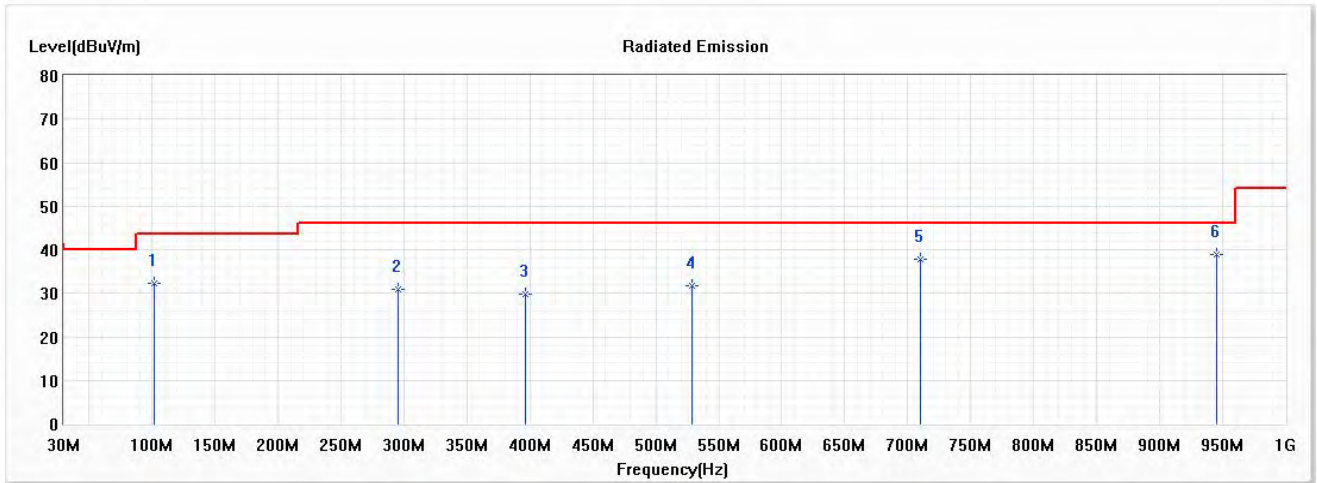


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	32.34	43.50	-11.16	47.50	-15.16	QP
2	295.696	30.97	46.00	-15.03	40.81	-9.84	QP
3	396.913	29.77	46.00	-16.23	37.12	-7.35	QP
4	529.058	31.62	46.00	-14.38	36.37	-4.75	QP
5	710.406	37.77	46.00	-8.23	39.51	-1.74	QP
* 6	945.174	38.93	46.00	-7.07	37.43	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps) (5530MHz)

Horizontal

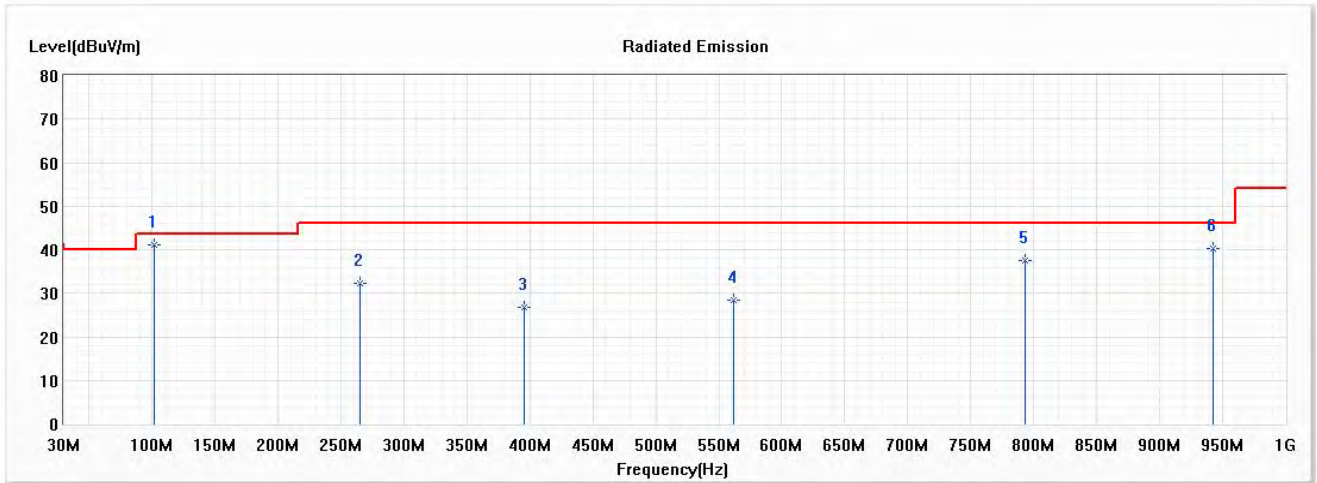


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	41.02	43.50	-2.48	56.18	-15.16	QP
2	264.768	32.37	46.00	-13.63	43.32	-10.95	QP
3	395.507	26.87	46.00	-19.13	34.25	-7.38	QP
4	561.391	28.43	46.00	-17.57	32.51	-4.08	QP
5	793.348	37.43	46.00	-8.57	37.85	-0.42	QP
6	942.362	40.26	46.00	-5.74	38.81	1.45	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps) (5530MHz)

Vertical

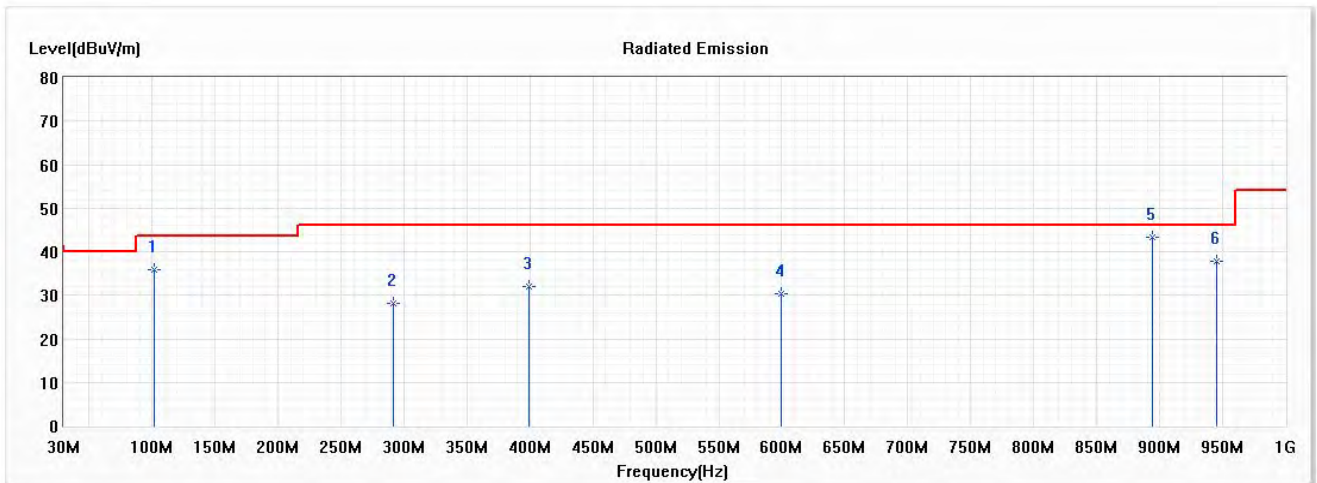


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	35.85	43.50	-7.65	51.01	-15.16	QP
2	291.478	28.21	46.00	-17.79	38.14	-9.93	QP
3	399.725	32.06	46.00	-13.94	39.36	-7.30	QP
4	599.348	30.45	46.00	-15.55	33.64	-3.19	QP
* 5	894.565	43.31	46.00	-2.69	42.56	0.75	QP
6	945.174	37.72	46.00	-8.28	36.22	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps) (5775MHz)

Horizontal

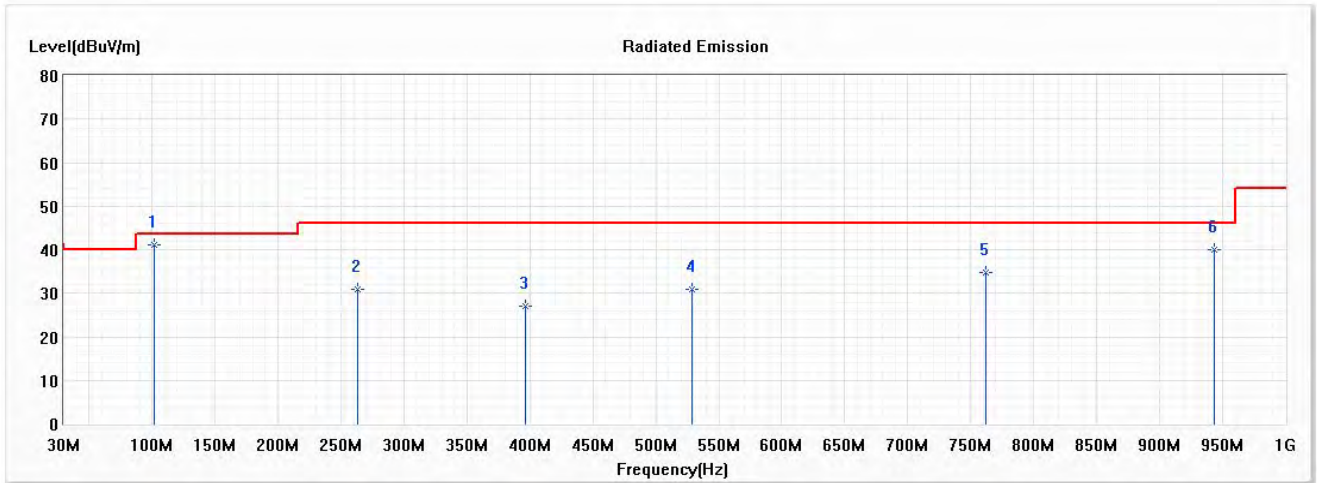


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	41.00	43.50	-2.50	56.16	-15.16	QP
2	263.362	30.91	46.00	-15.09	41.93	-11.02	QP
3	396.913	26.97	46.00	-19.03	34.32	-7.35	QP
4	529.058	30.90	46.00	-15.10	35.65	-4.75	QP
5	762.420	34.85	46.00	-11.15	35.66	-0.81	QP
6	943.768	39.93	46.00	-6.07	38.45	1.48	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps) (5775MHz)

Vertical

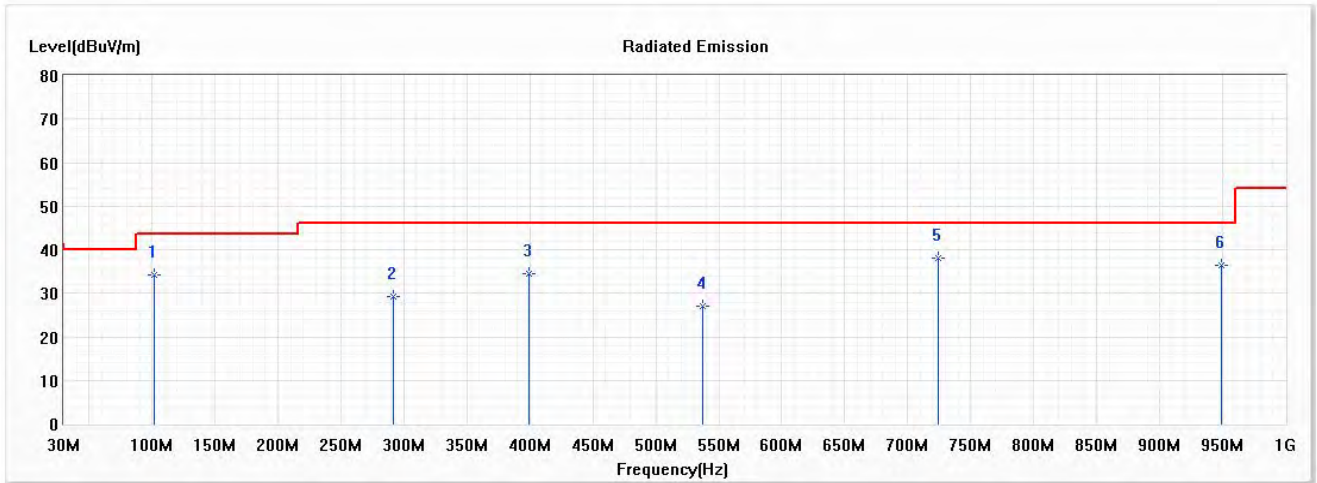


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	34.27	43.50	-9.23	49.43	-15.16	QP
2	291.478	29.24	46.00	-16.76	39.17	-9.93	QP
3	399.725	34.59	46.00	-11.41	41.89	-7.30	QP
4	537.493	27.11	46.00	-18.89	31.65	-4.54	QP
* 5	724.464	38.03	46.00	-7.97	39.57	-1.54	QP
6	949.391	36.39	46.00	-9.61	34.78	1.61	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps) (5250MHz)

Horizontal

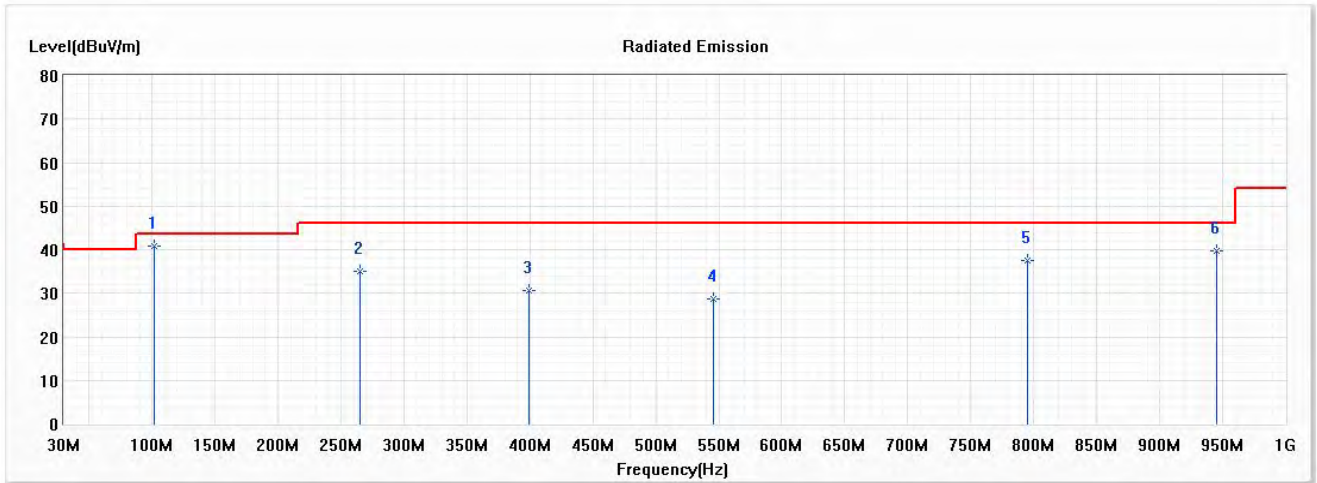


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	40.80	43.50	-2.70	55.96	-15.16	QP
2	264.768	35.04	46.00	-10.96	45.99	-10.95	QP
3	399.725	30.57	46.00	-15.43	37.87	-7.30	QP
4	545.928	28.76	46.00	-17.24	33.14	-4.38	QP
5	794.754	37.50	46.00	-8.50	37.89	-0.39	QP
6	945.174	39.83	46.00	-6.17	38.33	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps) (5250MHz)

Vertical

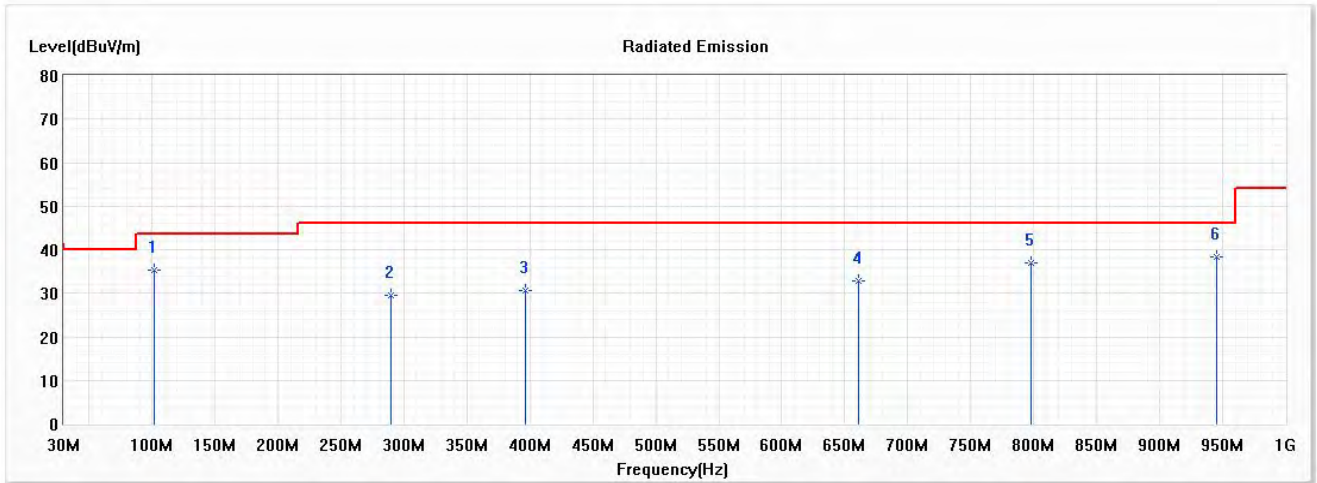


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	35.35	43.50	-8.15	50.51	-15.16	QP
2	290.072	29.64	46.00	-16.36	39.61	-9.97	QP
3	396.913	30.69	46.00	-15.31	38.04	-7.35	QP
4	661.203	32.85	46.00	-13.15	35.38	-2.53	QP
5	797.565	37.03	46.00	-8.97	37.41	-0.38	QP
* 6	945.174	38.44	46.00	-7.56	36.94	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps) (5570MHz)

Horizontal

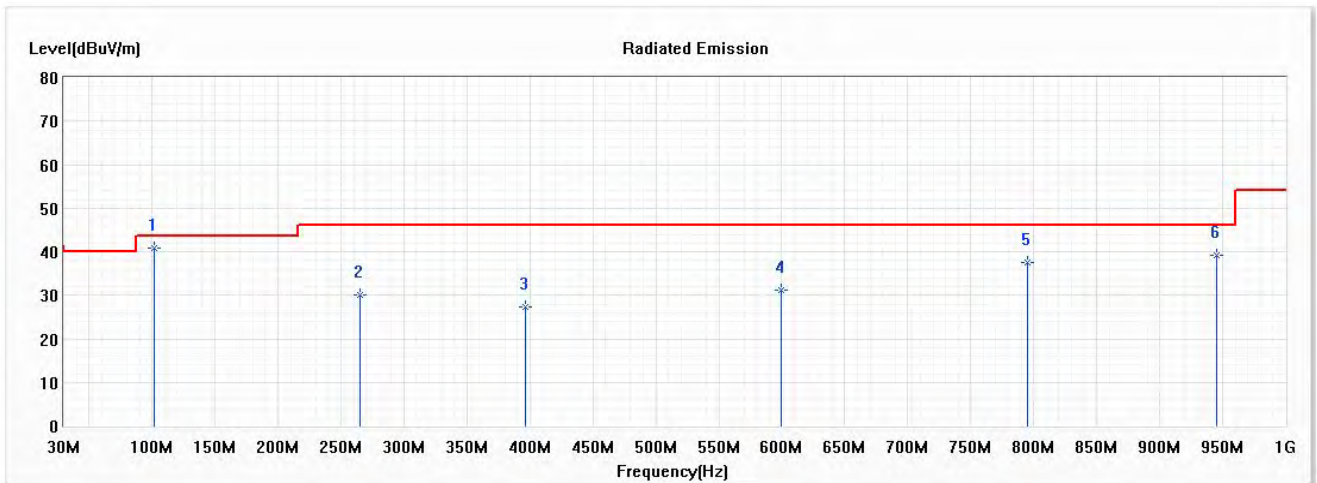


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	40.73	43.50	-2.77	55.89	-15.16	QP
2	264.768	30.16	46.00	-15.84	41.11	-10.95	QP
3	396.913	27.24	46.00	-18.76	34.59	-7.35	QP
4	599.348	31.26	46.00	-14.74	34.45	-3.19	QP
5	794.754	37.43	46.00	-8.57	37.82	-0.39	QP
6	945.174	39.04	46.00	-6.96	37.54	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps) (5570MHz)

Vertical

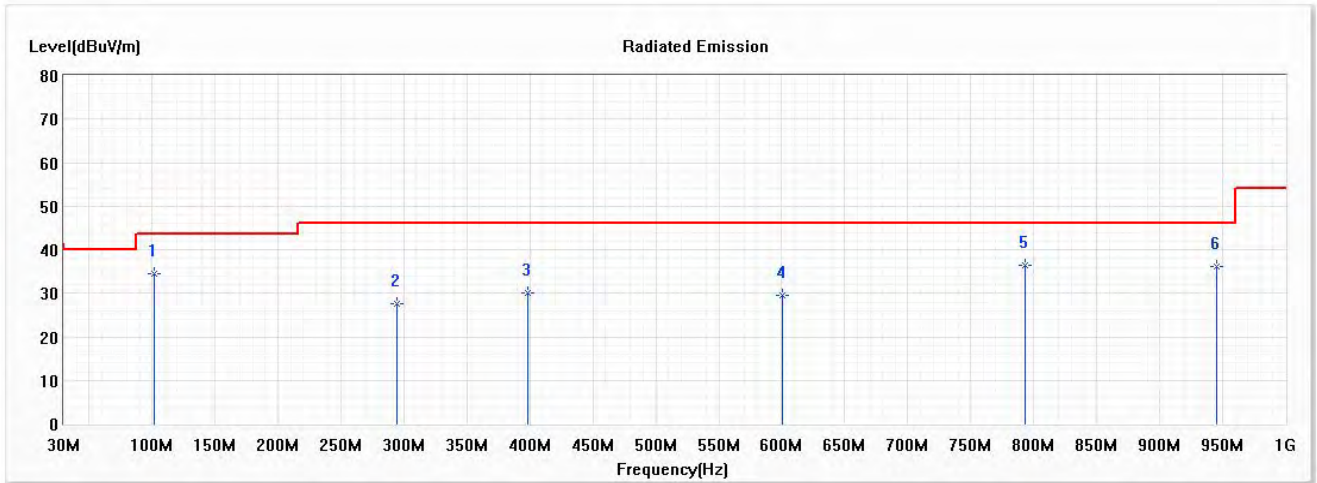


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	34.42	43.50	-9.08	49.58	-15.16	QP
2	294.290	27.61	46.00	-18.39	37.47	-9.86	QP
3	398.319	30.20	46.00	-15.80	37.52	-7.32	QP
4	600.754	29.44	46.00	-16.56	32.61	-3.17	QP
5	793.348	36.34	46.00	-9.66	36.76	-0.42	QP
6	945.174	36.25	46.00	-9.75	34.75	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps) (5200MHz)

Horizontal

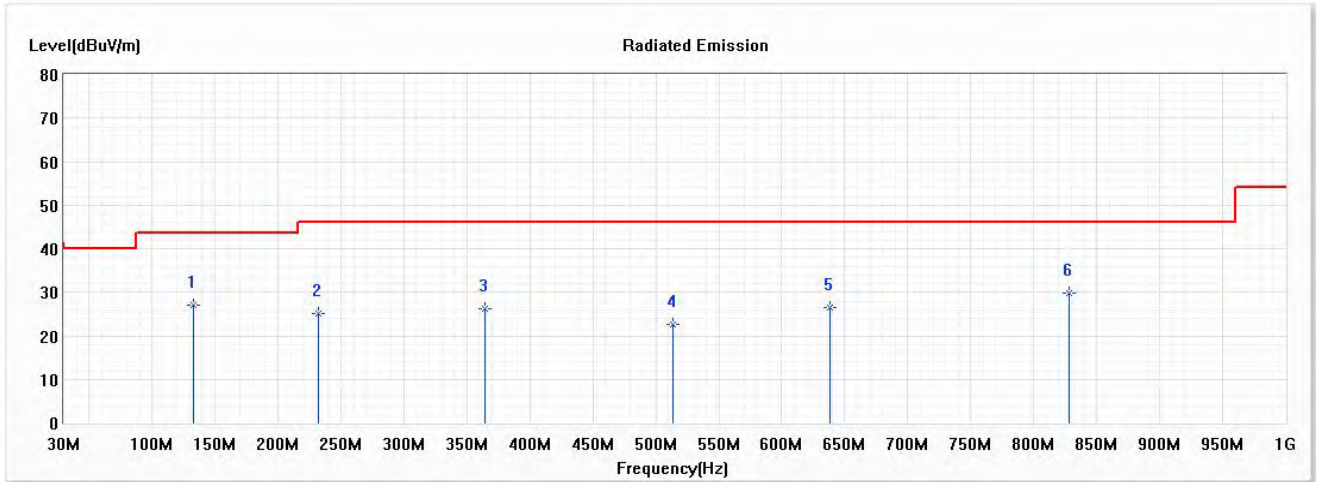


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	132.623	27.17	43.50	-16.33	38.83	-11.66	QP
2	232.435	25.19	46.00	-20.81	36.93	-11.74	QP
3	364.580	26.07	46.00	-19.93	34.25	-8.18	QP
4	513.594	22.51	46.00	-23.49	27.55	-5.04	QP
5	638.710	26.53	46.00	-19.47	29.31	-2.78	QP
* 6	828.493	29.70	46.00	-16.30	29.91	-0.21	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps) (5200MHz)

Vertical

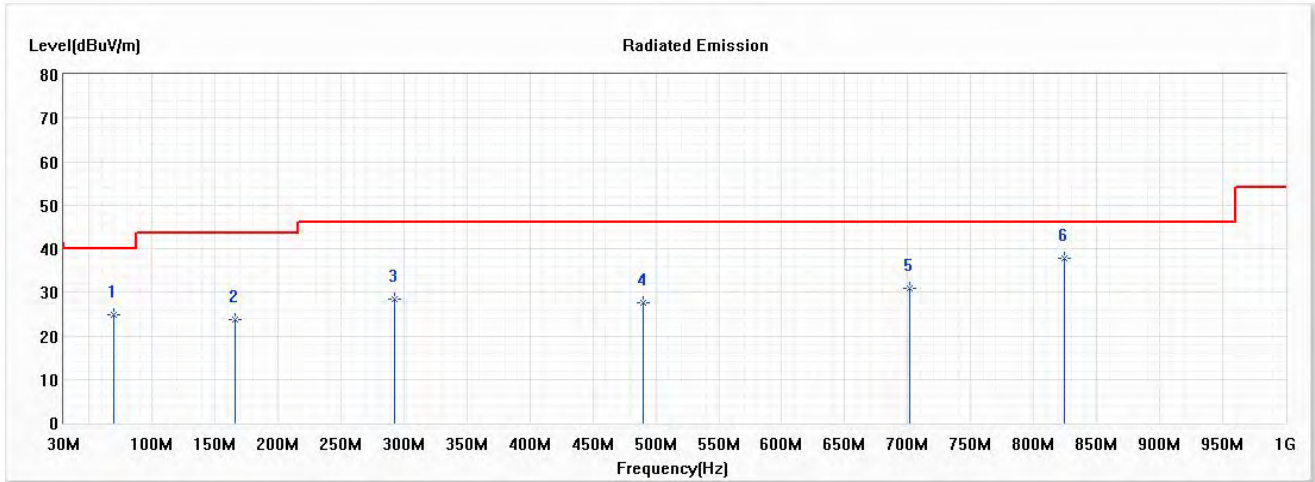


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	69.362	24.93	40.00	-15.07	37.92	-12.99	QP
2	166.362	23.83	43.50	-19.67	34.16	-10.33	QP
3	292.884	28.33	46.00	-17.67	38.23	-9.90	QP
4	489.696	27.56	46.00	-18.44	33.18	-5.62	QP
5	701.971	31.00	46.00	-15.00	33.03	-2.03	QP
* 6	824.275	37.79	46.00	-8.21	38.01	-0.22	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps) (5300MHz)

Horizontal

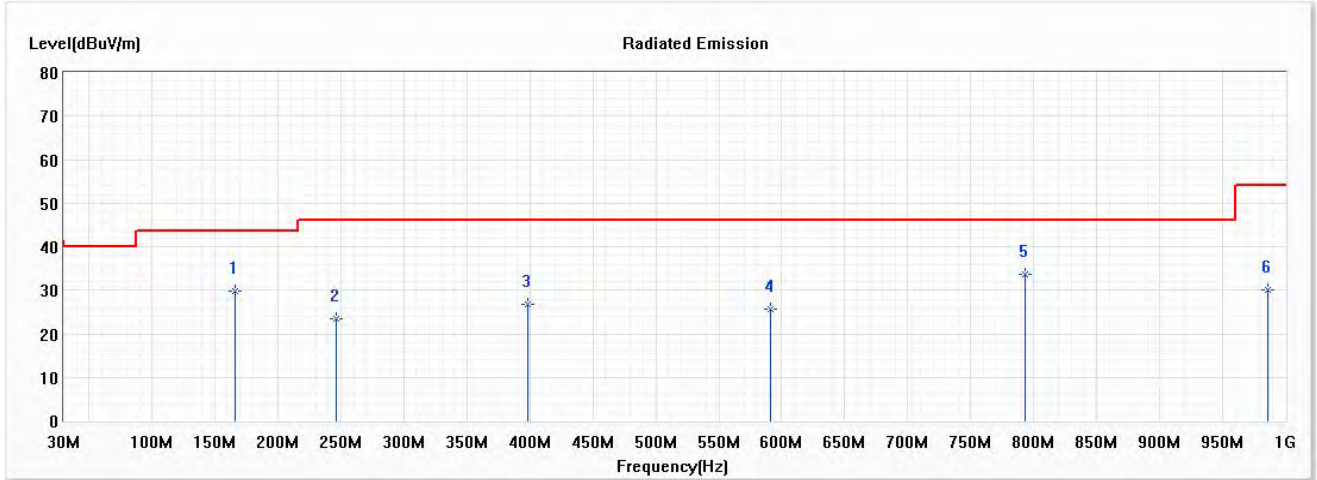


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	166.362	29.77	43.50	-13.73	40.10	-10.33	QP
2	246.493	23.52	46.00	-22.48	34.99	-11.47	QP
3	398.319	26.82	46.00	-19.18	34.14	-7.32	QP
4	590.913	25.56	46.00	-20.44	28.93	-3.37	QP
* 5	793.348	33.61	46.00	-12.39	34.03	-0.42	QP
6	985.942	29.99	54.00	-24.01	28.33	1.66	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps) (5300MHz)

Vertical

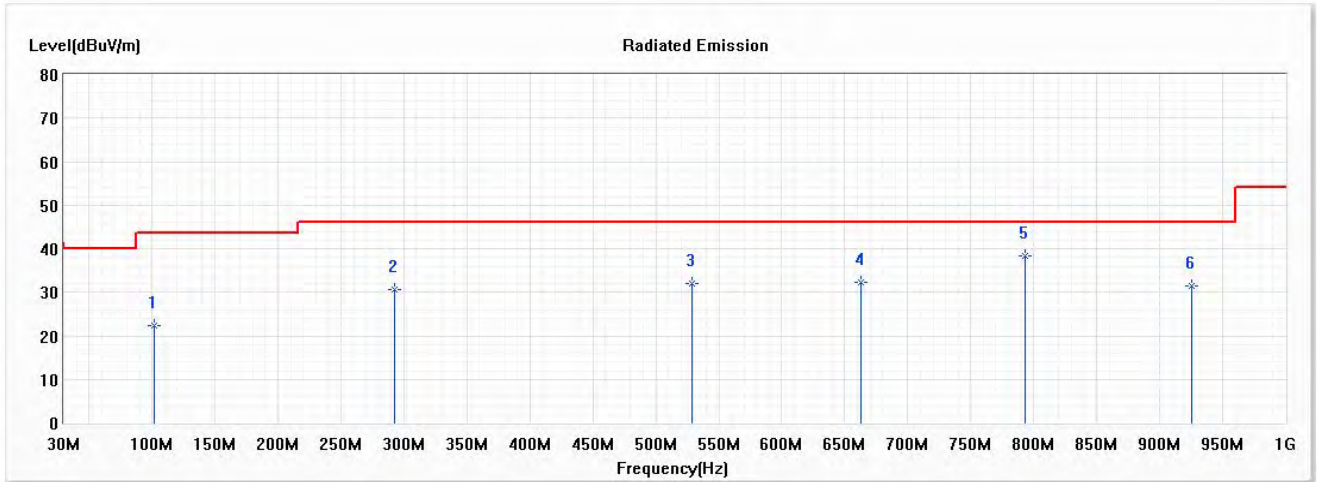


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	22.23	43.50	-21.27	37.39	-15.16	QP
2	292.884	30.54	46.00	-15.46	40.44	-9.90	QP
3	529.058	31.98	46.00	-14.02	36.73	-4.75	QP
4	662.609	32.35	46.00	-13.65	34.92	-2.57	QP
* 5	793.348	38.44	46.00	-7.56	38.86	-0.42	QP
6	925.493	31.45	46.00	-14.55	30.26	1.19	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps) (5600MHz)

Horizontal

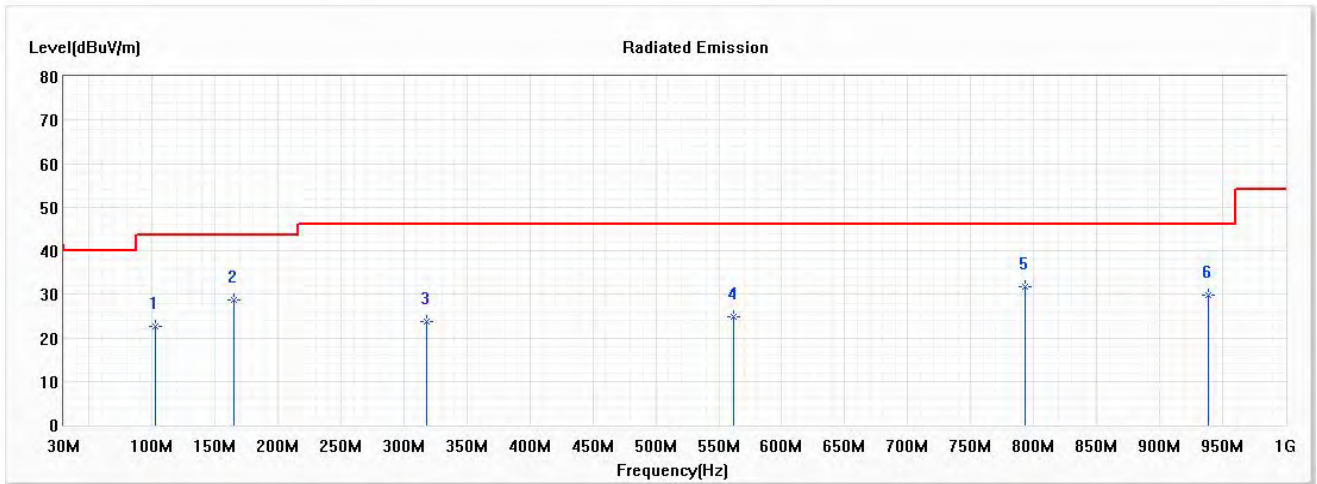


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	103.101	22.53	43.50	-20.97	37.40	-14.87	QP
2	164.957	28.68	43.50	-14.82	39.02	-10.34	QP
3	318.188	23.85	46.00	-22.15	33.10	-9.25	QP
4	561.391	24.88	46.00	-21.12	28.96	-4.08	QP
* 5	793.348	31.83	46.00	-14.17	32.25	-0.42	QP
6	938.145	29.76	46.00	-16.24	28.37	1.39	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps) (5600MHz)

Vertical

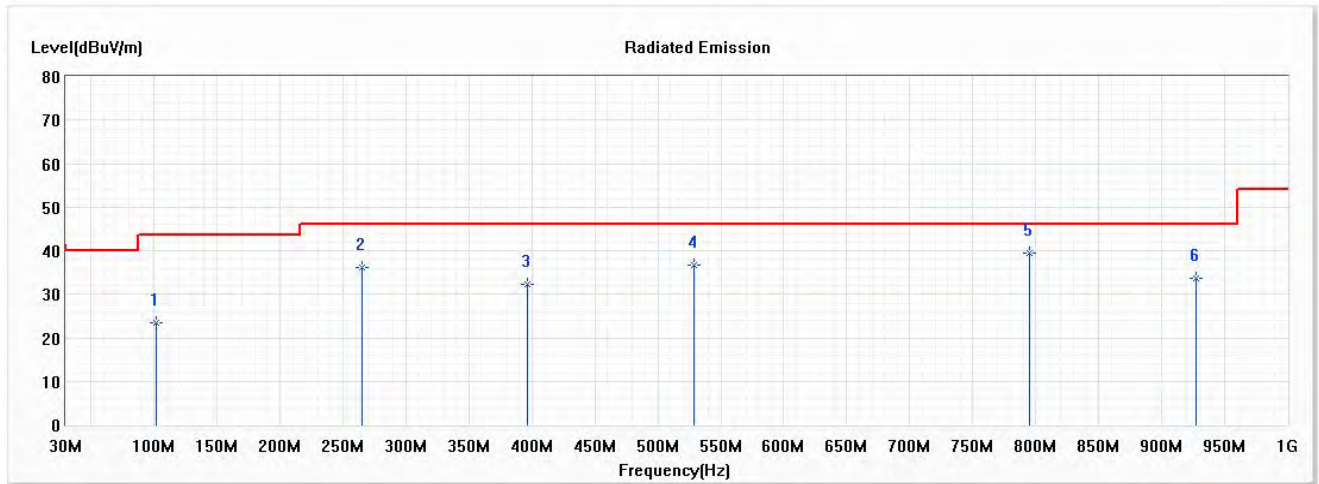


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	23.55	43.50	-19.95	38.71	-15.16	QP
2	264.768	36.22	46.00	-9.78	47.17	-10.95	QP
3	396.913	32.39	46.00	-13.61	39.74	-7.35	QP
4	529.058	36.61	46.00	-9.39	41.36	-4.75	QP
* 5	794.754	39.51	46.00	-6.49	39.90	-0.39	QP
6	926.899	33.56	46.00	-12.44	32.34	1.22	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps) (5785MHz)

Horizontal

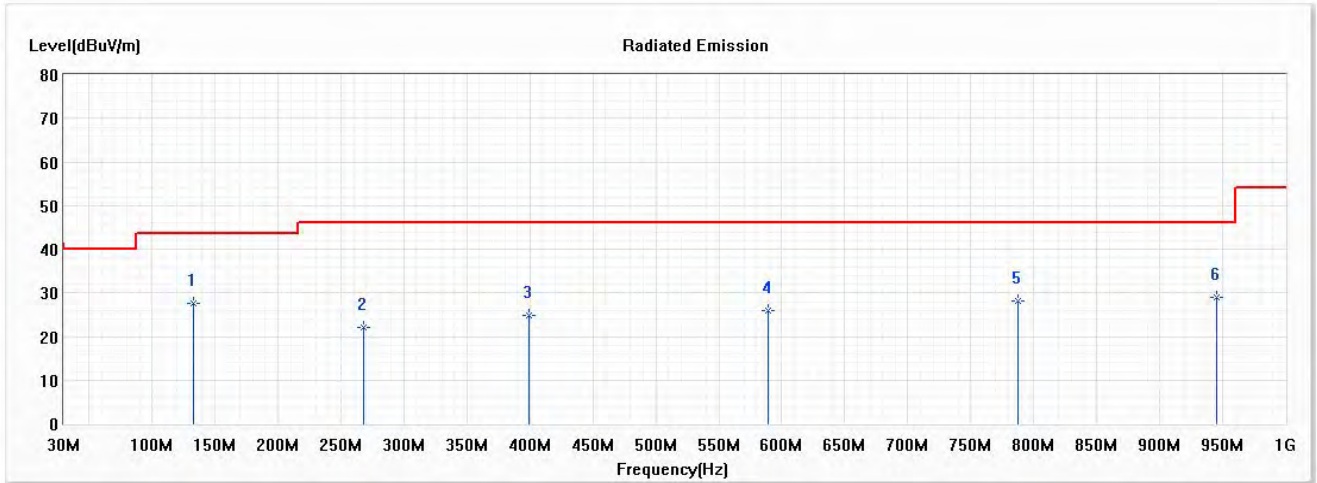


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	132.623	27.48	43.50	-16.02	39.14	-11.66	QP
2	267.580	22.13	46.00	-23.87	32.97	-10.84	QP
3	399.725	24.76	46.00	-21.24	32.06	-7.30	QP
4	589.507	25.90	46.00	-20.10	29.34	-3.44	QP
5	787.725	28.05	46.00	-17.95	28.51	-0.46	QP
6	945.174	28.92	46.00	-17.08	27.42	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps) (5785MHz)

Vertical

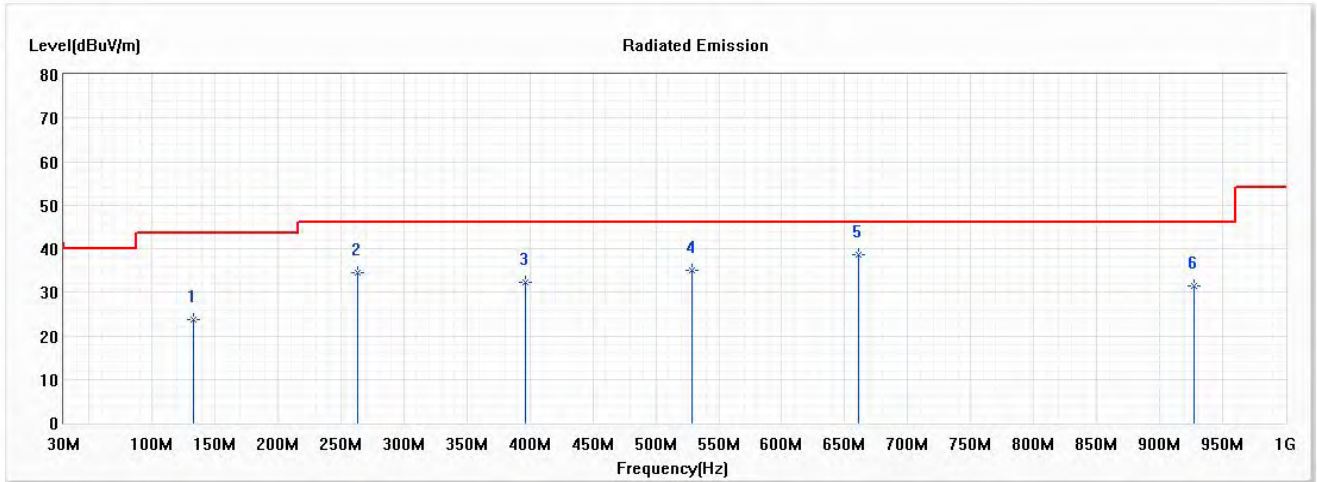


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	132.623	23.71	43.50	-19.79	35.37	-11.66	QP
2	263.362	34.45	46.00	-11.55	45.47	-11.02	QP
3	396.913	32.18	46.00	-13.82	39.53	-7.35	QP
4	529.058	35.08	46.00	-10.92	39.83	-4.75	QP
* 5	661.203	38.65	46.00	-7.35	41.18	-2.53	QP
6	926.899	31.37	46.00	-14.63	30.15	1.22	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5200MHz)

Horizontal

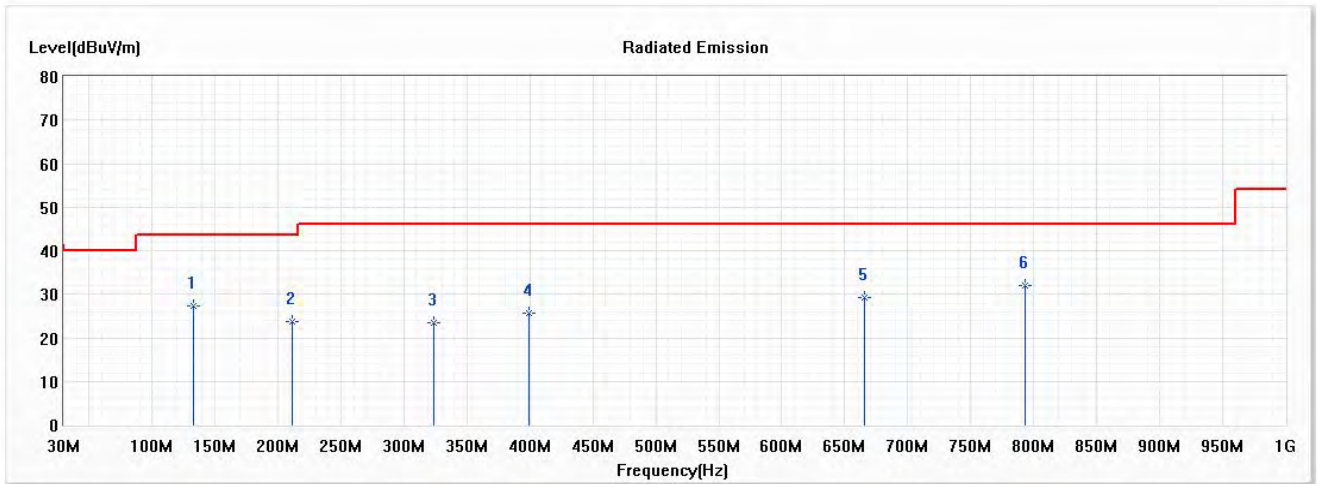


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	132.623	27.42	43.50	-16.08	39.08	-11.66	QP
2	211.348	23.79	43.50	-19.71	36.88	-13.09	QP
3	323.812	23.55	46.00	-22.45	32.64	-9.09	QP
4	399.725	25.55	46.00	-20.45	32.85	-7.30	QP
5	665.420	29.16	46.00	-16.84	31.76	-2.60	QP
* 6	793.348	32.05	46.00	-13.95	32.47	-0.42	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5200MHz)

Vertical

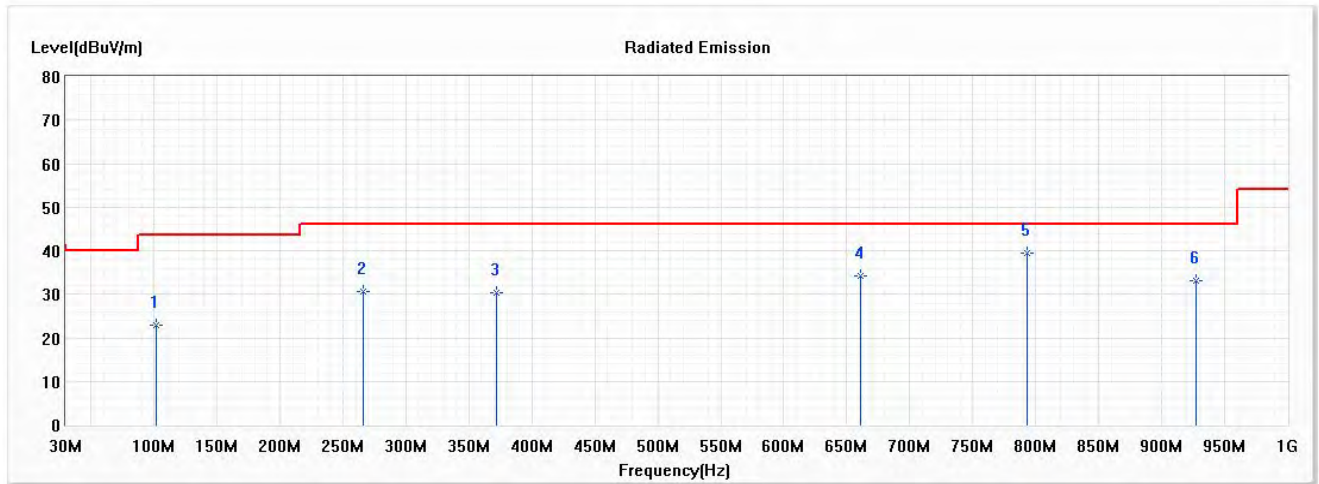


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	22.96	43.50	-20.54	38.12	-15.16	QP
2	266.174	30.61	46.00	-15.39	41.50	-10.89	QP
3	371.609	30.35	46.00	-15.65	38.28	-7.93	QP
4	661.203	34.08	46.00	-11.92	36.61	-2.53	QP
* 5	793.348	39.38	46.00	-6.62	39.80	-0.42	QP
6	926.899	33.14	46.00	-12.86	31.92	1.22	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5300MHz)

Horizontal

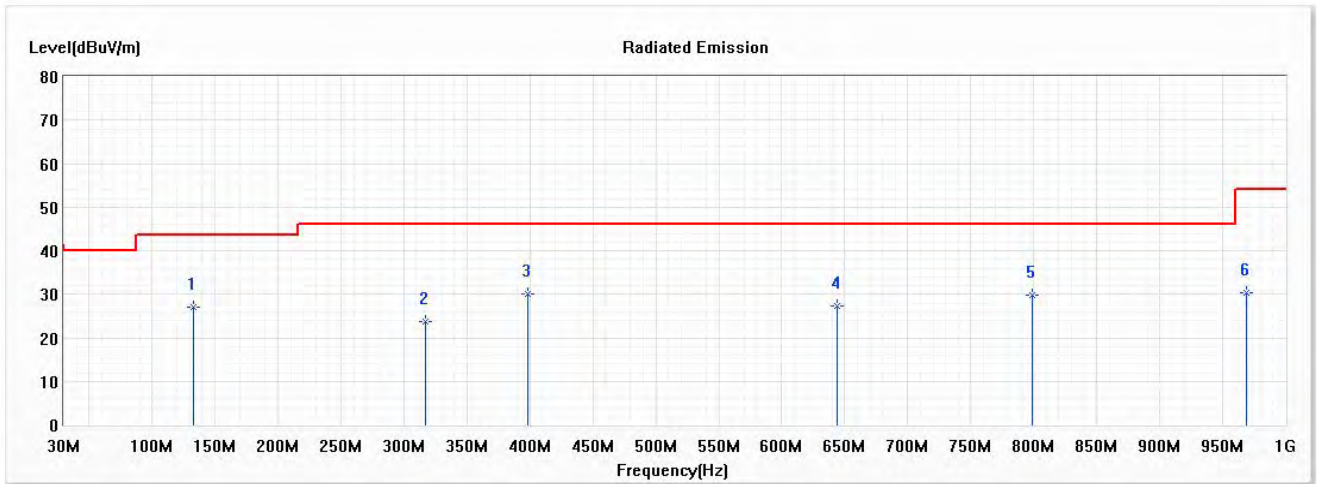


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	132.623	27.17	43.50	-16.33	38.83	-11.66	QP
2	316.783	23.73	46.00	-22.27	33.04	-9.31	QP
* 3	398.319	30.01	46.00	-15.99	37.33	-7.32	QP
4	644.333	27.32	46.00	-18.68	29.98	-2.66	QP
5	798.971	29.68	46.00	-16.32	30.06	-0.38	QP
6	969.072	30.28	54.00	-23.72	28.55	1.73	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5300MHz)

Vertical

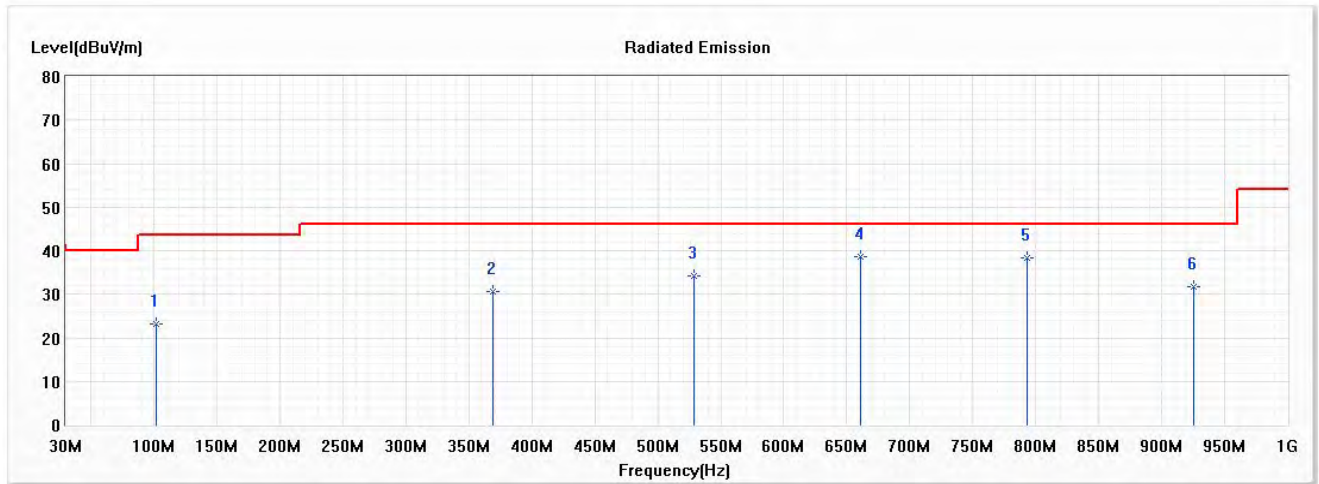


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	23.21	43.50	-20.29	38.37	-15.16	QP
2	368.797	30.72	46.00	-15.28	38.74	-8.02	QP
3	529.058	34.09	46.00	-11.91	38.84	-4.75	QP
* 4	661.203	38.70	46.00	-7.30	41.23	-2.53	QP
5	793.348	38.30	46.00	-7.70	38.72	-0.42	QP
6	925.493	31.75	46.00	-14.25	30.56	1.19	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5600MHz)

Horizontal

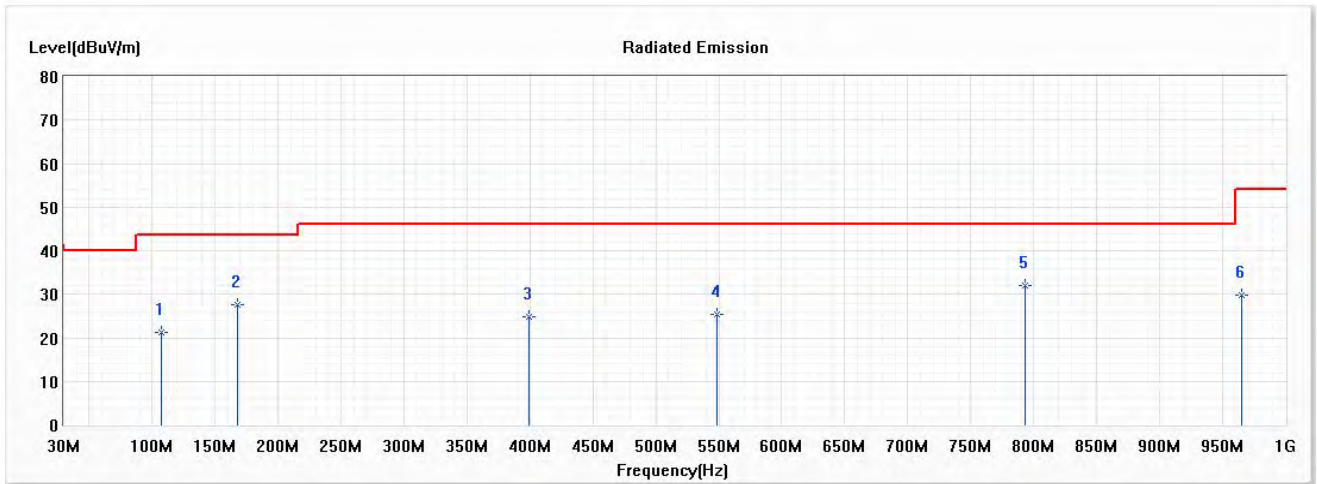


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	107.319	21.15	43.50	-22.35	35.35	-14.20	QP
2	167.768	27.46	43.50	-16.04	37.78	-10.32	QP
3	399.725	24.91	46.00	-21.09	32.21	-7.30	QP
4	548.739	25.41	46.00	-20.59	29.74	-4.33	QP
* 5	793.348	32.04	46.00	-13.96	32.46	-0.42	QP
6	964.855	29.80	54.00	-24.20	28.08	1.72	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5600MHz)

Vertical

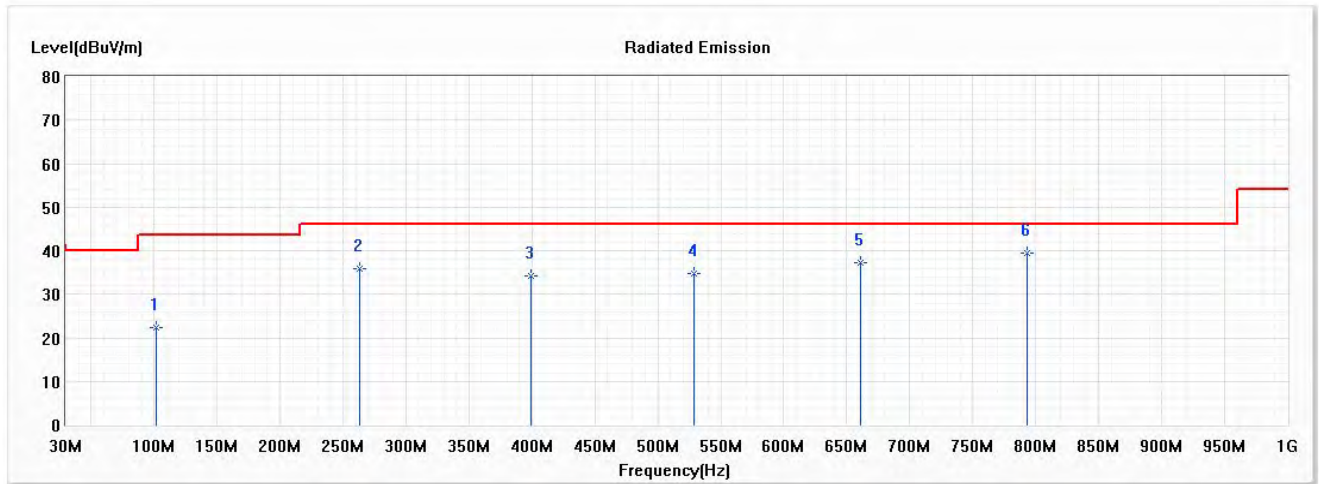


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	22.44	43.50	-21.06	37.60	-15.16	QP
2	263.362	35.81	46.00	-10.19	46.83	-11.02	QP
3	399.725	34.27	46.00	-11.73	41.57	-7.30	QP
4	529.058	34.81	46.00	-11.19	39.56	-4.75	QP
5	661.203	37.14	46.00	-8.86	39.67	-2.53	QP
* 6	793.348	39.55	46.00	-6.45	39.97	-0.42	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5720MHz)

Horizontal

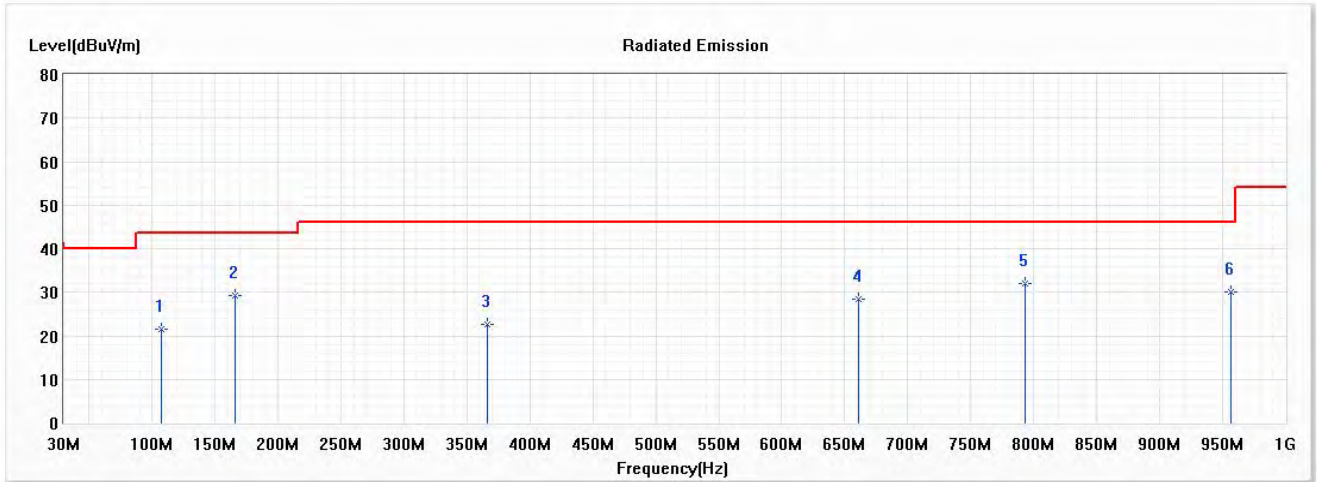


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	107.319	21.40	43.50	-22.10	35.60	-14.20	QP
2	166.362	29.34	43.50	-14.16	39.67	-10.33	QP
3	365.986	22.50	46.00	-23.50	30.63	-8.13	QP
4	661.203	28.38	46.00	-17.62	30.91	-2.53	QP
* 5	793.348	32.02	46.00	-13.98	32.44	-0.42	QP
6	956.420	30.19	46.00	-15.81	28.58	1.61	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5720MHz)

Vertical

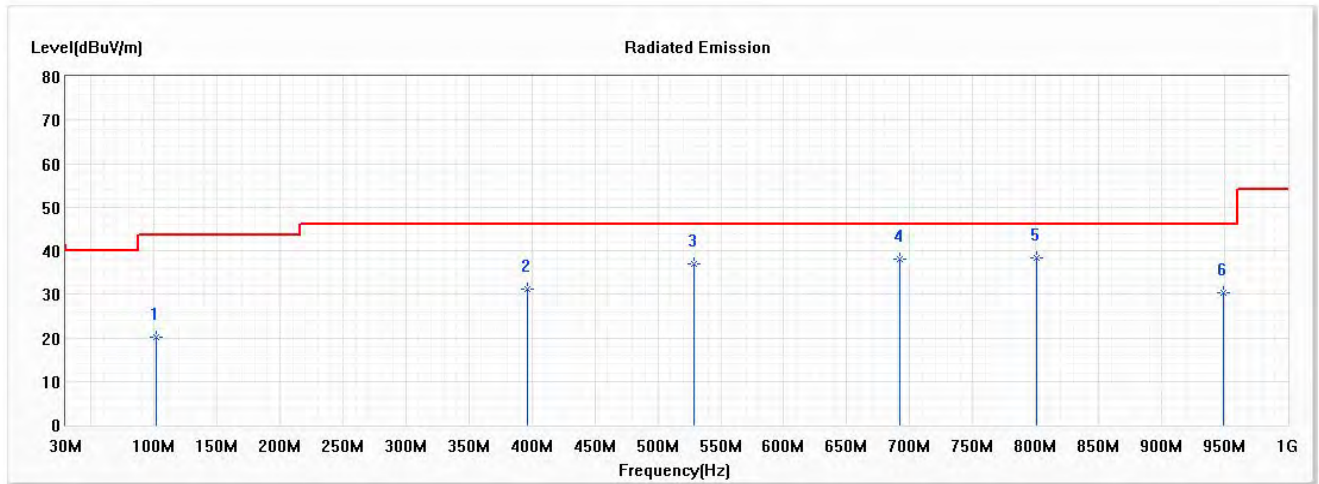


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	20.26	43.50	-23.24	35.42	-15.16	QP
2	396.913	31.27	46.00	-14.73	38.62	-7.35	QP
3	529.058	36.96	46.00	-9.04	41.71	-4.75	QP
4	692.130	38.08	46.00	-7.92	40.22	-2.14	QP
* 5	800.377	38.34	46.00	-7.66	38.71	-0.37	QP
6	949.391	30.35	46.00	-15.65	28.74	1.61	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5785MHz)

Horizontal

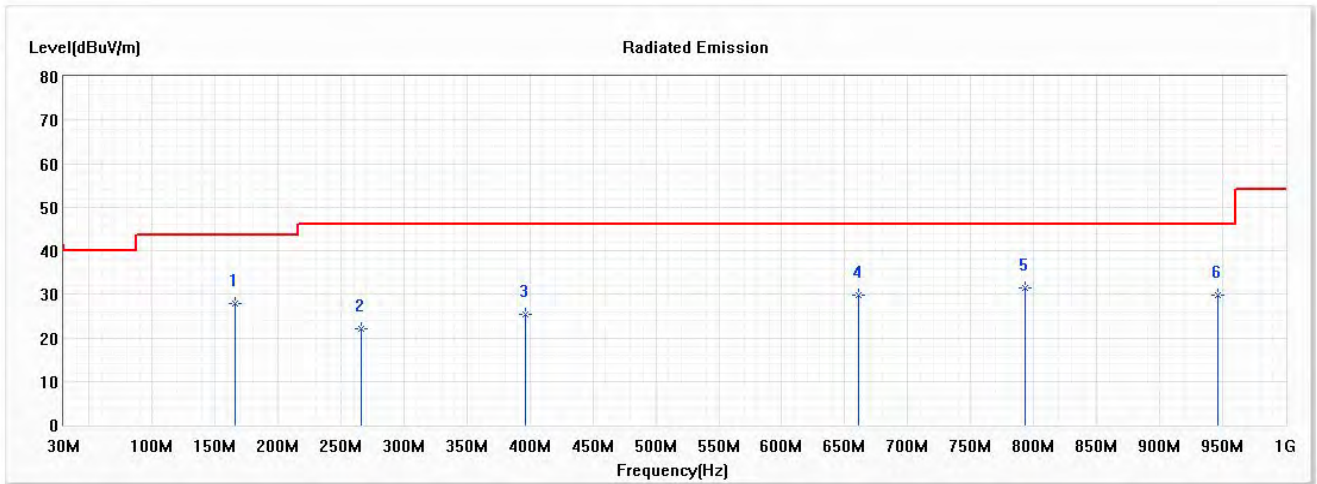


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	166.362	27.80	43.50	-15.70	38.13	-10.33	QP
2	266.174	22.17	46.00	-23.83	33.06	-10.89	QP
3	396.913	25.42	46.00	-20.58	32.77	-7.35	QP
4	661.203	29.70	46.00	-16.30	32.23	-2.53	QP
* 5	793.348	31.41	46.00	-14.59	31.83	-0.42	QP
6	946.580	29.78	46.00	-16.22	28.24	1.54	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5785MHz)

Vertical

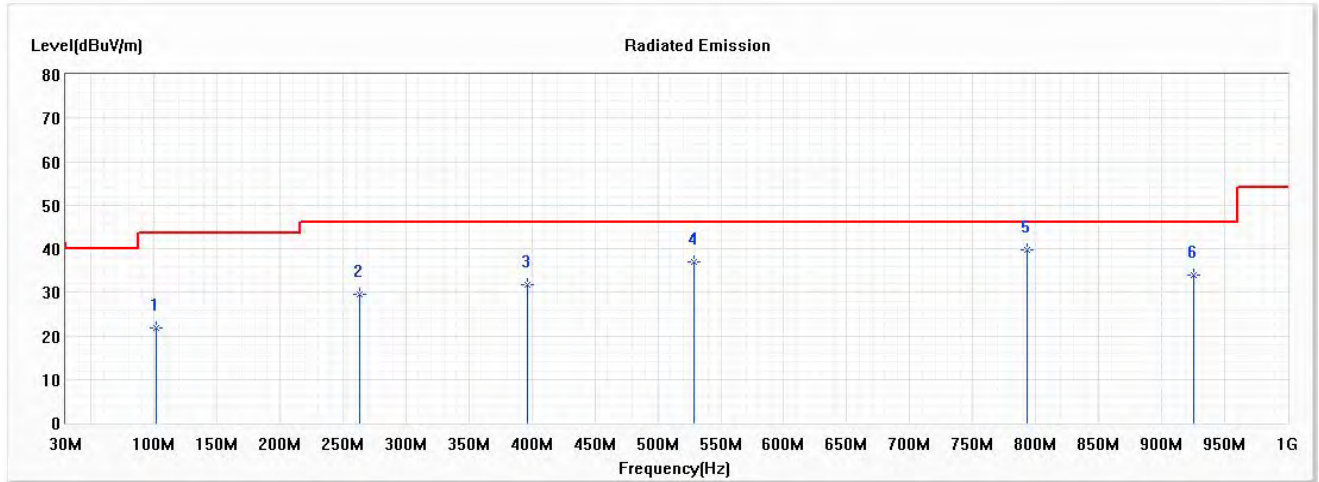


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	101.696	21.80	43.50	-21.70	36.96	-15.16	QP
2	263.362	29.43	46.00	-16.57	40.45	-11.02	QP
3	396.913	31.64	46.00	-14.36	38.99	-7.35	QP
4	529.058	37.09	46.00	-8.91	41.84	-4.75	QP
* 5	793.348	39.81	46.00	-6.19	40.23	-0.42	QP
6	925.493	33.92	46.00	-12.08	32.73	1.19	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps) (5230MHz)

Horizontal

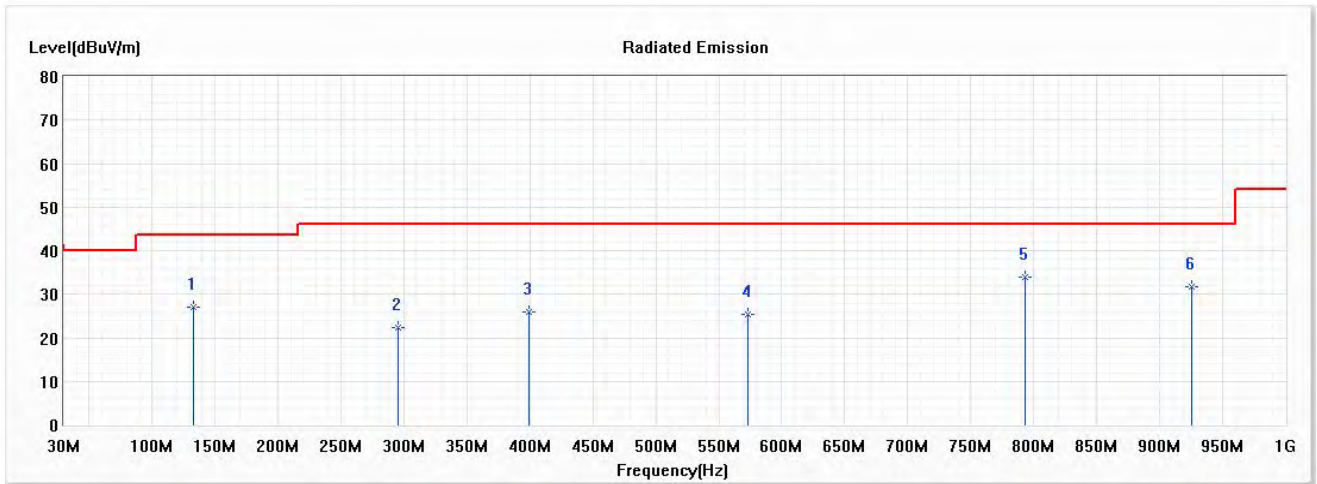


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	132.623	26.98	43.50	-16.52	38.64	-11.66	QP
2	295.696	22.42	46.00	-23.58	32.26	-9.84	QP
3	399.725	25.95	46.00	-20.05	33.25	-7.30	QP
4	572.638	25.49	46.00	-20.51	29.40	-3.91	QP
* 5	793.348	33.97	46.00	-12.03	34.39	-0.42	QP
6	925.493	31.64	46.00	-14.36	30.45	1.19	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps) (5230MHz)

Vertical

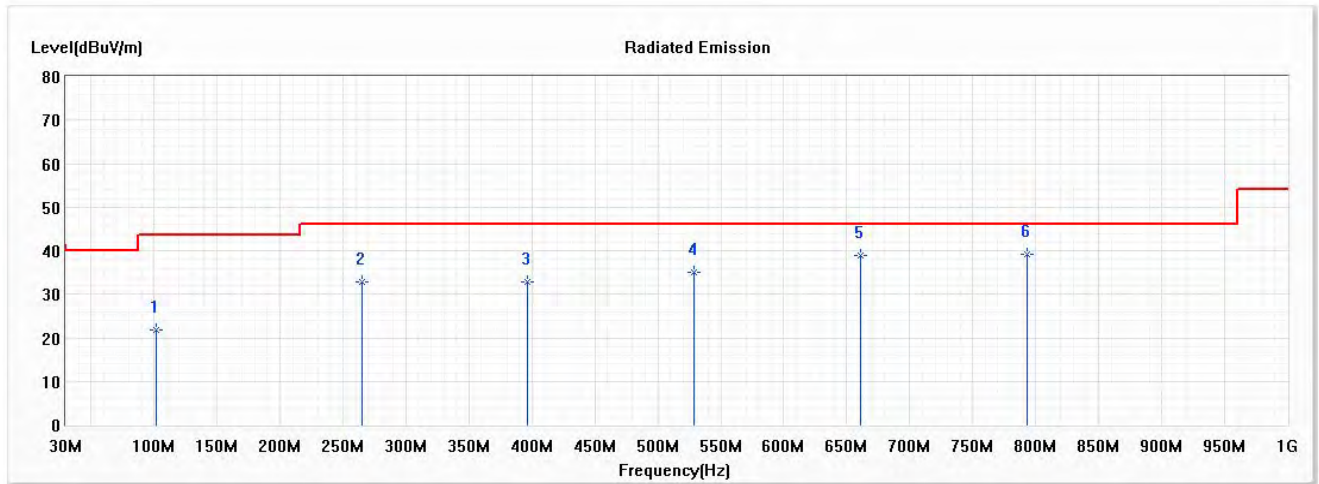


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	21.74	43.50	-21.76	36.90	-15.16	QP
2	264.768	32.82	46.00	-13.18	43.77	-10.95	QP
3	396.913	32.72	46.00	-13.28	40.07	-7.35	QP
4	529.058	35.14	46.00	-10.86	39.89	-4.75	QP
5	661.203	38.93	46.00	-7.07	41.46	-2.53	QP
* 6	793.348	39.13	46.00	-6.87	39.55	-0.42	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps) (5310MHz)

Horizontal

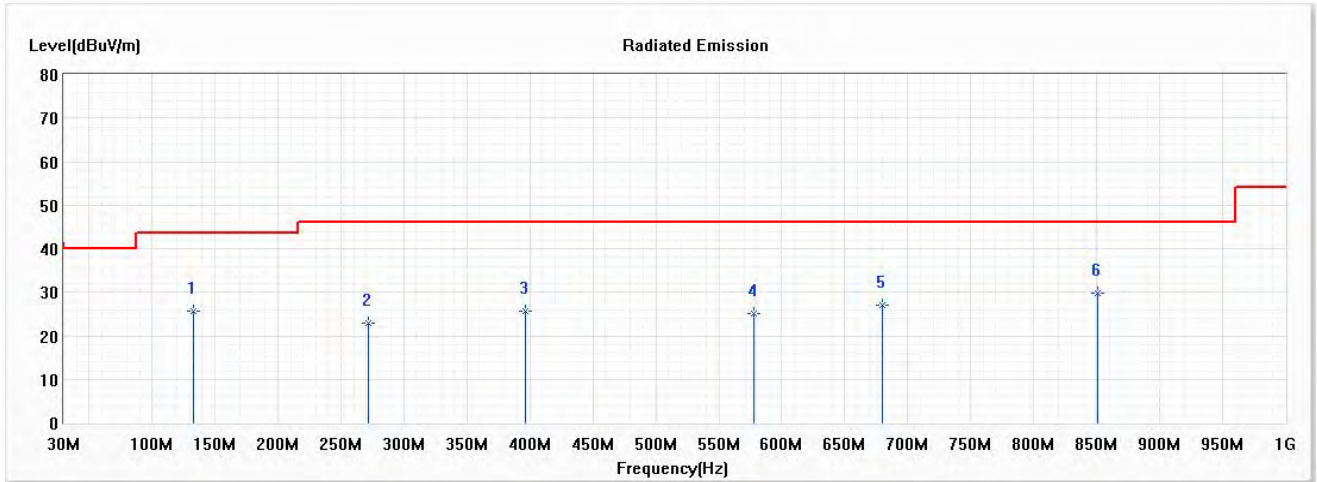


No	Frequency (MHz)	Emission Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Reading Level (dBµV)	Correct Factor (dB)	Detector Type
1	132.623	25.62	43.50	-17.88	37.28	-11.66	QP
2	271.797	22.80	46.00	-23.20	33.45	-10.65	QP
3	396.913	25.60	46.00	-20.40	32.95	-7.35	QP
4	578.261	25.00	46.00	-21.00	28.77	-3.77	QP
5	679.478	26.99	46.00	-19.01	29.31	-2.32	QP
* 6	850.986	29.70	46.00	-16.30	29.48	0.22	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps) (5310MHz)

Vertical

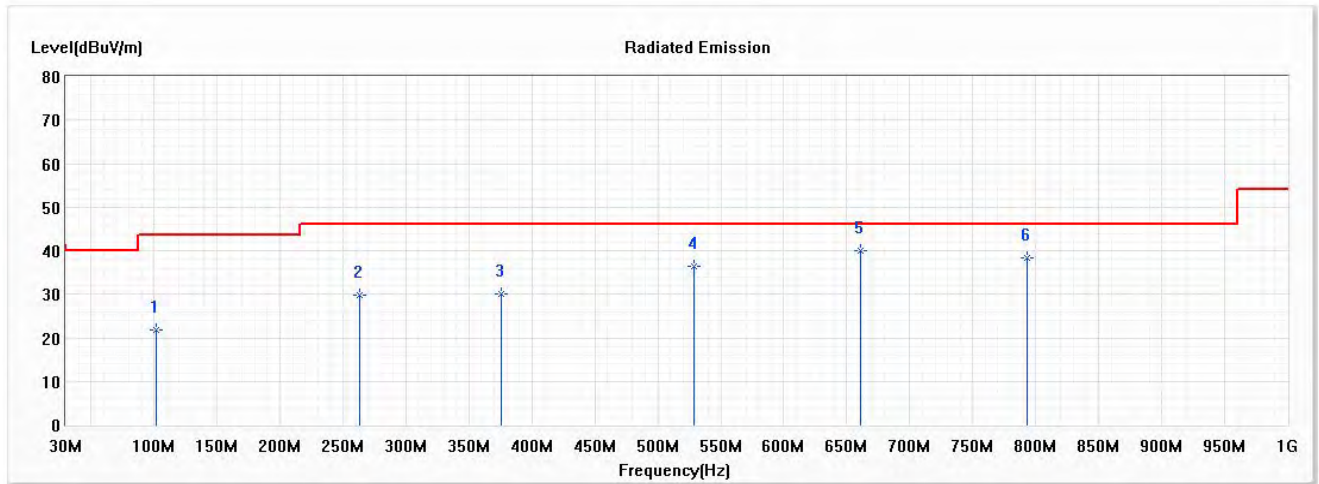


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	21.76	43.50	-21.74	36.92	-15.16	QP
2	263.362	29.69	46.00	-16.31	40.71	-11.02	QP
3	375.826	30.17	46.00	-15.83	37.99	-7.82	QP
4	529.058	36.38	46.00	-9.62	41.13	-4.75	QP
* 5	661.203	39.99	46.00	-6.01	42.52	-2.53	QP
6	793.348	38.39	46.00	-7.61	38.81	-0.42	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps) (5590MHz)

Horizontal

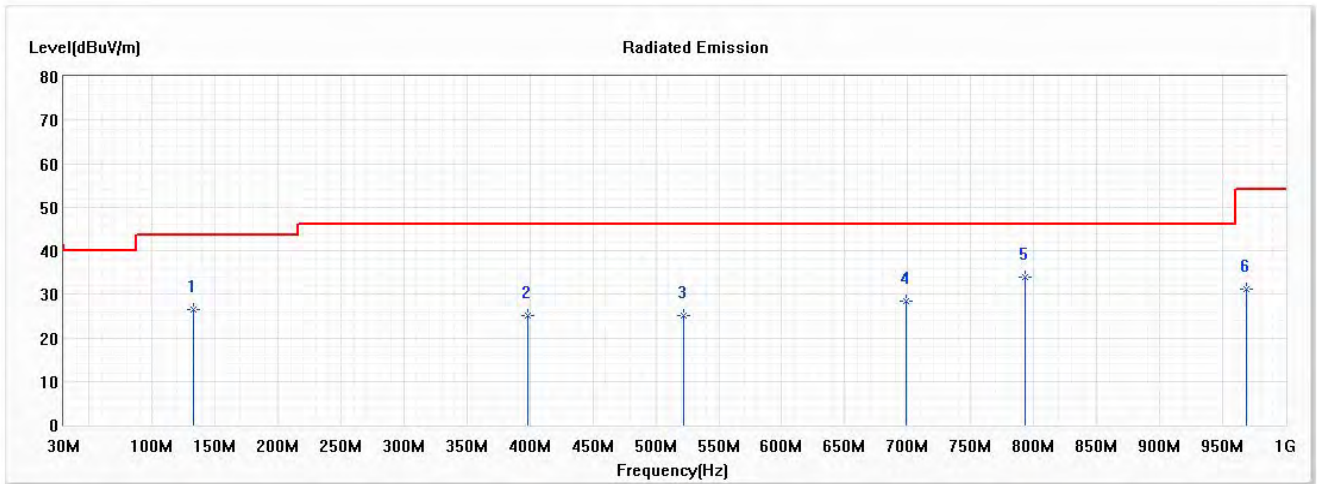


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	132.623	26.56	43.50	-16.94	38.22	-11.66	QP
2	398.319	25.21	46.00	-20.79	32.53	-7.32	QP
3	522.029	25.02	46.00	-20.98	29.84	-4.82	QP
4	699.159	28.32	46.00	-17.68	30.39	-2.07	QP
* 5	793.348	33.87	46.00	-12.13	34.29	-0.42	QP
6	969.072	31.06	54.00	-22.94	29.33	1.73	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps) (5590MHz)

Vertical

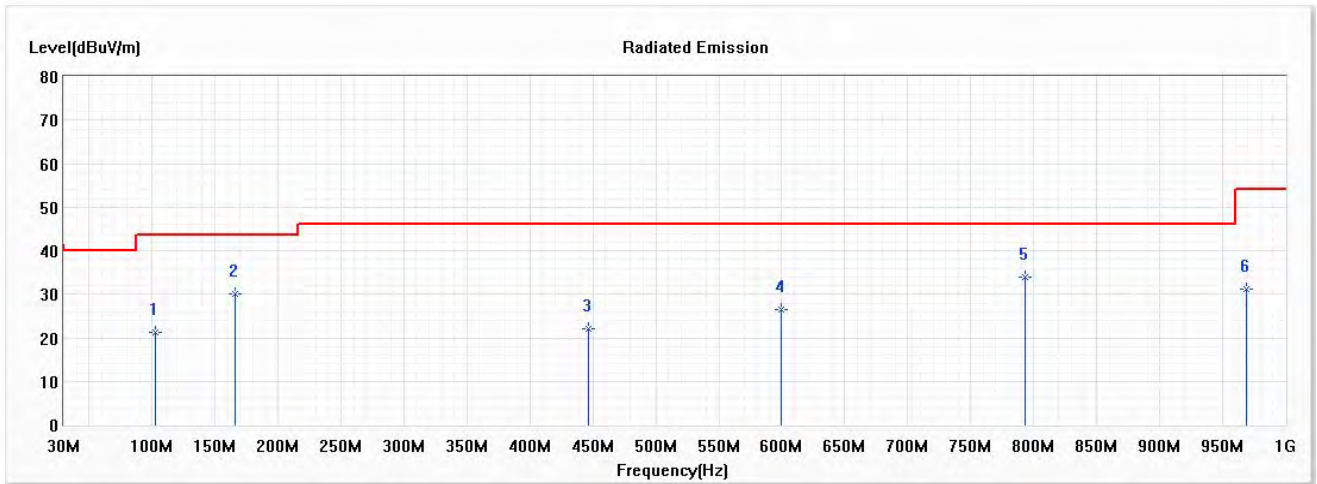


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	103.101	21.37	43.50	-22.13	36.24	-14.87	QP
2	166.362	29.94	43.50	-13.56	40.27	-10.33	QP
3	446.116	22.08	46.00	-23.92	28.34	-6.26	QP
4	599.348	26.41	46.00	-19.59	29.60	-3.19	QP
* 5	793.348	33.87	46.00	-12.13	34.29	-0.42	QP
6	969.072	31.06	54.00	-22.94	29.33	1.73	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps) (5710MHz)

Horizontal

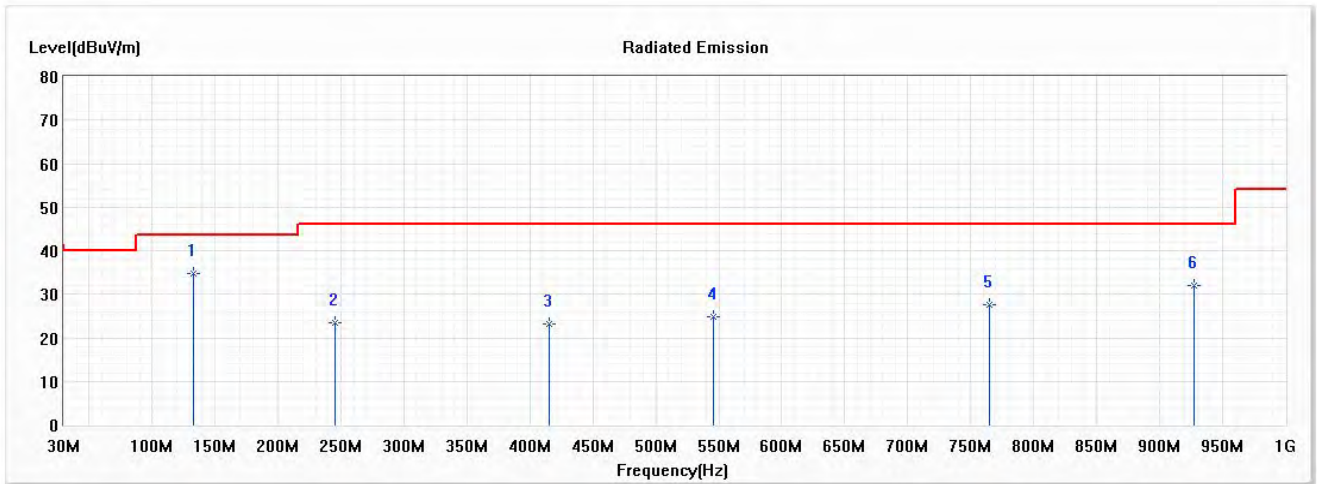


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	132.623	34.82	43.50	-8.68	46.48	-11.66	QP
2	245.087	23.33	46.00	-22.67	34.83	-11.50	QP
3	415.188	23.27	46.00	-22.73	30.15	-6.88	QP
4	545.928	24.76	46.00	-21.24	29.14	-4.38	QP
5	765.232	27.62	46.00	-18.38	28.37	-0.75	QP
6	926.899	31.89	46.00	-14.11	30.67	1.22	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps) (5710MHz)

Vertical

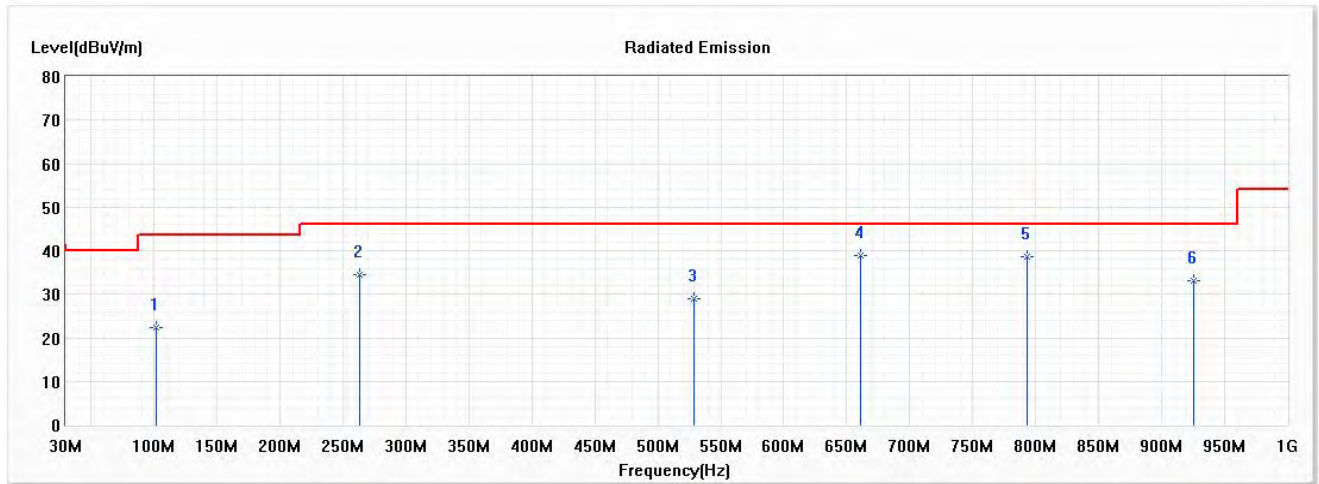


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	22.22	43.50	-21.28	37.38	-15.16	QP
2	263.362	34.47	46.00	-11.53	45.49	-11.02	QP
3	529.058	28.99	46.00	-17.01	33.74	-4.75	QP
* 4	661.203	38.82	46.00	-7.18	41.35	-2.53	QP
5	793.348	38.61	46.00	-7.39	39.03	-0.42	QP
6	925.493	33.07	46.00	-12.93	31.88	1.19	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps) (5795MHz)

Horizontal

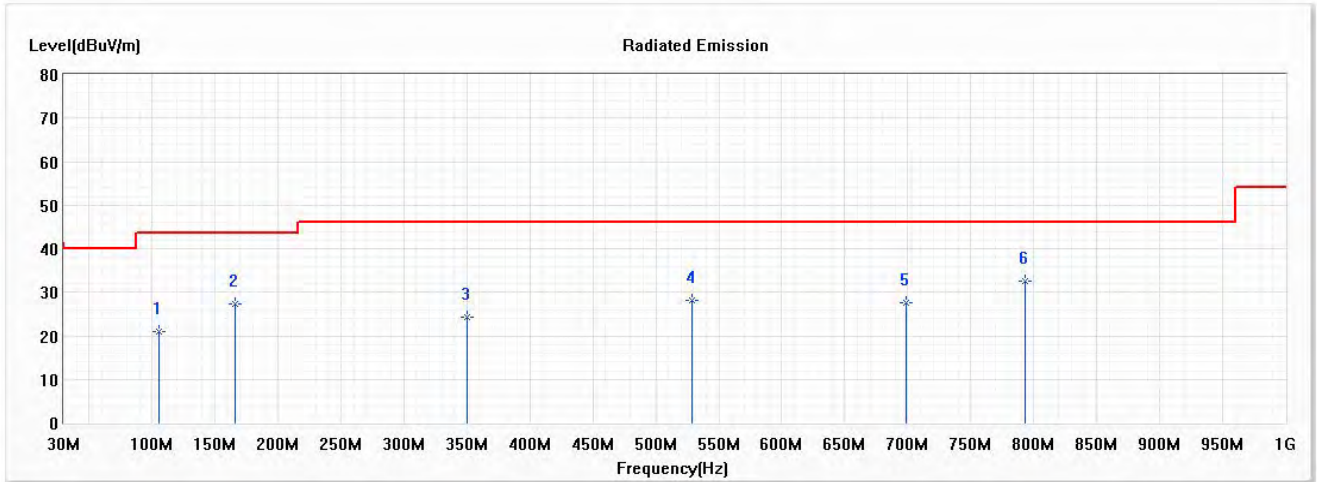


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	105.913	20.95	43.50	-22.55	35.34	-14.39	QP
2	166.362	27.34	43.50	-16.16	37.67	-10.33	QP
3	350.522	24.34	46.00	-21.66	32.85	-8.51	QP
4	529.058	28.08	46.00	-17.92	32.83	-4.75	QP
5	699.159	27.71	46.00	-18.29	29.78	-2.07	QP
* 6	793.348	32.61	46.00	-13.39	33.03	-0.42	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps) (5795MHz)

Vertical

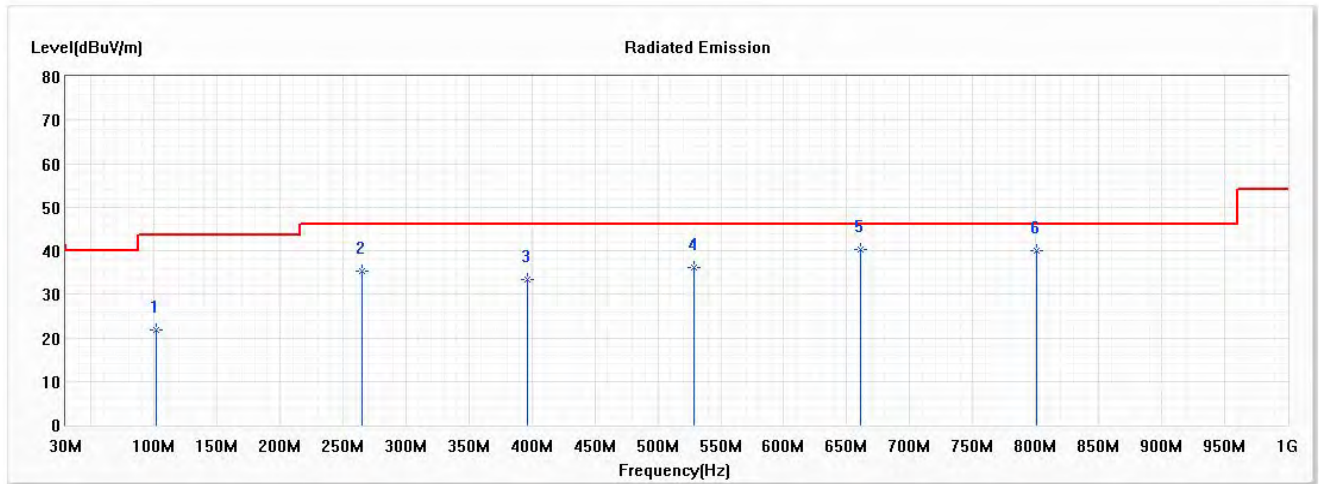


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	21.86	43.50	-21.64	37.02	-15.16	QP
2	264.768	35.36	46.00	-10.64	46.31	-10.95	QP
3	396.913	33.29	46.00	-12.71	40.64	-7.35	QP
4	529.058	36.09	46.00	-9.91	40.84	-4.75	QP
* 5	661.203	40.33	46.00	-5.67	42.86	-2.53	QP
6	800.377	40.02	46.00	-5.98	40.39	-0.37	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps) (5210MHz)

Horizontal

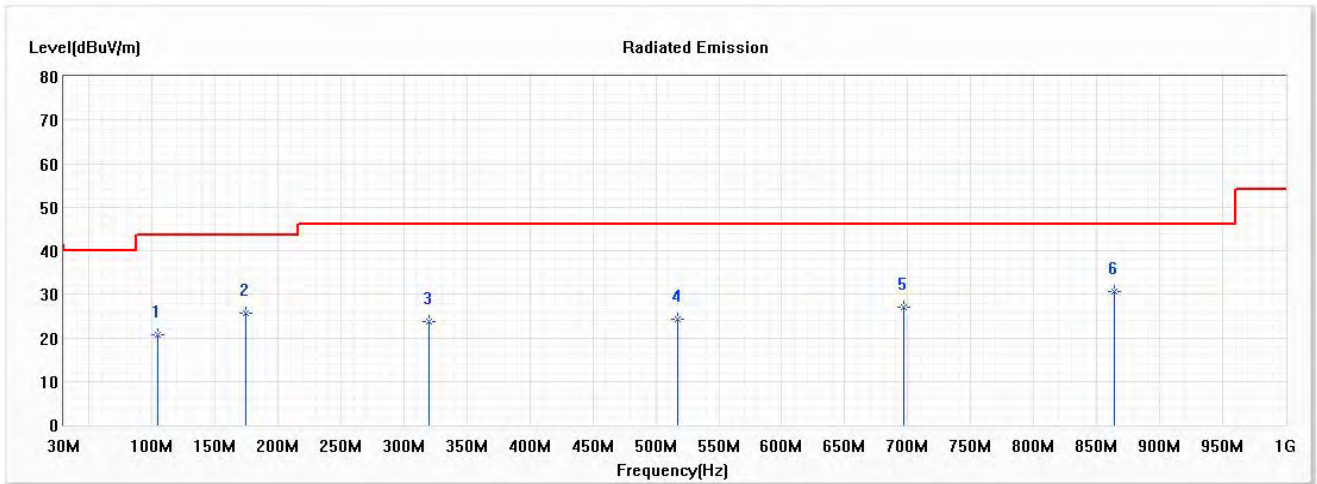


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	104.507	20.57	43.50	-22.93	35.15	-14.58	QP
2	174.797	25.68	43.50	-17.82	36.53	-10.85	QP
3	319.594	23.74	46.00	-22.26	32.94	-9.20	QP
4	517.812	24.25	46.00	-21.75	29.16	-4.91	QP
5	696.348	27.02	46.00	-18.98	29.10	-2.08	QP
* 6	863.638	30.65	46.00	-15.35	30.48	0.17	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps) (5210MHz)

Vertical

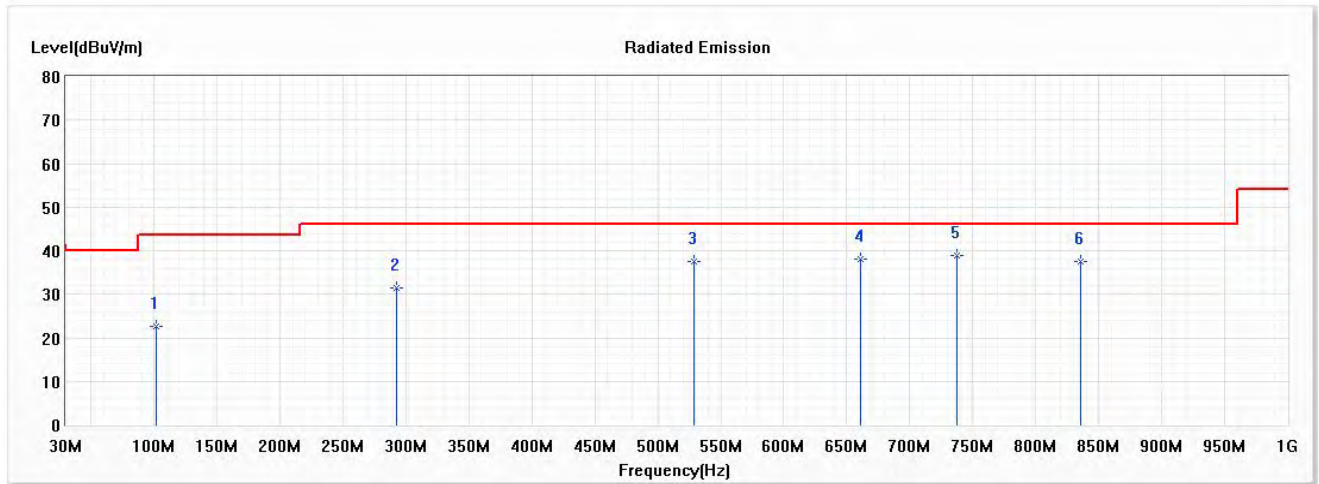


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	22.61	43.50	-20.89	37.77	-15.16	QP
2	292.884	31.40	46.00	-14.60	41.30	-9.90	QP
3	529.058	37.62	46.00	-8.38	42.37	-4.75	QP
4	661.203	38.02	46.00	-7.98	40.55	-2.53	QP
* 5	737.116	38.83	46.00	-7.17	40.04	-1.21	QP
6	835.522	37.62	46.00	-8.38	37.70	-0.08	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps) (5290MHz)

Horizontal

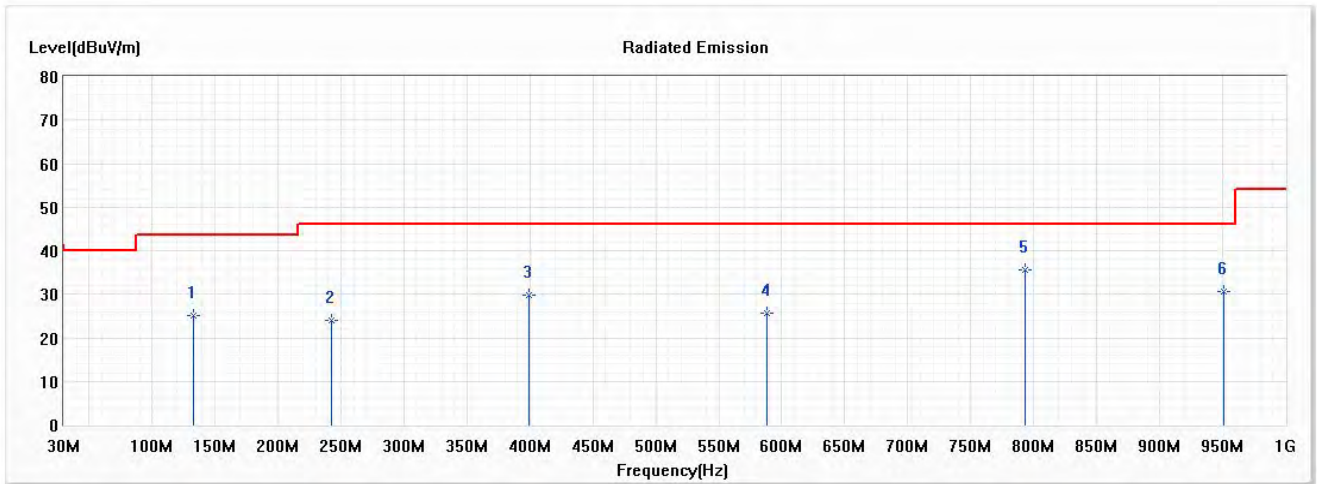


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	132.623	25.03	43.50	-18.47	36.69	-11.66	QP
2	242.275	24.00	46.00	-22.00	35.51	-11.51	QP
3	399.725	29.90	46.00	-16.10	37.20	-7.30	QP
4	588.101	25.62	46.00	-20.38	29.12	-3.50	QP
* 5	793.348	35.69	46.00	-10.31	36.11	-0.42	QP
6	950.797	30.51	46.00	-15.49	28.90	1.61	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps) (5290MHz)

Vertical

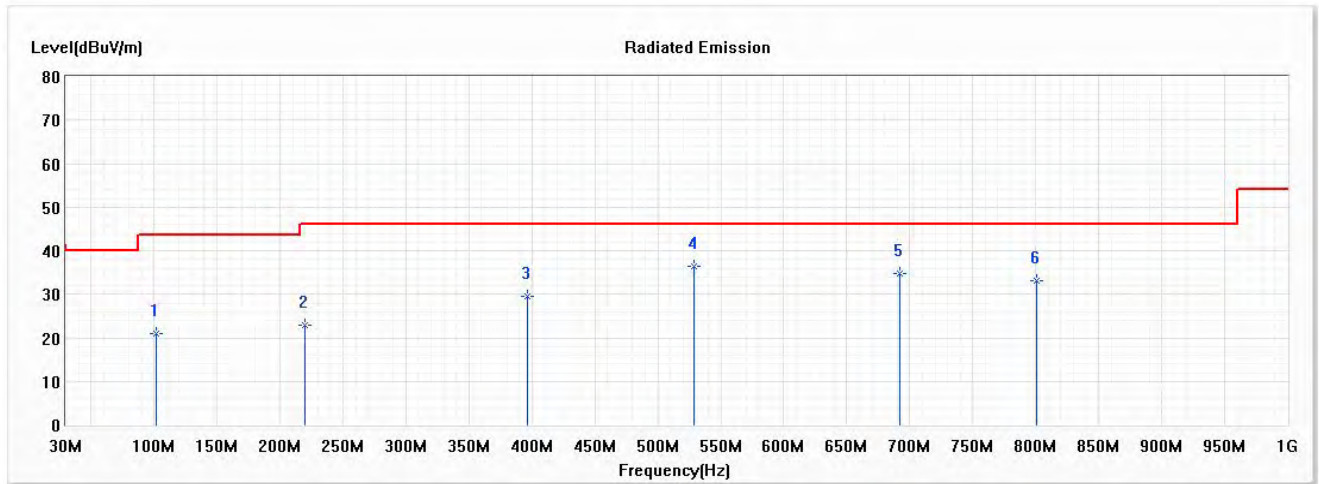


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	20.84	43.50	-22.66	36.00	-15.16	QP
2	219.783	22.85	46.00	-23.15	35.64	-12.79	QP
3	396.913	29.61	46.00	-16.39	36.96	-7.35	QP
* 4	529.058	36.43	46.00	-9.57	41.18	-4.75	QP
5	692.130	34.89	46.00	-11.11	37.03	-2.14	QP
6	800.377	33.21	46.00	-12.79	33.58	-0.37	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps) (5530MHz)

Horizontal

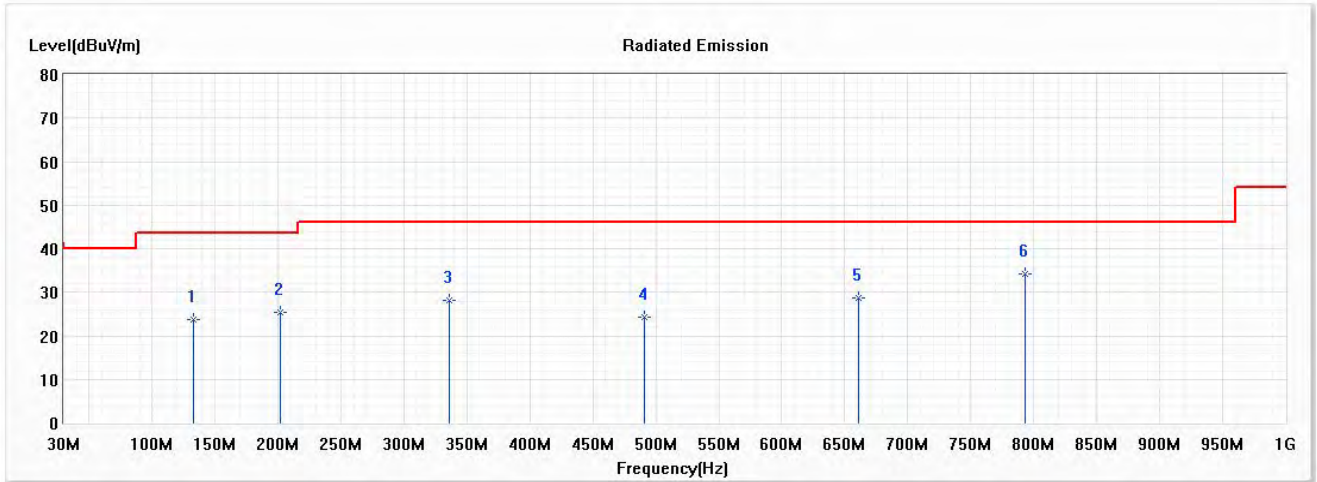


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	132.623	23.70	43.50	-19.80	35.36	-11.66	QP
2	201.507	25.43	43.50	-18.07	38.78	-13.35	QP
3	336.464	28.07	46.00	-17.93	36.82	-8.75	QP
4	491.101	24.40	46.00	-21.60	30.00	-5.60	QP
5	661.203	28.74	46.00	-17.26	31.27	-2.53	QP
* 6	793.348	34.10	46.00	-11.90	34.52	-0.42	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps) (5530MHz)

Vertical

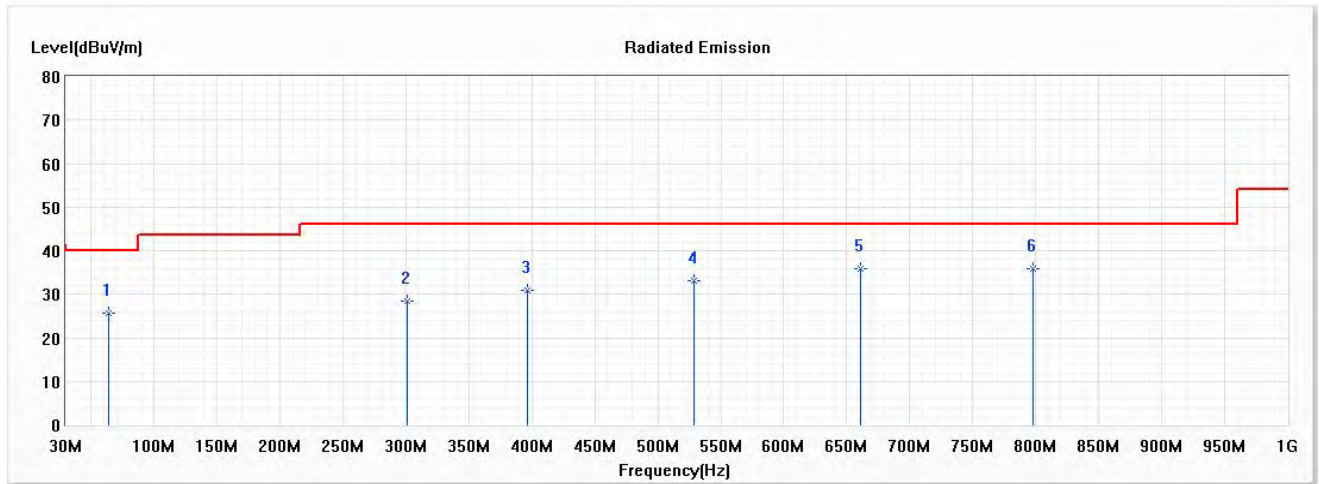


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	63.739	25.57	40.00	-14.43	37.41	-11.84	QP
2	301.319	28.39	46.00	-17.61	38.10	-9.71	QP
3	396.913	30.77	46.00	-15.23	38.12	-7.35	QP
4	529.058	33.18	46.00	-12.82	37.93	-4.75	QP
5	661.203	35.86	46.00	-10.14	38.39	-2.53	QP
* 6	797.565	35.88	46.00	-10.12	36.26	-0.38	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps) (5775MHz)

Horizontal

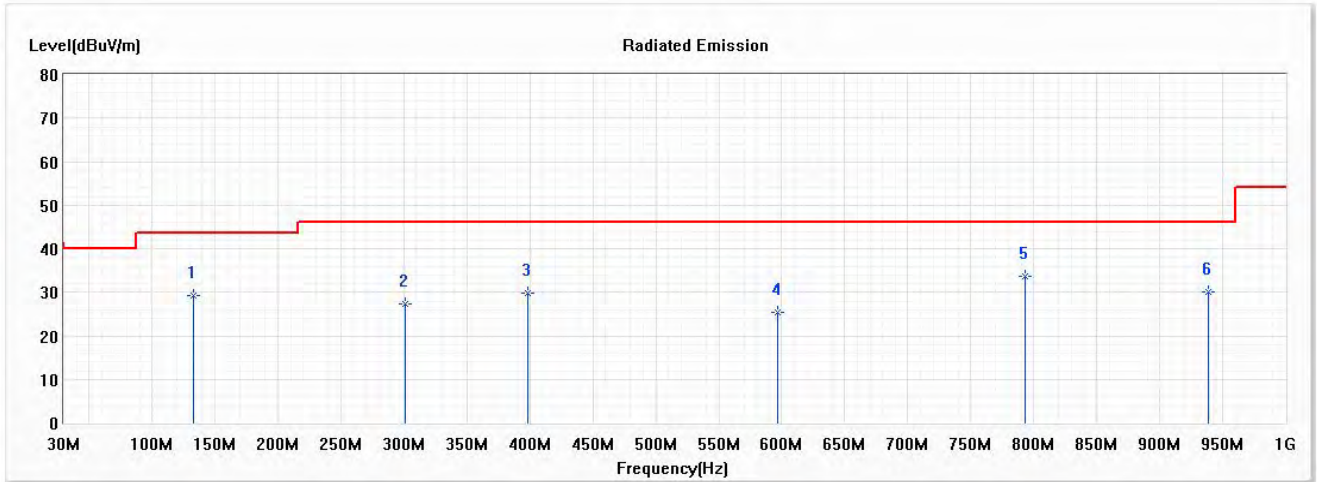


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	132.623	29.30	43.50	-14.20	40.96	-11.66	QP
2	301.319	27.26	46.00	-18.74	36.97	-9.71	QP
3	398.319	29.93	46.00	-16.07	37.25	-7.32	QP
4	596.536	25.35	46.00	-20.65	28.55	-3.20	QP
* 5	793.348	33.59	46.00	-12.41	34.01	-0.42	QP
6	938.145	30.01	46.00	-15.99	28.62	1.39	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps) (5775MHz)

Vertical

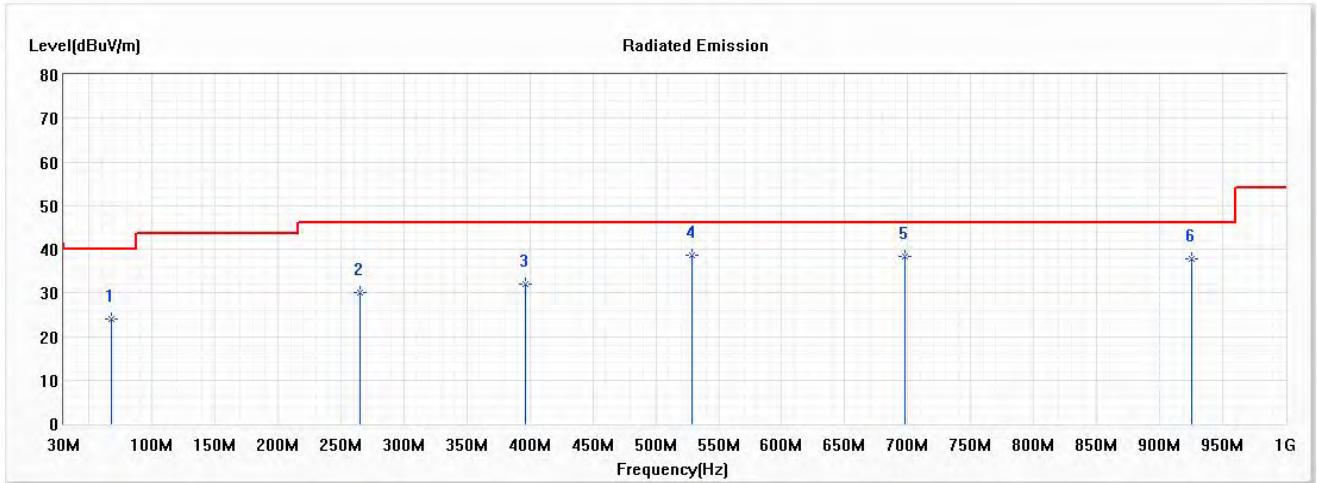


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	67.957	23.98	40.00	-16.02	36.62	-12.64	QP
2	264.768	29.98	46.00	-16.02	40.93	-10.95	QP
3	396.913	31.94	46.00	-14.06	39.29	-7.35	QP
* 4	529.058	38.51	46.00	-7.49	43.26	-4.75	QP
5	697.754	38.41	46.00	-7.59	40.49	-2.08	QP
6	925.493	37.67	46.00	-8.33	36.48	1.19	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 14 SISO B: Transmit (802.11ac-160BW_65Mbps) (5250MHz)

Horizontal

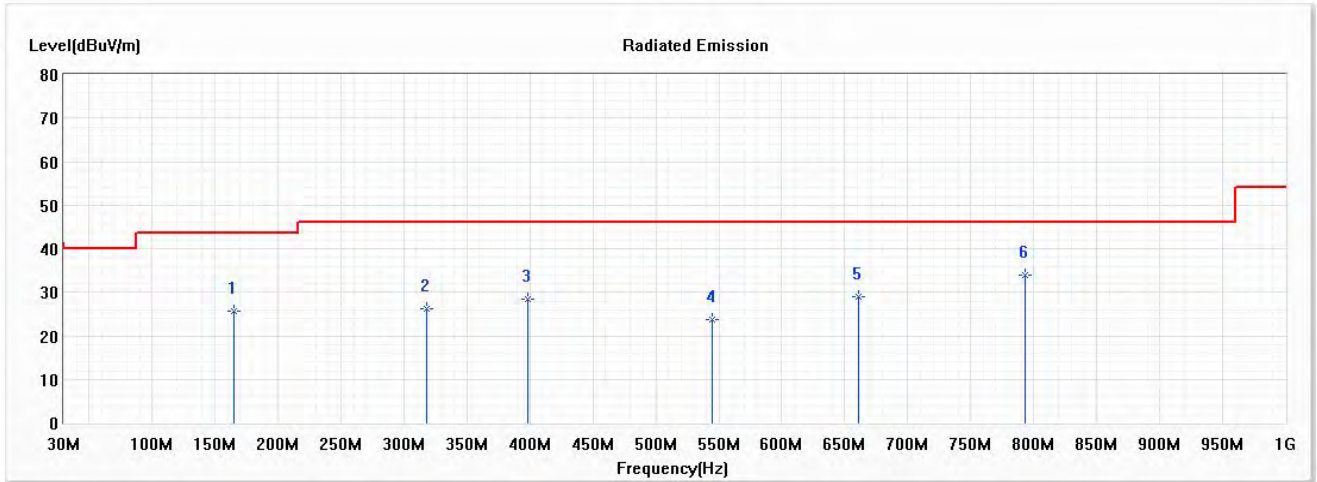


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	164.957	25.79	43.50	-17.71	36.13	-10.34	QP
2	318.188	26.26	46.00	-19.74	35.51	-9.25	QP
3	398.319	28.48	46.00	-17.52	35.80	-7.32	QP
4	544.522	23.73	46.00	-22.27	28.15	-4.42	QP
5	661.203	29.06	46.00	-16.94	31.59	-2.53	QP
* 6	793.348	34.00	46.00	-12.00	34.42	-0.42	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 14 SISO B: Transmit (802.11ac-160BW_65Mbps) (5250MHz)

Vertical

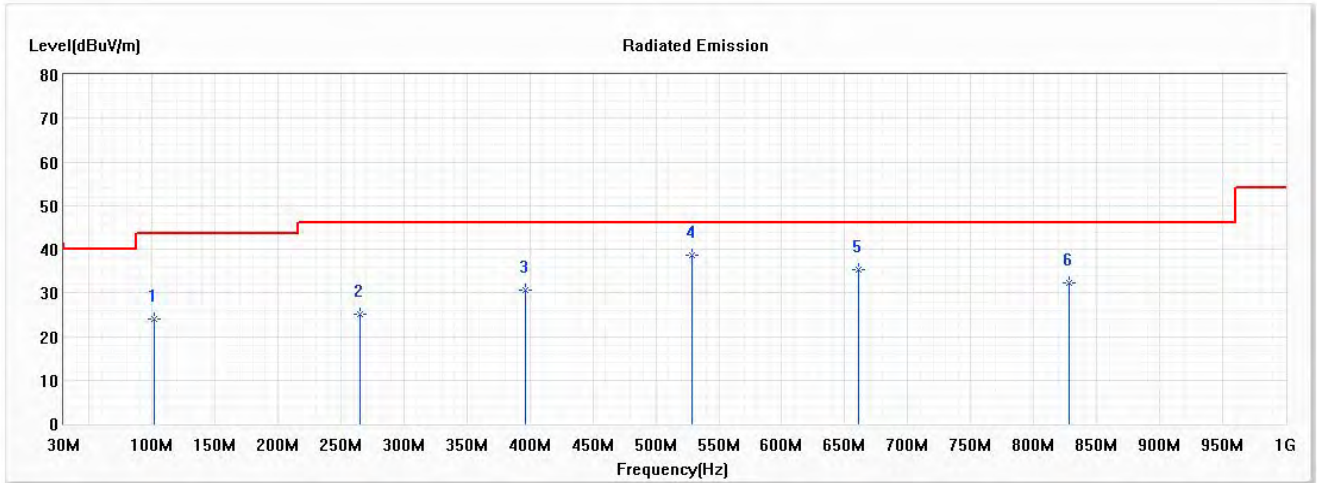


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	23.99	43.50	-19.51	39.15	-15.16	QP
2	264.768	25.23	46.00	-20.77	36.18	-10.95	QP
3	396.913	30.72	46.00	-15.28	38.07	-7.35	QP
* 4	529.058	38.75	46.00	-7.25	43.50	-4.75	QP
5	661.203	35.32	46.00	-10.68	37.85	-2.53	QP
6	828.493	32.18	46.00	-13.82	32.39	-0.21	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 14 SISO B: Transmit (802.11ac-160BW_65Mbps) (5570MHz)

Horizontal

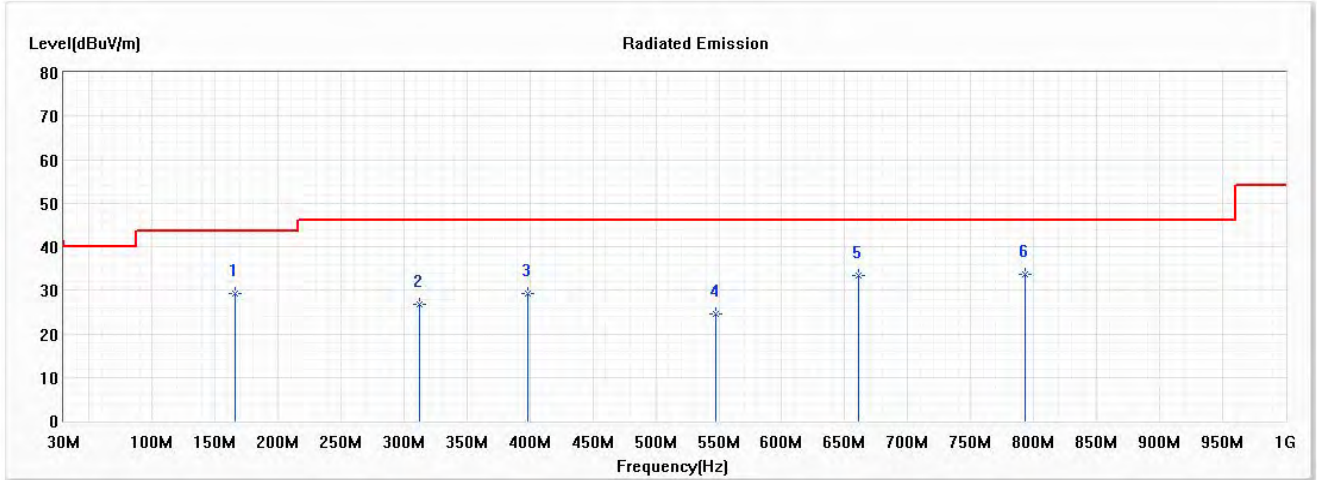


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	166.362	29.28	43.50	-14.22	39.61	-10.33	QP
2	312.565	26.72	46.00	-19.28	36.17	-9.45	QP
3	398.319	29.23	46.00	-16.77	36.55	-7.32	QP
4	547.333	24.67	46.00	-21.33	29.02	-4.35	QP
5	661.203	33.38	46.00	-12.62	35.91	-2.53	QP
* 6	793.348	33.62	46.00	-12.38	34.04	-0.42	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 14 SISO B: Transmit (802.11ac-160BW_65Mbps) (5570MHz)

Vertical

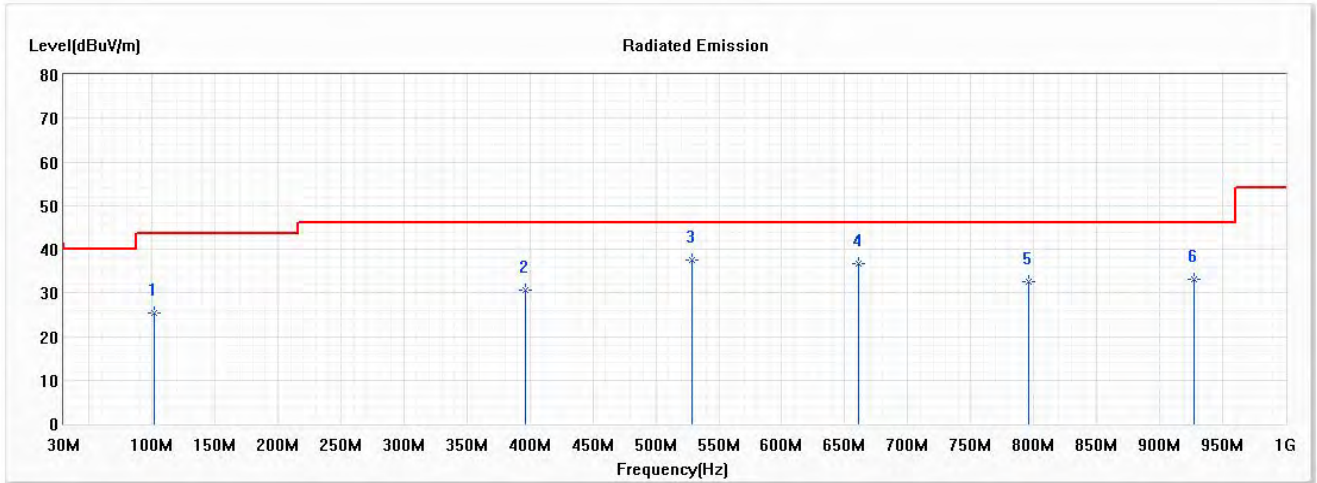


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	25.32	43.50	-18.18	40.48	-15.16	QP
2	396.913	30.73	46.00	-15.27	38.08	-7.35	QP
* 3	529.058	37.61	46.00	-8.39	42.36	-4.75	QP
4	661.203	36.80	46.00	-9.20	39.33	-2.53	QP
5	796.159	32.54	46.00	-13.46	32.92	-0.38	QP
6	926.899	33.19	46.00	-12.81	31.97	1.22	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/20
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5200MHz)

Horizontal

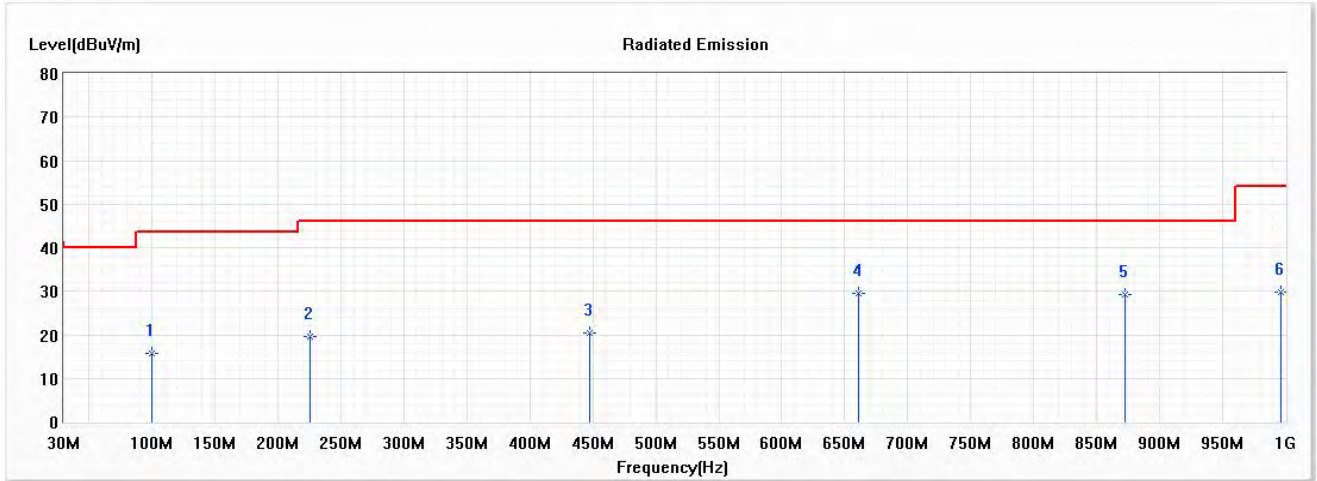


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	100.290	15.83	43.50	-27.67	31.35	-15.52	QP
2	225.406	19.69	46.00	-26.31	32.02	-12.33	QP
3	447.522	20.51	46.00	-25.49	26.77	-6.26	QP
* 4	661.203	29.54	46.00	-16.46	32.07	-2.53	QP
5	872.072	29.27	46.00	-16.73	28.94	0.33	QP
6	995.783	29.93	54.00	-24.07	28.24	1.69	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/20
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5200MHz)

Vertical

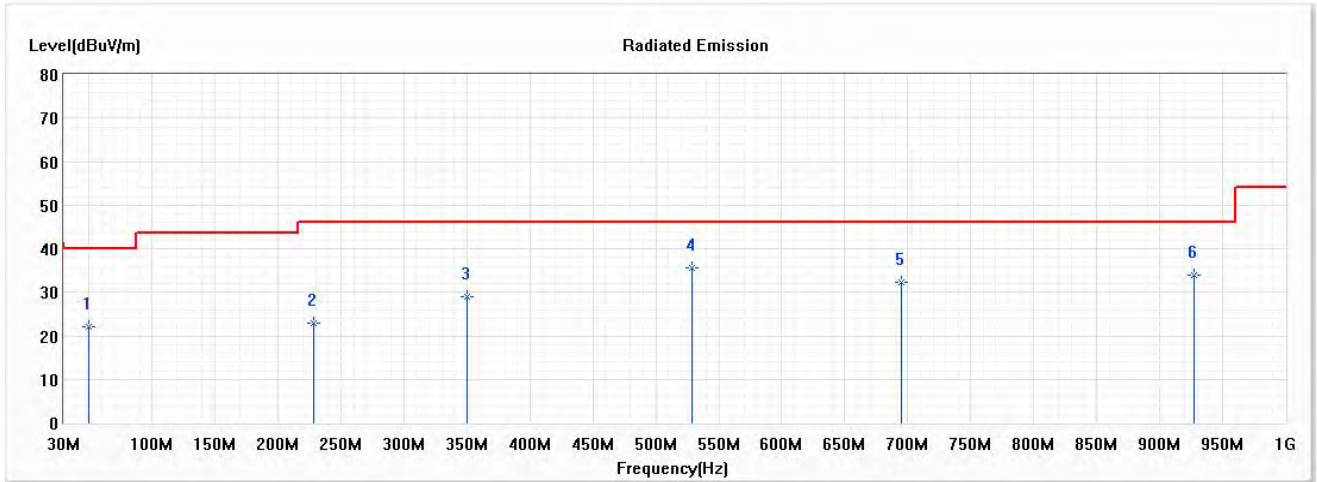


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	49.681	22.12	40.00	-17.88	32.38	-10.26	QP
2	228.217	22.77	46.00	-23.23	34.81	-12.04	QP
3	350.522	29.05	46.00	-16.95	37.56	-8.51	QP
* 4	529.058	35.57	46.00	-10.43	40.32	-4.75	QP
5	694.942	32.14	46.00	-13.86	34.22	-2.08	QP
6	926.899	33.97	46.00	-12.03	32.75	1.22	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/20
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5300MHz)

Horizontal

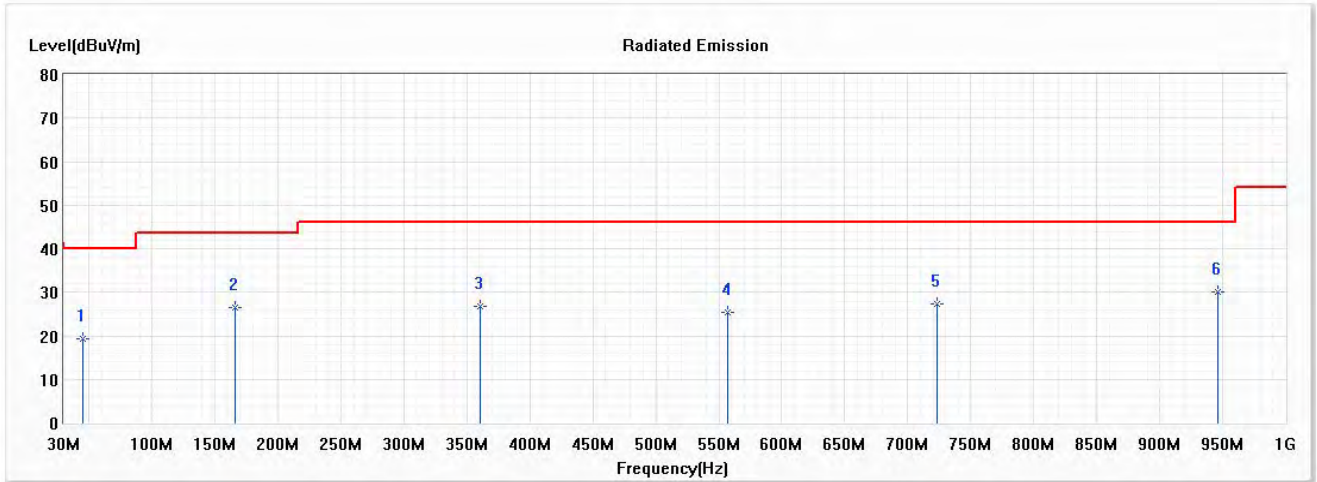


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	45.464	19.22	40.00	-20.78	29.48	-10.26	QP
2	166.362	26.42	43.50	-17.08	36.75	-10.33	QP
3	360.362	26.72	46.00	-19.28	35.00	-8.28	QP
4	557.174	25.32	46.00	-20.68	29.53	-4.21	QP
5	723.058	27.28	46.00	-18.72	28.85	-1.57	QP
* 6	946.580	30.00	46.00	-16.00	28.46	1.54	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/20
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5300MHz)

Vertical

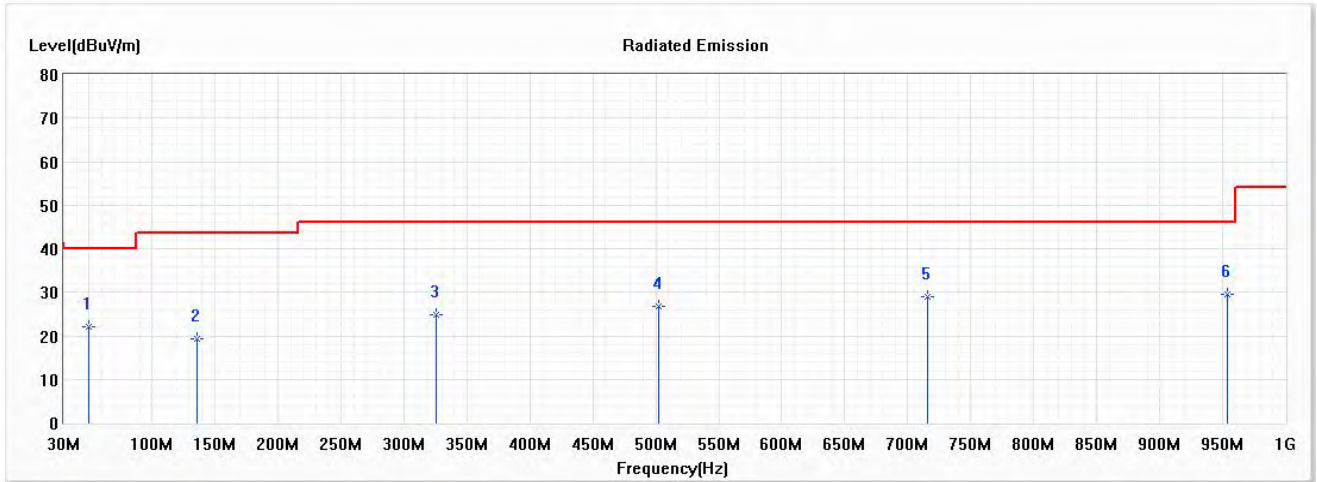


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	49.681	22.12	40.00	-17.88	32.38	-10.26	QP
2	135.435	19.31	43.50	-24.19	30.57	-11.26	QP
3	325.217	24.95	46.00	-21.05	34.01	-9.06	QP
4	502.348	26.78	46.00	-19.22	32.15	-5.37	QP
5	716.029	28.89	46.00	-17.11	30.53	-1.64	QP
* 6	953.609	29.52	46.00	-16.48	27.91	1.61	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/20
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5600MHz)

Horizontal

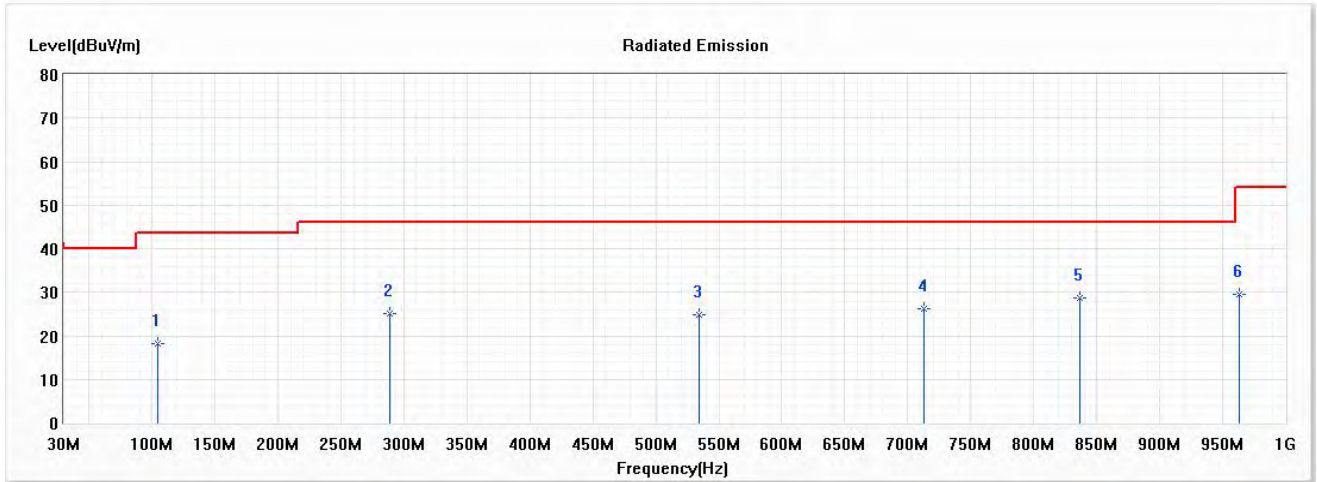


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	104.507	18.24	43.50	-25.26	32.82	-14.58	QP
2	288.667	25.17	46.00	-20.83	35.17	-10.00	QP
3	534.681	24.76	46.00	-21.24	29.32	-4.56	QP
4	713.217	26.28	46.00	-19.72	27.96	-1.68	QP
* 5	836.928	28.62	46.00	-17.38	28.66	-0.04	QP
6	963.449	29.41	54.00	-24.59	27.72	1.69	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/20
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5600MHz)

Vertical

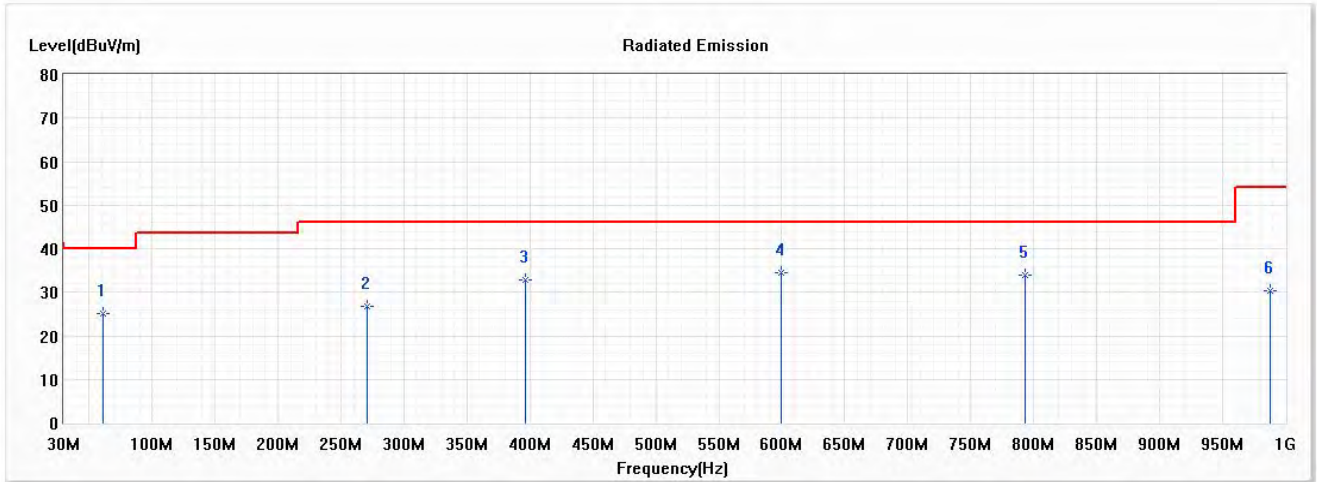


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	60.928	25.09	40.00	-14.91	36.37	-11.28	QP
2	270.391	26.70	46.00	-19.30	37.40	-10.70	QP
3	396.913	32.73	46.00	-13.27	40.08	-7.35	QP
* 4	599.348	34.49	46.00	-11.51	37.68	-3.19	QP
5	793.348	34.06	46.00	-11.94	34.48	-0.42	QP
6	987.348	30.39	54.00	-23.61	28.69	1.70	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/20
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5720MHz)

Horizontal

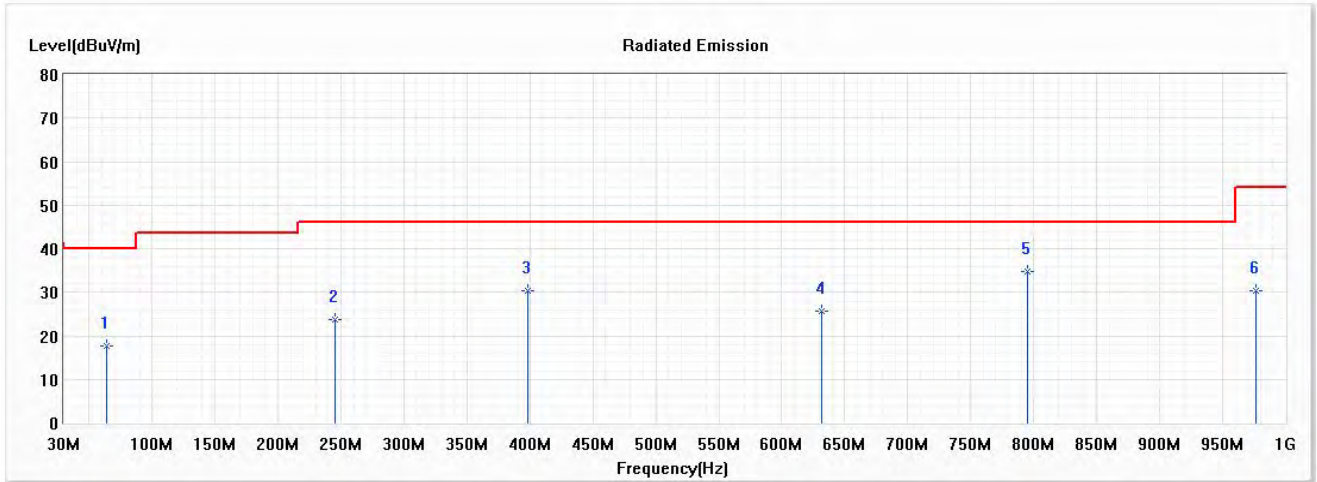


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	63.739	17.72	40.00	-22.28	29.56	-11.84	QP
2	245.087	23.79	46.00	-22.21	35.29	-11.50	QP
3	398.319	30.23	46.00	-15.77	37.55	-7.32	QP
4	631.681	25.73	46.00	-20.27	28.65	-2.92	QP
* 5	794.754	34.81	46.00	-11.19	35.20	-0.39	QP
6	976.101	30.35	54.00	-23.65	28.71	1.64	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/20
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5720MHz)

Vertical

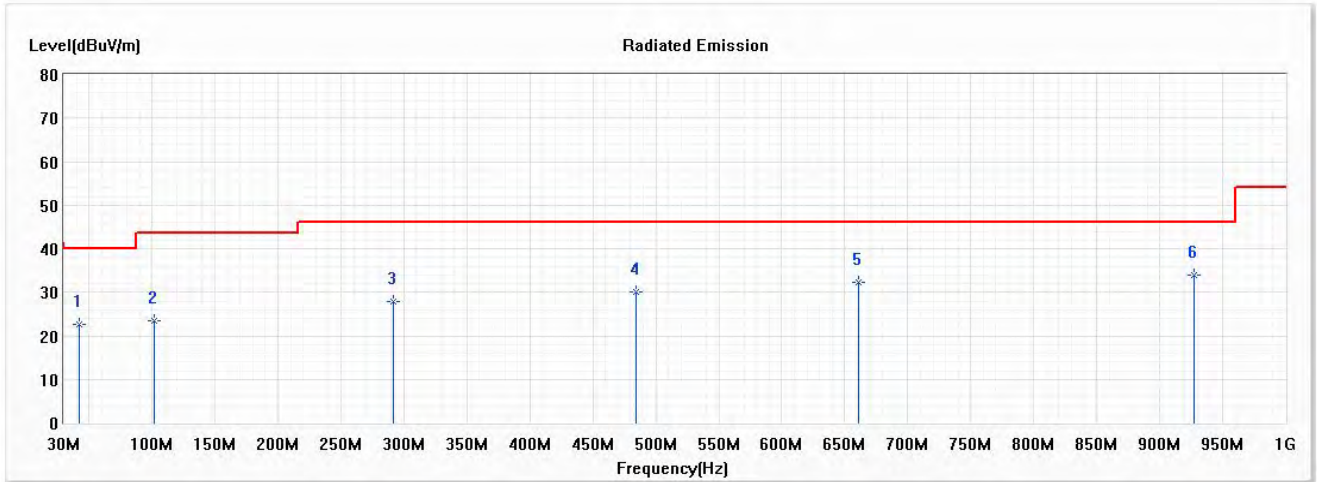


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	42.652	22.60	40.00	-17.40	33.06	-10.46	QP
2	101.696	23.56	43.50	-19.94	38.72	-15.16	QP
3	291.478	27.96	46.00	-18.04	37.89	-9.93	QP
4	484.072	30.08	46.00	-15.92	35.73	-5.65	QP
5	661.203	32.14	46.00	-13.86	34.67	-2.53	QP
* 6	926.899	33.97	46.00	-12.03	32.75	1.22	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/21
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5785MHz)

Horizontal

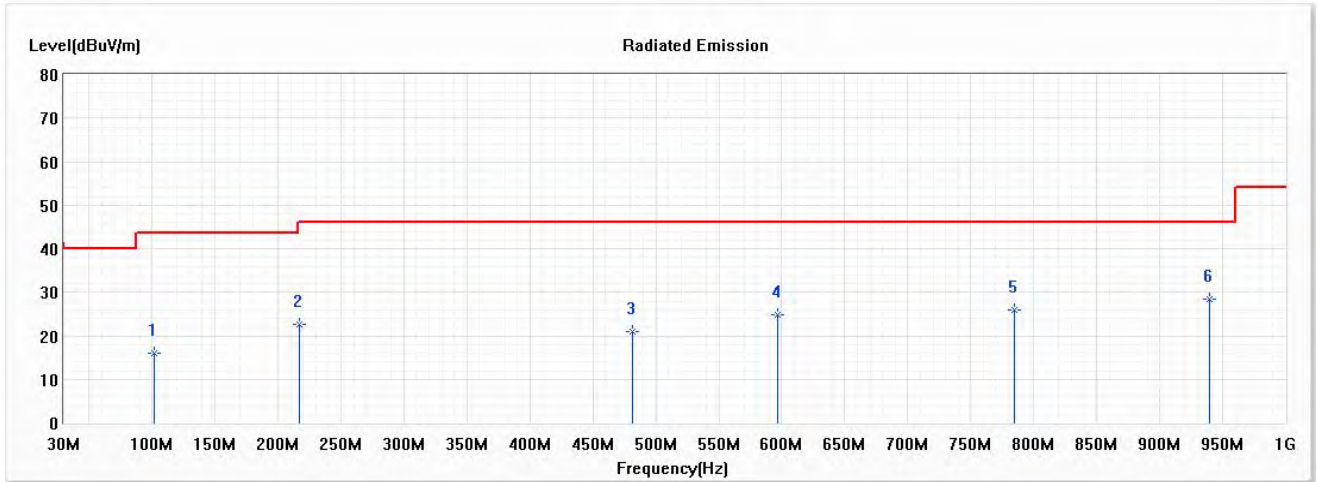


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	15.99	43.50	-27.51	31.15	-15.16	QP
2	216.971	22.59	46.00	-23.41	35.51	-12.92	QP
3	481.261	21.08	46.00	-24.92	26.78	-5.70	QP
4	596.536	24.83	46.00	-21.17	28.03	-3.20	QP
5	784.913	25.94	46.00	-20.06	26.36	-0.42	QP
* 6	939.551	28.33	46.00	-17.67	26.94	1.39	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/21
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5785MHz)

Vertical

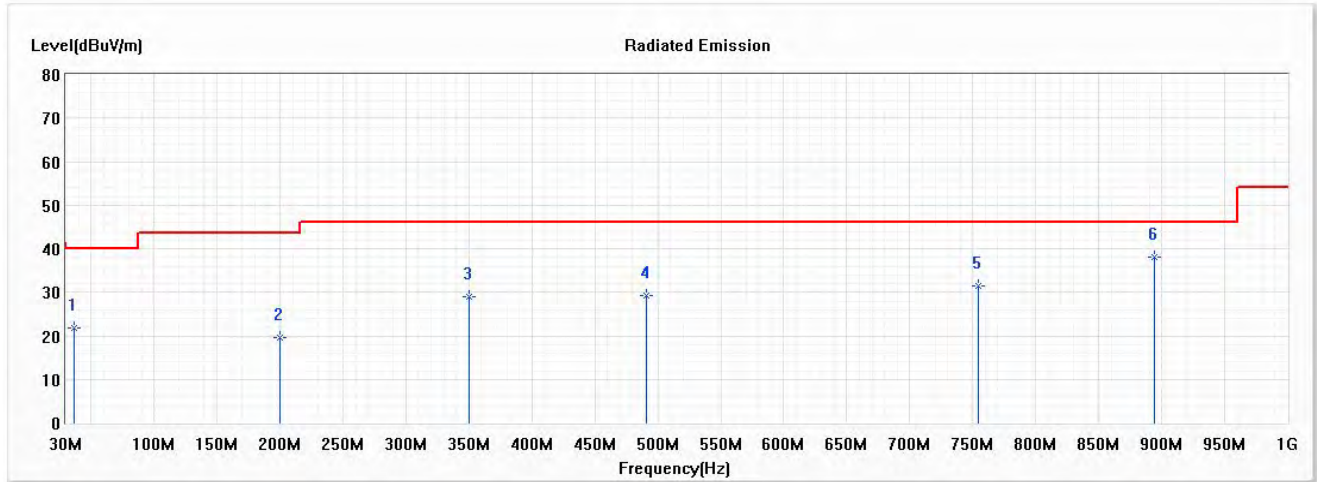


No	Frequency (MHz)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Reading Level (dB μ V)	Correct Factor (dB)	Detector Type
1	37.029	21.87	40.00	-18.13	33.02	-11.15	QP
2	200.101	19.70	43.50	-23.80	33.06	-13.36	QP
3	350.522	29.05	46.00	-16.95	37.56	-8.51	QP
4	491.101	29.17	46.00	-16.83	34.77	-5.60	QP
5	753.986	31.55	46.00	-14.45	32.42	-0.87	QP
* 6	894.565	37.97	46.00	-8.03	37.22	0.75	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/21
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps) (5230MHz)

Horizontal

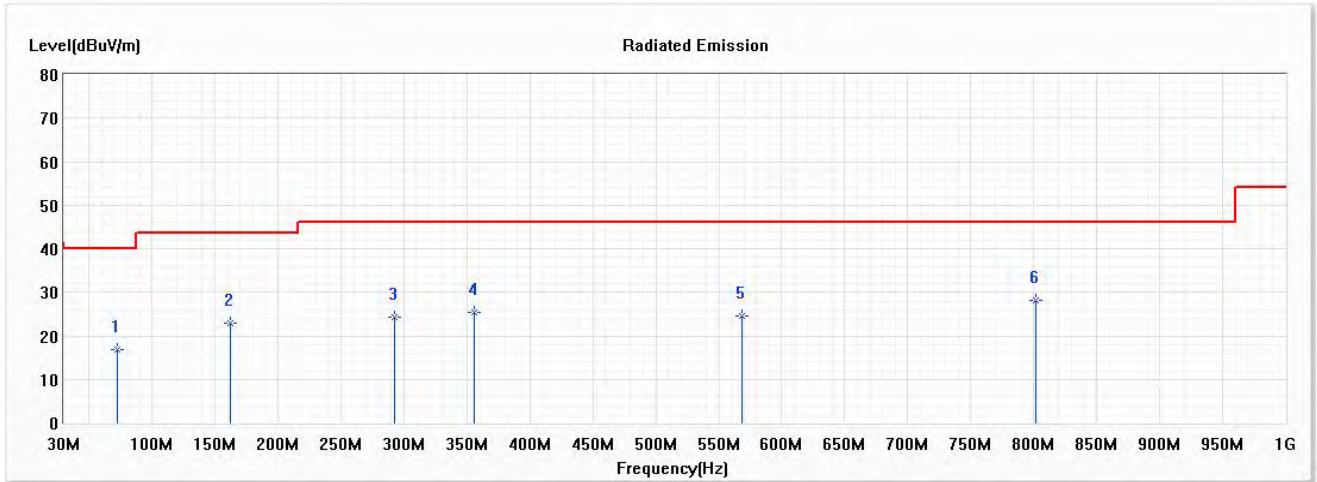


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	72.174	16.95	40.00	-23.05	30.39	-13.44	QP
2	162.145	22.91	43.50	-20.59	33.26	-10.35	QP
3	292.884	24.31	46.00	-21.69	34.21	-9.90	QP
4	356.145	25.43	46.00	-20.57	33.88	-8.45	QP
5	568.420	24.47	46.00	-21.53	28.46	-3.99	QP
* 6	801.783	28.01	46.00	-17.99	28.38	-0.37	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/21
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps) (5230MHz)

Vertical

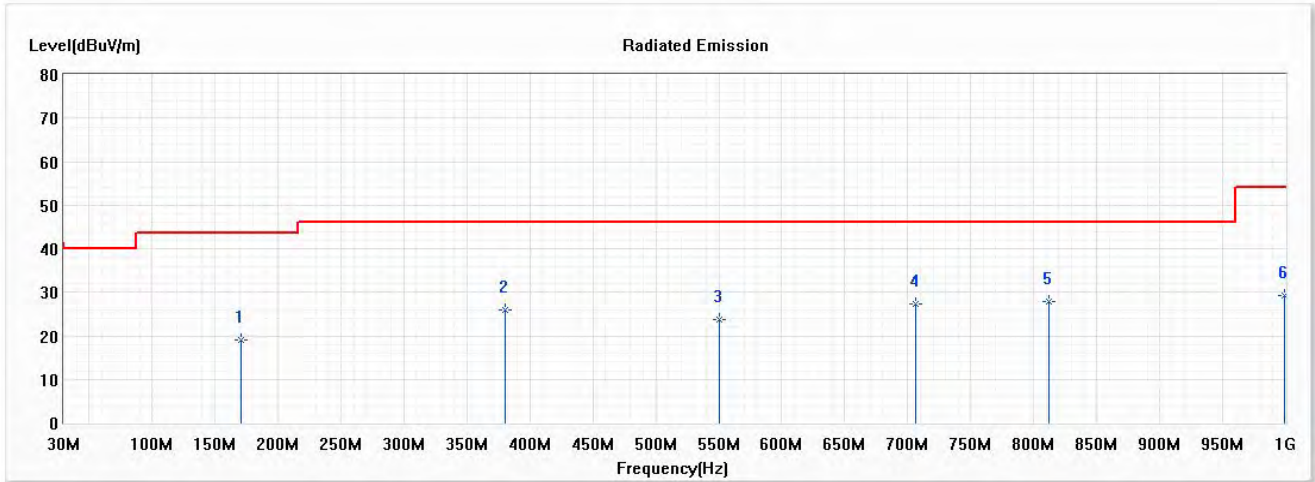


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	170.580	18.92	43.50	-24.58	29.28	-10.36	QP
2	380.043	25.93	46.00	-20.07	33.57	-7.64	QP
3	550.145	23.82	46.00	-22.18	28.12	-4.30	QP
4	706.188	27.20	46.00	-18.80	29.12	-1.92	QP
* 5	811.623	27.96	46.00	-18.04	28.20	-0.24	QP
6	998.594	29.11	54.00	-24.89	27.37	1.74	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/21
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps) (5310MHz)

Horizontal

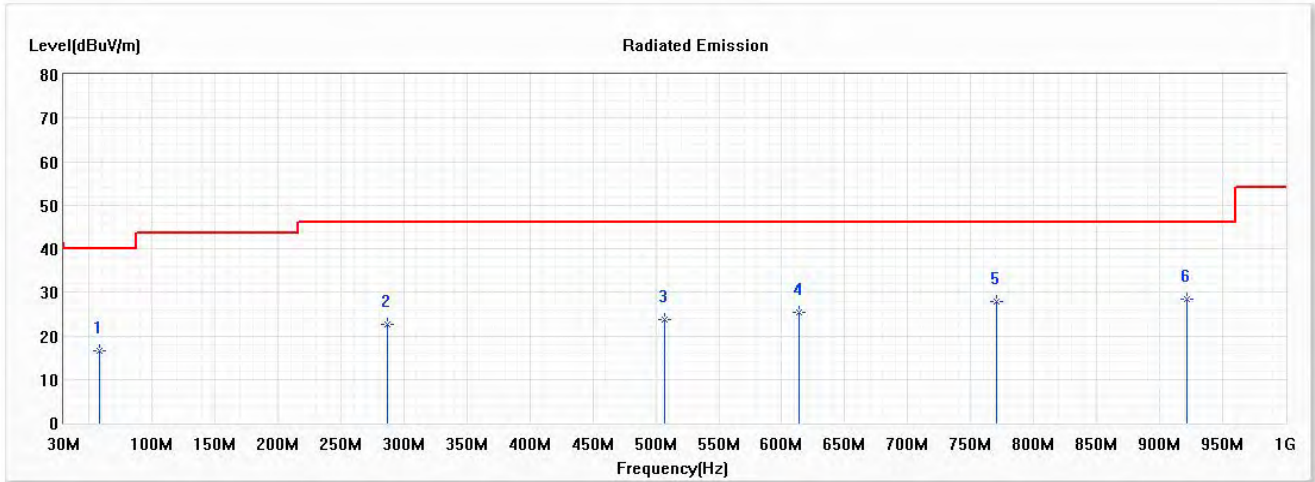


No	Frequency (MHz)	Emission Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Reading Level (dBµV)	Correct Factor (dB)	Detector Type
1	58.116	16.59	40.00	-23.41	27.52	-10.93	QP
2	287.261	22.58	46.00	-23.42	32.60	-10.02	QP
3	506.565	23.79	46.00	-22.21	29.07	-5.28	QP
4	613.406	25.26	46.00	-20.74	28.34	-3.08	QP
5	770.855	27.80	46.00	-18.20	28.43	-0.63	QP
* 6	921.275	28.30	46.00	-17.70	27.12	1.18	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/21
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps) (5310MHz)

Vertical

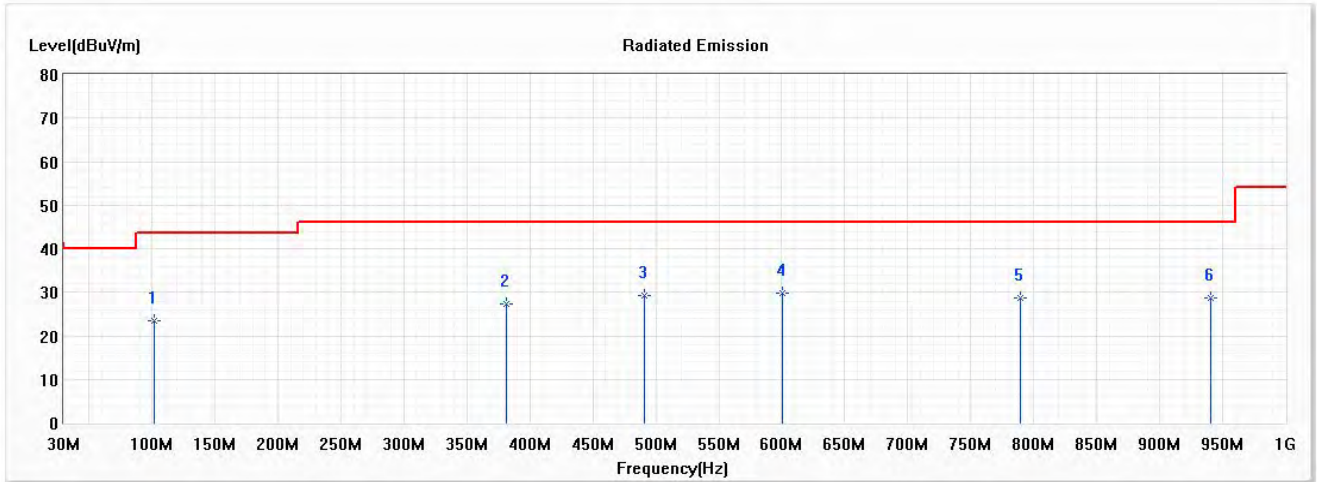


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	23.56	43.50	-19.94	38.72	-15.16	QP
2	381.449	27.21	46.00	-18.79	34.82	-7.61	QP
3	491.101	29.17	46.00	-16.83	34.77	-5.60	QP
* 4	600.754	29.76	46.00	-16.24	32.93	-3.17	QP
5	789.130	28.82	46.00	-17.18	29.31	-0.49	QP
6	940.957	28.77	46.00	-17.23	27.36	1.41	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/21
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps) (5590MHz)

Horizontal

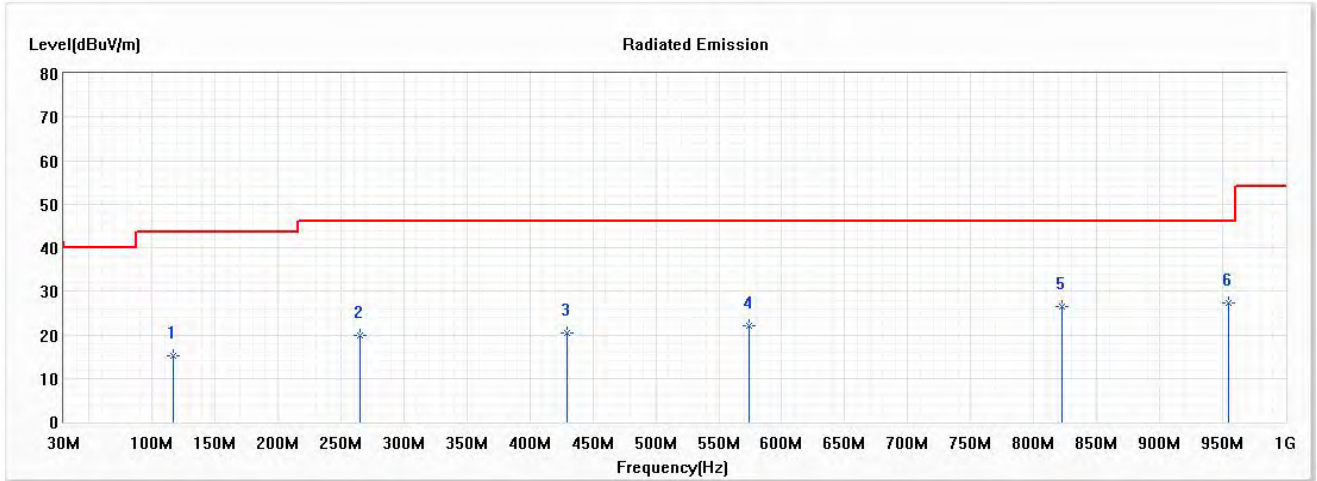


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	117.159	15.08	43.50	-28.42	28.27	-13.19	QP
2	264.768	19.99	46.00	-26.01	30.94	-10.95	QP
3	429.246	20.40	46.00	-25.60	26.99	-6.59	QP
4	574.043	22.13	46.00	-23.87	26.01	-3.88	QP
5	822.870	26.48	46.00	-19.52	26.73	-0.25	QP
* 6	955.014	27.35	46.00	-18.65	25.74	1.61	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/21
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps) (5590MHz)

Vertical

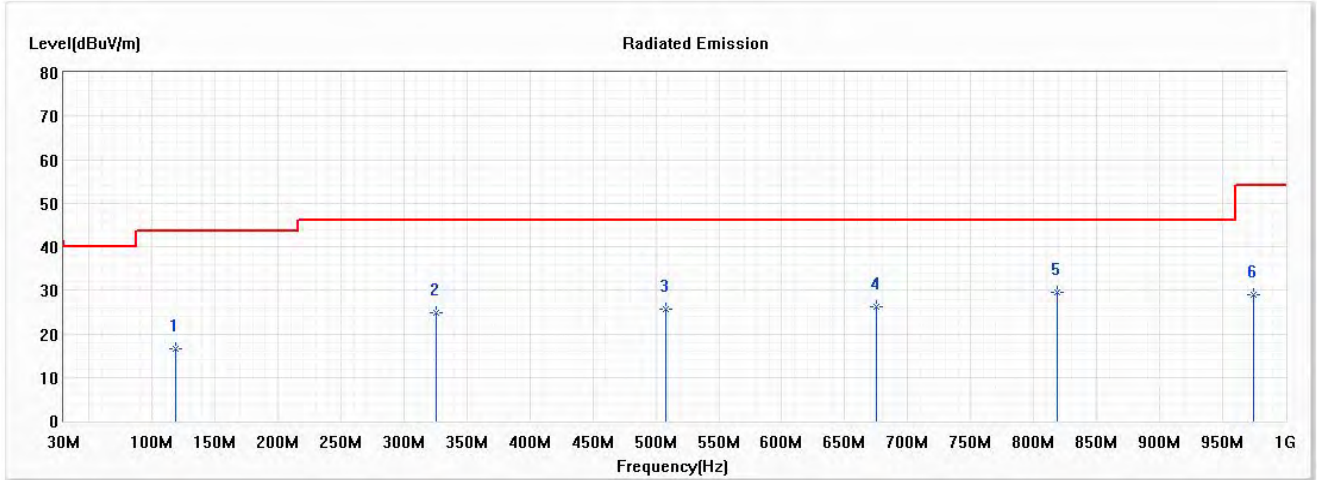


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	118.565	16.46	43.50	-27.04	29.50	-13.04	QP
2	325.217	24.95	46.00	-21.05	34.01	-9.06	QP
3	507.971	25.57	46.00	-20.43	30.81	-5.24	QP
4	675.261	26.13	46.00	-19.87	28.63	-2.50	QP
* 5	818.652	29.50	46.00	-16.50	29.80	-0.30	QP
6	974.696	29.03	54.00	-24.97	27.38	1.65	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/21
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps) (5710MHz)

Horizontal

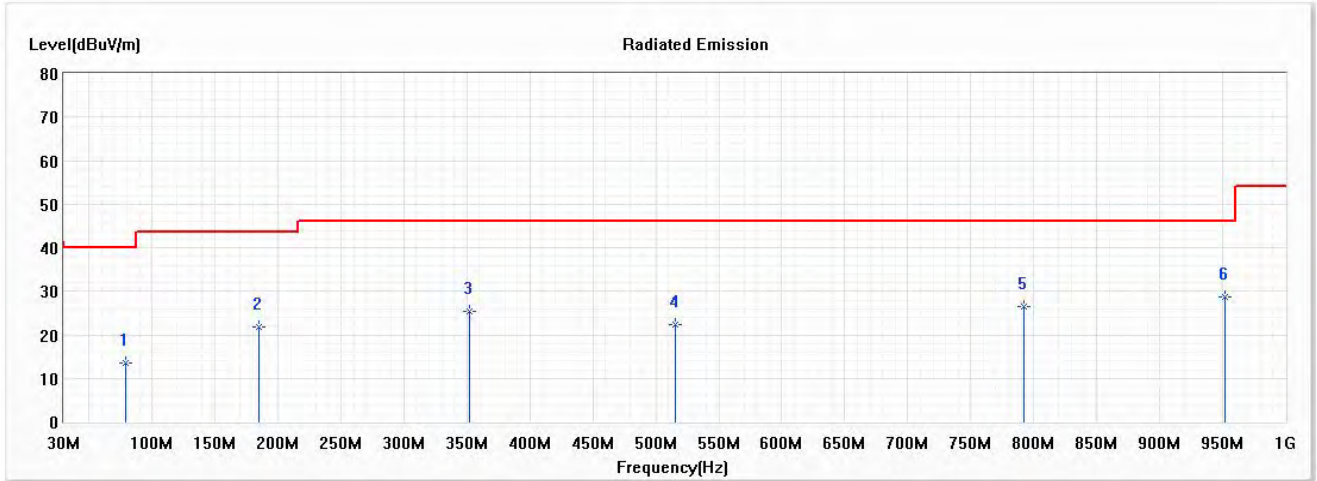


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	79.203	13.64	40.00	-26.36	28.92	-15.28	QP
2	184.638	21.69	43.50	-21.81	34.15	-12.46	QP
3	351.928	25.34	46.00	-20.66	33.85	-8.51	QP
4	515.000	22.22	46.00	-23.78	27.20	-4.98	QP
5	791.942	26.42	46.00	-19.58	26.87	-0.45	QP
* 6	952.203	28.72	46.00	-17.28	27.11	1.61	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/21
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps) (5710MHz)

Vertical

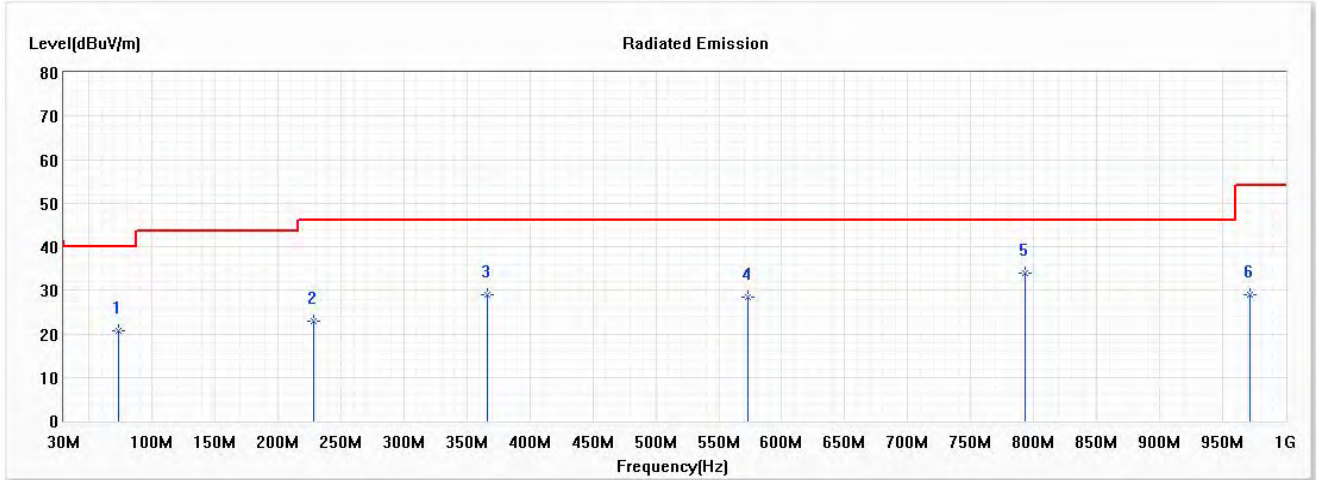


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	73.580	20.61	40.00	-19.39	34.42	-13.81	QP
2	228.217	22.77	46.00	-23.23	34.81	-12.04	QP
3	365.986	28.86	46.00	-17.14	36.99	-8.13	QP
4	572.638	28.55	46.00	-17.45	32.46	-3.91	QP
* 5	793.348	34.06	46.00	-11.94	34.48	-0.42	QP
6	971.884	28.93	54.00	-25.07	27.23	1.70	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/21
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps) (5795MHz)

Horizontal

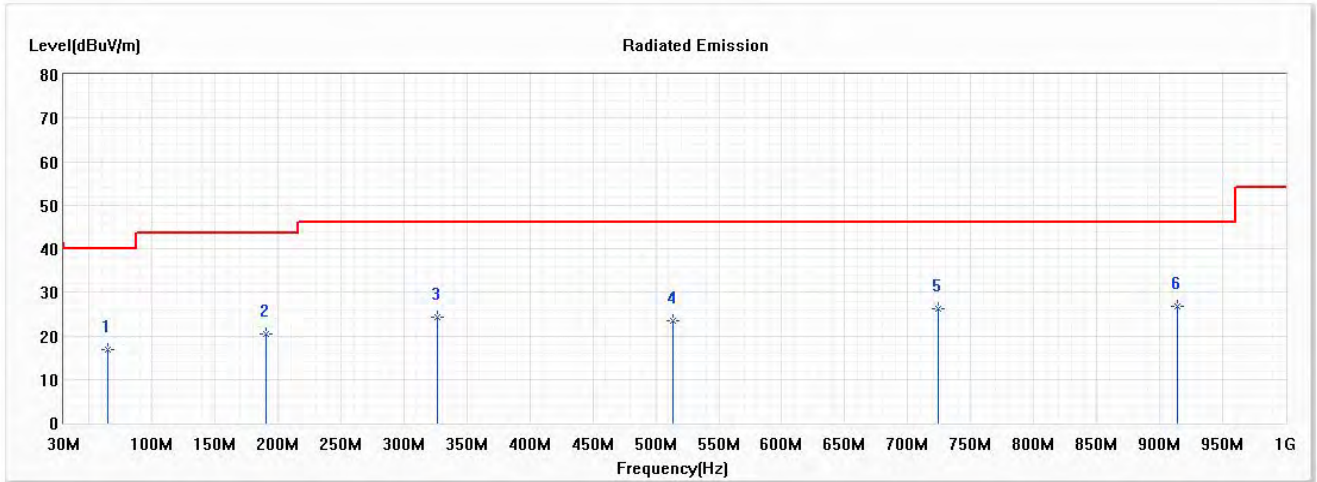


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	65.145	16.83	40.00	-23.17	28.94	-12.11	QP
2	190.261	20.35	43.50	-23.15	33.48	-13.13	QP
3	326.623	24.40	46.00	-21.60	33.43	-9.03	QP
4	513.594	23.42	46.00	-22.58	28.46	-5.04	QP
5	724.464	26.22	46.00	-19.78	27.76	-1.54	QP
* 6	914.246	26.80	46.00	-19.20	25.74	1.06	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/21
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps) (5795MHz)

Vertical

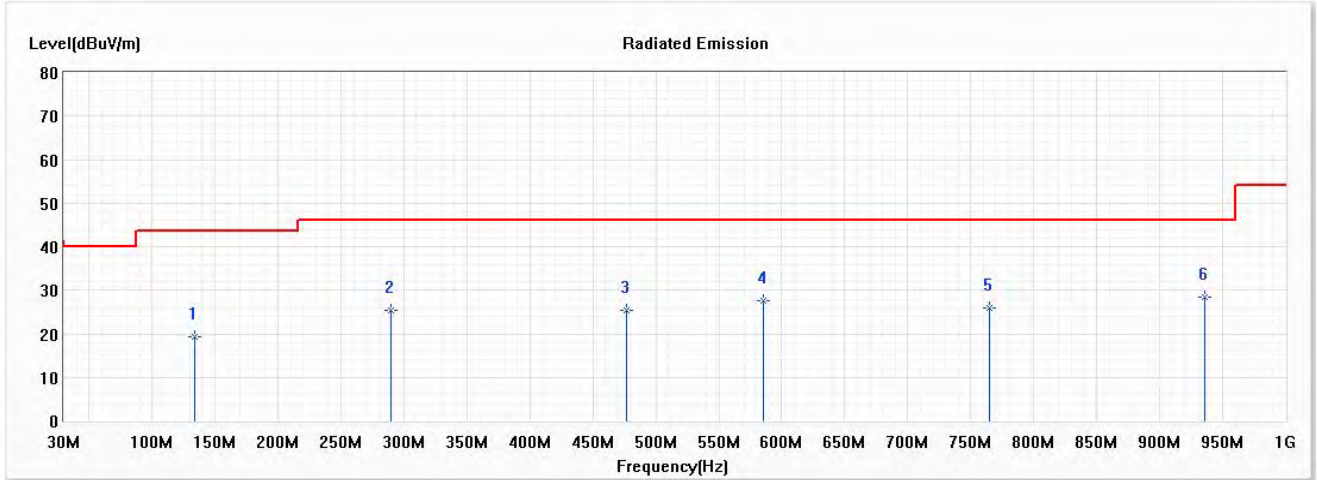


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	134.029	19.43	43.50	-24.07	30.85	-11.42	QP
2	290.072	25.42	46.00	-20.58	35.39	-9.97	QP
3	477.043	25.44	46.00	-20.56	31.23	-5.79	QP
4	585.290	27.51	46.00	-18.49	31.13	-3.62	QP
5	765.232	25.98	46.00	-20.02	26.73	-0.75	QP
* 6	935.333	28.51	46.00	-17.49	27.12	1.39	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/21
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps) (5210MHz)

Horizontal

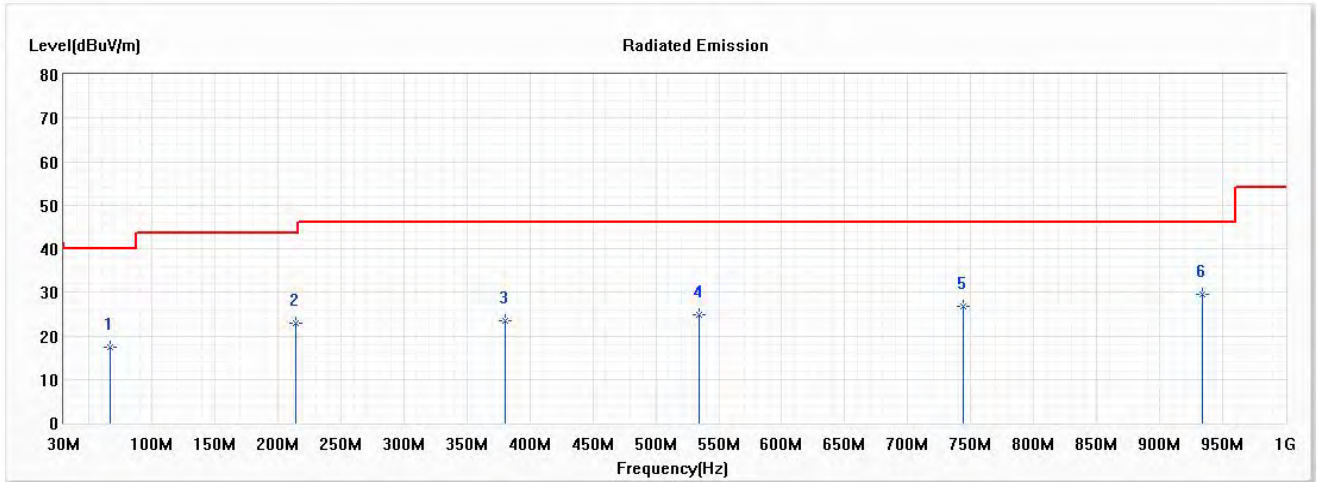


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	66.551	17.40	40.00	-22.60	29.90	-12.50	QP
2	214.159	23.03	43.50	-20.47	36.06	-13.03	QP
3	380.043	23.49	46.00	-22.51	31.13	-7.64	QP
4	534.681	24.76	46.00	-21.24	29.32	-4.56	QP
5	744.145	26.71	46.00	-19.29	27.79	-1.08	QP
* 6	933.928	29.58	46.00	-16.42	28.22	1.36	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/21
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps) (5210MHz)

Vertical

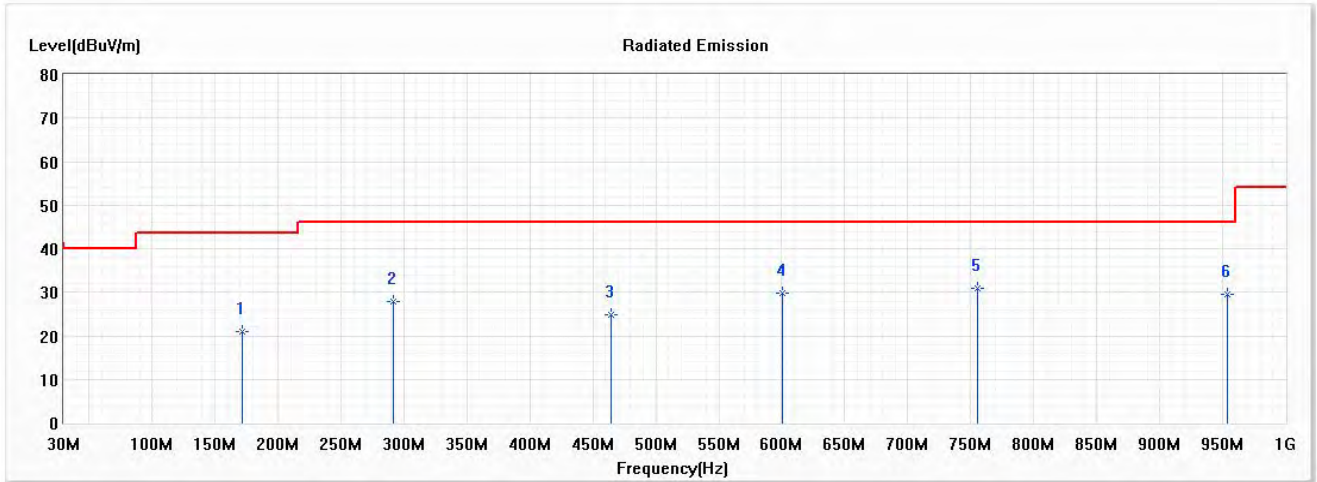


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	171.986	20.93	43.50	-22.57	31.33	-10.40	QP
2	291.478	27.96	46.00	-18.04	37.89	-9.93	QP
3	464.391	24.75	46.00	-21.25	30.71	-5.96	QP
4	600.754	29.76	46.00	-16.24	32.93	-3.17	QP
* 5	755.391	31.02	46.00	-14.98	31.88	-0.86	QP
6	953.609	29.52	46.00	-16.48	27.91	1.61	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/21
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps) (5290MHz)

Horizontal

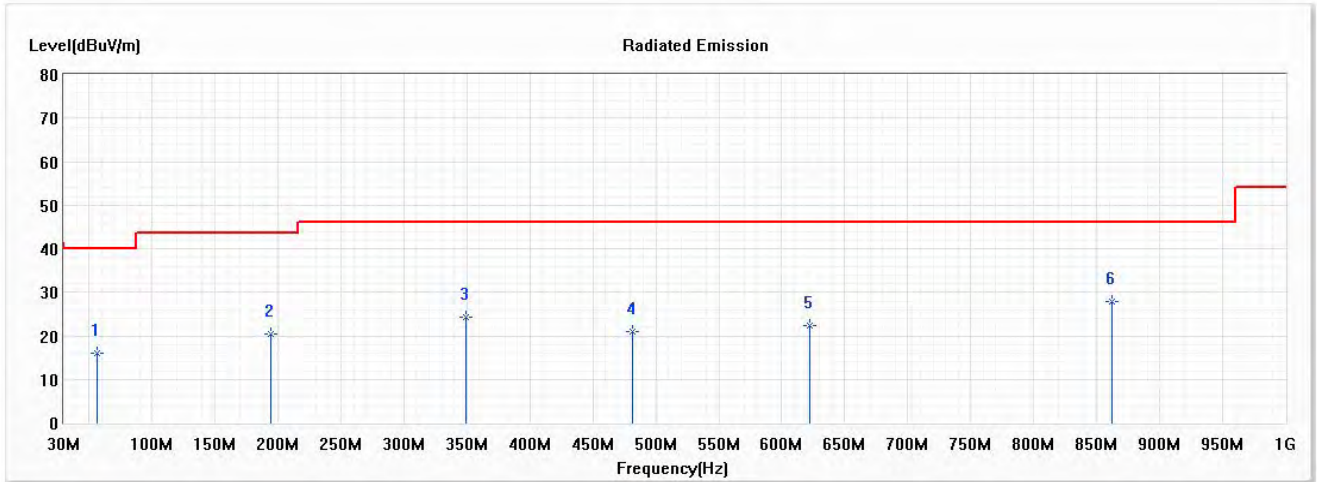


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	56.710	16.13	40.00	-23.87	26.83	-10.70	QP
2	194.478	20.35	43.50	-23.15	33.68	-13.33	QP
3	349.116	24.27	46.00	-21.73	32.81	-8.54	QP
4	481.261	21.08	46.00	-24.92	26.78	-5.70	QP
5	621.841	22.29	46.00	-23.71	25.26	-2.97	QP
* 6	862.232	28.00	46.00	-18.00	27.83	0.17	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/21
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps) (5290MHz)

Vertical

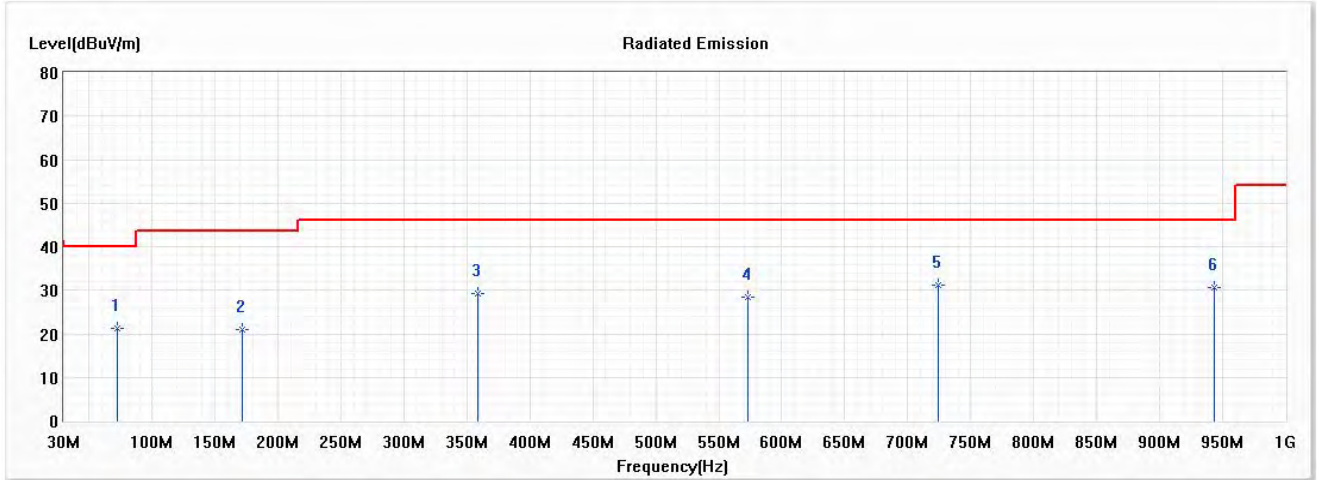


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	72.174	21.15	40.00	-18.85	34.59	-13.44	QP
2	171.986	20.93	43.50	-22.57	31.33	-10.40	QP
3	358.957	29.35	46.00	-16.65	37.68	-8.33	QP
4	572.638	28.55	46.00	-17.45	32.46	-3.91	QP
* 5	724.464	31.10	46.00	-14.90	32.64	-1.54	QP
6	943.768	30.72	46.00	-15.28	29.24	1.48	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/21
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps) (5530MHz)

Horizontal

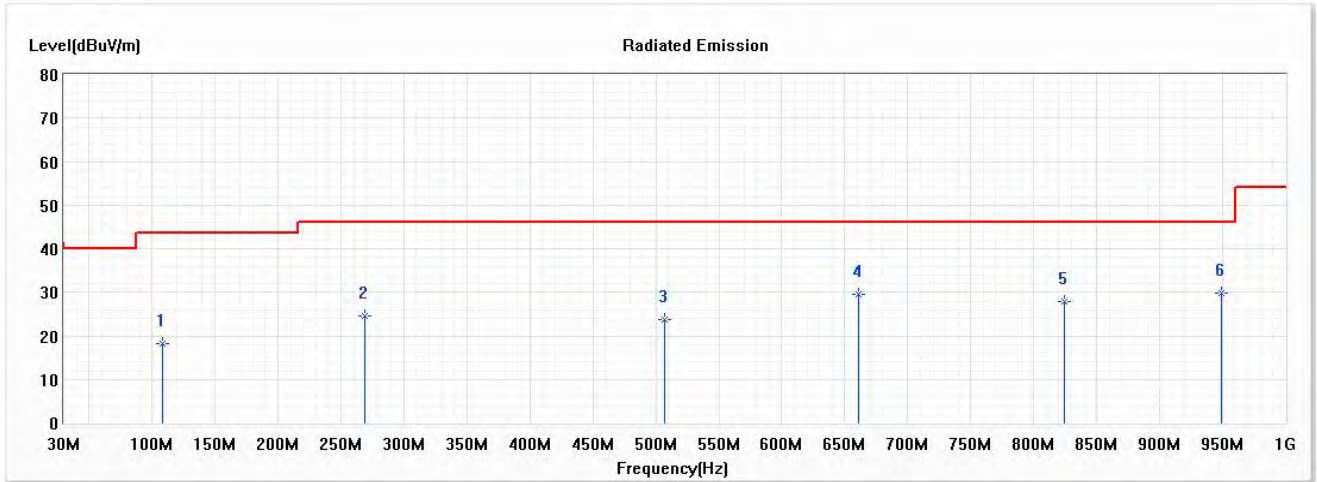


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	108.725	18.33	43.50	-25.17	32.32	-13.99	QP
2	268.986	24.61	46.00	-21.39	35.37	-10.76	QP
3	506.565	23.79	46.00	-22.21	29.07	-5.28	QP
4	661.203	29.54	46.00	-16.46	32.07	-2.53	QP
5	824.275	27.74	46.00	-18.26	27.96	-0.22	QP
* 6	949.391	29.82	46.00	-16.18	28.21	1.61	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/21
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps) (5530MHz)

Vertical

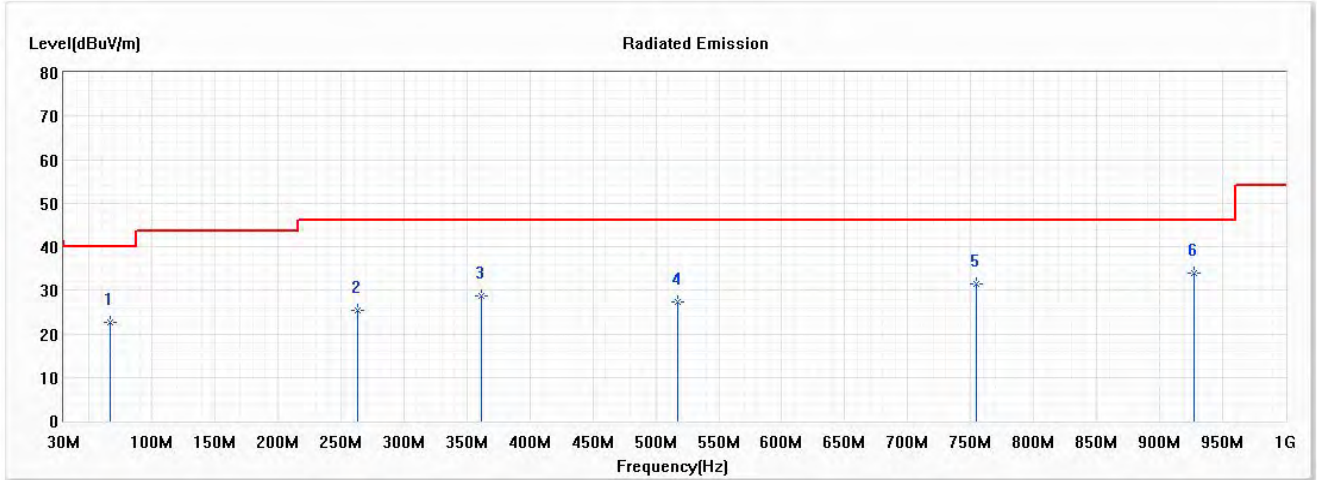


No	Frequency (MHz)	Emission Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Reading Level (dBµV)	Correct Factor (dB)	Detector Type
1	66.551	22.62	40.00	-17.38	35.12	-12.50	QP
2	263.362	25.48	46.00	-20.52	36.50	-11.02	QP
3	361.768	28.77	46.00	-17.23	37.02	-8.25	QP
4	517.812	27.44	46.00	-18.56	32.35	-4.91	QP
5	753.986	31.55	46.00	-14.45	32.42	-0.87	QP
* 6	926.899	33.97	46.00	-12.03	32.75	1.22	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/21
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps) (5775MHz)

Horizontal

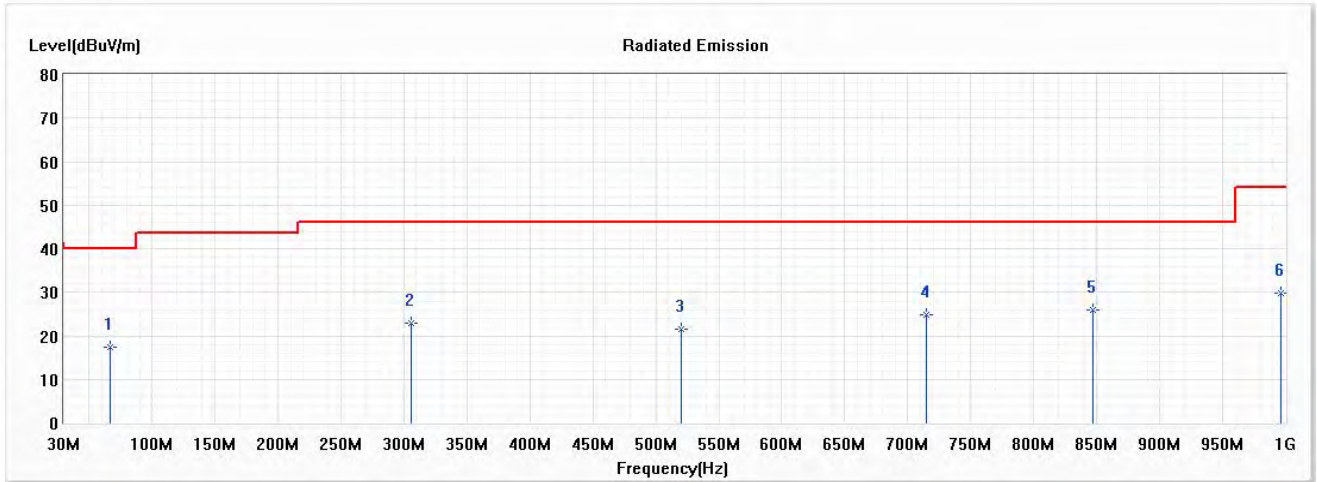


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	66.551	17.40	40.00	-22.60	29.90	-12.50	QP
2	305.536	22.93	46.00	-23.07	32.54	-9.61	QP
3	520.623	21.48	46.00	-24.52	26.34	-4.86	QP
4	714.623	24.89	46.00	-21.11	26.54	-1.65	QP
* 5	846.768	26.02	46.00	-19.98	25.84	0.18	QP
6	995.783	29.93	54.00	-24.07	28.24	1.69	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/21
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps) (5775MHz)

Vertical

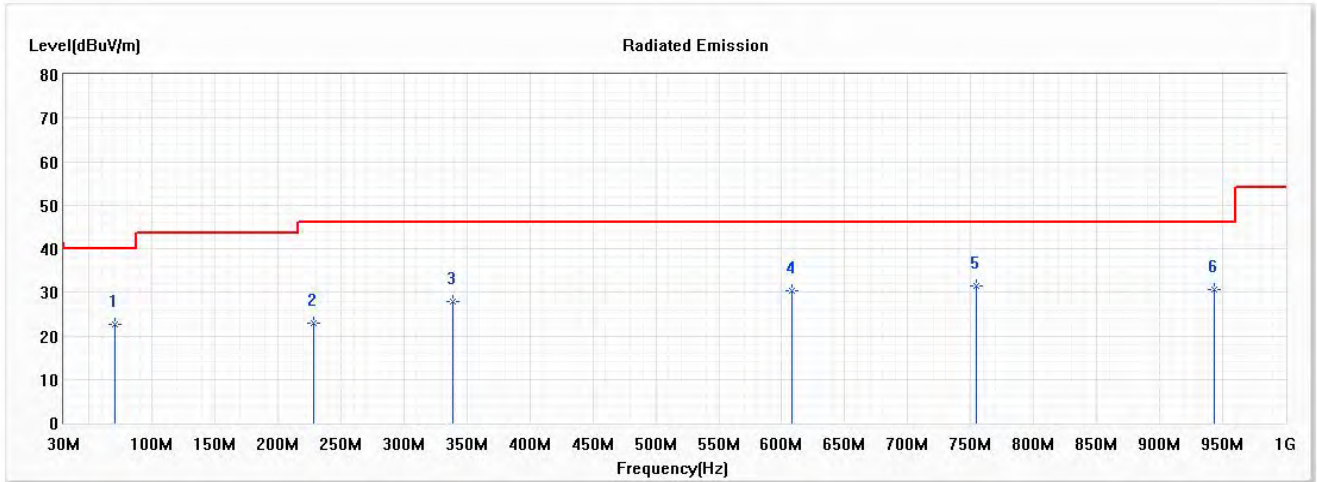


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	70.768	22.59	40.00	-17.41	35.85	-13.26	QP
2	228.217	22.77	46.00	-23.23	34.81	-12.04	QP
3	339.275	27.75	46.00	-18.25	36.48	-8.73	QP
4	607.783	30.39	46.00	-15.61	33.47	-3.08	QP
* 5	753.986	31.55	46.00	-14.45	32.42	-0.87	QP
6	943.768	30.72	46.00	-15.28	29.24	1.48	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/21
 Test Mode : Mode 22 MIMO: Transmit (802.11ac-160BW_130Mbps) (5250MHz)

Horizontal

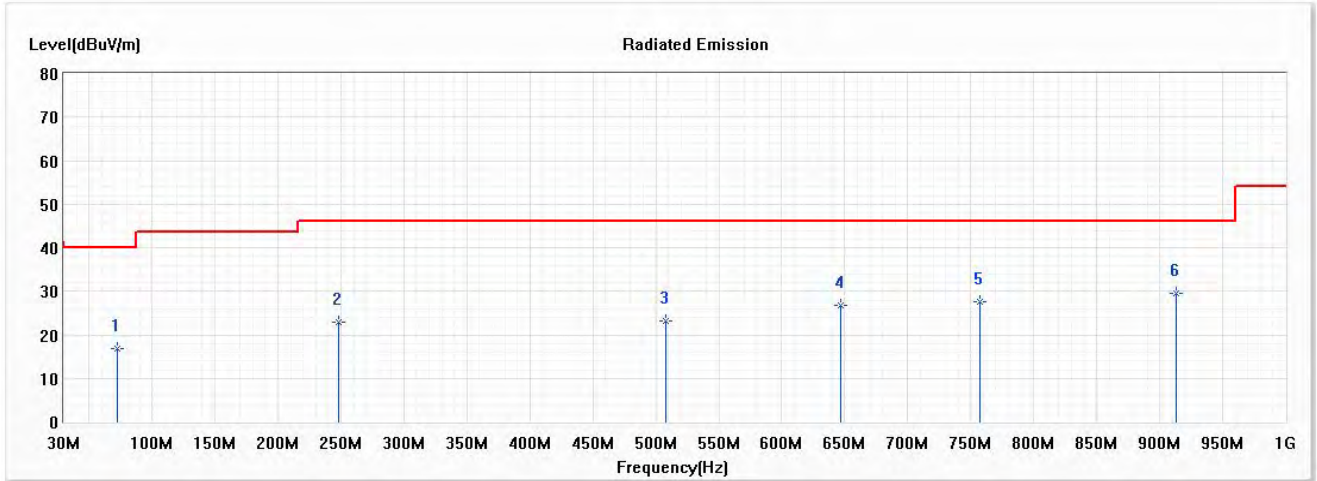


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	72.174	16.95	40.00	-23.05	30.39	-13.44	QP
2	247.899	23.03	46.00	-22.97	34.47	-11.44	QP
3	507.971	23.05	46.00	-22.95	28.29	-5.24	QP
4	647.145	26.79	46.00	-19.21	29.44	-2.65	QP
5	756.797	27.48	46.00	-18.52	28.34	-0.86	QP
* 6	912.841	29.47	46.00	-16.53	28.43	1.04	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/21
 Test Mode : Mode 22 MIMO: Transmit (802.11ac-160BW_130Mbps) (5250MHz)

Vertical

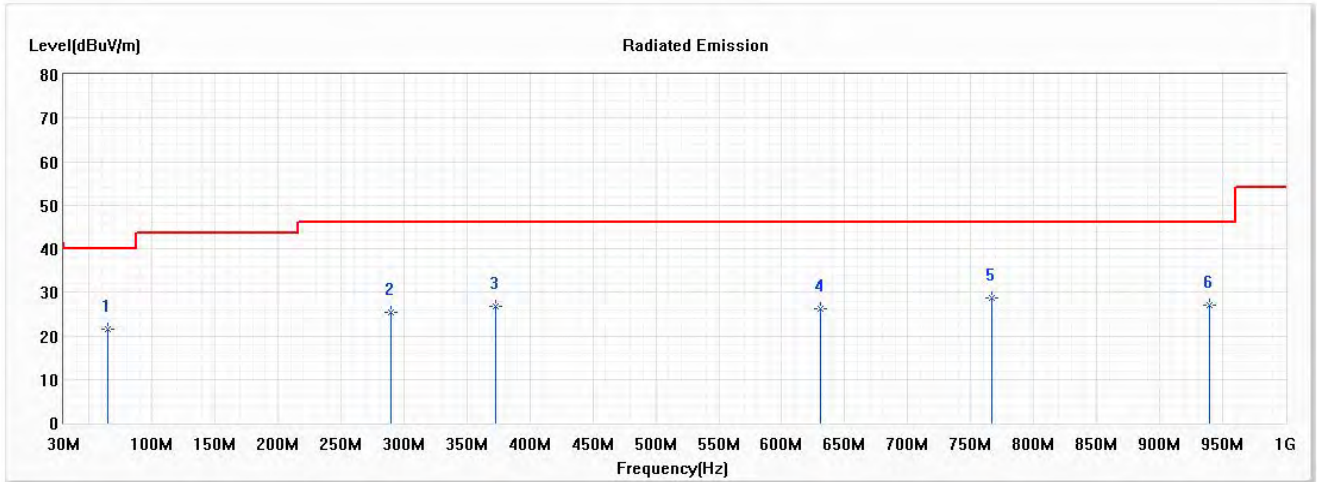


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	65.145	21.53	40.00	-18.47	33.64	-12.11	QP
2	290.072	25.42	46.00	-20.58	35.39	-9.97	QP
3	373.014	26.79	46.00	-19.21	34.69	-7.90	QP
4	630.275	26.13	46.00	-19.87	29.07	-2.94	QP
* 5	766.638	28.77	46.00	-17.23	29.49	-0.72	QP
6	939.551	27.09	46.00	-18.91	25.70	1.39	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/21
 Test Mode : Mode 22 MIMO: Transmit (802.11ac-160BW_130Mbps) (5570MHz)

Horizontal

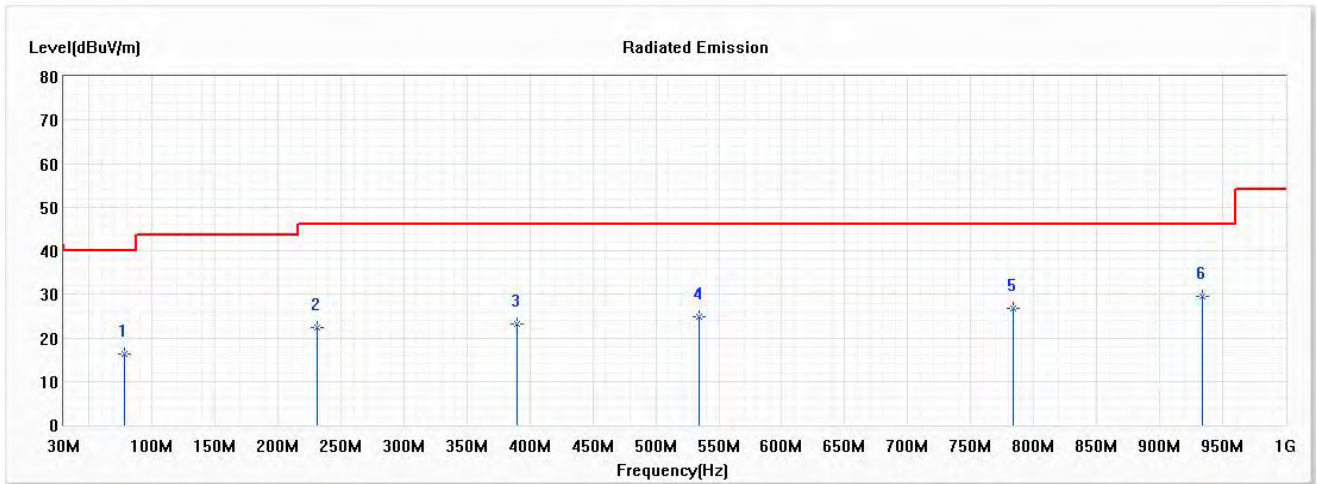


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	77.797	16.17	40.00	-23.83	31.09	-14.92	QP
2	231.029	22.28	46.00	-23.72	34.09	-11.81	QP
3	389.884	23.14	46.00	-22.86	30.54	-7.40	QP
4	534.681	24.76	46.00	-21.24	29.32	-4.56	QP
5	783.507	26.74	46.00	-19.26	27.19	-0.45	QP
* 6	933.928	29.58	46.00	-16.42	28.22	1.36	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/21
 Test Mode : Mode 22 MIMO: Transmit (802.11ac-160BW_130Mbps) (5570MHz)

Vertical

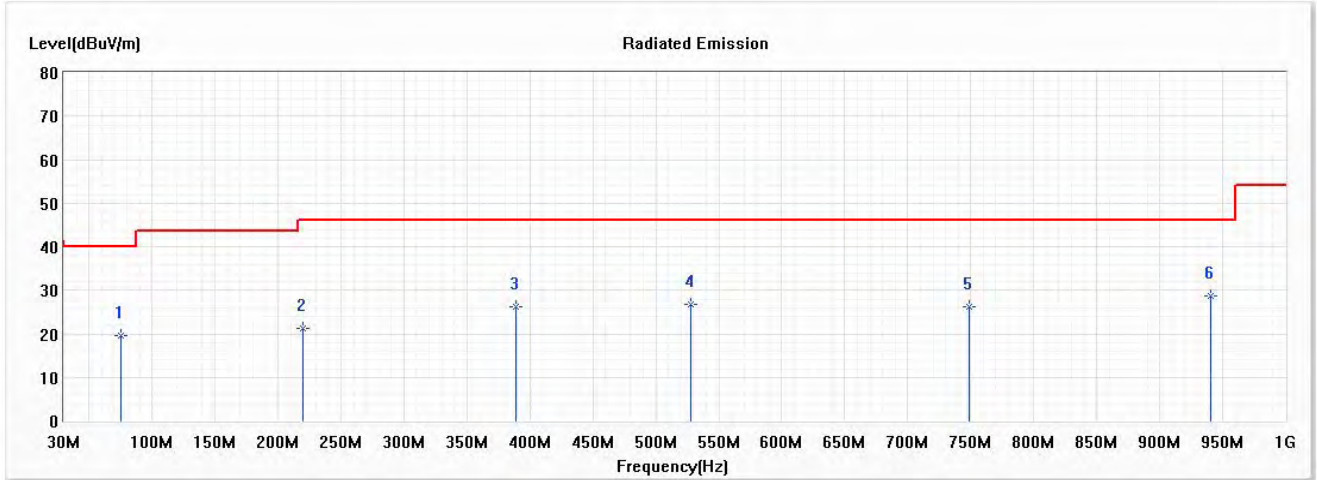


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	74.986	19.50	40.00	-20.50	33.58	-14.08	QP
2	219.783	21.23	46.00	-24.77	34.02	-12.79	QP
3	388.478	26.27	46.00	-19.73	33.70	-7.43	QP
4	527.652	26.88	46.00	-19.12	31.63	-4.75	QP
5	748.362	26.34	46.00	-19.66	27.29	-0.95	QP
* 6	940.957	28.77	46.00	-17.23	27.36	1.41	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 6 SISO A: Transmit (802.11ax-20BW_8.6Mbps) (5200MHz)

Horizontal

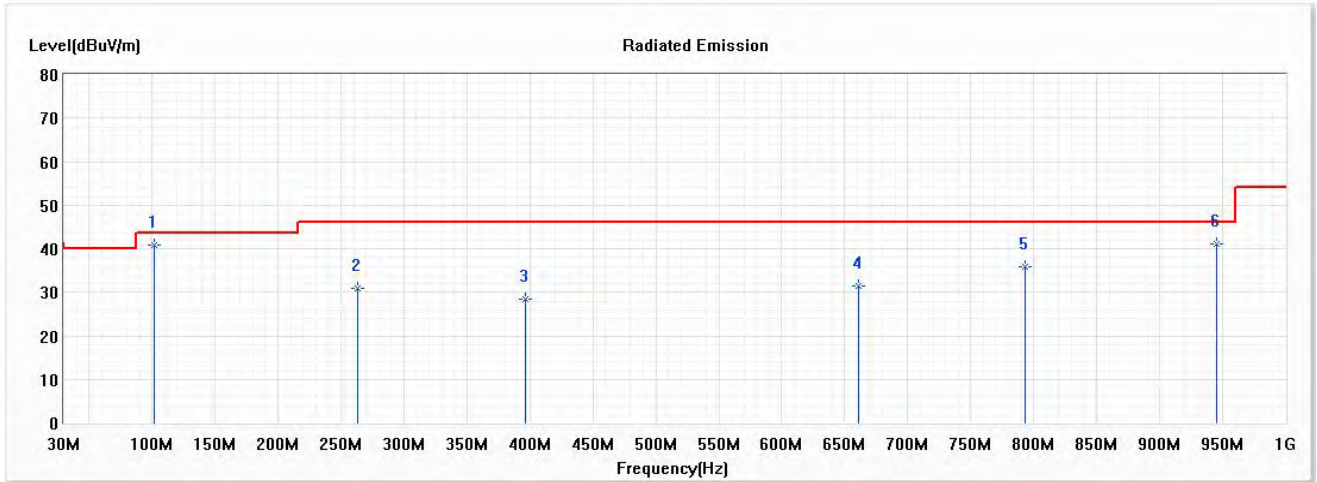


No	Frequency (MHz)	Emission Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Reading Level (dBµV)	Correct Factor (dB)	Detector Type
* 1	101.696	40.81	43.50	-2.69	55.97	-15.16	QP
2	263.362	30.93	46.00	-15.07	41.95	-11.02	QP
3	396.913	28.33	46.00	-17.67	35.68	-7.35	QP
4	661.203	31.53	46.00	-14.47	34.06	-2.53	QP
5	793.348	35.75	46.00	-10.25	36.17	-0.42	QP
6	945.174	41.09	46.00	-4.91	39.59	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 6 SISO A: Transmit (802.11ax-20BW_8.6Mbps) (5200MHz)

Vertical

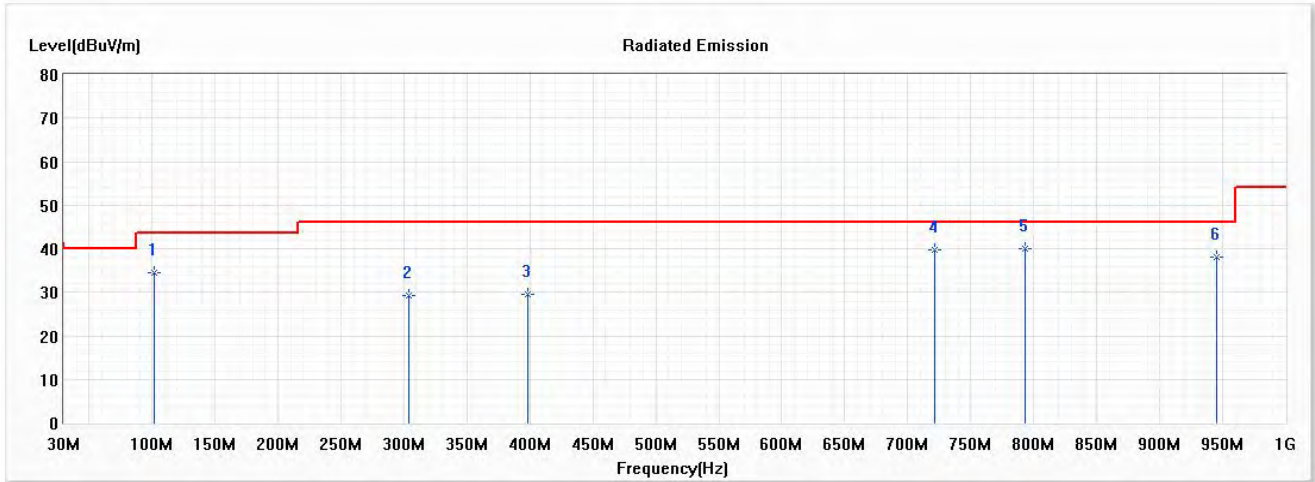


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	34.62	43.50	-8.88	49.78	-15.16	QP
2	304.130	29.17	46.00	-16.83	38.82	-9.65	QP
3	398.319	29.64	46.00	-16.36	36.96	-7.32	QP
4	721.652	39.75	46.00	-6.25	41.35	-1.60	QP
* 5	793.348	40.09	46.00	-5.91	40.51	-0.42	QP
6	945.174	38.15	46.00	-7.85	36.65	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 6 SISO A: Transmit (802.11ax-20BW_8.6Mbps) (5300MHz)

Horizontal

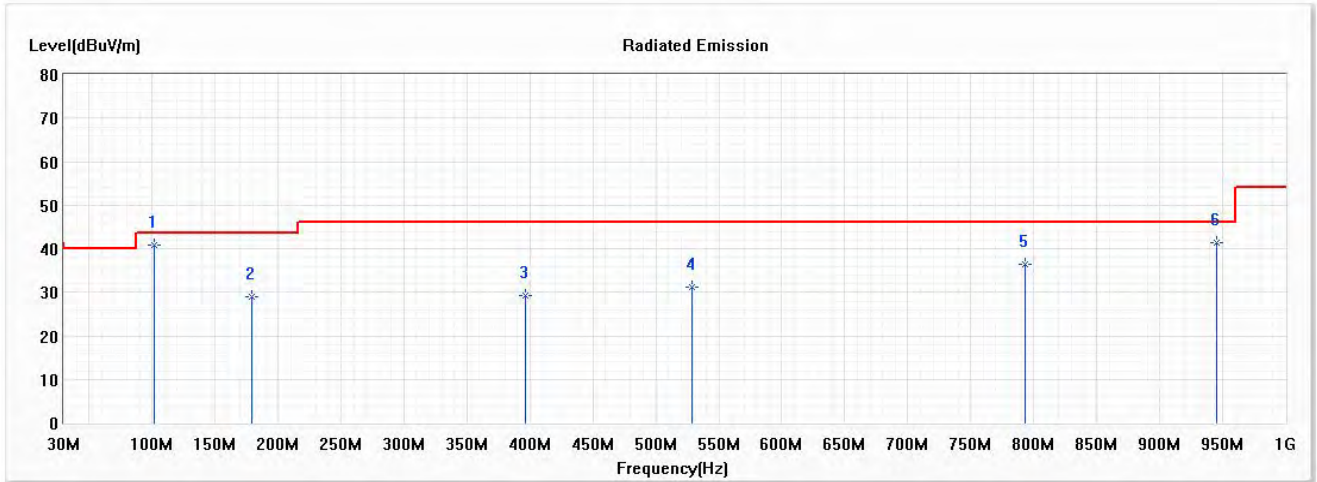


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	40.94	43.50	-2.56	56.10	-15.16	QP
2	179.014	28.96	43.50	-14.54	40.53	-11.57	QP
3	396.913	29.11	46.00	-16.89	36.46	-7.35	QP
4	529.058	31.31	46.00	-14.69	36.06	-4.75	QP
5	793.348	36.53	46.00	-9.47	36.95	-0.42	QP
6	945.174	41.26	46.00	-4.74	39.76	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 6 SISO A: Transmit (802.11ax-20BW_8.6Mbps) (5300MHz)

Vertical

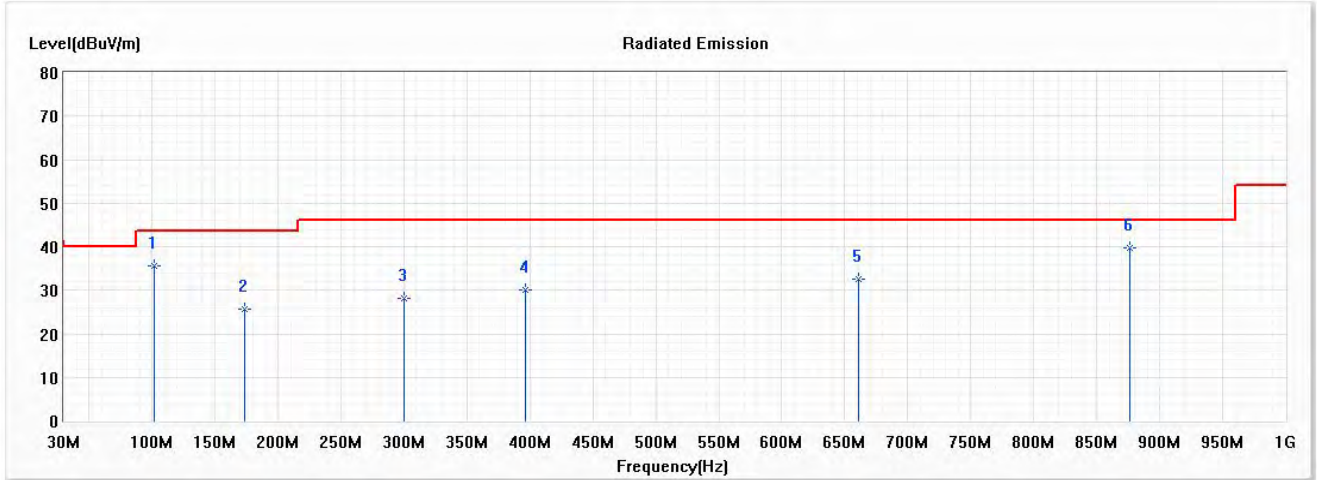


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	35.51	43.50	-7.99	50.67	-15.16	QP
2	173.391	25.63	43.50	-17.87	36.27	-10.64	QP
3	299.913	28.22	46.00	-17.78	37.96	-9.74	QP
4	396.913	29.95	46.00	-16.05	37.30	-7.35	QP
5	661.203	32.55	46.00	-13.45	35.08	-2.53	QP
* 6	876.290	39.61	46.00	-6.39	39.21	0.40	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 6 SISO A: Transmit (802.11ax-20BW_8.6Mbps) (5600MHz)

Horizontal

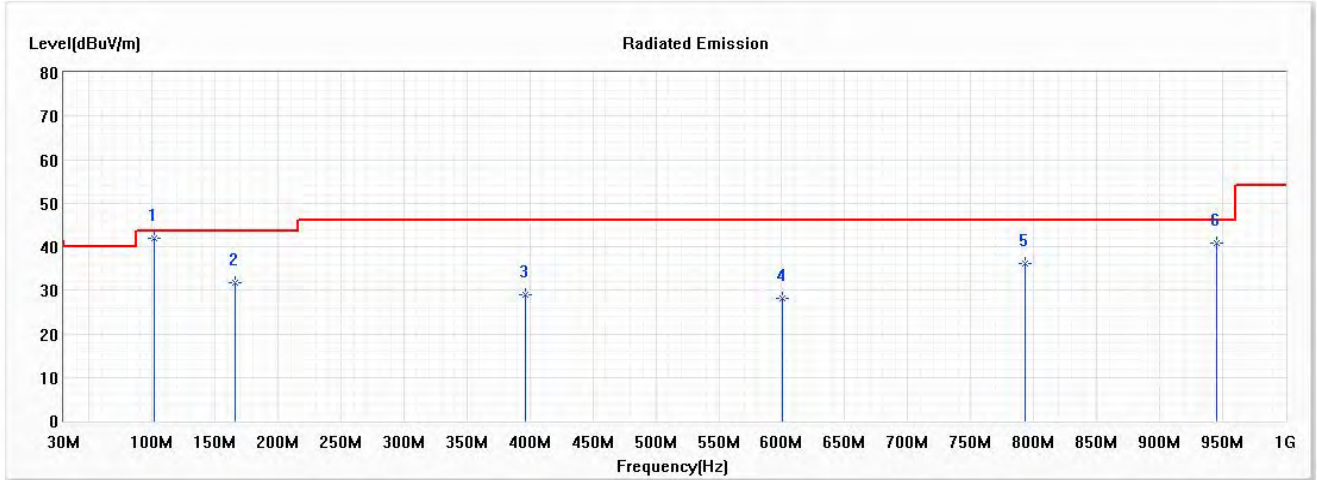


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	41.83	43.50	-1.67	56.99	-15.16	QP
2	166.362	31.72	43.50	-11.78	42.05	-10.33	QP
3	396.913	28.83	46.00	-17.17	36.18	-7.35	QP
4	600.754	28.18	46.00	-17.82	31.35	-3.17	QP
5	793.348	36.21	46.00	-9.79	36.63	-0.42	QP
6	945.174	40.96	46.00	-5.04	39.46	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 6 SISO A: Transmit (802.11ax-20BW_8.6Mbps) (5600MHz)

Vertical

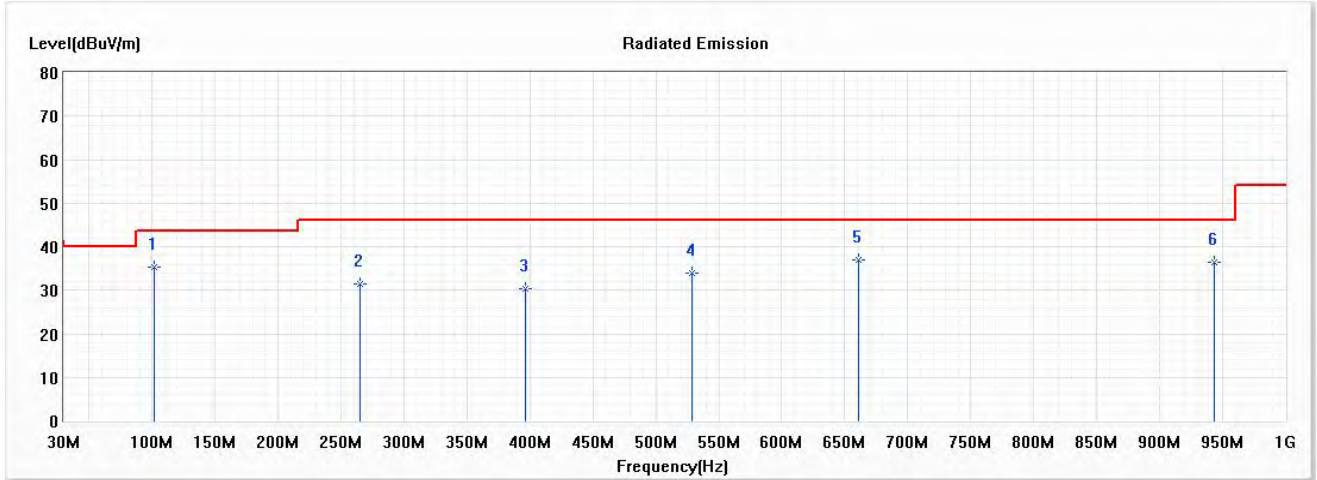


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	35.20	43.50	-8.30	50.36	-15.16	QP
2	264.768	31.32	46.00	-14.68	42.27	-10.95	QP
3	396.913	30.45	46.00	-15.55	37.80	-7.35	QP
4	529.058	33.88	46.00	-12.12	38.63	-4.75	QP
5	661.203	36.87	46.00	-9.13	39.40	-2.53	QP
6	943.768	36.55	46.00	-9.45	35.07	1.48	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 6 SISO A: Transmit (802.11ax-20BW_8.6Mbps) (5785MHz)

Horizontal

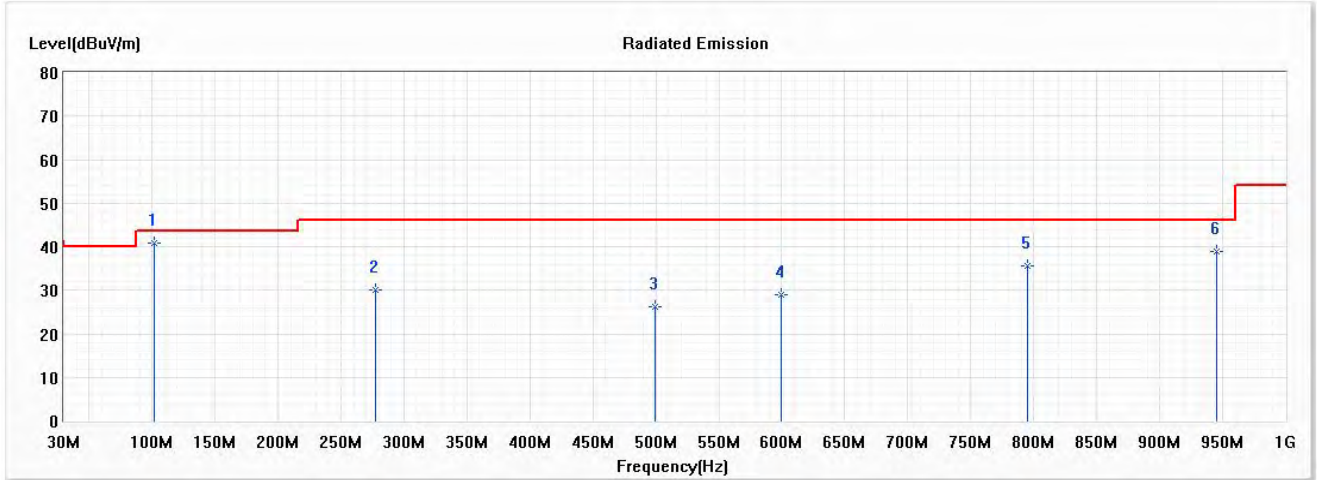


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	40.76	43.50	-2.74	55.92	-15.16	QP
2	277.420	30.12	46.00	-15.88	40.48	-10.36	QP
3	499.536	26.22	46.00	-19.78	31.65	-5.43	QP
4	599.348	28.93	46.00	-17.07	32.12	-3.19	QP
5	794.754	35.62	46.00	-10.38	36.01	-0.39	QP
6	945.174	38.83	46.00	-7.17	37.33	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 6 SISO A: Transmit (802.11ax-20BW_8.6Mbps) (5785MHz)

Vertical

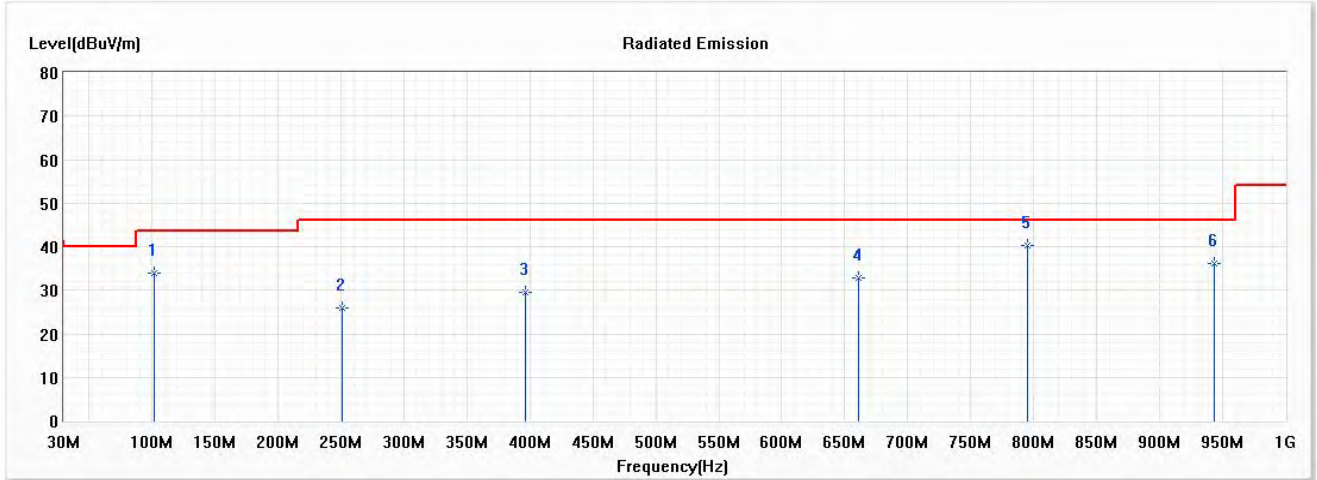


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	33.99	43.50	-9.51	49.15	-15.16	QP
2	250.710	25.81	46.00	-20.19	37.19	-11.38	QP
3	396.913	29.39	46.00	-16.61	36.74	-7.35	QP
4	661.203	32.75	46.00	-13.25	35.28	-2.53	QP
* 5	794.754	40.14	46.00	-5.86	40.53	-0.39	QP
6	943.768	36.13	46.00	-9.87	34.65	1.48	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 7 SISO A: Transmit (802.11ax-40BW_17.2Mbps) (5230MHz)

Horizontal

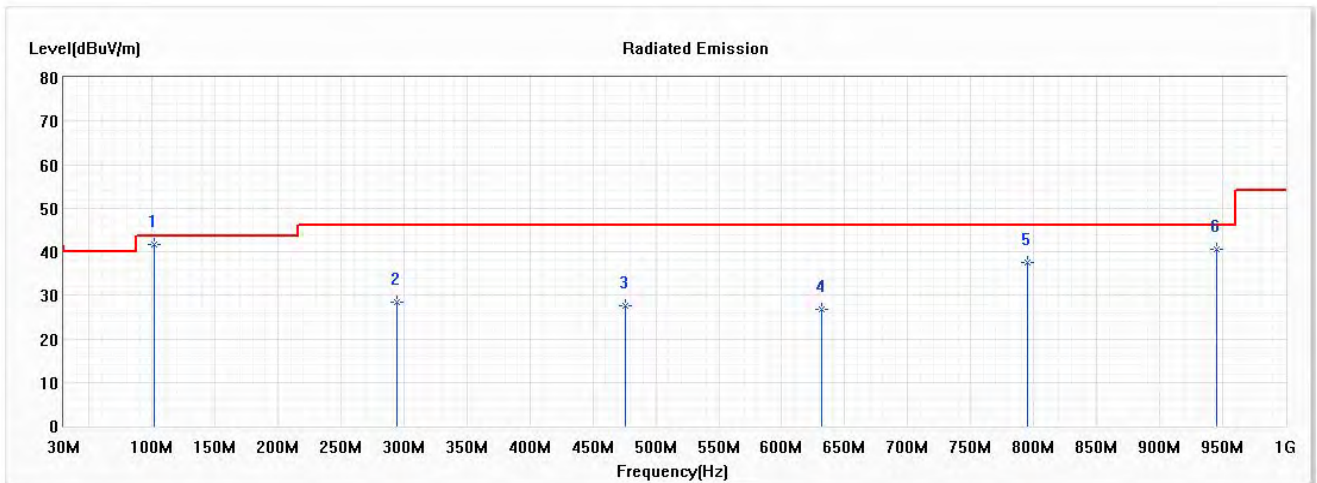


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	41.62	43.50	-1.88	56.78	-15.16	QP
2	294.290	28.48	46.00	-17.52	38.34	-9.86	QP
3	475.638	27.72	46.00	-18.28	33.55	-5.83	QP
4	631.681	26.73	46.00	-19.27	29.65	-2.92	QP
5	794.754	37.51	46.00	-8.49	37.90	-0.39	QP
6	945.174	40.42	46.00	-5.58	38.92	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 7 SISO A: Transmit (802.11ax-40BW_17.2Mbps) (5230MHz)

Vertical

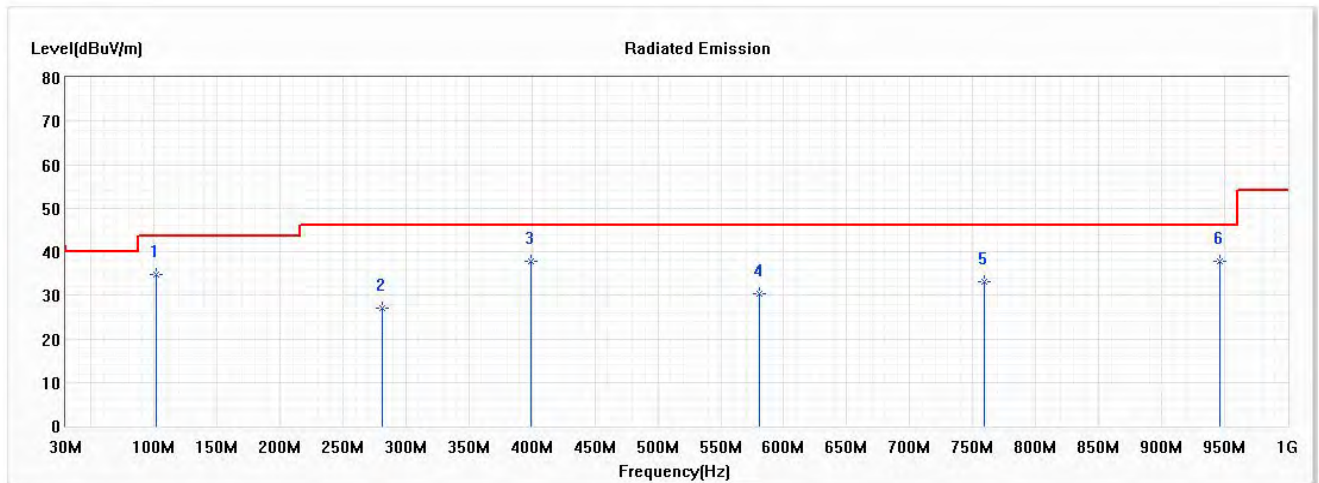


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	34.86	43.50	-8.64	50.02	-15.16	QP
2	281.638	27.04	46.00	-18.96	37.20	-10.16	QP
* 3	399.725	37.66	46.00	-8.34	44.96	-7.30	QP
4	581.072	30.44	46.00	-15.56	34.16	-3.72	QP
5	759.609	33.22	46.00	-12.78	34.08	-0.86	QP
6	946.580	37.66	46.00	-8.34	36.12	1.54	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 7 SISO A: Transmit (802.11ax-40BW_17.2Mbps) (5310MHz)

Horizontal

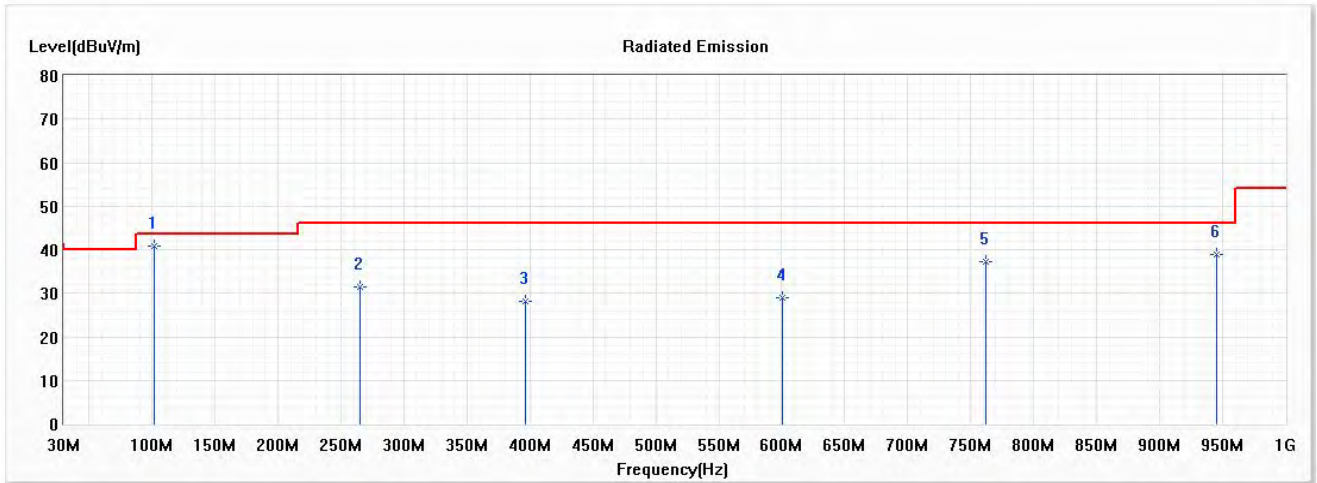


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	40.89	43.50	-2.61	56.05	-15.16	QP
2	264.768	31.43	46.00	-14.57	42.38	-10.95	QP
3	396.913	28.01	46.00	-17.99	35.36	-7.35	QP
4	600.754	28.83	46.00	-17.17	32.00	-3.17	QP
5	762.420	37.25	46.00	-8.75	38.06	-0.81	QP
6	945.174	38.81	46.00	-7.19	37.31	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 7 SISO A: Transmit (802.11ax-40BW_17.2Mbps) (5310MHz)

Vertical

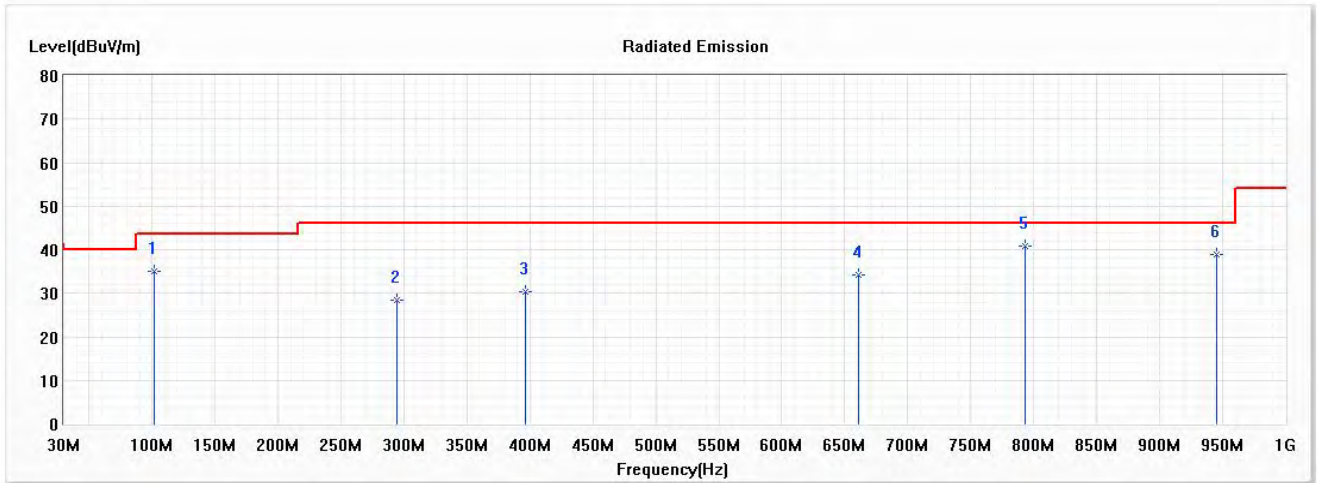


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	35.02	43.50	-8.48	50.18	-15.16	QP
2	294.290	28.28	46.00	-17.72	38.14	-9.86	QP
3	396.913	30.36	46.00	-15.64	37.71	-7.35	QP
4	661.203	34.22	46.00	-11.78	36.75	-2.53	QP
* 5	793.348	40.76	46.00	-5.24	41.18	-0.42	QP
6	945.174	38.81	46.00	-7.19	37.31	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 7 SISO A: Transmit (802.11ax-40BW_17.2Mbps) (5590MHz)

Horizontal

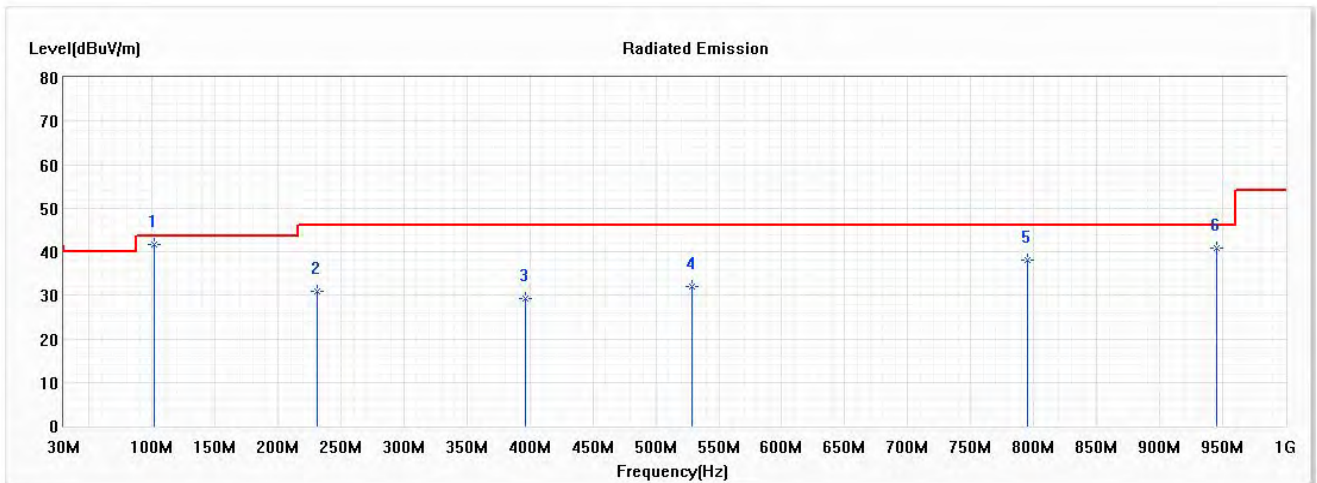


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	41.57	43.50	-1.93	56.73	-15.16	QP
2	231.029	31.01	46.00	-14.99	42.82	-11.81	QP
3	396.913	29.33	46.00	-16.67	36.68	-7.35	QP
4	529.058	32.09	46.00	-13.91	36.84	-4.75	QP
5	794.754	37.94	46.00	-8.06	38.33	-0.39	QP
6	945.174	40.92	46.00	-5.08	39.42	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 7 SISO A: Transmit (802.11ax-40BW_17.2Mbps) (5590MHz)

Vertical

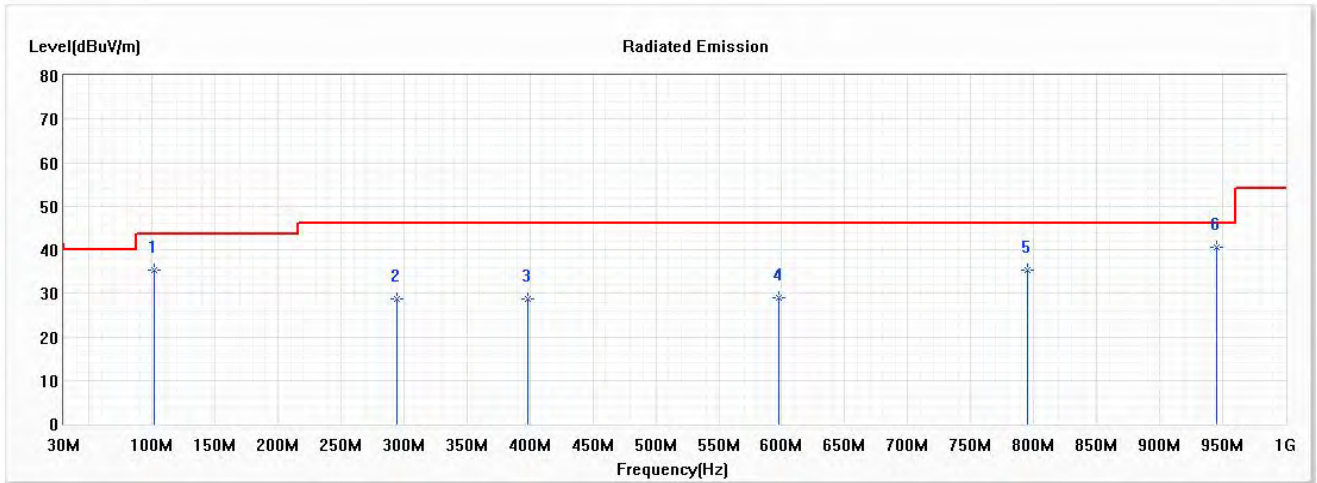


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	35.21	43.50	-8.29	50.37	-15.16	QP
2	294.290	28.79	46.00	-17.21	38.65	-9.86	QP
3	398.319	28.81	46.00	-17.19	36.13	-7.32	QP
4	597.942	28.84	46.00	-17.16	32.03	-3.19	QP
5	794.754	35.43	46.00	-10.57	35.82	-0.39	QP
* 6	945.174	40.58	46.00	-5.42	39.08	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 7 SISO A: Transmit (802.11ax-40BW_17.2Mbps) (5795MHz)

Horizontal

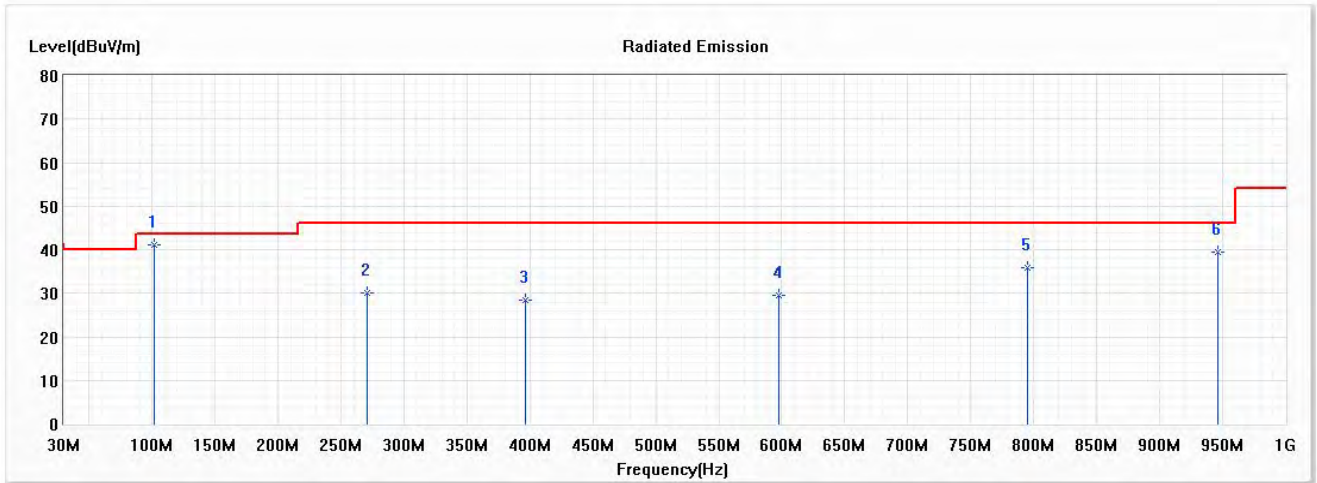


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	41.05	43.50	-2.45	56.21	-15.16	QP
2	270.391	30.15	46.00	-15.85	40.85	-10.70	QP
3	396.913	28.46	46.00	-17.54	35.81	-7.35	QP
4	597.942	29.43	46.00	-16.57	32.62	-3.19	QP
5	794.754	35.90	46.00	-10.10	36.29	-0.39	QP
6	946.580	39.55	46.00	-6.45	38.01	1.54	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 7 SISO A: Transmit (802.11ax-40BW_17.2Mbps) (5795MHz)

Vertical

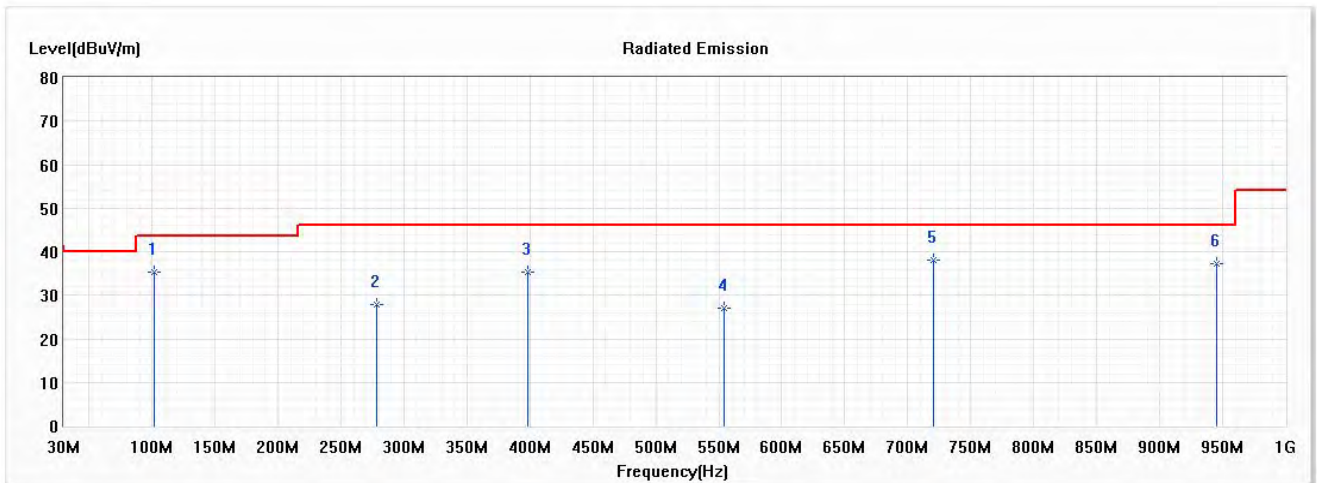


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	35.36	43.50	-8.14	50.52	-15.16	QP
2	278.826	27.96	46.00	-18.04	38.24	-10.28	QP
3	398.319	35.38	46.00	-10.62	42.70	-7.32	QP
4	554.362	26.96	46.00	-19.04	31.26	-4.30	QP
* 5	720.246	38.20	46.00	-7.80	39.84	-1.64	QP
6	945.174	37.26	46.00	-8.74	35.76	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 8 SISO A: Transmit (802.11ax-80BW_36Mbps) (5210MHz)

Horizontal

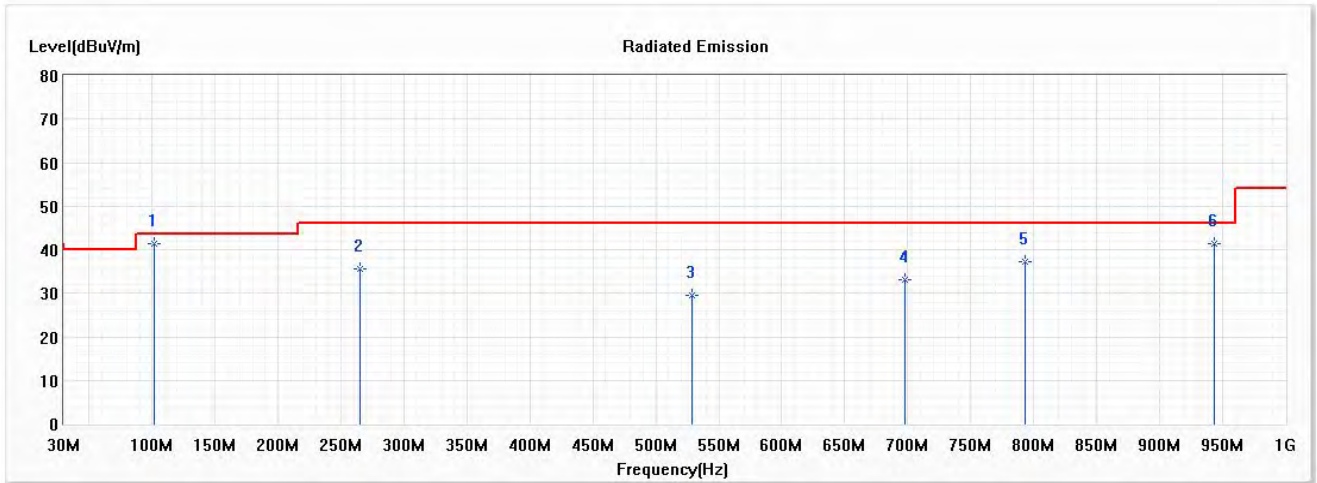


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	41.34	43.50	-2.16	56.50	-15.16	QP
2	264.768	35.57	46.00	-10.43	46.52	-10.95	QP
3	529.058	29.58	46.00	-16.42	34.33	-4.75	QP
4	697.754	33.21	46.00	-12.79	35.29	-2.08	QP
5	793.348	37.14	46.00	-8.86	37.56	-0.42	QP
6	943.768	41.33	46.00	-4.67	39.85	1.48	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 8 SISO A: Transmit (802.11ax-80BW_36Mbps) (5210MHz)

Vertical

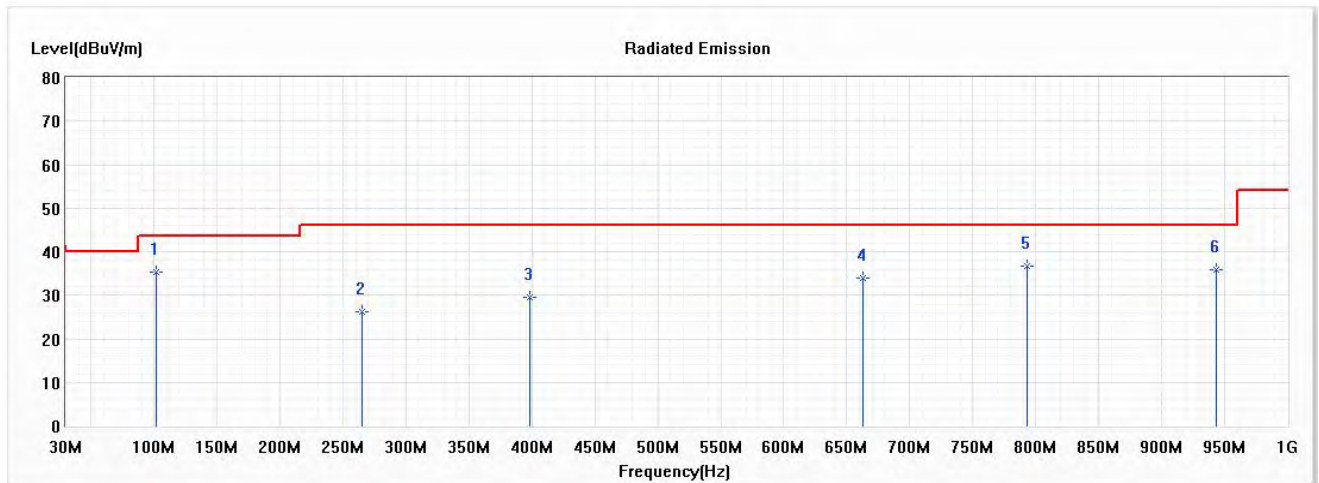


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	35.29	43.50	-8.21	50.45	-15.16	QP
2	264.768	26.24	46.00	-19.76	37.19	-10.95	QP
3	398.319	29.44	46.00	-16.56	36.76	-7.32	QP
4	662.609	33.83	46.00	-12.17	36.40	-2.57	QP
5	793.348	36.76	46.00	-9.24	37.18	-0.42	QP
6	943.768	35.98	46.00	-10.02	34.50	1.48	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 8 SISO A: Transmit (802.11ax-80BW_36Mbps) (5290MHz)

Horizontal

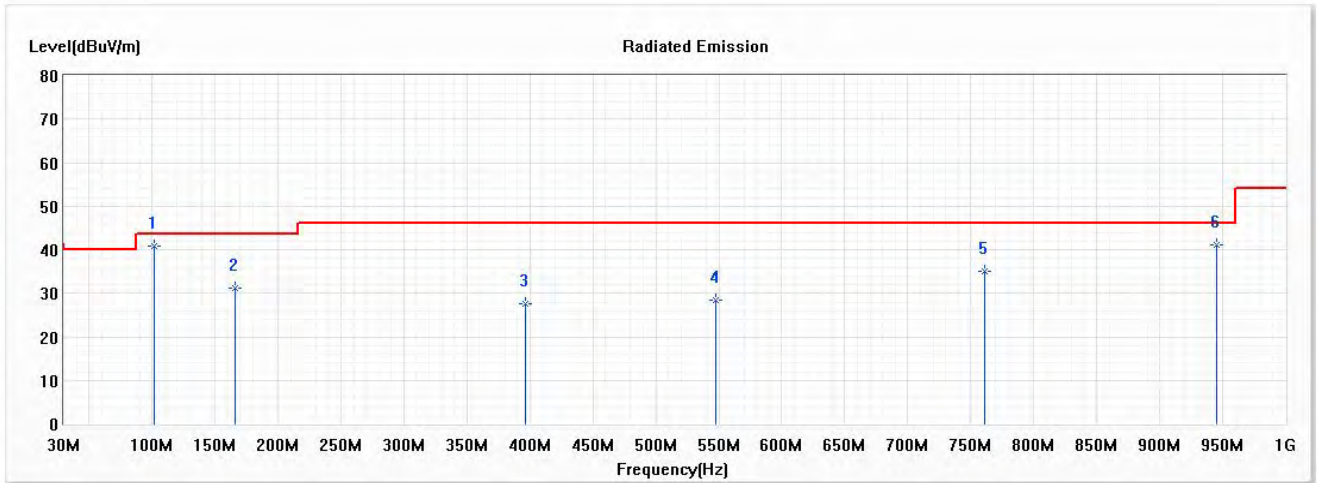


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	40.93	43.50	-2.57	56.09	-15.16	QP
2	166.362	31.08	43.50	-12.42	41.41	-10.33	QP
3	396.913	27.45	46.00	-18.55	34.80	-7.35	QP
4	547.333	28.43	46.00	-17.57	32.78	-4.35	QP
5	761.014	34.96	46.00	-11.04	35.80	-0.84	QP
6	945.174	41.23	46.00	-4.77	39.73	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 8 SISO A: Transmit (802.11ax-80BW_36Mbps) (5290MHz)

Vertical

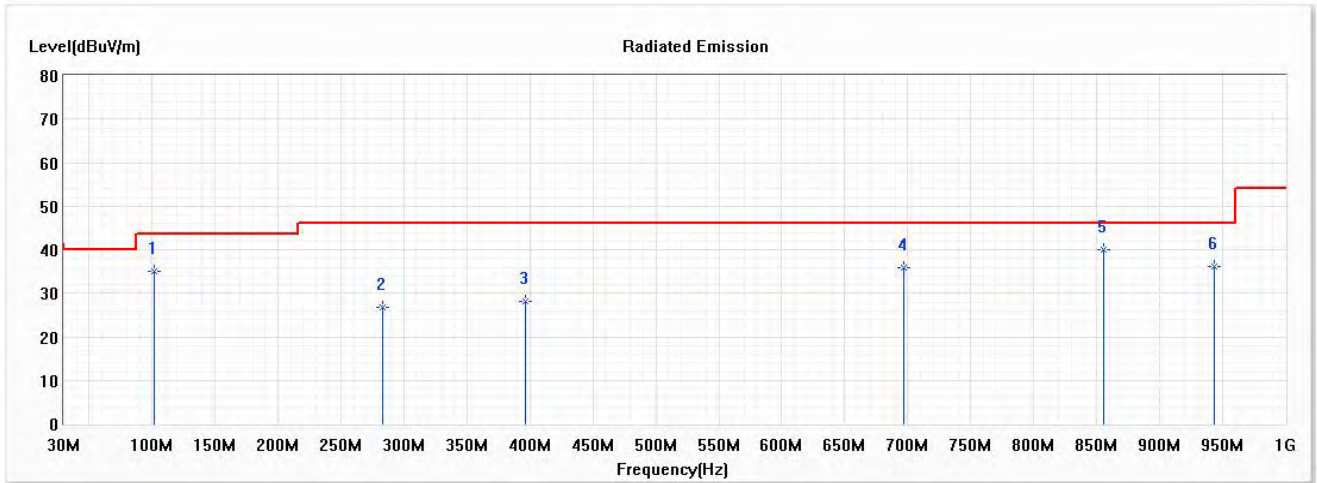


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	35.02	43.50	-8.48	50.18	-15.16	QP
2	283.043	26.77	46.00	-19.23	36.89	-10.12	QP
3	396.913	28.09	46.00	-17.91	35.44	-7.35	QP
4	696.348	35.92	46.00	-10.08	38.00	-2.08	QP
* 5	855.203	39.89	46.00	-6.11	39.74	0.15	QP
6	943.768	36.27	46.00	-9.73	34.79	1.48	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 8 SISO A: Transmit (802.11ax-80BW_36Mbps) (5530MHz)

Horizontal

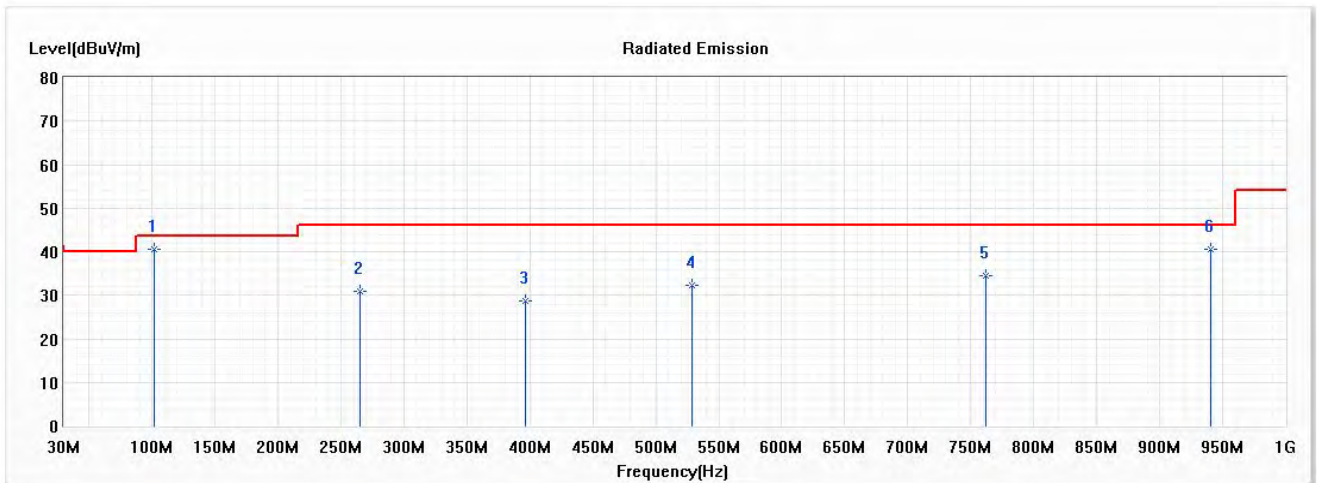


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	40.66	43.50	-2.84	55.82	-15.16	QP
2	264.768	30.93	46.00	-15.07	41.88	-10.95	QP
3	396.913	28.59	46.00	-17.41	35.94	-7.35	QP
4	529.058	32.20	46.00	-13.80	36.95	-4.75	QP
5	762.420	34.52	46.00	-11.48	35.33	-0.81	QP
6	940.957	40.54	46.00	-5.46	39.13	1.41	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 8 SISO A: Transmit (802.11ax-80BW_36Mbps) (5530MHz)

Vertical

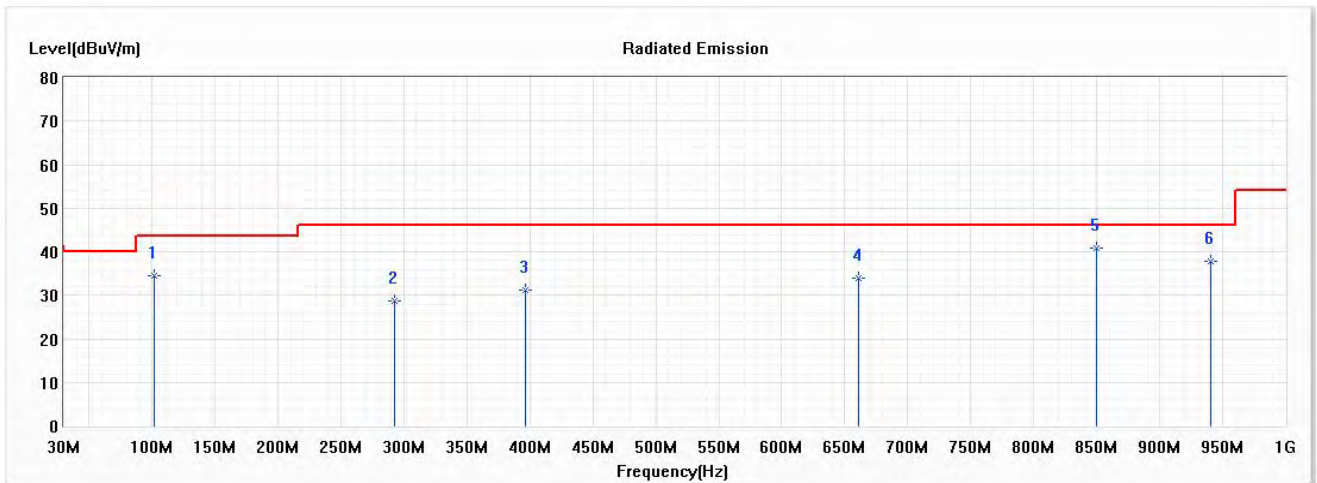


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	34.62	43.50	-8.88	49.78	-15.16	QP
2	292.884	28.64	46.00	-17.36	38.54	-9.90	QP
3	396.913	31.09	46.00	-14.91	38.44	-7.35	QP
4	661.203	33.99	46.00	-12.01	36.52	-2.53	QP
* 5	849.580	40.95	46.00	-5.05	40.72	0.23	QP
6	940.957	37.89	46.00	-8.11	36.48	1.41	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 8 SISO A: Transmit (802.11ax-80BW_36Mbps) (5775MHz)

Horizontal

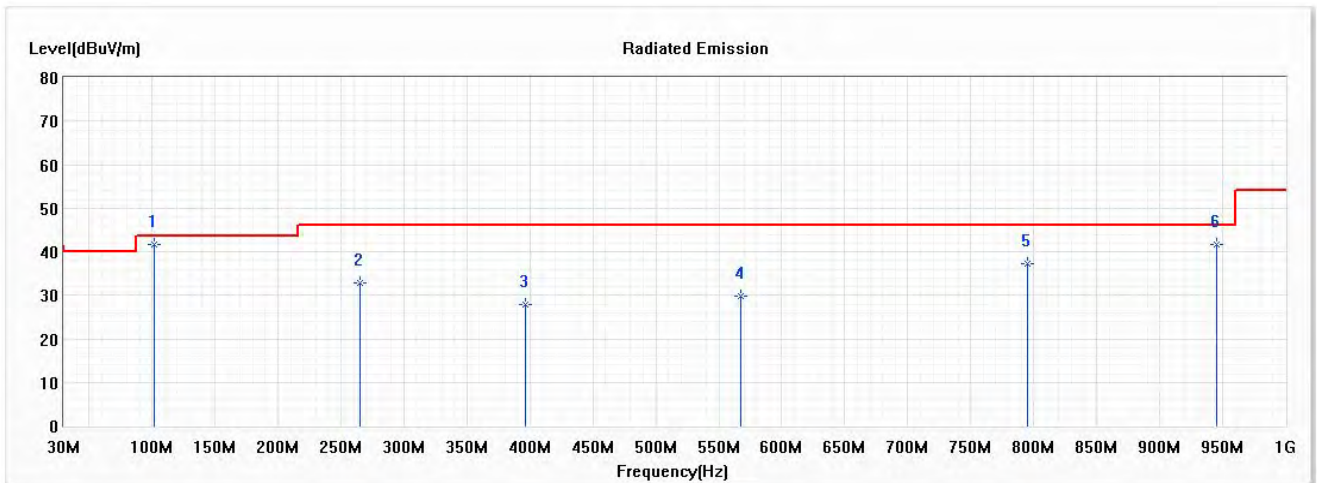


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	41.63	43.50	-1.87	56.79	-15.16	QP
2	264.768	32.92	46.00	-13.08	43.87	-10.95	QP
3	396.913	27.93	46.00	-18.07	35.28	-7.35	QP
4	567.014	29.83	46.00	-16.17	33.86	-4.03	QP
5	794.754	37.36	46.00	-8.64	37.75	-0.39	QP
6	945.174	41.53	46.00	-4.47	40.03	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 8 SISO A: Transmit (802.11ax-80BW_36Mbps) (5775MHz)

Vertical

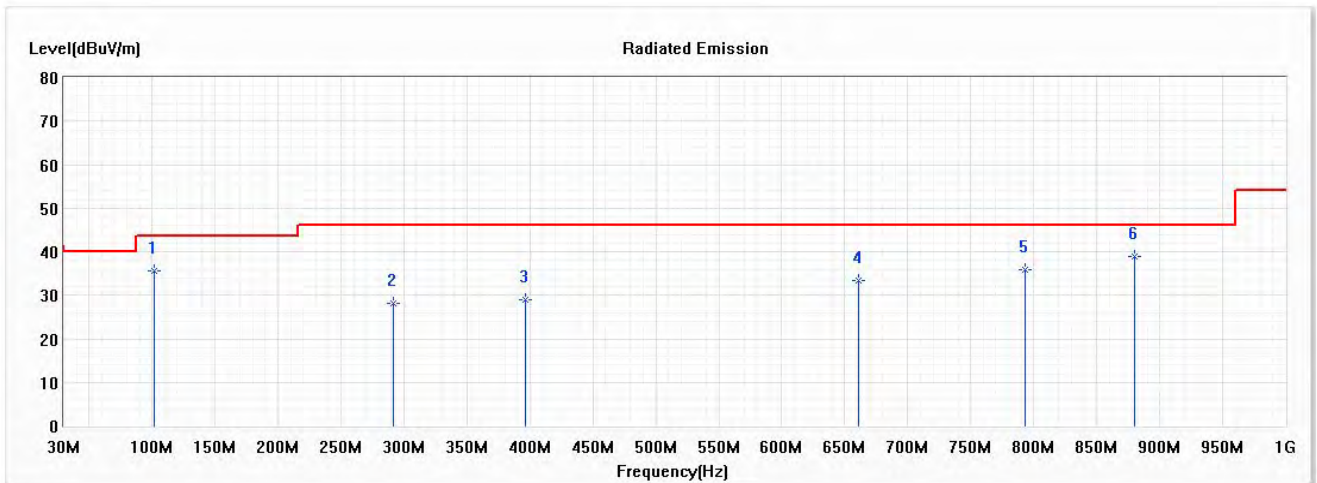


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	35.66	43.50	-7.84	50.82	-15.16	QP
2	291.478	28.25	46.00	-17.75	38.18	-9.93	QP
3	396.913	29.01	46.00	-16.99	36.36	-7.35	QP
4	661.203	33.47	46.00	-12.53	36.00	-2.53	QP
5	793.348	35.99	46.00	-10.01	36.41	-0.42	QP
* 6	880.507	38.77	46.00	-7.23	38.35	0.42	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 9 SISO A: Transmit (802.11ax-160BW_72.1Mbps) (5250MHz)

Horizontal

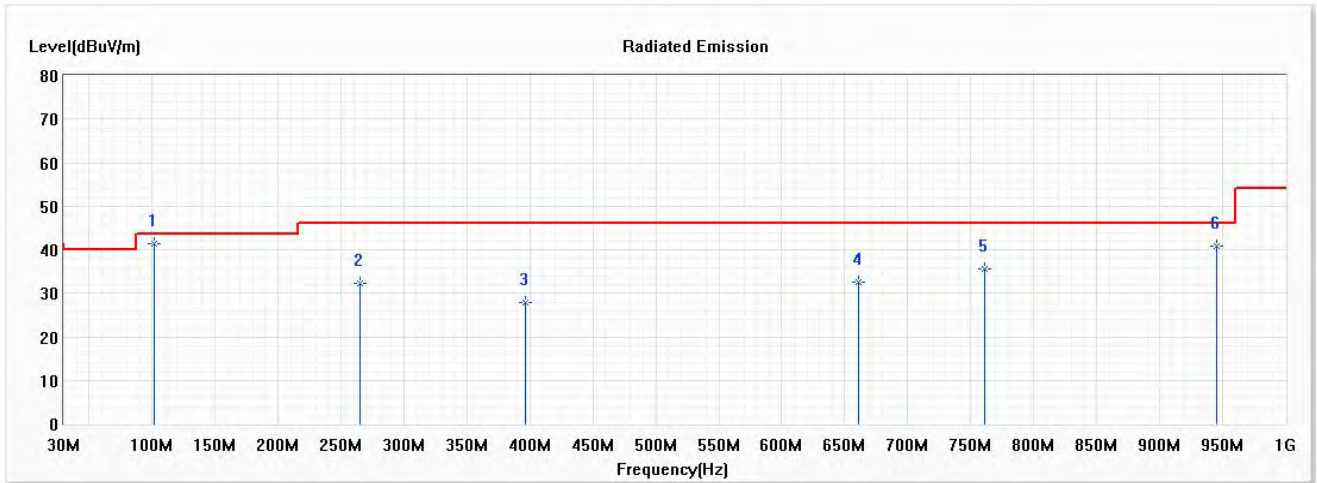


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	41.38	43.50	-2.12	56.54	-15.16	QP
2	264.768	32.31	46.00	-13.69	43.26	-10.95	QP
3	396.913	27.88	46.00	-18.12	35.23	-7.35	QP
4	661.203	32.47	46.00	-13.53	35.00	-2.53	QP
5	761.014	35.58	46.00	-10.42	36.42	-0.84	QP
6	945.174	40.93	46.00	-5.07	39.43	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 9 SISO A: Transmit (802.11ax-160BW_72.1Mbps) (5250MHz)

Vertical

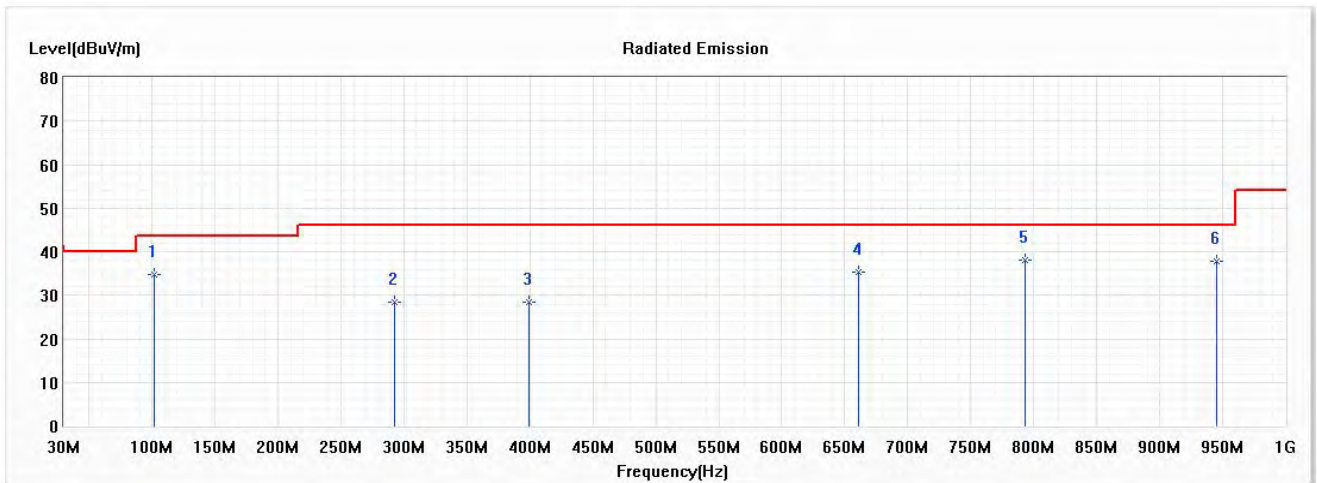


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	34.81	43.50	-8.69	49.97	-15.16	QP
2	292.884	28.53	46.00	-17.47	38.43	-9.90	QP
3	399.725	28.44	46.00	-17.56	35.74	-7.30	QP
4	661.203	35.18	46.00	-10.82	37.71	-2.53	QP
* 5	793.348	37.96	46.00	-8.04	38.38	-0.42	QP
6	945.174	37.82	46.00	-8.18	36.32	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 9 SISO A: Transmit (802.11ax-160BW_72.1Mbps) (5570MHz)

Horizontal

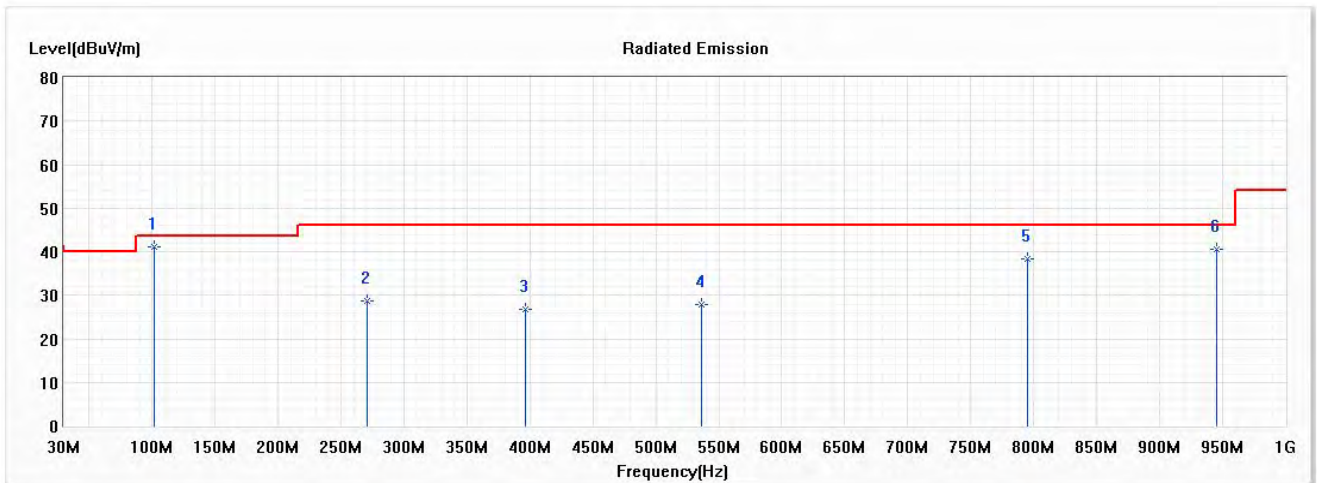


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	41.23	43.50	-2.27	56.39	-15.16	QP
2	270.391	28.69	46.00	-17.31	39.39	-10.70	QP
3	396.913	26.74	46.00	-19.26	34.09	-7.35	QP
4	536.087	27.88	46.00	-18.12	32.43	-4.55	QP
5	794.754	38.21	46.00	-7.79	38.60	-0.39	QP
6	945.174	40.60	46.00	-5.40	39.10	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/18
 Test Mode : Mode 9 SISO A: Transmit (802.11ax-160BW_72.1Mbps) (5570MHz)

Vertical

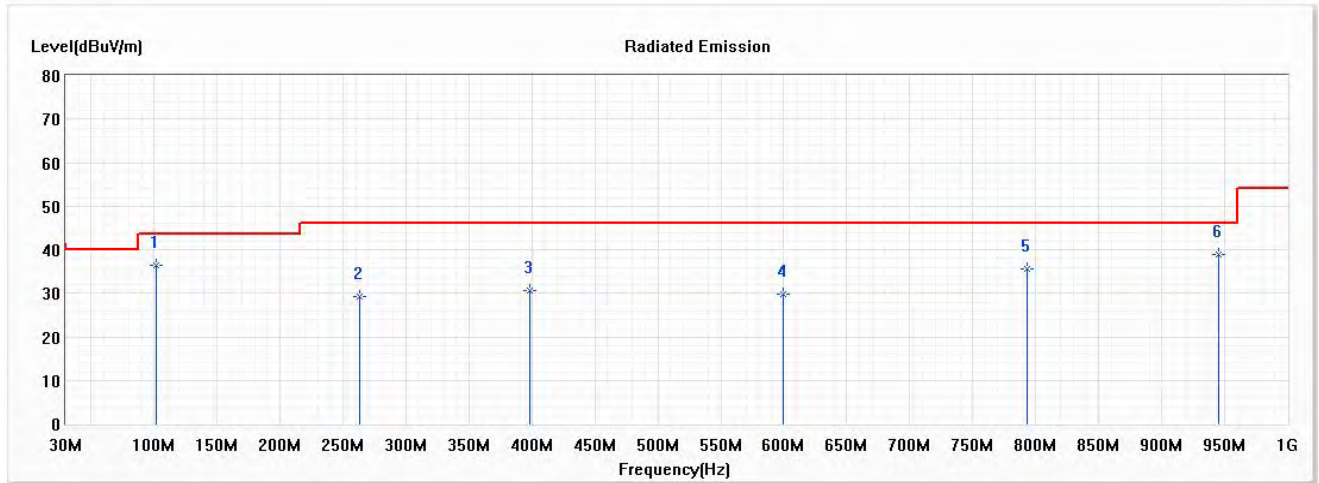


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	36.37	43.50	-7.13	51.53	-15.16	QP
2	263.362	29.24	46.00	-16.76	40.26	-11.02	QP
3	398.319	30.53	46.00	-15.47	37.85	-7.32	QP
4	599.348	29.76	46.00	-16.24	32.95	-3.19	QP
5	793.348	35.50	46.00	-10.50	35.92	-0.42	QP
* 6	945.174	39.00	46.00	-7.00	37.50	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 15 SISO B Transmit (802.11ax-20BW_8.6Mbps) (5200MHz)

Horizontal

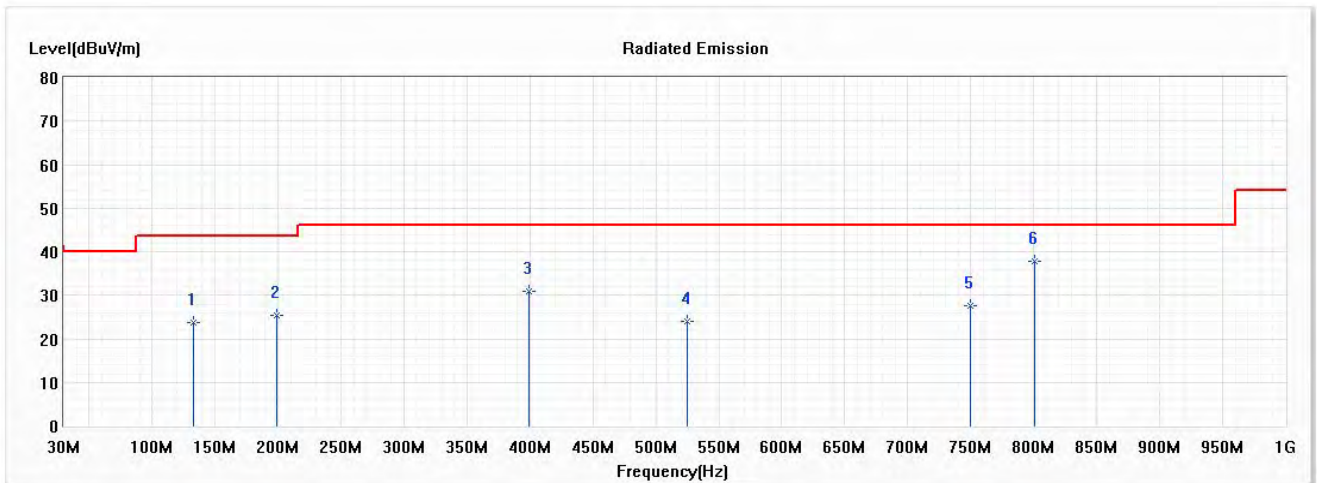


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	132.623	23.69	43.50	-19.81	35.35	-11.66	QP
2	198.696	25.46	43.50	-18.04	38.82	-13.36	QP
3	399.725	30.90	46.00	-15.10	38.20	-7.30	QP
4	524.841	24.03	46.00	-21.97	28.79	-4.76	QP
5	749.768	27.52	46.00	-18.48	28.41	-0.89	QP
* 6	800.377	37.67	46.00	-8.33	38.04	-0.37	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 15 SISO B Transmit (802.11ax-20BW_8.6Mbps) (5200MHz)

Vertical

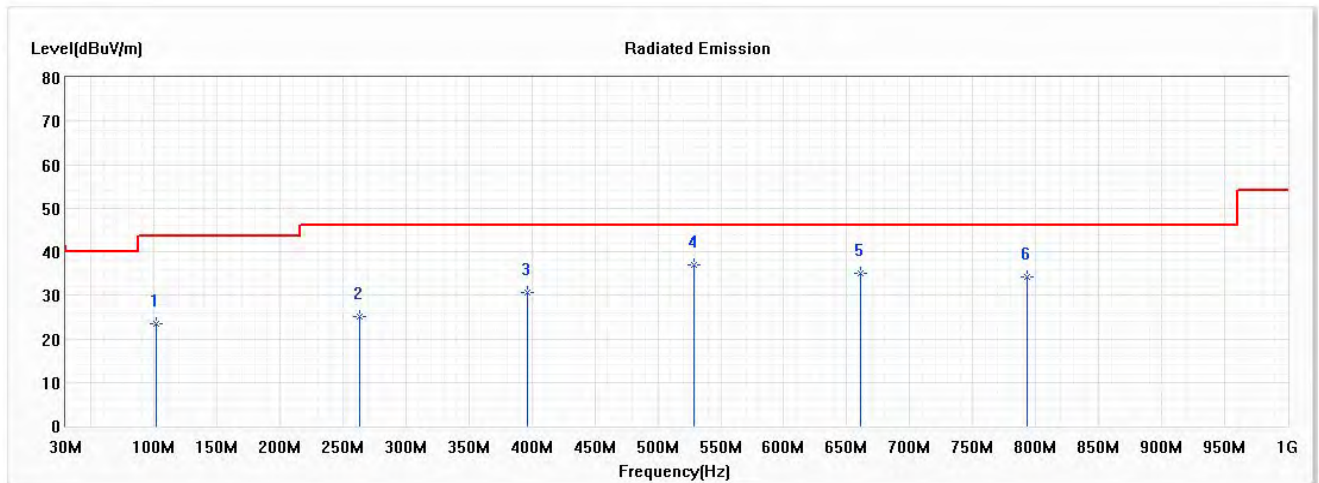


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	23.42	43.50	-20.08	38.58	-15.16	QP
2	263.362	25.21	46.00	-20.79	36.23	-11.02	QP
3	396.913	30.60	46.00	-15.40	37.95	-7.35	QP
* 4	529.058	36.88	46.00	-9.12	41.63	-4.75	QP
5	661.203	35.04	46.00	-10.96	37.57	-2.53	QP
6	793.348	34.30	46.00	-11.70	34.72	-0.42	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 15 SISO B Transmit (802.11ax-20BW_8.6Mbps) (5300MHz)

Horizontal

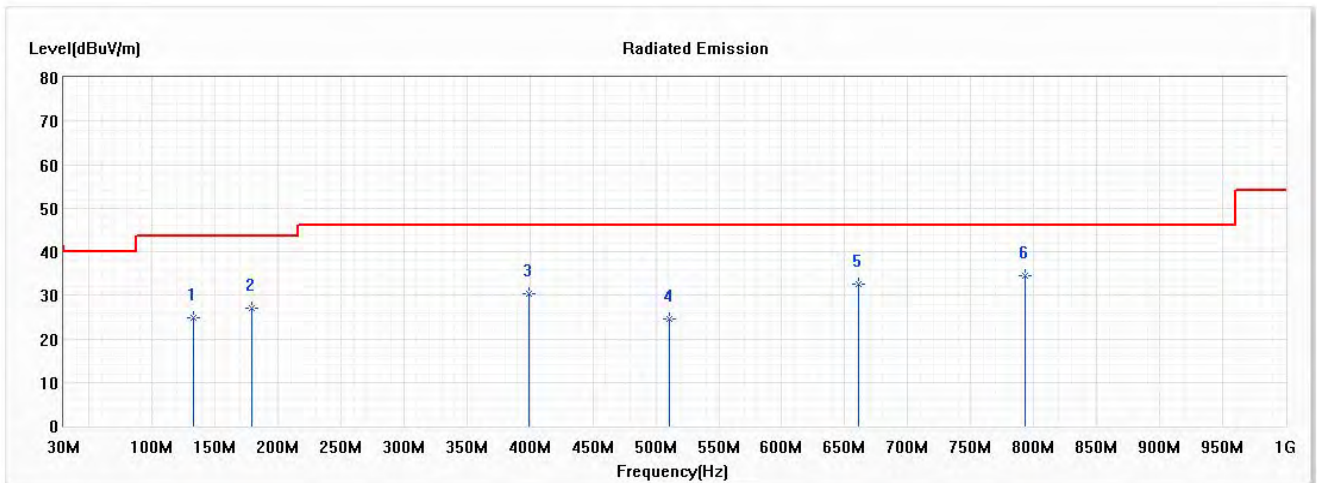


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	132.623	24.90	43.50	-18.60	36.56	-11.66	QP
2	179.014	26.94	43.50	-16.56	38.51	-11.57	QP
3	399.725	30.29	46.00	-15.71	37.59	-7.30	QP
4	510.783	24.54	46.00	-21.46	29.70	-5.16	QP
5	661.203	32.67	46.00	-13.33	35.20	-2.53	QP
* 6	793.348	34.41	46.00	-11.59	34.83	-0.42	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 15 SISO B Transmit (802.11ax-20BW_8.6Mbps) (5300MHz)

Vertical

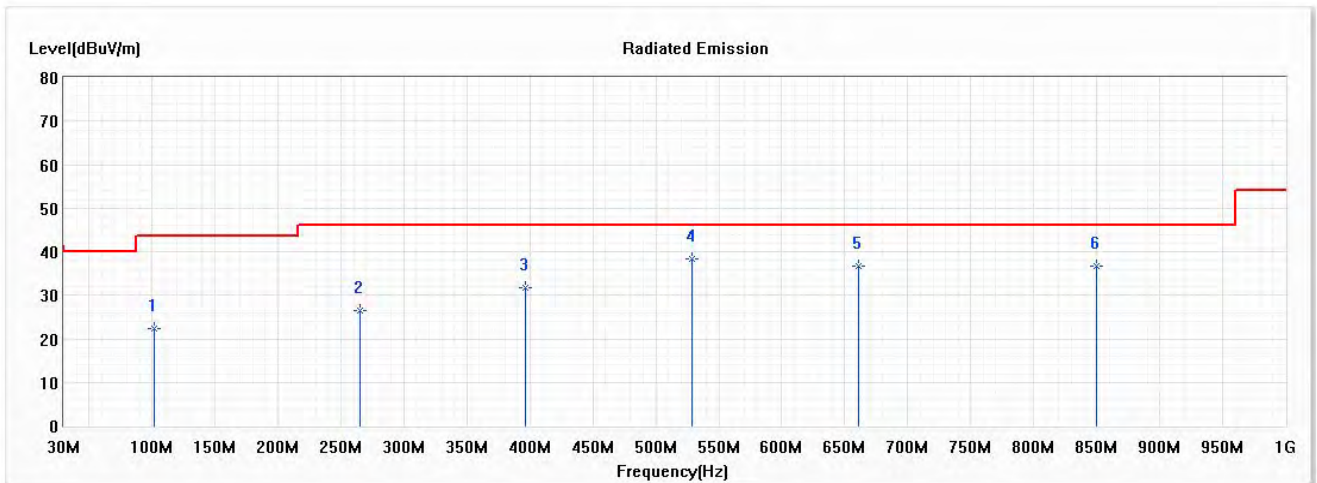


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	22.33	43.50	-21.17	37.49	-15.16	QP
2	264.768	26.43	46.00	-19.57	37.38	-10.95	QP
3	396.913	31.62	46.00	-14.38	38.97	-7.35	QP
* 4	529.058	38.37	46.00	-7.63	43.12	-4.75	QP
5	661.203	36.68	46.00	-9.32	39.21	-2.53	QP
6	849.580	36.67	46.00	-9.33	36.44	0.23	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 15 SISO B Transmit (802.11ax-20BW_8.6Mbps) (5600MHz)

Horizontal

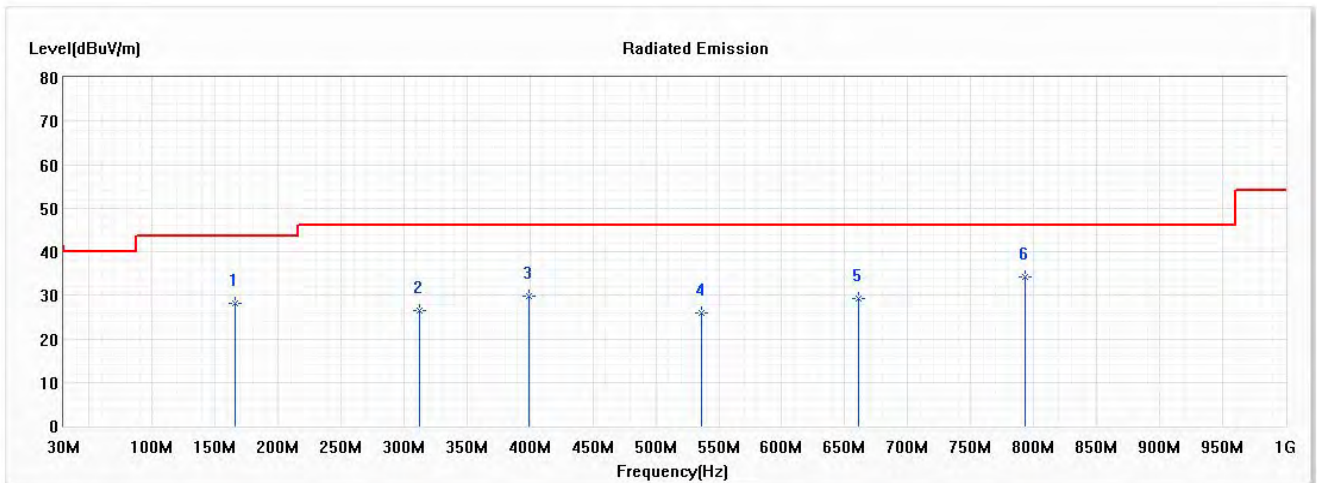


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	166.362	28.10	43.50	-15.40	38.43	-10.33	QP
2	312.565	26.53	46.00	-19.47	35.98	-9.45	QP
3	399.725	29.74	46.00	-16.26	37.04	-7.30	QP
4	536.087	25.87	46.00	-20.13	30.42	-4.55	QP
5	661.203	29.32	46.00	-16.68	31.85	-2.53	QP
* 6	793.348	34.10	46.00	-11.90	34.52	-0.42	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 15 SISO B Transmit (802.11ax-20BW_8.6Mbps) (5580MHz)

Vertical

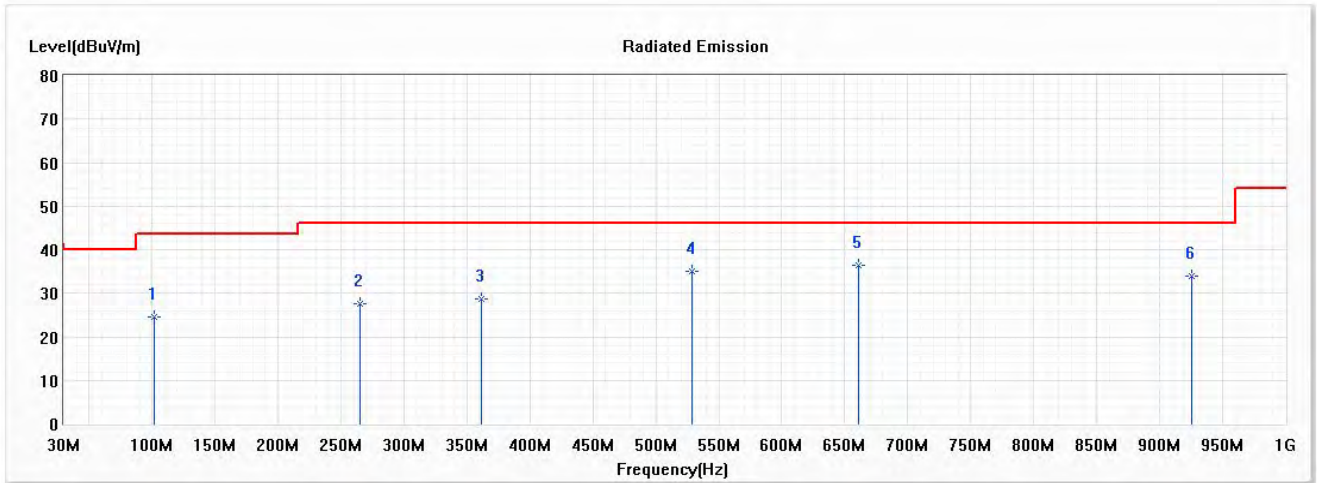


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	24.68	43.50	-18.82	39.84	-15.16	QP
2	264.768	27.61	46.00	-18.39	38.56	-10.95	QP
3	361.768	28.80	46.00	-17.20	37.05	-8.25	QP
4	529.058	35.11	46.00	-10.89	39.86	-4.75	QP
* 5	661.203	36.49	46.00	-9.51	39.02	-2.53	QP
6	925.493	33.81	46.00	-12.19	32.62	1.19	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 15 SISO B Transmit (802.11 ax-20BW_8.6Mbps) (5785MHz)

Horizontal

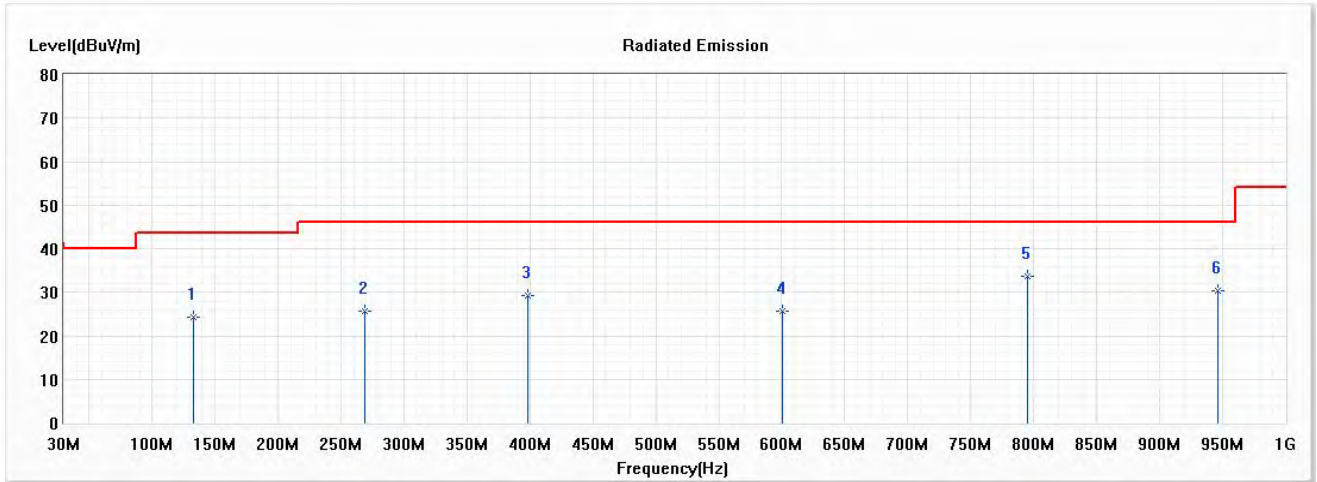


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	132.623	24.39	43.50	-19.11	36.05	-11.66	QP
2	268.986	25.60	46.00	-20.40	36.36	-10.76	QP
3	398.319	29.24	46.00	-16.76	36.56	-7.32	QP
4	600.754	25.67	46.00	-20.33	28.84	-3.17	QP
* 5	794.754	33.54	46.00	-12.46	33.93	-0.39	QP
6	946.580	30.28	46.00	-15.72	28.74	1.54	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 15 SISO B Transmit (802.11ax-20BW_8.6Mbps) (5785MHz)

Vertical

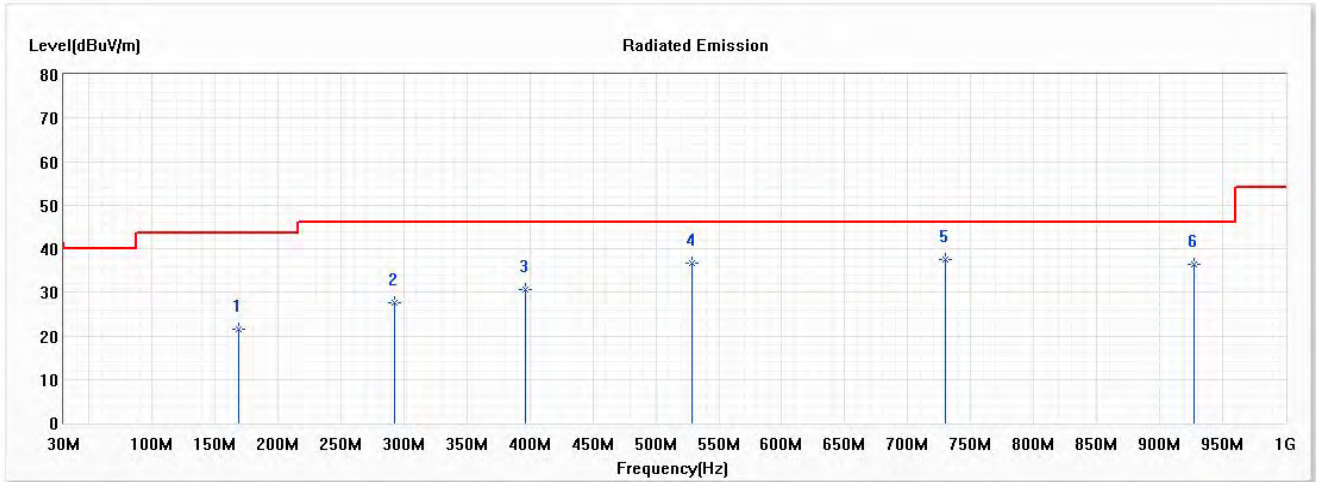


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	169.174	21.53	43.50	-21.97	31.85	-10.32	QP
2	292.884	27.67	46.00	-18.33	37.57	-9.90	QP
3	396.913	30.52	46.00	-15.48	37.87	-7.35	QP
4	529.058	36.67	46.00	-9.33	41.42	-4.75	QP
* 5	730.087	37.64	46.00	-8.36	39.05	-1.41	QP
6	926.899	36.34	46.00	-9.66	35.12	1.22	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 16 SISO B: Transmit (802.11ax-40BW_17.2Mbps) (5230MHz)

Horizontal

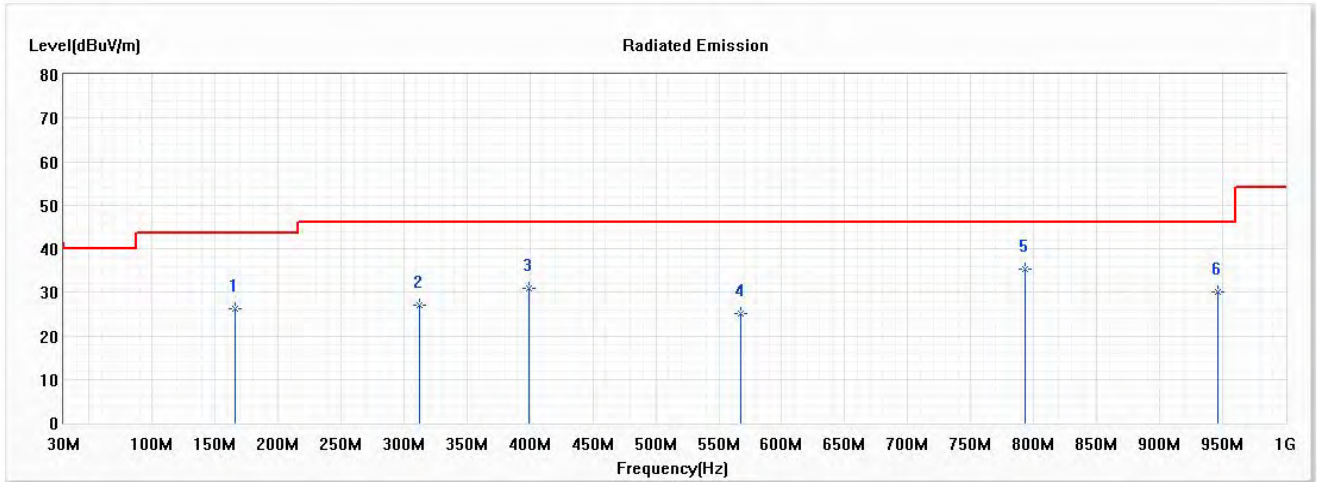


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	166.362	26.29	43.50	-17.21	36.62	-10.33	QP
2	312.565	27.11	46.00	-18.89	36.56	-9.45	QP
3	399.725	31.02	46.00	-14.98	38.32	-7.30	QP
4	567.014	25.09	46.00	-20.91	29.12	-4.03	QP
* 5	793.348	35.40	46.00	-10.60	35.82	-0.42	QP
6	946.580	29.99	46.00	-16.01	28.45	1.54	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 16 SISO B: Transmit (802.11ax-40BW_17.2Mbps) (5230MHz)

Vertical

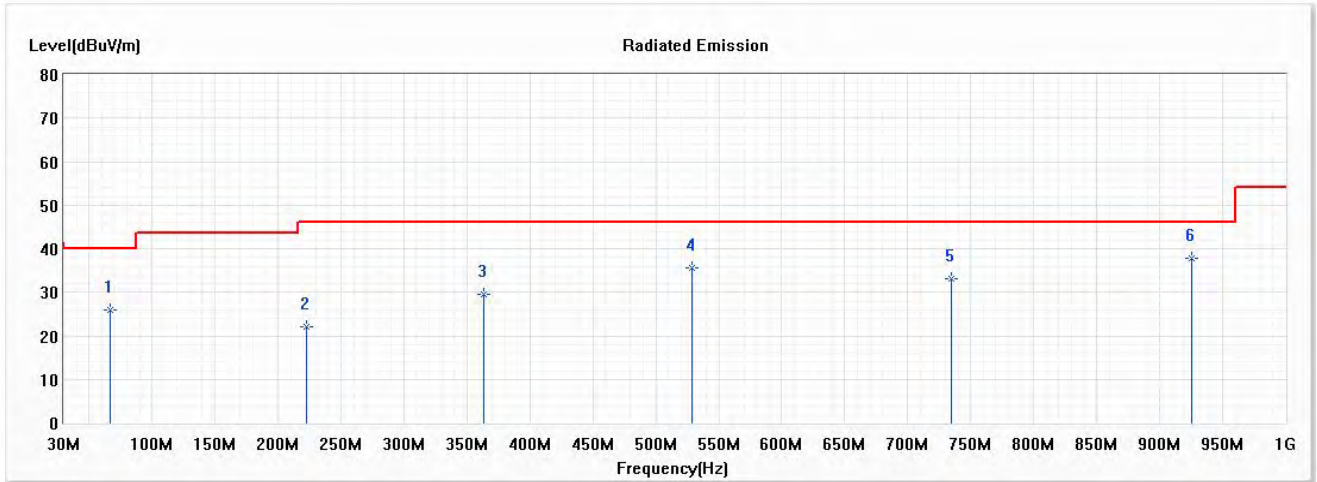


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	66.551	25.93	40.00	-14.07	38.43	-12.50	QP
2	222.594	22.15	46.00	-23.85	34.72	-12.57	QP
3	363.174	29.46	46.00	-16.54	37.68	-8.22	QP
4	529.058	35.53	46.00	-10.47	40.28	-4.75	QP
5	734.304	33.04	46.00	-12.96	34.35	-1.31	QP
* 6	925.493	37.83	46.00	-8.17	36.64	1.19	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 16 SISO B: Transmit (802.11ax-40BW_17.2Mbps) (5310MHz)

Horizontal

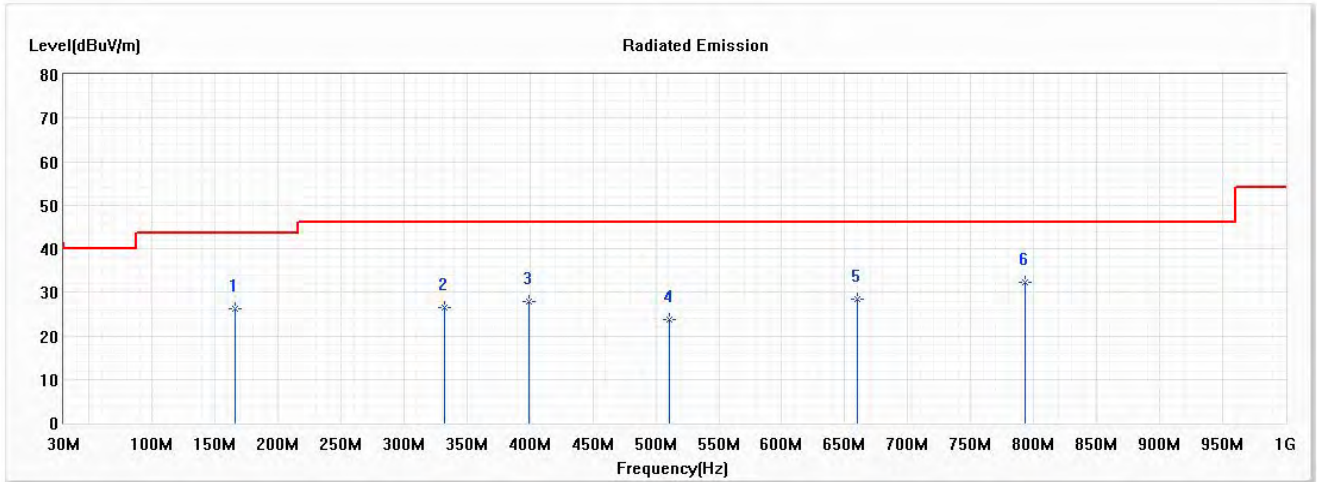


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	166.362	26.27	43.50	-17.23	36.60	-10.33	QP
2	332.246	26.41	46.00	-19.59	35.27	-8.86	QP
3	399.725	27.89	46.00	-18.11	35.19	-7.30	QP
4	510.783	23.66	46.00	-22.34	28.82	-5.16	QP
5	659.797	28.38	46.00	-17.62	30.89	-2.51	QP
* 6	793.348	32.16	46.00	-13.84	32.58	-0.42	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 16 SISO B: Transmit (802.11ax-40BW_17.2Mbps) (5310MHz)

Vertical

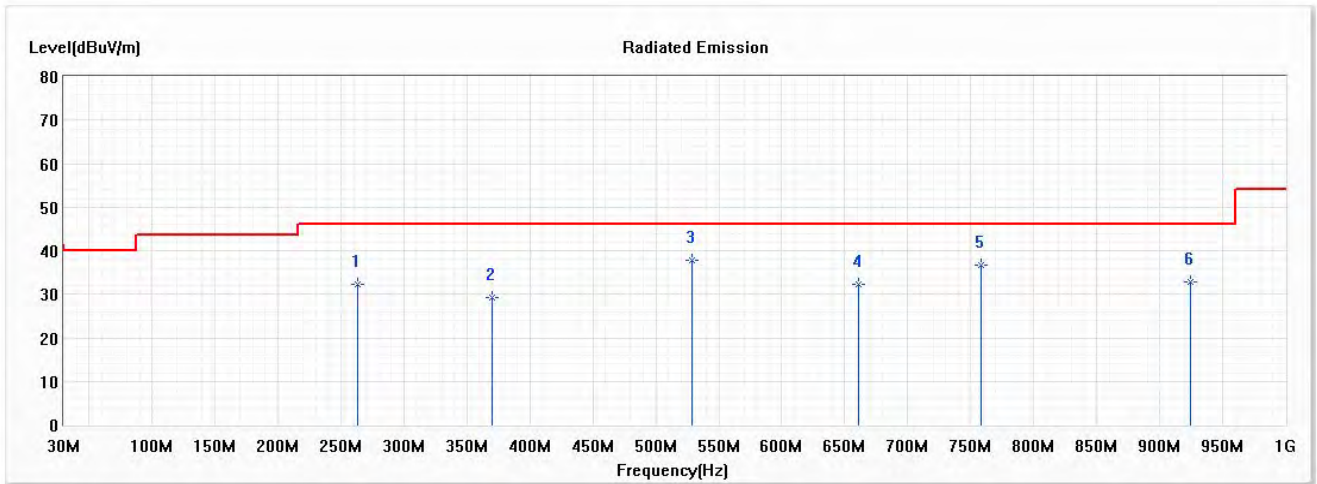


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	263.362	32.38	46.00	-13.62	43.40	-11.02	QP
2	370.203	29.13	46.00	-16.87	37.09	-7.96	QP
* 3	529.058	37.66	46.00	-8.34	42.41	-4.75	QP
4	661.203	32.30	46.00	-13.70	34.83	-2.53	QP
5	758.203	36.71	46.00	-9.29	37.57	-0.86	QP
6	924.087	32.85	46.00	-13.15	31.67	1.18	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 16 SISO B: Transmit (802.11ax-40BW_17.2Mbps) (5590MHz)

Horizontal

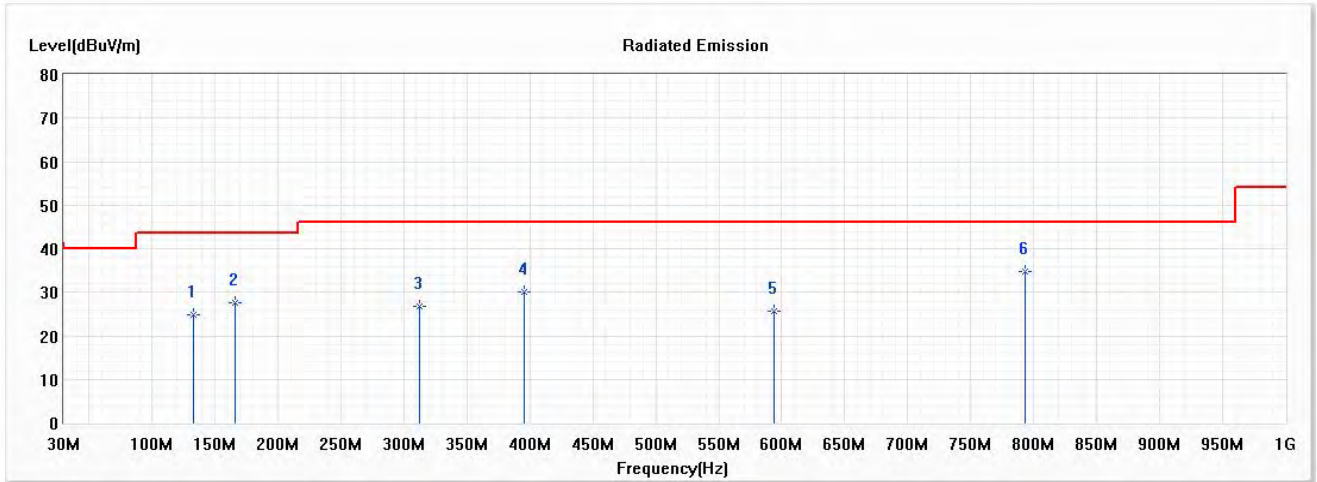


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	132.623	24.72	43.50	-18.78	36.38	-11.66	QP
2	166.362	27.50	43.50	-16.00	37.83	-10.33	QP
3	312.565	26.64	46.00	-19.36	36.09	-9.45	QP
4	395.507	29.98	46.00	-16.02	37.36	-7.38	QP
5	593.725	25.60	46.00	-20.40	28.85	-3.25	QP
* 6	793.348	34.75	46.00	-11.25	35.17	-0.42	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 16 SISO B: Transmit (802.11ax-40BW_17.2Mbps) (5590MHz)

Vertical

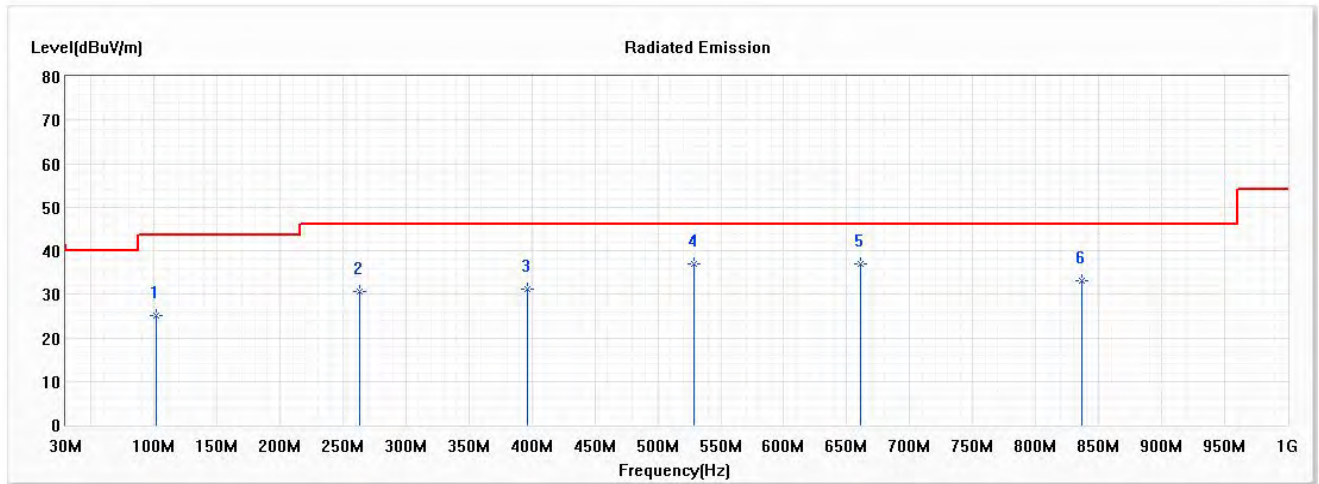


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	24.99	43.50	-18.51	40.15	-15.16	QP
2	263.362	30.60	46.00	-15.40	41.62	-11.02	QP
3	396.913	31.04	46.00	-14.96	38.39	-7.35	QP
4	529.058	36.92	46.00	-9.08	41.67	-4.75	QP
* 5	661.203	37.05	46.00	-8.95	39.58	-2.53	QP
6	836.928	33.16	46.00	-12.84	33.20	-0.04	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 16 SISO B: Transmit (802.11ax-40BW_17.2Mbps) (5795MHz)

Horizontal

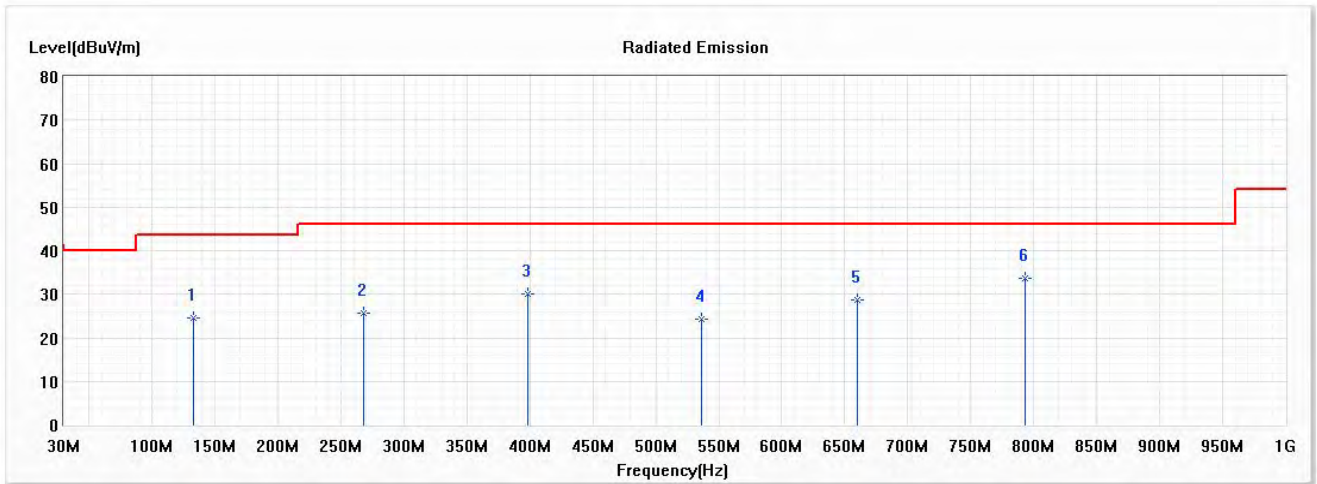


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	132.623	24.62	43.50	-18.88	36.28	-11.66	QP
2	267.580	25.56	46.00	-20.44	36.40	-10.84	QP
3	398.319	30.06	46.00	-15.94	37.38	-7.32	QP
4	536.087	24.36	46.00	-21.64	28.91	-4.55	QP
5	659.797	28.71	46.00	-17.29	31.22	-2.51	QP
* 6	793.348	33.78	46.00	-12.22	34.20	-0.42	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 16 SISO B: Transmit (802.11ax-40BW_17.2Mbps) (5795MHz)

Vertical

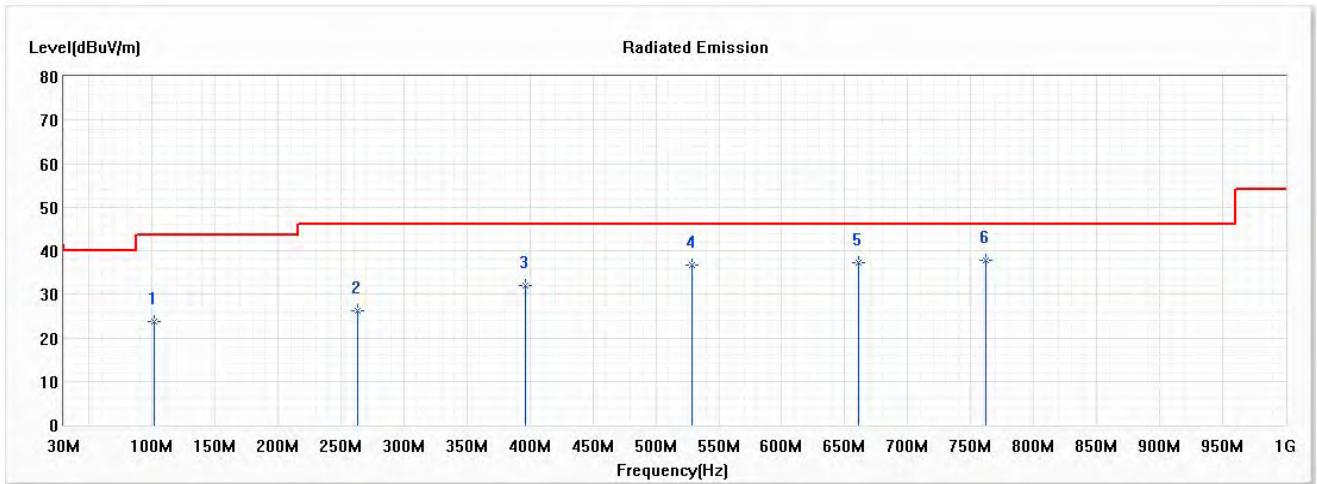


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	23.74	43.50	-19.76	38.90	-15.16	QP
2	263.362	26.27	46.00	-19.73	37.29	-11.02	QP
3	396.913	31.90	46.00	-14.10	39.25	-7.35	QP
4	529.058	36.60	46.00	-9.40	41.35	-4.75	QP
5	661.203	37.12	46.00	-8.88	39.65	-2.53	QP
* 6	762.420	37.71	46.00	-8.29	38.52	-0.81	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 17 SISO B: Transmit (802.11ax-80BW_36Mbps) (5210MHz)

Horizontal

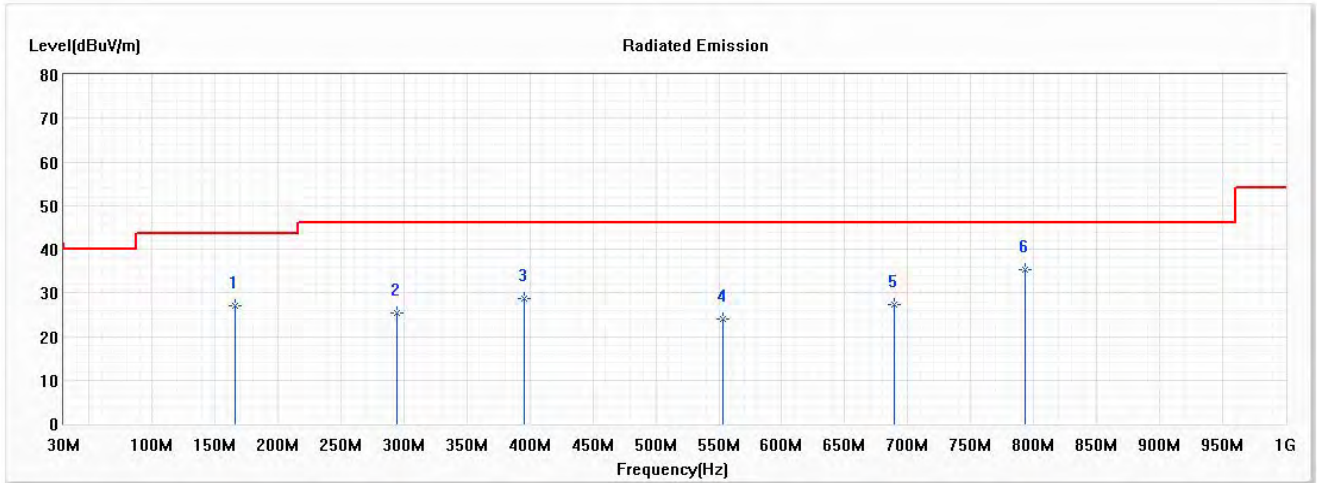


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	166.362	27.00	43.50	-16.50	37.33	-10.33	QP
2	294.290	25.37	46.00	-20.63	35.23	-9.86	QP
3	395.507	28.77	46.00	-17.23	36.15	-7.38	QP
4	552.957	24.08	46.00	-21.92	28.38	-4.30	QP
5	689.319	27.41	46.00	-18.59	29.60	-2.19	QP
* 6	793.348	35.29	46.00	-10.71	35.71	-0.42	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 17 SISO B: Transmit (802.11ax-80BW_36Mbps) (5210MHz)

Vertical

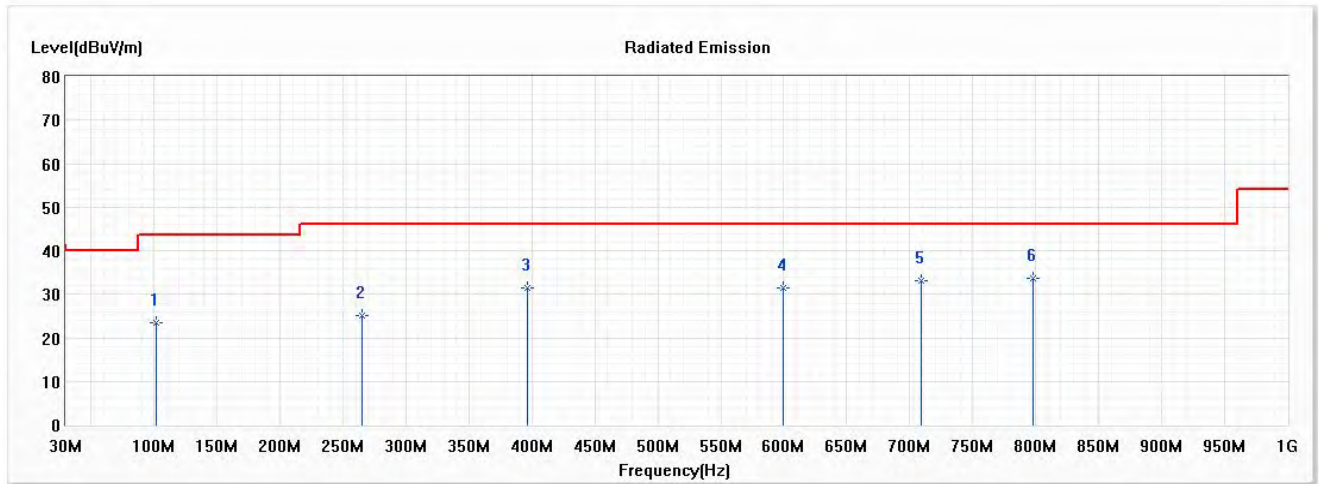


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	101.696	23.47	43.50	-20.03	38.63	-15.16	QP
2	264.768	25.23	46.00	-20.77	36.18	-10.95	QP
3	396.913	31.32	46.00	-14.68	38.67	-7.35	QP
4	599.348	31.50	46.00	-14.50	34.69	-3.19	QP
5	709.000	33.10	46.00	-12.90	34.90	-1.80	QP
* 6	797.565	33.70	46.00	-12.30	34.08	-0.38	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 17 SISO B: Transmit (802.11ax-80BW_36Mbps) (5290MHz)

Horizontal

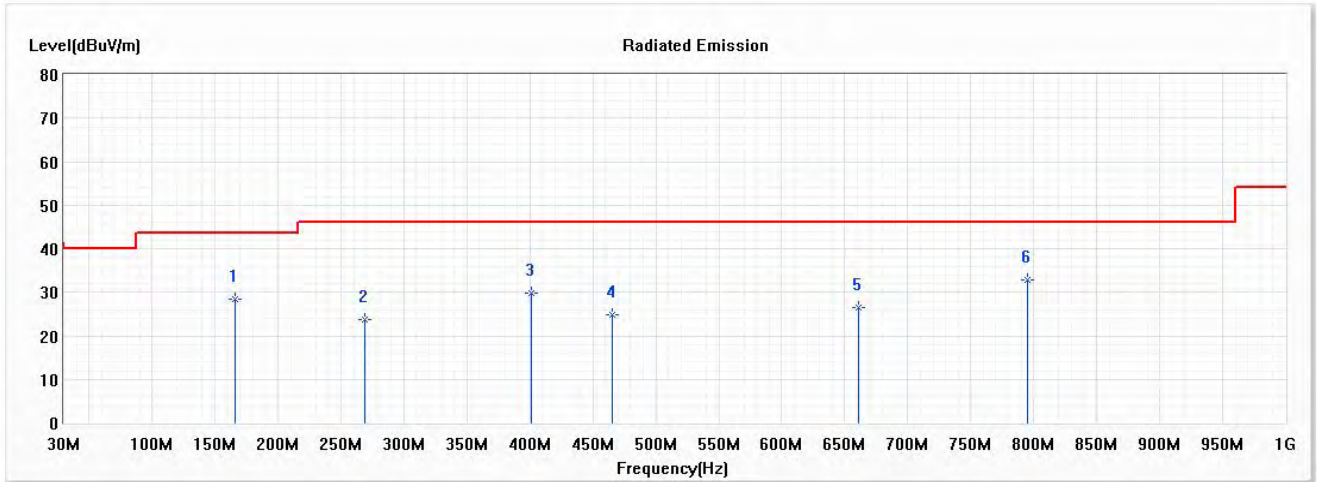


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	166.362	28.43	43.50	-15.07	38.76	-10.33	QP
2	268.986	23.69	46.00	-22.31	34.45	-10.76	QP
3	401.130	29.88	46.00	-16.12	37.12	-7.24	QP
4	465.797	24.76	46.00	-21.24	30.70	-5.94	QP
5	661.203	26.39	46.00	-19.61	28.92	-2.53	QP
* 6	794.754	32.72	46.00	-13.28	33.11	-0.39	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 17 SISO B: Transmit (802.11ax-80BW_36Mbps) (5290MHz)

Vertical

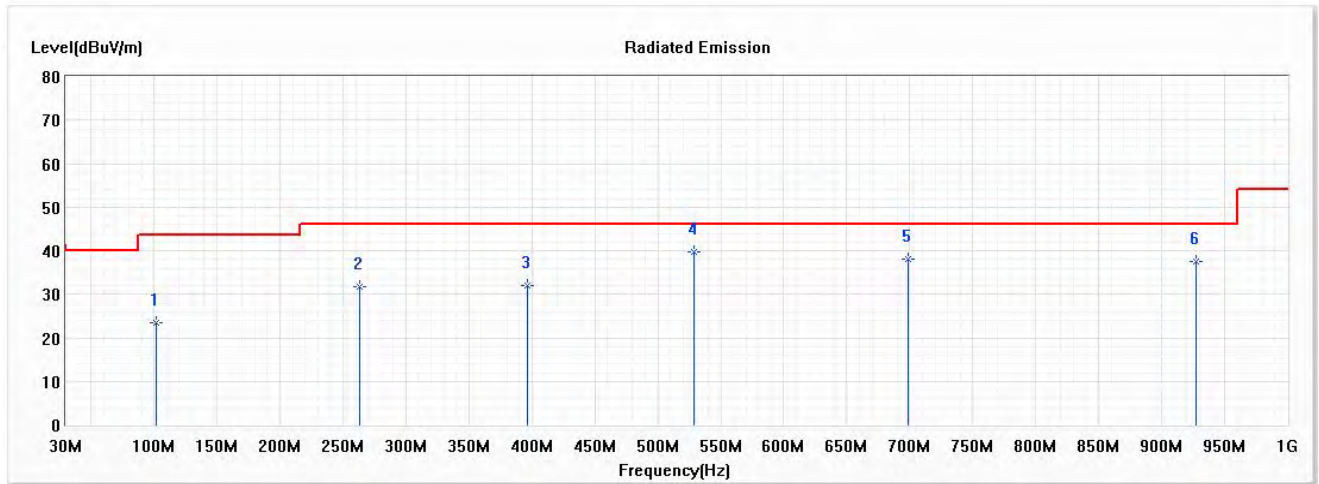


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	23.40	43.50	-20.10	38.56	-15.16	QP
2	263.362	31.59	46.00	-14.41	42.61	-11.02	QP
3	396.913	32.13	46.00	-13.87	39.48	-7.35	QP
* 4	529.058	39.70	46.00	-6.30	44.45	-4.75	QP
5	699.159	38.15	46.00	-7.85	40.22	-2.07	QP
6	926.899	37.39	46.00	-8.61	36.17	1.22	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 17 SISO B: Transmit (802.11ax-80BW_36Mbps) (5530MHz)

Horizontal

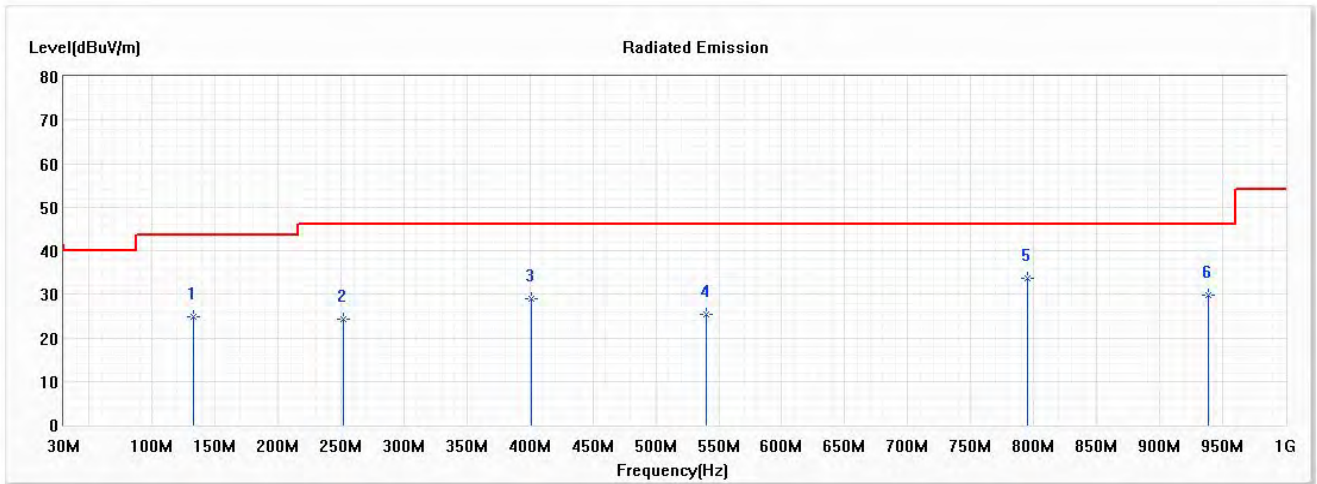


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	132.623	24.92	43.50	-18.58	36.58	-11.66	QP
2	252.116	24.17	46.00	-21.83	35.52	-11.35	QP
3	401.130	28.93	46.00	-17.07	36.17	-7.24	QP
4	540.304	25.31	46.00	-20.69	29.83	-4.52	QP
* 5	794.754	33.75	46.00	-12.25	34.14	-0.39	QP
6	938.145	29.68	46.00	-16.32	28.29	1.39	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 17 SISO B: Transmit (802.11ax-80BW_36Mbps) (5530MHz)

Vertical

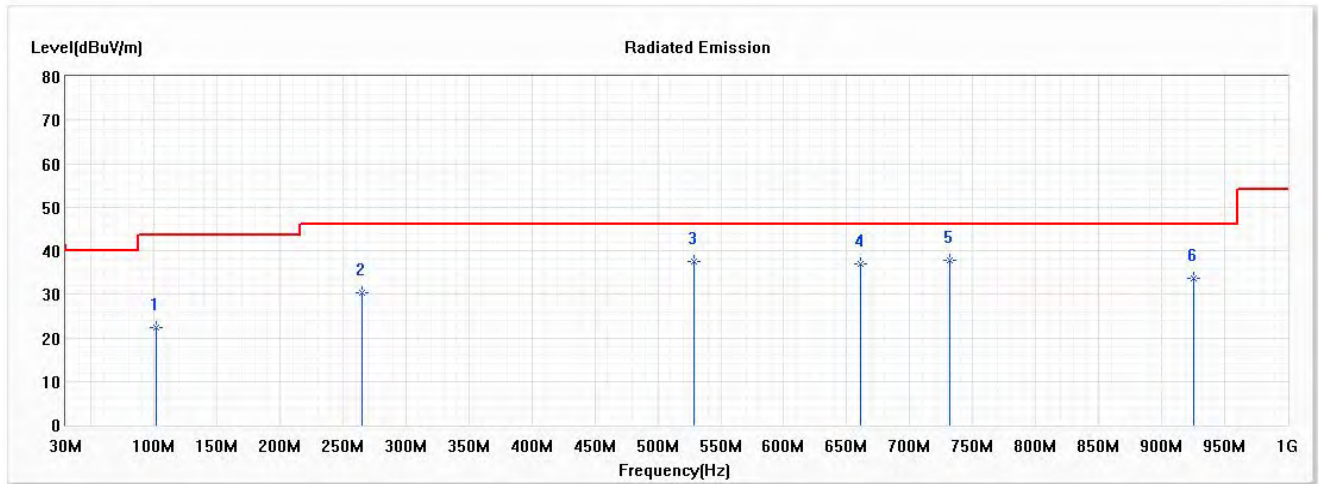


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	22.36	43.50	-21.14	37.52	-15.16	QP
2	264.768	30.43	46.00	-15.57	41.38	-10.95	QP
3	529.058	37.47	46.00	-8.53	42.22	-4.75	QP
4	661.203	36.99	46.00	-9.01	39.52	-2.53	QP
* 5	731.493	37.75	46.00	-8.25	39.13	-1.38	QP
6	925.493	33.71	46.00	-12.29	32.52	1.19	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 17 SISO B: Transmit (802.11ax-80BW_36Mbps) (5775MHz)

Horizontal

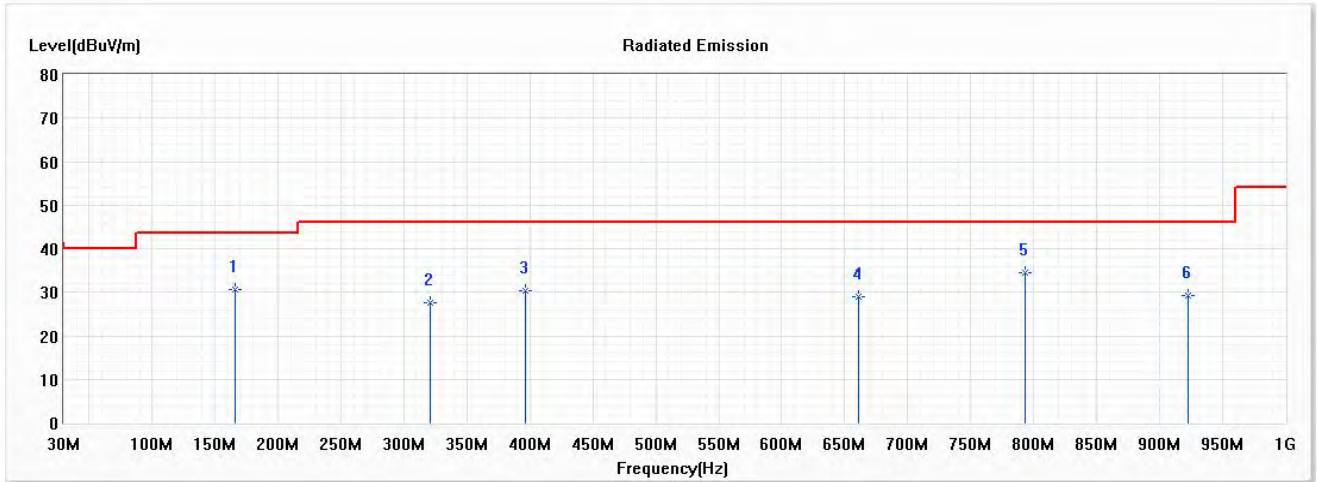


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	166.362	30.71	43.50	-12.79	41.04	-10.33	QP
2	321.000	27.53	46.00	-18.47	36.68	-9.15	QP
3	396.913	30.46	46.00	-15.54	37.81	-7.35	QP
4	661.203	28.83	46.00	-17.17	31.36	-2.53	QP
* 5	793.348	34.50	46.00	-11.50	34.92	-0.42	QP
6	922.681	29.29	46.00	-16.71	28.11	1.18	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 17 SISO B: Transmit (802.11ax-80BW_36Mbps) (5775MHz)

Vertical

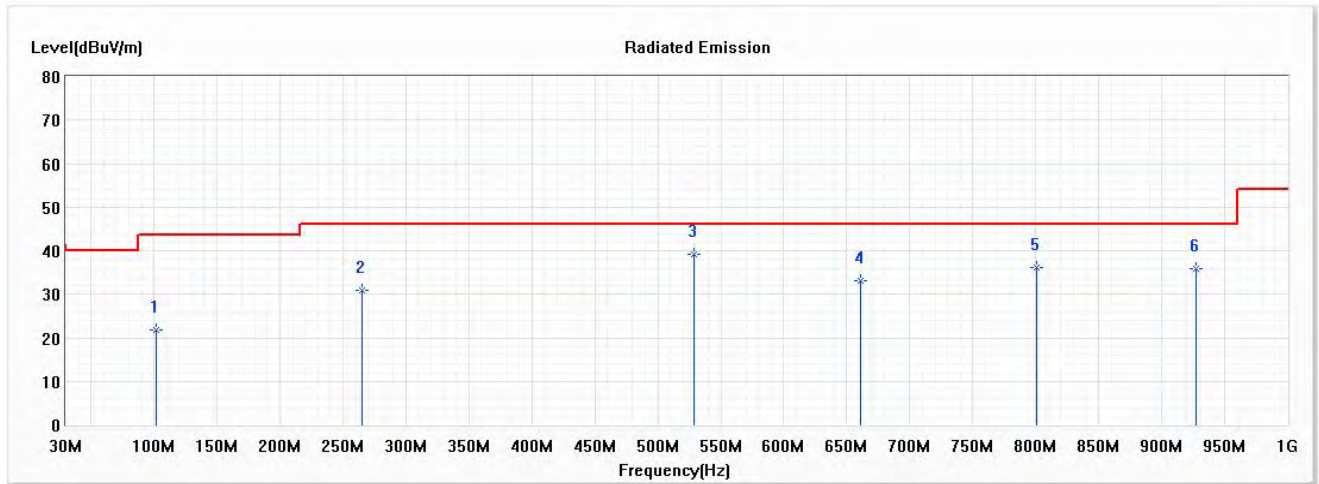


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	101.696	21.91	43.50	-21.59	37.07	-15.16	QP
2	264.768	30.95	46.00	-15.05	41.90	-10.95	QP
* 3	529.058	39.29	46.00	-6.71	44.04	-4.75	QP
4	661.203	33.08	46.00	-12.92	35.61	-2.53	QP
5	800.377	36.11	46.00	-9.89	36.48	-0.37	QP
6	926.899	35.86	46.00	-10.14	34.64	1.22	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 18 SISO B: Transmit (802.11ax-160BW_72.1Mbps) (5250MHz)

Horizontal

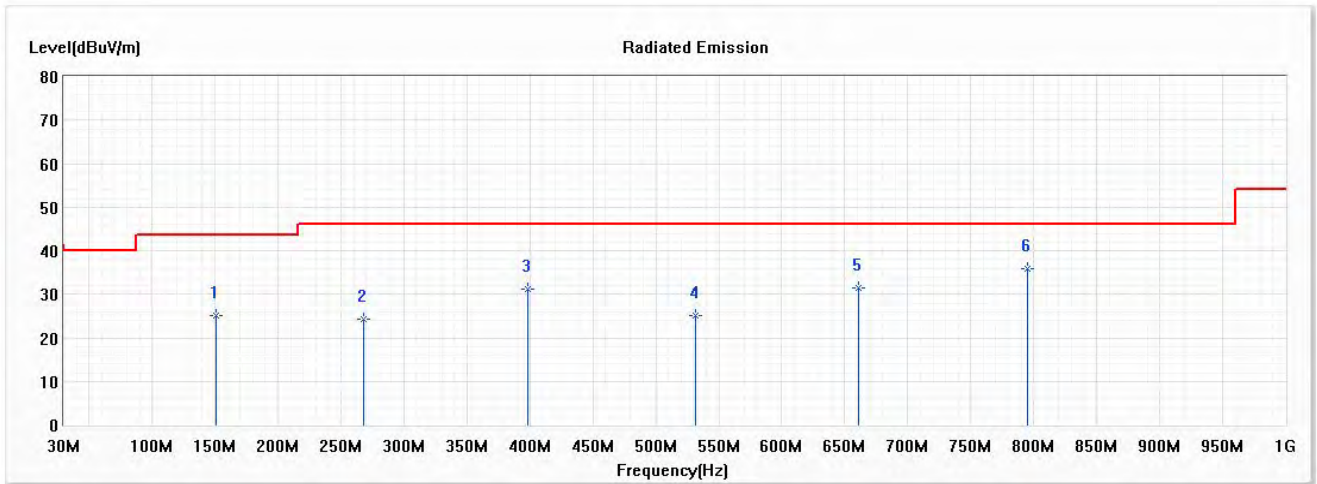


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	150.899	25.17	43.50	-18.33	35.61	-10.44	QP
2	267.580	24.20	46.00	-21.80	35.04	-10.84	QP
3	398.319	31.21	46.00	-14.79	38.53	-7.32	QP
4	531.870	24.98	46.00	-21.02	29.66	-4.68	QP
5	661.203	31.49	46.00	-14.51	34.02	-2.53	QP
* 6	794.754	35.92	46.00	-10.08	36.31	-0.39	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Date : 2021/01/19
 Test Mode : Mode 18 SISO B: Transmit (802.11ax-160BW_72.1Mbps) (5250MHz)

Vertical

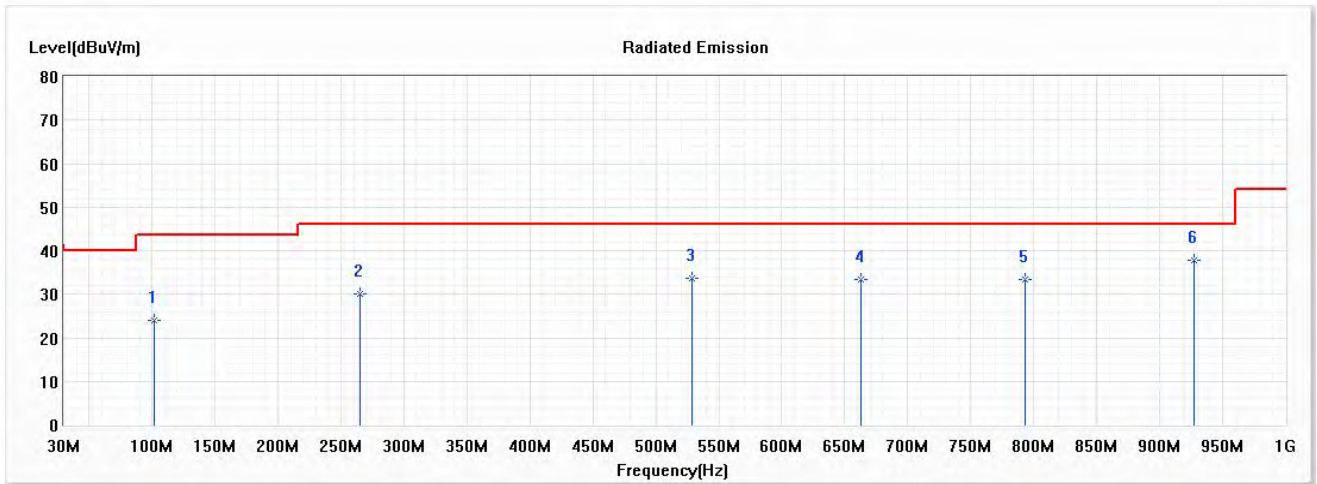

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	101.696	23.88	43.50	-19.62	39.04	-15.16	QP
2	264.768	30.01	46.00	-15.99	40.96	-10.95	QP
3	529.058	33.76	46.00	-12.24	38.51	-4.75	QP
4	662.609	33.31	46.00	-12.69	35.88	-2.57	QP
5	793.348	33.41	46.00	-12.59	33.83	-0.42	QP
* 6	926.899	37.70	46.00	-8.30	36.48	1.22	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.