

FCC SAR TEST REPORT

FCC ID : E2K-RTL8852BE
Equipment : 11ax RTL8852BE Combo module
Brand Name : REALTEK
Model Name : RTL8852BE
Applicant : Realtek Semiconductor Corp.
No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu, Taiwan
Manufacturer : Realtek Semiconductor Corp.
No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu, Taiwan
Standard : FCC 47 CFR Part 2 (2.1093)

The product was installed into Portable Computer (Brand Name DELL, Model Name: P182G) during test.

The product was received on Nov. 11, 2022 and testing was started from Nov. 12, 2022 and completed on Nov. 30, 2022. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan



Table of Contents

1. Statement of Compliance 4

2. Guidance Applied..... 4

3. Equipment Under Test (EUT) Information 5

 3.1 General Information 5

 3.2 Sensor Triggering angle and power verification 6

4. RF Exposure Limits..... 9

 4.1 Uncontrolled Environment..... 9

 4.2 Controlled Environment..... 9

5. Specific Absorption Rate (SAR).....10

 5.1 Introduction10

 5.2 SAR Definition.....10

6. System Description and Setup11

 6.1 Test Site Location.....11

 6.2 E-Field Probe12

 6.3 Data Acquisition Electronics (DAE)12

 6.4 Phantom.....13

 6.5 Device Holder.....14

7. Measurement Procedures15

 7.1 Spatial Peak SAR Evaluation.....15

 7.2 Power Reference Measurement.....16

 7.3 Area Scan16

 7.4 Zoom Scan.....17

 7.5 Volume Scan Procedures.....17

 7.6 Power Drift Monitoring.....17

8. Test Equipment List18

9. System Verification19

 9.1 Tissue Verification19

 9.2 System Performance Check Results.....20

10. RF Exposure Positions20

 10.1 SAR Testing for Tablet.....20

11. WiFi/Bluetooth Output Power (Unit: dBm)21

12. Antenna Location33

13. SAR Test Results36

 13.1 Body SAR36

 13.2 Repeated SAR Measurement38

14. Simultaneous Transmission Analysis39

 14.1 Body Exposure Conditions39

 14.2 SPLSR Evaluation and Analysis.....40

15. Uncertainty Assessment42

16. References42

Appendix A. Plots of System Performance Check

Appendix B. Plots of High SAR Measurement

Appendix C. DASY Calibration Certificate

Appendix D. Test Setup Photos



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) for Realtek Semiconductor Corp., 11ax RTL8852BE Combo module, RTL8852BE, are as follows.

Equipment Class	Frequency Band		Highest SAR Summary		
			Body (Separation 0mm)		Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)		
DTS	WLAN	2.4GHz WLAN	1.08	1.13	
NII		5GHz WLAN	1.19	1.19	
DSS	2.4GHz Band	Bluetooth	0.38	1.15	
Date of Testing:			2022/11/12 ~ 2022/11/30		

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation and the FCC designation No. TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR) specified in FCC 47 CFR part 2 (2.1093), and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang
Report Producer: Carlie Tsai

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02



3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	11ax RTL8852BE Combo module
Brand Name	REALTEK
Model Name	RTL8852BE
FCC ID	E2K-RTL8852BE
Wireless Technology and Frequency Range	WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2 GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3 GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6 GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8 GHz Band: 5725 MHz ~ 5850 MHz WLAN 5.8 GHz UNII4 Band: 5850 MHz ~ 5895 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
Mode	WLAN: 802.11a/b/g/n/ac/ax HT20/HT40/VHT20/VHT40/VHT80/HE20/HE40/HE80 Bluetooth BR/EDR/LE
Remark:	
1. This device has two antenna vendors; RF exposure evaluation selects Auden as the main test, Speed will spot check worst case found in Auden.	
2. This device is convertible type notebook PC, and there have Laptop and Tablet two usage way, when end user is used different mode which the device will according current mode to limit different maximum power.	

Host Information	
Equipment Name	Portable Computer
Brand Name	DELL
Model Name	P182G
EUT Stage	Identical Prototype

Antenna Information (Laptop)									
1	Ant. Type	PIFA			2	Ant. Type	PIFA		
	Model No.	Wistron P/N : 0772W9				Model No.	Wistron P/N : 08V97D		
	Peak Gain (dBi)					Peak Gain (dBi)			
	2400~2483.5MHz	2.93	5470~5725MHz	4.19		2400~2483.5MHz	2.04	5470~5725MHz	3
	5150~5250MHz	2.92	5725~5850MHz	4.19		5150~5250MHz	2.47	5725~5850MHz	3
	5250~5350MHz	2.92	5850~5895MHz	3.25		5250~5350MHz	2.47	5925~7125MHz	2.84
Antenna Information (Tablet)									
1	Ant. Type	PIFA			2	Ant. Type	PIFA		
	Model No.	Wistron P/N : 0772W9				Model No.	Wistron P/N : 08V97D		
	Peak Gain (dBi)					Peak Gain (dBi)			
	2400~2483.5MHz	0.76	5470~5725MHz	1.74		2400~2483.5MHz	0.23	5470~5725MHz	4.16
	5150~5250MHz	2.72	5725~5850MHz	1.04		5150~5250MHz	2.74	5725~5850MHz	4.19
	5250~5350MHz	2.91	5925~7125MHz	1.17		5250~5350MHz	2.96	5925~7125MHz	3.8



3.2 Sensor Triggering angle and power verification

General Note:

- The following guidance should be applied to laptops/tablets that use Hall Effect or gravity sensors to detect lid angle for the purpose of power reduction:

- Step 1: With the lid is in closed mode (0 degrees), open the screen in 10 degree steps until laptop mode is obtained
- Step 2: Lower the screen 5 degrees. Closed mode should be reobtained. If not keep lowering in 5 degree steps
- Step 3: Open the screen in 1 degree steps until laptop mode is reobtained
- Step 4: Continue opening the screen in 1 degree steps until at least 5 degrees past where laptop mode was obtained
- Step 5: Then continue opening the screen in 10 degree steps until tablet mode is obtained
- Step 6: Power measurements should be taken at each step
- Step 7: Reverse this procedure going from tablet mode back down to closed mode

when the screen angle is from 0 degree to 360 degree						
Screen angle (degree) v.s. power	Wireless		WLAN Ant 1		WLAN Ant 2	
	Band		2.4GHz WLAN	5.5GHz WLAN	2.4GHz WLAN	5.5GHz WLAN
	Lid Close	0	Standby	Standby	Standby	Standby
Notebook		1	20.6	19.2	20.5	20.6
		2	20.5	19.1	20.6	20.6
		3	20.6	19.2	20.4	20.6
		4	20.5	19.2	20.6	20.7
		5	20.6	19.0	20.6	20.5
		10	20.6	19.1	20.6	20.5
		20	20.5	18.9	20.6	20.5
		30	20.6	19.0	20.5	20.7
		40	20.5	19.2	20.5	20.6
		50	20.7	18.9	20.4	20.4
		60	20.7	19.2	20.4	20.4
		70	20.4	19.2	20.7	20.4
		80	20.4	18.9	20.4	20.4
		90	20.4	19.2	20.6	20.7
		100	20.5	19.0	20.5	20.6
		110	20.5	19.1	20.7	20.6
		120	20.7	18.9	20.7	20.5
		130	20.6	19.0	20.4	20.5
		140	20.5	19.1	20.6	20.6
		150	20.7	19.1	20.5	20.5
	Tablet Mode		160	20.6	19.0	20.7
		170	20.7	19.2	20.6	20.5
		180	20.6	19.0	20.6	20.7
		186	20.5	19.0	20.6	20.7
		187	20.5	19.0	20.6	20.6
		188	20.6	19.2	20.5	20.7
		189	20.4	19.0	20.7	20.7
		190	20.5	18.9	20.4	20.7
		191	18.4	12.9	16.2	14.9
		192	18.6	13.2	16.1	15.0
	193	18.4	13.2	16.0	15.0	
	194	18.6	13.2	16.2	15.1	
	195	18.5	12.9	16.0	15.2	
	196	18.6	13.0	16.0	15.0	
	197	18.5	13.0	16.0	15.1	
	198	18.5	12.9	16.1	15.2	
	199	18.6	13.2	16.2	15.1	
	200	18.6	13.1	16.0	14.9	
	205	18.7	12.9	16.0	15.1	
	210	18.5	13.1	16.0	15.1	



		220	18.6	13.0	15.9	15.1
		230	18.4	12.9	16.1	15.1
		240	18.5	13.2	16.1	15.0
		250	18.6	12.9	16.0	15.0
		260	18.4	13.0	16.1	15.0
		270	18.5	13.1	16.1	15.1
		280	18.7	13.1	16.2	14.9
		290	18.7	13.2	16.0	15.1
		300	18.5	13.2	16.1	15.2
		310	18.6	13.1	16.1	14.9
		320	18.6	13.0	16.1	15.0
		330	18.6	12.9	16.0	15.1
		340	18.5	12.9	16.0	15.2
		350	18.5	13.1	16.0	14.9
		360	18.6	13.1	16.1	15.2

when the screen angle is from 0 degree to 360 degree							
Screen angle (degree) v.s. power	Wireless		WLAN Ant 1		WLAN Ant 2		
	Band		2.4GHz WLAN	5.5GHz WLAN	2.4GHz WLAN	5.5GHz WLAN	
	Tablet Mode	360		18.4	13.1	15.8	14.9
350			18.6	13.0	16.2	14.8	
340			18.4	13.1	16.2	15.1	
330			18.6	12.8	16.0	14.9	
320			18.4	13.0	16.0	14.9	
310			18.6	12.8	15.9	14.9	
300			18.6	12.9	16.1	15.0	
290			18.4	13.1	15.8	14.9	
280			18.5	13.1	16.1	15.1	
270			18.5	13.1	16.2	14.8	
260			18.3	13.2	16.2	15.2	
250			18.5	13.1	15.8	15.2	
240			18.5	12.8	16.2	15.0	
230			18.6	13.2	15.9	15.0	
220			18.5	12.8	15.8	15.1	
210			18.5	12.8	16.1	15.0	
200			18.6	13.1	16.0	14.9	
194			18.4	12.8	16.2	15.2	
193			18.3	12.8	16.0	15.2	
192			18.5	13.2	16.1	15.0	
191			18.5	13.0	16.0	14.8	
190			18.4	12.9	16.0	15.1	
Notebook		189		20.4	19.2	20.6	20.6
		188		20.5	18.8	20.7	20.4
		187		20.7	18.9	20.6	20.5
		186		20.7	18.8	20.7	20.6
		185		20.5	18.9	20.4	20.6
		184		20.5	19.0	20.5	20.5
		183		20.7	19.0	20.7	20.4
		182		20.6	18.8	20.6	20.5
		181		20.3	18.9	20.6	20.5
		180		20.5	19.0	20.4	20.3
		175		20.6	19.0	20.7	20.7
		170		20.6	19.1	20.3	20.5
160			20.7	18.8	20.4	20.4	
150			20.4	19.2	20.3	20.6	



FCC SAR TEST REPORT

Report No. : FA2N0214

		140	20.6	18.8	20.7	20.5
		130	20.4	18.9	20.6	20.7
		120	20.4	19.0	20.5	20.4
		110	20.7	19.0	20.4	20.4
		100	20.3	19.0	20.5	20.3
		90	20.5	19.1	20.7	20.6
		80	20.6	19.0	20.6	20.6
		70	20.4	19.2	20.4	20.6
		60	20.5	19.2	20.4	20.3
		50	20.6	19.0	20.4	20.6
		40	20.4	19.1	20.5	20.4
		30	20.4	19.1	20.5	20.4
		20	20.6	19.0	20.4	20.4
		10	20.7	19.0	20.4	20.5
		5	20.7	19.2	20.6	20.5
		4	20.7	19.2	20.4	20.4
		3	20.6	18.8	20.5	20.5
		2	20.7	18.9	20.3	20.3
		1	20.6	19.0	20.6	20.6
	Lid Close	0	Standby	Standby	Standby	Standby



4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.



5. Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

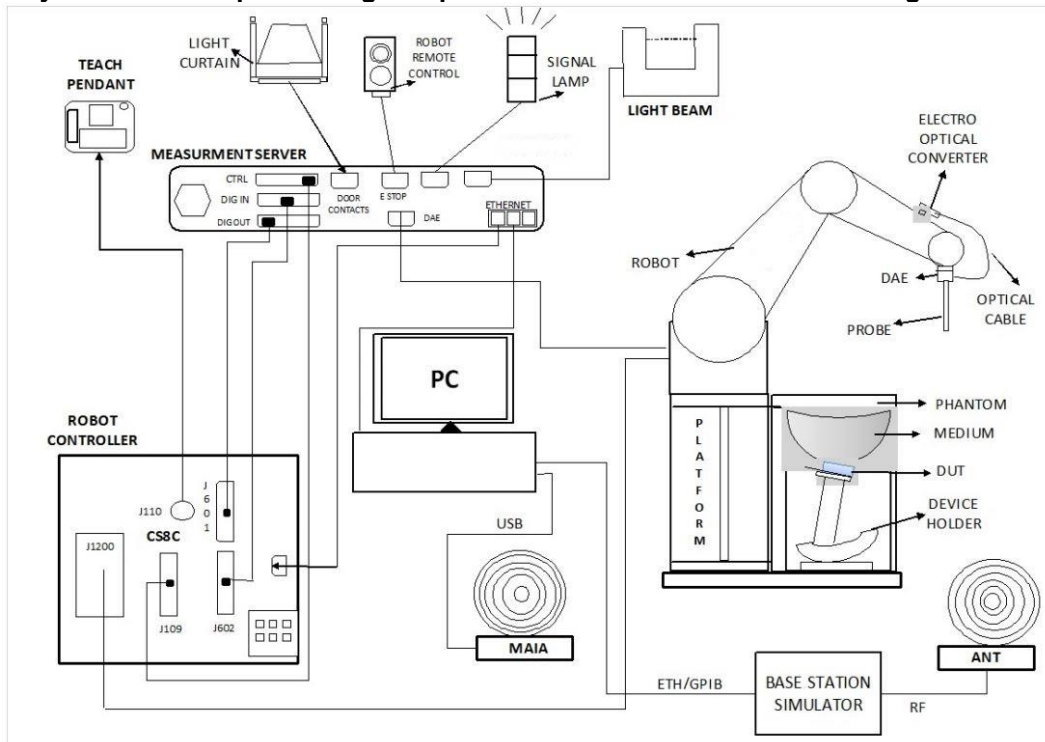

- The DASY system in SAR Configuration is shown above
- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running windows software and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6.1 Test Site Location


The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 3786) and the FCC designation No. TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Test Site	EMC & Wireless Communications Laboratory		Wensan Laboratory		
Test Site Location	TW1190 No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan		TW3786 No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan		
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY	SAR15-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY	SAR16-HY
	SAR06-HY	SAR10-HY	SAR13-HY	SAR14-HY	SAR17-HY


6.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ±0.2 dB (30 MHz – 4 GHz)	
Directivity	±0.2 dB in TSL (rotation around probe axis) ±0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 µW/g – >100 mW/g; Linearity: ±0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz)	
Directivity	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

6.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE


6.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

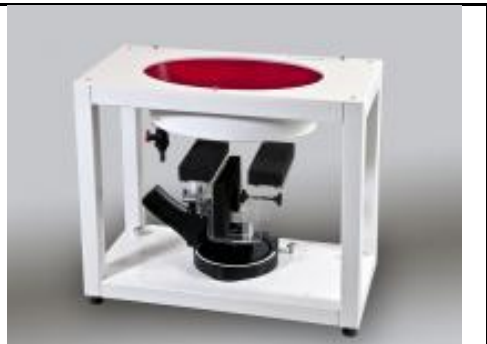Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

6.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

7. Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

7.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

7.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

7.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

7.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit	D2450V2	806	Mar. 24, 2022	Mar. 23, 2023
SPEAG	5GHz System Validation Kit ⁽²⁾	D5GHzV2	1006	Sep. 15, 2021	Sep. 13, 2023
SPEAG	5GHz System Validation Kit ⁽²⁾	D5GHzV2	1171	Apr. 20, 2021	Apr. 18, 2023
SPEAG	Data Acquisition Electronics	DAE3	528	May. 19, 2022	May. 18, 2023
SPEAG	Data Acquisition Electronics	DAE4	376	Oct. 19, 2022	Oct. 18, 2023
SPEAG	Data Acquisition Electronics	DAE4	699	Feb. 24, 2022	Feb. 23, 2023
SPEAG	Data Acquisition Electronics	DAE4	1399	Feb. 28, 2022	Feb. 27, 2023
SPEAG	Data Acquisition Electronics	DAE4	1707	Jan. 12, 2022	Jan. 11, 2023
SPEAG	Dosimetric E-Field Probe	EX3DV4	3728	Mar. 02, 2022	Mar. 01, 2023
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Oct. 31, 2022	Oct. 30, 2023
SPEAG	Dosimetric E-Field Probe	EX3DV4	7625	Jan. 27, 2022	Jan. 26, 2023
Testo	Hygro meter	608-H1	45207528	Nov. 02, 2022	Nov. 01, 2023
RCPTWN	Thermometer	HTC-1	TM685-1	Jun. 27, 2022	Jun. 26, 2023
RCPTWN	Thermometer	HTC-1	TM560-2	Mar. 15, 2022	Mar. 14, 2023
R&S	BT Base Station	CBT	100815	Feb. 24, 2022	Feb. 23, 2023
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Oct. 12, 2022	Oct. 11, 2023
Keysight	ENA Network Analyzer	E5071C	MY46104758	Sep. 22, 2022	Sep. 21, 2023
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 28, 2022	Sep. 27, 2023
LINE SEIKI	Digital Thermometer	DTM3000-spezial	2942	Oct. 31, 2022	Oct. 30, 2023
Anritsu	Power Meter	ML2495A	1419002	Aug. 16, 2022	Aug. 15, 2023
Anritsu	Power Sensor	MA2411B	1911176	Aug. 16, 2022	Aug. 15, 2023
Anritsu	Power Meter	ML2495A	1804003	Oct. 17, 2022	Oct. 16, 2023
Anritsu	Power Sensor	MA2411B	1726150	Oct. 17, 2022	Oct. 16, 2023
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jul. 21, 2022	Jul. 20, 2023
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 19, 2021	Aug. 17, 2023
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 14, 2022	Oct. 13, 2023
Mini-Circuits	Power Amplifier	ZVE-8G+	479102029	Sep. 15, 2022	Sep. 14, 2023
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Warison	Directional Coupler	WCOU-10-50S-10	WR889BMC4B1	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005-3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.



9. System Verification

9.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
2450	22.5	1.780	38.700	1.80	39.20	-1.11	-1.28	±5	2022/11/12
2450	22.6	1.803	39.246	1.80	39.20	0.17	0.12	±5	2022/11/12
5250	22.5	4.740	36.800	4.71	35.95	0.64	2.36	±5	2022/11/13
5600	22.5	5.110	36.300	5.07	35.50	0.79	2.25	±5	2022/11/13
5600	22.5	5.040	35.800	5.07	35.50	-0.59	0.85	±5	2022/11/30
5750	22.5	5.280	36.100	5.22	35.35	1.15	2.12	±5	2022/11/13
5750	22.4	5.280	36.733	5.22	35.35	1.15	3.91	±5	2022/11/16
5850	22.3	5.377	35.903	5.32	35.25	1.07	1.85	±5	2022/11/13
5850	22.4	5.392	36.570	5.32	35.25	1.35	3.74	±5	2022/11/16



11. WiFi/Bluetooth Output Power (Unit: dBm)

General Note:

1. For each antenna, transmit power in SISO operation is larger than (or equal to) the power in MIMO operation, RF exposure compliance of MIMO mode can be deduced from the compliance simultaneous transmission of antennas operating in SISO mode.
2. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is $< 1.6\text{W/kg}$ and SAR peak to location ratio ≤ 0.04 , no additional SAR measurements for MIMO.
3. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, additional output power measurements were not necessary.
4. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
5. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
6. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
7. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. 18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is $\leq 0.4\text{ W/kg}$, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is $> 0.4\text{ W/kg}$, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is $\leq 0.8\text{ W/kg}$ or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is $> 0.8\text{ W/kg}$, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is $\leq 1.2\text{ W/kg}$ or all required channels are tested.
8. Per 201904 TCBC workshops, General principles of FCC KDB Publication 248227 D01 can be applied to determine the SAR Initial Test Configurations and test reduction for 802.11ax SAR testing. For the table below the 802.11ax maximum power is SU (non-OFDMA), and the SU maximum power also higher than RU (OFDMA)
9. In applying the test guidance, the IEEE 802.11 mode with the maximum output power (out of all modes) should be considered for testing
10. For modes with the same maximum output power, the guidance from section 5.3.2 a) of FCC KDB Publication 248227 D01 should be applied, with 802.11ax being considered as the highest 802.11 mode for the appropriate frequency bands
11. When SAR testing for 802.11ax is required
 - a. If the maximum output power is highest for OFDMA scenarios, choose the tone size with the maximum number of tones and the highest maximum output power
 - b. Otherwise, consider the fully allocated channel for SAR testing
 - c. When SAR testing is required on RU sizes less than the fully allocated channel, use the RU number closest to the middle of the channel, choosing the higher RU number when two RUs are equidistant to the middle of the channel



<Tablet Mode>

2.4GHz WLAN				Ant 1			Ant 2			Ant 1+2		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
802.11b 1Mbps	1	2412	19.00	19.00	99.90	16.20	16.50	99.80	Not Required	19.50	Not Required	
	6	2437	18.70	19.00		16.40	16.50			19.50		
	11	2462	18.90	19.00		16.50	16.50			19.50		
	12	2467	15.50	15.50		15.50	15.50			18.50		
	13	2472	12.00	12.00		11.80	12.00			15.00		
802.11g 6Mbps	1	2412	Not Required	17.00	Not Required	Not Required	16.50	Not Required	Not Required	19.50	Not Required	
	6	2437		19.00			16.50			19.50		
	11	2462		17.00			16.50			19.50		
	12	2467		13.00			13.00			16.00		
	13	2472		12.00			12.00			15.00		
802.11n-HT20 MCS0	1	2412	Not Required	16.00	Not Required	Not Required	16.00	Not Required	Not Required	19.00	Not Required	
	6	2437		19.00			16.50			19.50		
	11	2462		16.00			16.00			19.00		
	12	2467		13.00			13.00			16.00		
	13	2472		12.00			12.00			15.00		
802.11n-HT40 MCS0	3	2422	Not Required	15.00	Not Required	Not Required	15.00	Not Required	Not Required	18.00	Not Required	
	6	2437		18.00			16.50			19.50		
	9	2452		15.00			15.00			18.00		
	10	2457		12.00			12.00			15.00		
	11	2462		11.00			11.00			14.00		
802.11ac-VHT20 MCS0	1	2412	Not Required	16.00	Not Required	Not Required	16.00	Not Required	Not Required	19.00	Not Required	
	6	2437		19.00			16.50			19.50		
	11	2462		16.00			16.00			19.00		
	12	2467		13.00			13.00			16.00		
	13	2472		12.00			12.00			15.00		
802.11ac-VHT40 MCS0	3	2422	Not Required	15.00	Not Required	Not Required	15.00	Not Required	Not Required	18.00	Not Required	
	6	2437		18.00			16.50			19.50		
	9	2452		15.00			15.00			18.00		
	10	2457		12.00			12.00			15.00		
	11	2462		11.00			11.00			14.00		
802.11ax-HE20 MCS0	1	2412	Not Required	16.00	Not Required	Not Required	16.00	Not Required	Not Required	19.00	Not Required	
	6	2437		19.00			16.50			19.50		
	11	2462		16.50			16.50			19.50		
	12	2467		13.50			13.50			16.50		
	13	2472		12.00			12.00			15.00		
802.11ax-HE40 MCS0	3	2422	Not Required	15.00	Not Required	Not Required	15.00	Not Required	Not Required	18.00	Not Required	
	6	2437		18.50			16.50			19.50		
	9	2452		15.00			15.00			18.00		
	10	2457		12.50			12.50			15.50		
	11	2462		11.00			11.00			14.00		



5.2GHz WLAN				Ant 1			Ant 2			Ant 1+2			
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
	5.2GHz WLAN	802.11a 6Mbps	36	5180	Not Required	13.50	Not Required	Not Required	15.50	Not Required	Not Required	16.50	Not Required
40			5200	16.50									
44			5220	16.50									
48			5240	16.50									
802.11n-HT20 MCS0		36	5180	16.50									
		40	5200	16.50									
		44	5220	16.50									
		48	5240	16.50									
802.11n-HT40 MCS0		38	5190	16.50									
		46	5230	16.50									
802.11ac-VHT20 MCS0		36	5180	16.50									
		40	5200	16.50									
		44	5220	16.50									
		48	5240	16.50									
802.11ac-VHT40 MCS0		38	5190	16.50									
		46	5230	16.50									
802.11ac-VHT80 MCS0		42	5210	16.50									
802.11ax-HE20 MCS0		36	5180	16.50									
		40	5200	16.50									
		44	5220	16.50									
		48	5240	16.50									
802.11ax-HE40 MCS0		38	5190	16.50									
		46	5230	16.50									
802.11ax-HE80 MCS0		42	5210	16.50									



5.3GHz WLAN				Ant 1			Ant 2			Ant 1+2											
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %									
	5.3GHz WLAN	802.11a 6Mbps	52	5260	Not Required	13.50	Not Required	Not Required	15.50	Not Required	Not Required	16.50	Not Required								
56			5280																		
60			5300																		
64			5320																		
802.11n-HT20 MCS0		52	5260																		
		56	5280																		
		60	5300																		
		64	5320																		
802.11n-HT40 MCS0		54	5270	13.50										Not Required	15.50	15.50	98.00				
		62	5310												15.30	15.50					
802.11ac-VHT20 MCS0		52	5260	13.50										Not Required	Not Required	15.50	Not Required	Not Required	Not Required	16.50	Not Required
		56	5280																		
		60	5300																		
		64	5320																		
802.11ac-VHT40 MCS0		54	5270	13.50										Not Required	Not Required	15.50	Not Required	Not Required	Not Required	16.50	Not Required
		62	5310																		
802.11ac-VHT80 MCS0		58	5290	13.50				13.50	96.10	15.40				15.50	96.10	16.50					
802.11ax-HE20 MCS0		52	5260	Not Required				13.50	Not Required	Not Required				15.50	Not Required	Not Required	Not Required	16.50	Not Required		
		56	5280																		
		60	5300																		
	64	5320																			
802.11ax-HE40 MCS0	54	5270	13.50	Not Required	Not Required	15.50	Not Required	Not Required	Not Required	16.50	Not Required										
	62	5310																			
802.11ax-HE80 MCS0	58	5290	13.50	13.50	96.10	15.40	15.50	96.10	16.50												



5.5GHz WLAN				Ant 1			Ant 2			Ant 1+2		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
802.11a 6Mbps	100	5500	Not Required	15.50	Not Required	Not Required	15.50	Not Required	Not Required	18.50	Not Required	
	116	5580		15.50			18.50					
	124	5620		15.50			18.50					
	132	5660		15.50			18.50					
	144	5720		15.50			18.50					
802.11n-HT20 MCS0	100	5500	Not Required	15.50	Not Required	Not Required	15.50	Not Required	Not Required	18.50	Not Required	
	116	5580		15.50			18.50					
	124	5620		15.50			18.50					
	132	5660		15.50			18.50					
	144	5720		15.50			18.50					
802.11n-HT40 MCS0	102	5510	Not Required	15.50	Not Required	Not Required	15.50	Not Required	Not Required	18.50	Not Required	
	110	5550		15.50			18.50					
	126	5630		15.50			18.50					
	134	5670		15.50			18.50					
802.11ac-VHT20 MCS0	100	5500	Not Required	15.50	Not Required	Not Required	15.50	Not Required	Not Required	18.50	Not Required	
	116	5580		15.50			18.50					
	124	5620		15.50			18.50					
	132	5660		15.50			18.50					
	144	5720		15.50			18.50					
802.11ac-VHT40 MCS0	102	5510	Not Required	15.50	Not Required	Not Required	15.50	Not Required	Not Required	18.50	Not Required	
	110	5550		15.50			18.50					
	126	5630		15.50			18.50					
	134	5670		15.50			18.50					
802.11ac-VHT80 MCS0	106	5530	15.40	15.50	96.10	15.50	15.50	96.10	18.50	Not Required		
	122	5610	15.30	15.50		15.50	18.50					
	138	5690	15.30	15.50		15.40	18.50					
802.11ax-HE20 MCS0	100	5500	Not Required	15.50	Not Required	Not Required	15.50	Not Required	Not Required	18.50	Not Required	
	116	5580		15.50			18.50					
	124	5620		15.50			18.50					
	132	5660		15.50			18.50					
	144	5720		15.50			18.50					
802.11ax-HE40 MCS0	102	5510	Not Required	15.50	Not Required	Not Required	15.50	Not Required	Not Required	18.50	Not Required	
	110	5550		15.50			18.50					
	126	5630		15.50			18.50					
	134	5670		15.50			18.50					
802.11ax-HE80 MCS0	106	5530	Not Required	15.50	Not Required	Not Required	15.50	Not Required	Not Required	18.50	Not Required	
	122	5610		15.50			18.50					
	138	5690		15.50			18.50					



5.8GHz WLAN				Ant 1			Ant 2			Ant 1+2									
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %							
	802.11a 6Mbps	149	5745	Not Required	15.00	Not Required	Not Required	15.50	Not Required	Not Required	Not Required	18.00	Not Required						
		157	5785											15.50	18.00				
		165	5825											15.50	18.00				
	802.11n-HT20 MCS0	149	5745											15.00	18.00				
		157	5785											15.00	18.00				
		165	5825											15.00	18.00				
	802.11n-HT40 MCS0	151	5755											15.00	18.00				
		159	5795											15.00	18.00				
	802.11ac-VHT20 MCS0	149	5745											15.00	18.00				
		157	5785											15.00	18.00				
		165	5825											15.00	18.00				
	802.11ac-VHT40 MCS0	151	5755											15.00	18.00				
		159	5795											15.00	18.00				
	802.11ac-VHT80 MCS0	155	5775											14.90	15.00	96.10	15.30	15.50	96.10
802.11ax-HE20 MCS0	149	5745	Not Required											15.00	Not Required	Not Required	15.50	Not Required	Not Required
	157	5785		15.00	18.00														
	165	5825		15.00	18.00														
802.11ax-HE40 MCS0	151	5755		15.00	18.00														
	159	5795		15.00	18.00														
802.11ax-HE80 MCS0	155	5775		15.00	18.00														

5.8GHz UNII4 WLAN				Ant 1			Ant 2			Ant 1+2																			
5.8GHz UNII4 WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %																	
	802.11a 6Mbps	169	5845	Not Required	15.00	Not Required	Not Required	15.50	Not Required	Not Required	Not Required	18.00	Not Required																
		173	5865											15.00	18.00														
		177	5885											15.00	18.00														
	802.11n-HT20 MCS0	169	5845											15.00	18.00														
		173	5865											15.00	18.00														
		177	5885											15.00	18.00														
	802.11n-HT40 MCS0	167	5835											14.90	15.00	97.90	15.40	15.50	97.90	18.00									
		175	5875											14.70	15.00	15.40	15.50	18.00											
	802.11ac-VHT20 MCS0	169	5845											Not Required	15.00	Not Required	Not Required	15.50	Not Required	Not Required	Not Required	18.00	Not Required						
		173	5865																					15.00	18.00				
		177	5885																					15.00	18.00				
	802.11ac-VHT40 MCS0	167	5835																					15.00	18.00				
		175	5875																					15.00	18.00				
	802.11ac-VHT80 MCS0	171	5855																					14.70	15.00	96.00	15.40	15.50	96.00
802.11ax-HE20 MCS0	169	5845	Not Required																					15.00	Not Required	Not Required	15.50	Not Required	Not Required
	173	5865		15.00	18.00																								
	177	5885		15.00	18.00																								
802.11ax-HE40 MCS0	167	5835		15.00	18.00																								
	175	5875		15.00	18.00																								
802.11ax-HE80 MCS0	171	5855		15.00	18.00																								



<Laptop Mode>

2.4GHz WLAN				Ant 1			Ant 2			Ant 1+2		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
802.11b 1Mbps	1	2412	19.90	20.00	99.90	19.90	20.00	99.80	Not Required	23.00	Not Required	
	6	2437	20.00	20.00		20.00	20.00			23.00		
	11	2462	19.70	20.00		20.00	20.00			23.00		
	12	2467	15.40	15.50		15.30	15.50			18.50		
	13	2472	11.90	12.00		11.90	12.00			15.00		
802.11g 6Mbps	1	2412	Not Required	17.00	Not Required	Not Required	17.00	Not Required	Not Required	20.00	Not Required	
	6	2437		21.00			21.00			24.00		
	11	2462		17.00			17.00			20.00		
	12	2467		13.00			13.00			16.00		
	13	2472		12.00			12.00			15.00		
802.11n-HT20 MCS0	1	2412	Not Required	16.00	Not Required	Not Required	16.00	Not Required	Not Required	19.00	Not Required	
	6	2437		21.00			21.00			24.00		
	11	2462		16.00			16.00			19.00		
	12	2467		13.00			13.00			16.00		
	13	2472		12.00			12.00			15.00		
802.11n-HT40 MCS0	3	2422	Not Required	15.00	Not Required	Not Required	15.00	Not Required	Not Required	18.00	Not Required	
	6	2437		18.00			18.00			21.00		
	9	2452		15.00			15.00			18.00		
	10	2457		12.00			12.00			15.00		
	11	2462		11.00			11.00			14.00		
802.11ac-VHT20 MCS0	1	2412	Not Required	16.00	Not Required	Not Required	16.00	Not Required	Not Required	19.00	Not Required	
	6	2437		21.00			21.00			24.00		
	11	2462		16.00			16.00			19.00		
	12	2467		13.00			13.00			16.00		
	13	2472		12.00			12.00			15.00		
802.11ac-VHT40 MCS0	3	2422	Not Required	15.00	Not Required	Not Required	15.00	Not Required	Not Required	18.00	Not Required	
	6	2437		18.00			18.00			21.00		
	9	2452		15.00			15.00			18.00		
	10	2457		12.00			12.00			15.00		
	11	2462		11.00			11.00			14.00		
802.11ax-HE20 MCS0	1	2412	Not Required	16.00	Not Required	Not Required	16.00	Not Required	Not Required	19.00	Not Required	
	6	2437		21.00			21.00			24.00		
	11	2462		16.50			16.50			19.50		
	12	2467		13.50			13.50			16.50		
	13	2472		12.00			12.00			15.00		
802.11ax-HE40 MCS0	3	2422	Not Required	15.00	Not Required	Not Required	15.00	Not Required	Not Required	18.00	Not Required	
	6	2437		18.50			18.50			21.50		
	9	2452		15.00			15.00			18.00		
	10	2457		12.50			12.50			15.50		
	11	2462		11.00			11.00			14.00		



5.2GHz WLAN				Ant 1			Ant 2			Ant 1+2		
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	5.2GHz WLAN	802.11a 6Mbps	36	5180	Not Required	19.00	Not Required	Not Required	19.00	Not Required	Not Required	22.00
40			5200									
44			5220									
48			5240									
802.11n-HT20 MCS0		36	5180									
		40	5200									
		44	5220									
		48	5240									
802.11n-HT40 MCS0		38	5190									
		46	5230									
802.11ac-VHT20 MCS0		36	5180									
		40	5200									
		44	5220									
		48	5240									
802.11ac-VHT40 MCS0		38	5190									
		46	5230									
802.11ac-VHT80 MCS0		42	5210									
		42	5210									
802.11ax-HE20 MCS0		36	5180									
		40	5200									
	44	5220										
	48	5240										
802.11ax-HE40 MCS0	38	5190										
	46	5230										
802.11ax-HE80 MCS0	42	5210										



5.3GHz WLAN				Ant 1			Ant 2			Ant 1+2					
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %			
	5.3GHz WLAN	802.11a 6Mbps	52	5260	Not Required	19.00	Not Required	Not Required	19.00	Not Required	Not Required	22.00	Not Required		
56			5280	19.00		19.00			22.00						
60			5300	19.00		19.00			22.00						
64			5320	19.00		19.00			22.00						
802.11n-HT20 MCS0		52	5260	Not Required	19.00	Not Required	Not Required	19.00	Not Required	Not Required	22.00	Not Required			
		56	5280		19.00			19.00			22.00				
		60	5300		19.00			19.00			22.00				
		64	5320		19.00			19.00			22.00				
802.11n-HT40 MCS0		54	5270	19.50	19.50	98.00	21.00	21.00	98.10	22.50	Not Required	Not Required			
		62	5310	16.70	17.00		17.00	17.00		20.00					
802.11ac-VHT20 MCS0		52	5260	Not Required	19.00	Not Required	Not Required	Not Required	19.00	Not Required	Not Required	22.00	Not Required		
		56	5280		19.00				19.00			22.00			
		60	5300		19.00				19.00			22.00			
		64	5320		19.00				19.00			22.00			
802.11ac-VHT40 MCS0		54	5270	Not Required	19.50	Not Required	Not Required	21.00	Not Required	Not Required	22.50	Not Required			
		62	5310		17.00			17.00			20.00				
802.11ac-VHT80 MCS0		58	5290	Not Required	17.00	Not Required	Not Required	17.00	Not Required	Not Required	20.00	Not Required			
802.11ax-HE20 MCS0		52	5260		19.50			19.50			95.90		18.90	19.50	22.50
		56	5280		19.50			19.50					19.00	19.50	22.50
		60	5300		19.50			19.50					18.60	19.50	22.50
	64	5320	19.50	19.50	18.60	19.50	22.50								
802.11ax-HE40 MCS0	54	5270	Not Required	19.50	Not Required	Not Required	21.00	Not Required	Not Required	22.50	Not Required				
	62	5310		17.00			17.00			20.00					
802.11ax-HE80 MCS0	58	5290	Not Required	17.00	Not Required	Not Required	17.00	Not Required	Not Required	20.00	Not Required				



5.5GHz WLAN				Ant 1			Ant 2			Ant 1+2		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
802.11a 6Mbps	100	5500	18.30	18.50	99.00	Not Required	18.50	Not Required	Not Required	21.50	Not Required	
	116	5580	18.80	19.00			19.00			22.00		
	124	5620	18.50	18.50			18.50			21.50		
	132	5660	18.30	18.50			18.50			21.50		
	144	5720	18.30	18.50			18.50			21.50		
802.11n-HT20 MCS0	100	5500	Not Required	18.50	Not Required	Not Required	18.50	Not Required	Not Required	21.50	Not Required	
	116	5580		19.00			19.00			22.00		
	124	5620		18.50			18.50			21.50		
	132	5660		18.50			18.50			21.50		
	144	5720		18.50			18.50			21.50		
802.11n-HT40 MCS0	102	5510	15.20	15.50	98.00	15.50	15.50	98.10	Not Required	18.50	Not Required	
	110	5550	19.40	19.50		20.80	21.00			22.50		
	126	5630	18.80	19.00		18.80	19.00			22.00		
	134	5670	18.80	19.00		18.90	19.00			22.00		
	142	5710	18.80	19.00		18.90	19.00			22.00		
802.11ac-VHT20 MCS0	100	5500	Not Required	18.50	Not Required	Not Required	18.50	Not Required	Not Required	21.50	Not Required	
	116	5580		19.00			19.00			22.00		
	124	5620		18.50			18.50			21.50		
	132	5660		18.50			18.50			21.50		
	144	5720		18.50			18.50			21.50		
802.11ac-VHT40 MCS0	102	5510	Not Required	15.50	Not Required	Not Required	15.50	Not Required	Not Required	18.50	Not Required	
	110	5550		19.50			21.00			22.50		
	126	5630		19.00			19.00			22.00		
	134	5670		19.00			19.00			22.00		
	142	5710		19.00			19.00			22.00		
802.11ac-VHT80 MCS0	106	5530	Not Required	15.50	96.00	Not Required	15.50	Not Required	Not Required	18.50	Not Required	
	122	5610		19.00			19.00			22.00		
	138	5690		19.00			19.00			22.00		
802.11ax-HE20 MCS0	100	5500	Not Required	19.00	Not Required	Not Required	19.00	Not Required	Not Required	22.00	Not Required	
	116	5580		19.50			19.50			22.50		
	124	5620		18.50			18.50			21.50		
	132	5660		18.50			18.50			21.50		
	144	5720		18.50			18.50			21.50		
802.11ax-HE40 MCS0	102	5510	Not Required	15.50	Not Required	Not Required	15.50	Not Required	Not Required	18.50	Not Required	
	110	5550		19.50			21.00			22.50		
	126	5630		19.00			19.00			22.00		
	134	5670		19.00			19.00			22.00		
	142	5710		19.00			19.00			22.00		
802.11ax-HE80 MCS0	106	5530	15.40	15.50	96.00	Not Required	15.50	Not Required	Not Required	18.50	Not Required	
	122	5610	19.40	19.50			19.50			22.50		
	138	5690	19.50	19.50			19.50			22.50		



5.8GHz WLAN				Ant 1			Ant 2			Ant 1+2												
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %										
	5.8GHz WLAN	802.11a 6Mbps	149	5745	Not Required	18.00	Not Required	Not Required	21.00	Not Required	Not Required	21.00	Not Required									
157			5785	18.00										21.00								
165			5825	18.00										21.00								
802.11n-HT20 MCS0		149	5745	18.00										21.00								
		157	5785	18.00										21.00								
		165	5825	18.00										21.00								
802.11n-HT40 MCS0		151	5755	18.00										21.00								
		159	5795	18.00										21.00								
802.11ac-VHT20 MCS0		149	5745	18.00										21.00								
		157	5785	18.00										21.00								
		165	5825	18.00										21.00								
802.11ac-VHT40 MCS0		151	5755	18.00										21.00								
		159	5795	18.00										21.00								
802.11ac-VHT80 MCS0		155	5775	17.80										18.00	96.00	20.50	21.00	95.90	21.00			
802.11ax-HE20 MCS0		149	5745	Not Required										18.00	Not Required	21.00	21.00	95.90	21.00	Not Required		
		157	5785																		18.00	21.00
		165	5825																		18.00	21.00
802.11ax-HE40 MCS0		151	5755																		18.00	21.00
	159	5795	18.00		21.00																	
802.11ax-HE80 MCS0	155	5775	18.00		21.00	95.90	21.00	21.00														

5.8GHz UNII4 WLAN				Ant 1			Ant 2			Ant 1+2																						
5.8GHz UNII4 WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %																				
	5.8GHz UNII4 WLAN	802.11a 6Mbps	169	5845	Not Required	18.00	Not Required	Not Required	21.00	Not Required	Not Required	21.00	Not Required																			
173			5865	18.00										21.00																		
177			5885	18.00										21.00																		
802.11n-HT20 MCS0		169	5845	18.00										21.00																		
		173	5865	18.00										21.00																		
		177	5885	18.00										21.00																		
802.11n-HT40 MCS0		167	5835	17.90										18.00	97.90	21.00	21.00	97.90	21.00													
		175	5875	17.80										18.00	21.00	21.00																
802.11ac-VHT20 MCS0		169	5845	Not Required										18.00	Not Required	Not Required	21.00	Not Required	Not Required	21.00	Not Required											
		173	5865																			18.00	21.00									
		177	5885																			18.00	21.00									
802.11ac-VHT40 MCS0		167	5835																			18.00	21.00									
		175	5875																			18.00	21.00									
802.11ac-VHT80 MCS0		171	5855																			17.70	18.00	96.00	21.00	21.00	96.00	21.00				
802.11ax-HE20 MCS0		169	5845																			Not Required	18.00	Not Required	Not Required	21.00	Not Required	Not Required	21.00	Not Required		
		173	5865																												18.00	21.00
		177	5885																												18.00	21.00
802.11ax-HE40 MCS0		167	5835																												18.00	21.00
	175	5875	18.00		21.00																											
802.11ax-HE80 MCS0	171	5855	18.00		21.00	96.00	21.00	21.00																								




<2.4GHz Bluetooth>

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	12.20	No Required	No Required
	CH 39	2441	12.20		
	CH 78	2480	12.00		
Tune-up Limit			12.5	10.00	10.00

Mode	Channel	Frequency (MHz)	Average power (dBm)	
			1Mbps	2Mbps
LE	CH 00	2402	No Required	No Required
	CH 19	2440		
	CH 39	2480		
Tune-up Limit			12.5	12.5


General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 100% considered in SAR testing.

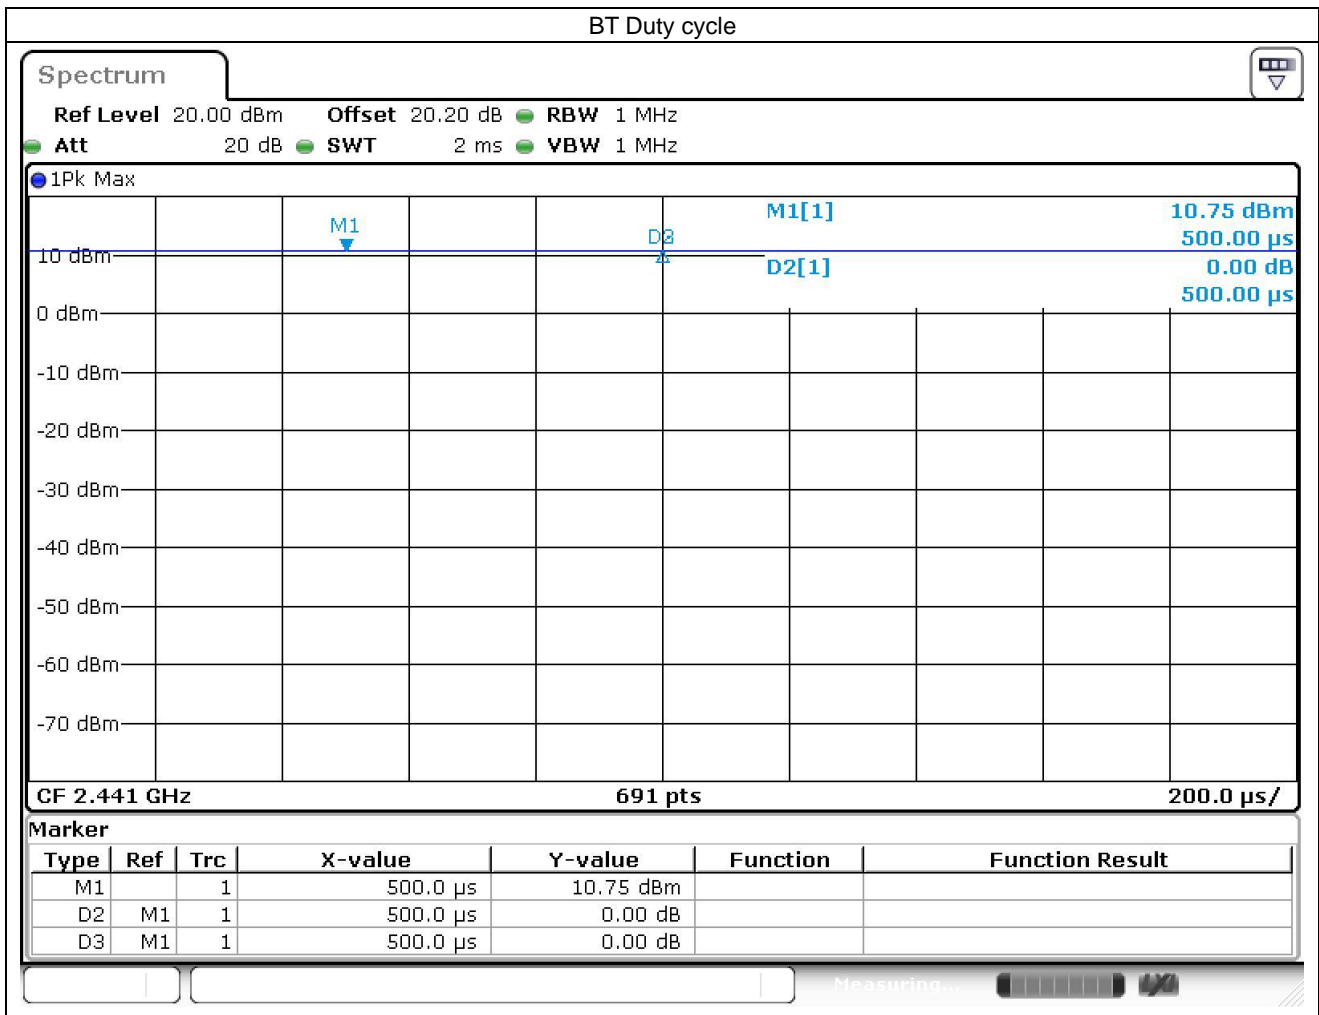

12. Antenna Location


<For Tablet>

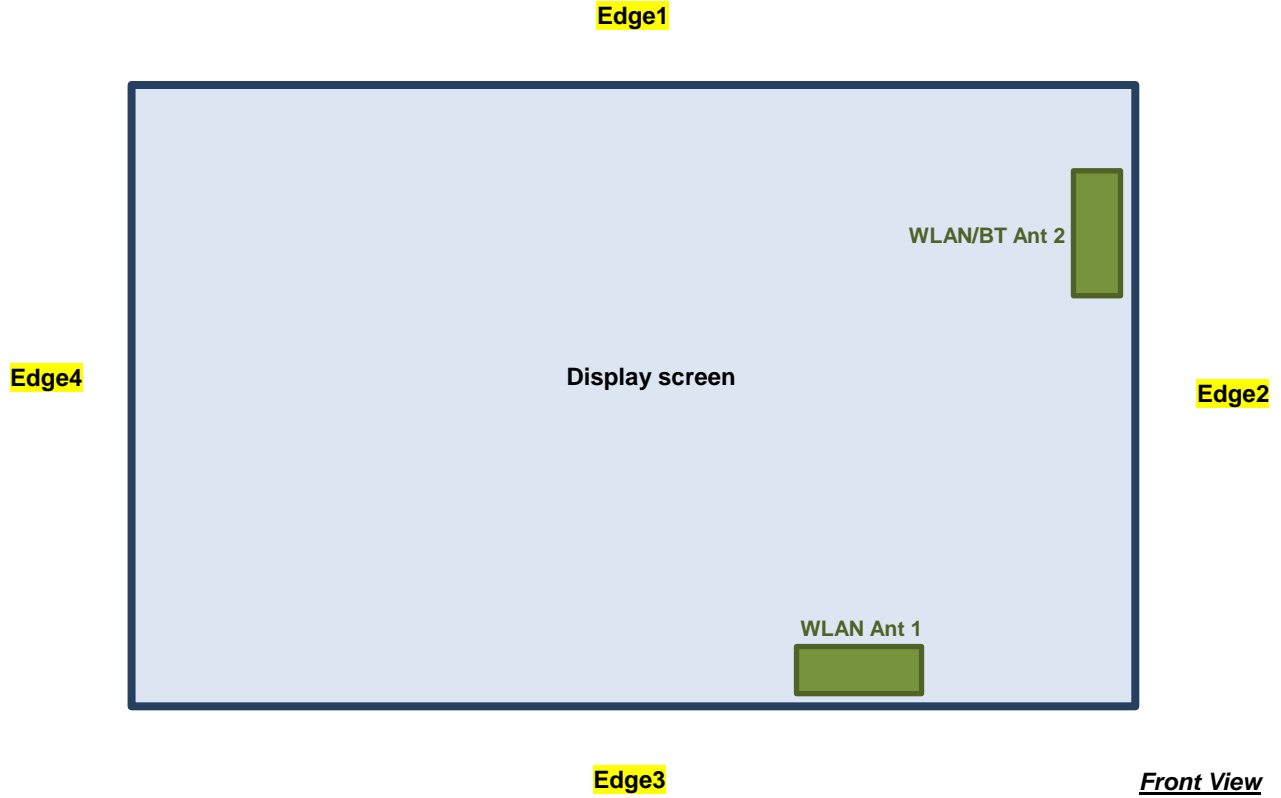

The separation distance for antenna to edge :

Antenna	To Edge1 (mm)	To Edge2 (mm)	To Edge3 (mm)	To Edge4 (mm)
WLAN Antenna 1	197.50	76.35	< 5	194.35
WLAN/BT Antenna 2	59.59	5.75	126.75	291.45

<For Laptop>

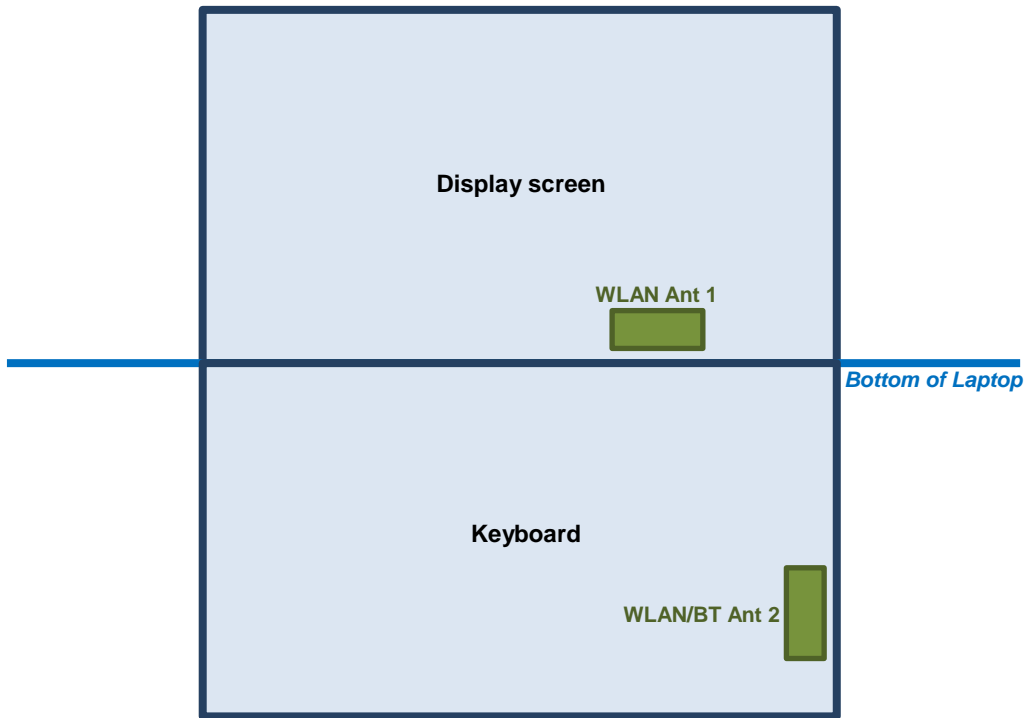

The separation distance for antenna to edge :

Antenna	To Bottom of Laptop (mm)
WLAN Antenna 1	< 5
WLAN/BT Antenna 2	< 5



<SAR test exclusion table>

General Note:

1. The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
2. Maximum power is the source-based time-average power and represents the maximum RF output power among production units
3. Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
4. Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
5. Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:
 - $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
6. Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
 - a) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz
7. The below table, exemption limits for routine evaluation based on frequency and separation distance was according to SAR-based Exemption – §1.1307(b)(3)(i)(B).

<Tablet Mode>

Exposure Position	Wireless Interface	BT ANT 2	2.4GHz WLAN ANT 1	2.4GHz WLAN ANT 2	5GHz WLAN ANT 1	5GHz WLAN ANT 2
	Calculated Frequency (MHz)	2480	2472	2472	5825	5825
Maximum power (dBm)	12.5	19.0	16.5	15.5	15.5	
Maximum rated power(mW)	17.78	79.43	44.67	35.48	35.48	
Bottom Face	Separation distance(mm)	5.0	5.0	5.0	5.0	5.0
	exclusion threshold	5.6	25.0	14.1	17.1	17.1
	Testing required?	Yes	Yes	Yes	Yes	Yes
Edge 1	Separation distance(mm)	59.59	197.50	59.59	197.50	59.59
	exclusion threshold	191.0	1570.0	191.0	1537.0	158.0
	Testing required?	No	No	No	No	No
Edge 2	Separation distance(mm)	5.75	76.35	5.75	76.35	5.75
	exclusion threshold	4.9	359.0	12.2	326.0	14.9
	Testing required?	Yes	No	Yes	No	Yes
Edge 3	Separation distance(mm)	126.75	5.00	126.75	5.00	126.75
	exclusion threshold	863.0	25.0	863.0	17.1	830.0
	Testing required?	No	Yes	No	Yes	No
Edge 4	Separation distance(mm)	291.45	194.35	291.45	194.35	291.45
	exclusion threshold	2510.0	1539.0	2510.0	1506.0	2477.0
	Testing required?	No	No	No	No	No

<Laptop Mode>

Exposure Position	Wireless Interface	BT ANT 2	2.4GHz WLAN ANT 1	2.4GHz WLAN ANT 2	5GHz WLAN ANT 1	5GHz WLAN ANT 2
	Calculated Frequency (MHz)	2480	2472	2472	5825	5825
Maximum power (dBm)	12.5	21.0	21.0	19.5	21.0	
Maximum rated power(mW)	17.78	125.89	125.89	89.13	125.89	
Bottom of Laptop	Separation distance(mm)	5.0	5.0	5.0	5.0	5.0
	exclusion threshold	5.6	39.6	39.6	43.0	60.8
	Testing required?	Yes	Yes	Yes	Yes	Yes



13. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/kg.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, WLAN5.2GHz SAR testing is not required when the WLAN5.3GHz band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for WLAN5.2GHz band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. For WLAN SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
6. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6W/kg and SAR peak to location ratio ≤ 0.04, no additional SAR measurements for MIMO.
7. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

13.1 Body SAR

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Configuration	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Ant 1	Laptop	6	2437	Auden	20.00	20.00	1.000	99.9	1.001	0.15	0.197	0.197
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 1	Tablet	1	2412	Auden	19.00	19.00	1.000	99.9	1.001	-0.14	0.046	0.046
	WLAN2.4GHz	802.11b 1Mbps	Edge 3	0mm	Ant 1	Tablet	1	2412	Auden	19.00	19.00	1.000	99.9	1.001	-0.14	0.346	0.346
	WLAN2.4GHz	802.11b 1Mbps	Edge 3	0mm	Ant 1	Tablet	6	2437	Auden	18.70	19.00	1.072	99.9	1.001	0.05	0.308	0.330
	WLAN2.4GHz	802.11b 1Mbps	Edge 3	0mm	Ant 1	Tablet	11	2462	Auden	18.90	19.00	1.023	99.9	1.001	-0.05	0.301	0.308
	WLAN2.4GHz	802.11b 1Mbps	Edge 3	0mm	Ant 1	Tablet	1	2412	Speed	19.00	19.00	1.000	99.9	1.001	0.01	0.476	0.476
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Ant 2	Laptop	6	2437	Auden	20.00	20.00	1.000	99.8	1.002	0.01	0.250	0.251
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 2	Tablet	11	2462	Auden	16.50	16.50	1.000	99.8	1.002	0.06	0.929	0.931
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 2	Tablet	1	2412	Auden	16.20	16.50	1.072	99.8	1.002	0.01	0.844	0.906
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 2	Tablet	6	2437	Auden	16.40	16.50	1.023	99.8	1.002	-0.12	0.929	0.953
	WLAN2.4GHz	802.11b 1Mbps	Edge 2	0mm	Ant 2	Tablet	11	2462	Auden	16.50	16.50	1.000	99.8	1.002	-0.16	0.401	0.402
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 2	Tablet	6	2437	Speed	16.40	16.50	1.023	99.8	1.002	0.02	1.040	1.066
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 2	Tablet	1	2412	Speed	16.20	16.50	1.072	99.8	1.002	0.19	0.898	0.964
01	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 2	Tablet	11	2462	Speed	16.50	16.50	1.000	99.8	1.002	0.01	1.080	1.082



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Configure	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Ant 1	Laptop	54	5270	Auden	19.50	19.50	1.000	98	1.020	-0.02	0.439	0.448
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 1	Tablet	58	5290	Auden	13.50	13.50	1.000	96.1	1.041	-0.01	0.040	0.042
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 3	0mm	Ant 1	Tablet	58	5290	Auden	13.50	13.50	1.000	96.1	1.041	0.09	0.375	0.390
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Ant 1	Laptop	54	5270	Speed	19.50	19.50	1.000	98	1.020	0	0.595	0.607
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Ant 2	Laptop	54	5270	Auden	21.00	21.00	1.000	98.1	1.019	0.03	1.050	1.070
	WLAN5GHz	802.11ax-HE20 MCS0	Bottom of Laptop	0mm	Ant 2	Laptop	56	5280	Auden	19.00	19.50	1.122	95.9	1.043	-0.11	0.908	1.063
02	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 2	Tablet	58	5290	Auden	15.40	15.50	1.023	96.1	1.041	-0.09	1.120	1.193
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Face	0mm	Ant 2	Tablet	54	5270	Auden	15.50	15.50	1.000	98	1.020	-0.07	0.999	1.019
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 2	0mm	Ant 2	Tablet	58	5290	Auden	15.40	15.50	1.023	96.1	1.041	0.1	0.679	0.723
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 2	Tablet	58	5290	Speed	15.40	15.50	1.023	96.1	1.041	-0.16	1.110	1.182
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Face	0mm	Ant 2	Tablet	54	5270	Speed	15.50	15.50	1.000	98	1.020	0.12	0.963	0.982
	WLAN5GHz	802.11ax-HE80 MCS0	Bottom of Laptop	0mm	Ant 1	Laptop	138	5690	Auden	19.50	19.50	1.000	96	1.042	-0.09	0.817	0.851
	WLAN5GHz	802.11ax-HE80 MCS0	Bottom of Laptop	0mm	Ant 1	Laptop	106	5530	Auden	15.40	15.50	1.023	96	1.042	0.11	0.746	0.795
	WLAN5GHz	802.11ax-HE80 MCS0	Bottom of Laptop	0mm	Ant 1	Laptop	122	5610	Auden	19.40	19.50	1.023	96	1.042	0.12	0.784	0.836
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 1	Tablet	106	5530	Auden	15.40	15.50	1.023	96.1	1.041	0.01	0.117	0.125
03	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 3	0mm	Ant 1	Tablet	106	5530	Auden	15.40	15.50	1.023	96.1	1.041	0.02	1.080	1.150
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 3	0mm	Ant 1	Tablet	122	5610	Auden	15.30	15.50	1.047	96.1	1.041	-0.03	1.040	1.134
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 3	0mm	Ant 1	Tablet	138	5690	Auden	15.30	15.50	1.047	96.1	1.041	-0.12	1.010	1.101
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 3	0mm	Ant 1	Tablet	106	5530	Speed	15.40	15.50	1.023	96.1	1.041	-0.05	1.060	1.129
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Ant 2	Laptop	110	5550	Auden	20.80	21.00	1.047	98.1	1.019	0	0.719	0.767
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 2	Tablet	106	5530	Auden	15.50	15.50	1.000	96.1	1.041	0.08	0.889	0.925
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 2	Tablet	122	5610	Auden	15.50	15.50	1.000	96.1	1.041	0.03	0.823	0.857
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 2	Tablet	138	5690	Auden	15.40	15.50	1.023	96.1	1.041	0.07	0.922	0.982
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 2	0mm	Ant 2	Tablet	106	5530	Auden	15.50	15.50	1.000	96.1	1.041	0	0.604	0.629
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 2	Tablet	138	5690	Speed	15.40	15.50	1.023	96.1	1.041	-0.19	0.848	0.903
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Ant 1	Laptop	155	5775	Auden	17.80	18.00	1.047	96	1.042	0.1	0.337	0.368
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 1	Tablet	155	5775	Auden	14.90	15.00	1.023	96.1	1.041	-0.13	0.043	0.046
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 3	0mm	Ant 1	Tablet	155	5775	Auden	14.90	15.00	1.023	96.1	1.041	0.09	0.378	0.403
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 3	0mm	Ant 1	Tablet	155	5775	Speed	14.90	15.00	1.023	96.1	1.041	0.05	0.638	0.680
	WLAN5GHz	802.11ax-HE80 MCS0	Bottom of Laptop	0mm	Ant 2	Laptop	155	5775	Auden	21.00	21.00	1.000	95.9	1.043	-0.13	0.719	0.750
04	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 2	Tablet	155	5775	Auden	15.30	15.50	1.047	96.1	1.041	0.1	0.841	0.917
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Face	0mm	Ant 2	Tablet	159	5795	Auden	15.40	15.50	1.023	98	1.020	-0.11	0.827	0.863
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 2	0mm	Ant 2	Tablet	155	5775	Auden	15.30	15.50	1.047	96.1	1.041	-0.1	0.406	0.443
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 2	Tablet	155	5775	Speed	15.30	15.50	1.047	96.1	1.041	-0.05	0.823	0.897
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Ant 1	Laptop	171	5855	Auden	17.70	18.00	1.072	96	1.042	0.04	0.719	0.803
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Ant 1	Laptop	167	5835	Auden	17.90	18.00	1.023	97.9	1.021	-0.12	0.812	0.848
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 1	Tablet	171	5855	Auden	14.70	15.00	1.072	96	1.042	0.17	0.080	0.089
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 3	0mm	Ant 1	Tablet	171	5855	Auden	14.70	15.00	1.072	96	1.042	0.09	0.645	0.720
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Ant 1	Laptop	167	5835	Speed	17.90	18.00	1.023	97.9	1.021	0.15	0.719	0.751
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Ant 2	Laptop	171	5855	Auden	21.00	21.00	1.000	96	1.042	-0.11	1.030	1.073
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Ant 2	Laptop	175	5875	Auden	21.00	21.00	1.000	97.9	1.021	0.02	1.070	1.092
05	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 2	Tablet	171	5855	Auden	15.40	15.50	1.023	96	1.042	-0.14	1.050	1.120
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Face	0mm	Ant 2	Tablet	175	5875	Auden	15.40	15.50	1.023	97.9	1.021	0.01	0.914	0.955
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 2	0mm	Ant 2	Tablet	171	5855	Auden	15.40	15.50	1.023	96	1.042	0	0.560	0.597
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 2	Tablet	171	5855	Speed	15.40	15.50	1.023	96	1.042	-0.02	0.985	1.050

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Configure	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Bottom of Laptop	0mm	Ant 2	Laptop	0	2402	Auden	12.20	12.50	1.072	100	1.000	0.05	0.060	0.064
	Bluetooth	1Mbps	Bottom Face	0mm	Ant 2	Tablet	0	2402	Auden	12.20	12.50	1.072	100	1.000	-0.07	0.320	0.343
	Bluetooth	1Mbps	Bottom Face	0mm	Ant 2	Tablet	39	2441	Auden	12.20	12.50	1.072	100	1.000	0.01	0.296	0.317
	Bluetooth	1Mbps	Bottom Face	0mm	Ant 2	Tablet	78	2480	Auden	12.00	12.50	1.122	100	1.000	-0.12	0.276	0.310
	Bluetooth	1Mbps	Edge 2	0mm	Ant 2	Tablet	0	2402	Auden	12.20	12.50	1.072	100	1.000	-0.05	0.176	0.189
06	Bluetooth	1Mbps	Bottom Face	0mm	Ant 2	Tablet	0	2402	Speed	12.20	12.50	1.072	100	1.000	-0.17	0.351	0.376

13.2 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Antenna	Configure	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 2	Tablet	11	2462	Speed	16.50	16.50	1.000	99.8	1.002	0.01	1.080	-	1.082
2nd	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 2	Tablet	11	2462	Speed	16.50	16.50	1.000	99.8	1.002	0.05	1.010	1.07	1.012
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 2	Tablet	58	5290	Auden	15.40	15.50	1.023	96.1	1.041	-0.09	1.120	-	1.193
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 2	Tablet	58	5290	Auden	15.40	15.50	1.023	96.1	1.041	0.02	1.060	1.06	1.129
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 3	0mm	Ant 1	Tablet	106	5530	Auden	15.40	15.50	1.023	96.1	1.041	0.02	1.080	-	1.150
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 3	0mm	Ant 1	Tablet	106	5530	Auden	15.40	15.50	1.023	96.1	1.041	0.05	1.020	1.06	1.087
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 2	Tablet	155	5775	Auden	15.30	15.50	1.047	96.1	1.041	0.1	0.841	-	0.917
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 2	Tablet	155	5775	Auden	15.30	15.50	1.047	96.1	1.041	0.04	0.823	1.02	0.897
1st	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Ant 2	Laptop	175	5875	Auden	21.00	21.00	1.000	97.9	1.021	0.02	1.070	-	1.092
2nd	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Ant 2	Laptop	175	5875	Auden	21.00	21.00	1.000	96	1.042	0.13	1.020	1.05	1.063

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

14. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Body
1.	WLAN2.4GHz Ant 1 + WLAN2.4GHz Ant 2	Yes
2.	WLAN5GHz Ant 1 + WLAN5GHz Ant 2 + Bluetooth Ant 2	Yes

General Note:

1. The worst case WLAN reported SAR for each configuration was used for SAR summation. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with WLAN.
2. WLAN RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode. Therefore SPLSR calculation was choose worst case with SAR test results of each antenna in SISO mode perform evaluation.
3. The Scaled SAR summation is calculated based on the same configuration and test position.
4. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
 - v) The SPLSR calculated results please refer to section 14.2.


14.1 Body Exposure Conditions

Exposure Position	1	2	3	4	5	1+2 Summed 1g SAR (W/kg)	3+4+5 Summed 1g SAR (W/kg)	SPLSR	Case No
	WLAN2.4GHz Ant 1 1g SAR (W/kg)	WLAN2.4GHz Ant 2 1g SAR (W/kg)	WLAN5GHz Ant 1 1g SAR (W/kg)	WLAN5GHz Ant 2 1g SAR (W/kg)	Bluetooth Ant 2 1g SAR (W/kg)				
Bottom Face at 0mm	0.046	1.082	0.125	1.193	0.376	1.128	1.694	0.01	Case 1
Edge 2 at 0mm		0.402		0.723	0.189	0.402	0.912		
Edge 3 at 0mm	0.476		1.150			0.476	1.150		
Bottom of Laptop at 0mm	0.197	0.251	0.851	1.092	0.064	0.448	2.007	0.02	Case 2


14.2 SPLSR Evaluation and Analysis

General Note:

1. Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneously transmitting antenna. When the sum of 1-g or 10-g SAR of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration. Therefore, the adjacent transmit antennas will be summed first, and then the SPLSR calculation will be evaluated with the farther transmitted antennas.
2. $SPLSR = (SAR_1 + SAR_2)^{1.5} / (min. \text{ separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
3. The detail hotspot point for each transmitter in each exposure condition are showing as below figure and the minimum 3D distance for each sum combination is used for SPLSR analysis.

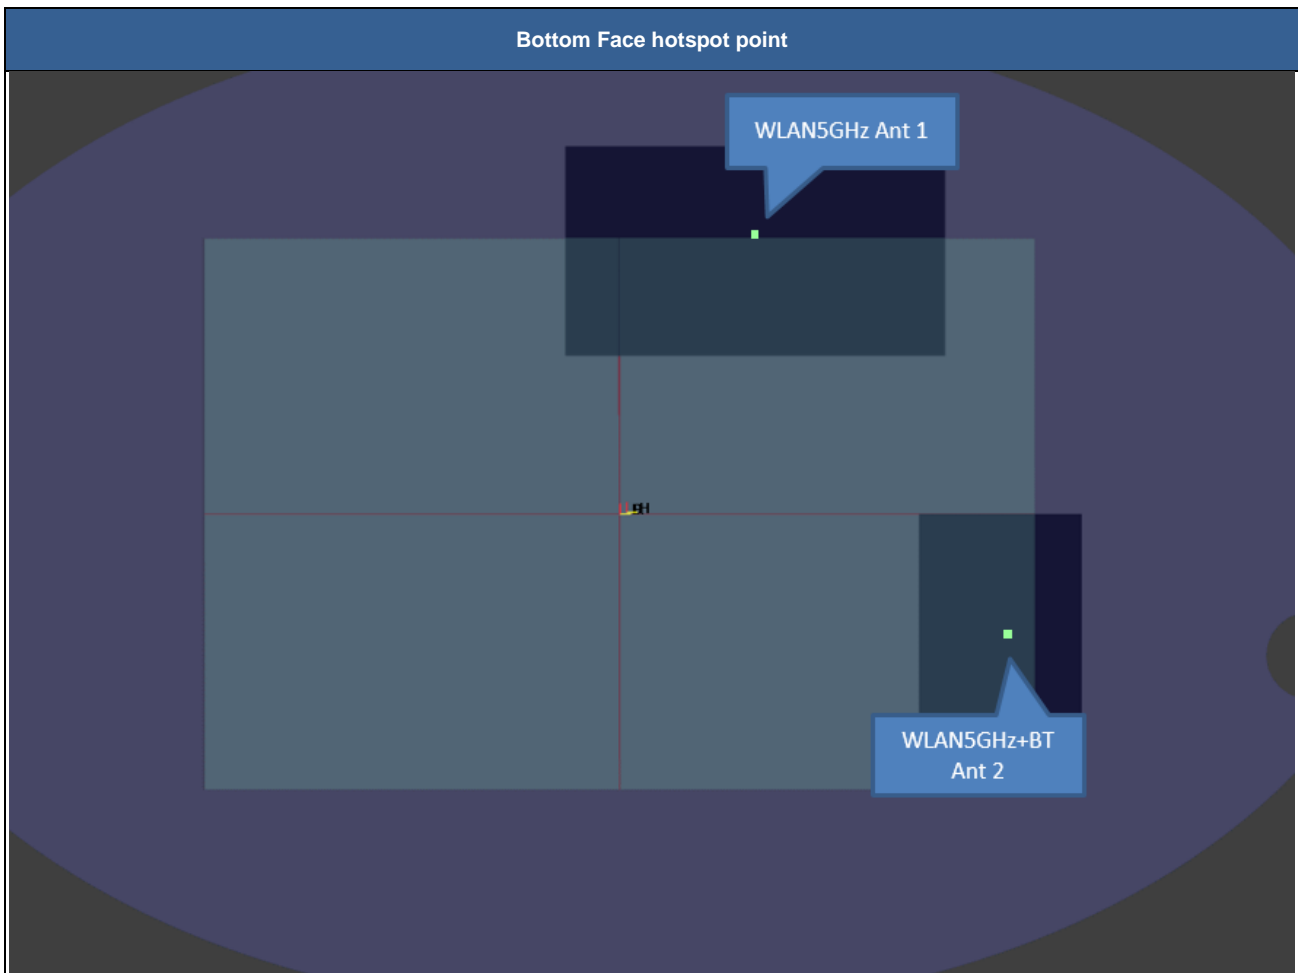

Case 1	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WLAN5GHz Ant 1	Bottom Face	0.125	0mm	-104.6	44.4	-177	172.2	1.69	0.01	Not required
	WLAN5GHz+BT Ant 2		1.569	0mm	43.4	132.5	-177				

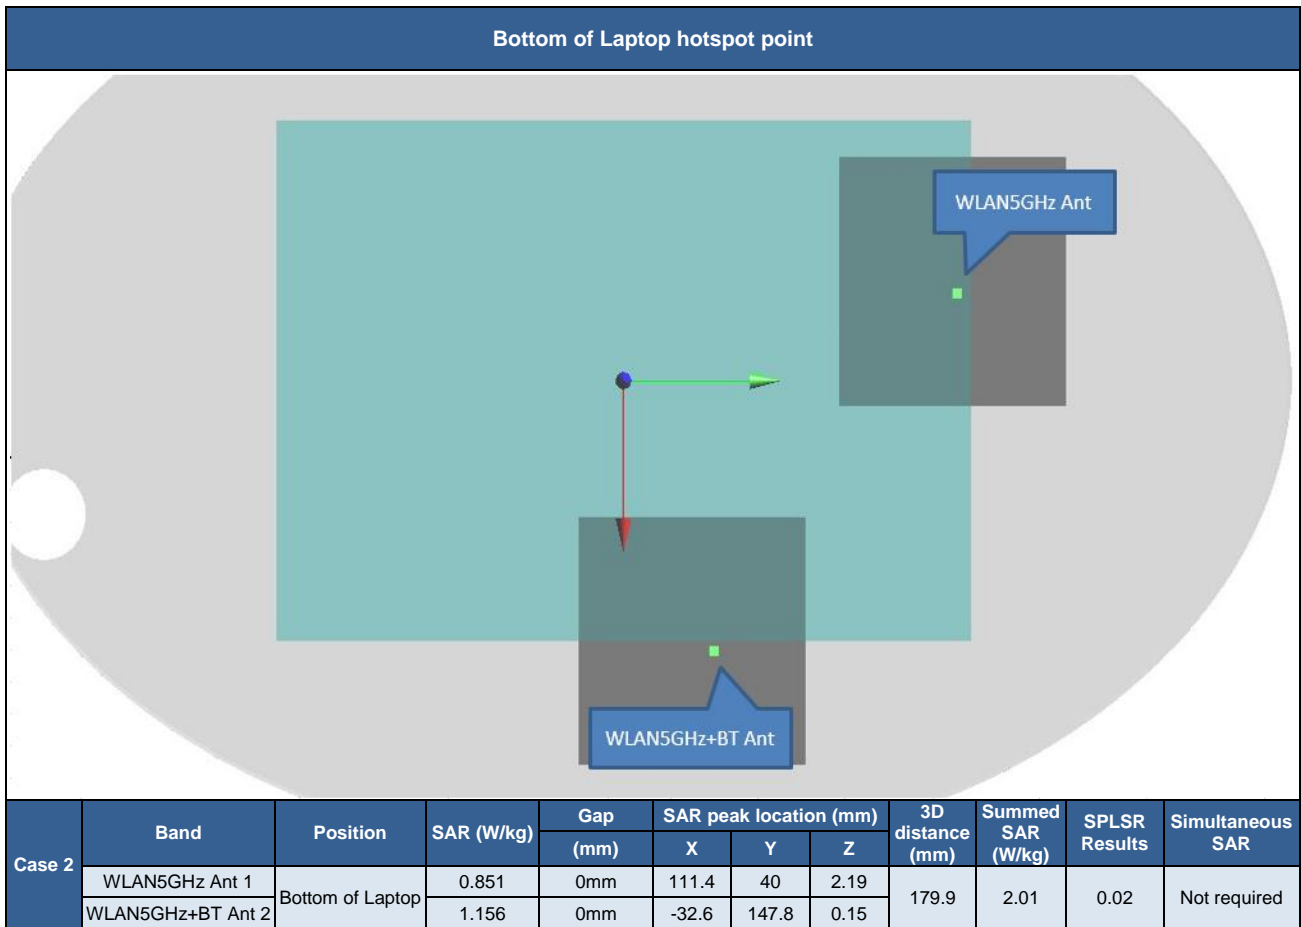

Test Engineer : Sing Lim, Shane Song, Henry Chou, Randy Lin and Roy Huang



15. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

16. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [8] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [9] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.