



Class II Permissive Change
Test Report
And Application for Grant of Equipment Authorization

TEST REPORT PERTAINING TO:

Equipment Under Test	Model Number(s)
Intel Wireless WiFi Link 4965AGN	4965AGN

CONFIGURATION
802.11a / 802.11b / 802.11g / 802.11n with a set of Acon & WNC Antennas

MEASUREMENTS PERFORMED IN ACCORDANCE WITH THE FOLLOWING STANDARD (S)

Regulatory Standard(s)
47 CFR Part 15, Subpart E Section 15.407 (UNII Devices)
Test Method: ANSI C63.4: 2003 American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz



Certificate Number: 1111.01

PREPARED FOR:

Dell Computer Corporation
One Dell Way
Round Rock, TX 78682
Contact(s): Mr. Jason Limoges

PREPARED BY:

Aegis Labs, Inc.
8 Rancho Circle
Lake Forest, CA 92630
Agent(s): Mr. Rick Candelas
Mr. Johnny Candelas



Test Report #: INTEL-070911F

Test Report Revision: NONE

PAGES	REPORT BODY	APPENDICES		TOTAL PAGES
		A	B	
17	133	1		151

The contents of this report shall not be reproduced except in full, without the written approval of Aegis Labs, Inc. The Dell logo is used for identification purposes only and is a registered trademark of Dell Computer Corporation



TABLE OF CONTENTS

SECTION	TITLE	PAGE
	COVER SHEET.....	01
	TABLE OF CONTENTS.....	02
1.0	REGULATORY COMPLIANCE GUIDELINES.....	03
1.1	Guidelines For Testing To Emissions Standards.....	03
2.0	SUMMARY OF REGULATORY LIMITS.....	04
3.0	ADMINISTRATIVE DATA AND TEST DESCRIPTION.....	11
4.0	DESCRIPTION OF EUT CONFIGURATION.....	12
4.1	EUT Description	12
4.2	EUT Configuration.....	13
4.3	List of EUT Sub-Assemblies and Host Equipment.....	13
4.4	I/O Cabling Diagram and Description	14
4.5	EMC Test Hardware and Software Measurement Equipment.....	15
5.0	CONDITIONS DURING EMISSIONS MEASUREMENTS.....	16
5.1	General.....	16
5.2	Conducted Emissions Test Setup.....	16
5.3	Radiated Emissions Test Setup.....	17

APPENDICES

A	Test Data
B	Modifications And Recommendations



1.0 REGULATORY COMPLIANCE GUIDELINES

Aegis Labs, Inc. operates as both a Nevada and California Corporation with no organizational or financial relationship with any company, institution, or private individual. Testing and engineering functions provided by Aegis Labs were furnished by RF technicians and engineers with accredited qualifications and training credentials to carry out their duties.

The object of this report was to publish verifiable test results of an EUT subjected to the tests outlined in the standard listed on the cover page of this report.

1.1 Guidelines For Testing To Emissions Standards

This standard for EMC emission requirements apply to electrical equipment for Information Technology Equipment (ITE). Compliance to these standards and in combination with the other standards listed in this test report can be used to demonstrate presumption of compliance with the protection requirements of the appropriate agency standard.

The purpose of this standard is to specify minimum requirements for emissions regarding electromagnetic compatibility (EMC) and protect the radio frequency spectrum 9 kHz. – 400 GHz. from unwanted interference generated from electrical/digital systems that intentionally or unintentionally generated RF energy. The emissions standards, normative documents and/or publications were used to conduct all tests performed on the equipment herein referred to as “Equipment Under Test”.



2.0 SUMMARY OF TEST RESULTS

802.11a Mode (5150-5350 MHz) Chain A

EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
Operation in the 5.15-5.25 GHz Band			
15.407(d)	Any UNII device shall use a transmitting antenna that is an integral part of the device.	PASSED	The antenna will be integral when installed in a notebook computer
15.407(e)	UNII devices will be restricted to indoor operations.	PASSED	Refer to "User's Manual" Exhibit
15.407(a)(1)	26dB emissions bandwidth in MHz.	N/A	5.18 GHz = 22.00 MHz <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power shall not exceed the lesser of 50mW or 4dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.18 GHz = 16.61dBm (45.81mW) 5.24 GHz = 16.81dBm (47.97mW)
15.407(a)(1)	The peak power spectral density shall not exceed 4dBm in any 1MHz band.	PASSED	5.18 GHz = -15.06dBm <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(1)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.	PASSED	See Data Sheets
Operation in the 5.25-5.35 GHz Band			
15.407(a)(2)	26dB emissions bandwidth in MHz.	N/A	5.26 GHz = 22.42 MHz 5.32 GHz = 21.50 MHz <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power shall not exceed the lesser of 250mW or 11dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.26 GHz = 18.61dBm (72.60mW) 5.32 GHz = 18.41dBm (69.34mW)
15.407(a)(2)	The peak power spectral density shall not exceed 11dBm in any 1MHz band.	PASSED	5.26 GHz = 9.50dBm 5.32 GHz = 9.83dBm <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(2)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz. Must meet all applicable technical requirements for operating in the 5.15-5.25 GHz band.	PASSED	See Data Sheets
General Requirements For All Bands			
15.407(a)(6)	The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.	PASSED	5.18 GHz = 5.83 dB 5.26 GHz = 5.67 dB 5.32 GHz = 5.50 dB <i>Per Original Filing</i>
15.407(f)	Radio frequency radiation exposure requirement.	PASSED	Refer to SAR Test Report
15.407(b)(6) 15.207	UNII devices using AC power line are required to comply with the conducted limits set forth in Section 15.207.	PASSED	<i>See Original Filing</i>



2.0 Summary Of Test Results (Continued)

802.11a Mode (5150-5350 MHz) Chain B

EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
Operation in the 5.15-5.25 GHz Band			
15.407(d)	Any UNII device shall use a transmitting antenna that is an integral part of the device.	PASSED	The antenna will be integral when installed in a notebook computer
15.407(e)	UNII devices will be restricted to indoor operations.	PASSED	Refer to "User's Manual" Exhibit
15.407(a)(1)	26dB emissions bandwidth in MHz.	N/A	5.18 GHz = 23.50 MHz <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power shall not exceed the lesser of 50mW or 4dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.18 GHz = 16.81dBm (47.97mW) 5.24 GHz = 16.91dBm (49.09mW)
15.407(a)(1)	The peak power spectral density shall not exceed 4dBm in any 1MHz band.	PASSED	5.18 GHz = -13.62dBm <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(1)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.	PASSED	See Data Sheets
Operation in the 5.25-5.35 GHz Band			
15.407(a)(2)	26dB emissions bandwidth in MHz.	N/A	5.26 GHz = 23.75 MHz 5.32 GHz = 22.33 MHz <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power shall not exceed the lesser of 250mW or 11dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.26 GHz = 19.41dBm (87.29mW) 5.32 GHz = 19.11dBm (81.46mW)
15.407(a)(2)	The peak power spectral density shall not exceed 11dBm in any 1MHz band.	PASSED	5.26 GHz = 9.83dBm 5.32 GHz = 9.33dBm <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(2)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz. Must meet all applicable technical requirements for operating in the 5.15-5.25 GHz band.	PASSED	See Data Sheets
General Requirements For All Bands			
15.407(a)(6)	The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.	PASSED	5.18 GHz = 6.17 dB 5.26 GHz = 6.17 dB 5.32 GHz = 5.83 dB <i>Per Original Filing</i>
15.407(f)	Radio frequency radiation exposure requirement.	PASSED	Refer to SAR Test Report
15.407(b)(6) 15.207	UNII devices using AC power line are required to comply with the conducted limits set forth in Section 15.207.	PASSED	<i>See Original Filing</i>



2.0 Summary Of Test Results (Continued)

802.11n Mode 20MHz Wide (5150-5350 MHz) Chain A

EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
Operation in the 5.15-5.25 GHz Band			
15.407(d)	Any UNII device shall use a transmitting antenna that is an integral part of the device.	PASSED	The antenna will be integral when installed in a notebook computer
15.407(e)	UNII devices will be restricted to indoor operations.	PASSED	Refer to "User's Manual" Exhibit
15.407(a)(1)	26dB emissions bandwidth in MHz.	N/A	5.18 GHz = 23.67 MHz <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power shall not exceed the lesser of 50mW or 4dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.18 GHz = 16.91dBm (49.09mW) 5.24 GHz = 16.71dBm (46.88mW)
15.407(a)(1)	The peak power spectral density shall not exceed 4dBm in any 1MHz band.	PASSED	5.18 GHz = -13.99dBm <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(1)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.	PASSED	See Data Sheets
Operation in the 5.25-5.35 GHz Band			
15.407(a)(2)	26dB emissions bandwidth in MHz.	N/A	5.26 GHz = 22.75 MHz 5.32 GHz = 22.33 MHz <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power shall not exceed the lesser of 250mW or 11dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.26 GHz = 18.81dBm (76.03mW) 5.32 GHz = 18.41dBm (69.34mW)
15.407(a)(2)	The peak power spectral density shall not exceed 11dBm in any 1MHz band.	PASSED	5.26 GHz = 9.83dBm 5.32 GHz = 9.67dBm <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(2)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz. Must meet all applicable technical requirements for operating in the 5.15-5.25 GHz band.	PASSED	See Data Sheets
General Requirements For All Bands			
15.407(a)(6)	The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.	PASSED	5.18 GHz = 6.17 dB 5.26 GHz = 4.84 dB 5.32 GHz = 5.00 dB <i>Per Original Filing</i>
15.407(f)	Radio frequency radiation exposure requirement.	PASSED	Refer to SAR Test Report
15.407(b)(6) 15.207	UNII devices using AC power line are required to comply with the conducted limits set forth in Section 15.207.	PASSED	<i>See Original Filing</i>



2.0 Summary Of Test Results (Continued)

802.11n Mode 20MHz Wide (5150-5350 MHz) Chain B

EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
Operation in the 5.15-5.25 GHz Band			
15.407(d)	Any UNII device shall use a transmitting antenna that is an integral part of the device.	PASSED	The antenna will be integral when installed in a notebook computer
15.407(e)	UNII devices will be restricted to indoor operations.	PASSED	Refer to "User's Manual" Exhibit
15.407(a)(1)	26dB emissions bandwidth in MHz.	N/A	5.18 GHz = 23.25 MHz <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power shall not exceed the lesser of 50mW or 4dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.18 GHz = 16.71dBm (46.88mW) 5.24 GHz = 16.81dBm (47.97mW)
15.407(a)(1)	The peak power spectral density shall not exceed 4dBm in any 1MHz band.	PASSED	5.18 GHz = -12.67dBm <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(1)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.	PASSED	See Data Sheets
Operation in the 5.25-5.35 GHz Band			
15.407(a)(2)	26dB emissions bandwidth in MHz.	N/A	5.26 GHz = 23.00 MHz 5.32 GHz = 22.75 MHz <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power shall not exceed the lesser of 250mW or 11dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.26 GHz = 19.21dBm (83.36mW) 5.32 GHz = 18.71dBm (74.29mW)
15.407(a)(2)	The peak power spectral density shall not exceed 11dBm in any 1MHz band.	PASSED	5.26 GHz = 10.00dBm 5.32 GHz = 10.00dBm <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(2)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz. Must meet all applicable technical requirements for operating in the 5.15-5.25 GHz band.	PASSED	See Data Sheets
General Requirements For All Bands			
15.407(a)(6)	The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.	PASSED	5.18 GHz = 5.00 dB 5.26 GHz = 5.67 dB 5.32 GHz = 5.67 dB <i>Per Original Filing</i>
15.407(f)	Radio frequency radiation exposure requirement.	PASSED	Refer to SAR Test Report
15.407(b)(6) 15.207	UNII devices using AC power line are required to comply with the conducted limits set forth in Section 15.207.	PASSED	<i>See Original Filing</i>



2.0 Summary Of Test Results (Continued)

802.11n Mode 40MHz Wide (5150-5350 MHz) Chain A

EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
Operation in the 5.15-5.25 GHz Band			
15.407(d)	Any UNII device shall use a transmitting antenna that is an integral part of the device.	PASSED	The antenna will be integral when installed in a notebook computer
15.407(e)	UNII devices will be restricted to indoor operations.	PASSED	Refer to "User's Manual" Exhibit
15.407(a)(1)	26dB emissions bandwidth in MHz.	N/A	5.19 GHz = 40.50 MHz <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power shall not exceed the lesser of 50mW or 4dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.19 GHz = 16.51dBm (44.76mW)
15.407(a)(1)	The peak power spectral density shall not exceed 4dBm in any 1MHz band.	PASSED	5.19 GHz = -22.79dBm <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(1)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.	PASSED	See Data Sheets
Operation in the 5.25-5.35 GHz Band			
15.407(a)(2)	26dB emissions bandwidth in MHz.	N/A	5.27 GHz = 47.50 MHz 5.31 GHz = 39.70 MHz <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power shall not exceed the lesser of 250mW or 11dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.27 GHz = 18.51dBm (70.95mW) 5.31 GHz = 16.41dBm (43.74mW)
15.407(a)(2)	The peak power spectral density shall not exceed 11dBm in any 1MHz band.	PASSED	5.27 GHz = 8.67dBm 5.31 GHz = 6.67dBm <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(2)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz. Must meet all applicable technical requirements for operating in the 5.15-5.25 GHz band.	PASSED	See Data Sheets
General Requirements For All Bands			
15.407(a)(6)	The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.	PASSED	5.19 GHz = 4.83 dB 5.27 GHz = 4.33 dB 5.31 GHz = 5.34 dB <i>Per Original Filing</i>
15.407(f)	Radio frequency radiation exposure requirement.	PASSED	Refer to SAR Test Report
15.407(b)(6) 15.207	UNII devices using AC power line are required to comply with the conducted limits set forth in Section 15.207.	PASSED	<i>See Original Filing</i>

2.0 Summary Of Test Results (Continued)

802.11n Mode 40MHz Wide (5150-5350 MHz) Chain B

EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
Operation in the 5.15-5.25 GHz Band			
15.407(d)	Any UNII device shall use a transmitting antenna that is an integral part of the device.	PASSED	The antenna will be integral when installed in a notebook computer
15.407(e)	UNII devices will be restricted to indoor operations.	PASSED	Refer to "User's Manual" Exhibit
15.407(a)(1)	26dB emissions bandwidth in MHz.	N/A	5.19 GHz = 40.30 MHz <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power shall not exceed the lesser of 50mW or 4dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.19 GHz = 16.41dBm (43.74mW)
15.407(a)(1)	The peak power spectral density shall not exceed 4dBm in any 1MHz band.	PASSED	5.19 GHz = -22.27dBm <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(1)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.	PASSED	See Data Sheets
Operation in the 5.25-5.35 GHz Band			
15.407(a)(2)	26dB emissions bandwidth in MHz.	N/A	5.27 GHz = 44.20 MHz 5.31 GHz = 39.70 MHz <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power shall not exceed the lesser of 250mW or 11dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.27 GHz = 18.91dBm (77.79mW) 5.31 GHz = 16.21dBm (41.78mW)
15.407(a)(2)	The peak power spectral density shall not exceed 11dBm in any 1MHz band.	PASSED	5.27 GHz = 8.83dBm 5.31 GHz = 6.33dBm <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(2)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz. Must meet all applicable technical requirements for operating in the 5.15-5.25 GHz band.	PASSED	See Data Sheets
General Requirements For All Bands			
15.407(a)(6)	The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.	PASSED	5.19 GHz = 5.50 dB 5.27 GHz = 6.34 dB 5.31 GHz = 5.66 dB <i>Per Original Filing</i>
15.407(f)	Radio frequency radiation exposure requirement.	PASSED	Refer to SAR Test Report
15.407(b)(6) 15.207	UNII devices using AC power line are required to comply with the conducted limits set forth in Section 15.207.	PASSED	<i>See Original Filing</i>




2.0 Summary Of Test Results (Continued)

ANALYSIS AND CONCLUSIONS


Based upon the measurement results we find that this equipment is within the limits of the global standards listed on the cover page of this test report. All results are based on a test of one sample. If any significant changes are made to the unit, the changes shall be evaluated and a retest may be required.

Approval Signatories

Test and Report Completed By:


Johnny Candelas 10/04/07
Test Technician Date:
Aegis Labs, Inc.

Report Approved By:


Rick Candelas 11/05/07
Quality Assurance & EMC Lab Manager Date:
Aegis Labs, Inc.



3.0 ADMINISTRATIVE DATA AND TEST DESCRIPTION

DEVICE TESTED:	ITE Type: Intel Wireless WiFi Link 4965AGN Model Number(s): 4965AGN Serial Number: 0013E8056F43 FCC ID: E2K4965AGNM
DATE EUT RECEIVED:	September 14 th , 2007
TEST DATE(S):	September 15 th – November 2 nd , 2007
ORIGIN OF TEST SAMPLE(S):	Production
EQUIPMENT CLASS:	EUT tested as CLASS B device
RESPONSIBLE PARTY:	Dell Computer Corporation One Dell Way Round Rock, TX 78682
CLIENT CONTACT:	Mr. Jason Limoges
MANUFACTURER:	Dell Computer Corporation
TEST LOCATION:	Aegis Labs, Inc. 32231 Trabuco Creek Road Trabuco Canyon, CA 92678 Open Area Test Site #2
ACCREDITATION CERTIFICATE(S):	A2LA Certificate Number: 1111.01, Valid through February 28, 2008
PURPOSE OF TEST:	To demonstrate compliance with the standards as described in Sections 1.0 & 2.0 of this report.
UNCERTAINTY BUDGET:	Proficiency Testing and Uncertainty Calculations for all tests indicated in this report have been conducted in accordance with ISO 17025: 2005 requirements Section 5.4.6, and 5.9. Uncertainty Budgets and Proficiency Test results available upon request.
STATEMENT OF CALIBRATION:	All accredited equipment calibrations were performed by Liberty Labs, Inc. and World Cal. with typical calibration uncertainty estimates derived from ISO Guide to the determination of uncertainties with a Coverage Factor of k=2 for 95% level of confidence.



4.2 EUT Configuration

The EUT was tested installed in the Mini PCI-E slot of the host computer. The EUT was then connected to a set of antennas via its Chain A, B, & C antenna ports. Data for a set of Acon & WNC Antennas can be found in Appendix A (Data Sheets)

The low, middle, and high channels were tested in 802.11a, b, g, & n modes. Also, the EUT was tested once transmitting from Chain A antenna port and once transmitting from Chain B antenna port. The EUT was placed in either continuous transmit or continuous receive mode by a program provided by the manufacturer (*CRTU Version 4.1.28.0000*).

4.3 List of EUT, Sub-Assemblies and Host Equipment


Equipment Under Test			
Manufacturer	Equipment Name	Model or Part Number	Serial Number
Intel Corporation	Intel Wireless WiFi Link 4965AGN	4965AGN	0013E8056F43

EUT Sub Assemblies			
Manufacturer	Equipment Name	Model or Part Number	Serial Number
Dell	Host Computer	Inspiron 1525	CN-0SE2C1-70166-77N-013B
Advanced-Connectek Inc.	Chain A (Tx) Antenna	AMP8P-700036	N/A
Advanced-Connectek Inc.	Chain B (Tx) Antenna	APP8P-700002	N/A
Advanced-Connectek Inc.	Chain C (Rx) Antenna	APP8P-700003	N/A
Dell	Host Computer	Inspiron 1525	CN-0SE2C1-70166-77N-002C
Wistron NeWeb Corp.	Chain A (Tx) Antenna	81.EG615.001	N/A
Wistron NeWeb Corp.	Chain B (Tx) Antenna	81.EG615.003	N/A
Wistron NeWeb Corp.	Chain C (Rx) Antenna	81.EG615.004	N/A
Dell	Host Computer	XPS M1530	PS069869
Advanced-Connectek Inc.	Chain A (Tx) Antenna	APP8P-700001	N/A
Advanced-Connectek Inc.	Chain B (Tx) Antenna	APM6P-700026	N/A
Advanced-Connectek Inc.	Chain C (Rx) Antenna	APM6P-700027	N/A
Dell	Host Computer	XPS M1530	PS069916
Wistron NeWeb Corp.	Chain A (Tx) Antenna	81.EG515.001	N/A
Wistron NeWeb Corp.	Chain B (Tx) Antenna	81.EG515.003	N/A
Wistron NeWeb Corp.	Chain C (Rx) Antenna	81.EG515.004	N/A

HOST EQUIPMENT LIST			
Manufacturer	Equipment Name	Model or Part Number	Serial Number
Logitech	Keyboard	Y-BF37	MCTZ5200581
Logitech	Mouse	M-BJ58	LZE14759424

NOTE: All the power cords of the above support equipment are standard and non-shielded.

4.4 I/O Cabling Diagram and Description

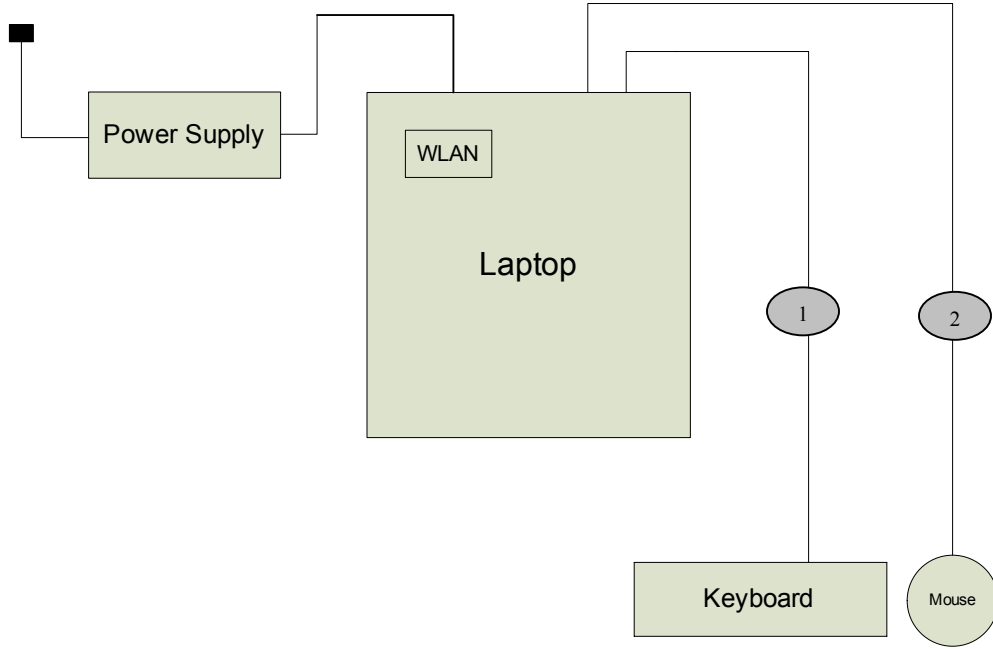

Signal Line Cable Description

Cable	Length	Construction	Source Connector	Destination Connector	Bundled Length	Ferrite Attached	Note
1	1.5m	Round, Braid & Foil Shielded	Host Computer: Metallic 8-pin Mini DIN	Keyboard: Hardwired	N/A	N/A	N/A
2	1.5m	Round, Braid & Foil Shielded	Host Computer: Metallic 8-pin Mini DIN	Mouse: Hardwired	N/A	N/A	N/A



4.5 EMC Test Hardware and Software Measurement Equipment

TEST EQUIPMENT LIST - Emissions					
Equipment Name	Manufacturer	Model Number	Serial Number	Calibration Due Date	Maintenance Calibration Cycle
Spectrum Analyzer	Agilent	8565EC	3946A00245	07/24/08	1 Year
Antenna – Horn	EMCO	3115	2230	05/15/08	1 Year
Preamp	Miteq	JS42-01001800-25-10P	815980	09/21/08	1 Year
28 Foot Coax	Semflex	S1L29BFS1348	608	07/26/08	1 Year
5.15-5.35 GHz Notch Filter	Microwave Circuits	N0452502	3173-01	NCR	NCR
Antenna - 18-26.5 GHz Pre-amplified Horn	Aegis Labs, Inc.	H042	SLK-35-3W	02/08/08	1 Year
Antenna - 26.5-40 GHz Pre-amplified Horn	Aegis Labs, Inc.	H028	GM1260-10	02/08/08	1 Year
Power Meter	Anritsu	ML2487A	6K00001785	05/29/08	1 Year
Wide Bandwidth Sensor	Anritsu	MA2491A	31193	05/29/08	1 Year
12dB Attenuator	Narda	4779-12	203	06/09/08	1 Year
Temperature/Humidity Monitor	Dickson	TH550	7255185	04/13/08	1 Year

NCR – No Calibration Required.

5.0 CONDITIONS DURING EMISSIONS MEASUREMENTS

5.1 General

All measurements were made according to the procedures defined in or referred to by the standard listed on the cover page of this report. The measurements were made in the operating mode producing the largest emissions consistent with normal operation and connected to the minimum configuration of auxiliary devices.

5.2 Conducted Emissions Test Setup


The following was the test configuration.

EUT signal cables that hung closer than 40 cm to the horizontal metal ground plane were folded back and forth forming a bundle 30 cm to 40 cm long. The power cord of the EUT was also bundled in the center and plugged into one of the artificial mains network (AMN). All peripheral equipment was powered from a second AMN via a multiple outlet strip placed at a distance on 10cm from each other. The AMN and ISN were positioned 80cm from the EUT. Signal cables that were not connected to an AE were terminated using the correct termination. If applicable, the current probe was placed at 0.1 m from the ISN.

Peak, quasi-peak and/or average detectors were used for testing performed between 150 kHz and 30 MHz. A swept frequency scan was performed for both Line 1 and Line 2. The six highest readings were compared against the limit and recorded in the data sheet along with a snapshot image of the sweep scan. The graphical scans in Appendix A only reflect peak readings while the tabulated data sheets reflect peak, average, and/or quasi-peak measurements.

Climatic Conditions:

The EUT was tested within its intended operating and climatic conditions.

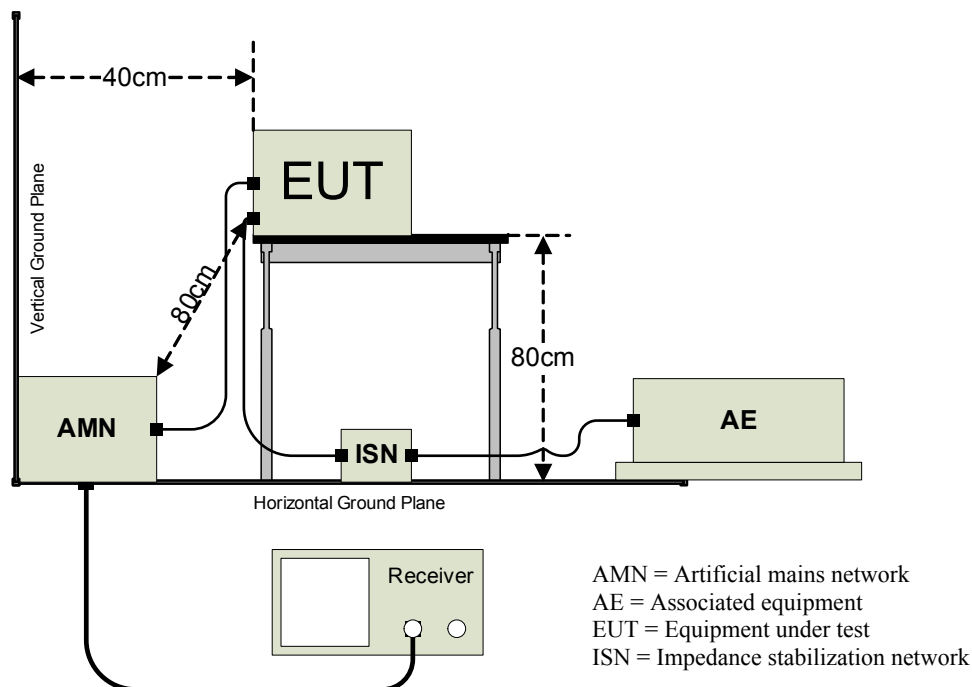


5.3 Radiated Emissions Test Setup

The Open Area Test Site (OATS) was used for radiated emission testing. The receiving (Rx) antenna(s) was placed 10m from the nearest side of the EUT facing the Rx antenna. The EUT (if floor-standing) was placed directly on the flush-mounted 360 degree rotating turntable. The EUT (if table-top) was placed directly on an 80cm high non-metallic table, and the table was placed on the rotating turntable. During the initial EMI scan, all the suspect frequencies, i.e.; harmonics, broadband signals were checked with the Rx broadband antennas in both vertical and horizontal polarities. The biconical Rx, log periodic Rx, and horn Rx antennas were used from 30MHz – 299.99MHz, 300MHz – 1000MHz, and 1GHz – 18GHz respectively.

Upon completion of all harmonic and broadband measurements, the balance of any remaining frequencies was checked between 30MHz – 18GHz. Any signals appearing within 20 dB of the classification limit was measured. Each signal was maximized by first rotating the turntable at least 360 degrees and recording the azimuth in the data sheet. Lastly, the Rx antenna was raised and/or lowered to maximize the signal elevation. If the measured signal was obtained using the peak detector and that signal appeared within 3 dB of the regulatory limit line, then the same signal was re-measured using the quasi-peak detector on the EMI receiver. Both meter readings if necessary were recorded on the data sheet.

Climatic Conditions:

The EUT was tested within its intended operating and climatic conditions.

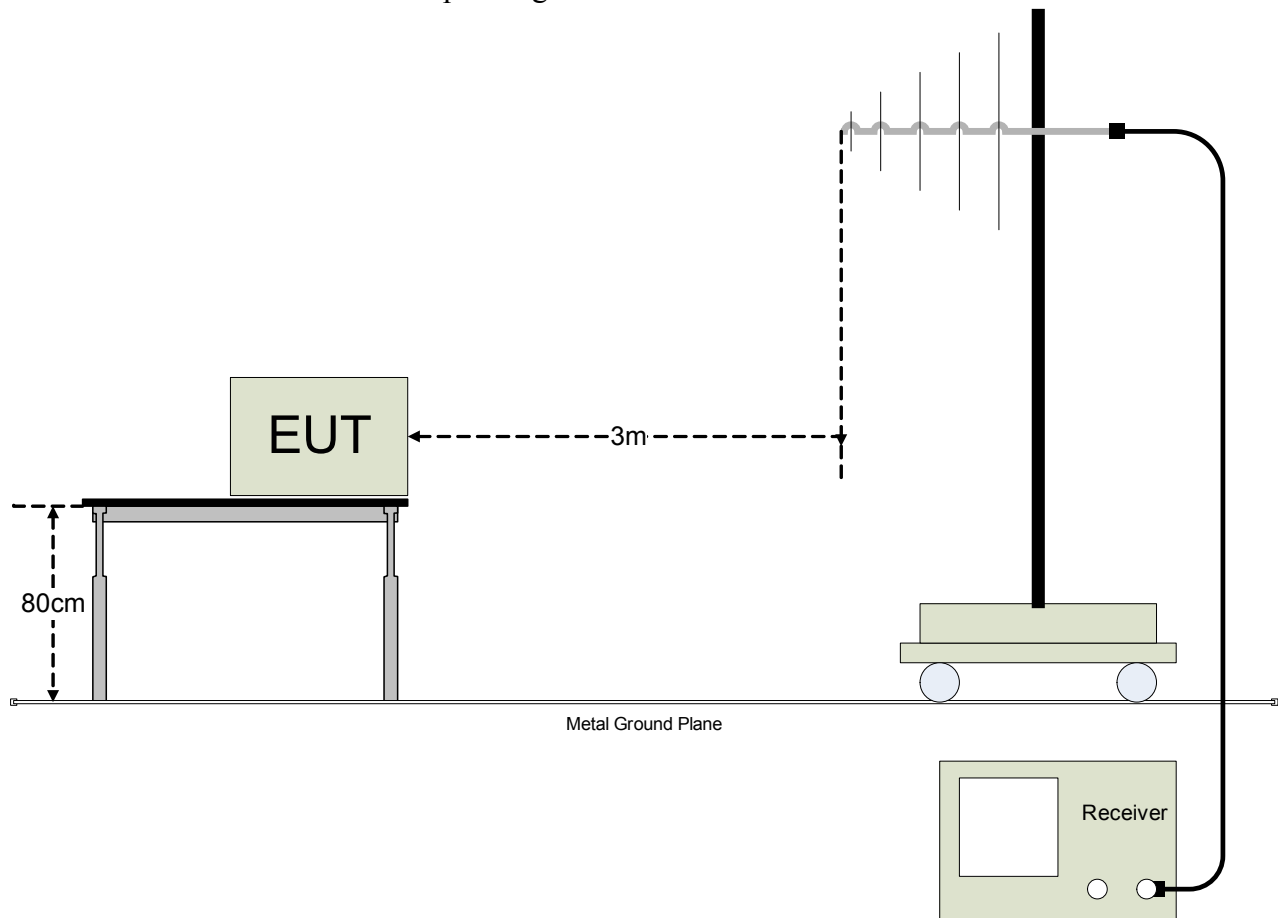



APPENDIX A

TEST DATA

**RADIATED EMISSIONS TEST RESULTS**

CLIENT:	Dell Computer Corporation	DATE:	09/27/07
EUT:	Intel Wireless WiFi Link 4965AGN	PROJECT NUMBER:	INTEL-070910
MODEL NUMBER:	4965AGN	TEST ENGINEER:	JC/PC
SERIAL NUMBER:	0013E8056F43	SITE #:	2
CONFIGURATION:	Tested installed in the Spears host computer's mini PCI slot in 802.11a (5150-5350 MHz) mode with WNC Antennas.	TEMPERATURE:	23 deg. C
		HUMIDITY:	40% RH
		TIME:	8:20 AM

Description:	Radiated RF Emissions (1 GHz – 18 GHz)
Results:	PASSED Horizontal and Vertical Antenna Polarizations Class B Limits
Note:	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"> • 120VAC / 60 Hz.

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

Radiated Emissions Sample Calculations

$$\text{Corrected Meter Reading} = \text{Meter Reading} + F + C - D$$

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

$$\text{CML} = \text{Specification Limit} - F - C + D$$



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11a mode (5150-5350 MHz)
 Channels 36, 48, 52, & 64
 Continuous TX at Chain A Antenna port Spears platform with WNC Antennas
 Aegis Labs, Inc. File #: INTEL-070910-02*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5180.00	62.33	100	315			9.54	2.98	34.62	90.39			Ch. 36
5180.00				50.33	A	9.54	2.98	34.62	78.39			
5240.00	63.67	125	315			9.54	3.00	34.73	91.86			Ch. 48
5240.00				51.33	A	9.54	3.00	34.73	79.52			
5260.00	66.00	100	315			9.54	3.00	34.77	94.23			Ch. 52
5260.00				53.50	A	9.54	3.00	34.77	81.73			
5320.00	65.33	100	315			9.54	3.02	34.88	93.69			Ch. 64
5320.00				52.33	A	9.54	3.02	34.88	80.69			

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5180.00	65.83	100	135			9.54	2.98	34.39	93.66			Ch. 36
5180.00				52.67	A	9.54	2.98	34.39	80.50			
5240.00	65.67	100	225			9.54	3.00	34.48	93.61			Ch. 48
5240.00				53.33	A	9.54	3.00	34.48	81.27			
5260.00	67.17	100	225			9.54	3.00	34.52	95.15			Ch. 52
5260.00				54.67	A	9.54	3.00	34.52	82.65			
5320.00	64.83	100	225			9.54	3.02	34.61	92.92			Ch. 64
5320.00				52.67	A	9.54	3.02	34.61	80.76			

NOTE: Fundamental signals measured at 1 meter and extrapolated to 3 meters to calculate the radiated band edge field strengths.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11a mode (5150-5350 MHz)
Channels 36 & 64
Continuous TX at Chain A Antenna port Spears platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-02*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00	30.33	100	225			9.54	2.97	34.57	58.33	74.00	-15.67	Ch. 36
5150.00				18.33	A	9.54	2.97	34.57	46.33	54.00	-7.67	
5350.00	30.33	100	225			9.54	3.03	34.93	58.75	74.00	-15.25	Ch. 64
5350.00				18.67	A	9.54	3.03	34.93	47.09	54.00	-6.91	

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00	30.00	100	180			9.54	2.97	34.34	57.77	74.00	-16.23	Ch. 36
5150.00				18.17	A	9.54	2.97	34.34	45.94	54.00	-8.06	
5350.00	30.17	100	225			9.54	3.03	34.66	58.32	74.00	-15.68	Ch. 64
5350.00				18.67	A	9.54	3.03	34.66	46.82	54.00	-7.18	

NOTE: The “Band Edge Field Strength” was calculated using the “Radiated Fundamental” measurements.



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11a mode (5150-5350 MHz)
Channels 36, 52, & 64
Continuous TX at Chain A Antenna port Spears platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-07*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.33	66.50	100	225		50.78	2.41	32.29	50.42	68.00	-17.58	Ch. 36
6906.66	66.67	100	225		50.50	3.47	35.91	55.54	68.00	-12.46	
3506.66	65.67	100	225		50.76	2.43	32.41	49.76	68.00	-18.24	Ch. 52
7013.40	67.17	100	135		50.42	3.51	36.03	56.29	68.00	-11.71	
3546.66	65.33	100	180		50.76	2.45	32.50	49.52	68.00	-18.48	Ch.64
7093.34	63.50	100	180		50.38	3.53	36.24	52.89	68.00	-15.11	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.33	68.50	100	180		50.78	2.41	31.80	51.93	68.00	-16.07	Ch. 36
6906.66	68.33	100	90		50.50	3.47	35.83	57.12	68.00	-10.88	
10360.00	66.33	100	180		50.39	4.39	38.59	58.92	68.00	-9.08	
3506.16	68.50	100	135		50.76	2.43	31.92	52.09	68.00	-15.91	Ch. 52
7013.39	67.67	100	135		50.42	3.51	35.93	56.69	68.00	-11.31	
3546.68	67.33	100	180		50.76	2.45	32.02	51.04	68.00	-16.96	Ch.64
7093.55	65.33	100	180		50.38	3.53	36.14	54.62	68.00	-13.38	



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11a mode (5150-5350 MHz)
Channels 36, 52, & 64
Continuous RX at Chain A Antenna port Spears platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-07*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.33	64.17	125	225			50.78	2.41	32.29	48.09	74.00	-25.91	Ch. 36
3453.33				54.73	A	50.78	2.41	32.29	38.65	54.00	-15.35	
3506.66	63.83	100	225			50.76	2.43	32.41	47.92	74.00	-26.08	Ch. 52
3506.66				54.75	A	50.76	2.43	32.41	38.84	54.00	-15.16	
3546.66	63.17	100	225			50.76	2.45	32.50	47.36	74.00	-26.64	Ch.64
3546.66				53.12	A	50.76	2.45	32.50	37.31	54.00	-16.69	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.33	66.00	100	225			50.78	2.41	31.80	49.43	74.00	-24.57	Ch. 36
3453.33				56.78	A	50.78	2.41	31.80	40.21	54.00	-13.79	
3506.68	62.67	100	225			50.76	2.43	31.92	46.26	74.00	-27.74	Ch. 52
3506.68				52.06	A	50.76	2.43	31.92	35.65	54.00	-18.35	
3546.66	63.00	100	225			50.76	2.45	32.02	46.71	74.00	-27.29	Ch.64
3546.66				51.81	A	50.76	2.45	32.02	35.52	54.00	-18.48	



Radiated Emissions Test Results (Continued)

Fundamental Measurements in 802.11a mode (5150-5350 MHz)
Channels 36, 48, 52, & 64
Continuous TX at Chain B Antenna port Spears platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-03

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5180.00	75.50	100	225			9.54	2.98	34.62	103.56			Ch. 36
5180.00				60.33	A	9.54	2.98	34.62	88.39			
5240.00	77.17	100	225			9.54	3.00	34.73	105.36			Ch. 48
5240.00				62.17	A	9.54	3.00	34.73	90.36			
5260.00	79.33	100	225			9.54	3.00	34.77	107.56			Ch. 52
5260.00				64.33	A	9.54	3.00	34.77	92.56			
5320.00	76.33	100	225			9.54	3.02	34.88	104.69			Ch. 64
5320.00				61.33	A	9.54	3.02	34.88	89.69			

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5180.00	72.83	100	225			9.54	2.98	34.39	100.66			Ch. 36
5180.00				58.17	A	9.54	2.98	34.39	86.00			
5240.00	73.17	100	225			9.54	3.00	34.48	101.11			Ch. 48
5240.00				58.50	A	9.54	3.00	34.48	86.44			
5260.00	74.50	100	225			9.54	3.00	34.52	102.48			Ch. 52
5260.00				60.17	A	9.54	3.00	34.52	88.15			
5320.00	72.00	100	135			9.54	3.02	34.61	100.09			Ch. 64
5320.00				58.33	A	9.54	3.02	34.61	86.42			

NOTE: Fundamental signals measured at 1 meter and extrapolated to 3 meters to calculate the radiated band edge field strengths.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11a mode (5150-5350 MHz)
Channels 36 & 64
Continuous TX at Chain B Antenna port Spears platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-03*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00	31.67	100	225			9.54	2.97	34.57	59.67	74.00	-14.33	Ch. 36
5150.00				19.17	A	9.54	2.97	34.57	47.17	54.00	-6.83	
5350.00	32.33	100	225			9.54	3.03	34.93	60.75	74.00	-13.25	Ch. 64
5350.00				20.00	A	9.54	3.03	34.93	48.42	54.00	-5.58	

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00	30.67	100	225			9.54	2.97	34.34	58.44	74.00	-15.56	Ch. 36
5150.00				19.00	A	9.54	2.97	34.34	46.77	54.00	-7.23	
5350.00	30.17	100	135			9.54	3.03	34.66	58.32	74.00	-15.68	Ch. 64
5350.00				19.00	A	9.54	3.03	34.66	47.15	54.00	-6.85	

NOTE: The “Band Edge Field Strength” was calculated using the “Radiated Fundamental” measurements.



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11a mode (5150-5350 MHz)
 Channels 36, 52, & 64
 Continuous TX at Chain B Antenna port Spears platform with WNC Antennas
 Aegis Labs, Inc. File #: INTEL-070910-08*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.33	59.83	100	225			50.78	2.41	32.29	43.75	68.00	-24.25	Ch. 36
6906.66	58.33	125	225			50.50	3.47	35.91	47.20	68.00	-20.80	
10360.00	67.17	100	225			50.39	4.39	38.62	59.79	68.00	-8.21	
3506.66	59.33	100	225			50.76	2.43	32.41	43.42	68.00	-24.58	Ch. 52
7013.40	57.67	100	180			50.42	3.51	36.03	46.79	68.00	-21.21	
10520.00	64.33	100	135			50.43	4.44	38.71	57.05	68.00	-10.95	
3546.66	58.83	100	225			50.76	2.45	32.50	43.02	68.00	-24.98	Ch.64
7093.34	56.00	100	180			50.38	3.53	36.24	45.39	68.00	-22.61	
10640.00	67.67	100	225			50.44	4.46	38.76	60.45	74.00	-13.55	
10640.00				53.50	A	50.44	4.46	38.76	46.28	54.00	-7.72	

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.33	58.08	100	180			50.78	2.41	31.80	41.51	68.00	-26.49	Ch. 36
6906.66	59.50	100	180			50.50	3.47	35.83	48.29	68.00	-19.71	
10360.00	68.67	100	180			50.39	4.39	38.59	61.26	68.00	-6.74	
3506.16	58.67	100	180			50.76	2.43	31.92	42.26	68.00	-25.74	Ch. 52
7013.39	58.33	100	180			50.42	3.51	35.93	47.35	68.00	-20.65	
10520.00	67.67	100	180			50.43	4.44	38.70	60.39	68.00	-7.61	
3546.68	58.50	100	180			50.76	2.45	32.02	42.21	68.00	-25.79	Ch.64
7093.55	57.33	100	180			50.38	3.53	36.14	46.62	68.00	-21.38	
10640.00	69.83	100	180			50.44	4.46	38.73	62.58	74.00	-11.42	
10640.00				56.44	A	50.44	4.46	38.73	49.19	54.00	-4.81	



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11a mode (5150-5350 MHz)
Channels 36, 52, & 64
Continuous RX at Chain B Antenna port Spears platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-08*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.33	54.17	125	225			50.78	2.41	32.29	38.09	74.00	-35.91	Ch. 36
3453.33				44.73	A	50.78	2.41	32.29	28.65	54.00	-25.35	
3506.66	53.83	100	225			50.76	2.43	32.41	37.92	74.00	-36.08	Ch. 52
3506.66				44.75	A	50.76	2.43	32.41	28.84	54.00	-25.16	
3546.66	53.17	100	225			50.76	2.45	32.50	37.36	74.00	-36.64	Ch.64
3546.66				43.12	A	50.76	2.45	32.50	27.31	54.00	-26.69	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.33	56.00	100	225			50.78	2.41	31.80	39.43	74.00	-34.57	Ch. 36
3453.33				46.78	A	50.78	2.41	31.80	30.21	54.00	-23.79	
3506.68	52.67	100	225			50.76	2.43	31.92	36.26	74.00	-37.74	Ch. 52
3506.68				42.06	A	50.76	2.43	31.92	25.65	54.00	-28.35	
3546.66	53.00	100	225			50.76	2.45	32.02	36.71	74.00	-37.29	Ch.64
3546.66				41.81	A	50.76	2.45	32.02	25.52	54.00	-28.48	

**RADIATED EMISSIONS TEST RESULTS**

CLIENT:	Dell Computer Corporation	DATE:	09/27/07
EUT:	Intel Wireless WiFi Link 4965AGN	PROJECT NUMBER:	INTEL-070910
MODEL NUMBER:	4965AGN	TEST ENGINEER:	PC/JC
SERIAL NUMBER:	0013E8056F43	SITE #:	2
CONFIGURATION:	Tested installed in the Spears host computer's mini PCI slot in 802.11n (5150-5350 MHz) mode 20MHz Wide with WNC Antennas.	TEMPERATURE:	27 deg. C
		HUMIDITY:	33% RH
		TIME:	1:30 PM

Description:	Radiated RF Emissions (1 GHz – 18 GHz)
Results:	PASSED Horizontal and Vertical Antenna Polarizations Class B Limits
Note:	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"> • 120VAC / 60 Hz.

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

Radiated Emissions Sample Calculations

$$\text{Corrected Meter Reading} = \text{Meter Reading} + F + C - D$$

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

$$\text{CML} = \text{Specification Limit} - F - C + D$$



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)
Channels 36, 48, 52, & 64
Continuous TX at Chain A Antenna port Spears platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-04*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5180.00	62.17	100	225			9.54	2.98	34.62	90.23			Ch. 36
5180.00				49.00	A	9.54	2.98	34.62	77.06			
5240.00	74.17	125	225			9.54	3.00	34.73	102.36			Ch. 48
5240.00				59.17	A	9.54	3.00	34.73	87.36			
5260.00	77.00	100	225			9.54	3.00	34.77	105.23			Ch. 52
5260.00				61.83	A	9.54	3.00	34.77	90.06			
5320.00	65.50	100	225			9.54	3.02	34.88	93.86			Ch. 64
5320.00				50.50	A	9.54	3.02	34.88	78.86			

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5180.00	60.00	100	225			9.54	2.98	34.39	87.83			Ch. 36
5180.00				46.33	A	9.54	2.98	34.39	74.16			
5240.00	74.00	150	180			9.54	3.00	34.48	101.94			Ch. 48
5240.00				58.83	A	9.54	3.00	34.48	86.77			
5260.00	76.67	125	180			9.54	3.00	34.52	104.65			Ch. 52
5260.00				61.50	A	9.54	3.00	34.52	89.48			
5320.00	63.67	100	225			9.54	3.02	34.61	91.76			Ch. 64
5320.00				49.00	A	9.54	3.02	34.61	77.09			

NOTE: Fundamental signals measured at 1 meter and extrapolated to 3 meters to calculate the radiated band edge field strengths.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)
Channels 36 & 64
Continuous TX at Chain A Antenna port Spears platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-04*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00	30.83	100	225			9.54	2.97	34.57	58.83	74.00	-15.17	Ch. 36
5150.00				18.33	A	9.54	2.97	34.57	46.33	54.00	-7.67	
5350.00	30.17	100	225			9.54	3.03	34.93	58.59	74.00	-15.41	Ch. 64
5350.00				18.67	A	9.54	3.03	34.93	47.09	54.00	-6.91	

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00	30.17	100	225			9.54	2.97	34.34	57.94	74.00	-16.06	Ch. 36
5150.00				18.33	A	9.54	2.97	34.34	46.10	54.00	-7.90	
5350.00	29.83	100	225			9.54	3.03	34.66	57.98	74.00	-16.02	Ch. 64
5350.00				18.67	A	9.54	3.03	34.66	46.82	54.00	-7.18	

NOTE: The “Band Edge Field Strength” was calculated using the “Radiated Fundamental” measurements.



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)
Channels 36, 52, & 64
Continuous TX at Chain A Antenna port Spears platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-12*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.42	58.67	100	225		50.78	2.41	32.29	42.59	68.00	-25.41	Ch. 36
6906.66	59.00	100	225		50.50	3.47	35.91	47.87	68.00	-20.13	
10359.58	64.17	100	180		50.39	4.39	38.62	56.79	68.00	-11.21	
3506.27	59.17	100	225		50.76	2.43	32.41	43.26	68.00	-24.74	Ch. 52
7013.30	61.00	100	225		50.42	3.51	36.03	50.12	68.00	-17.88	
10520.00	61.50	100	180		50.43	4.44	38.71	54.22	68.00	-13.78	
3546.76	58.33	100	180		50.76	2.45	32.50	42.52	68.00	-25.48	Ch.64
7093.36	60.00	100	180		50.38	3.53	36.24	49.39	68.00	-18.61	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.39	57.33	100	225		50.78	2.41	31.80	40.76	68.00	-27.24	Ch. 36
6906.66	60.33	100	180		50.50	3.47	35.83	49.12	68.00	-18.88	
10360.00	60.50	100	180		50.39	4.39	38.59	53.09	68.00	-14.91	
3506.66	56.50	100	225		50.76	2.43	31.92	40.09	68.00	-27.91	Ch. 52
7013.34	61.00	100	180		50.42	3.51	35.93	50.02	68.00	-17.98	
10520.00	62.50	100	225		50.43	4.44	38.70	55.22	68.00	-12.78	
3546.66	57.17	100	225		50.76	2.45	32.02	40.88	68.00	-27.12	Ch.64
7093.35	60.00	100	180		50.38	3.53	36.14	49.29	68.00	-18.71	



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)
Channels 36, 48, 52, & 64
Continuous TX at Chain B Antenna port Spears platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-05*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5180.00	75.00	100	225			9.54	2.98	34.62	103.06			Ch. 36
5180.00				60.67	A	9.54	2.98	34.62	88.73			
5240.00	76.83	100	225			9.54	3.00	34.73	105.02			Ch. 48
5240.00				61.67	A	9.54	3.00	34.73	89.86			
5260.00	77.00	100	225			9.54	3.00	34.77	105.23			Ch. 52
5260.00				62.17	A	9.54	3.00	34.77	90.40			
5320.00	77.67	100	225			9.54	3.02	34.88	106.03			Ch. 64
5320.00				63.00	A	9.54	3.02	34.88	91.36			

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5180.00	74.33	100	225			9.54	2.98	34.39	102.16			Ch. 36
5180.00				58.83	A	9.54	2.98	34.39	86.66			
5240.00	74.67	100	225			9.54	3.00	34.48	102.61			Ch. 48
5240.00				59.67	A	9.54	3.00	34.48	87.61			
5260.00	73.83	100	225			9.54	3.00	34.52	101.81			Ch. 52
5260.00				60.33	A	9.54	3.00	34.52	88.31			
5320.00	74.33	100	135			9.54	3.02	34.61	102.42			Ch. 64
5320.00				60.00	A	9.54	3.02	34.61	88.09			

NOTE: Fundamental signals measured at 1 meter and extrapolated to 3 meters to calculate the radiated band edge field strengths.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)
Channels 36 & 64
Continuous TX at Chain B Antenna port Spears platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-05*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00	36.00	100	225			9.54	2.97	34.57	64.00	74.00	-10.00	Ch. 36
5150.00				20.17	A	9.54	2.97	34.57	48.17	54.00	-5.83	
5350.00	35.17	100	225			9.54	3.03	34.93	63.59	74.00	-10.41	Ch. 64
5350.00				21.33	A	9.54	3.03	34.93	49.75	54.00	-4.25	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00	32.50	100	225			9.54	2.97	34.34	60.27	74.00	-13.73	Ch. 36
5150.00				19.33	A	9.54	2.97	34.34	47.10	54.00	-6.90	
5350.00	32.00	100	135			9.54	3.03	34.66	60.15	74.00	-13.85	Ch. 64
5350.00				19.83	A	9.54	3.03	34.66	47.98	54.00	-6.02	

NOTE: The “Band Edge Field Strength” was calculated using the “Radiated Fundamental” measurements.



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)
Channels 36, 52, & 64
Continuous TX at Chain B Antenna port Spears platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-10*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.42	59.50	100	225			50.78	2.41	32.29	43.42	68.00	-24.58	Ch. 36
6906.66	60.83	100	225			50.50	3.47	35.91	49.70	68.00	-18.30	
10359.58	65.33	100	180			50.39	4.39	38.62	57.95	68.00	-10.05	
3506.27	61.00	100	225			50.76	2.43	32.41	45.09	68.00	-22.91	Ch. 52
7013.30	59.83	100	180			50.42	3.51	36.03	48.95	68.00	-19.05	
10519.98	67.17	100	180			50.43	4.44	38.71	59.89	68.00	-8.11	
3546.76	60.50	100	225			50.76	2.45	32.50	44.69	68.00	-23.31	Ch.64
7093.36	58.00	100	225			50.38	3.53	36.24	47.39	68.00	-20.61	
10620.00	68.50	100	225			50.43	4.45	38.75	61.27	74.00	-12.73	
10620.00				52.69	A	50.43	4.45	38.75	45.46	54.00	-8.54	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.31	60.83	100	225			50.78	2.41	31.80	44.26	68.00	-23.74	Ch. 36
6906.66	62.17	100	135			50.50	3.47	35.83	50.96	68.00	-17.04	
10360.00	69.67	100	135			50.39	4.39	38.59	62.26	68.00	-5.74	
3506.66	62.00	100	225			50.76	2.43	31.92	45.59	68.00	-22.41	Ch. 52
7013.34	63.67	100	135			50.42	3.51	35.93	52.69	68.00	-15.31	
10519.98	70.83	100	135			50.43	4.44	38.70	63.55	68.00	-4.45	
3546.66	60.00	100	135			50.76	2.45	32.02	43.71	68.00	-24.29	Ch.64
7093.35	58.67	100	135			50.38	3.53	36.14	47.96	68.00	-20.04	
10639.98	68.83	100	180			50.44	4.46	38.73	61.58	74.00	-12.42	
10639.98				54.13	A	50.44	4.46	38.73	46.88	54.00	-7.12	



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)
Channels 36, 52, & 64
Continuous TX at Dual Chain AB Antenna port Spears platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-06*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5180.00	76.17	100	225			9.54	2.98	34.62	104.23			Ch. 36
5180.00				58.67	A	9.54	2.98	34.62	86.73			
5260.00	77.00	100	225			9.54	3.00	34.77	105.23			Ch. 52
5260.00				61.83	A	9.54	3.00	34.77	90.06			
5320.00	77.00	100	225			9.54	3.02	34.88	105.36			Ch. 64
5320.00				57.33	A	9.54	3.02	34.88	85.69			

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5180.00	72.33	100	225			9.54	2.98	34.39	100.16			Ch. 36
5180.00				57.17	A	9.54	2.98	34.39	85.00			
5260.00	76.67	125	180			9.54	3.00	34.52	104.65			Ch. 52
5260.00				61.50	A	9.54	3.00	34.52	89.48			
5320.00	76.00	125	225			9.54	3.02	34.61	104.09			Ch. 64
5320.00				56.50	A	9.54	3.02	34.61	84.59			

NOTE: Fundamental signals measured at 1 meter and extrapolated to 3 meters to calculate the radiated band edge field strengths.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)
Channels 36 & 64
Continuous TX at Dual Chain AB Antenna port Spears platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-06*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Distance Factor (dB)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5150.00	30.33	100	225			9.54	2.97	34.57	58.33	74.00	-15.67	Ch. 36
5150.00				19.00	A	9.54	2.97	34.57	47.00	54.00	-7.00	
5350.00	32.00	100	225			9.54	3.03	34.93	60.42	74.00	-13.58	Ch. 64
5350.00				19.83	A	9.54	3.03	34.93	48.25	54.00	-5.75	

RADIATED EMISSIONS - Vertical Antenna Polarization												
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Distance Factor (dB)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5150.00	30.17	100	225			9.54	2.97	34.34	57.94	74.00	-16.06	Ch. 36
5150.00				18.50	A	9.54	2.97	34.34	46.27	54.00	-7.73	
5350.00	31.50	125	225			9.54	3.03	34.66	59.65	74.00	-14.35	Ch. 64
5350.00				19.67	A	9.54	3.03	34.66	47.82	54.00	-6.18	

NOTE: The “Band Edge Field Strength” was calculated using the “Radiated Fundamental” measurements.



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)
Channels 36, 52, & 64
Continuous TX at Dual Chain AB Antenna port Spears platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-11*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.42	61.50	200	225			50.78	2.41	32.29	45.42	68.00	-22.58	Ch. 36
6906.66	61.67	100	180			50.50	3.47	35.91	50.54	68.00	-17.46	
10359.58	58.67	100	180			50.39	4.39	38.62	51.29	68.00	-16.71	
3506.66	61.83	200	225			50.76	2.43	32.41	45.92	68.00	-22.08	Ch. 52
7013.30	56.33	100	180			50.42	3.51	36.03	45.45	68.00	-22.55	
10520.00	53.00	100	180			50.43	4.44	38.71	45.72	68.00	-22.28	
3546.76	55.50	100	225			50.76	2.45	32.50	39.69	68.00	-28.31	Ch.64
7093.36	56.17	100	180			50.38	3.53	36.24	45.56	68.00	-22.44	
10640.00	55.83	125	225			50.44	4.46	38.76	48.61	74.00	-25.39	
10640.00				42.66	A	50.44	4.46	38.76	35.44	54.00	-18.56	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.31	60.83	100	180			50.78	2.41	31.80	44.26	68.00	-23.74	Ch. 36
6906.66	62.50	100	180			50.50	3.47	35.83	51.29	68.00	-16.71	
10360.00	63.17	100	180			50.39	4.39	38.59	55.76	68.00	-12.24	
3506.66	60.83	100	225			50.76	2.43	31.92	44.42	68.00	-23.58	Ch. 52
7013.34	62.50	100	225			50.42	3.51	35.93	51.52	68.00	-16.48	
10520.00	66.00	100	135			50.43	4.44	38.70	58.72	68.00	-9.28	
3546.66	55.67	100	180			50.76	2.45	32.02	39.38	68.00	-28.62	Ch.64
7093.35	52.33	100	180			50.38	3.53	36.14	41.62	68.00	-26.38	
10640.00	52.67	100	180			50.44	4.46	38.73	45.42	74.00	-28.58	
10640.00				41.48	A	50.44	4.46	38.73	34.23	54.00	-19.77	

**RADIATED EMISSIONS TEST RESULTS**

CLIENT:	Dell Computer Corporation	DATE:	09/27/07
EUT:	Intel Wireless WiFi Link 4965AGN	PROJECT NUMBER:	INTEL-070910
MODEL NUMBER:	4965AGN	TEST ENGINEER:	JC
SERIAL NUMBER:	0013E8056F43	SITE #:	2
CONFIGURATION:	Tested installed in the Spears host computer's mini PCI slot in 802.11n (5150-5350 MHz) mode 40MHz Wide with WNC Antennas.	TEMPERATURE:	27 deg. C
		HUMIDITY:	33% RH
		TIME:	1:30 PM

Description:	Radiated RF Emissions (1 GHz – 18 GHz)
Results:	PASSED Horizontal and Vertical Antenna Polarizations Class B Limits
Note:	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"> • 120VAC / 60 Hz.

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

Radiated Emissions Sample Calculations

$$\text{Corrected Meter Reading} = \text{Meter Reading} + F + C - D$$

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

$$\text{CML} = \text{Specification Limit} - F - C + D$$



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)
Channels 38, 54, & 62
Continuous TX at Chain A Antenna port Spears platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-04*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5190.00	72.33	100	225			9.54	2.98	34.64	100.41			Ch. 38
5190.00				56.50	A	9.54	2.98	34.64	84.58			
5270.00	56.67	125	225			9.54	3.01	34.79	84.92			Ch. 54
5270.00				44.00	A	9.54	3.01	34.79	72.25			
5310.00	61.00	100	225			9.54	3.02	34.86	89.34			Ch. 62
5310.00				48.17	A	9.54	3.02	34.86	76.51			

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5190.00	71.00	100	225			9.54	2.98	34.40	98.85			Ch. 38
5190.00				55.33	A	9.54	2.98	34.40	83.18			
5270.00	56.17	100	180			9.54	3.01	34.53	84.17			Ch. 54
5270.00				44.50	A	9.54	3.01	34.53	72.50			
5310.00	58.50	100	225			9.54	3.02	34.60	86.57			Ch. 62
5310.00				46.00	A	9.54	3.02	34.60	74.07			

NOTE: Fundamental signals measured at 1 meter and extrapolated to 3 meters to calculate the radiated band edge field strengths.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)
Channels 38 & 62
Continuous TX at Chain A Antenna port Spears platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-04*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00	37.83	100	225			9.54	2.97	34.57	65.83	74.00	-8.17	Ch. 38
5150.00				23.17	A	9.54	2.97	34.57	51.17	54.00	-2.83	
5350.00	32.67	100	225			9.54	3.03	34.93	61.09	74.00	-12.91	Ch. 62
5350.00				19.50	A	9.54	3.03	34.93	47.92	54.00	-6.08	

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00	34.00	100	225			9.54	2.97	34.34	61.77	74.00	-12.23	Ch. 38
5150.00				21.50	A	9.54	2.97	34.34	49.27	54.00	-4.73	
5350.00	31.33	100	225			9.54	3.03	34.66	59.48	74.00	-14.52	Ch. 62
5350.00				19.00	A	9.54	3.03	34.66	47.15	54.00	-6.85	

NOTE: The “Band Edge Field Strength” was calculated using the “Radiated Fundamental” measurements.



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)
Channels 38, 54, & 62
Continuous TX at Chain A Antenna port Spears platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-09*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3460.00	57.83	100	225			50.78	2.42	32.30	41.77	68.00	-26.23	Ch. 38
6920.13	57.00	100	225			50.49	3.48	35.92	45.90	68.00	-22.10	
10379.39	60.83	100	180			50.39	4.40	38.63	53.46	68.00	-14.54	
3513.33	57.83	100	225			50.76	2.44	32.43	41.93	68.00	-26.07	Ch. 54
7026.76	59.67	100	225			50.42	3.51	36.07	48.83	68.00	-19.17	
10540.22	58.33	100	225			50.43	4.45	38.72	51.06	68.00	-16.94	
3539.88	58.00	100	180			50.76	2.45	32.49	42.17	68.00	-25.83	Ch.62
7080.03	59.00	100	180			50.39	3.52	36.21	48.34	68.00	-19.66	
10620.47	59.67	100	180			50.43	4.45	38.75	52.44	74.00	-21.56	
10620.47				45.79	A	50.43	4.45	38.75	38.56	54.00	-15.44	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3460.00	57.33	100	180			50.78	2.42	31.81	40.78	68.00	-27.22	Ch. 38
6920.13	59.83	100	225			50.49	3.48	35.84	48.65	68.00	-19.35	
10379.60	59.67	100	135			50.39	4.40	38.60	52.28	68.00	-15.72	
3513.33	59.00	100	225			50.76	2.44	31.93	42.61	68.00	-25.39	Ch. 54
7026.76	59.83	100	180			50.42	3.51	35.97	48.89	68.00	-19.11	
10540.22	60.83	100	180			50.43	4.45	38.71	53.55	68.00	-14.45	
3540.11	56.33	100	225			50.76	2.45	32.00	40.02	68.00	-27.98	Ch.62
7080.01	61.33	100	225			50.39	3.52	36.11	50.57	68.00	-17.43	
10620.41	60.17	100	180			50.43	4.45	38.72	52.91	74.00	-21.09	
10620.41				47.10	A	50.43	4.45	38.72	39.84	54.00	-14.16	



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)
Channels 38, 54, & 62
Continuous RX at Chain A Antenna port Spears platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-09*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3460.00	58.00	125	225			50.78	2.42	32.30	41.94	74.00	-32.06	Ch. 38
3460.00				50.68	A	50.78	2.42	32.30	34.62	54.00	-19.38	
3513.32	58.83	100	180			50.76	2.44	32.43	42.93	74.00	-31.07	Ch. 54
3513.32				49.11	A	50.76	2.44	32.43	33.21	54.00	-20.79	
3540.21	57.83	100	180			50.76	2.45	32.49	42.00	74.00	-32.00	Ch.62
3540.21				48.67	A	50.76	2.45	32.49	32.84	54.00	-21.16	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3460.02	62.50	100	135			50.78	2.42	31.81	45.95	74.00	-28.05	Ch. 38
3460.02				48.52	A	50.78	2.42	31.81	31.97	54.00	-22.03	
3513.33	60.33	100	180			50.76	2.44	31.93	43.94	74.00	-30.06	Ch. 54
3513.33				48.97	A	50.76	2.44	31.93	32.58	54.00	-21.42	
3540.02	56.17	100	180			50.76	2.45	32.00	39.86	74.00	-34.14	Ch.62
3540.02				46.59	A	50.76	2.45	32.00	30.28	54.00	-23.72	



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)
Channels 38, 54, & 62
Continuous TX at Chain B Antenna port Spears platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-05*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5190.00	72.50	100	225			9.54	2.98	34.64	100.58			Ch. 38
5190.00				54.17	A	9.54	2.98	34.64	82.25			
5270.00	75.17	100	225			9.54	3.01	34.79	103.42			Ch. 54
5270.00				56.33	A	9.54	3.01	34.79	84.58			
5310.00	74.00	100	225			9.54	3.02	34.86	102.34			Ch. 62
5310.00				56.00	A	9.54	3.02	34.86	84.34			

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5190.00	71.50	100	225			9.54	2.98	34.40	99.35			Ch. 38
5190.00				52.83	A	9.54	2.98	34.40	80.68			
5270.00	70.50	100	225			9.54	3.01	34.53	98.50			Ch. 54
5270.00				51.50	A	9.54	3.01	34.53	79.50			
5310.00	71.33	100	225			9.54	3.02	34.60	99.40			Ch. 62
5310.00				53.33	A	9.54	3.02	34.60	81.40			

NOTE: Fundamental signals measured at 1 meter and extrapolated to 3 meters to calculate the radiated band edge field strengths.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)
Channels 38 & 62
Continuous TX at Chain B Antenna port Spears platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-05*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00	35.83	100	225			9.54	2.97	34.57	63.83	74.00	-10.17	Ch. 38
5150.00				21.83	A	9.54	2.97	34.57	49.83	54.00	-4.17	
5350.00	43.00	100	225			9.54	3.03	34.93	71.42	74.00	-2.58	Ch. 62
5350.00				22.67	A	9.54	3.03	34.93	51.09	54.00	-2.91	

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00	35.17	100	225			9.54	2.97	34.34	62.94	74.00	-11.06	Ch. 38
5150.00				21.00	A	9.54	2.97	34.34	48.77	54.00	-5.23	
5350.00	35.33	100	225			9.54	3.03	34.66	63.48	74.00	-10.52	Ch. 62
5350.00				20.50	A	9.54	3.03	34.66	48.65	54.00	-5.35	

NOTE: The “Band Edge Field Strength” was calculated using the “Radiated Fundamental” measurements.



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)
Channels 38, 54, & 62
Continuous TX at Chain B Antenna port Spears platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-10*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3460.00	58.33	100	225			50.78	2.42	32.30	42.27	68.00	-25.73	Ch. 38
6920.13	59.00	100	135			50.49	3.48	35.92	47.90	68.00	-20.10	
10379.99	58.83	100	180			50.39	4.40	38.63	51.46	68.00	-16.54	
3513.33	60.00	100	225			50.76	2.44	32.43	44.10	68.00	-23.90	Ch. 54
7026.76	61.83	100	135			50.42	3.51	36.07	50.99	68.00	-17.01	
10540.22	61.50	100	135			50.43	4.45	38.72	54.23	68.00	-13.77	
3540.03	59.67	100	225			50.76	2.45	32.49	43.84	68.00	-24.16	Ch.62
7080.03	59.67	100	135			50.39	3.52	36.21	49.01	68.00	-18.99	
10620.47	60.50	100	135			50.43	4.45	38.75	53.27	74.00	-20.73	
10620.47				47.18	A	50.43	4.45	38.75	39.95	54.00	-14.05	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3460.00	59.50	100	225			50.78	2.42	31.81	42.95	68.00	-25.05	Ch. 38
6920.13	59.00	100	135			50.49	3.48	35.84	47.82	68.00	-20.18	
10380.00	63.00	100	135			50.39	4.40	38.60	55.61	68.00	-12.39	
3513.33	61.17	100	225			50.76	2.44	31.93	44.78	68.00	-23.22	Ch. 54
7026.76	60.33	100	180			50.42	3.51	35.97	49.39	68.00	-18.61	
10540.22	64.67	100	135			50.43	4.45	38.71	57.39	68.00	-10.61	
3540.03	59.17	100	135			50.76	2.45	32.00	42.86	68.00	-25.14	Ch.62
7080.01	60.50	100	180			50.39	3.52	36.11	49.74	68.00	-18.26	
10620.41	66.33	100	135			50.43	4.45	38.72	59.07	74.00	-14.93	
10620.41				52.02	A	50.43	4.45	38.72	44.76	54.00	-9.24	



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)
Channels 38, 54, & 62
Continuous RX at Chain B Antenna port Spears platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-10*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3460.00	58.33	100	225			50.78	2.42	32.30	42.27	74.00	-31.73	Ch. 38
3460.00				50.81	A	50.78	2.42	32.30	34.75	54.00	-19.25	
3513.32	59.00	100	225			50.76	2.44	32.43	43.10	74.00	-30.90	Ch. 54
3513.32				51.69	A	50.76	2.44	32.43	35.79	54.00	-18.21	
3540.02	58.17	100	225			50.76	2.45	32.49	42.34	74.00	-31.66	Ch.62
3540.02				50.47	A	50.76	2.45	32.49	34.64	54.00	-19.36	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3460.02	60.17	100	225			50.78	2.42	31.81	43.62	74.00	-30.38	Ch. 38
3460.02				53.28	A	50.78	2.42	31.81	36.73	54.00	-17.27	
3513.26	59.50	100	225			50.76	2.44	31.93	43.11	74.00	-30.89	Ch. 54
3513.26				52.86	A	50.76	2.44	31.93	36.47	54.00	-17.53	
3540.02	58.83	100	180			50.76	2.45	32.00	42.52	74.00	-31.48	Ch.62
3540.02				52.45	A	50.76	2.45	32.00	36.14	54.00	-17.86	



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)
Channels 38, 54, & 62
Continuous TX at Dual Chain AB Antenna port Spears platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-06*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5190.00	72.17	100	225			9.54	2.98	34.64	100.25			Ch. 38
5190.00				48.33	A	9.54	2.98	34.64	76.41			
5270.00	56.67	125	225			9.54	3.01	34.79	84.92			Ch. 54
5270.00				44.00	A	9.54	3.01	34.79	72.25			
5310.00	75.00	100	225			9.54	3.02	34.86	103.34			Ch. 62
5310.00				49.50	A	9.54	3.02	34.86	77.84			

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5190.00	70.83	100	225			9.54	2.98	34.40	98.68			Ch. 38
5190.00				46.83	A	9.54	2.98	34.40	74.68			
5270.00	56.17	100	180			9.54	3.01	34.53	84.17			Ch. 54
5270.00				44.50	A	9.54	3.01	34.53	72.50			
5310.00	73.00	100	225			9.54	3.02	34.60	101.07			Ch. 62
5310.00				48.83	A	9.54	3.02	34.60	76.90			

NOTE: Fundamental signals measured at 1 meter and extrapolated to 3 meters to calculate the radiated band edge field strengths.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)
Channels 38 & 62
Continuous TX at Dual Chain AB Antenna port Spears platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-06*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00	34.33	100	225			9.54	2.97	34.57	62.33	74.00	-11.67	Ch. 38
5150.00				20.00	A	9.54	2.97	34.57	48.00	54.00	-6.00	
5350.00	35.17	100	225			9.54	3.03	34.93	63.59	74.00	-10.41	Ch. 62
5350.00				20.33	A	9.54	3.03	34.93	48.75	54.00	-5.25	

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00	31.67	100	225			9.54	2.97	34.34	59.44	74.00	-14.56	Ch. 38
5150.00				19.50	A	9.54	2.97	34.34	47.27	54.00	-6.73	
5350.00	34.33	100	225			9.54	3.03	34.66	62.48	74.00	-11.52	Ch. 62
5350.00				20.50	A	9.54	3.03	34.66	48.65	54.00	-5.35	

NOTE: The “Band Edge Field Strength” was calculated using the “Radiated Fundamental” measurements.



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)
Channels 38, 54, & 62
Continuous TX at Dual Chain AB Antenna port Spears platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-11*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3460.00	55.17	100	180			50.78	2.42	32.30	39.11	68.00	-28.89	Ch. 38
6920.13	58.50	100	180			50.49	3.48	35.92	47.40	68.00	-20.60	
3513.33	54.83	100	135			50.76	2.44	32.43	38.93	68.00	-29.07	Ch. 54
7026.76	59.67	100	180			50.42	3.51	36.07	48.83	68.00	-19.17	
3539.88	56.50	100	180			50.76	2.45	32.49	40.67	68.00	-27.33	Ch.62
7080.03	58.17	100	180			50.39	3.52	36.21	47.51	68.00	-20.49	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3460.00	55.50	100	135			50.78	2.42	31.81	38.95	68.00	-29.05	Ch. 38
6920.13	58.83	100	135			50.49	3.48	35.84	47.65	68.00	-20.35	
3513.33	57.83	100	135			50.76	2.44	31.93	41.44	68.00	-26.56	Ch. 54
7026.76	59.50	100	180			50.42	3.51	35.97	48.56	68.00	-19.44	
10540.22	67.17	100	180			50.43	4.45	38.71	59.89	68.00	-8.11	
3540.11	56.67	100	135			50.76	2.45	32.00	40.36	68.00	-27.64	Ch.62
7080.01	59.33	100	135			50.39	3.52	36.11	48.57	68.00	-19.43	
10620.41	67.50	100	180			50.43	4.45	38.72	60.24	74.00	-13.76	
10620.41				53.16	A	50.43	4.45	38.72	45.90	54.00	-8.10	

**RADIATED EMISSIONS TEST RESULTS**

CLIENT:	Dell Computer Corporation	DATE:	09/21/07
EUT:	Intel Wireless WiFi Link 4965AGN	PROJECT NUMBER:	INTEL-070910
MODEL NUMBER:	4965AGN	TEST ENGINEER:	JC/PC
SERIAL NUMBER:	0013E8056F43	SITE #:	2
CONFIGURATION:	Tested installed in the Hawke host computer's mini PCI slot in 802.11a (5150-5350 MHz) mode with WNC Antennas.	TEMPERATURE:	18 deg. C
		HUMIDITY:	43% RH
		TIME:	10:00 AM

Description:	Radiated RF Emissions (1 GHz – 18 GHz)
Results:	PASSED Horizontal and Vertical Antenna Polarizations Class B Limits
Note:	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"> • 120VAC / 60 Hz.

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

Radiated Emissions Sample Calculations

$$\text{Corrected Meter Reading} = \text{Meter Reading} + F + C - D$$

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

$$\text{CML} = \text{Specification Limit} - F - C + D$$



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11a mode (5150-5350 MHz)
Channels 36, 48, 52, & 64
Continuous TX at Chain A Antenna port Hawke platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-14*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5180.00	62.33	100	315			9.54	2.98	34.62	90.39			Ch. 36
5180.00				50.33	A	9.54	2.98	34.62	78.39			
5240.00	63.67	125	315			9.54	3.00	34.73	91.86			Ch. 48
5240.00				51.33	A	9.54	3.00	34.73	79.52			
5260.00	66.00	100	315			9.54	3.00	34.77	94.23			Ch. 52
5260.00				53.50	A	9.54	3.00	34.77	81.73			
5320.00	65.33	100	315			9.54	3.02	34.88	93.69			Ch. 64
5320.00				52.33	A	9.54	3.02	34.88	80.69			

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5180.00	65.83	100	135			9.54	2.98	34.39	93.66			Ch. 36
5180.00				52.67	A	9.54	2.98	34.39	80.50			
5240.00	65.67	100	225			9.54	3.00	34.48	93.61			Ch. 48
5240.00				53.33	A	9.54	3.00	34.48	81.27			
5260.00	67.17	100	225			9.54	3.00	34.52	95.15			Ch. 52
5260.00				54.67	A	9.54	3.00	34.52	82.65			
5320.00	64.83	100	225			9.54	3.02	34.61	92.92			Ch. 64
5320.00				52.67	A	9.54	3.02	34.61	80.76			

NOTE: Fundamental signals measured at 1 meter and extrapolated to 3 meters to calculate the radiated band edge field strengths.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11a mode (5150-5350 MHz)
Channels 36 & 64
Continuous TX at Chain A Antenna port Hawke platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-14*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00	30.33	100	225			9.54	2.97	34.57	58.33	74.00	-15.67	Ch. 36
5150.00				18.33	A	9.54	2.97	34.57	46.33	54.00	-7.67	
5350.00	30.33	100	225			9.54	3.03	34.93	58.75	74.00	-15.25	Ch. 64
5350.00				18.67	A	9.54	3.03	34.93	47.09	54.00	-6.91	

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00	30.00	100	180			9.54	2.97	34.34	57.77	74.00	-16.23	Ch. 36
5150.00				18.17	A	9.54	2.97	34.34	45.94	54.00	-8.06	
5350.00	30.17	100	225			9.54	3.03	34.66	58.32	74.00	-15.68	Ch. 64
5350.00				18.67	A	9.54	3.03	34.66	46.82	54.00	-7.18	

NOTE: The “Band Edge Field Strength” was calculated using the “Radiated Fundamental” measurements.



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11a mode (5150-5350 MHz)
Channels 36, 52, & 64
Continuous TX at Chain A Antenna port Hawke platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-19*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.33	66.50	100	225		50.78	2.41	32.29	50.42	68.00	-17.58	Ch. 36
6906.66	66.67	100	225		50.50	3.47	35.91	55.54	68.00	-12.46	
3506.66	65.67	100	225		50.76	2.43	32.41	49.76	68.00	-18.24	Ch. 52
7013.40	67.17	100	135		50.42	3.51	36.03	56.29	68.00	-11.71	
3546.66	65.33	100	180		50.76	2.45	32.50	49.52	68.00	-18.48	Ch.64
7093.34	63.50	100	180		50.38	3.53	36.24	52.89	68.00	-15.11	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.33	68.50	100	180		50.78	2.41	31.80	51.93	68.00	-16.07	Ch. 36
6906.66	68.33	100	90		50.50	3.47	35.83	57.12	68.00	-10.88	
10360.00	66.33	100	180		50.39	4.39	38.59	58.92	68.00	-9.08	
3506.16	68.50	100	135		50.76	2.43	31.92	52.09	68.00	-15.91	Ch. 52
7013.39	67.67	100	135		50.42	3.51	35.93	56.69	68.00	-11.31	
3546.68	67.33	100	180		50.76	2.45	32.02	51.04	68.00	-16.96	Ch.64
7093.55	65.33	100	180		50.38	3.53	36.14	54.62	68.00	-13.38	



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11a mode (5150-5350 MHz)
Channels 36, 52, & 64
Continuous RX at Chain A Antenna port Hawke platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-19*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.33	64.17	125	225			50.78	2.41	32.29	48.09	74.00	-25.91	Ch. 36
3453.33				54.73	A	50.78	2.41	32.29	38.65	54.00	-15.35	
3506.66	63.83	100	225			50.76	2.43	32.41	47.92	74.00	-26.08	Ch. 52
3506.66				54.75	A	50.76	2.43	32.41	38.84	54.00	-15.16	
3546.66	63.17	100	225			50.76	2.45	32.50	47.36	74.00	-26.64	Ch.64
3546.66				53.12	A	50.76	2.45	32.50	37.31	54.00	-16.69	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.33	66.00	100	225			50.78	2.41	31.80	49.43	74.00	-24.57	Ch. 36
3453.33				56.78	A	50.78	2.41	31.80	40.21	54.00	-13.79	
3506.68	62.67	100	225			50.76	2.43	31.92	46.26	74.00	-27.74	Ch. 52
3506.68				52.06	A	50.76	2.43	31.92	35.65	54.00	-18.35	
3546.66	63.00	100	225			50.76	2.45	32.02	46.71	74.00	-27.29	Ch.64
3546.66				51.81	A	50.76	2.45	32.02	35.52	54.00	-18.48	



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11a mode (5150-5350 MHz)
Channels 36, 48, 52, & 64
Continuous TX at Chain B Antenna port Hawke platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-15*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5180.00	75.50	100	225			9.54	2.98	34.62	103.56			Ch. 36
5180.00				60.33	A	9.54	2.98	34.62	88.39			
5240.00	77.17	100	225			9.54	3.00	34.73	105.36			Ch. 48
5240.00				62.17	A	9.54	3.00	34.73	90.36			
5260.00	79.33	100	225			9.54	3.00	34.77	107.56			Ch. 52
5260.00				64.33	A	9.54	3.00	34.77	92.56			
5320.00	76.33	100	225			9.54	3.02	34.88	104.69			Ch. 64
5320.00				61.33	A	9.54	3.02	34.88	89.69			

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5180.00	72.83	100	225			9.54	2.98	34.39	100.66			Ch. 36
5180.00				58.17	A	9.54	2.98	34.39	86.00			
5240.00	73.17	100	225			9.54	3.00	34.48	101.11			Ch. 48
5240.00				58.50	A	9.54	3.00	34.48	86.44			
5260.00	74.50	100	225			9.54	3.00	34.52	102.48			Ch. 52
5260.00				60.17	A	9.54	3.00	34.52	88.15			
5320.00	72.00	100	135			9.54	3.02	34.61	100.09			Ch. 64
5320.00				58.33	A	9.54	3.02	34.61	86.42			

NOTE: Fundamental signals measured at 1 meter and extrapolated to 3 meters to calculate the radiated band edge field strengths.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11a mode (5150-5350 MHz)
Channels 36 & 64
Continuous TX at Chain B Antenna port Hawke platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-15*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00	31.67	100	225			9.54	2.97	34.57	59.67	74.00	-14.33	Ch. 36
5150.00				19.17	A	9.54	2.97	34.57	47.17	54.00	-6.83	
5350.00	32.33	100	225			9.54	3.03	34.93	60.75	74.00	-13.25	Ch. 64
5350.00				20.00	A	9.54	3.03	34.93	48.42	54.00	-5.58	

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00	30.67	100	225			9.54	2.97	34.34	58.44	74.00	-15.56	Ch. 36
5150.00				19.00	A	9.54	2.97	34.34	46.77	54.00	-7.23	
5350.00	30.17	100	135			9.54	3.03	34.66	58.32	74.00	-15.68	Ch. 64
5350.00				19.00	A	9.54	3.03	34.66	47.15	54.00	-6.85	

NOTE: The “Band Edge Field Strength” was calculated using the “Radiated Fundamental” measurements.



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11a mode (5150-5350 MHz)
 Channels 36, 52, & 64
 Continuous TX at Chain B Antenna port Hawke platform with WNC Antennas
 Aegis Labs, Inc. File #: INTEL-070910-20*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.33	59.83	100	225			50.78	2.41	32.29	43.75	68.00	-24.25	Ch. 36
6906.66	58.33	125	225			50.50	3.47	35.91	47.20	68.00	-20.80	
10360.00	67.17	100	225			50.39	4.39	38.62	59.79	68.00	-8.21	
3506.66	59.33	100	225			50.76	2.43	32.41	43.42	68.00	-24.58	Ch. 52
7013.40	57.67	100	180			50.42	3.51	36.03	46.79	68.00	-21.21	
10520.00	64.33	100	135			50.43	4.44	38.71	57.05	68.00	-10.95	
3546.66	58.83	100	225			50.76	2.45	32.50	43.02	68.00	-24.98	Ch.64
7093.34	56.00	100	180			50.38	3.53	36.24	45.39	68.00	-22.61	
10640.00	67.67	100	225			50.44	4.46	38.76	60.45	74.00	-13.55	
10640.00				53.50	A	50.44	4.46	38.76	46.28	54.00	-7.72	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.33	58.08	100	180			50.78	2.41	31.80	41.51	68.00	-26.49	Ch. 36
6906.66	59.50	100	180			50.50	3.47	35.83	48.29	68.00	-19.71	
10360.00	68.67	100	180			50.39	4.39	38.59	61.26	68.00	-6.74	
3506.16	58.67	100	180			50.76	2.43	31.92	42.26	68.00	-25.74	Ch. 52
7013.39	58.33	100	180			50.42	3.51	35.93	47.35	68.00	-20.65	
10520.00	67.67	100	180			50.43	4.44	38.70	60.39	68.00	-7.61	
3546.68	58.50	100	180			50.76	2.45	32.02	42.21	68.00	-25.79	Ch.64
7093.55	57.33	100	180			50.38	3.53	36.14	46.62	68.00	-21.38	
10640.00	69.83	100	180			50.44	4.46	38.73	62.58	74.00	-11.42	
10640.00				56.44	A	50.44	4.46	38.73	49.19	54.00	-4.81	



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11a mode (5150-5350 MHz)
Channels 36, 52, & 64
Continuous RX at Chain B Antenna port Hawke platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-20*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.33	54.17	125	225			50.78	2.41	32.29	38.09	74.00	-35.91	Ch. 36
3453.33				44.73	A	50.78	2.41	32.29	28.65	54.00	-25.35	
3506.66	53.83	100	225			50.76	2.43	32.41	37.92	74.00	-36.08	Ch. 52
3506.66				44.75	A	50.76	2.43	32.41	28.84	54.00	-25.16	
3546.66	53.17	100	225			50.76	2.45	32.50	37.36	74.00	-36.64	Ch.64
3546.66				43.12	A	50.76	2.45	32.50	27.31	54.00	-26.69	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.33	56.00	100	225			50.78	2.41	31.80	39.43	74.00	-34.57	Ch. 36
3453.33				46.78	A	50.78	2.41	31.80	30.21	54.00	-23.79	
3506.68	52.67	100	225			50.76	2.43	31.92	36.26	74.00	-37.74	Ch. 52
3506.68				42.06	A	50.76	2.43	31.92	25.65	54.00	-28.35	
3546.66	53.00	100	225			50.76	2.45	32.02	36.71	74.00	-37.29	Ch.64
3546.66				41.81	A	50.76	2.45	32.02	25.52	54.00	-28.48	



RADIATED EMISSIONS TEST RESULTS

CLIENT:	Dell Computer Corporation	DATE:	09/24/07
EUT:	Intel Wireless WiFi Link 4965AGN	PROJECT NUMBER:	INTEL-070910
MODEL NUMBER:	4965AGN	TEST ENGINEER:	JC
SERIAL NUMBER:	0013E8056F43	SITE #:	2
CONFIGURATION:	Tested installed in the Spears host computer's mini PCI slot in 802.11n (5150-5350 MHz) mode 20MHz Wide with WNC Antennas.	TEMPERATURE:	19 deg. C
		HUMIDITY:	75% RH
		TIME:	8:30 PM

Description:	Radiated RF Emissions (1 GHz – 18 GHz)
Results:	PASSED Horizontal and Vertical Antenna Polarizations Class B Limits
Note:	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"> • 120VAC / 60 Hz.

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

Radiated Emissions Sample Calculations

$$\text{Corrected Meter Reading} = \text{Meter Reading} + F + C - D$$

- Where, F = Antenna Factor
 C = Cable Factor
 G = Amplifier Gain
 D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

$$\text{CML} = \text{Specification Limit} - F - C + D$$



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)
Channels 36, 48, 52, & 64
Continuous TX at Chain A Antenna port Hawke platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-16*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5180.00	62.17	100	225			9.54	2.98	34.62	90.23			Ch. 36
5180.00				49.00	A	9.54	2.98	34.62	77.06			
5240.00	74.17	125	225			9.54	3.00	34.73	102.36			Ch. 48
5240.00				59.17	A	9.54	3.00	34.73	87.36			
5260.00	77.00	100	225			9.54	3.00	34.77	105.23			Ch. 52
5260.00				61.83	A	9.54	3.00	34.77	90.06			
5320.00	65.50	100	225			9.54	3.02	34.88	93.86			Ch. 64
5320.00				50.50	A	9.54	3.02	34.88	78.86			

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5180.00	60.00	100	225			9.54	2.98	34.39	87.83			Ch. 36
5180.00				46.33	A	9.54	2.98	34.39	74.16			
5240.00	74.00	150	180			9.54	3.00	34.48	101.94			Ch. 48
5240.00				58.83	A	9.54	3.00	34.48	86.77			
5260.00	76.67	125	180			9.54	3.00	34.52	104.65			Ch. 52
5260.00				61.50	A	9.54	3.00	34.52	89.48			
5320.00	63.67	100	225			9.54	3.02	34.61	91.76			Ch. 64
5320.00				49.00	A	9.54	3.02	34.61	77.09			

NOTE: Fundamental signals measured at 1 meter and extrapolated to 3 meters to calculate the radiated band edge field strengths.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)
Channels 36 & 64
Continuous TX at Chain A Antenna port Hawke platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-16*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00	30.83	100	225			9.54	2.97	34.57	58.83	74.00	-15.17	Ch. 36
5150.00				18.33	A	9.54	2.97	34.57	46.33	54.00	-7.67	
5350.00	30.17	100	225			9.54	3.03	34.93	58.59	74.00	-15.41	Ch. 64
5350.00				18.67	A	9.54	3.03	34.93	47.09	54.00	-6.91	

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00	30.17	100	225			9.54	2.97	34.34	57.94	74.00	-16.06	Ch. 36
5150.00				18.33	A	9.54	2.97	34.34	46.10	54.00	-7.90	
5350.00	29.83	100	225			9.54	3.03	34.66	57.98	74.00	-16.02	Ch. 64
5350.00				18.67	A	9.54	3.03	34.66	46.82	54.00	-7.18	

NOTE: The “Band Edge Field Strength” was calculated using the “Radiated Fundamental” measurements.



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)
Channels 36, 52, & 64
Continuous TX at Chain A Antenna port Hawke platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-21*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.42	58.67	100	225		50.78	2.41	32.29	42.59	68.00	-25.41	Ch. 36
6906.66	59.00	100	225		50.50	3.47	35.91	47.87	68.00	-20.13	
10359.58	64.17	100	180		50.39	4.39	38.62	56.79	68.00	-11.21	
3506.27	59.17	100	225		50.76	2.43	32.41	43.26	68.00	-24.74	Ch. 52
7013.30	61.00	100	225		50.42	3.51	36.03	50.12	68.00	-17.88	
10520.00	61.50	100	180		50.43	4.44	38.71	54.22	68.00	-13.78	
3546.76	58.33	100	180		50.76	2.45	32.50	42.52	68.00	-25.48	Ch.64
7093.36	60.00	100	180		50.38	3.53	36.24	49.39	68.00	-18.61	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.39	57.33	100	225		50.78	2.41	31.80	40.76	68.00	-27.24	Ch. 36
6906.66	60.33	100	180		50.50	3.47	35.83	49.12	68.00	-18.88	
10360.00	60.50	100	180		50.39	4.39	38.59	53.09	68.00	-14.91	
3506.66	56.50	100	225		50.76	2.43	31.92	40.09	68.00	-27.91	Ch. 52
7013.34	61.00	100	180		50.42	3.51	35.93	50.02	68.00	-17.98	
10520.00	62.50	100	225		50.43	4.44	38.70	55.22	68.00	-12.78	
3546.66	57.17	100	225		50.76	2.45	32.02	40.88	68.00	-27.12	Ch.64
7093.35	60.00	100	180		50.38	3.53	36.14	49.29	68.00	-18.71	



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)
Channels 36, 48, 52, & 64
Continuous TX at Chain B Antenna port Hawke platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-17*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5180.00	75.00	100	225			9.54	2.98	34.62	103.06			Ch. 36
5180.00				60.67	A	9.54	2.98	34.62	88.73			
5240.00	76.83	100	225			9.54	3.00	34.73	105.02			Ch. 48
5240.00				61.67	A	9.54	3.00	34.73	89.86			
5260.00	77.00	100	225			9.54	3.00	34.77	105.23			Ch. 52
5260.00				62.17	A	9.54	3.00	34.77	90.40			
5320.00	77.67	100	225			9.54	3.02	34.88	106.03			Ch. 64
5320.00				63.00	A	9.54	3.02	34.88	91.36			

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5180.00	74.33	100	225			9.54	2.98	34.39	102.16			Ch. 36
5180.00				58.83	A	9.54	2.98	34.39	86.66			
5240.00	74.67	100	225			9.54	3.00	34.48	102.61			Ch. 48
5240.00				59.67	A	9.54	3.00	34.48	87.61			
5260.00	73.83	100	225			9.54	3.00	34.52	101.81			Ch. 52
5260.00				60.33	A	9.54	3.00	34.52	88.31			
5320.00	74.33	100	135			9.54	3.02	34.61	102.42			Ch. 64
5320.00				60.00	A	9.54	3.02	34.61	88.09			

NOTE: Fundamental signals measured at 1 meter and extrapolated to 3 meters to calculate the radiated band edge field strengths.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)
Channels 36 & 64
Continuous TX at Chain B Antenna port Hawke platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-17*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Distance Factor (dB)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5150.00	36.00	100	225			9.54	2.97	34.57	64.00	74.00	-10.00	Ch. 36
5150.00				20.17	A	9.54	2.97	34.57	48.17	54.00	-5.83	
5350.00	35.17	100	225			9.54	3.03	34.93	63.59	74.00	-10.41	Ch. 64
5350.00				21.33	A	9.54	3.03	34.93	49.75	54.00	-4.25	

RADIATED EMISSIONS - Vertical Antenna Polarization												
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Distance Factor (dB)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5150.00	32.50	100	225			9.54	2.97	34.34	60.27	74.00	-13.73	Ch. 36
5150.00				19.33	A	9.54	2.97	34.34	47.10	54.00	-6.90	
5350.00	32.00	100	135			9.54	3.03	34.66	60.15	74.00	-13.85	Ch. 64
5350.00				19.83	A	9.54	3.03	34.66	47.98	54.00	-6.02	

NOTE: The “Band Edge Field Strength” was calculated using the “Radiated Fundamental” measurements.



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)
Channels 36, 52, & 64
Continuous TX at Chain B Antenna port Hawke platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-22*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.42	59.50	100	225			50.78	2.41	32.29	43.42	68.00	-24.58	Ch. 36
6906.66	60.83	100	225			50.50	3.47	35.91	49.70	68.00	-18.30	
10359.58	65.33	100	180			50.39	4.39	38.62	57.95	68.00	-10.05	
3506.27	61.00	100	225			50.76	2.43	32.41	45.09	68.00	-22.91	Ch. 52
7013.30	59.83	100	180			50.42	3.51	36.03	48.95	68.00	-19.05	
10519.98	67.17	100	180			50.43	4.44	38.71	59.89	68.00	-8.11	
3546.76	60.50	100	225			50.76	2.45	32.50	44.69	68.00	-23.31	Ch.64
7093.36	58.00	100	225			50.38	3.53	36.24	47.39	68.00	-20.61	
10620.00	68.50	100	225			50.43	4.45	38.75	61.27	74.00	-12.73	
10620.00				52.69	A	50.43	4.45	38.75	45.46	54.00	-8.54	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.31	60.83	100	225			50.78	2.41	31.80	44.26	68.00	-23.74	Ch. 36
6906.66	62.17	100	135			50.50	3.47	35.83	50.96	68.00	-17.04	
10360.00	69.67	100	135			50.39	4.39	38.59	62.26	68.00	-5.74	
3506.66	62.00	100	225			50.76	2.43	31.92	45.59	68.00	-22.41	Ch. 52
7013.34	63.67	100	135			50.42	3.51	35.93	52.69	68.00	-15.31	
10519.98	70.83	100	135			50.43	4.44	38.70	63.55	68.00	-4.45	
3546.66	60.00	100	135			50.76	2.45	32.02	43.71	68.00	-24.29	Ch.64
7093.35	58.67	100	135			50.38	3.53	36.14	47.96	68.00	-20.04	
10639.98	68.83	100	180			50.44	4.46	38.73	61.58	74.00	-12.42	
10639.98				54.13	A	50.44	4.46	38.73	46.88	54.00	-7.12	



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)
Channels 36, 52, & 64
Continuous TX at Dual Chain AB Antenna port Hawke platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-18*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5180.00	76.17	100	225			9.54	2.98	34.62	104.23			Ch. 36
5180.00				58.67	A	9.54	2.98	34.62	86.73			
5260.00	77.00	100	225			9.54	3.00	34.77	105.23			Ch. 52
5260.00				61.83	A	9.54	3.00	34.77	90.06			
5320.00	77.00	100	225			9.54	3.02	34.88	105.36			Ch. 64
5320.00				57.33	A	9.54	3.02	34.88	85.69			

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5180.00	72.33	100	225			9.54	2.98	34.39	100.16			Ch. 36
5180.00				57.17	A	9.54	2.98	34.39	85.00			
5260.00	76.67	125	180			9.54	3.00	34.52	104.65			Ch. 52
5260.00				61.50	A	9.54	3.00	34.52	89.48			
5320.00	76.00	125	225			9.54	3.02	34.61	104.09			Ch. 64
5320.00				56.50	A	9.54	3.02	34.61	84.59			

NOTE: Fundamental signals measured at 1 meter and extrapolated to 3 meters to calculate the radiated band edge field strengths.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)
Channels 36 & 64
Continuous TX at Dual Chain AB Antenna port Hawke platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-18*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Distance Factor (dB)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5150.00	30.33	100	225			9.54	2.97	34.57	58.33	74.00	-15.67	Ch. 36
5150.00				19.00	A	9.54	2.97	34.57	47.00	54.00	-7.00	
5350.00	32.00	100	225			9.54	3.03	34.93	60.42	74.00	-13.58	Ch. 64
5350.00				19.83	A	9.54	3.03	34.93	48.25	54.00	-5.75	

RADIATED EMISSIONS - Vertical Antenna Polarization												
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Distance Factor (dB)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5150.00	30.17	100	225			9.54	2.97	34.34	57.94	74.00	-16.06	Ch. 36
5150.00				18.50	A	9.54	2.97	34.34	46.27	54.00	-7.73	
5350.00	31.50	125	225			9.54	3.03	34.66	59.65	74.00	-14.35	Ch. 64
5350.00				19.67	A	9.54	3.03	34.66	47.82	54.00	-6.18	

NOTE: The “Band Edge Field Strength” was calculated using the “Radiated Fundamental” measurements.



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)
Channels 36, 52, & 64
Continuous TX at Dual Chain AB Antenna port Hawke platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-23*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.42	61.50	200	225			50.78	2.41	32.29	45.42	68.00	-22.58	Ch. 36
6906.66	61.67	100	180			50.50	3.47	35.91	50.54	68.00	-17.46	
10359.58	58.67	100	180			50.39	4.39	38.62	51.29	68.00	-16.71	
3506.66	61.83	200	225			50.76	2.43	32.41	45.92	68.00	-22.08	Ch. 52
7013.30	56.33	100	180			50.42	3.51	36.03	45.45	68.00	-22.55	
10520.00	53.00	100	180			50.43	4.44	38.71	45.72	68.00	-22.28	
3546.76	55.50	100	225			50.76	2.45	32.50	39.69	68.00	-28.31	Ch.64
7093.36	56.17	100	180			50.38	3.53	36.24	45.56	68.00	-22.44	
10640.00	55.83	125	225			50.44	4.46	38.76	48.61	74.00	-25.39	
10640.00				42.66	A	50.44	4.46	38.76	35.44	54.00	-18.56	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3453.31	60.83	100	180			50.78	2.41	31.80	44.26	68.00	-23.74	Ch. 36
6906.66	62.50	100	180			50.50	3.47	35.83	51.29	68.00	-16.71	
10360.00	63.17	100	180			50.39	4.39	38.59	55.76	68.00	-12.24	
3506.66	60.83	100	225			50.76	2.43	31.92	44.42	68.00	-23.58	Ch. 52
7013.34	62.50	100	225			50.42	3.51	35.93	51.52	68.00	-16.48	
10520.00	66.00	100	135			50.43	4.44	38.70	58.72	68.00	-9.28	
3546.66	55.67	100	180			50.76	2.45	32.02	39.38	68.00	-28.62	Ch.64
7093.35	52.33	100	180			50.38	3.53	36.14	41.62	68.00	-26.38	
10640.00	52.67	100	180			50.44	4.46	38.73	45.42	74.00	-28.58	
10640.00				41.48	A	50.44	4.46	38.73	34.23	54.00	-19.77	



RADIATED EMISSIONS TEST RESULTS

CLIENT:	Dell Computer Corporation	DATE:	09/24/07
EUT:	Intel Wireless WiFi Link 4965AGN	PROJECT NUMBER:	INTEL-070910
MODEL NUMBER:	4965AGN	TEST ENGINEER:	JC
SERIAL NUMBER:	0013E8056F43	SITE #:	2
CONFIGURATION:	Tested installed in the Hawke host computer's mini PCI slot in 802.11n (5150-5350 MHz) mode 40MHz Wide with WNC Antennas.	TEMPERATURE:	19 deg. C
		HUMIDITY:	75% RH
		TIME:	8:30 PM

Description:	Radiated RF Emissions (1 GHz – 18 GHz)
Results:	PASSED Horizontal and Vertical Antenna Polarizations Class B Limits
Note:	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"> • 120VAC / 60 Hz.

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

Radiated Emissions Sample Calculations

$$\text{Corrected Meter Reading} = \text{Meter Reading} + F + C - D$$

- Where, F = Antenna Factor
 C = Cable Factor
 G = Amplifier Gain
 D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

$$\text{CML} = \text{Specification Limit} - F - C + D$$



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)
Channels 38, 54, & 62
Continuous TX at Chain A Antenna port Hawke platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-16*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5190.00	72.33	100	225			9.54	2.98	34.64	100.41			Ch. 38
5190.00				56.50	A	9.54	2.98	34.64	84.58			
5270.00	56.67	125	225			9.54	3.01	34.79	84.92			Ch. 54
5270.00				44.00	A	9.54	3.01	34.79	72.25			
5310.00	61.00	100	225			9.54	3.02	34.86	89.34			Ch. 62
5310.00				48.17	A	9.54	3.02	34.86	76.51			

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5190.00	71.00	100	225			9.54	2.98	34.40	98.85			Ch. 38
5190.00				55.33	A	9.54	2.98	34.40	83.18			
5270.00	56.17	100	180			9.54	3.01	34.53	84.17			Ch. 54
5270.00				44.50	A	9.54	3.01	34.53	72.50			
5310.00	58.50	100	225			9.54	3.02	34.60	86.57			Ch. 62
5310.00				46.00	A	9.54	3.02	34.60	74.07			

NOTE: Fundamental signals measured at 1 meter and extrapolated to 3 meters to calculate the radiated band edge field strengths.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)
Channels 38 & 62
Continuous TX at Chain A Antenna port Hawke platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-16*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00	37.83	100	225			9.54	2.97	34.57	65.83	74.00	-8.17	Ch. 38
5150.00				23.17	A	9.54	2.97	34.57	51.17	54.00	-2.83	
5350.00	32.67	100	225			9.54	3.03	34.93	61.09	74.00	-12.91	Ch. 62
5350.00				19.50	A	9.54	3.03	34.93	47.92	54.00	-6.08	

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00	34.00	100	225			9.54	2.97	34.34	61.77	74.00	-12.23	Ch. 38
5150.00				21.50	A	9.54	2.97	34.34	49.27	54.00	-4.73	
5350.00	31.33	100	225			9.54	3.03	34.66	59.48	74.00	-14.52	Ch. 62
5350.00				19.00	A	9.54	3.03	34.66	47.15	54.00	-6.85	

NOTE: The “Band Edge Field Strength” was calculated using the “Radiated Fundamental” measurements.



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)
Channels 38, 54, & 62
Continuous TX at Chain A Antenna port Hawke platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-21*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3460.00	57.83	100	225			50.78	2.42	32.30	41.77	68.00	-26.23	Ch. 38
6920.13	57.00	100	225			50.49	3.48	35.92	45.90	68.00	-22.10	
10379.39	60.83	100	180			50.39	4.40	38.63	53.46	68.00	-14.54	
3513.33	57.83	100	225			50.76	2.44	32.43	41.93	68.00	-26.07	Ch. 54
7026.76	59.67	100	225			50.42	3.51	36.07	48.83	68.00	-19.17	
10540.22	58.33	100	225			50.43	4.45	38.72	51.06	68.00	-16.94	
3539.88	58.00	100	180			50.76	2.45	32.49	42.17	68.00	-25.83	Ch.62
7080.03	59.00	100	180			50.39	3.52	36.21	48.34	68.00	-19.66	
10620.47	59.67	100	180			50.43	4.45	38.75	52.44	74.00	-21.56	
10620.47				45.79	A	50.43	4.45	38.75	38.56	54.00	-15.44	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3460.00	57.33	100	180			50.78	2.42	31.81	40.78	68.00	-27.22	Ch. 38
6920.13	59.83	100	225			50.49	3.48	35.84	48.65	68.00	-19.35	
10379.60	59.67	100	135			50.39	4.40	38.60	52.28	68.00	-15.72	
3513.33	59.00	100	225			50.76	2.44	31.93	42.61	68.00	-25.39	Ch. 54
7026.76	59.83	100	180			50.42	3.51	35.97	48.89	68.00	-19.11	
10540.22	60.83	100	180			50.43	4.45	38.71	53.55	68.00	-14.45	
3540.11	56.33	100	225			50.76	2.45	32.00	40.02	68.00	-27.98	Ch.62
7080.01	61.33	100	225			50.39	3.52	36.11	50.57	68.00	-17.43	
10620.41	60.17	100	180			50.43	4.45	38.72	52.91	74.00	-21.09	
10620.41				47.10	A	50.43	4.45	38.72	39.84	54.00	-14.16	



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)
Channels 38, 54, & 62
Continuous RX at Chain A Antenna port Hawke platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-21*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3460.00	58.00	125	225			50.78	2.42	32.30	41.94	74.00	-32.06	Ch. 38
3460.00				50.68	A	50.78	2.42	32.30	34.62	54.00	-19.38	
3513.32	58.83	100	180			50.76	2.44	32.43	42.93	74.00	-31.07	Ch. 54
3513.32				49.11	A	50.76	2.44	32.43	33.21	54.00	-20.79	
3540.21	57.83	100	180			50.76	2.45	32.49	42.00	74.00	-32.00	Ch.62
3540.21				48.67	A	50.76	2.45	32.49	32.84	54.00	-21.16	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3460.02	62.50	100	135			50.78	2.42	31.81	45.95	74.00	-28.05	Ch. 38
3460.02				48.52	A	50.78	2.42	31.81	31.97	54.00	-22.03	
3513.33	60.33	100	180			50.76	2.44	31.93	43.94	74.00	-30.06	Ch. 54
3513.33				48.97	A	50.76	2.44	31.93	32.58	54.00	-21.42	
3540.02	56.17	100	180			50.76	2.45	32.00	39.86	74.00	-34.14	Ch.62
3540.02				46.59	A	50.76	2.45	32.00	30.28	54.00	-23.72	



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)
Channels 38, 54, & 62
Continuous TX at Chain B Antenna port Hawke platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-17*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5190.00	72.50	100	225			9.54	2.98	34.64	100.58			Ch. 38
5190.00				54.17	A	9.54	2.98	34.64	82.25			
5270.00	75.17	100	225			9.54	3.01	34.79	103.42			Ch. 54
5270.00				56.33	A	9.54	3.01	34.79	84.58			
5310.00	74.00	100	225			9.54	3.02	34.86	102.34			Ch. 62
5310.00				56.00	A	9.54	3.02	34.86	84.34			

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5190.00	71.50	100	225			9.54	2.98	34.40	99.35			Ch. 38
5190.00				52.83	A	9.54	2.98	34.40	80.68			
5270.00	70.50	100	225			9.54	3.01	34.53	98.50			Ch. 54
5270.00				51.50	A	9.54	3.01	34.53	79.50			
5310.00	71.33	100	225			9.54	3.02	34.60	99.40			Ch. 62
5310.00				53.33	A	9.54	3.02	34.60	81.40			

NOTE: Fundamental signals measured at 1 meter and extrapolated to 3 meters to calculate the radiated band edge field strengths.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)
Channels 38 & 62
Continuous TX at Chain B Antenna port Hawke platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-17*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00	35.83	100	225			9.54	2.97	34.57	63.83	74.00	-10.17	Ch. 38
5150.00				21.83	A	9.54	2.97	34.57	49.83	54.00	-4.17	
5350.00	43.00	100	225			9.54	3.03	34.93	71.42	74.00	-2.58	Ch. 62
5350.00				22.67	A	9.54	3.03	34.93	51.09	54.00	-2.91	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00	35.17	100	225			9.54	2.97	34.34	62.94	74.00	-11.06	Ch. 38
5150.00				21.00	A	9.54	2.97	34.34	48.77	54.00	-5.23	
5350.00	35.33	100	225			9.54	3.03	34.66	63.48	74.00	-10.52	Ch. 62
5350.00				20.50	A	9.54	3.03	34.66	48.65	54.00	-5.35	

NOTE: The “Band Edge Field Strength” was calculated using the “Radiated Fundamental” measurements.



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)
Channels 38, 54, & 62
Continuous TX at Chain B Antenna port Hawke platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-22*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3460.00	58.33	100	225			50.78	2.42	32.30	42.27	68.00	-25.73	Ch. 38
6920.13	59.00	100	135			50.49	3.48	35.92	47.90	68.00	-20.10	
10379.99	58.83	100	180			50.39	4.40	38.63	51.46	68.00	-16.54	
3513.33	60.00	100	225			50.76	2.44	32.43	44.10	68.00	-23.90	Ch. 54
7026.76	61.83	100	135			50.42	3.51	36.07	50.99	68.00	-17.01	
10540.22	61.50	100	135			50.43	4.45	38.72	54.23	68.00	-13.77	
3540.03	59.67	100	225			50.76	2.45	32.49	43.84	68.00	-24.16	Ch.62
7080.03	59.67	100	135			50.39	3.52	36.21	49.01	68.00	-18.99	
10620.47	60.50	100	135			50.43	4.45	38.75	53.27	74.00	-20.73	
10620.47				47.18	A	50.43	4.45	38.75	39.95	54.00	-14.05	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3460.00	59.50	100	225			50.78	2.42	31.81	42.95	68.00	-25.05	Ch. 38
6920.13	59.00	100	135			50.49	3.48	35.84	47.82	68.00	-20.18	
10380.00	63.00	100	135			50.39	4.40	38.60	55.61	68.00	-12.39	
3513.33	61.17	100	225			50.76	2.44	31.93	44.78	68.00	-23.22	Ch. 54
7026.76	60.33	100	180			50.42	3.51	35.97	49.39	68.00	-18.61	
10540.22	64.67	100	135			50.43	4.45	38.71	57.39	68.00	-10.61	
3540.03	59.17	100	135			50.76	2.45	32.00	42.86	68.00	-25.14	Ch.62
7080.01	60.50	100	180			50.39	3.52	36.11	49.74	68.00	-18.26	
10620.41	66.33	100	135			50.43	4.45	38.72	59.07	74.00	-14.93	
10620.41				52.02	A	50.43	4.45	38.72	44.76	54.00	-9.24	



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)
Channels 38, 54, & 62
Continuous RX at Chain B Antenna port Hawke platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-22*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3460.00	58.33	100	225			50.78	2.42	32.30	42.27	74.00	-31.73	Ch. 38
3460.00				50.81	A	50.78	2.42	32.30	34.75	54.00	-19.25	
3513.32	59.00	100	225			50.76	2.44	32.43	43.10	74.00	-30.90	Ch. 54
3513.32				51.69	A	50.76	2.44	32.43	35.79	54.00	-18.21	
3540.02	58.17	100	225			50.76	2.45	32.49	42.34	74.00	-31.66	Ch.62
3540.02				50.47	A	50.76	2.45	32.49	34.64	54.00	-19.36	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3460.02	60.17	100	225			50.78	2.42	31.81	43.62	74.00	-30.38	Ch. 38
3460.02				53.28	A	50.78	2.42	31.81	36.73	54.00	-17.27	
3513.26	59.50	100	225			50.76	2.44	31.93	43.11	74.00	-30.89	Ch. 54
3513.26				52.86	A	50.76	2.44	31.93	36.47	54.00	-17.53	
3540.02	58.83	100	180			50.76	2.45	32.00	42.52	74.00	-31.48	Ch.62
3540.02				52.45	A	50.76	2.45	32.00	36.14	54.00	-17.86	



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)
Channels 38, 54, & 62
Continuous TX at Dual Chain AB Antenna port Hawke platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-18*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5190.00	72.17	100	225			9.54	2.98	34.64	100.25			Ch. 38
5190.00				48.33	A	9.54	2.98	34.64	76.41			
5270.00	56.67	125	225			9.54	3.01	34.79	84.92			Ch. 54
5270.00				44.00	A	9.54	3.01	34.79	72.25			
5310.00	75.00	100	225			9.54	3.02	34.86	103.34			Ch. 62
5310.00				49.50	A	9.54	3.02	34.86	77.84			

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5190.00	70.83	100	225			9.54	2.98	34.40	98.68			Ch. 38
5190.00				46.83	A	9.54	2.98	34.40	74.68			
5270.00	56.17	100	180			9.54	3.01	34.53	84.17			Ch. 54
5270.00				44.50	A	9.54	3.01	34.53	72.50			
5310.00	73.00	100	225			9.54	3.02	34.60	101.07			Ch. 62
5310.00				48.83	A	9.54	3.02	34.60	76.90			

NOTE: Fundamental signals measured at 1 meter and extrapolated to 3 meters to calculate the radiated band edge field strengths.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)
Channels 38 & 62
Continuous TX at Dual Chain AB Antenna port Hawke platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-18*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00	34.33	100	225			9.54	2.97	34.57	62.33	74.00	-11.67	Ch. 38
5150.00				20.00	A	9.54	2.97	34.57	48.00	54.00	-6.00	
5350.00	35.17	100	225			9.54	3.03	34.93	63.59	74.00	-10.41	Ch. 62
5350.00				20.33	A	9.54	3.03	34.93	48.75	54.00	-5.25	

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Distance Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00	31.67	100	225			9.54	2.97	34.34	59.44	74.00	-14.56	Ch. 38
5150.00				19.50	A	9.54	2.97	34.34	47.27	54.00	-6.73	
5350.00	34.33	100	225			9.54	3.03	34.66	62.48	74.00	-11.52	Ch. 62
5350.00				20.50	A	9.54	3.03	34.66	48.65	54.00	-5.35	

NOTE: The “Band Edge Field Strength” was calculated using the “Radiated Fundamental” measurements.



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)
Channels 38, 54, & 62
Continuous TX at Dual Chain AB Antenna port Hawke platform with WNC Antennas
Aegis Labs, Inc. File #: INTEL-070910-23*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3460.00	55.17	100	180			50.78	2.42	32.30	39.11	68.00	-28.89	Ch. 38
6920.13	58.50	100	180			50.49	3.48	35.92	47.40	68.00	-20.60	
3513.33	54.83	100	135			50.76	2.44	32.43	38.93	68.00	-29.07	Ch. 54
7026.76	59.67	100	180			50.42	3.51	36.07	48.83	68.00	-19.17	
3539.88	56.50	100	180			50.76	2.45	32.49	40.67	68.00	-27.33	Ch.62
7080.03	58.17	100	180			50.39	3.52	36.21	47.51	68.00	-20.49	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3460.00	55.50	100	135			50.78	2.42	31.81	38.95	68.00	-29.05	Ch. 38
6920.13	58.83	100	135			50.49	3.48	35.84	47.65	68.00	-20.35	
3513.33	57.83	100	135			50.76	2.44	31.93	41.44	68.00	-26.56	Ch. 54
7026.76	59.50	100	180			50.42	3.51	35.97	48.56	68.00	-19.44	
10540.22	67.17	100	180			50.43	4.45	38.71	59.89	68.00	-8.11	
3540.11	56.67	100	135			50.76	2.45	32.00	40.36	68.00	-27.64	Ch.62
7080.01	59.33	100	135			50.39	3.52	36.11	48.57	68.00	-19.43	
10620.41	67.50	100	180			50.43	4.45	38.72	60.24	74.00	-13.76	
10620.41				53.16	A	50.43	4.45	38.72	45.90	54.00	-8.10	

**PEAK TRANSMIT POWER**

CLIENT:	Dell Computer Corporation	DATE:	09/17/07
EUT:	Intel Wireless WiFi Link 4965AGN	PROJECT NUMBER:	INTEL-070910
MODEL NUMBER:	4965AGN	TEST ENGINEER:	JC
SERIAL NUMBER:	0013E8056F43	SITE #:	2
CONFIGURATION:	Tested installed in the host computer's mini PCI slot.	TEMPERATURE:	21 deg. C
		HUMIDITY:	49% RH
		TIME:	9:00 AM

Description:	<p>For the band 5.15-5.25 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10\log B$, where B is the 26-dB emission bandwidth in MHz.</p> <p>For the band 5.25-5.35 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10\log B$, where B is the 26-dB emission bandwidth in MHz.</p>
Results:	Passed (See Data Sheet)
Note:	<p>Conducted Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency.</p> <ul style="list-style-type: none">• 120VAC / 60 Hz.



Peak Transmit Power (Continued)

Mode	Channel	Frequency (MHz)	Chain	Data Rate (Mbps)	Average Power (dBm)	Average Power (mW)	Peak Power (dBm)	Peak Power (mW)
802.11a	36	5180	A	6	15.38	34.51	16.61	45.81
802.11a	48	5240	A	6	15.46	35.15	16.81	47.97
802.11a	52	5260	A	6	17.50	56.23	18.61	72.60
802.11a	64	5320	A	6	16.46	44.25	18.41	69.34
802.11a	36	5180	B	6	15.43	34.91	16.81	47.97
802.11a	48	5240	B	6	15.52	35.64	16.91	49.09
802.11a	52	5260	B	6	17.57	57.14	19.41	87.29
802.11a	64	5320	B	6	16.54	45.08	19.11	81.46
802.11n	36	5180	A	HT0	15.49	35.40	16.91	49.09
802.11n	48	5240	A	HT0	15.35	34.27	16.71	46.88
802.11n	52	5260	A	HT0	17.46	55.71	18.81	76.03
802.11n	64	5320	A	HT0	16.51	44.77	18.41	69.34
802.11n	36	5180	B	HT0	15.47	35.23	16.71	46.88
802.11n	48	5240	B	HT0	15.61	36.39	16.81	47.97
802.11n	52	5260	B	HT0	17.53	56.62	19.21	83.36
802.11n	64	5320	B	HT0	16.50	44.66	18.71	74.29
802.11n (40MHz)	38	5190	A	HT0	15.36	34.35	16.51	44.76
802.11n (40MHz)	54	5270	A	HT0	17.43	55.33	18.51	70.95
802.11n (40MHz)	62	5310	A	HT0	15.30	33.88	16.41	43.74
802.11n (40MHz)	38	5190	B	HT0	15.35	34.27	16.41	43.74
802.11n (40MHz)	54	5270	B	HT0	17.38	54.69	18.91	77.79
802.11n (40MHz)	62	5310	B	HT0	15.41	34.75	16.21	41.78

NOTE: The output power measurement is conducted.



Peak Transmit Power (Continued)

Mode	Channel	Freq. (MHz)	Data Rate (Mbps)	Avg. Power (dBm) Ch. A	Avg. Power (mW) Ch. A	Peak Power (dBm) Ch. A	Peak Power (mW) Ch. A	Avg. Power (dBm) Ch. B	Avg. Power (mW) Ch. B	Peak Power (dBm) Ch. B	Peak Power (mW) Ch. B
802.11n (20MHz)	36	5180	HT 8	12.59	18.14	13.78	23.86	12.51	17.81	13.85	24.25
802.11n (20MHz)	48	5240	HT 8	12.70	18.61	13.50	22.37	12.46	17.61	13.64	23.11
802.11n (20MHz)	52	5260	HT 8	14.61	28.89	16.99	49.97	14.40	27.53	17.19	52.33
802.11n (20MHz)	64	5320	HT 8	14.41	27.59	17.09	51.14	14.32	27.02	17.29	53.55
802.11n (40MHz)	38(F)	5190	HT 8	12.51	17.83	14.04	25.36	12.56	18.04	13.84	24.22
802.11n (40MHz)	46(F)	5270	HT 8	14.50	28.19	17.64	58.09	14.57	28.65	17.54	56.77
802.11n (40MHz)	62(F)	5310	HT 8	14.42	27.68	17.84	60.83	14.57	28.65	17.94	62.25

Mode	Channel	Freq. (MHz)	Data Rate (Mbps)	Aggregate Avg. Output Power (dBm) Ch. A + B	Aggregate Avg. Output Power (mW) Ch. A + B	Aggregate Peak Output Power (dBm) Ch. A + B	Aggregate Peak Output Power (mW) Ch. A + B
802.11n (20MHz)	36	5180	HT 8	15.56	35.96	16.82	48.12
802.11n (20MHz)	48	5240	HT 8	15.59	36.22	16.58	45.48
802.11n (20MHz)	52	5260	HT 8	17.51	56.42	20.10	102.30
802.11n (20MHz)	64	5320	HT 8	17.37	54.61	20.20	104.69
802.11n (40MHz)	38(F)	5190	HT 8	15.55	35.86	16.95	49.58
802.11n (40MHz)	46(F)	5270	HT 8	17.55	56.84	20.60	114.86
802.11n (40MHz)	62(F)	5310	HT 8	17.51	56.33	20.90	123.08

(F) = Fat Channel



CONDCUTED BAND EDGE EMISSIONS TEST RESULTS

CLIENT:	Dell Computer Corporation	DATE:	09/17/07
EUT:	Intel Wireless WiFi Link 4965AGN	PROJECT NUMBER:	INTEL-070910
MODEL NUMBER:	4965AGN	TEST ENGINEER:	JC
SERIAL NUMBER:	0013E8056F43	SITE #:	2
CONFIGURATION:	Tested installed in the host computer's mini PCI slot.	TEMPERATURE:	21 deg. C
		HUMIDITY:	49% RH
		TIME:	9:00 AM

Description:	For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.
Results:	See Data Sheet
Note:	Conducted Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"> • 120VAC / 60 Hz.

Unwanted Spurious Emissions Limits	
Frequency (MHz)	Field Strength (dBm/Hz) (Emissions outside the restricted bands)
5250-5350	EIRP < -27dBm/Hz (68.3dBuV/m)

Freq. (MHz)	Power Spec Den. Reading (dBm/Hz)	Antenna Gain (dBi)	Corrected Reading (dBm/Hz)	Limits (dBm/Hz)	Diff (dB) +=FAIL	Comments
With WNC Antennas (Gain at 5GHz) Transmitting on Chain A						
5250.00	-34.50	1.92	-32.58	-27.00	-5.58	Tx @ 5240 MHz
5250.00	-33.70	1.92	-31.78	-27.00	-4.78	Tx @ 5260 MHz
With WNC Antennas (Gain at 5GHz) Transmitting on Chain B						
5250.00	-34.50	1.92	-32.58	-27.00	-5.58	Tx @ 5240 MHz
5250.00	-33.70	1.92	-31.78	-27.00	-4.78	Tx @ 5260 MHz



Conducted Band Edge Emissions Test Results (Continued)

802.11a Mode

Test Date	Data	Chain	Test Eng.
09/20/06	5.24 GHz band edge (INTEL-070320-25g01)	A	JC
<p>*ATTEN 20dB VAUG 100 MKR -32.50dBm RL 16.0dBm 10dB/ 5.25000GHz</p> <p>D TOTAL -34.5dBm DENSITY -94.5dBm/Hz</p> <p>R</p> <p>CENTER 5.25000GHz SPAN 50.00MHz *RBW 1.0MHz *VBW 1.0MHz SWP 50.0ms</p>			
Test Date	Data	Chain	Test Eng.
09/20/06	5.26 GHz band edge (INTEL-070320-25g02)	A	JC
<p>*ATTEN 20dB VAUG 100 MKR -31.83dBm RL 16.0dBm 10dB/ 5.25000GHz</p> <p>D TOTAL -33.7dBm DENSITY -93.7dBm/Hz</p> <p>R</p> <p>CENTER 5.25000GHz SPAN 50.00MHz *RBW 1.0MHz *VBW 1.0MHz SWP 50.0ms</p>			



Conducted Band Edge Emissions Test Results (Continued)

802.11a Mode

Test Date	Data	Chain	Test Eng.
09/20/06	5.24 GHz band edge (INTEL-070320-25g03)	B	JC
<p>*ATTEN 20dB VAUG 100 MKR -32.50dBm RL 16.0dBm 10dB/ 5.25000GHz</p> <p>D TOTAL -34.5dBm DENSITY -94.5dBm/Hz</p> <p>R</p> <p>CENTER 5.25000GHz SPAN 50.00MHz *RBW 1.0MHz *VBW 1.0MHz SWP 50.0ms</p>			
Test Date	Data	Chain	Test Eng.
09/20/06	5.26 GHz band edge (INTEL-070320-25g04)	B	JC
<p>*ATTEN 20dB VAUG 100 MKR -31.83dBm RL 16.0dBm 10dB/ 5.25000GHz</p> <p>D TOTAL -33.7dBm DENSITY -93.7dBm/Hz</p> <p>R</p> <p>CENTER 5.25000GHz SPAN 50.00MHz *RBW 1.0MHz *VBW 1.0MHz SWP 50.0ms</p>			



APPENDIX B

MODIFICATIONS AND RECOMMENDATIONS

1.0	NONE