

# SAR Test Report

Report No. : SFBEDW-WTW-P22080240

Applicant : Dell Inc.

Address : One Dell Way, Round Rock, Texas 78682, USA

Product : LTE Module

FCC ID : E2KFM101GL

Brand : Fibocom

Model No. : FM101-GL

FCC Rule Part : CFR §2.1093

Standards : IEC/IEEE 66209-1528:2020  
KDB 865664 D01 v01r04, KDB 865664 D02 v01r02,  
KDB 248227 D01 v02r02, KDB 447498 D01 v06, KDB 616217 D04 v01r02,  
KDB 941225 D01 v03r01, KDB 941225 D05 v02r05

Sample Received Date : Aug. 18, 2022


Date of Testing : Sep. 05, 2022 ~ Sep. 13, 2022

Lab Address : No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location : No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City, Taiwan

**CERTIFICATION:** The above equipment have been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch—Lin Kou Laboratories**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's SAR characteristics under the conditions specified in this report. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies.

Prepared By :



Lena Wang / Specialist

Approved By :



Gordon Lin / Manager



Testing Laboratory  
2021

FCC Accredited No.: TW0003

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

Release Control Record .....	3
<b>1. Summary of Maximum SAR Value .....</b>	<b>4</b>
<b>2. Description of Equipment Under Test .....</b>	<b>5</b>
<b>3. SAR Measurement System .....</b>	<b>8</b>
3.1 Definition of Specific Absorption Rate (SAR) .....	8
3.2 SPEAG DASY6 System .....	8
3.2.1 Robot .....	9
3.2.2 Probes .....	10
3.2.3 Data Acquisition Electronics (DAE) .....	10
3.2.4 Phantoms .....	10
3.2.5 Device Holder .....	11
3.2.6 System Validation Dipoles .....	12
3.2.7 Power Source .....	12
3.2.8 Tissue Simulating Liquids .....	13
3.3 SAR System Verification .....	15
3.4 SAR Measurement Procedure .....	16
3.4.1 Area Scan and Zoom Scan Procedure .....	16
3.4.2 Volume Scan Procedure .....	17
3.4.3 Power Drift Monitoring .....	18
3.4.4 Spatial Peak SAR Evaluation .....	18
3.4.5 SAR Averaged Methods .....	18
<b>4. SAR Measurement Evaluation .....</b>	<b>19</b>
4.1 EUT Configuration and Setting .....	19
4.2 EUT Testing Position .....	28
4.2.1 Body Exposure Conditions .....	28
4.3 Tissue Verification .....	29
4.4 System Validation .....	30
4.5 System Verification .....	31
4.6 Maximum Output Power .....	31
4.6.1 Maximum Target Conducted Power .....	31
4.6.2 Measured Conducted Power Result .....	31
4.7 SAR Testing Results .....	32
4.7.1 SAR Test Reduction Considerations .....	32
4.7.2 SAR Results for Body Exposure Condition .....	34
4.7.3 SAR Measurement Variability .....	34
4.7.4 Simultaneous Multi-band Transmission Evaluation .....	35
<b>5. Calibration of Test Equipment .....</b>	<b>36</b>
<b>6. Measurement Uncertainty .....</b>	<b>37</b>
<b>7. Information of the Testing Laboratories .....</b>	<b>38</b>
<b>Appendix A. SAR Plots of System Verification</b>	
<b>Appendix B. SAR Plots of SAR Measurement</b>	
<b>Appendix D. Maximum Target Conducted Power</b>	
<b>Appendix E. Measured Conducted Power Result</b>	
<b>Appendix F. SAR Test Result</b>	
<b>Appendix H. Analysis of Simultaneous Transmission SAR</b>	
<b>Appendix L. Verifying the Mechanism Operation of Gravity-sensor</b>	
<b>Appendix Z. Calibration Certificate for Probe and Dipole</b>	



## Release Control Record

Report No.	Reason for Change	Date Issued
SFBEDW-WTW-P22080240	Initial release	Oct. 06, 2022

# SAR Test Report

## 1. Summary of Maximum SAR Value

Equipment Class	Mode	Highest SAR <sub>1g</sub> Body (W/kg)
PCE	WCDMA II	0.67
	WCDMA IV	0.41
	WCDMA V	0.41
	LTE 2	0.62
	LTE 4	0.47
	LTE 5	0.41
	LTE 7	0.33
	LTE 12	0.52
	LTE 13	0.47
	LTE 14	0.46
	LTE 17	0.46
	LTE 25	0.49
	LTE 26	0.33
	LTE 30	0.59
	LTE 38	0.58
	LTE 41	0.74
LTE 48	0.70	
LTE 66	0.63	
LTE 71	0.50	
DTS	2.4G WLAN	0.93
NII	5.2G WLAN	1.17
	5.3G WLAN	0.96
	5.6G WLAN	1.11
	5.8G WLAN	1.18
DSS	Bluetooth	0.19

Highest Simultaneous Transmission SAR	Highest SAR <sub>1g</sub> Body (W/kg)
	1.32

**Note:**

- The SAR criteria (**Head & Body: SAR-1g 1.6 W/kg, and Extremity: SAR-10g 4.0 W/kg**) for general population/uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992.

**References Guidance:** IEEE C95.1:1992

**2. Description of Equipment Under Test**

<b>EUT Type</b>	LTE Module
<b>FCC ID</b>	E2KFM101GL
<b>Brand Name</b>	Fibocom
<b>Model Name</b>	FM101-GL
<b>EUT Configurations</b>	Sample 1: EUT + HB Antenna Sample 2: EUT + Speed Antenna
<b>Tx Frequency Bands (Unit: MHz)</b>	WCDMA Band II : 1852.4 ~ 1907.6 WCDMA Band IV : 1712.4 ~ 1752.6 WCDMA Band V : 826.4 ~ 846.6 LTE Band 2 : 1850.7 ~ 1909.3 LTE Band 4 : 1710.7 ~ 1754.3 LTE Band 5 : 824.7 ~ 848.3 LTE Band 7 : 2502.5 ~ 2567.5 LTE Band 12 : 699.7 ~ 715.3 LTE Band 13 : 779.5 ~ 784.5 LTE Band 14 : 790.5 ~ 795.5 LTE Band 17 : 706.5 ~ 713.5 LTE Band 25 : 1850.7 ~ 1914.3 LTE Band 26 : 814.7 ~ 848.3 LTE Band 30 : 2307.5 ~ 2312.5 LTE Band 38 : 2572.5 ~ 2617.5 LTE Band 41 : 2498.5 ~ 2687.5 LTE Band 48 : 3552.5 ~ 3697.5 LTE Band 66 : 1710.7 ~ 1779.3 LTE Band 71 : 665.5 ~ 695.5 WLAN : 2412 ~ 2472, 5180 ~ 5320, 5500 ~ 5720, 5745 ~ 5825 Bluetooth : 2402 ~ 2480
<b>Uplink Modulations</b>	WCDMA : QPSK LTE : QPSK, 16QAM 802.11b : DSSS 802.11a/g/n/ac : OFDM 802.11ax : OFDMA Bluetooth : GFSK, $\pi/4$ -DQPSK, 8-DPSK
<b>Maximum Tune-up Conducted Power (Unit: dBm)</b>	Please refer to Appendix D.
<b>Antenna Type</b>	Refer to Note
<b>EUT Stage</b>	Mass Product

**Note:**

1. The EUT is authorized for use in specific End-product. Please refer to below for more details.

Product	Brand	Model
Portable Computer	DELL	P33T

2. The WLAN/BT module (Brand: Intel® Wi-Fi 6 AX201, Model: AX201D2W) was installed in the EUT-product. The specification is listed as below.

WLAN module	
<b>Tx Frequency Bands (Unit: MHz)</b>	WLAN : 2412 ~ 2472, 5180 ~ 5320, 5500 ~ 5720, 5745 ~ 5825 Bluetooth : 2402 ~ 2480
<b>Uplink Modulations</b>	802.11b : DSSS 802.11a/g/n/ac : OFDM 802.11ax : OFDMA Bluetooth : GFSK, $\pi/4$ -DQPSK, 8-DPSK
<b>Maximum Tune-up Conducted Power (Unit: dBm)</b>	Please refer to Appendix D.
<b>Antenna Type</b>	WLAN/BT: PIFA Antenna
<b>FCC ID</b>	PD9AX201D2

# SAR Test Report

3. The antenna information is listed as below.

**<WWAN Antenna>**

Ant. Type	Brand	Model	Ant.	Mode	Antenna Peak Gain (dBi)								
					617-698 MHz	698-821 MHz	824-960 MHz	1425-1515 MHz	1710-2200 MHz	2300-2690 MHz	3400-3800 MHz	5150-5925 MHz	
PIFA	Hong-BO	350-24026 (DC33002R00L)	Main	Tablet	-0.99	-0.82	-0.40	0.62	1.48	2.24	0.76	1.21	
				Laptop	-2.91	-2.74	-2.01	-0.93	1.87	0.89	-0.51	1.98	
		Model	Ant.	Mode	716-821 MHz	824-960 MHz	1425-1515 MHz	1557-1610 MHz	1805-2200 MHz	2300-2690 MHz	3400-3800 MHz	5150-5925 MHz	
		330-24024 (DC33002R01L)	Aux.	Tablet	-1.08	-2.00	-0.57	-0.10	1.26	3.25	2.78	1.00	
				Laptop	-3.65	-4.43	-1.70	-2.09	0.42	1.83	1.29	-0.66	
		PIFA	SPEED	F-0G-FH-6163-001-00 (DC33002R10L)	Main	Tablet	-2.97	-1.61	-1.34	0.54	2.18	0.79	0.19
Laptop	-3.52					-1.57	-2.05	0.02	1.02	-0.77	-1.90	0.87	
Model	Ant.			Mode	617-698 MHz	716-821 MHz	824-960 MHz	1425-1515 MHz	1557-1610 MHz	1805-2200 MHz	2300-2690 MHz	3400-3800 MHz	5150-5925 MHz
F-0G-FH-6163-002-00 (DC33002R11L)	Aux.			Tablet	-1.57	-1.49	-3.22	-0.28	-0.10	0.98	3.00	0.21	0.81
				Laptop	-2.69	-3.03	-4.94	-1.46	-1.90	-0.04	0.00	-3.11	0.37

**<WLAN/BT Antenna>**

Ant. Type	Brand	Model
PIFA	Hong-BO	Main: 260-24415 (DC33002R02L) Aux.: 260-24415 (DC33002R02L)
Antenna Peak Gain (dBi)		
Laptop Mode		
Ant.	BT / 2400-2500MHz	5150-5250MHz
Main	2.08	2.83
Aux.	2.02	2.56
Tablet Mode		
Main	0.72	2.86
Aux.	-1.07	1.21

# SAR Test Report

Ant. Type		Brand		Model	
PIFA		Speed		Main: F-0G-FH-6163-003-00 (DC33002R12L) Aux.: F-0G-FH-6163-003-00 (DC33002R12L)	
Antenna Peak Gain (dBi)					
Laptop Mode					
Ant.	BT / 2400-2500MHz	5150-5250MHz	5250-5350MHz	5470-5725MHz	5725-5850MHz
Main	1.28	2.95	2.95	2.74	2.81
Aux.	0.18	2.08	1.95	2.91	1.69
Tablet Mode					
Main	0.09	2.60	2.88	4.28	3.43
Aux.	-0.59	2.47	1.80	2.56	1.0

- Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.
- The above EUT information is declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.

### List of End-product Accessory:

Battery	Brand Name	DELL
	Model Name	6WVHD
	Power Rating	7.6 Vdc, 4457 mAh, 35.6 Wh
	Type	Li-ion

### **3. SAR Measurement System**

#### **3.1 Definition of Specific Absorption Rate (SAR)**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

#### **3.2 SPEAG DASY6 System**

DASY6 system consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY6 software defined. The DASY6 software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC.



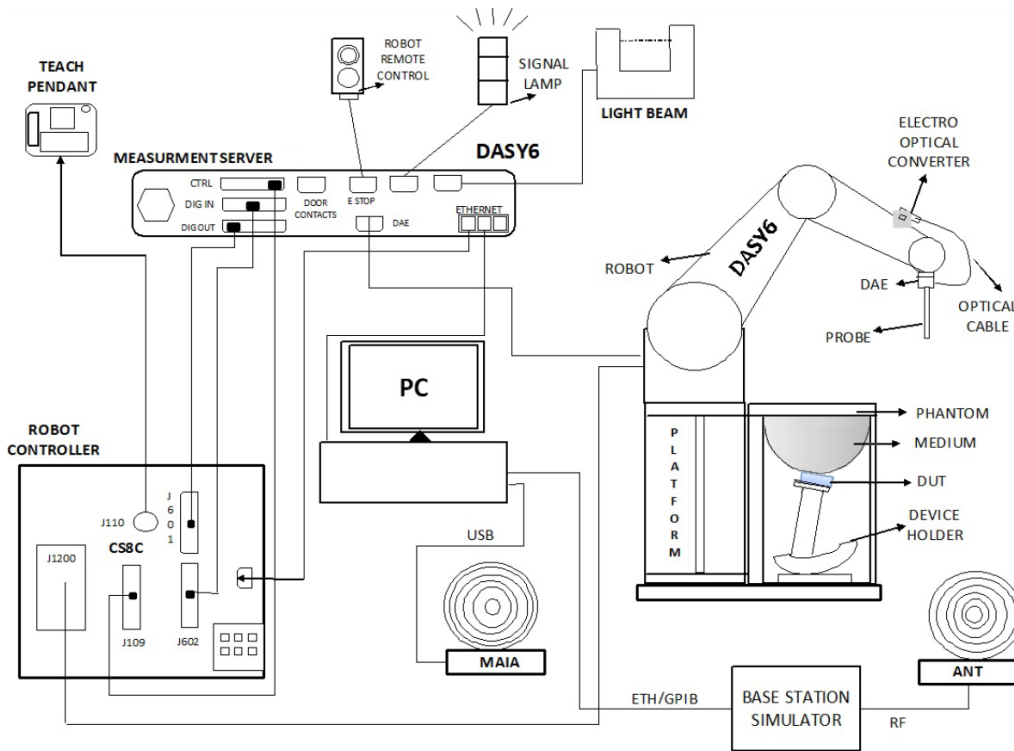


Fig-3.1 SPEAG DASY6 System Setup

### 3.2.1 Robot

The DASY6 systems use the high precision robots from Stäubli SA (France). For the 6-axis controller system, the robot controller version of CS8c from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability  $\pm 0.035$  mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

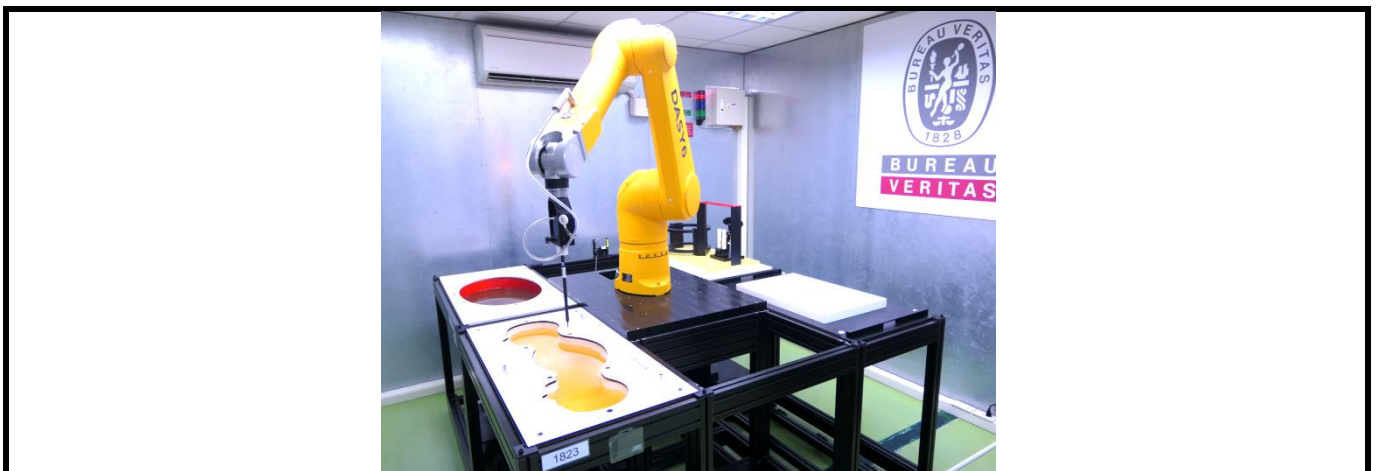



Fig-3.2 SPEAG DASY6 System


## SAR Test Report

### 3.2.2 Probes


The SAR measurement is conducted with the dosimetric probe. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency.

<b>Model</b>	EX3DV4	
<b>Construction</b>	Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).	
<b>Frequency</b>	4 MHz to 10 GHz Linearity: $\pm 0.2$ dB	
<b>Directivity</b>	$\pm 0.1$ dB in TSL (rotation around probe axis) $\pm 0.3$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 $\mu$ W/g to 100 mW/g Linearity: $\pm 0.2$ dB (noise: typically $< 1$ $\mu$ W/g)	
<b>Dimensions</b>	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	


### 3.2.3 Data Acquisition Electronics (DAE)

<b>Model</b>	DAE3, DAE4	
<b>Construction</b>	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
<b>Measurement Range</b>	-100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)	
<b>Input Offset Voltage</b>	$< 5$ $\mu$ V (with auto zero)	
<b>Input Bias Current</b>	$< 50$ fA	
<b>Dimensions</b>	60 x 60 x 68 mm	


### 3.2.4 Phantoms


<b>Model</b>	SAM-Twin Phantom	
<b>Construction</b>	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE Std 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body-mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.	
<b>Material</b>	Vinylester, fiberglass reinforced (VE-GF)	
<b>Shell Thickness</b>	2 $\pm$ 0.2 mm (6 $\pm$ 0.2 mm at ear point)	
<b>Dimensions</b>	Length: 1000 mm Width: 500 mm Height: adjustable feet	
<b>Filling Volume</b>	approx. 25 liters	


## SAR Test Report
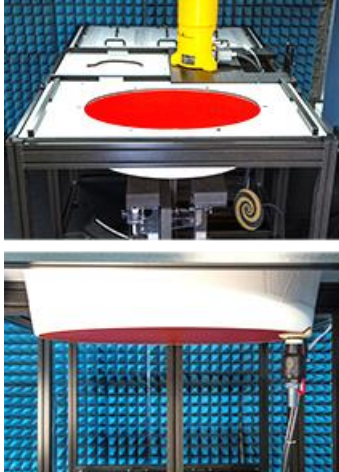
<b>Model</b>	ELI	
<b>Construction</b>	The ELI phantom is used for compliance testing of handheld and body-mounted wireless devices. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	
<b>Material</b>	Vinylester, fiberglass reinforced (VE-GF)	
<b>Shell Thickness</b>	2.0 ± 0.2 mm (bottom plate)	
<b>Dimensions</b>	Major axis: 600 mm Minor axis: 400 mm	
<b>Filling Volume</b>	approx. 30 liters	


### 3.2.5 Device Holder

<b>Model</b>	MD4HHTV5 - Mounting Device for Hand-Held Transmitters	
<b>Construction</b>	In combination with the Twin SAM or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).	
<b>Material</b>	Polyoxymethylene (POM)	


<b>Model</b>	MDA4WTV5 - Mounting Device Adaptor for Ultra Wide Transmitters	
<b>Construction</b>	An upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.	
<b>Material</b>	Polyoxymethylene (POM)	

<b>Model</b>	MDA4SPV6 - Mounting Device Adaptor for Smart Phones	
<b>Construction</b>	The solid low-density MDA4SPV6 adaptor assuring no impact on the DUT radiation performance and is conform with any DUT design and shape.	
<b>Material</b>	ROHACELL	


# SAR Test Report

<b>Model</b>	MD4LAPV5 - Mounting Device for Laptops and other Body-Worn Transmitters	
<b>Construction</b>	In combination with the Twin SAM or ELI phantoms, the Mounting Device (Body-Worn) enables testing of transmitter devices according to IEC 62209-2 specifications. The device holder can be locked for positioning at a flat phantom section.	
<b>Material</b>	Polyoxymethylene (POM), PET-G, Foam	

### 3.2.6 System Validation Dipoles


<b>Model</b>	D-Serial	
<b>Construction</b>	Symmetrical dipole with 1/4 balun. Enables measurement of feed point impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions.	
<b>Frequency</b>	750 MHz to 5800 MHz	
<b>Return Loss</b>	> 20 dB	
<b>Power Capability</b>	> 100 W (f < 1GHz), > 40 W (f > 1GHz)	

### 3.2.7 Power Source

<b>Model</b>	Powersource1	
<b>Signal Type</b>	Continuous Wave	
<b>Operating Frequencies</b>	600 MHz to 5850 MHz	
<b>Output Power</b>	-5.0 dBm to +17.0 dBm	
<b>Power Supply</b>	5V DC, via USB jack	
<b>Power Consumption</b>	<3 W	
<b>Applications</b>	System performance check and validation with a CW signal.	

**3.2.8 Tissue Simulating Liquids**

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 10 % are listed in Table-3.1.

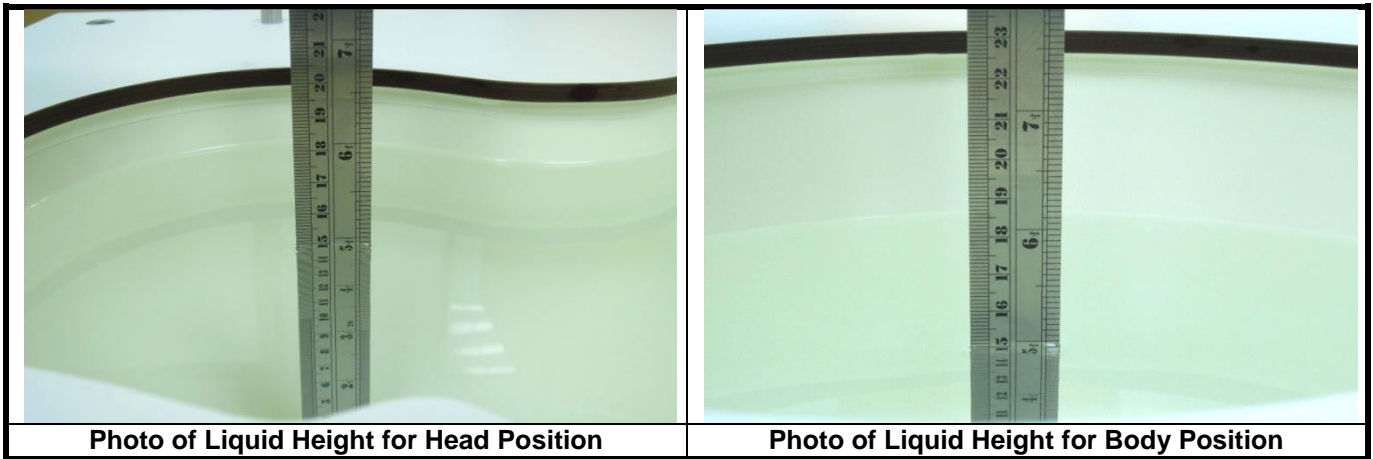

**Table-3.1 Targets of Tissue Simulating Liquid**

Frequency (MHz)	Target Permittivity	Range of ±10 %	Target Conductivity	Range of ±10 %
450	43.5	39.2 ~ 47.9	0.87	0.78 ~ 0.96
750	41.9	37.7 ~ 46.1	0.89	0.80 ~ 0.98
835	41.5	37.4 ~ 45.7	0.90	0.81 ~ 0.99
900	41.5	37.4 ~ 45.7	0.97	0.87 ~ 1.07
1450	40.5	36.5 ~ 44.6	1.20	1.08 ~ 1.32
1500	40.4	36.4 ~ 44.4	1.23	1.11 ~ 1.35
1640	40.2	36.2 ~ 44.2	1.31	1.18 ~ 1.44
1750	40.1	36.1 ~ 44.1	1.37	1.23 ~ 1.51
1800	40.0	36.0 ~ 44.0	1.40	1.26 ~ 1.54
1900	40.0	36.0 ~ 44.0	1.40	1.26 ~ 1.54
2000	40.0	36.0 ~ 44.0	1.40	1.26 ~ 1.54
2100	39.8	35.8 ~ 43.8	1.49	1.34 ~ 1.64
2300	39.5	35.6 ~ 43.5	1.67	1.50 ~ 1.84
2450	39.2	35.3 ~ 43.1	1.80	1.62 ~ 1.98
2600	39.0	35.1 ~ 42.9	1.96	1.76 ~ 2.16
3000	38.5	34.7 ~ 42.4	2.40	2.16 ~ 2.64
3500	37.9	34.1 ~ 41.7	2.91	2.62 ~ 3.20
4000	37.4	33.7 ~ 41.1	3.43	3.09 ~ 3.77
4500	36.8	33.1 ~ 40.5	3.94	3.55 ~ 4.33
5000	36.2	32.6 ~ 39.8	4.45	4.01 ~ 4.90
5200	36.0	32.4 ~ 39.6	4.66	4.19 ~ 5.13
5400	35.8	32.2 ~ 39.4	4.86	4.37 ~ 5.35
5600	35.5	32.0 ~ 39.1	5.07	4.56 ~ 5.58
5800	35.3	31.8 ~ 38.8	5.27	4.74 ~ 5.80
6000	35.1	31.6 ~ 38.6	5.48	4.93 ~ 6.03

# SAR Test Report

The dielectric properties of the tissue simulating liquids are defined in IEC 62209-1 and IEC 62209-2. The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using a dielectric assessment kit and a network analyzer.

Since the range of  $\pm 10\%$  of the required target values is used to measure relative permittivity and conductivity, the SAR correction procedure is applied to correct measured SAR for the deviations in permittivity and conductivity. Only positive correction has been used to scale up the measured SAR, and SAR result would not be corrected if the correction  $\Delta$  SAR has a negative sign.

The following table gives the recipes for tissue simulating liquids.


**Table-3.2 Recipes of Tissue Simulating Liquid**

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
H750	0.2	-	0.2	1.5	56.0	-	42.1	-
H835	0.2	-	0.2	1.5	57.0	-	41.1	-
H900	0.2	-	0.2	1.4	58.0	-	40.2	-
H1450	-	43.3	-	0.6	-	-	56.1	-
H1640	-	45.8	-	0.5	-	-	53.7	-
H1750	-	47.0	-	0.4	-	-	52.6	-
H1800	-	44.5	-	0.3	-	-	55.2	-
H1900	-	44.5	-	0.2	-	-	55.3	-
H2000	-	44.5	-	0.1	-	-	55.4	-
H2300	-	44.9	-	0.1	-	-	55.0	-
H2450	-	45.0	-	0.1	-	-	54.9	-
H2600	-	45.1	-	0.1	-	-	54.8	-
H3500	-	8.0	-	0.2	-	20.0	71.8	-
H5G	-	-	-	-	-	17.2	65.5	17.3



**3.3 SAR System Verification**

The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

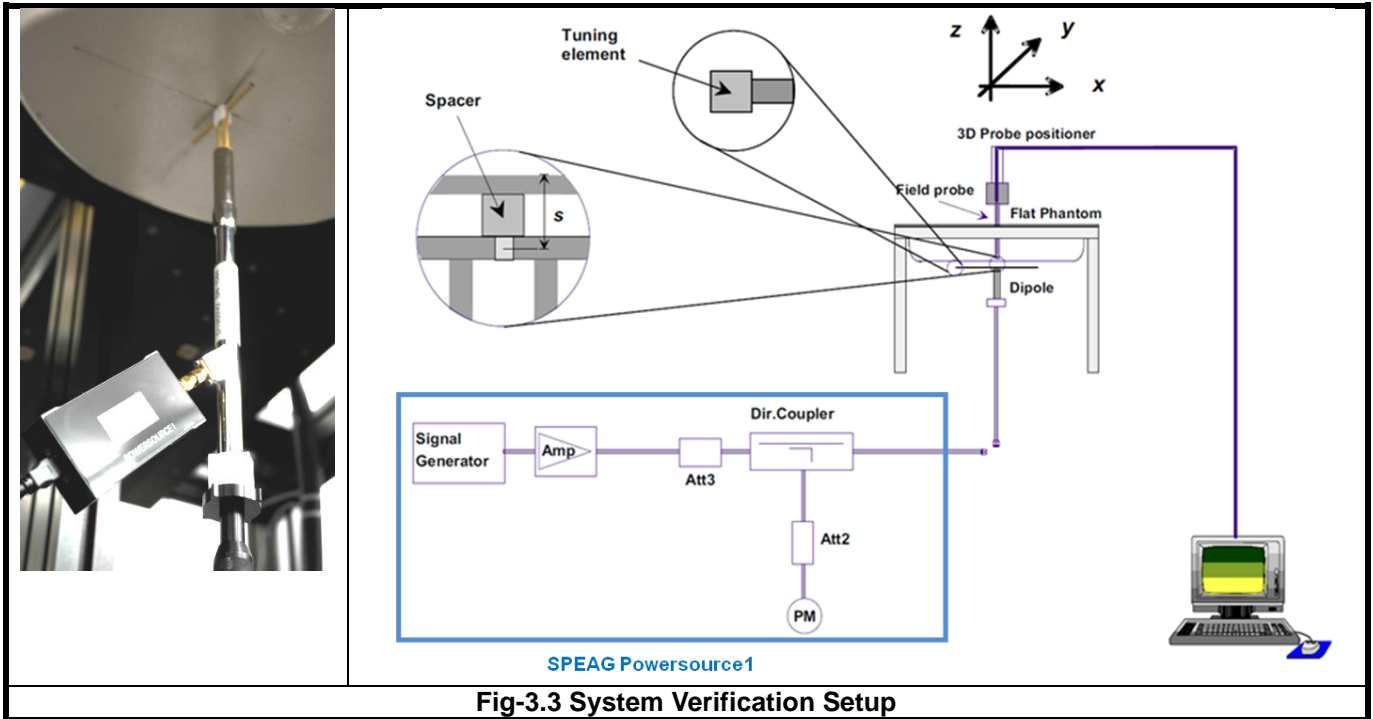

**Fig-3.3 System Verification Setup**

The SPEAG Powersource1 is a portable and very stable RF source providing a continuous wave (CW) signal. It is designed for conducting SAR system checks and SAR system validation of DASY and is compatible with IEC 62209-1, IEC 62209-2 and IEEE Std 1528 standards. The Powersource1 has been calibrated by SPEAG's ISO/IEC 17025-accredited calibration center. When using Powersource1, the setup can be simplified, as shown in Fig-3.3. The signal purity is warranted by design. Since the Powersource1 is calibrated, no additional equipment is needed and the Powersource1 can directly be connected to the SMA connector of the dipole without a cable as all separate components (signal generator, amplifier, coupler and power meter) are built into the unit.

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The Powersource1 is adjusted for the desired forward power of 17 dBm at the dipole connector and the RF output power would be turned on. After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

**3.4 SAR Measurement Procedure**

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

The SAR measurement procedures for each of test conditions are as follows:

- (a) Make EUT to transmit maximum output power
- (b) Measure conducted output power through RF cable
- (c) Place the EUT in the specific position of phantom
- (d) Perform SAR testing steps on the DASY system
- (e) Record the SAR value

**3.4.1 Area Scan and Zoom Scan Procedure**

First area scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an area scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, zoom scan is required. The zoom scan is performed around the highest E-field value to determine the averaged SAR-distribution.

Measure the local SAR at a test point at 1.4 mm of the inner surface of the phantom recommended by SEPAG. The area scan (two-dimensional SAR distribution) is performed cover at least an area larger than the projection of the EUT or antenna. The measurement resolution and spatial resolution for interpolation shall be chosen to allow identification of the local peak locations to within one-half of the linear dimension of the corresponding side of the zoom scan volume. Following table provides the measurement parameters required for the area scan.

Parameter	$f \leq 3 \text{ GHz}$	$3 \text{ GHz} < f \leq 6 \text{ GHz}$
Maximum distance from closest measurement point to phantom surface	$5 \pm 1$	$\delta \ln(2)/2 \pm 0.5$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	$\leq 2 \text{ GHz: } \leq 15 \text{ mm}$ $2 - 3 \text{ GHz: } \leq 12 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 12 \text{ mm}$ $4 - 6 \text{ GHz: } \leq 10 \text{ mm}$

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks. Additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g. 1 W/kg for 1.6 W/kg, 1 g limit; or 1.26 W/kg for 2 W/kg, 10 g limit).



The zoom scan (three-dimensional SAR distribution) is performed at the local maxima locations identified in previous area scan procedure. The zoom scan volume must be larger than the required minimum dimensions. When graded grids are used, which only applies in the direction normal to the phantom surface, the initial grid separation closest to the phantom surface and subsequent graded grid increment ratios must satisfy the required protocols. The 1-g SAR averaging volume must be fully contained within the zoom scan measurement volume boundaries; otherwise, the measurement must be repeated by shifting or expanding the zoom scan volume. The similar requirements also apply to 10-g SAR measurements. Following table provides the measurement parameters required for the zoom scan.

Parameter		$f \leq 3$ GHz	$3 \text{ GHz} < f \leq 6$ GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm	3 – 4 GHz: $\leq 5$ mm 4 – 6 GHz: $\leq 4$ mm
Maximum zoom scan spatial resolution, normal to phantom surface	<i>uniform grid:</i> $\Delta z_{\text{zoom}}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm
	<i>graded grids:</i> $\Delta z_{\text{zoom}}(1)$	$\leq 4$ mm	3 – 4 GHz: $\leq 3.0$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2.0$ mm
	$\Delta z_{\text{zoom}}(n>1)$	$\leq 1.5 \cdot \Delta z_{\text{zoom}}(n-1)$ mm	
Minimum zoom scan volume (x, y, z)		$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm

Per IEC 62209-2 AMD1, the successively higher resolution zoom scan is required if the zoom scan measured as defined above complies with both of the following criteria, or if the peak spatial-average SAR is below 0.1 W/kg, no additional measurements are needed:

- (1) The smallest horizontal distance from the local SAR peaks to all points 3 dB below the SAR peak shall be larger than the horizontal grid steps in both x and y directions ( $\Delta x, \Delta y$ ). This shall be checked for the measured zoom scan plane conformal to the phantom at the distance  $z_{M1}$ .
- (2) The ratio of the SAR at the second measured point (M2) to the SAR at the closest measured point (M1) at the x-y location of the measured maximum SAR value shall be at least 30 %.

If one or both of the above criteria are not met, the zoom scan measurement shall be repeated using a finer resolution. New horizontal and vertical grid steps shall be determined from the measured SAR distribution so that the above criteria are met. Compliance with the above two criteria shall be demonstrated for the new measured zoom scan.

### 3.4.2 Volume Scan Procedure

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

### 3.4.3 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

### 3.4.4 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

### 3.4.5 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

## 4. SAR Measurement Evaluation

### 4.1 EUT Configuration and Setting

#### <Considerations Related to Proximity Sensor>

The device supports WWAN, WLAN, and Bluetooth capabilities. It is designed with a proximity sensor which can trigger/not trigger power reduction for WCDMA and LTE on Front Face, Rear Face and Top Side of EUT for SAR compliance. Others RF capability (WLAN and Bluetooth) have no power reduction. The power levels for all wireless technologies and the power reduction please refer to section 4.6 of this report.

#### Proximity Sensor Triggering Distances (KDB 616217 D04 §6.2)

The proximity sensor triggering distance was determined per KDB 616217 for rear face and applicable edge. Summary for power verification per distance was tabulated in the below table.

Output Power Verification in dBm for EUT Rear Face											
Distance (mm)	16	17	18	19	20	21	22	23	24	25	26
WCDMA II	20.4	20.0	20.5	20.4	20.4	20.3	24.1	24.1	24.0	24.4	24.0
WCDMA IV	17.4	17.2	17.1	17.3	17.3	17.0	23.6	23.7	23.5	23.5	23.9
WCDMA V	21.3	21.2	21.0	21.3	21.3	21.4	23.7	23.5	23.4	23.3	23.7
LTE 2	20.4	20.2	20.2	20.1	20.4	20.2	23.2	22.9	22.9	23.3	23.2
LTE 4	16.7	16.7	16.5	16.8	16.6	16.9	23.1	23.2	23.1	22.8	23.3
LTE 5	21.0	21.2	21.2	21.5	21.4	21.1	23.7	23.7	23.3	23.5	23.5
LTE 7	16.1	16.0	16.5	16.5	16.4	16.4	22.7	22.9	22.6	22.9	22.8
LTE 12	21.5	21.6	21.3	21.3	21.3	21.4	23.3	23.4	23.4	23.5	23.6
LTE 13	21.9	22.0	21.7	21.9	21.7	22.0	23.5	23.6	23.7	23.7	23.5
LTE 14	21.4	21.0	21.5	21.2	21.1	21.2	23.2	23.2	23.6	23.3	23.6
LTE 17	21.5	21.0	21.4	21.5	21.2	21.5	23.3	23.3	23.5	23.7	23.3
LTE 25	19.5	19.8	19.9	19.9	19.9	19.8	23.1	22.8	22.8	23.0	23.3
LTE 26	20.7	20.7	20.5	20.9	21.0	20.7	23.3	23.5	23.5	23.5	23.2
LTE 30	20.0	20.4	20.1	20.3	20.1	20.2	22.4	22.1	21.9	22.2	22.1
LTE 38	16.9	17.1	17.0	17.2	17.0	16.9	22.8	22.7	22.7	22.4	22.6
LTE 41	18.7	18.5	18.8	18.5	18.5	18.6	22.8	22.9	22.4	22.5	22.6
LTE 48	19.4	18.9	19.3	19.4	19.2	19.2	20.8	20.4	20.8	20.4	20.8
LTE 66	16.4	16.6	16.6	16.3	16.6	16.4	23.0	23.0	22.8	23.3	22.9
LTE 71	20.8	20.8	21.3	21.0	20.9	21.3	23.6	23.7	23.5	23.9	23.9


Output Power Verification in dBm for EUT Top Edge											
Distance (mm)	21	22	23	24	25	26	27	28	29	30	31
WCDMA II	20.2	20.0	20.0	20.3	20.4	20.0	23.9	24.1	24.1	24.4	24.1
WCDMA IV	17.3	17.2	17.3	17.3	17.0	17.1	24.0	23.6	23.9	23.8	23.9
WCDMA V	21.5	21.1	21.3	21.5	21.3	21.4	23.6	23.6	23.4	23.3	23.2
LTE 2	20.0	20.1	20.3	20.3	20.0	20.2	23.3	22.8	22.8	23.2	23.3
LTE 4	16.5	16.6	16.8	16.8	16.7	16.9	23.2	23.3	23.2	22.8	23.3
LTE 5	21.4	21.1	21.3	21.0	21.5	21.4	23.4	23.4	23.6	23.2	23.3
LTE 7	16.4	16.0	16.5	16.0	16.5	16.1	22.5	22.5	22.8	22.9	22.7
LTE 12	21.4	21.7	21.3	21.2	21.2	21.7	23.6	23.6	23.8	23.3	23.6
LTE 13	21.7	22.0	21.7	21.8	21.5	21.5	23.5	23.8	23.6	23.7	23.4
LTE 14	21.4	21.3	21.1	21.4	21.2	21.3	23.2	23.4	23.2	23.5	23.2
LTE 17	21.1	21.1	21.2	21.4	21.1	21.1	23.5	23.7	23.5	23.2	23.5
LTE 25	19.6	19.5	19.8	19.7	19.7	19.5	22.9	23.3	22.8	23.0	23.1
LTE 26	20.7	21.0	20.9	21.0	21.0	20.7	23.6	23.4	23.7	23.6	23.4
LTE 30	20.0	20.1	19.9	20.1	20.3	20.2	22.1	22.3	22.3	22.2	22.0
LTE 38	17.4	17.2	17.2	17.1	17.1	16.9	22.6	22.8	22.9	22.4	22.9
LTE 41	18.4	18.9	18.8	18.5	18.5	18.6	22.9	22.5	22.7	22.7	22.7
LTE 48	19.2	19.0	19.1	19.1	19.1	19.4	20.5	20.4	20.3	20.7	20.3
LTE 66	16.3	16.5	16.4	16.2	16.6	16.5	23.2	22.9	22.9	23.3	23.2
LTE 71	21.0	21.3	20.9	21.3	21.0	21.3	23.4	23.9	23.7	23.6	23.5

**Proximity Sensor Coverage (KDB 616217 D04 §6.3)**

Since the proximity sensor is collocated with antenna in one component, the procedure for proximity sensor coverage is not required.

**Proximity Sensor Tilt Angle Influences(KDB 616217 D04 §6.4)**

The proximity sensor tilt angle influence was determined per KDB 616217 for applicable edge. Summary for proximity sensor tilt angle influence is shown in below.

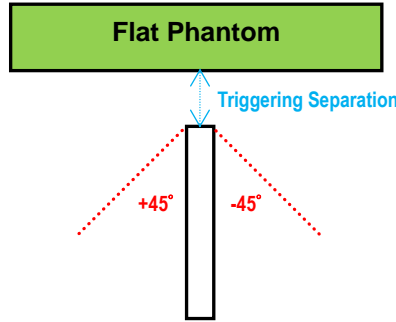

Orientation	Separation Distance (mm)	Tilt Angle										
		-45°	-40°	-30°	-20°	-10°	0°	10°	20°	30°	40°	45°
Top Edge	22	On	On	On	On	On	On	On	On	On	On	On

**Summary for Proximity Sensor Triggering Test**

According to the procedures noticed in KDB 616217 D04, the proximity sensor triggering distance is 21 mm for EUT Rear Face, and 22 mm for Top Side. The separation distance of 22 mm determined by the smallest triggering distance on Top Side is used to access the tilt angle influence and the sensor does not release during ±45 degree. Therefore, the smallest separation distance for tilt angle influence is 22 mm for the Top Side. The conservation triggering distances based on the separation distance for the sensor trigger / not triggered as EUT with power reduction at 0 mm, and EUT without power reduction at 20 mm for EUT Rear Face, and 21 mm for Top Side were used to test SAR.

The power reduction is depends on the proximity sensor input. For a steady SAR test, the power reduction was enabled or disabled manually by engineering software during SAR testing.

**<Considerations Related to Gravity-Sensor>**

The device supports WLAN, and Bluetooth capabilities. It is designed with a G-sensor which can trigger WLAN power reduction for SAR compliance. The power levels for all wireless technologies and the power reduction please refer to section 4.6 of this report and operational description by manufacturer.

**<Per Nov. 2019TCB Workshop Gravity-Sensor Guidance >**

In accordance with the guidance, it applied to laptops/tablets that use Hall Effect or gravity sensors to detect lid angle for the purpose of power reduction, the following steps verifying the power level and its power reduction when LCD angle changed.

The power verified by LCD angle changed please refer to Annex L.

## <Connections between EUT and System Simulator>

For WWAN SAR testing, the EUT was linked and controlled by base station emulator. Communication between the EUT and the emulator was established by air link. The distance between the EUT and the communicating antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during SAR testing.

## <Considerations Related to WCDMA for Setup and Testing>

### Release 5 HSDPA Data Devices

The 3G SAR test reduction procedure is applied to body SAR with 12.2 kbps RMC as the primary mode. Otherwise, body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. HSDPA is configured according to the applicable UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms and a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors ( $\beta_c$ ,  $\beta_d$ ), and HS-DPCCH power offset parameters ( $\Delta_{ACK}$ ,  $\Delta_{NACK}$ ,  $\Delta_{CQI}$ ) are set according to values indicated in below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}^{(1)(2)}$	CM <sup>(3)</sup> (dB)	MPR <sup>(3)</sup> (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 <sup>(4)</sup>	15/15 <sup>(4)</sup>	64	12/15 <sup>(4)</sup>	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{HS} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

# SAR Test Report

## Release 6 HSUPA Data Devices

The 3G SAR test reduction procedure is applied to body SAR with 12.2 kbps RMC as the primary mode. Otherwise, body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode. Otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing. Due to inner loop power control requirements in HSPA, a communication test set is required for output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the  $\beta$  values indicated in below.

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}^{(1)}$	$\beta_{ec}$	$\beta_{ed}^{(4)/(5)}$	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM <sup>(2)</sup> (dB)	MPR <sup>(2)/(6)</sup> (dB)	AG <sup>(5)</sup> Index	E-TFCI
1	11/15 <sup>(3)</sup>	15/15 <sup>(3)</sup>	64	11/15 <sup>(3)</sup>	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}$ : 47/15 $\beta_{ed2}$ : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ . For sub-test 5,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 5/15$  with  $\beta_{HS} = 5/15 * \beta_c$ .  
 Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCCH, HS-DPCCCH, E-DPDCH and E-DPCCCH the MPR is based on the relative CM difference.  
 Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .  
 Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.  
 Note 5:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.  
 Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

## DC-HSDPA SAR Guidance

The 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Otherwise, when SAR is required for Rel. 5 HSDPA, SAR is required for Rel. 8 DC-HSDPA. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

## <Considerations Related to LTE for Setup and Testing>

This device contains LTE transmitter which follows 3GPP standards, is category 3, supports both QPSK and QAM modulations, and supported LTE band and channel bandwidth is listed in below. The output power was tested per 3GPP TS 36.521-1 maximum transmit procedures for both QPSK and QAM modulation. The results please refer to section 4.6 of this report.

EUT Supported LTE Band and Channel Bandwidth						
LTE Band	BW 1.4 MHz	BW 3 MHz	BW 5 MHz	BW 10 MHz	BW 15 MHz	BW 20 MHz
2	V	V	V	V	V	V
4	V	V	V	V	V	V
5	V	V	V	V		
7			V	V	V	V
12	V	V	V	V		
13			V	V		
14			V	V		
17			V	V		
25	V	V	V	V	V	V
26	V	V	V	V	V	
30			V	V		
38			V	V	V	V
41			V	V	V	V
48			V	V	V	V
66	V	V	V	V	V	V
71			V	V	V	V

The LTE maximum power reduction (MPR) in accordance with 3GPP TS 36.101 is active all times during LTE operation. The allowed MPR for the maximum output power is specified in below.

Modulation	Channel Bandwidth / RB Configurations						LTE MPR Setting (dB)
	BW 1.4 MHz	BW 3 MHz	BW 5 MHz	BW 10 MHz	BW 15 MHz	BW 20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1
16QAM	<= 5	<= 4	<= 8	<= 12	<= 16	<= 18	1
16QAM	> 5	> 4	> 8	> 12	> 16	> 18	2


**Note:** MPR is according to the standard and implemented in the circuit (mandatory).

In addition, the device is compliant with additional maximum power reduction (A-MPR) requirements defined in 3GPP TS 36.101 section 6.2.4 that was disabled for all FCC compliance testing.

During LTE SAR testing, the related parameters of operating band, channel bandwidth, uplink channel number, modulation type, and RB was set in base station simulator. When the EUT has registered and communicated to base station simulator, the simulator set to make EUT transmitting the maximum radiated power.

**TDD-LTE Setup Configurations**

According to KDB 941225 D05, SAR testing for TDD-LTE device must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP TDD-LTE configurations. The TDD-LTE of this device supports frame structure type 2 defined in 3GPP TS 36.211 section 4.2, and the frame structure configuration can be referred to below.

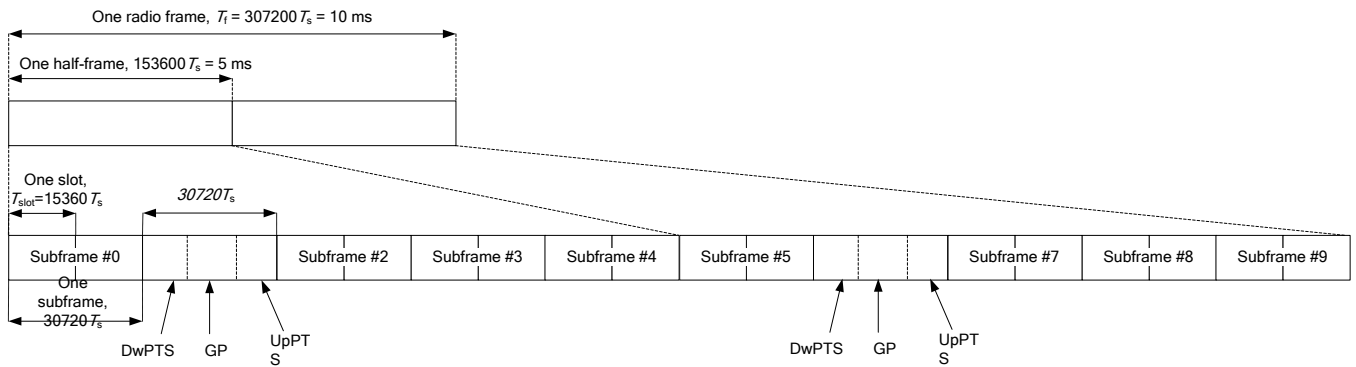

**3GPP TS 36.211 Figure 4.2-1: Frame Structure Type 2**

Special Subframe Configuration	Normal Cyclic Prefix in Downlink			Extended Cyclic Prefix in Downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal Cyclic Prefix in Uplink	Extended Cyclic Prefix in Uplink		Normal Cyclic Prefix in Uplink	Extended Cyclic Prefix in Uplink
0	6592 · Ts	2192 · Ts	2560 · Ts	7680 · Ts	2192 · Ts	2560 · Ts
1	19760 · Ts			20480 · Ts		
2	21952 · Ts			23040 · Ts		
3	24144 · Ts			25600 · Ts		
4	26336 · Ts			7680 · Ts		
5	6592 · Ts	4384 · Ts	5120 · Ts	20480 · Ts	4384 · Ts	5120 · Ts
6	19760 · Ts			23040 · Ts		
7	21952 · Ts			12800 · Ts		
8	24144 · Ts			-		
9	13168 · Ts	-	-	-	-	-

**3GPP TS 36.211 Table 4.2-1: Configuration of Special Subframe**

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-Point Periodicity	Subframe Number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

**3GPP TS 36.211 Table 4.2-2: Uplink-Downlink Configurations**



## SAR Test Report

The variety of different TD-LTE uplink-downlink configurations allows a network operator to allocate the network's capacity between uplink and downlink traffic to meet the needs of the network. The uplink duty cycle of these seven configurations can readily be computed and shown in below.

UL-DL Configuration	0	1	2	3	4	5	6
Highest Duty-Cycle	63.33%	43.33%	23.33%	31.67%	21.67%	11.67%	53.33%

Considering the highest transmission duty cycle, TDD-LTE was tested using Uplink-Downlink Configuration 0 with 6 uplink subframe and 2 special subframe. The special subframe was set to special subframe configuration 7 using extended cyclic prefix uplink. Therefore, SAR testing for TDD-LTE was performed at the maximum output power with highest transmission duty cycle of 63.33%.

### <Considerations Related to WLAN for Setup and Testing>

In general, various vendor specific external test software and chipset based internal test modes are typically used for SAR measurement. These chipset based test mode utilities are generally hardware and manufacturer dependent, and often include substantial flexibility to reconfigure or reprogram a device. A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement. The test frequencies established using test mode must correspond to the actual channel frequencies. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. In addition, a periodic transmission duty factor is required for current generation SAR systems to measure SAR correctly. The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

According to KDB 248227 D01, this device has installed WLAN engineering testing software which can provide continuous transmitting RF signal. During WLAN SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

### Initial Test Configuration

An initial test configuration is determined for OFDM transmission modes in 2.4 GHz and 5 GHz bands according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

### Subsequent Test Configuration

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. Additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. When the highest reported SAR for the initial test configuration according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for that subsequent test configuration.

### SAR Test Configuration and Channel Selection

When multiple channel bandwidth configurations in a frequency band have the same specified maximum output power, the initial test configuration is using largest channel bandwidth, lowest order modulation, lowest data rate, and lowest order 802.11 mode (i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n). After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following.

- 1) The channel closest to mid-band frequency is selected for SAR measurement.
- 2) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

### Test Reduction for U-NII-1 (5.2 GHz) and U-NII-2A (5.3 GHz) Bands

For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following.

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition).
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

**<Considerations Related to Bluetooth for Setup and Testing>**

This device has installed Bluetooth engineering testing software which can provide continuous transmitting RF signal. During Bluetooth SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

The Bluetooth call box has been used during SAR measurement and the EUT was set to DH5 mode at the maximum output power. Its duty factor was calculated as below and the measured SAR for Bluetooth would be scaled to the 100% transmission duty factor to determine compliance.

The duty factor of Bluetooth signal are shown as below.



**Time-domain plot for Bluetooth transmission signal**

The duty factor of Bluetooth signal has been calculated as following.

$$\text{Duty Factor} = \text{Pulse Width} / \text{Total Period} = ( 8.79 - 5.88 ) / ( 9.63 - 5.88 ) = 77.60\%$$

## 4.2 EUT Testing Position

### 4.2.1 Body Exposure Conditions

For laptop PC, according to KDB 616217 D04, SAR evaluation is required for the bottom surface of the keyboard. This EUT was tested in the base of EUT directly against the flat phantom. The required minimum test separation distance for incorporating transmitters and antennas into laptop computer display is determined with the display screen opened at an angle of 90° to the keyboard compartment.

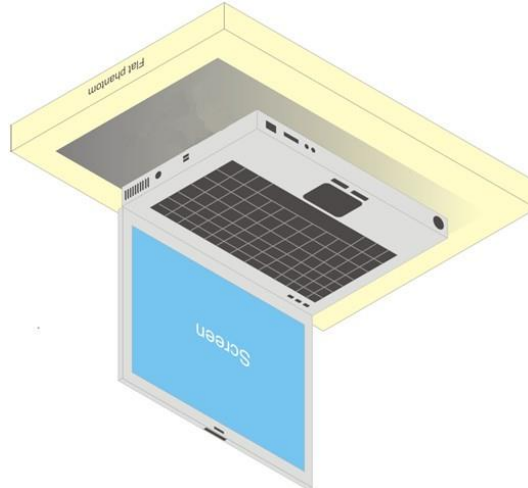


Fig-4.1 Illustration for Laptop Setup

For full-size tablet, according to KDB 616217 D04, SAR evaluation is required for back surface and edges of the devices. The back surface and edges of the tablet are tested with the tablet touching the phantom. Exposures from antennas through the front surface of the display section of a tablet are generally limited to the user's hands. Exposures to hands for typical consumer transmitters used in tablets are not expected to exceed the extremity SAR limit; therefore, SAR evaluation for the front surface of tablet display screens are generally not necessary. When voice mode is supported on a tablet and it is limited to speaker mode or headset operations only, additional SAR testing for this type of voice use is not required.

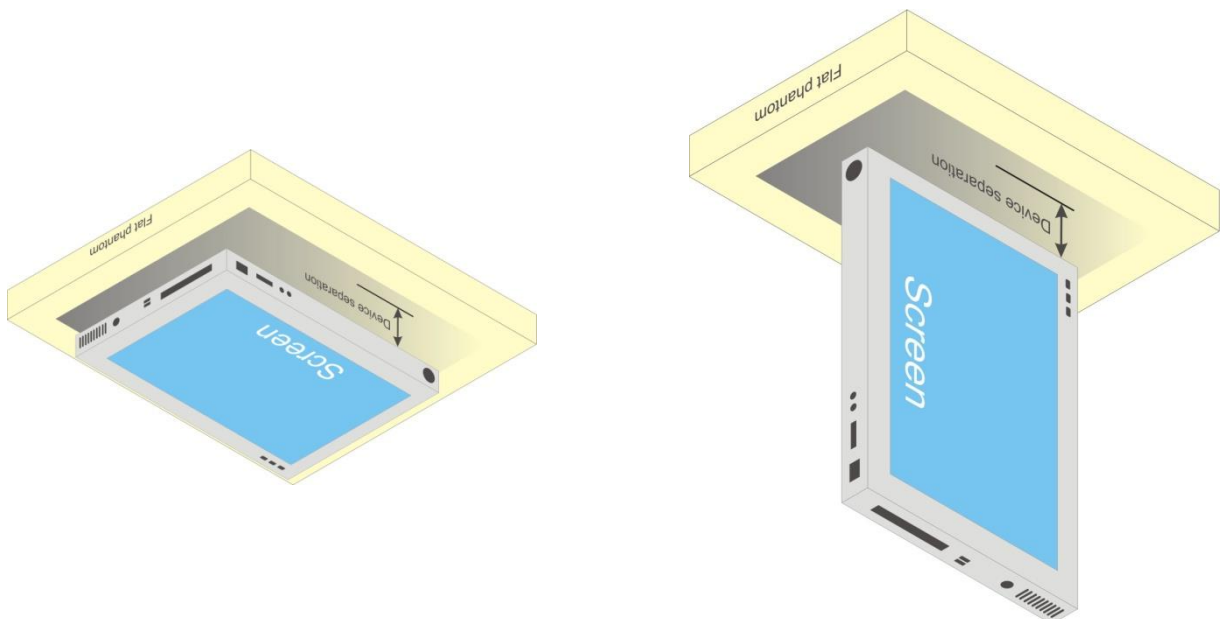


Fig-4.2 Illustration for Tablet Setup

**4.3 Tissue Verification**

The measuring results for tissue simulating liquid are shown as below.

Plot No.	Test Date	Frequency (MHz)	Liquid Temp. (°C)	Measured Conductivity ( $\sigma$ )	Measured Permittivity ( $\epsilon_r$ )	Target Conductivity ( $\sigma$ )	Target Permittivity ( $\epsilon_r$ )	Conductivity Deviation (%)	Permittivity Deviation (%)
S01	Sep. 05, 2022	1900	23.2	1.46	38.607	1.4	40	4.29	-3.48
S02	Sep. 05, 2022	1750	23.2	1.37	38.873	1.37	40.1	0.00	-3.06
S03	Sep. 06, 2022	835	23.1	0.935	40.704	0.9	41.5	3.89	-1.92
S04	Sep. 05, 2022	1900	23.2	1.46	38.607	1.4	40	4.29	-3.48
S05	Sep. 05, 2022	1750	23.2	1.37	38.873	1.37	40.1	0.00	-3.06
S06	Sep. 06, 2022	835	23.1	0.935	40.704	0.9	41.5	3.89	-1.92
S07	Sep. 06, 2022	2600	23.1	2.034	37.395	1.96	39	3.78	-4.12
S08	Sep. 07, 2022	750	23.4	0.902	41.574	0.9	42	0.22	-1.01
S09	Sep. 07, 2022	750	23.4	0.902	41.574	0.9	42	0.22	-1.01
S10	Sep. 08, 2022	750	23.5	0.887	41.533	0.9	42	-1.44	-1.11
S11	Sep. 08, 2022	750	23.5	0.887	41.533	0.9	42	-1.44	-1.11
S12	Sep. 09, 2022	1900	23.3	1.46	40.91	1.4	40	4.29	2.27
S13	Sep. 09, 2022	835	23.3	0.925	42.385	0.9	41.5	2.78	2.13
S14	Sep. 11, 2022	2300	23.3	1.711	38.428	1.67	39.5	2.46	-2.71
S15	Sep. 10, 2022	2600	23.4	2.034	38.245	1.96	39	3.78	-1.94
S16	Sep. 10, 2022	2600	23.4	2.034	38.245	1.96	39	3.78	-1.94
S17a	Sep. 10, 2022	3500	23.4	2.856	38.994	2.91	37.9	-1.86	2.89
S17b	Sep. 10, 2022	3700	23.4	3.116	38.312	3.12	37.7	-0.13	1.62
S18	Sep. 09, 2022	1750	23.3	1.335	41.491	1.37	40.1	-2.55	3.47
S19	Sep. 08, 2022	750	23.5	0.887	41.533	0.9	42	-1.44	-1.11
S20	Sep. 11, 2022	2450	23.3	1.868	37.896	1.8	39.2	3.78	-3.33
S21	Sep. 12, 2022	5250	23.1	4.748	36.885	4.71	35.9	0.81	2.74
S22	Sep. 12, 2022	5250	23.1	4.748	36.885	4.71	35.9	0.81	2.74
S23	Sep. 13, 2022	5600	23.2	5.09	36.503	5.07	35.5	0.39	2.83
S25	Sep. 13, 2022	5750	23.2	5.249	36.283	5.22	35.4	0.56	2.49
S26	Sep. 11, 2022	2450	23.3	1.868	37.896	1.8	39.2	3.78	-3.33

**Note:**

The dielectric properties of the tissue simulating liquid have been measured within 24 hours before the SAR testing and within  $\pm 10\%$  of the target values. Liquid temperature during the SAR testing has kept within  $\pm 2\text{ }^\circ\text{C}$ .

# SAR Test Report

## 4.4 System Validation

The SAR measurement system was validated according to procedures in KDB 865664 D01. The validation status in tabulated summary is as below.

Plot No.	Test Date	Probe S/N	Calibration Point	Measured Conductivity ( $\sigma$ )	Measured Permittivity ( $\epsilon_r$ )	Validation for CW			Validation for Modulation		
						Sensitivity Range	Probe Linearity	Probe Isotropy	Modulation Type	Duty Factor	PAR
S01	Sep. 05, 2022	7736	1900	1.46	38.607	Pass	Pass	Pass	N/A	N/A	N/A
S02	Sep. 05, 2022	7736	1750	1.37	38.873	Pass	Pass	Pass	N/A	N/A	N/A
S03	Sep. 06, 2022	7736	835	0.935	40.704	Pass	Pass	Pass	N/A	N/A	N/A
S04	Sep. 05, 2022	7736	1900	1.46	38.607	Pass	Pass	Pass	N/A	N/A	N/A
S05	Sep. 05, 2022	7736	1750	1.37	38.873	Pass	Pass	Pass	N/A	N/A	N/A
S06	Sep. 06, 2022	7736	835	0.935	40.704	Pass	Pass	Pass	N/A	N/A	N/A
S07	Sep. 06, 2022	7736	2600	2.034	37.395	Pass	Pass	Pass	N/A	N/A	N/A
S08	Sep. 07, 2022	7736	750	0.902	41.574	Pass	Pass	Pass	N/A	N/A	N/A
S09	Sep. 07, 2022	7736	750	0.902	41.574	Pass	Pass	Pass	N/A	N/A	N/A
S10	Sep. 08, 2022	7736	750	0.887	41.533	Pass	Pass	Pass	N/A	N/A	N/A
S11	Sep. 08, 2022	7736	750	0.887	41.533	Pass	Pass	Pass	N/A	N/A	N/A
S12	Sep. 09, 2022	7736	1900	1.46	40.91	Pass	Pass	Pass	N/A	N/A	N/A
S13	Sep. 09, 2022	7736	835	0.925	42.385	Pass	Pass	Pass	N/A	N/A	N/A
S14	Sep. 11, 2022	7736	2300	1.711	38.428	Pass	Pass	Pass	N/A	N/A	N/A
S15	Sep. 10, 2022	7736	2600	2.034	38.245	Pass	Pass	Pass	N/A	N/A	N/A
S16	Sep. 10, 2022	7736	2600	2.034	38.245	Pass	Pass	Pass	N/A	N/A	N/A
S17a	Sep. 10, 2022	7736	3500	2.856	38.994	Pass	Pass	Pass	N/A	N/A	N/A
S17b	Sep. 10, 2022	7736	3700	3.116	38.312	Pass	Pass	Pass	N/A	N/A	N/A
S18	Sep. 09, 2022	7736	1750	1.335	41.491	Pass	Pass	Pass	N/A	N/A	N/A
S19	Sep. 08, 2022	7736	750	0.887	41.533	Pass	Pass	Pass	N/A	N/A	N/A
S20	Sep. 11, 2022	7736	2450	1.868	37.896	Pass	Pass	Pass	OFDM	N/A	Pass
S21	Sep. 12, 2022	7736	5250	4.748	36.885	Pass	Pass	Pass	OFDM	N/A	Pass
S22	Sep. 12, 2022	7736	5250	4.748	36.885	Pass	Pass	Pass	OFDM	N/A	Pass
S23	Sep. 13, 2022	7736	5600	5.09	36.503	Pass	Pass	Pass	OFDM	N/A	Pass
S25	Sep. 13, 2022	7736	5750	5.249	36.283	Pass	Pass	Pass	OFDM	N/A	Pass
S26	Sep. 11, 2022	7736	2450	1.868	37.896	Pass	Pass	Pass	OFDM	N/A	Pass



**4.5 System Verification**

The measuring result for system verification is tabulated as below.

Plot No.	Test Date	Frequency (MHz)	1W Target SAR-1g (W/kg)	Measured SAR-1g (W/kg)	Normalized to 1W SAR-1g (W/kg)	Deviation (%)	Dipole S/N	Probe S/N	DAE S/N	Output Power (dBm)
S01	Sep. 05, 2022	1900	40.40	1.97	39.31	-2.71	5d036	7736	579	17
S02	Sep. 05, 2022	1750	35.80	1.84	36.71	2.55	1055	7736	579	17
S03	Sep. 06, 2022	835	9.58	0.462	9.22	-3.78	4d121	7736	579	17
S04	Sep. 05, 2022	1900	40.40	1.97	39.31	-2.71	5d036	7736	579	17
S05	Sep. 05, 2022	1750	35.80	1.84	36.71	2.55	1055	7736	579	17
S06	Sep. 06, 2022	835	9.58	0.462	9.22	-3.78	4d121	7736	579	17
S07	Sep. 06, 2022	2600	57.60	2.74	54.67	-5.09	1020	7736	579	17
S08	Sep. 07, 2022	750	8.56	0.393	7.84	-8.40	1013	7736	579	17
S09	Sep. 07, 2022	750	8.56	0.393	7.84	-8.40	1013	7736	579	17
S10	Sep. 08, 2022	750	8.56	0.394	7.86	-8.16	1013	7736	579	17
S11	Sep. 08, 2022	750	8.56	0.394	7.86	-8.16	1013	7736	579	17
S12	Sep. 09, 2022	1900	40.40	2.02	40.30	-0.24	5d036	7736	579	17
S13	Sep. 09, 2022	835	9.58	0.436	8.70	-9.19	4d121	7736	579	17
S14	Sep. 11, 2022	2300	49.20	2.28	45.49	-7.54	1004	7736	579	17
S15	Sep. 10, 2022	2600	57.60	2.93	58.46	1.50	1020	7736	579	17
S16	Sep. 10, 2022	2600	57.60	2.93	58.46	1.50	1020	7736	579	17
S17a	Sep. 10, 2022	3500	65.60	3.42	68.24	4.02	1007	7736	579	17
S17b	Sep. 10, 2022	3700	66.70	3.49	69.63	4.40	1017	7736	579	17
S18	Sep. 09, 2022	1750	35.80	1.86	37.11	3.66	1055	7736	579	17
S19	Sep. 08, 2022	750	8.56	0.394	7.86	-8.16	1013	7736	579	17
S20	Sep. 11, 2022	2450	52.60	2.45	48.88	-7.06	737	7736	579	17
S21	Sep. 12, 2022	5250	80.60	3.82	76.22	-5.44	1019	7736	579	17
S22	Sep. 12, 2022	5250	80.60	3.82	76.22	-5.44	1019	7736	579	17
S23	Sep. 13, 2022	5600	82.40	4.37	87.19	5.82	1019	7736	579	17
S25	Sep. 13, 2022	5750	79.40	3.91	78.01	-1.74	1019	7736	579	17
S26	Sep. 11, 2022	2450	52.60	2.45	48.88	-7.06	737	7736	579	17

**Note:**

Comparing to the reference SAR value provided by SPEAG, the validation data should be within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots can be referred to Appendix A of this report.

**4.6 Maximum Output Power**

**4.6.1 Maximum Target Conducted Power**

Refer to Appendix D.

**4.6.2 Measured Conducted Power Result**

Refer to Appendix E.

## 4.7 SAR Testing Results

### 4.7.1 SAR Test Reduction Considerations

#### <KDB 447498 D01, General RF Exposure Guidance>

Testing of other required channels within the operating mode of a frequency band is not required when the reported SAR for the mid-band or highest output power channel is:

- (1)  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
- (2)  $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- (3)  $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz

When SAR is not measured at the maximum power level allowed for production units, the measured SAR will be scaled to the maximum tune-up tolerance limit to determine compliance. The scaling factor for the tune-up power is defined as maximum tune-up limit (mW) / measured conducted power (mW). The reported SAR would be calculated by measured SAR x tune-up power scaling factor.

The SAR has been measured with highest transmission duty factor supported by the test mode tools for WLAN and/or Bluetooth. When the transmission duty factor could not achieve 100%, the reported SAR will be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up power. The scaling factor for the duty factor is defined as 100% / transmission duty cycle (%). The reported SAR would be calculated by measured SAR x tune-up power scaling factor x duty cycle scaling factor.

#### <KDB 941225 D01, 3G SAR Measurement Procedures>

The mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq 1/4$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.



### <KDB 941225 D05, SAR Evaluation Considerations for LTE Devices>

(1) QPSK with 1 RB and 50% RB allocation

Start with the largest channel bandwidth and measure SAR, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is  $> 1.45$  W/kg, SAR is required for all three RB offset configurations for that required test channel.

(2) QPSK with 100% RB allocation

SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.

(3) Higher order modulations

SAR is required only when the highest maximum output power for the configuration in the higher order modulation is  $> 1/2$  dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is  $> 1.45$  W/kg.

(4) Other channel bandwidth

SAR is required when the highest maximum output power of the smaller channel bandwidth is  $> 1/2$  dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is  $> 1.45$  W/kg.

### <KDB 248227 D01, SAR Guidance for Wi-Fi Transmitters>

- (1) For handsets operating next to ear, hotspot mode or mini-tablet configurations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When the reported SAR of initial test position is  $\leq 0.4$  W/kg, SAR testing for remaining test positions is not required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured.
- (2) For WLAN 2.4 GHz, the highest measured maximum output power channel for DSSS was selected for SAR measurement. When the reported SAR is  $\leq 0.8$  W/kg, no further SAR testing is required. Otherwise, SAR is evaluated at the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel. For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is  $\leq 1.2$  W/kg.
- (3) For WLAN 5GHz, the initial test configuration was selected according to the transmission mode with the highest maximum output power. When the reported SAR of initial test configuration is  $> 0.8$  W/kg, SAR is required for the subsequent highest measured output power channel until the reported SAR result is  $\leq 1.2$  W/kg or all required channels are measured. For other transmission modes, SAR is not required when the highest reported SAR for initial test configuration is adjusted by the ratio of subsequent test configuration to initial test configuration specified maximum output power and it is  $\leq 1.2$  W/kg.
- (4) For WLAN MIMO mode, the power-based standalone SAR test exclusion or the sum of SAR provision in KDB 447498 to determine simultaneous transmission SAR test exclusion should be applied. Otherwise, SAR for MIMO mode will be measured with all applicable antennas transmitting simultaneously at the specified maximum output power of MIMO operation.

## 4.7.2 SAR Results for Body Exposure Condition

Refer to Appendix F.

## 4.7.3 SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are  $\leq 1.45$  W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is  $\leq 1.10$ , the highest SAR configuration for either head or body tissue-equivalent medium maybe used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is  $< 0.80$  W/kg, repeated measurement is not required.
2. When the highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$ , or when the original or repeated measurement is  $\geq 1.45$  W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ , and the original, first or second repeated measurement is  $\geq 1.5$  W/kg, perform a third repeated measurement.

Plot	Band	Mode	Test Position	Ch.	Original Measured SAR-1g (W/kg)	1st Repeated SAR-1g (W/kg)	L/S Ratio	2nd Repeated SAR-1g (W/kg)	L/S Ratio	3rd Repeated SAR-1g (W/kg)	L/S Ratio
R20	WLAN2.4G	802.11b	Bottom for Laptop	6	0.933	0.922	1.01	N/A	N/A	N/A	N/A
R21	WLAN5.2G	802.11ac VHT80	Bottom for Laptop	42	1.11	1.08	1.03	N/A	N/A	N/A	N/A
R22	WLAN5.3G	802.11ac VHT160	Bottom for Laptop	50	0.937	0.925	1.01	N/A	N/A	N/A	N/A
R23	WLAN5.6G	802.11ac VHT160	Bottom for Laptop	114	1.07	1.02	1.05	N/A	N/A	N/A	N/A
R25	WLAN5.8G	802.11ac VHT80	Bottom for Laptop	155	1.12	1.08	1.04	N/A	N/A	N/A	N/A

### 4.7.4 Simultaneous Multi-band Transmission Evaluation

#### <SAR Summation Analysis>

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR<sub>1g</sub> of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR<sub>1g</sub> 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR<sub>1g</sub> is greater than the SAR limit (SAR<sub>1g</sub> 1.6 W/kg), SAR test exclusion is determined by the SPLSR.

Refer to Annex H for the Simultaneous transmission SAR analysis for this device.

#### <SAR to Peak Location Separation Ratio Analysis>

The simultaneous transmitting antennas in each operating mode and exposure condition combination are considered one pair at a time to determine the SPLSR. When SAR is measured for both antennas in the pair, the peak location separation distance is computed by the following formula.

$$\text{Peak Location Separation Distance} = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

Where (x<sub>1</sub>, y<sub>1</sub>, z<sub>1</sub>) and (x<sub>2</sub>, y<sub>2</sub>, z<sub>2</sub>) are the coordinates of the extrapolated peak SAR locations in the area or zoom scans.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna. Due to curvatures on the SAM phantom, when SAR is estimated for one of the antennas in an antenna pair, the measured peak SAR location will be translated onto the test device to determine the peak location separation for the antenna pair.

The SPLSR is determined by the following formula.

$$\text{SPLSR} = \frac{(\text{SAR}_1 + \text{SAR}_2)^{1.5}}{R_i}$$

Where SAR<sub>1</sub> and SAR<sub>2</sub> are the highest reported or estimated SAR for each antenna in the pair, and R<sub>i</sub> is the separation distance between the peak SAR locations for the antenna pair in mm.

When the SPLSR is ≤ 0.04, the simultaneous transmission SAR is not required. Otherwise, the enlarged zoom scan and volume scan post-processing procedures will be performed.

Since sum of simultaneous transmission SAR is less than the SAR limit for Body : SAR<sub>1g</sub> 1.6 W/kg .  
There is no requirement for SAR to Peak Location Separation Ratio Analysis.

**Test Engineer :** Hank Hsu

## SAR Test Report

### 5. Calibration of Test Equipment

Equipment	Manufacturer	Model	SN	Cal. Date	Cal. Interval
System Validation Dipole	SPEAG	D750V3	1013	Aug. 31, 2021	2 Years
System Validation Dipole	SPEAG	D835V2	4d121	Aug. 31, 2021	2 Years
System Validation Dipole	SPEAG	D1750V2	1055	Sep. 02, 2021	2 Years
System Validation Dipole	SPEAG	D1900V2	5d036	Jan. 22, 2021	2 Years
System Validation Dipole	SPEAG	D2450V2	737	Aug. 26, 2021	2 Years
System Validation Dipole	SPEAG	D2600V2	1020	Aug. 17, 2021	2 Years
System Validation Dipole	SPEAG	D3500V2	1007	Jan. 20, 2021	2 Years
System Validation Dipole	SPEAG	D3700V2	1017	Aug. 19, 2021	2 Years
System Validation Dipole	SPEAG	D5GHzV2	1019	Mar. 19, 2021	2 Years
Dosimetric E-Field Probe	SPEAG	EX3DV4	7736	May. 30, 2022	1 Year
Data Acquisition Electronics	SPEAG	DAE3	579	Jun. 01, 2022	1 Year
Universal Radio Communication Tester	Anritsu	MT8821C	6201381727	Aug. 03, 2022	1 Year
Spectrum Analyzer	R&S	FSL6	102006	Apr. 13, 2022	1 Year
Power Meter	Anritsu	ML2495A	1218009	Jul. 04, 2022	1 Year
Power Sensor	Anritsu	MA2411B	1207252	Jul. 05, 2022	1 Year
Universal Wireless Test Set	Anritsu	MT8870A	6262411397	Feb. 25, 2022	1 Year
Thermometer	YFE	YF-160A	150601220	May. 26, 2022	1 Year
Dielectric Assessment Kit	SPEAG	DAKS-3.5	1092	May. 23, 2022	1 Year
Dielectric Assessment Kit	SPEAG	DAKS_VNA R140	0010917	May. 23, 2022	1 Year
Powersource1	SPEAG	SE_UMS_160 BA	4010	Jul. 25, 2022	1 Year

## **6. Measurement Uncertainty**

According to KDB 865664 D01, SAR measurement uncertainty analysis is required in SAR reports only when the highest measured SAR in a frequency band is  $\geq 1.5$  W/kg for 1-g SAR, and  $\geq 3.75$  W/kg for 10-g SAR. The procedures described in IEEE Std 1528-2013 should be applied. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . When the highest measured SAR within a frequency band is  $< 1.5$  W/kg for 1-g and  $< 3.75$  W/kg for 10-g, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. Hence, the measurement uncertainty analysis is not required in this SAR report because the test result met the condition.

## **7. Information of the Testing Laboratories**

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Taiwan Huaya Lab:**

Add: No. 19, Huaya 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan

Tel: +886-(0)3-318-3232

Fax: +886-(0)3-211-5834

**Taiwan Linkou Lab:**

Add: No. 47-2, Baodoucuokeng, Linkou Dist., New Taipei City 244, Taiwan

Tel: +886-(0)2-2605-2180

Fax: +886-(0)2-2605-2943

**Taiwan Hsinchu Lab1:**

Add: E-2, No. 1, Lixing 1st Rd., East Dist., Hsinchu City 300, Taiwan

Tel: +886-(0)3-666-8565

Fax: +886-(0)3-666-8323

**Taiwan Hsinchu Lab2:**

Add: No. 49, Ln. 206, Wende Rd., Qionglin Township, Hsinchu County 307, Taiwan

Tel: +886-(0)3-512-0595

Fax: +886-(0)3-512-0568

**Taiwan Xindian Lab:**

Add: B2F., No. 215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231, Taiwan

Tel: +886-(0)2-8914-5882

Fax: +886-(0)2-8914-5840

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** <https://ee.bureauveritas.com.tw/BVInternet/Default>

The road map of all our labs can be found in our web site also.

---END---