



FCC Test Report

Equipment : Tablet Computer
Brand Name : Dell
Model No. : J42A
FCC ID : E2KJ42A
Standard : 47 CFR FCC Part 15.407
Frequency Range : 5150 MHz – 5250 MHz
5250 MHz – 5350 MHz
5470 MHz – 5725 MHz
Equipment Class : NII
Applicant : Dell
Manufacturer : One Dell Way, Round Rock, Texas 78682, U.S.A.
Operate Mode : Client without radar detection

The product sample received on Sep. 12, 2012 and completely tested on Oct. 11, 2012. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Wayne Hsu / Assistant Manager





Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Accessories	8
1.3	Support Equipment.....	8
1.4	Testing Applied Standards	8
1.5	Testing Location Information	8
1.6	Measurement Uncertainty	9
2	TEST CONFIGURATION OF EUT	10
2.1	The Worst Case Modulation Configuration	10
2.2	Test Channel Frequencies Configuration.....	10
2.3	The Worst Case Power Setting Parameter	11
2.4	The Worst Case Measurement Configuration.....	12
2.5	Test Setup Diagram	13
3	TRANSMITTER TEST RESULT	15
3.1	AC Power-line Conducted Emissions	15
3.2	Emission Bandwidth	18
3.3	RF Output Power.....	25
3.4	Peak Power Spectral Density.....	32
3.5	Peak Excursion	39
3.6	Transmitter Radiated Bandedge Emissions.....	41
3.7	Transmitter Radiated Unwanted Emissions	51
3.8	Frequency Stability.....	106
4	TEST EQUIPMENT AND CALIBRATION DATA	108
5	CERTIFICATION OF TAF ACCREDITATION.....	110
	APPENDIX A. TEST PHOTOS	A6
	APPENDIX B. PHOTOGRAPHS OF EUT	B11

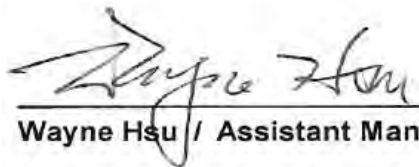

Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.179522MHz 40.21 (Margin 14.30dB) - AV 51.32 (Margin 13.19dB) - QP	FCC 15.207	Complied
3.2	15.407(a)	Emission Bandwidth	Bandwidth [MHz] 20MHz: 29.10 40MHz: 69.72	Information only	Complied
3.3	15.407(a)	RF Output Power (Maximum Conducted Output Power)	Power [dBm] 5150-5250MHz:13.34 5250-5350MHz:13.46 5470-5725MHz:13.50	Power [dBm] 5150-5250MHz:17 5250-5350MHz:24 5470-5725MHz:24	Complied
3.4	15.407(a)	Peak Power Spectral Density	PPSD [dBm/MHz] 5150-5250MHz:1.89 5250-5350MHz:1.81 5470-5725MHz:1.66	PPSD [dBm/MHz] 5150-5250MHz:4 5250-5350MHz:11 5470-5725MHz:11	Complied
3.5	15.407(a)	Peak Excursion	9.93 dB	13 dB	Complied
3.6	15.407(b)	Transmitter Radiated Bandedge Emissions	Non-Restricted Bands: 2470.00MHz: 70.44dBm Restricted Bands [dBuV/m at 1.5m]: 5151.00MHz 80.02 (Margin 3.52dB) - PK 59.86 (Margin 3.68dB) - AV	Non-Restricted Bands: ≤ -27dBm (68.3dBuV/m@3m) Restricted Bands: FCC 15.209	Complied
3.7	15.407(b)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 1m]: 15540MHz 60.10 (Margin 3.44dB) - PK	Non-Restricted Bands: ≤ -27dBm (68.3dBuV/m@3m) Restricted Bands: FCC 15.209	Complied
3.8	15.407(g)	Frequency Stability	6.09 ppm	Signal shall remain in-band	Complied



Revision History

Report No.	Version	Description	Issued Date
FR291203AN	Rev. 01	Initial issue of report	Oct. 15, 2012



1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information						
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	RF Output Power (dBm)	Co-location
5150-5250	a	5180-5240	36-48 [4]	1	13.34	Yes
5250-5350		5260-5320	52-64 [4]	1	13.46	
5470-5725		5500-5700	100-140 [8]	1	13.50	
5150-5250	n (HT20)	5180-5240	36-48 [4]	1	13.00	Yes
5250-5350		5260-5320	52-64 [4]	1	12.92	
5470-5725		5500-5700	100-140 [8]	1	13.00	
5150-5250	n (HT40)	5190-5230	38-46 [2]	1	12.41	Yes
5250-5350		5270-5310	54-62 [2]	1	12.37	
5470-5725		5510-5670	102-134 [3]	1	12.44	

Note 1: RF output power specifies that Maximum Conducted Output Power.
Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
Note 3: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)

1.1.2 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input checked="" type="checkbox"/>	Temporary RF connector provided
<input type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.

Antenna General Information			
No.	Ant. Cat.	Ant. Type	G _{ANT} (dBi)
1	Integral	PIFA	-1.28

1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input checked="" type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle		
<input type="checkbox"/>	Operated normally mode for worst duty cycle	
<input checked="" type="checkbox"/>	Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)	Voltage Duty Factor [dB] – (20 log 1/x)
<input checked="" type="checkbox"/> 88.88% - IEEE 802.11a	0.51	1.02
<input checked="" type="checkbox"/> 88.22% - IEEE 802.11n (HT20)	0.54	1.09
<input checked="" type="checkbox"/> 90.20% - IEEE 802.11n (HT40)	0.45	0.90

Note 1: Average Output Power Plots w/o Duty Factor



1.1.5 EUT Operational Condition

Supply Voltage	<input checked="" type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input checked="" type="checkbox"/> External DC adapter	<input checked="" type="checkbox"/> Battery
Operational Voltage	<input checked="" type="checkbox"/> Vnom (110 V)	<input checked="" type="checkbox"/> Vmax (126.5 V)	<input checked="" type="checkbox"/> Vmin (93.5 V)
Operational Climatic	<input checked="" type="checkbox"/> Tnom (20°C)	<input checked="" type="checkbox"/> Tmax (50°C)	<input checked="" type="checkbox"/> Tmin (-20°C)

1.1.6 DFS and TPC Information

The DFS Related Operating Mode(s) of the Equipment			
<input type="checkbox"/> Master			
<input type="checkbox"/> Slave with radar detection			
<input checked="" type="checkbox"/> Slave without radar detection			
Software / Firmware Version		1.0.1142.0	
Communication Mode		<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
IEEE Std. 802.11	Frequency Range (MHz)	TPC (Transmit Power Control)	Passive Scan
a	<input checked="" type="checkbox"/> 5150-5250	-	Yes
n (HT20)	<input checked="" type="checkbox"/> 5250-5350	Yes	Yes
n (HT40)	<input checked="" type="checkbox"/> 5470-5725	Yes	Yes
	<input type="checkbox"/> 5600-5650	-	-



1.2 Accessories

Accessories Information				
AC Adapter	Brand Name	LITEON	Model Name	PA-1300-04
	Power Rating	I/P: 100-240 V~1.0A (1,0A) 50-60 Hz ; O/P: 19V 1.58A (1,58A)		
Battery	Brand Name	DELL	Model Name	JD33K
	Power Rating	7.4Vdc, 27Wh	Type	Li-polymer

Note: Regarding to more detail and other information, please refer to user manual.

1.3 Support Equipment

The EUT was tested alone.

1.4 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2009
- ♦ FCC KDB 789033
- ♦ FCC KDB 662911
- ♦ FCC KDB 412172

1.5 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C		
		TEL : 886-3-327-3456 FAX : 886-3-327-0973		
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-HY	Ian	25.8°C / 55%	03-Oct-12 ~ 06-Oct-12
AC Conduction	CO04-HY	Bill	24.6°C / 51.5%	11-Oct-12
Radiated Emission	03CH02-HY	Streak	24.1°C / 57%	02-Oct-12 ~ 05-Oct-12



1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.26 dB	N/A
Emission bandwidth		±1.42 %	N/A
RF output power, conducted		±0.63 dB	N/A
Power density, conducted		±0.81 dB	N/A
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB	N/A
	1 – 18 GHz	±0.67 dB	N/A
	18 – 40 GHz	±0.83 dB	N/A
	40 – 200 GHz	N/A	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A
	1 – 18 GHz	±3.59 dB	N/A
	18 – 40 GHz	±3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Temperature		±0.8 °C	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing					
Frequency Band	Modulation Mode	Transmit Chains (N _{TX})	Data Rate / MCS	Worst Data Rate / MCS	RF Output Power (dBm)
5.2G	11a	1	6-54 Mbps	6 Mbps	13.34
5.3G	11a	1	6-54 Mbps	6 Mbps	13.46
5.6G	11a	1	6-54 Mbps	6 Mbps	13.50
5.2G	HT20	1	MCS 0-15	MCS 0	13.00
5.3G	HT20	1	MCS 0-15	MCS 0	12.92
5.6G	HT20	1	MCS 0-15	MCS 0	13.00
5.2G	HT40	1	MCS 0-15	MCS 0	12.41
5.3G	HT40	1	MCS 0-15	MCS 0	12.37
5.6G	HT40	1	MCS 0-15	MCS 0	12.44

Note 1: IEEE Std. 802.11n-2009 modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40. Worst modulation mode of Guard Interval (GI) is 800ns.

Note 2: Modulation modes consist of below configuration:
 11a: IEEE 802.11a, HT20/HT40: IEEE 802.11n.
 5.2G: 5.15-5.25GHz band, 5.3G: 5.25-5.35GHz band, 5.6G: 5.47-5.725GHz band

2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration		
Frequency Range (MHz)	IEEE Std. 802.11	Test Channel Freq. (MHz) – FX (Frequencies Abbreviations)
5150-5250	a, n (HT20)	5180-(F1), 5200-(F2), 5240-(F3)
5250-5350	a, n (HT20)	5260-(F4), 5300-(F5), 5320-(F6)
5470-5725	a, n (HT20)	5500-(F7), 5580-(F8), 5700-(F9)
5150-5250	n (HT40)	5190-(F1'), 5230-(F2')
5250-5350	n (HT40)	5270-(F4'), 5310-(F5')
5470-5725	n (HT40)	5510-(F7'), 5550-(F8'), 5670-(F9')






2.3 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter		
Test Software Version	QRCT_2.4.83.0	
Modulation Mode of Power Setting for 20MHz Channel Bandwidth		
Frequency (MHz)	11a	HT20
5180	6.60	6.40
5200	6.60	6.40
5240	6.90	6.30
5260	6.60	6.30
5300	6.12	6.40
5320	6.12	6.50
5500	6.18	6.11
5580	6.18	6.13
5700	6.17	6.14
Modulation Mode of Power Setting for 40MHz Channel Bandwidth		
Frequency (MHz)	HT40	
5190	6.20	
5230	6.20	
5270	6.20	
5310	6.30	
5510	6.90	
5550	6.90	
5670	6.12	


2.4 The Worst Case Measurement Configuration


The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	Normal Link

The Worst Case Mode for Following Conformance Tests	
Tests Item	RF Output Power, Peak Power Spectral Density, Emission Bandwidth, Peak Excursion
Test Condition	Conducted measurement at transmit chains
Modulation Mode	11a, HT20, HT40

The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
User Position	<input type="checkbox"/> EUT will be placed in fixed position.		
	<input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes. The worst planes is X.		
	<input checked="" type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes. Worst orthogonal planes of EUT is X plane.		
Operating Mode < 1GHz	<input checked="" type="checkbox"/> 1. Radio link (5G-WLAN)		
Modulation Mode	11a, HT20, HT40		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

2.5 Test Setup Diagram

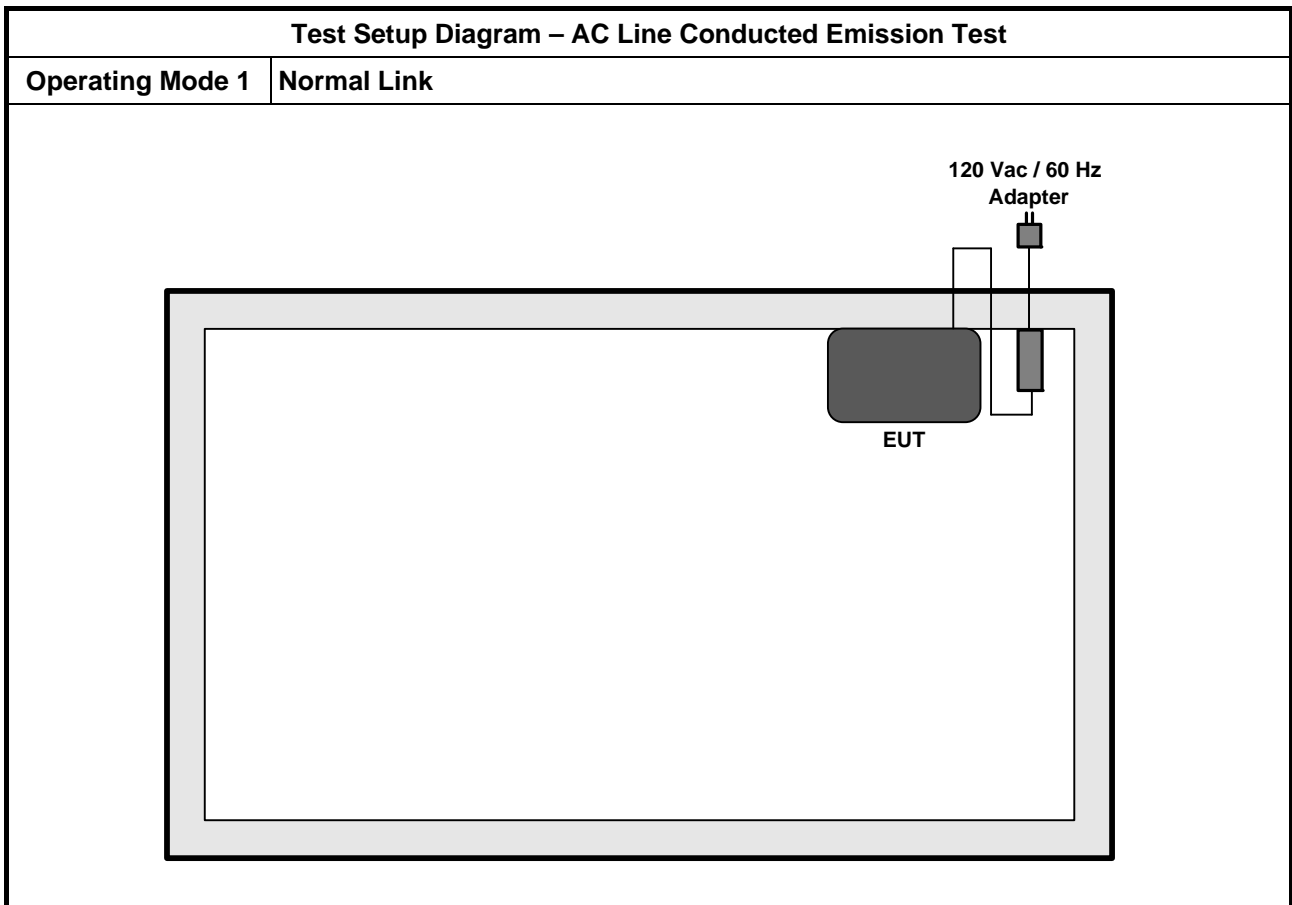

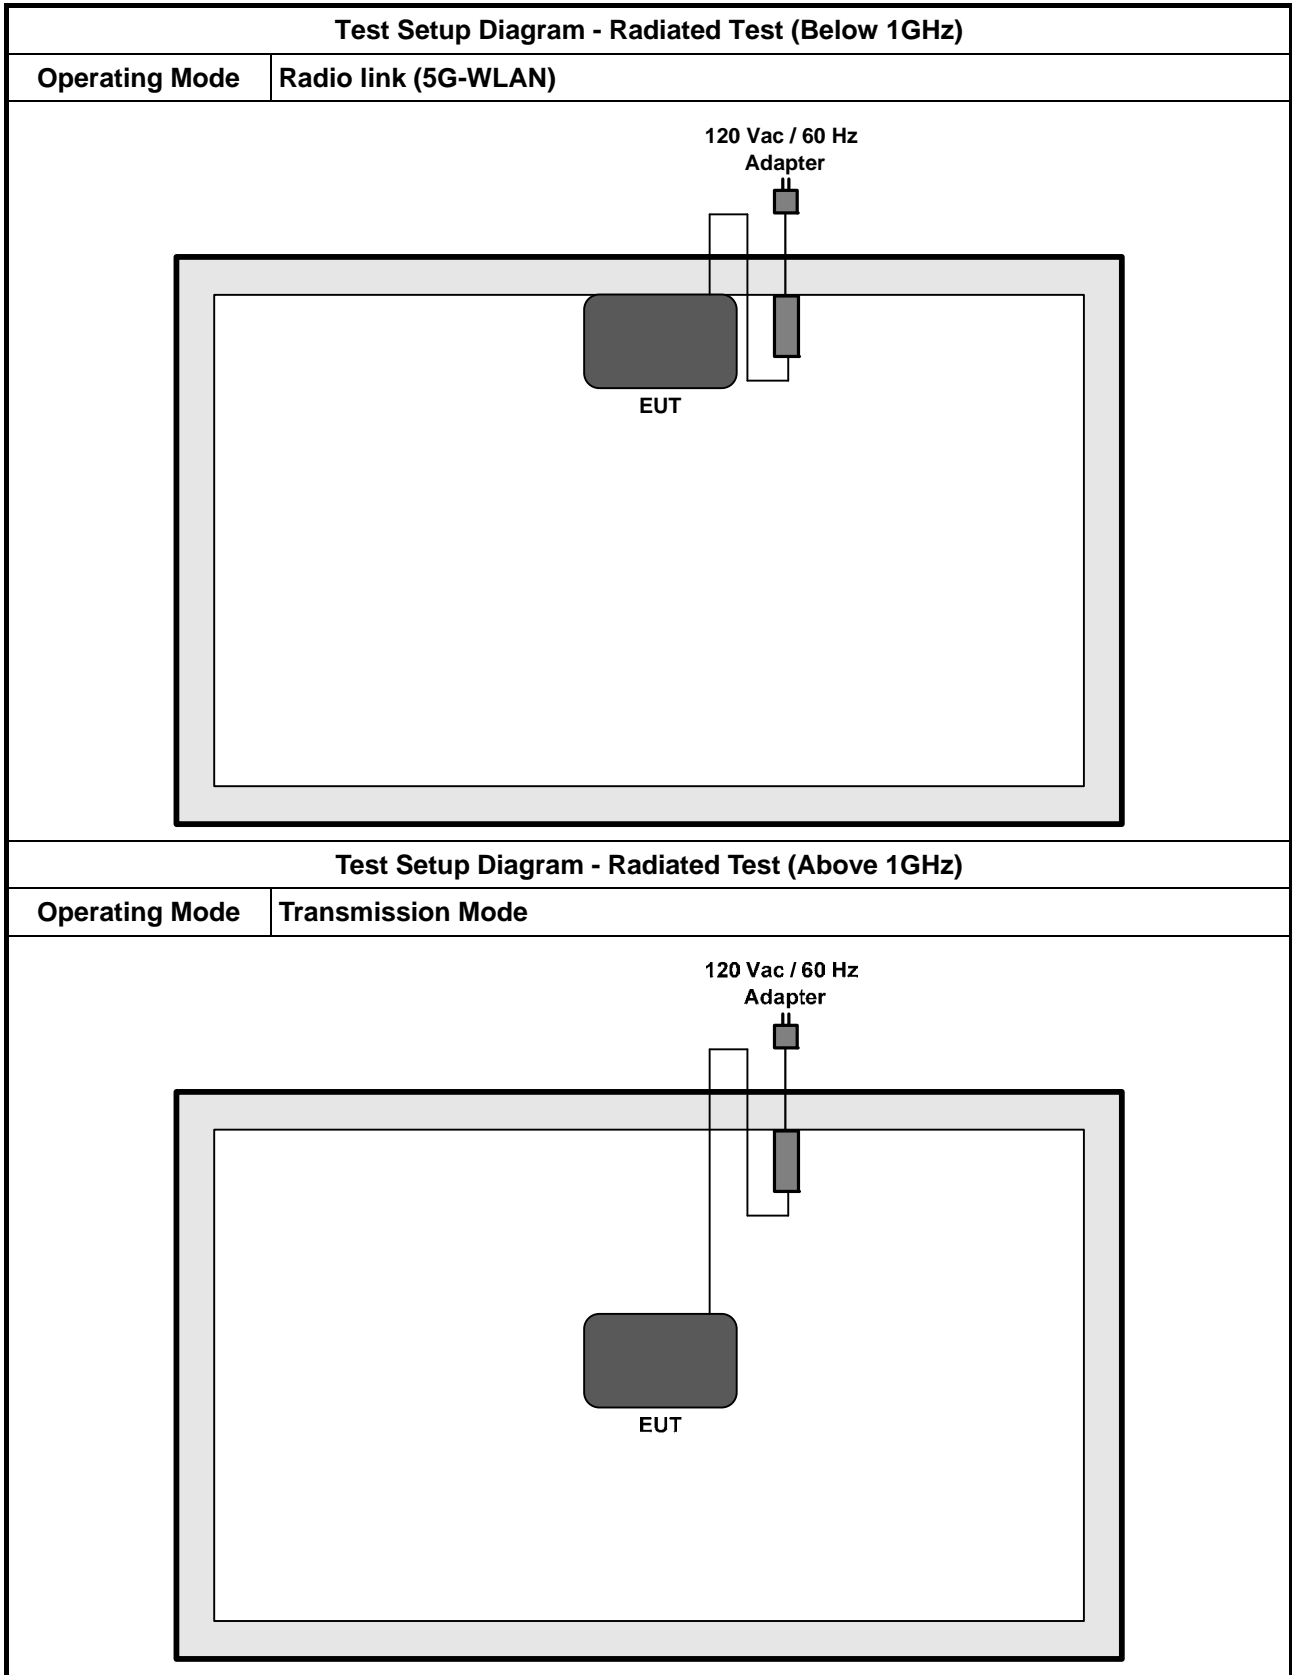

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures


Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

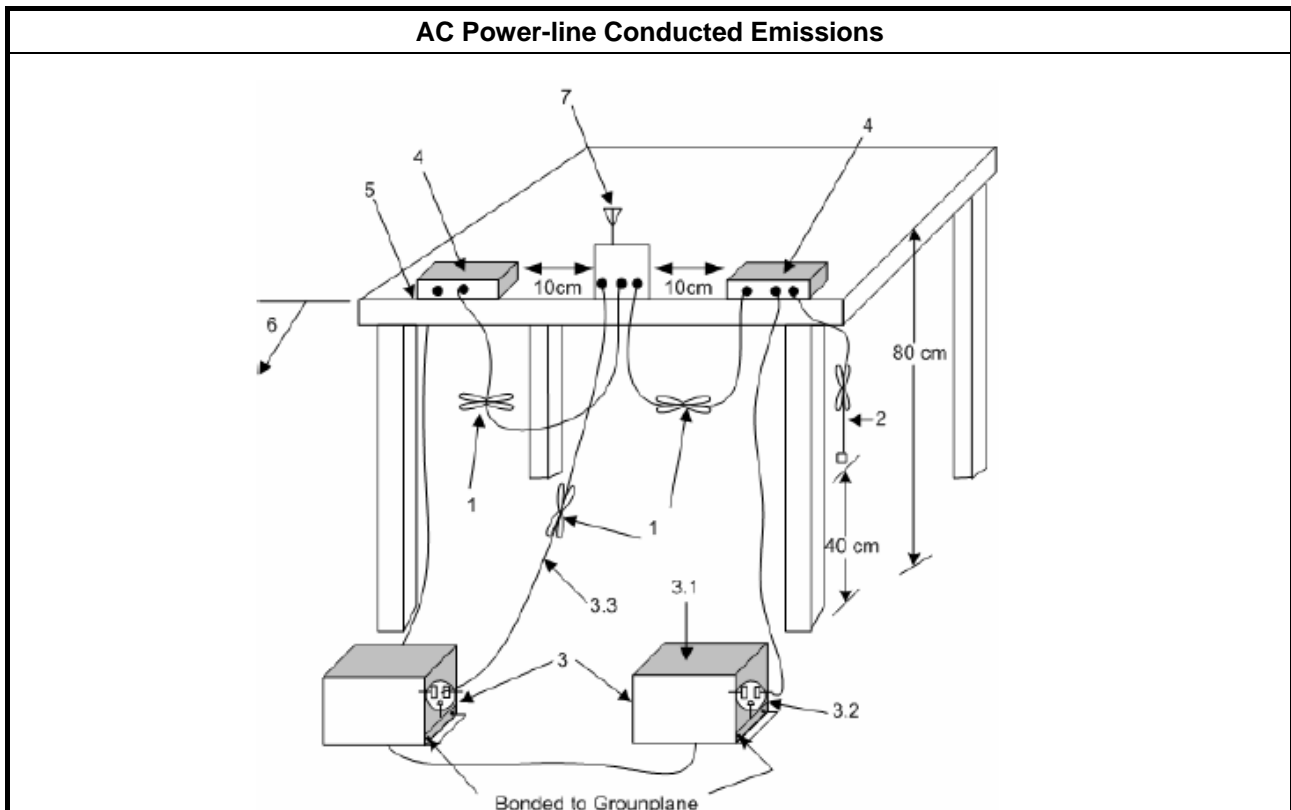


3.1.5 Test Result of AC Power-line Conducted Emissions

AC Power-line Conducted Emissions Result			
Operating Mode	1	Power Phase	Neutral
Operating Function	Normal Link		

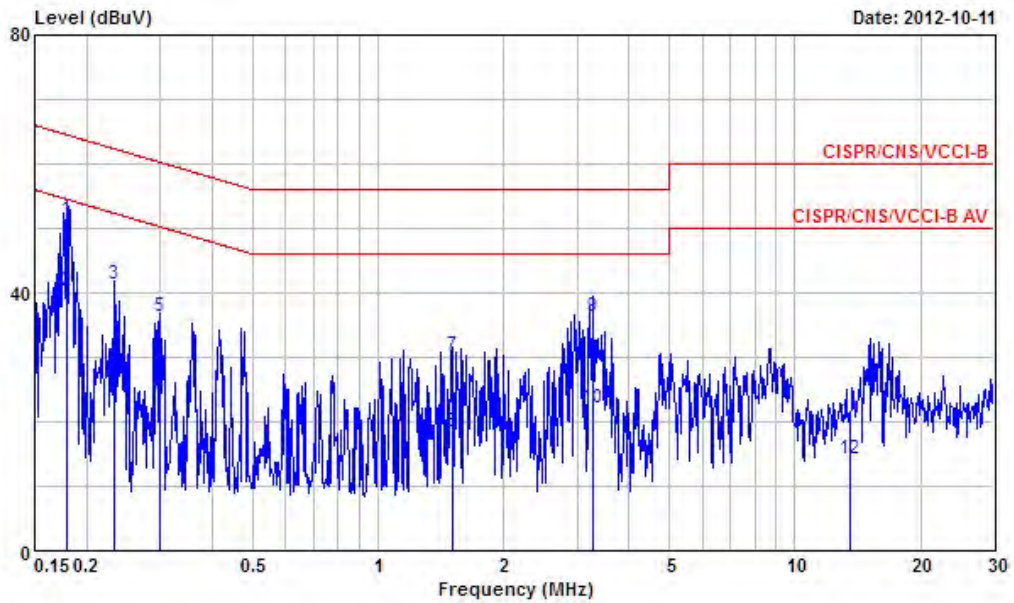

Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1795220	51.32	-13.19	64.51	50.91	0.11	0.30 QP
2	0.1795220	40.21	-14.30	54.51	39.80	0.11	0.30 Average
3	0.2328500	41.21	-21.14	62.35	40.80	0.11	0.30 QP
4	0.2328500	27.22	-25.13	52.35	26.81	0.11	0.30 Average
5	0.2986930	36.29	-23.99	60.28	35.89	0.10	0.30 QP
6	0.2986930	24.09	-26.19	50.28	23.69	0.10	0.30 Average
7	1.510	30.30	-25.70	56.00	29.82	0.12	0.36 QP
8	1.510	18.42	-27.58	46.00	17.94	0.12	0.36 Average
9	3.280	36.35	-19.65	56.00	35.88	0.14	0.33 QP
10	3.280	22.02	-23.98	46.00	21.55	0.14	0.33 Average
11	13.560	20.21	-39.79	60.00	19.54	0.27	0.40 QP
12	13.560	14.27	-35.73	50.00	13.60	0.27	0.40 Average

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

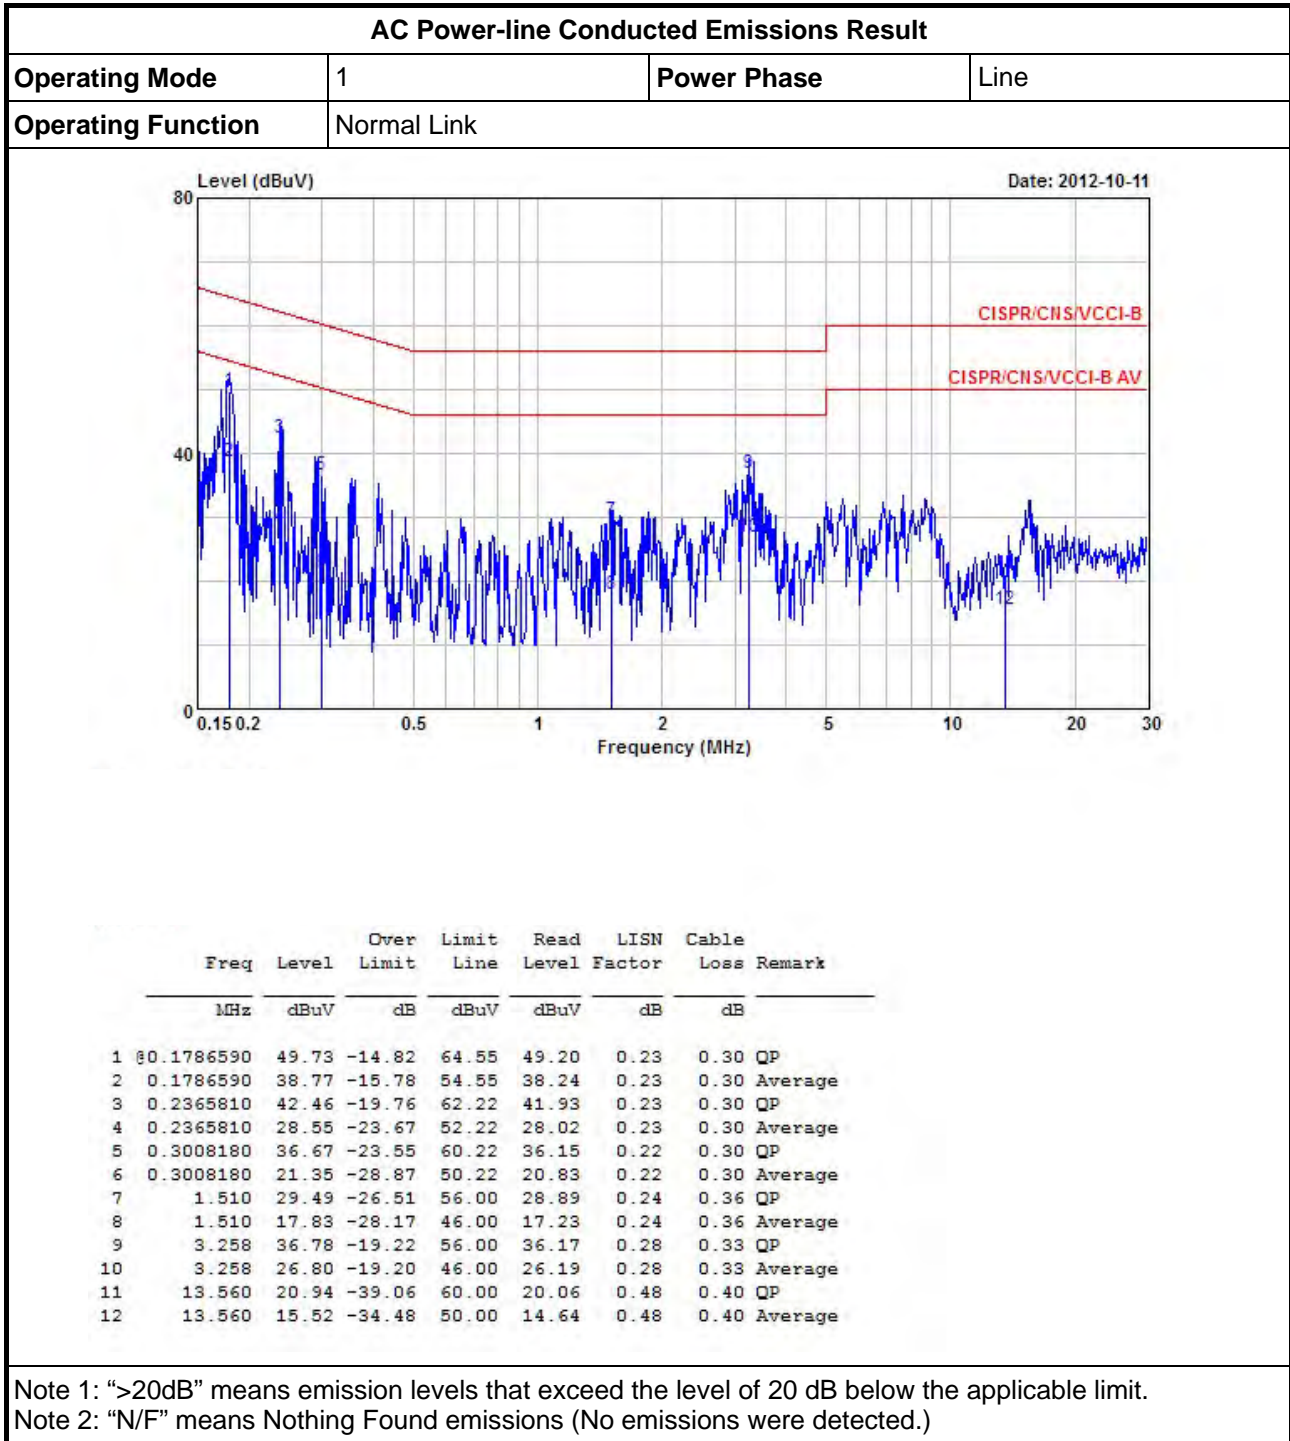

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth (EBW) Limit

Emission Bandwidth (EBW) Limit	
UNII Devices	
<input checked="" type="checkbox"/>	For the 5.15-5.25 GHz band, the maximum conducted output power shall not exceed the lesser of 50 mW or 4 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
<input checked="" type="checkbox"/>	For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
<input checked="" type="checkbox"/>	For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
<input checked="" type="checkbox"/>	For the 5.725-5.825 GHz band, the maximum conducted output power shall not exceed the lesser of 1 W or 17 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
LE-LAN Devices	
<input checked="" type="checkbox"/>	For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
<input checked="" type="checkbox"/>	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
<input checked="" type="checkbox"/>	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
<input checked="" type="checkbox"/>	For the 5.725-5.825 GHz band, the maximum e.i.r.p. shall not exceed 4.0 W or 23 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause D for EBW measurement.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input checked="" type="checkbox"/>	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input checked="" type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/>	The EUT supports multiple transmit chains using options given below:
<input type="checkbox"/>	Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.
<input checked="" type="checkbox"/>	Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.

3.2.4 Test Setup

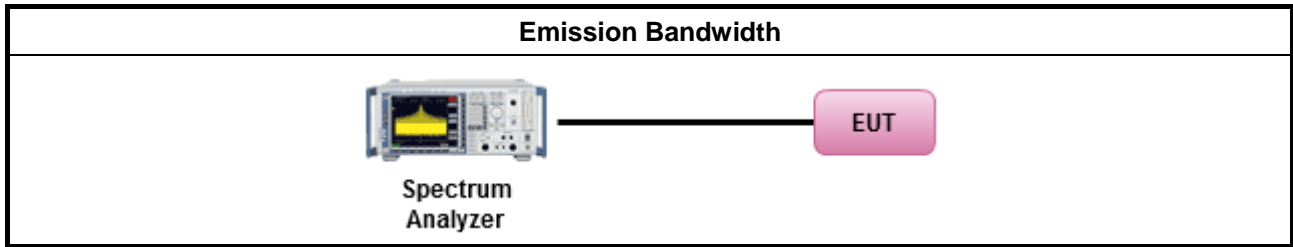



3.2.5 Test Result of Emission Bandwidth

UNII Emission Bandwidth Result								
Condition			Emission Bandwidth (MHz)					
Modulation Mode	N _{TX}	Freq. (MHz)	26dB Bandwidth			Conducted Power Limit (dBm)		
			Chain-Port 1	-	-	-	Calculation Power Limit	Final Power Limit
11a	1	5180	21.88	-	-	-	17.4	17.0
11a	1	5200	22.62	-	-	-	17.5	17.0
11a	1	5240	20.67	-	-	-	17.2	17.0
11a	1	5260	24.72	-	-	-	24.9	24.0
11a	1	5300	23.53	-	-	-	24.7	24.0
11a	1	5320	23.71	-	-	-	24.7	24.0
11a	1	5500	24.64	-	-	-	24.9	24.0
11a	1	5580	26.71	-	-	-	25.3	24.0
11a	1	5700	26.59	-	-	-	25.2	24.0
HT20	1	5180	25.59	-	-	-	18.1	17.0
HT20	1	5200	24.00	-	-	-	17.8	17.0
HT20	1	5240	27.31	-	-	-	18.4	17.0
HT20	1	5260	29.10	-	-	-	25.6	24.0
HT20	1	5300	27.76	-	-	-	25.4	24.0
HT20	1	5320	28.45	-	-	-	25.5	24.0
HT20	1	5500	28.38	-	-	-	25.5	24.0
HT20	1	5580	25.54	-	-	-	25.1	24.0
HT20	1	5700	28.84	-	-	-	25.6	24.0
HT40	1	5190	41.88	-	-	-	20.2	17.0
HT40	1	5230	54.24	-	-	-	21.3	17.0
HT40	1	5270	54.52	-	-	-	28.4	24.0
HT40	1	5310	46.16	-	-	-	27.6	24.0
HT40	1	5510	69.72	-	-	-	29.4	24.0
HT40	1	5550	52.44	-	-	-	28.2	24.0
HT40	1	5670	59.56	-	-	-	28.7	24.0
Result			Complied					
Note 1: N _{TX} = Number of Transmit Chains								




LE-LAN Emission Bandwidth Result								
Condition			Emission Bandwidth (MHz)					
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth			e.i.r.p. Power Limit (dBm)		
			Chain-Port 1	-	-	-	Calculation Power Limit	Final Power Limit
11a	1	5180	17.01	-	-	-	16.3	16.3
11a	1	5200	16.74	-	-	-	16.2	16.2
11a	1	5240	16.68	-	-	-	16.2	16.2
11a	1	5260	16.67	-	-	-	23.2	23.2
11a	1	5300	16.86	-	-	-	23.3	23.3
11a	1	5320	17.10	-	-	-	23.3	23.3
11a	1	5500	17.25	-	-	-	23.4	23.4
11a	1	5580	17.37	-	-	-	23.4	23.4
11a	1	5700	16.89	-	-	-	23.3	23.3
HT20	1	5180	17.70	-	-	-	16.5	16.5
HT20	1	5200	18.12	-	-	-	16.6	16.6
HT20	1	5240	18.24	-	-	-	16.6	16.6
HT20	1	5260	18.45	-	-	-	23.7	23.7
HT20	1	5300	17.88	-	-	-	23.5	23.5
HT20	1	5320	17.94	-	-	-	23.5	23.5
HT20	1	5500	18.26	-	-	-	23.6	23.6
HT20	1	5580	18.02	-	-	-	23.6	23.6
HT20	1	5700	18.42	-	-	-	23.7	23.7
HT40	1	5190	36.30	-	-	-	19.6	17.0
HT40	1	5230	36.58	-	-	-	19.6	17.0
HT40	1	5270	36.58	-	-	-	26.6	24.0
HT40	1	5310	36.58	-	-	-	26.6	24.0
HT40	1	5510	36.82	-	-	-	26.7	24.0
HT40	1	5550	36.74	-	-	-	26.7	24.0
HT40	1	5670	36.46	-	-	-	26.6	24.0
Result			Complied					
Note 1: N _{TX} = Number of Transmit Chains								



(F1~F3: 5150-5250 MHz) / (F4~F6: 5250-5350 MHz) / (F7~F9: 5470-5725 MHz)
11A-20M


Worst Emission Bandwidth Plots

11a – F2 [Port 1]

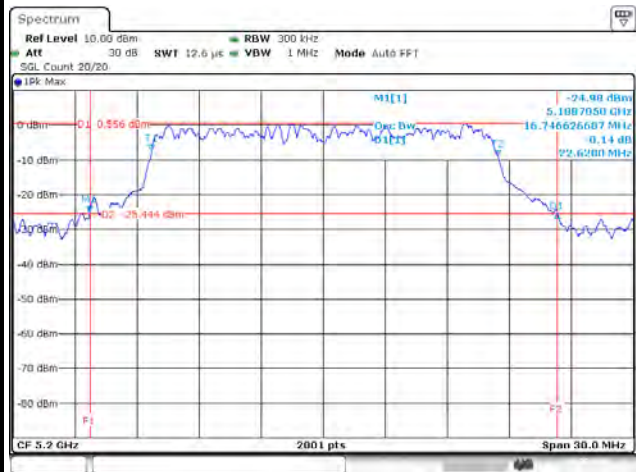


Date: 3.OCT.2012 11:07:48

11a – F4 [Port 1]

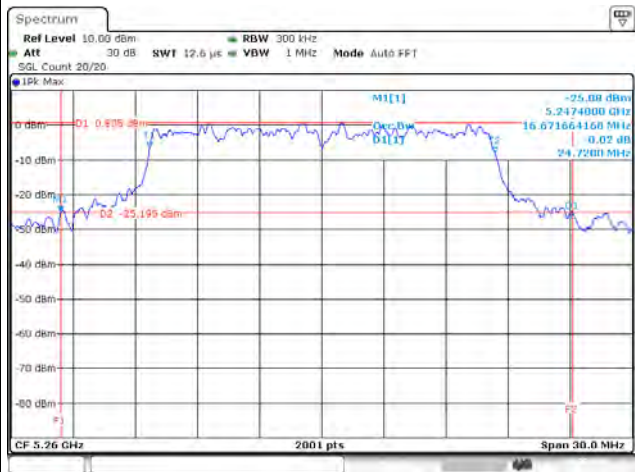

Date: 3.OCT.2012 11:20:15


11a – F8 [Port 1]

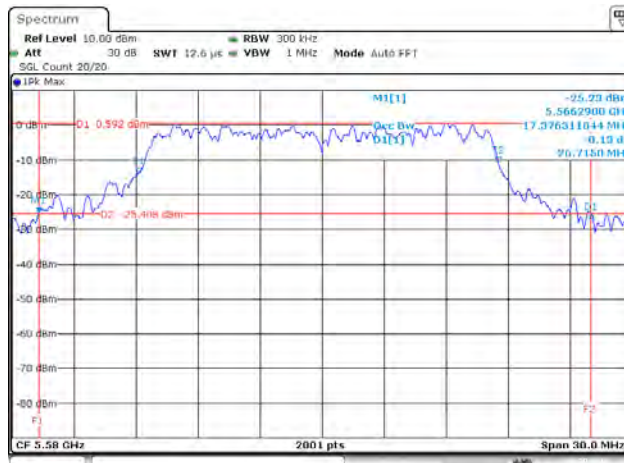

Date: 3.OCT.2012 11:47:21



(F1~F3: 5150-5250 MHz) / (F4~F6: 5250-5350 MHz) / (F7~F9: 5470-5725 MHz)
11N-20M

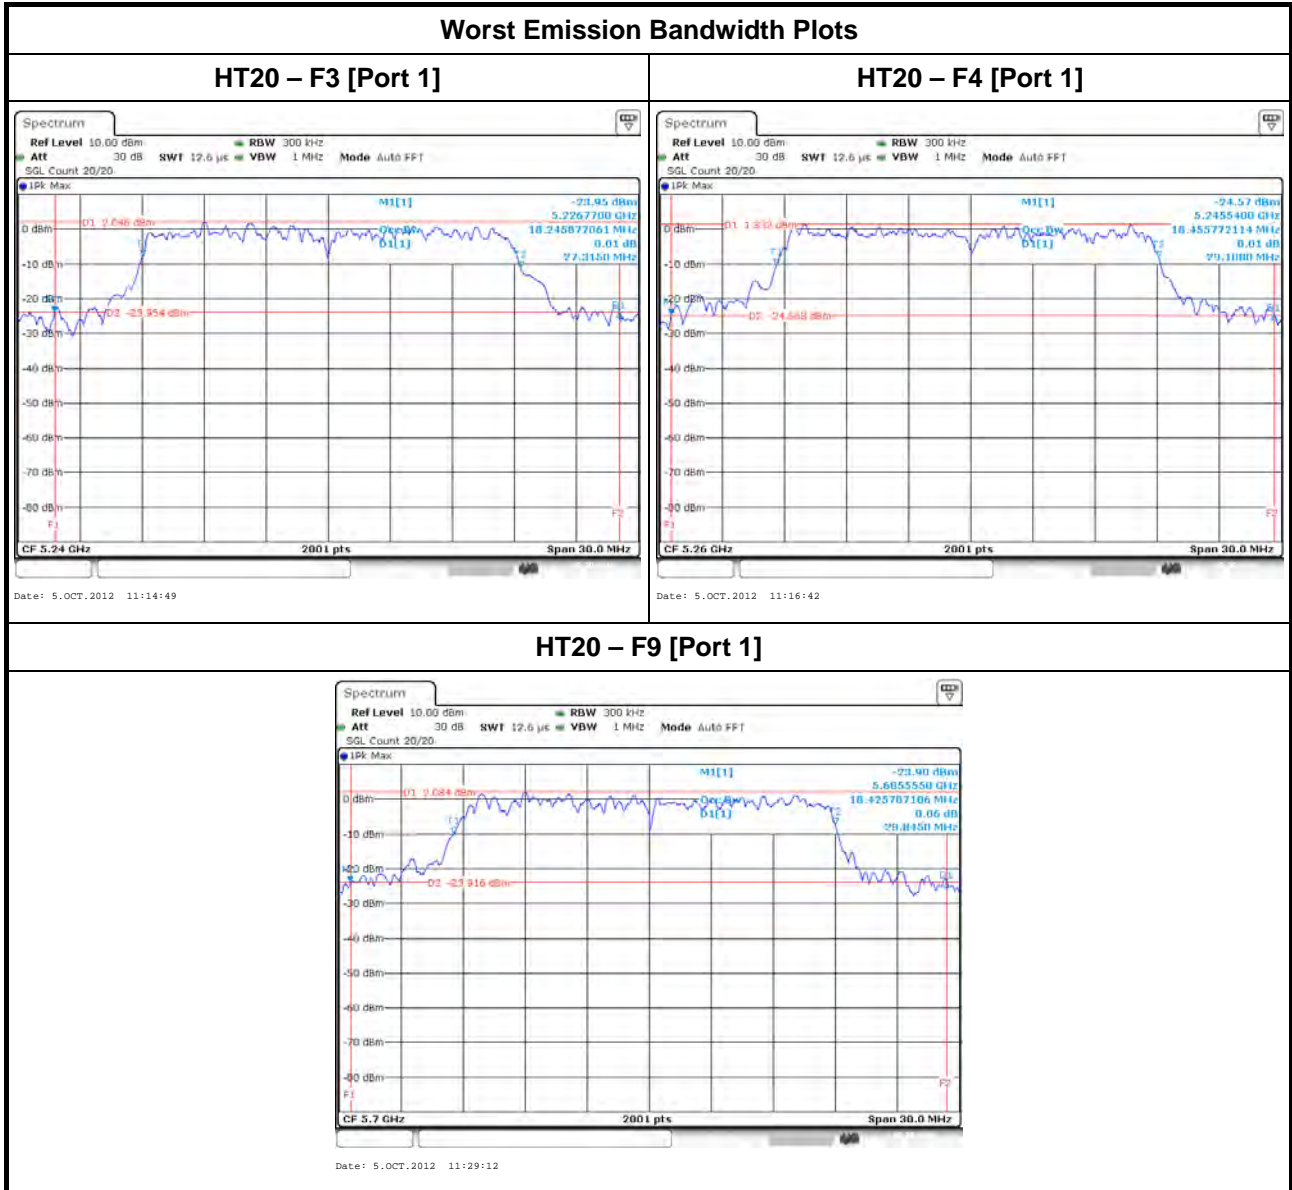





(F1'~F2': 5150-5250 MHz) / (F4'~F5': 5250-5350 MHz) / (F7'~F9': 5470-5725 MHz)
11N-40M

Worst Emission Bandwidth Plots


HT40 – F2' [Port 1]

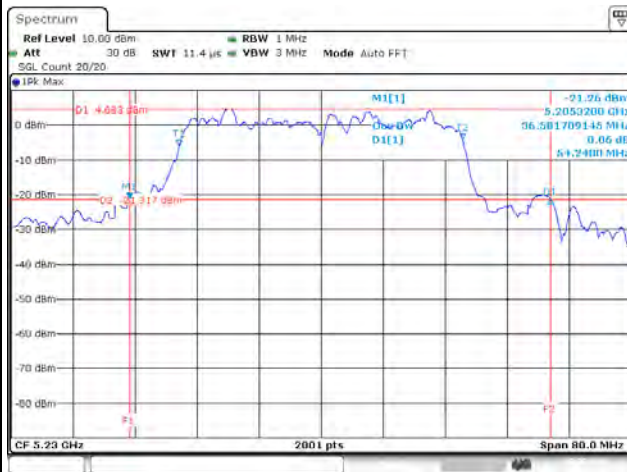

HT40 – F4' [Port 1]

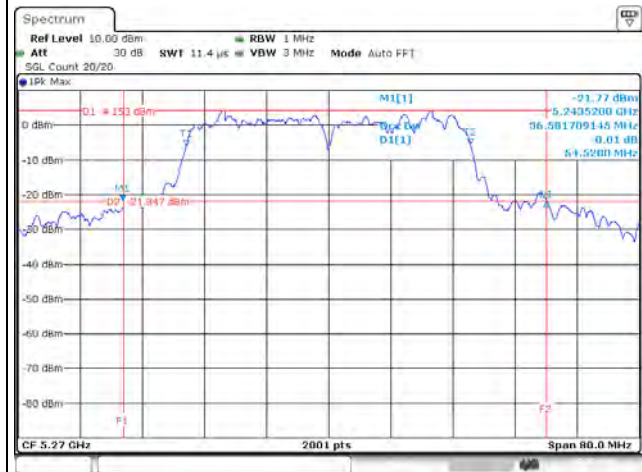

HT40 – F7' [Port 1]

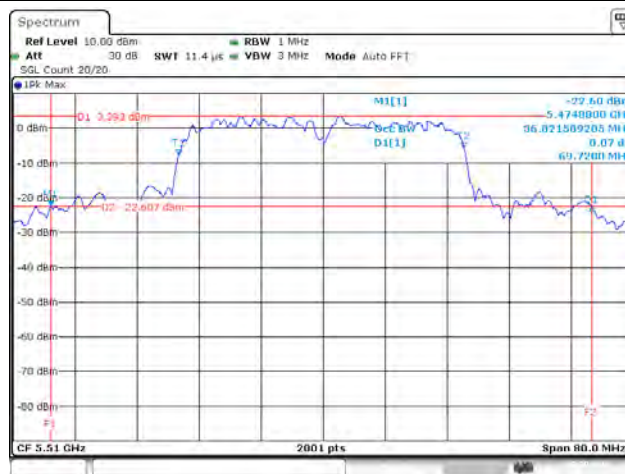

3.3 RF Output Power

3.3.1 RF Output Power Limit

Maximum Conducted Output Power Limit	
UNII Devices	
<input checked="" type="checkbox"/>	For the 5.15-5.25 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6 \text{ dBi}$, then $P_{Out} = 17 - (G_{TX} - 6)$.
<input checked="" type="checkbox"/>	For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6 \text{ dBi}$, then $P_{Out} = 24 - (G_{TX} - 6)$.
<input checked="" type="checkbox"/>	For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6 \text{ dBi}$, then $P_{Out} = 24 - (G_{TX} - 6)$.
<input type="checkbox"/>	For the 5.725-5.825 GHz band:
<input type="checkbox"/>	Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W or $17 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6 \text{ dBi}$, then $P_{Out} = 30 - (G_{TX} - 6)$.
<input type="checkbox"/>	Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W or $17 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 23 \text{ dBi}$, then $P_{Out} = 30 - (G_{TX} - 23)$.
LE-LAN Devices	
<input checked="" type="checkbox"/>	For the 5.15-5.25 GHz band, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
<input checked="" type="checkbox"/>	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
<input checked="" type="checkbox"/>	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
<input type="checkbox"/>	For the 5.725-5.825 GHz band, the maximum e.i.r.p. shall not exceed 4.0 W or $23 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
<input type="checkbox"/>	Point-to-multipoint systems (P2M): the maximum e.i.r.p. shall not exceed 4.0 W or $23 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
<input type="checkbox"/>	Point-to-point systems (P2P): the maximum e.i.r.p. shall not exceed 4.0 W or $23 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. If e.i.r.p. > 36 dBm, $G_{TX} \leq P_{Out}$
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Maximum Conducted Output Power
	[duty cycle ≥ 98% or external video / power trigger]
<input type="checkbox"/>	Refer as FCC KDB 789033, clause C Method SA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, clause C Method SA-1 Alt. (RMS detection with slow sweep speed)
	duty cycle < 98% and average over on/off periods with duty factor
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause C Method SA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, clause C Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
<input type="checkbox"/>	Refer as FCC KDB 789033, clause C Method PM (using an RF average power meter).
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input checked="" type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/>	The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
<input checked="" type="checkbox"/>	If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

3.3.4 Test Setup

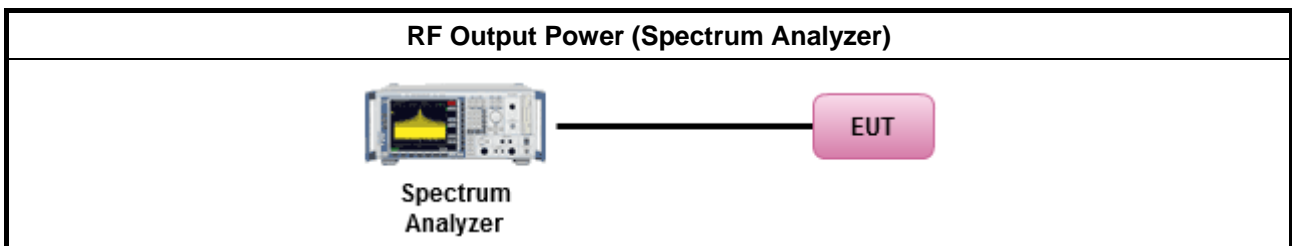

3.3.5 Directional Gain for Power Measurement

Directional Gain (DG) Result					
Transmit Chains No.		1	-	-	-
Maximum G _{ANT} (dBi)		-1.28	-	-	-
Modulation Mode	DG (dBi)	N _{TX}	N _{SS}	STBC	Array Gain (dB)
11a,6-54Mbps	-1.28	1	1	-	-
HT20,M0-M7	-1.28	1	1	-	-
HT40,M0-M7	-1.28	1	1	-	-

Note 1: For all transmitter outputs with equal antenna gains, directional gain is to be computed as follows:
Any transmit signals are correlated, Directional Gain = G_{ANT} + 10 log(N_{TX})
All transmit signals are completely uncorrelated, Directional Gain = G_{ANT}

Note 2: For all transmitter outputs with unequal antenna gains, directional gain is to be computed as follows:
Any transmit signals are correlated, Directional Gain = 10 log[(10^{G₁/20} + ... + 10^{G_N/20})² / N_{TX}]
All transmit signals are completely uncorrelated, Directional Gain = 10 log[(10^{G₁/10} + ... + 10^{G_N/10}) / N_{TX}]

Note 3: For Spatial Multiplexing, Directional Gain (DG) = G_{ANT} + 10 log(N_{TX}/N_{SS}),
where N_{SS} = the number of independent spatial streams data.

Note 4: For CDD transmissions, directional gain is calculated as power measurements:
Directional Gain (DG) = G_{ANT} + Array Gain, where Array Gain is as follows:
Array Gain = 0 dB (i.e., no array gain) for N_{TX} ≤ 4;
Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{TX};



3.3.6 Test Result of Maximum Conducted Output Power


Maximum Conducted (Average) Output Power											
Condition			RF Output Power (dBm)								
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	-	-	-	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit
11a	1	5180	13.32	-	-	-	13.32	17.0	-1.28	12.04	23.0
11a	1	5200	13.32	-	-	-	13.32	17.0	-1.28	12.04	23.0
11a	1	5240	13.34	-	-	-	13.34	17.0	-1.28	12.06	23.0
11a	1	5260	13.33	-	-	-	13.33	24.0	-1.28	12.05	30.0
11a	1	5300	13.45	-	-	-	13.45	24.0	-1.28	12.17	30.0
11a	1	5320	13.46	-	-	-	13.46	24.0	-1.28	12.18	30.0
11a	1	5500	13.50	-	-	-	13.50	24.0	-1.28	12.22	30.0
11a	1	5580	13.42	-	-	-	13.42	24.0	-1.28	12.14	30.0
11a	1	5700	13.32	-	-	-	13.32	24.0	-1.28	12.04	30.0
HT20	1	5180	13.00	-	-	-	13.00	17.0	-1.28	11.72	23.0
HT20	1	5200	12.97	-	-	-	12.97	17.0	-1.28	11.69	23.0
HT20	1	5240	12.82	-	-	-	12.82	17.0	-1.28	11.54	23.0
HT20	1	5260	12.89	-	-	-	12.89	24.0	-1.28	11.61	30.0
HT20	1	5300	12.88	-	-	-	12.88	24.0	-1.28	11.60	30.0
HT20	1	5320	12.92	-	-	-	12.92	24.0	-1.28	11.64	30.0
HT20	1	5500	12.92	-	-	-	12.92	24.0	-1.28	11.64	30.0
HT20	1	5580	13.00	-	-	-	13.00	24.0	-1.28	11.72	30.0
HT20	1	5700	12.78	-	-	-	12.78	24.0	-1.28	11.50	30.0
HT40	1	5190	12.39	-	-	-	12.39	17.0	-1.28	11.11	23.0
HT40	1	5230	12.41	-	-	-	12.41	17.0	-1.28	11.13	23.0
HT40	1	5270	12.36	-	-	-	12.36	24.0	-1.28	11.08	30.0
HT40	1	5310	12.37	-	-	-	12.37	24.0	-1.28	11.09	30.0
HT40	1	5510	12.44	-	-	-	12.44	24.0	-1.28	11.16	30.0
HT40	1	5550	12.42	-	-	-	12.42	24.0	-1.28	11.14	30.0
HT40	1	5670	12.41	-	-	-	12.41	24.0	-1.28	11.13	30.0
Result			Complied								



(F1~F3: 5150-5250 MHz) / (F4~F6: 5250-5350 MHz) / (F7~F9: 5470-5725 MHz)
11A-20M


Worst Maximum Conducted Output Power and Peak Excursion Plots

11a – F3 [Port 1]

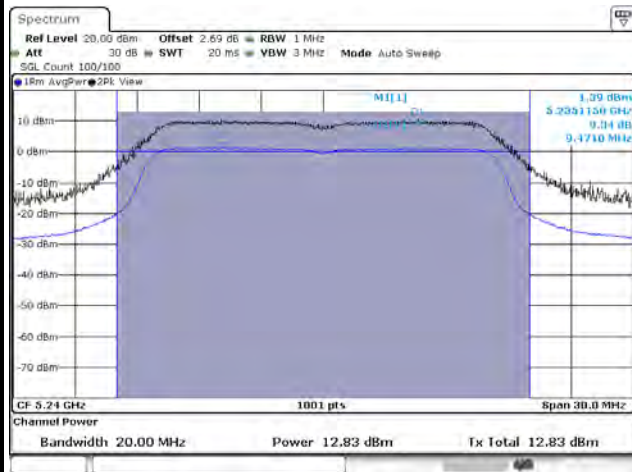


Date: 3.OCT.2012 11:27:26

11a – F6 [Port 1]

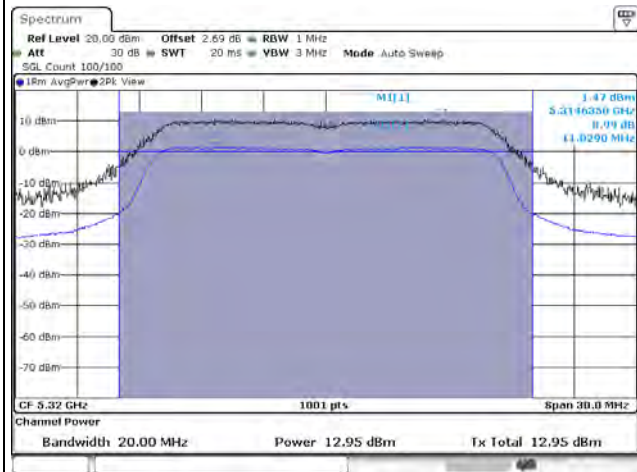

Date: 3.OCT.2012 11:37:21

11a – F7 [Port 1]

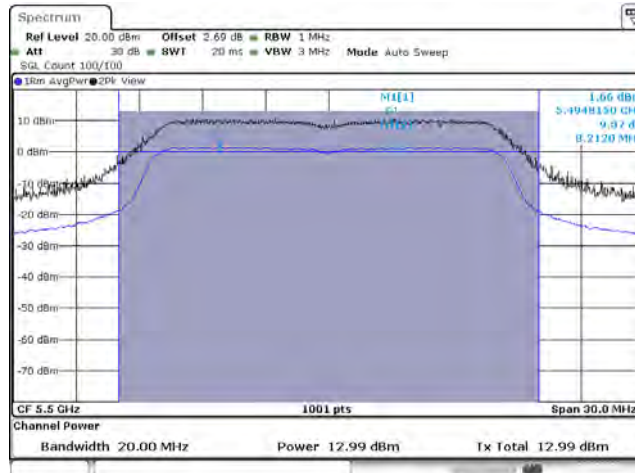

Date: 3.OCT.2012 11:41:49


Note 1: Average Output Power Plots w/o Duty Factor




(F1~F3: 5150-5250 MHz) / (F4~F6: 5250-5350 MHz) / (F7~F9: 5470-5725 MHz)
11N-20M

Worst Maximum Conducted Output Power and Peak Excursion Plots


HT20 – F1 [Port 1]

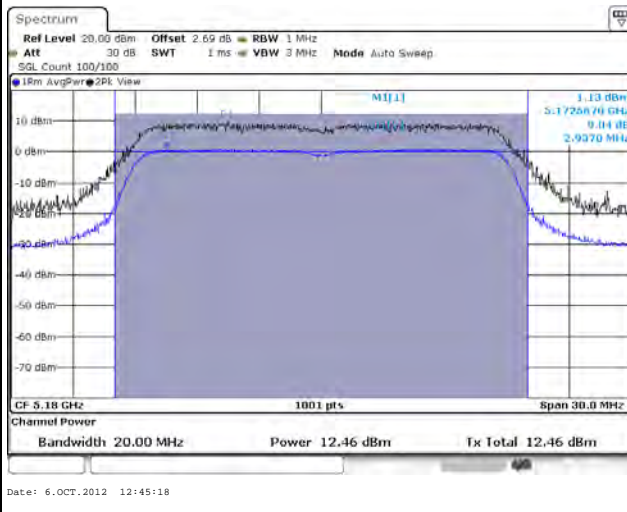

HT20 – F6 [Port 1]

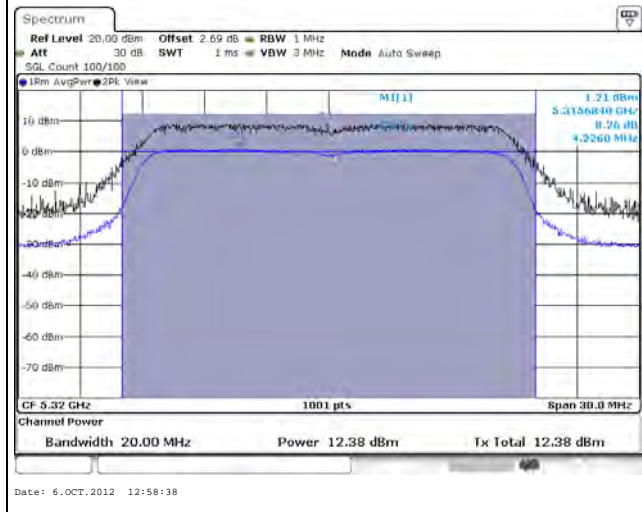

HT20 – F8 [Port 1]

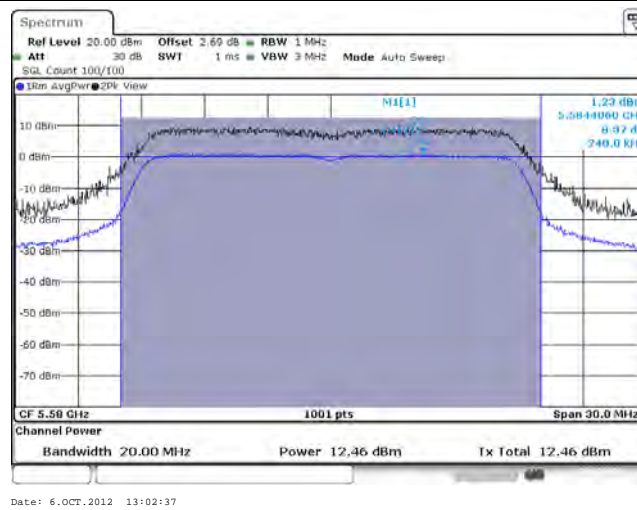


Note 1: Average Output Power Plots w/o Duty Factor




(F1'~F2': 5150-5250 MHz) / (F4'~F5': 5250-5350 MHz) / (F7'~F9': 5470-5725 MHz)
11N-40M

Worst Maximum Conducted Output Power and Peak Excursion Plots


HT40 – F2' [Port 1]

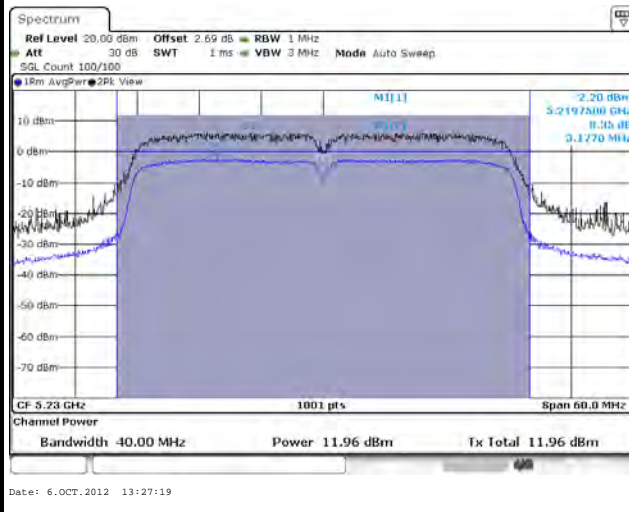

HT40 – F5' [Port 1]

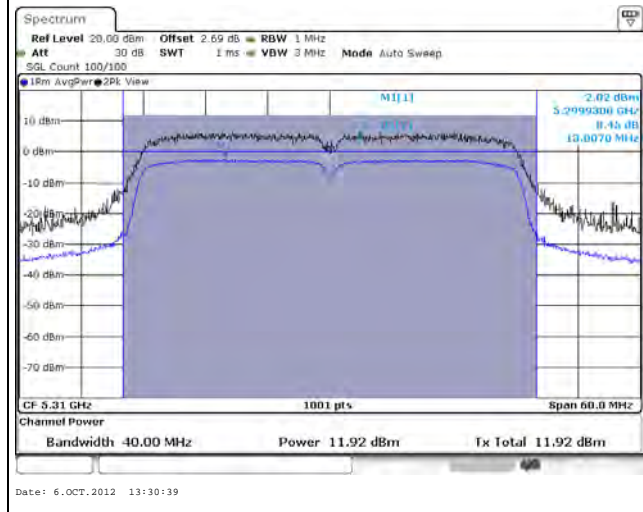

HT40 – F7' [Port 1]

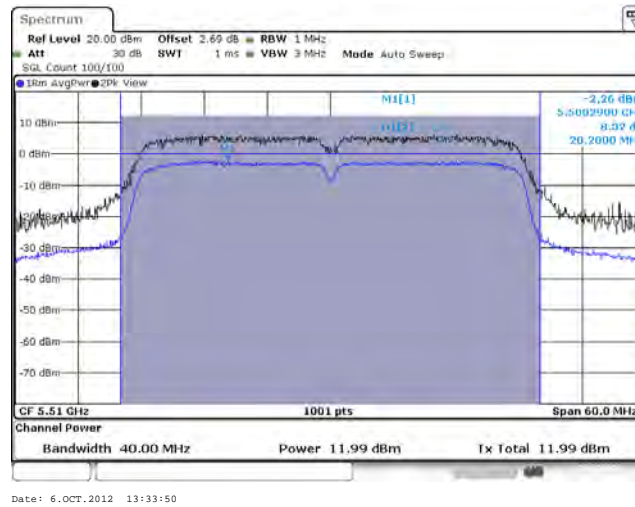

Note 1: Average Output Power Plots w/o Duty Factor

3.4 Peak Power Spectral Density

3.4.1 Peak Power Spectral Density Limit

Peak Power Spectral Density Limit	
UNII Devices	
<input checked="" type="checkbox"/>	For the 5.15-5.25 GHz band, the peak power spectral density (PPSD) ≤ 4 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 4 - (G_{TX} - 6)$.
<input checked="" type="checkbox"/>	For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
<input checked="" type="checkbox"/>	For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
<input type="checkbox"/>	For the 5.725-5.825 GHz band:
<input type="checkbox"/>	Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 17 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 17 - (G_{TX} - 6)$.
<input type="checkbox"/>	Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 17 dBm/MHz. If $G_{TX} > 23$ dBi, then $PPSD = 17 - (G_{TX} - 23)$.
LE-LAN Devices	
<input checked="" type="checkbox"/>	For the 5.15-5.25 GHz band, the peak power spectral density (PPSD) ≤ 4 dBm/MHz and the e.i.r.p. peak power spectral density (PPSD) ≤ 10 dBm/MHz.
<input checked="" type="checkbox"/>	For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz and the e.i.r.p. peak power spectral density (PPSD) ≤ 17 dBm/MHz.
<input checked="" type="checkbox"/>	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz and the e.i.r.p. peak power spectral density (PPSD) ≤ 17 dBm/MHz.
<input type="checkbox"/>	For the 5.725-5.825 GHz band, the peak power spectral density (PPSD) ≤ 17 dBm/MHz and the e.i.r.p. peak power spectral density (PPSD) ≤ 23 dBm/MHz.
<p>PPSD = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz</p> <p>G_{TX} = the maximum transmitting antenna directional gain in dBi.</p>	


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:
	[duty cycle ≥ 98% or external video / power trigger]
<input type="checkbox"/>	Refer as FCC KDB 789033, clause C Method SA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, clause C Method SA-1 Alt. (RMS detection with slow sweep speed)
	duty cycle < 98% and average over on/off periods with duty factor
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause C Method SA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, clause C Method SA-2 Alt. (RMS detection with slow sweep speed)
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input checked="" type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/>	The EUT supports multiple transmit chains using options given below:
<input checked="" type="checkbox"/>	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
<input type="checkbox"/>	Option 2: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
<input checked="" type="checkbox"/>	If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$
<input checked="" type="checkbox"/>	Each individually PPSD plots refer as test report clause 3.3.5 with each individually PPSD plots.

3.4.4 Test Setup

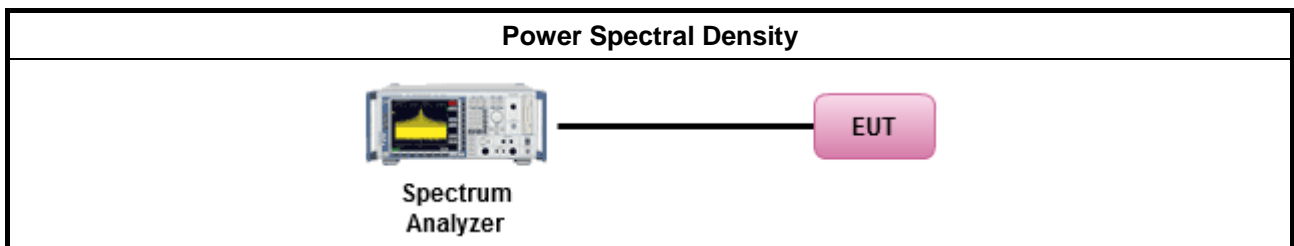

3.4.5 Directional Gain for Power Spectral Density Measurement

Directional Gain (DG) Result					
Transmit Chains No.		1	-	-	-
Maximum G _{ANT} (dBi)		-1.28	-	-	-
Modulation Mode	DG (dBi)	N _{TX}	N _{SS}	STBC	Array Gain (dB)
11a,6-54Mbps	-1.28	1	1	-	0
HT20,M0-M7	-1.28	1	1	-	3
HT40,M0-M7	-1.28	1	1	-	3

Note 1: For all transmitter outputs with equal antenna gains, directional gain is to be computed as follows:
Any transmit signals are correlated, Directional Gain = G_{ANT} + 10 log(N_{TX})
All transmit signals are completely uncorrelated, Directional Gain = G_{ANT}

Note 2: For all transmitter outputs with unequal antenna gains, directional gain is to be computed as follows:
Any transmit signals are correlated, Directional Gain = 10 log[(10^{G₁/20} + ... + 10^{G_N/20})² / N_{TX}]
All transmit signals are completely uncorrelated, Directional Gain = 10 log[(10^{G₁/10} + ... + 10^{G_N/10}) / N_{TX}]

Note 3: For Spatial Multiplexing, Directional Gain (DG) = G_{ANT} + 10 log(N_{TX}/N_{SS}),
where N_{SS} = the number of independent spatial streams data.

Note 4: For CDD transmissions, directional gain is calculated as power spectral density measurements:
Directional Gain (DG) = G_{ANT} + Array Gain, where Array Gain is as follows:
Array Gain = 10 log(N_{TX}/N_{SS});




3.4.6 Test Result of Peak Power Spectral Density

Peak Power Spectral Density Result											
Condition			Peak Power Spectral Density (dBm/MHz)								
Modulation Mode	N _{TX}	Freq. (MHz)	Sum Chain	-	-	-	-	PSD Limit	DG (dBi)	EIRP PSD	EIRP Limit
11a	1	5180	1.35	-	-	-	-	4.0	-1.28	2.85	10.0
11a	1	5200	1.89	-	-	-	-	4.0	-1.28	3.39	10.0
11a	1	5240	1.39	-	-	-	-	4.0	-1.28	2.89	10.0
11a	1	5260	1.81	-	-	-	-	11.0	-1.28	3.31	17.0
11a	1	5300	1.38	-	-	-	-	11.0	-1.28	2.88	17.0
11a	1	5320	1.47	-	-	-	-	11.0	-1.28	2.97	17.0
11a	1	5500	1.66	-	-	-	-	11.0	-1.28	3.16	17.0
11a	1	5580	1.54	-	-	-	-	11.0	-1.28	3.04	17.0
11a	1	5700	1.39	-	-	-	-	11.0	-1.28	2.89	17.0
HT20	1	5180	1.13	-	-	-	-	4.0	-1.28	2.63	10.0
HT20	1	5200	1.14	-	-	-	-	4.0	-1.28	2.64	10.0
HT20	1	5240	1.31	-	-	-	-	4.0	-1.28	2.81	10.0
HT20	1	5260	0.98	-	-	-	-	11.0	-1.28	2.48	17.0
HT20	1	5300	1.00	-	-	-	-	11.0	-1.28	2.50	17.0
HT20	1	5320	1.21	-	-	-	-	11.0	-1.28	2.71	17.0
HT20	1	5500	1.03	-	-	-	-	11.0	-1.28	2.53	17.0
HT20	1	5580	1.23	-	-	-	-	11.0	-1.28	2.73	17.0
HT20	1	5700	1.05	-	-	-	-	11.0	-1.28	2.55	17.0
HT40	1	5190	-2.19	-	-	-	-	4.0	-1.28	-0.69	10.0
HT40	1	5230	-2.20	-	-	-	-	4.0	-1.28	-0.70	10.0
HT40	1	5270	-2.31	-	-	-	-	11.0	-1.28	-0.81	17.0
HT40	1	5310	-2.02	-	-	-	-	11.0	-1.28	-0.52	17.0
HT40	1	5510	-2.26	-	-	-	-	11.0	-1.28	-0.76	17.0
HT40	1	5550	-2.09	-	-	-	-	11.0	-1.28	-0.59	17.0
HT40	1	5670	-2.25	-	-	-	-	11.0	-1.28	-0.75	17.0
Result			Complied								




(F1~F3: 5150-5250 MHz) / (F4~F6: 5250-5350 MHz) / (F7~F9: 5470-5725 MHz)
11A-20M

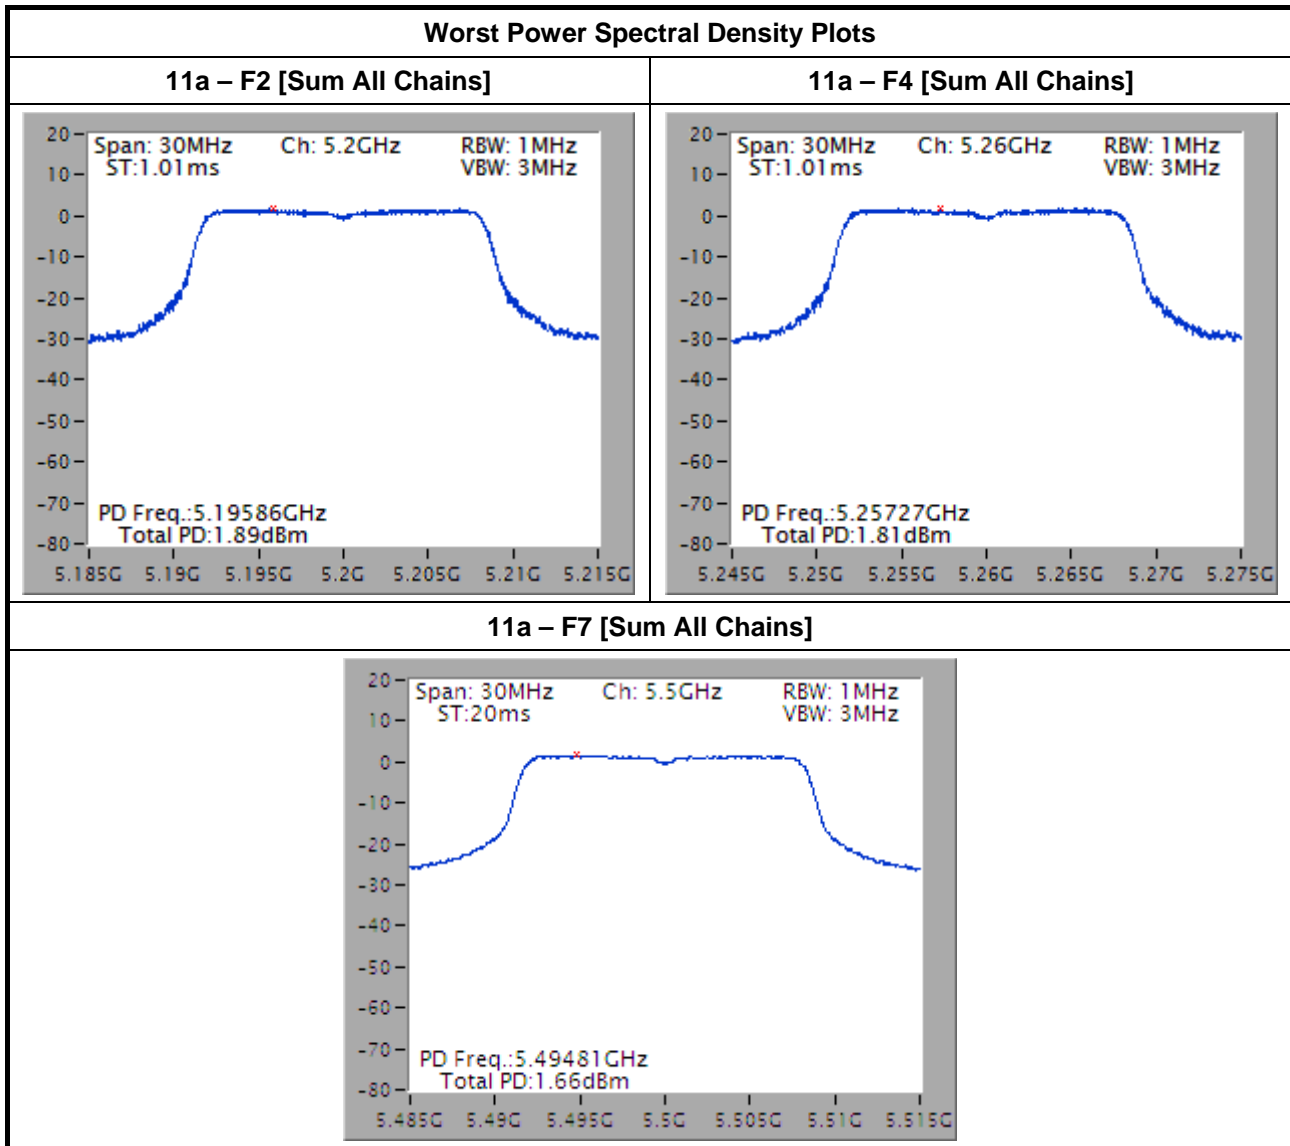

Note 1: Power Density Plots w/o Duty Factor




(F1~F3: 5150-5250 MHz) / (F4~F6: 5250-5350 MHz) / (F7~F9: 5470-5725 MHz)
11N-20M

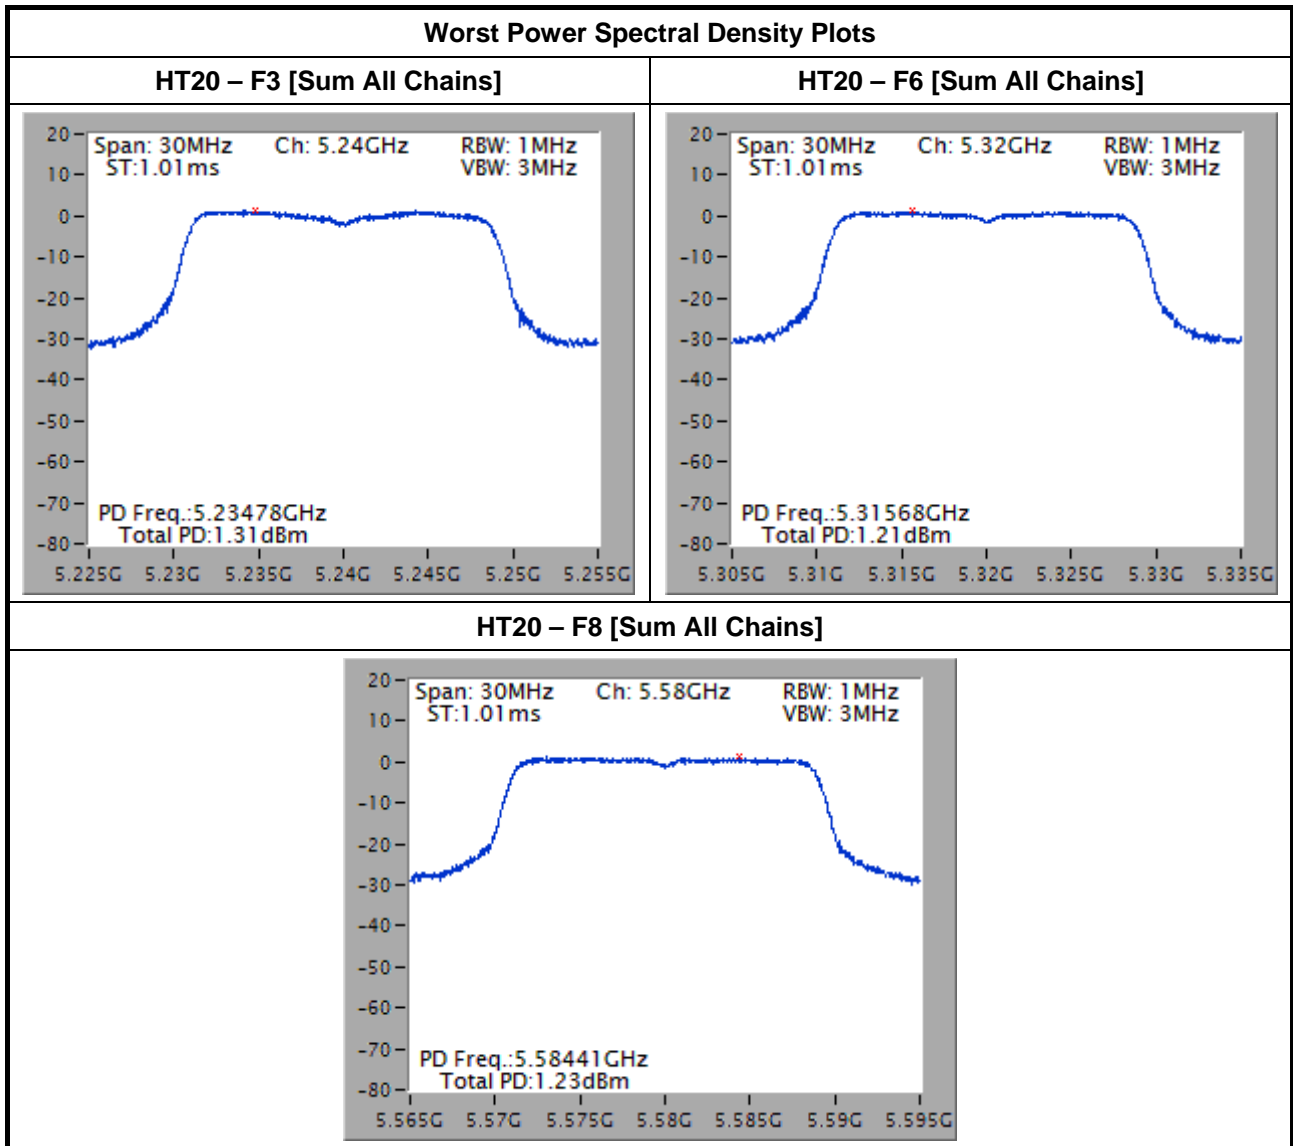

Note 1: Power Density Plots w/o Duty Factor



(F1'~F2': 5150-5250 MHz) / (F4'~F5': 5250-5350 MHz) / (F7'~F9': 5470-5725 MHz)
11N-40M

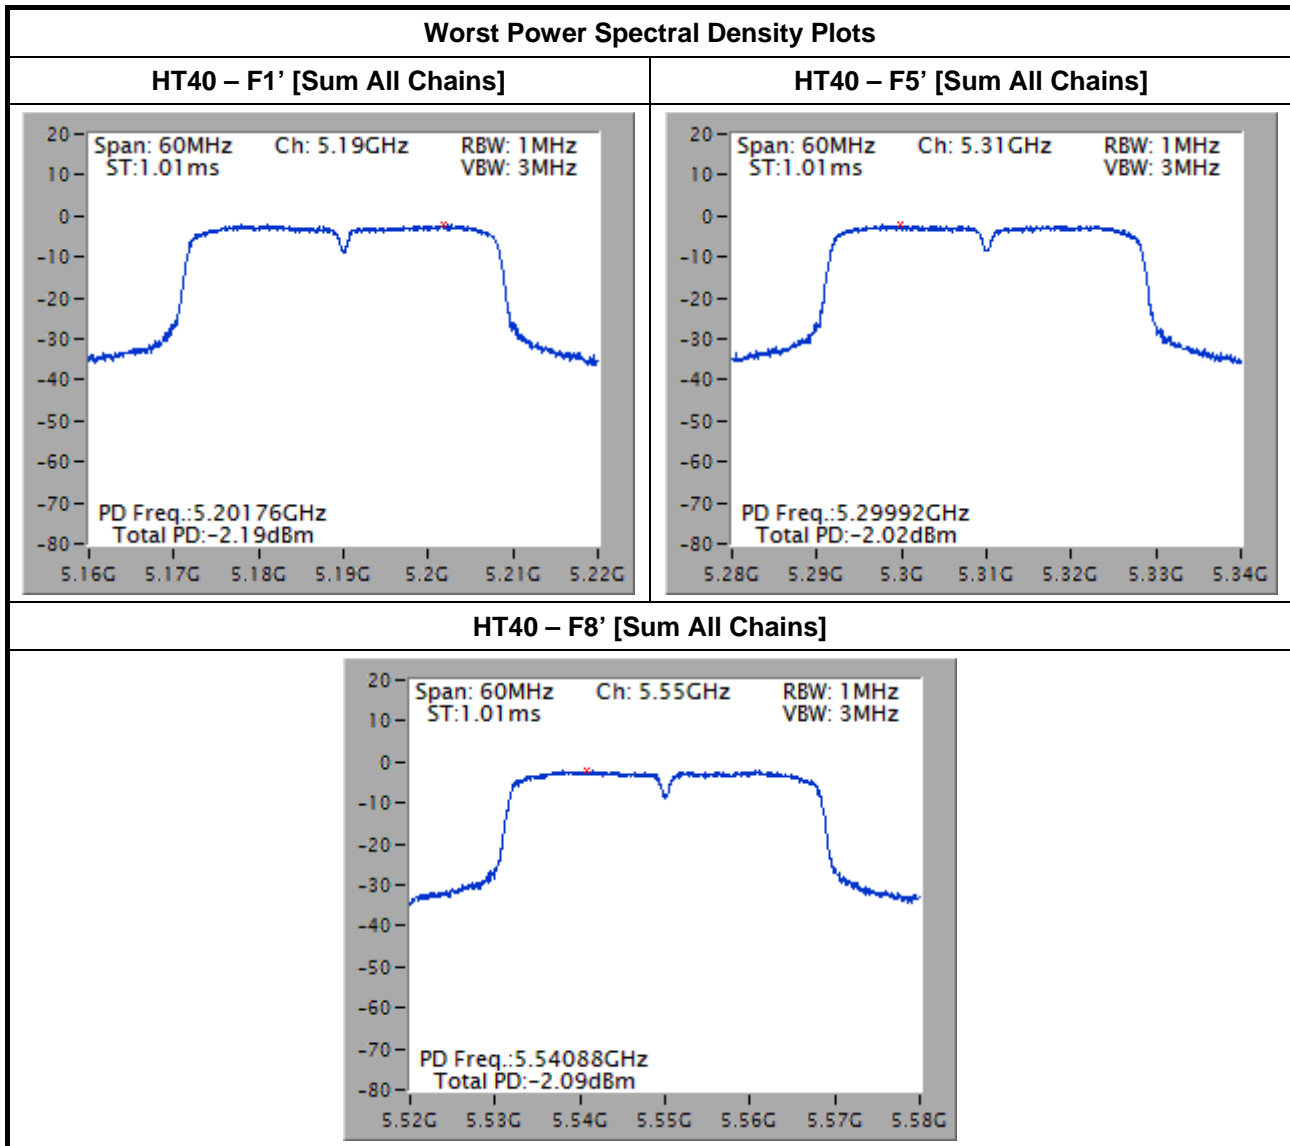

Note 1: Power Density Plots w/o Duty Factor

3.5 Peak Excursion

3.5.1 Peak Excursion Limit

Peak Excursion Limit	
UNII Devices	
<input checked="" type="checkbox"/>	Peak excursion \leq 13 dB. The ratio of the maximum of the peak-max-hold spectrum to the maximum of the average spectrum for continuous transmission does not exceed 13 dB. (Earlier procedures that required computing the ratio of the two spectra at each frequency across the emission bandwidth can lead to unintended failures at band edges and will no longer be required.)
LE-LAN Devices	
<input checked="" type="checkbox"/>	N/A


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause F peak excursion method.
<input checked="" type="checkbox"/>	Testing each modulation mode on a single channel is sufficient to demonstrate compliance with the peak excursion requirement
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input checked="" type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/>	The EUT supports multiple transmit chains using given below method: Refer as FCC KDB 662911, when testing in-band (peak to average ratio) against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N).
<input checked="" type="checkbox"/>	Test result plots refer as test report clause 3.3.5 with peak excursion ratio of the maximum of the peak-max-hold spectrum to the maximum of the average spectrum.

3.5.4 Test Setup

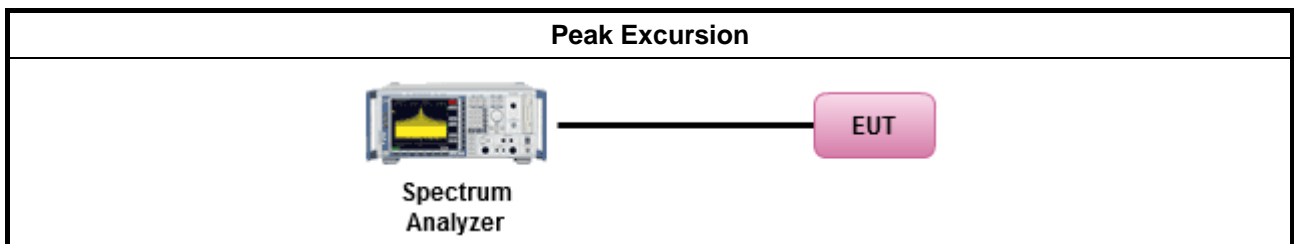






3.5.5 Test Result of Peak Excursion

UNII Peak Excursion Result							
Condition			Peak Excursion (dB)				
Modulation Mode	N _{TX}	Freq. (MHz)	Chain-Port 1	-	-	-	Limit
11a	1	5180	8.93	-	-	-	13.0
11a	1	5200	9.56	-	-	-	13.0
11a	1	5240	9.34	-	-	-	13.0
11a	1	5260	8.18	-	-	-	13.0
11a	1	5300	9.59	-	-	-	13.0
11a	1	5320	8.99	-	-	-	13.0
11a	1	5500	9.37	-	-	-	13.0
11a	1	5580	9.93	-	-	-	13.0
11a	1	5700	9.44	-	-	-	13.0
HT20	1	5180	9.04	-	-	-	13.0
HT20	1	5200	8.63	-	-	-	13.0
HT20	1	5240	7.83	-	-	-	13.0
HT20	1	5260	8.21	-	-	-	13.0
HT20	1	5300	8.24	-	-	-	13.0
HT20	1	5320	8.26	-	-	-	13.0
HT20	1	5500	8.69	-	-	-	13.0
HT20	1	5580	8.37	-	-	-	13.0
HT20	1	5700	8.56	-	-	-	13.0
HT40	1	5190	8.70	-	-	-	13.0
HT40	1	5230	8.35	-	-	-	13.0
HT40	1	5270	8.65	-	-	-	13.0
HT40	1	5310	8.45	-	-	-	13.0
HT40	1	5510	8.32	-	-	-	13.0
HT40	1	5550	8.26	-	-	-	13.0
HT40	1	5670	8.28	-	-	-	13.0
Result			Complied				

3.6 Transmitter Radiated Bandedge Emissions

3.6.1 Transmitter Radiated Bandedge Emissions Limit

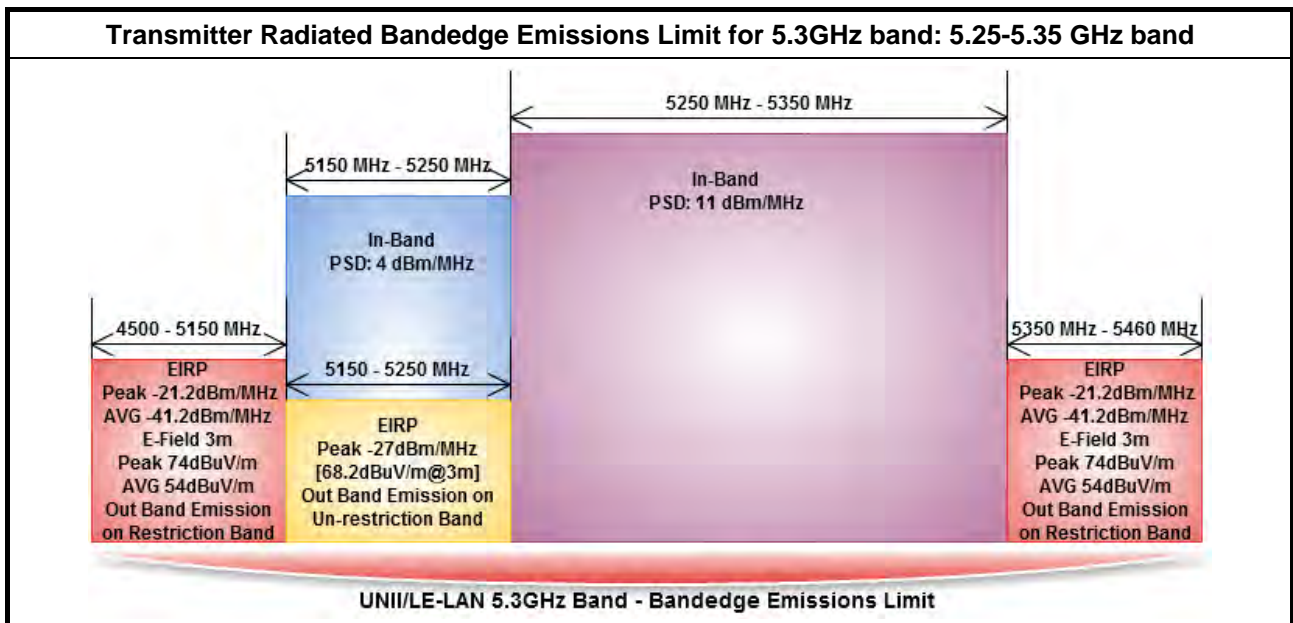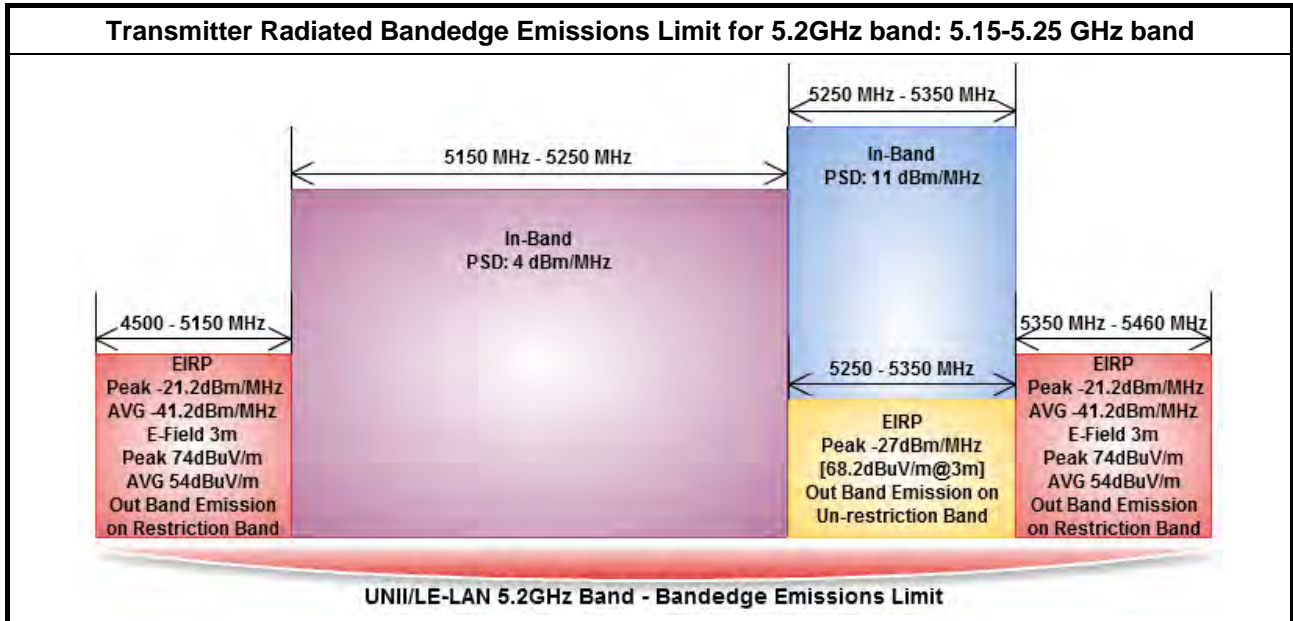

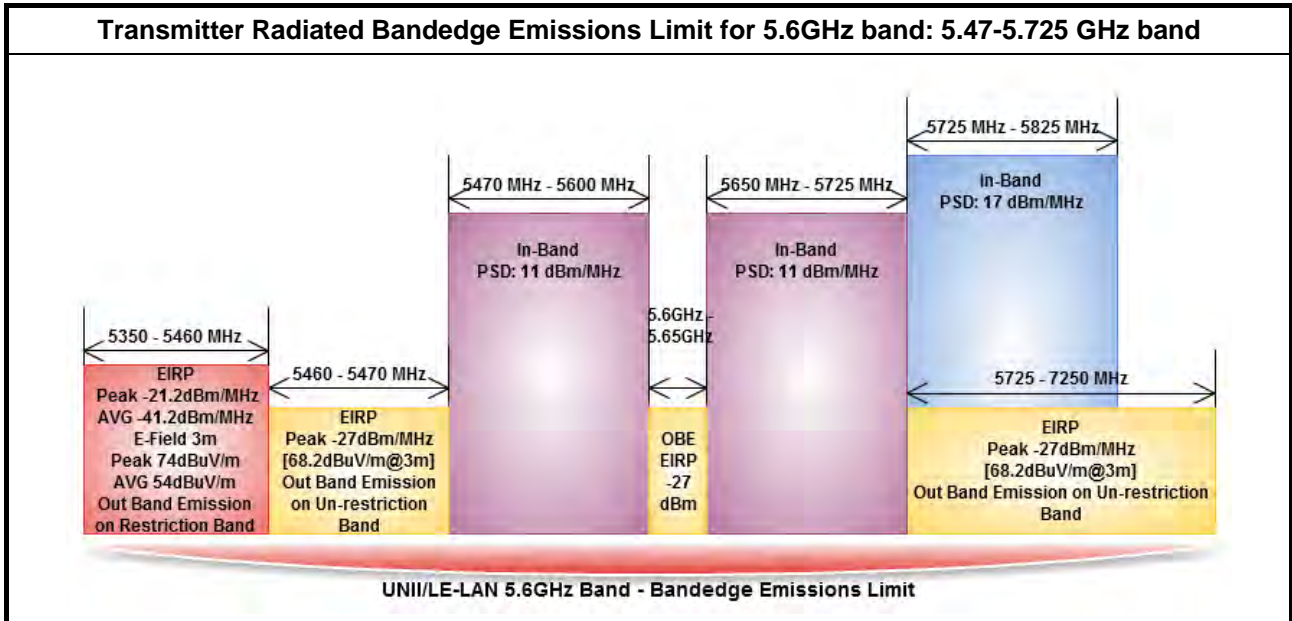

3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.



3.6.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements). Measurements in the bandedge are typically made at a closer distance 1.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input type="checkbox"/>	If EUT operate in adjacent contiguous bands, bandedge testing performed at the lowest frequency channel at lower-band and highest frequency channel at higher-band. Transmitter in-band emissions will consist of adjacent contiguous bands (e.g., IEEE 802.11ac VHT160 The lowest frequency channel at lower-band and highest frequency channel at higher-band in-band emissions will consist of two adjacent contiguous bands.)
<input type="checkbox"/>	Operating in 5.15-5.25 GHz band (lower-band) and 5.25-5.35 GHz band (higher-band).
<input type="checkbox"/>	Operating in 5.47-5.725 GHz band (lower-band) and 5.725-5.825 GHz band (higher-band).
<input type="checkbox"/>	If EUT operate in individual non-contiguous bands, bandedge testing performed at the lowest frequency channel and highest frequency channel within lower-band and higher-band. (e.g., (e.g., IEEE 802.11ac VHT160)
<input type="checkbox"/>	Operating in 5.25-5.35 GHz band (lower-band) and 5.47-5.725 GHz band (higher-band).
<input type="checkbox"/>	Operating in 5.15-5.25 GHz band (lower-band) and 5.725-5.825 GHz band (higher-band).
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)1) for unwanted emissions into restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, G)6) Method AD (Trace Averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, G)6) Method VB (Reduced VBW).
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) - Duty cycle \geq 98%.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)5) measurement procedure peak limit.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For the transmitter bandedge emissions shall be measured using following options below:
<input type="checkbox"/>	Refer as FCC KDB 789033, clause G)3)d) marker-delta method for band-edge measurements.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
<input checked="" type="checkbox"/>	For radiated measurement, refer as ANSI C63.10, clause 6.5 for radiated emissions from above 1 GHz.

3.6.4 Test Setup

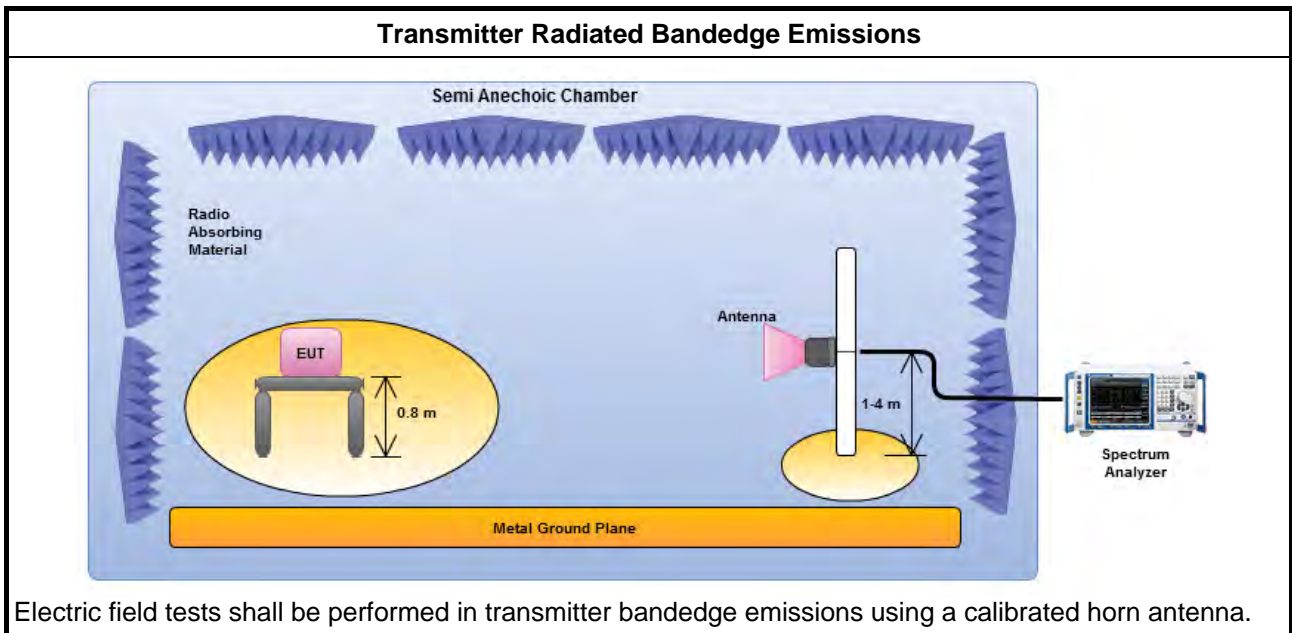



3.6.5 Test Result of Transmitter Radiated Bandedge Emissions

Transmitter Radiated Bandedge Emissions Result								
Modulation	11a		Restricted Band Emissions					
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
4500-5150	5180	116.78	5149.40	1.5	73.15	83.54	PK	V
4500-5150	5180	105.20	5151.00	1.5	57.04	63.54	AV	V
5350-5460	5320	116.66	5353.54	1.5	72.13	83.54	PK	V
5350-5460	5320	105.48	5350.00	1.5	58.34	63.54	AV	V

5.2GHz Lower-band (Lowest Ch.)	5.3GHz Higher-band (Highest Ch.)

Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).



Transmitter Radiated Bandedge Emissions Result								
Modulation	11a		Non-restricted Band Emissions					
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	NBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
5460-5470	5500	105.91	5465.68	1	67.92	77.84	PK	V
5725-7250	5700	104.48	5731.40	1	69.28	77.84	PK	V
5.6GHz band (Lowest Ch.)				5.6GHz band (Highest Ch.)				
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).								



Transmitter Radiated Bandedge Emissions Result								
Modulation	HT-20		Restricted Band Emissions					
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
4500-5150	5180	117.71	5147.90	1.5	78.74	83.54	PK	V
4500-5150	5180	104.60	5149.90	1.5	59.19	63.54	AV	V
5350-5460	5320	114.17	5352.42	1.5	72.49	83.54	PK	V
5350-5460	5320	101.00	5350.00	1.5	57.22	63.54	AV	V
5.2GHz Lower-band (Lowest Ch.)				5.3GHz Higher-band (Highest Ch.)				
<p>Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).</p>								



Transmitter Radiated Bandedge Emissions Result								
Modulation	HT-20		Non-restricted Band Emissions					
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	NBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
5460-5470	5500	105.47	5463.12	1	67.48	77.84	PK	V
5725-7250	5700	104.55	5748.92	1	69.27	77.84	PK	V
5.6GHz band (Lowest Ch.)				5.6GHz band (Highest Ch.)				
<p>Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).</p>								



Transmitter Radiated Bandedge Emissions Result								
Modulation	HT-40		Restricted Band Emissions					
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
4500-5150	5190	107.64	5147.85	1.5	80.02	83.54	PK	V
4500-5150	5190	93.46	5151.00	1.5	59.86	63.54	AV	V
5350-5460	5310	104.73	5350.00	1.5	75.55	83.54	PK	V
5350-5460	5310	91.10	5350.00	1.5	58.85	63.54	AV	V
5.2GHz Lower-band (Lowest Ch.)				5.3GHz Higher-band (Highest Ch.)				
<p>Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).</p>								



Transmitter Radiated Bandedge Emissions Result								
Modulation	HT-40		Non-restricted Band Emissions					
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	NBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
5460-5470	5510	101.26	2470.00	1	70.44	77.84	PK	V
5725-7250	5670	102.12	5725.00	1	68.74	77.84	PK	V
5.6GHz band (Lowest Ch.)				5.6GHz band (Highest Ch.)				
<p>Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).</p>								

3.7 Transmitter Radiated Unwanted Emissions

3.7.1 Transmitter Radiated Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.825 GHz	5.715 5.725 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] 5.825 5.835 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

3.7.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.



3.7.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	Measurements in the frequency range 5 GHz - 10GHz are typically made at a closer distance 1.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	Measurements in the frequency range above 18 GHz - 40GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)1) for unwanted emissions into restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, G)6) Method AD (Trace Averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, G)6) Method VB (Reduced VBW).
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) – Duty \geq 98%.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)5) measurement procedure peak limit.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For radiated measurement.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from above 1 GHz.

3.7.4 Test Setup

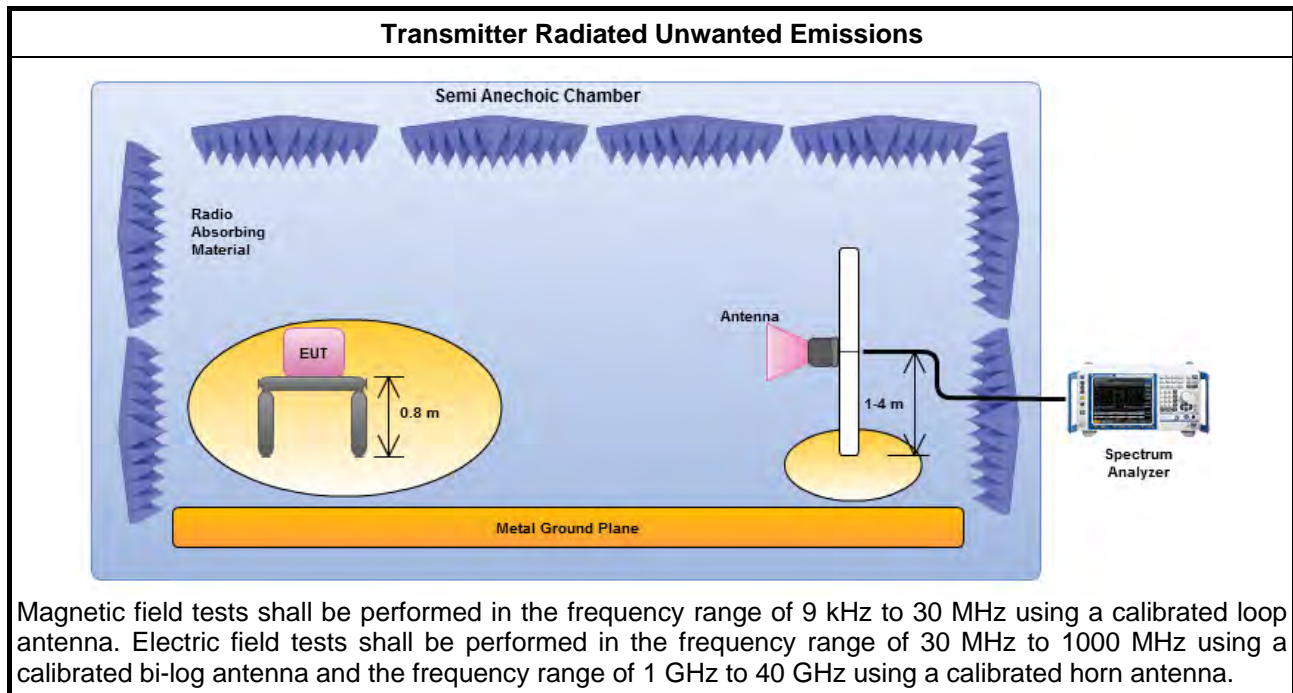


3.7.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.




3.7.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Transmitter Radiated Unwanted Emissions (Below 1GHz)			
Operating Mode	1	Polarization	V
Operating Function	Radio link (5G-WLAN)		

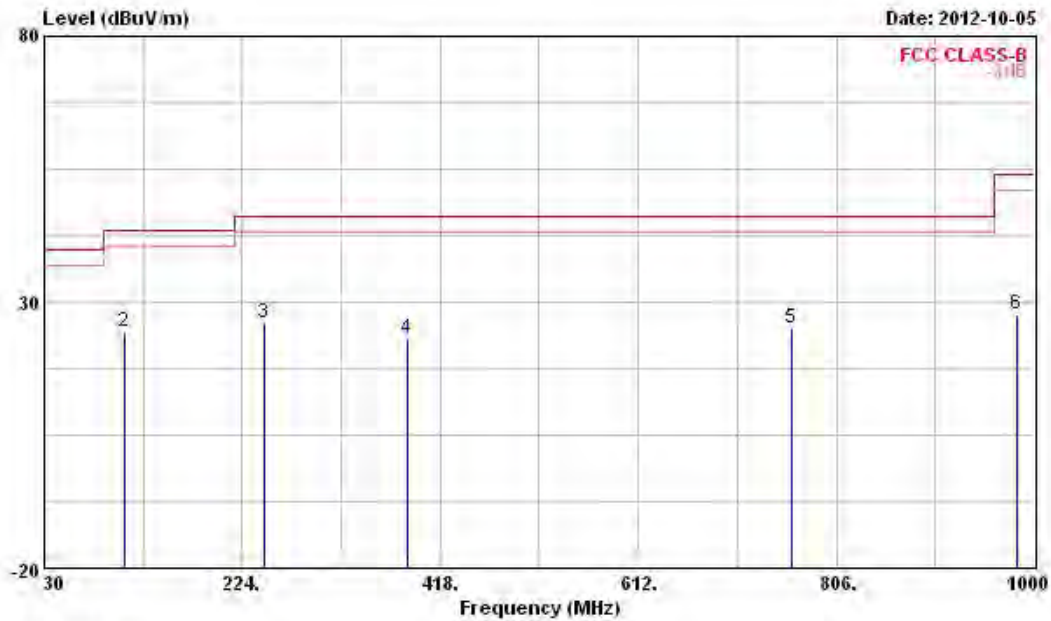

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	30.000	28.50	-11.50	40.00	39.34	16.22	0.89	27.95	Peak	---	---
2	109.540	24.35	-19.15	43.50	38.08	12.34	1.74	27.81	Peak	---	---
3	245.340	25.91	-20.09	46.00	37.63	12.84	2.74	27.30	Peak	---	---
4	385.990	23.07	-22.93	46.00	32.46	15.04	3.34	27.77	Peak	---	---
5	761.380	25.12	-20.88	46.00	28.72	19.72	4.75	28.07	Peak	---	---
6	982.540	27.71	-26.29	54.00	27.31	22.07	5.62	27.29	Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

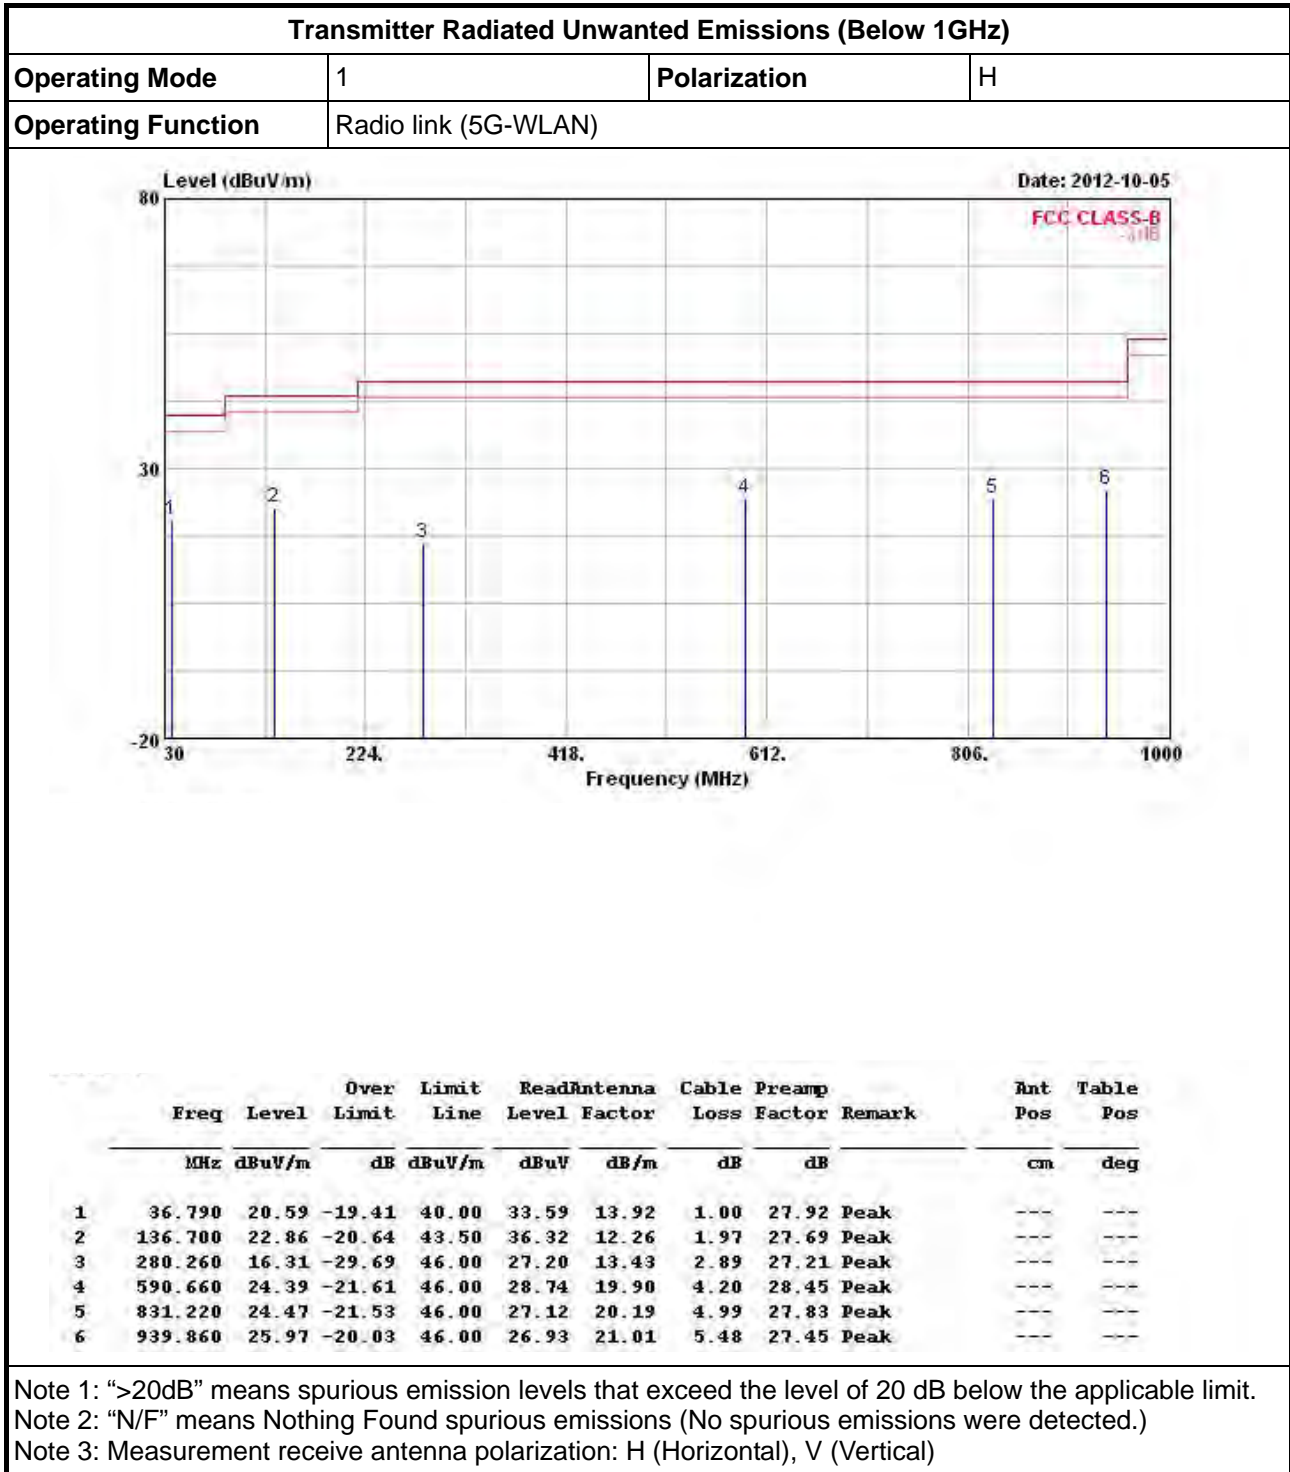



3.7.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11A-20M

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11a	Test Freq. (FX)	F1
Operating Function	Transmit	Polarization	V

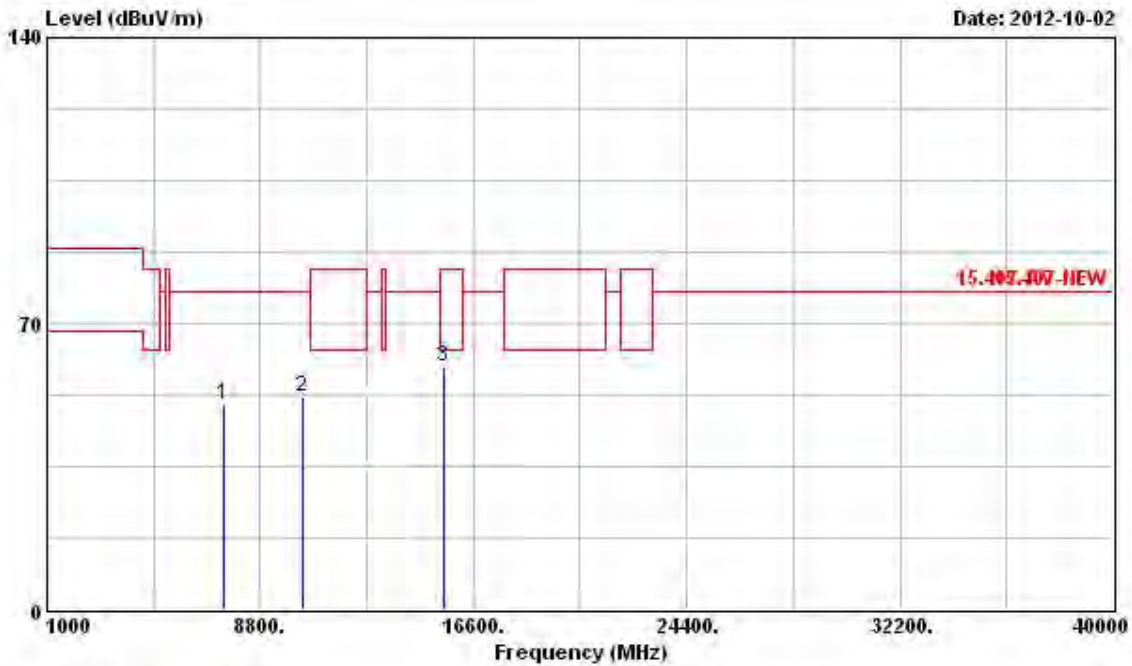


Line	Freq MHz	Level dBuV/m	Over Limit dB	Limit Line dBuV/m	ReadAntenna Level dBuV	Antenna Factor dB/m	Cable Loss dB	Preamp Factor dB	Remark	Ant Pos cm	Table Pos deg
1	7464.000	50.12	-27.72	77.84	43.79	35.81	5.66	35.14	Peak	---	---
2	10360.000	52.03	-25.81	77.84	42.32	38.22	6.71	35.22	Peak	---	---
3	15540.000	59.44	-4.10	63.54	45.21	40.81	8.45	35.03	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (FX)	F1
Operating Function	Transmit	Polarization	H

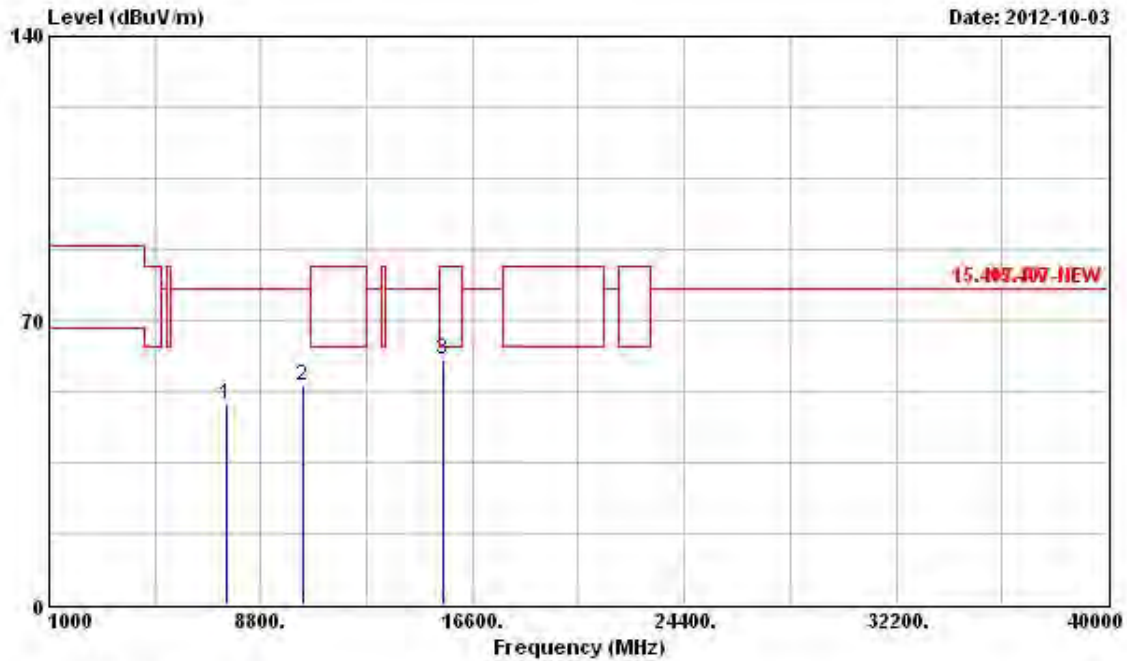


Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 7524.000	49.27	-28.57	77.84	42.96	35.81	5.66	35.16	Peak	---	---
2 10360.000	54.04	-23.80	77.84	44.33	38.22	6.71	35.22	Peak	---	---
3 15540.000	60.10	-3.44	63.54	45.87	40.81	8.45	35.03	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	V

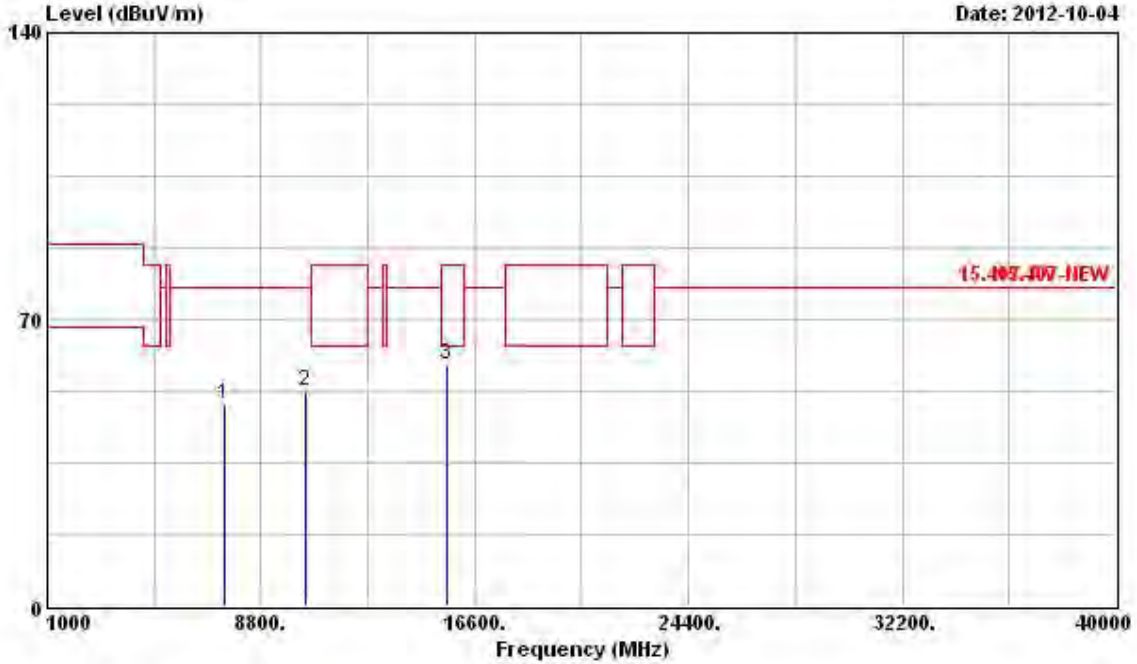


Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg
1 7476.000	49.46	-28.38	77.84	43.14	35.80	5.66	35.14	Peak	---	---
2 10400.000	52.70	-25.14	77.84	42.89	38.24	6.75	35.18	Peak	---	---
3 15600.000	58.92	-4.62	63.54	44.73	40.84	8.45	35.10	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	H

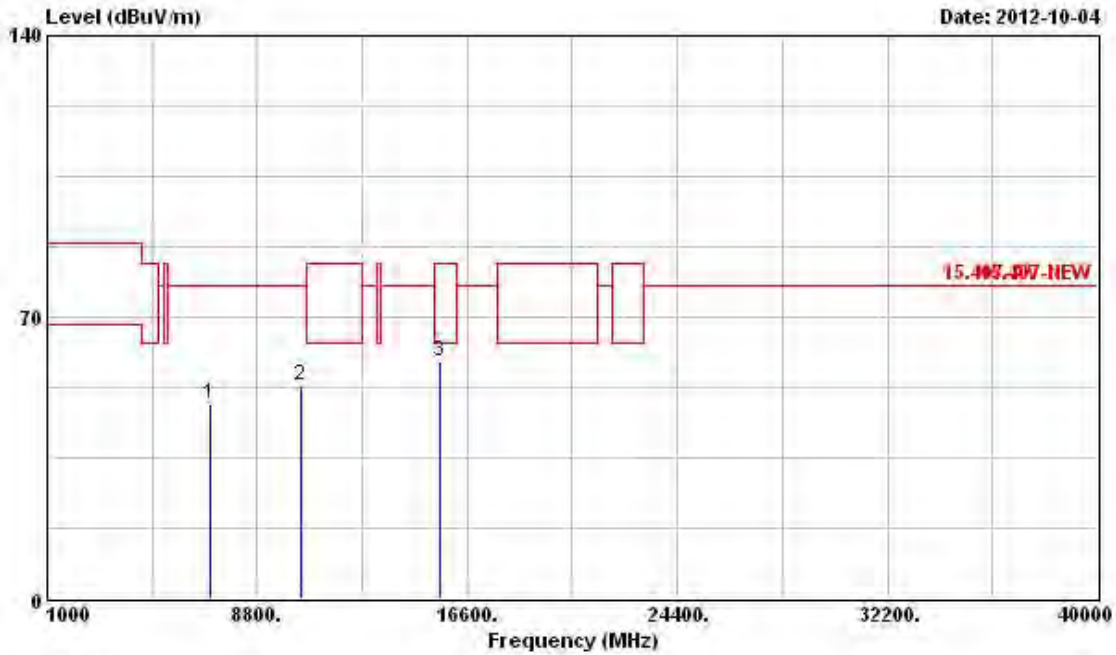


	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7032.000	48.54	-29.30	77.84	42.08	35.89	5.60	35.03	Peak	---
2	10400.000	52.76	-25.08	77.84	42.95	38.24	6.75	35.18	Peak	---
3	15600.000	59.02	-24.52	83.54	44.83	40.84	8.45	35.10	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	V

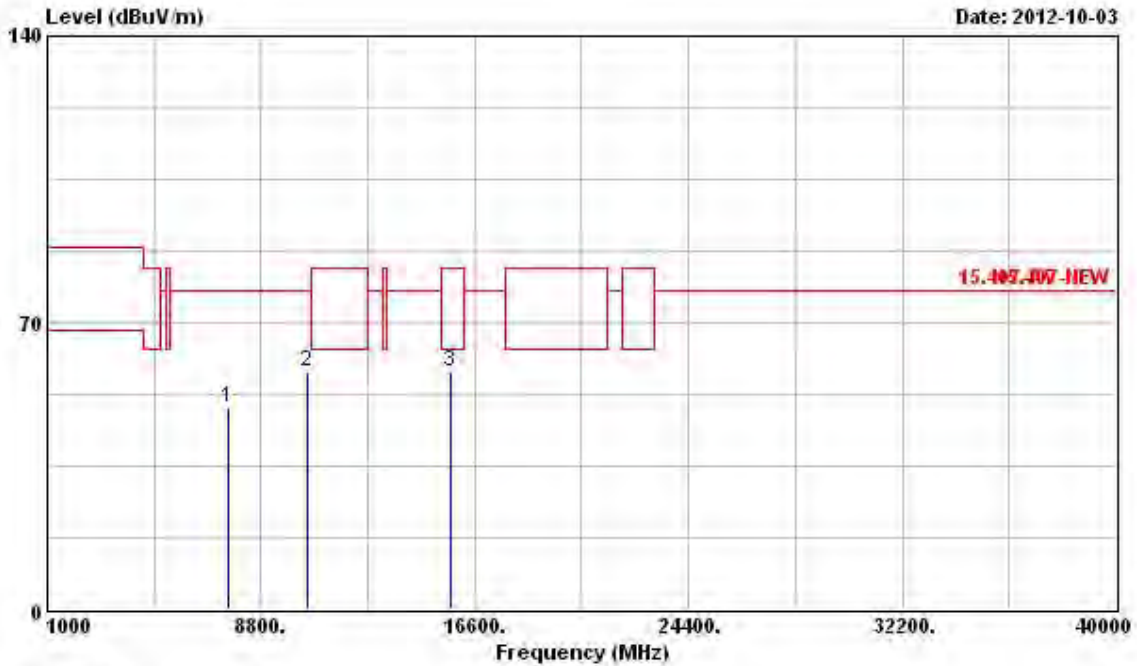


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7572.000	49.37	-28.47	77.84	43.04	35.82	5.68	35.17	Peak	---	---
2	10480.000	57.94	-19.90	77.84	47.95	38.29	6.82	35.12	Peak	---	---
3	15720.000	58.00	-5.54	63.54	43.85	40.89	8.46	35.20	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	H

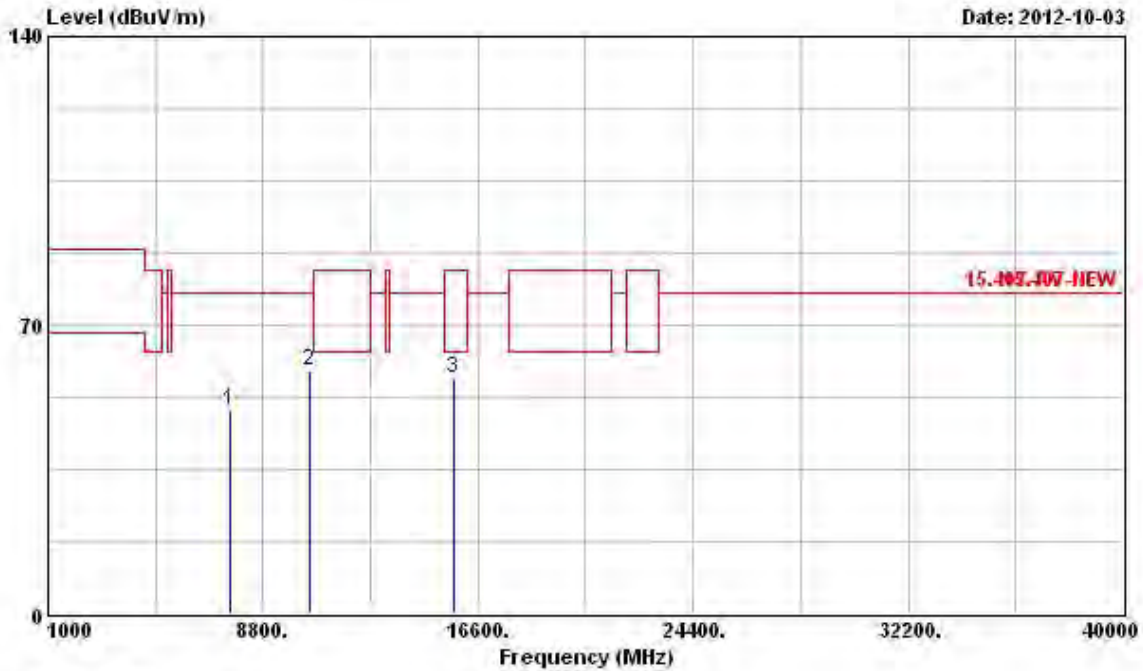


Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg
1 7620.000	49.38	-28.46	77.84	43.05	35.82	5.69	35.18	Peak	---	---
2 10480.000	58.94	-18.90	77.84	48.95	38.29	6.82	35.12	Peak	---	---
3 15720.000	57.29	-6.25	63.54	43.14	40.89	8.46	35.20	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (FX)	F4
Operating Function	Transmit	Polarization	V

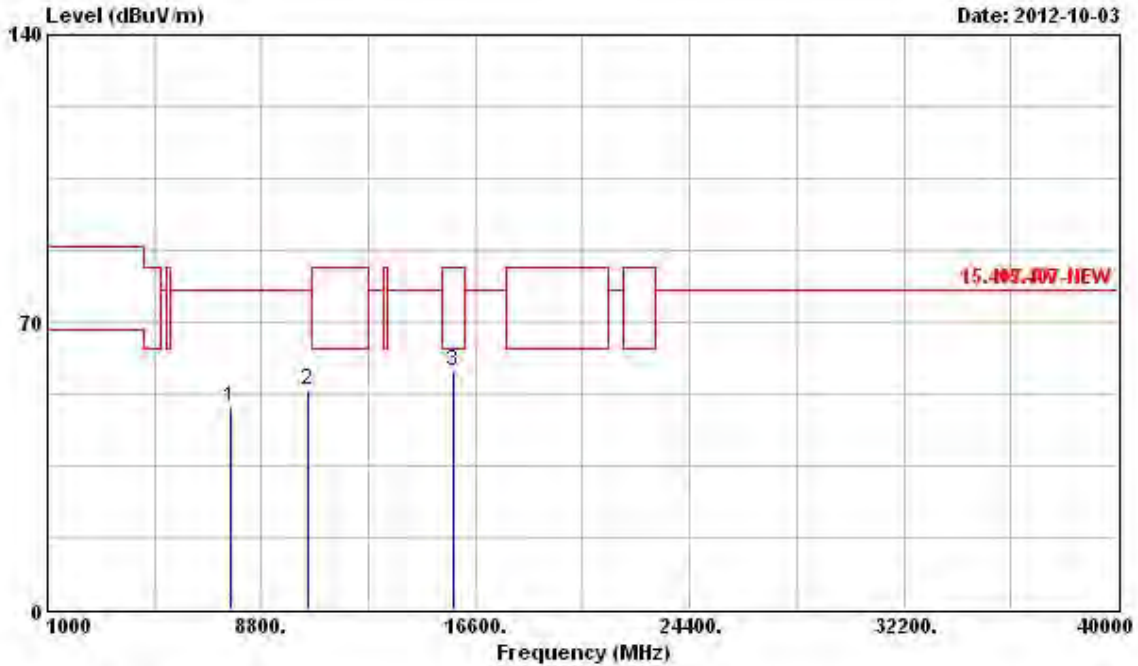


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7668.000	49.22	-28.62	77.84	42.87	35.83	5.71	35.19	Peak	---	---
2	10520.000	53.22	-24.62	77.84	43.16	38.31	6.85	35.10	Peak	---	---
3	15780.000	57.84	-5.70	63.54	43.75	40.91	8.46	35.28	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.




Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (FX)	F4
Operating Function	Transmit	Polarization	H

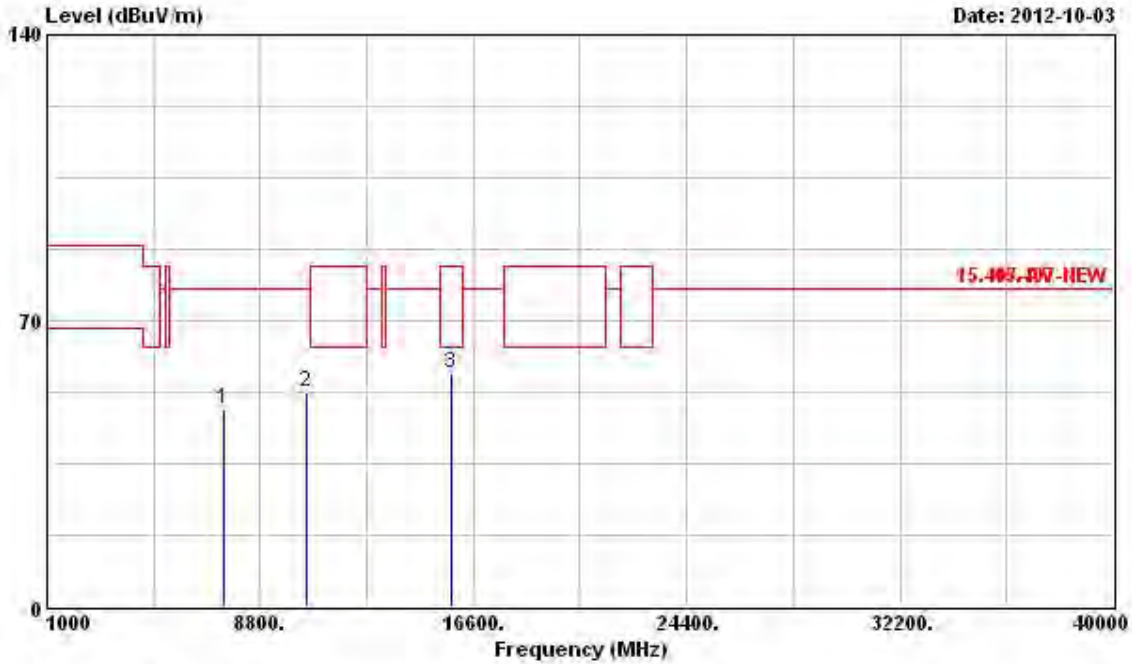

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7464.000	48.40	-29.44	77.84	42.07	35.81	5.66	35.14	Peak	---	---
2	10520.000	52.48	-25.36	77.84	42.42	38.31	6.85	35.10	Peak	---	---
3	15780.000	56.92	-6.62	63.54	42.83	40.91	8.46	35.28	PK	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

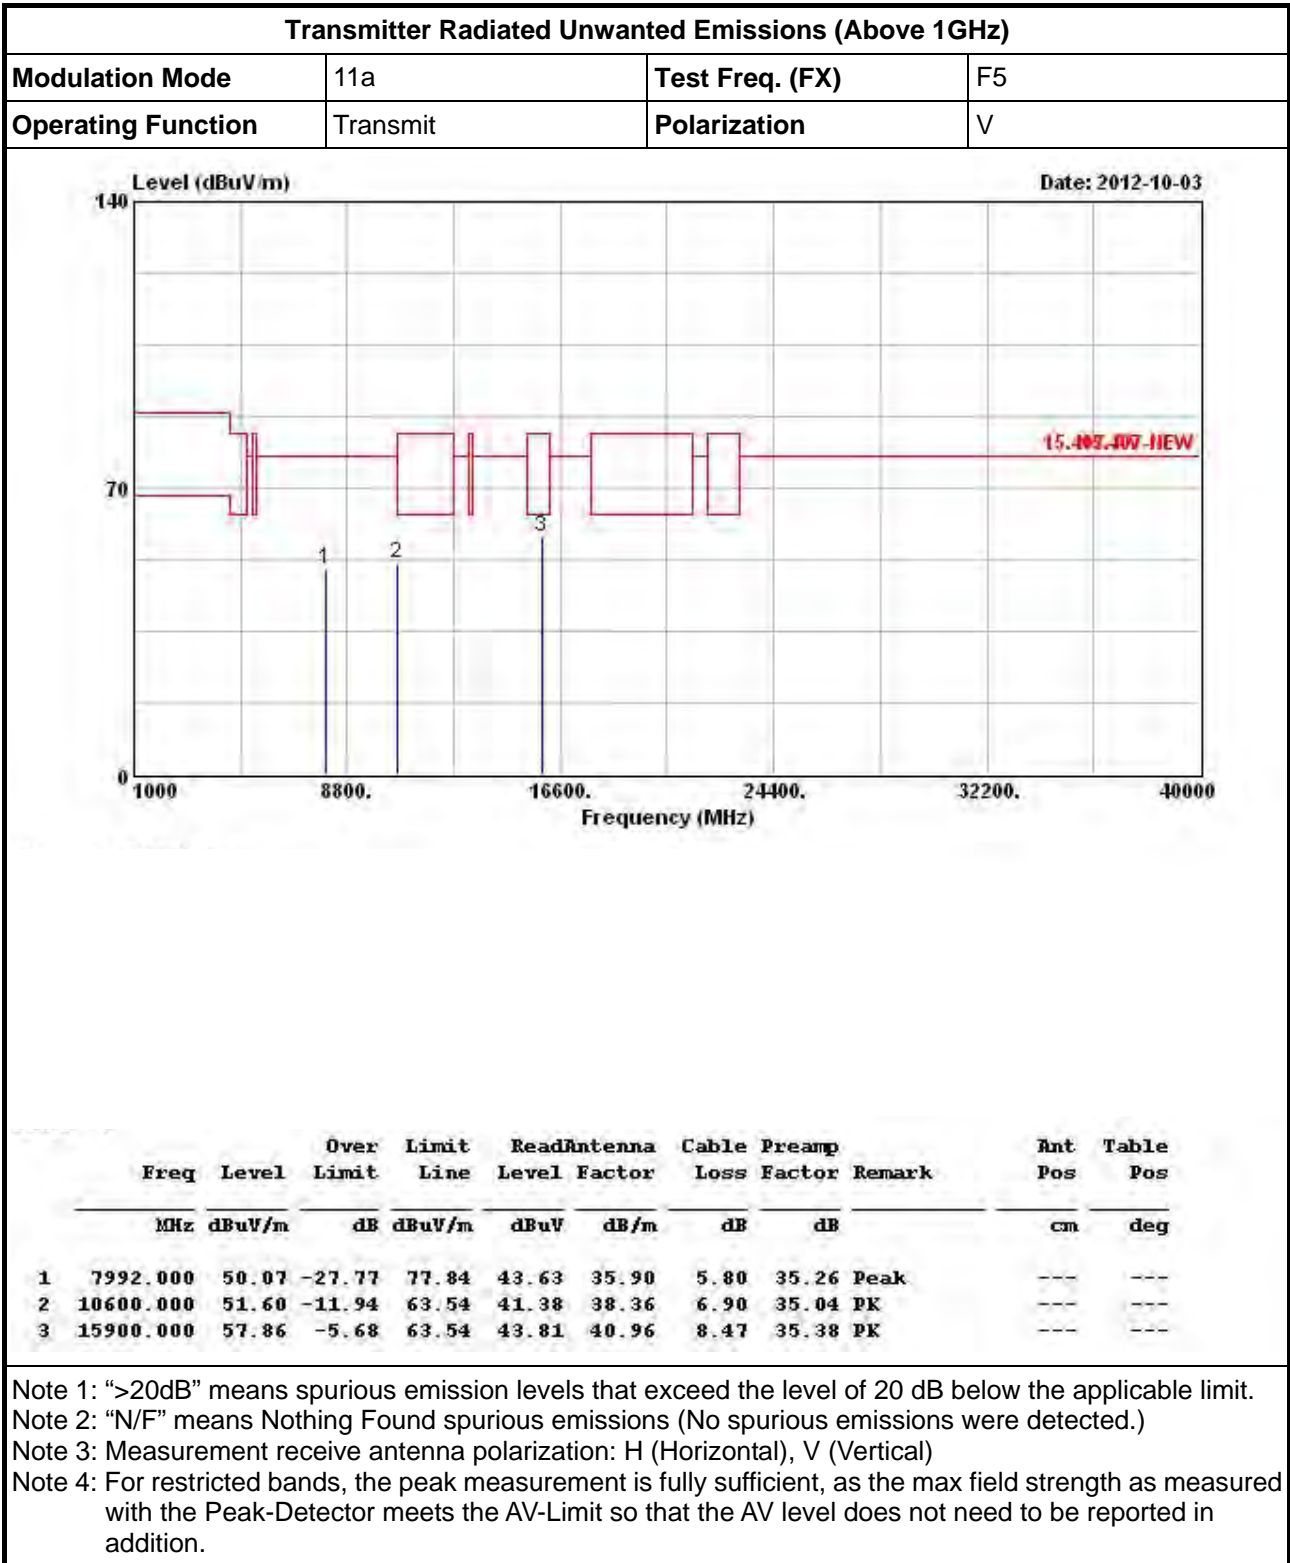



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (FX)	F5
Operating Function	Transmit	Polarization	H

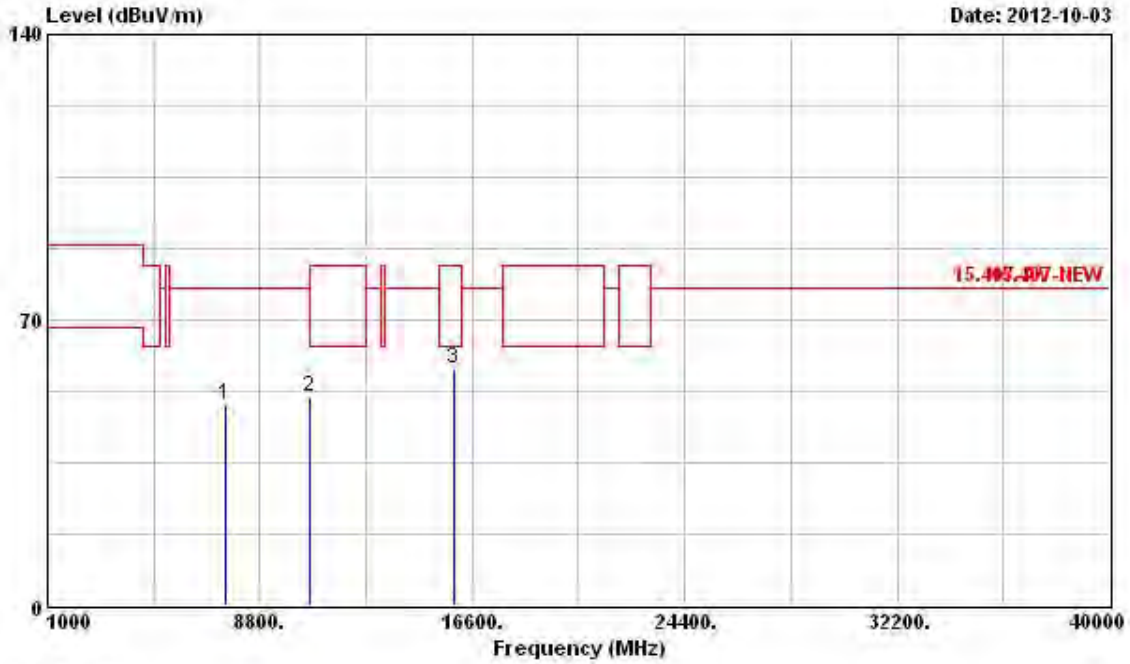


Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7560.000	49.36	-28.48	77.84	43.04	35.81	5.67	35.16 Peak	---	---
2	10600.000	51.20	-12.34	63.54	40.98	38.36	6.90	35.04 PK	---	---
3	15900.000	57.84	-5.70	63.54	43.79	40.96	8.47	35.38 PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.




Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (FX)	F6
Operating Function	Transmit	Polarization	V

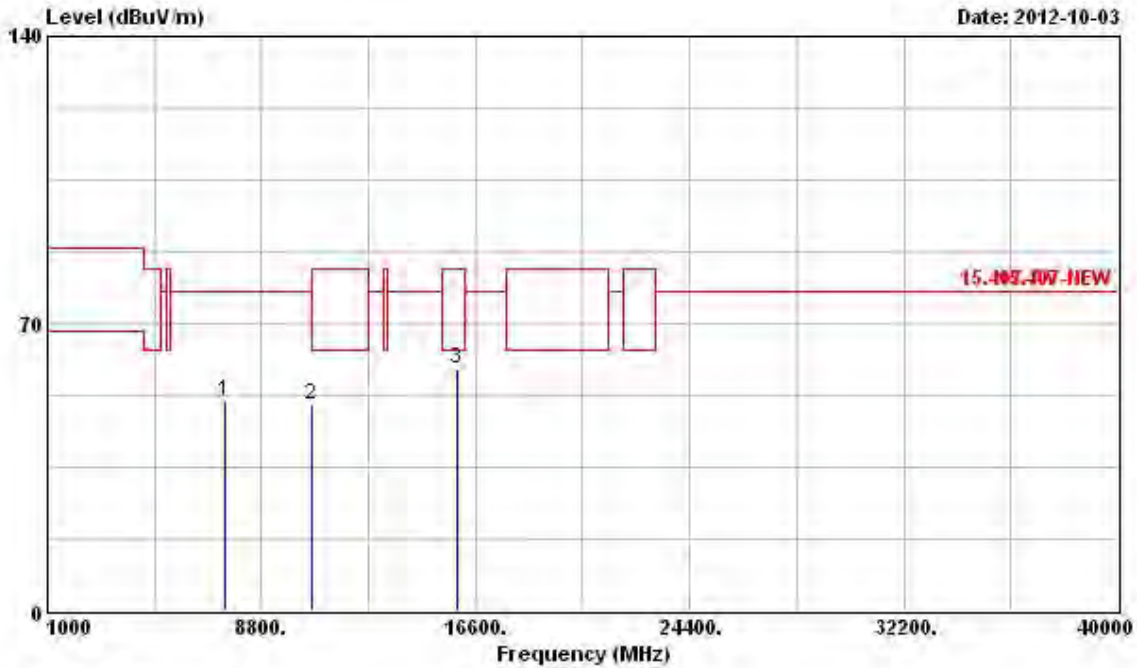

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7464.000	51.05	-26.79	77.84	44.72	35.81	5.66	35.14 Peak	---	---
2	10640.000	50.13	-13.41	63.54	39.82	38.38	6.93	35.00 PK	---	---
3	15960.000	59.06	-4.48	63.54	45.05	40.99	8.47	35.45 PK	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

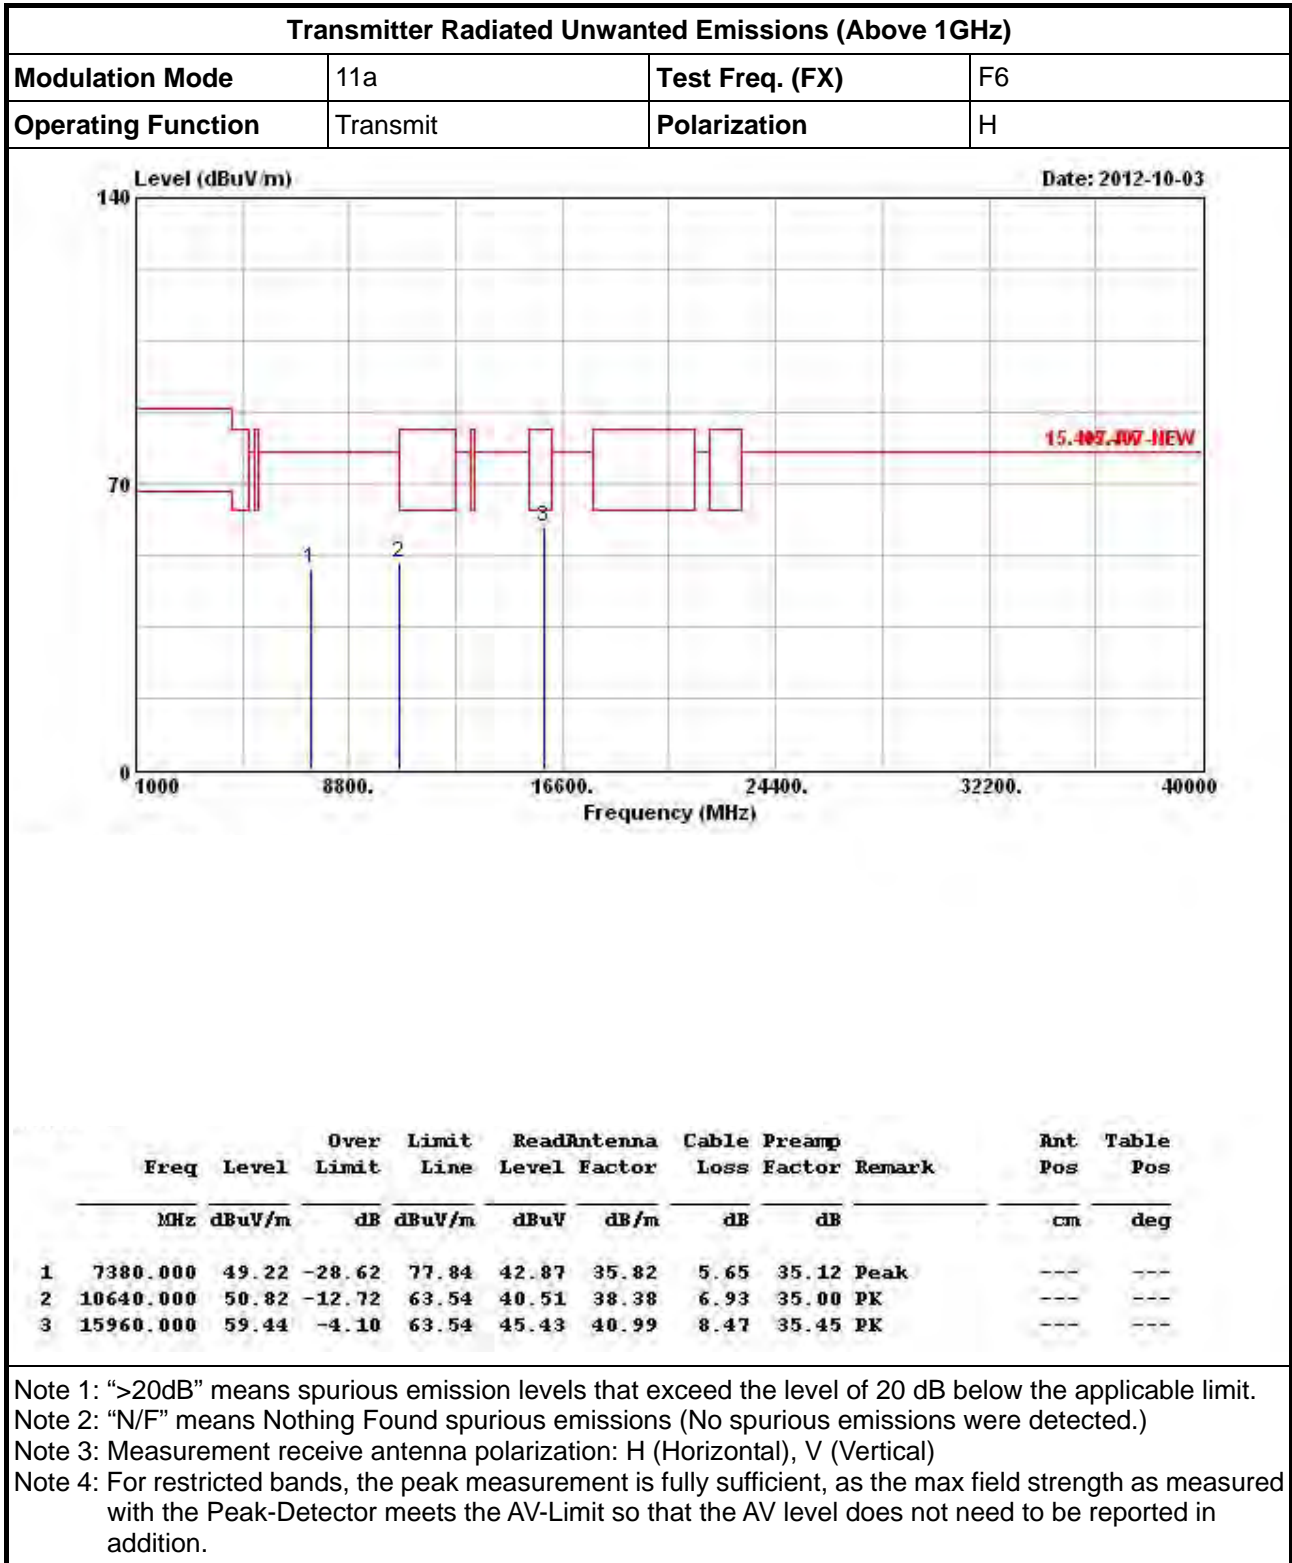



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (FX)	F7
Operating Function	Transmit	Polarization	V

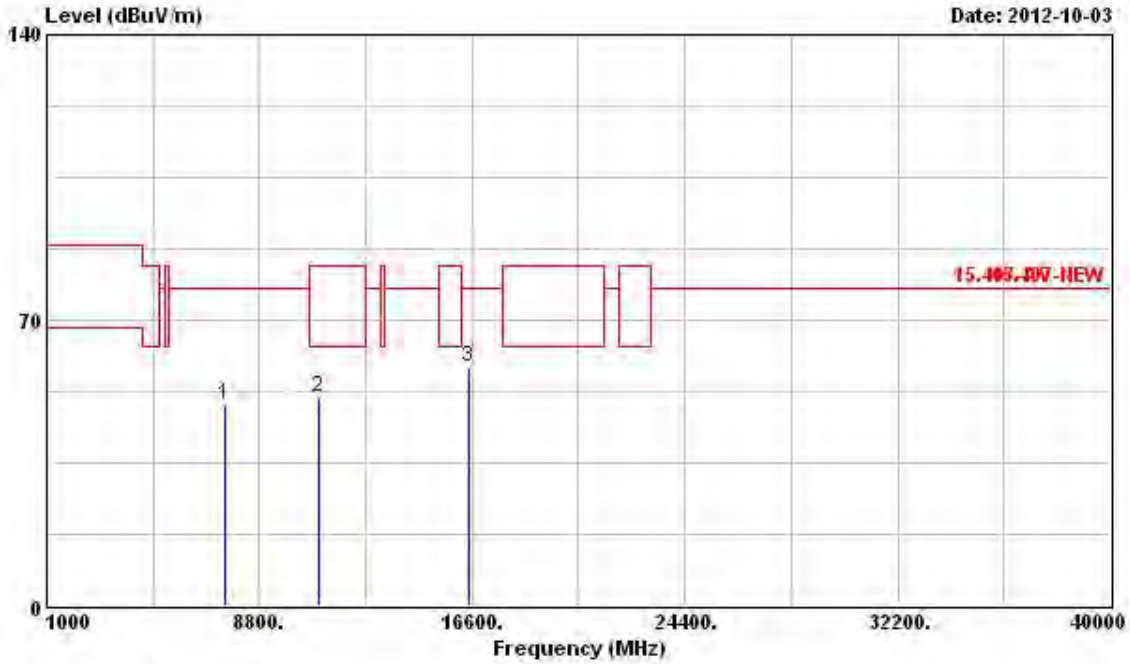


Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7512.000	49.28	-28.56	77.84	42.97	35.80	5.66	35.15 Peak	---	---
2	11000.000	51.10	-12.44	63.54	40.05	38.60	7.17	34.72 PK	---	---
3	16500.000	58.67	-19.17	77.84	43.42	42.00	8.24	34.99 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (FX)	F7
Operating Function	Transmit	Polarization	H

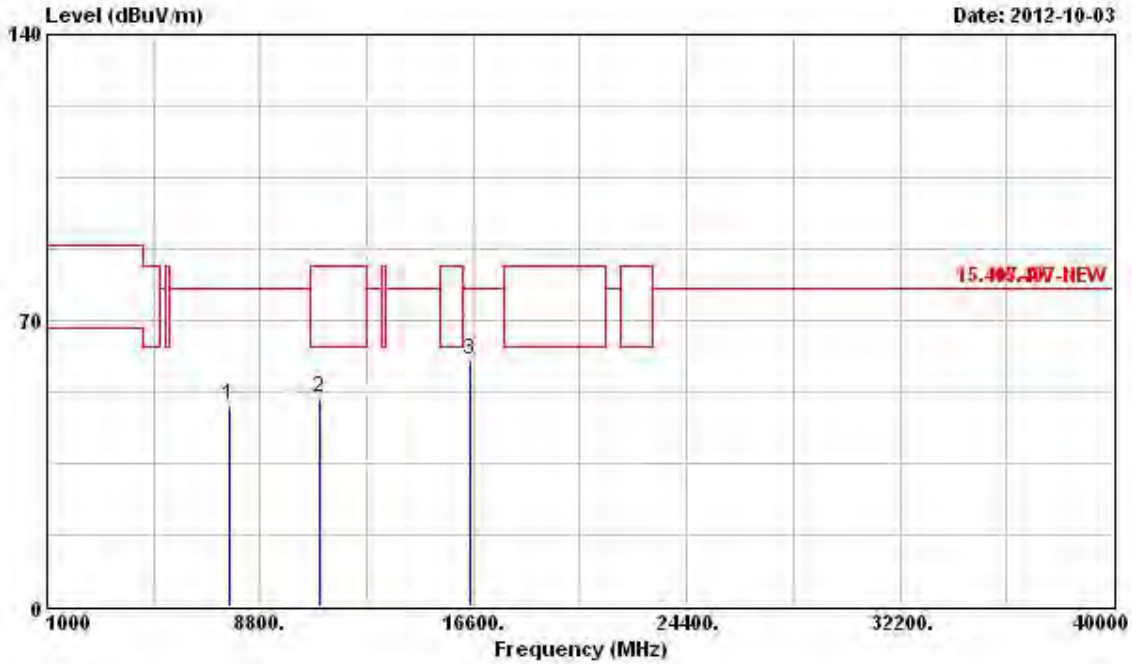


Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7668.000	49.06	-28.78	77.84	42.71	35.83	5.71	35.19 Peak	---	---
2	11000.000	51.21	-12.33	63.54	40.16	38.60	7.17	34.72 PK	---	---
3	16500.000	60.11	-17.73	77.84	44.86	42.00	8.24	34.99 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.




Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (FX)	F8
Operating Function	Transmit	Polarization	V

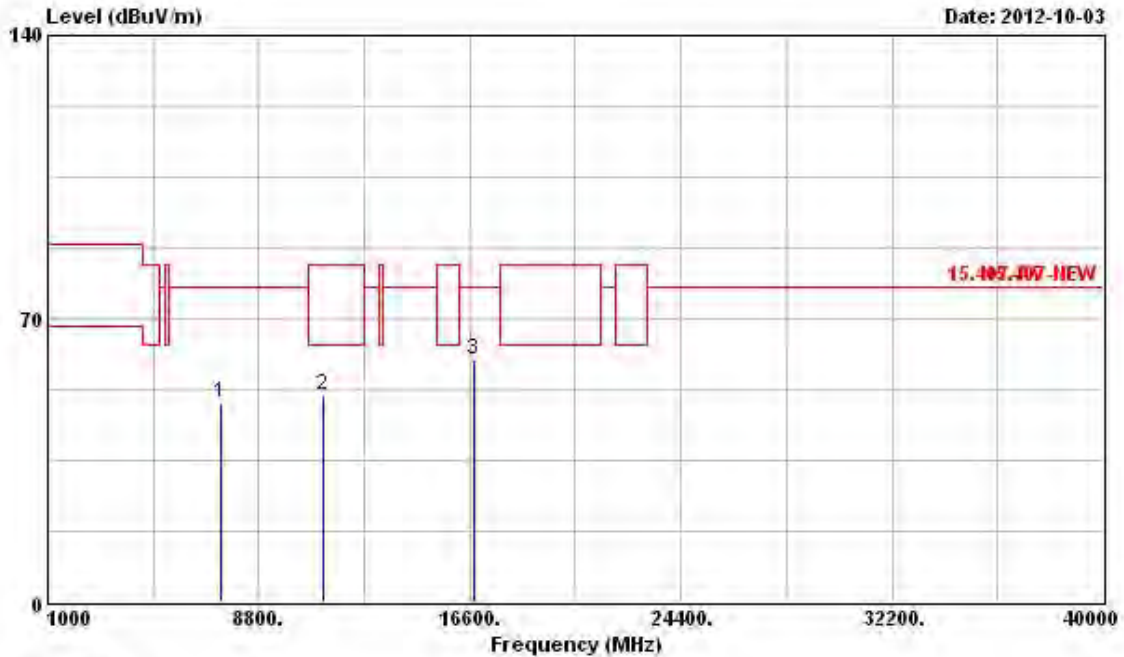

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7380.000	49.36	-28.48	77.84	43.01	35.82	5.65	35.12 Peak	---	---
2	11160.000	51.25	-12.29	63.54	40.31	38.70	6.96	34.72 PK	---	---
3	16740.000	59.87	-17.97	77.84	44.05	41.86	8.47	34.51 Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

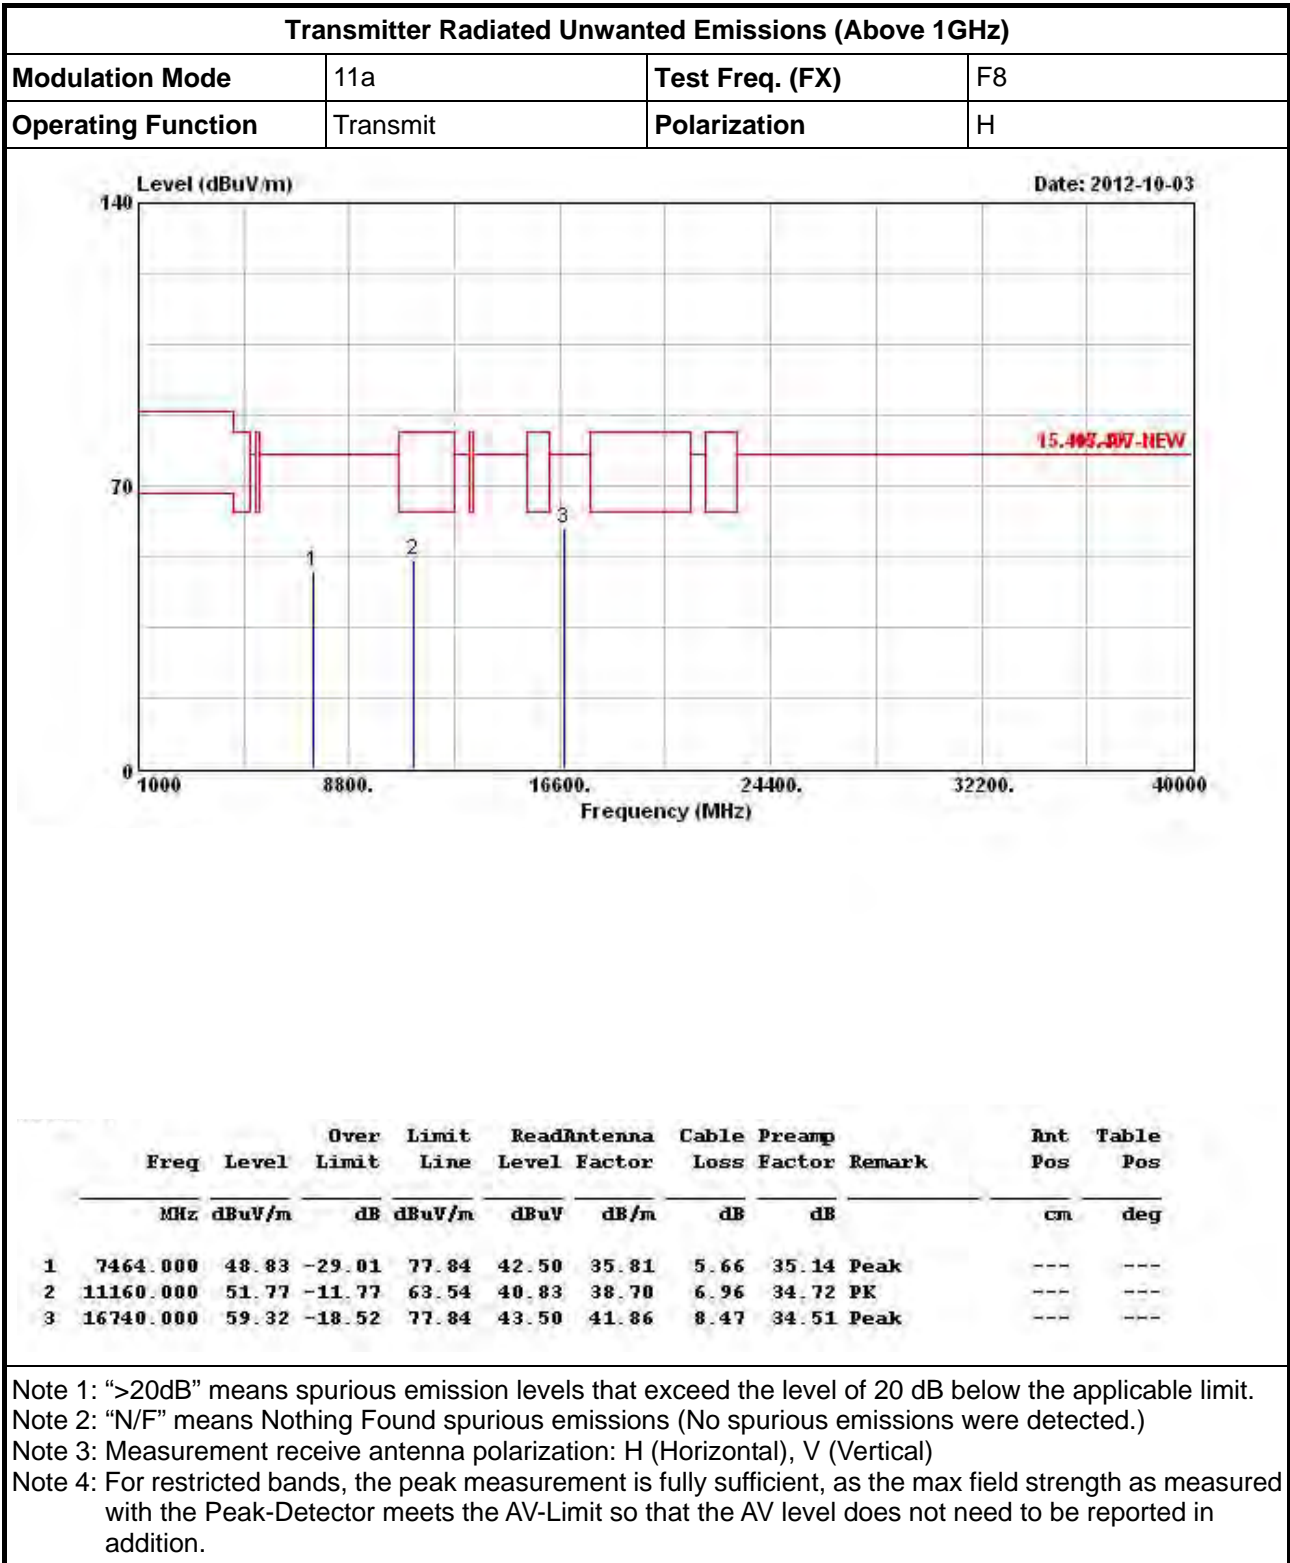



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (FX)	F9
Operating Function	Transmit	Polarization	V

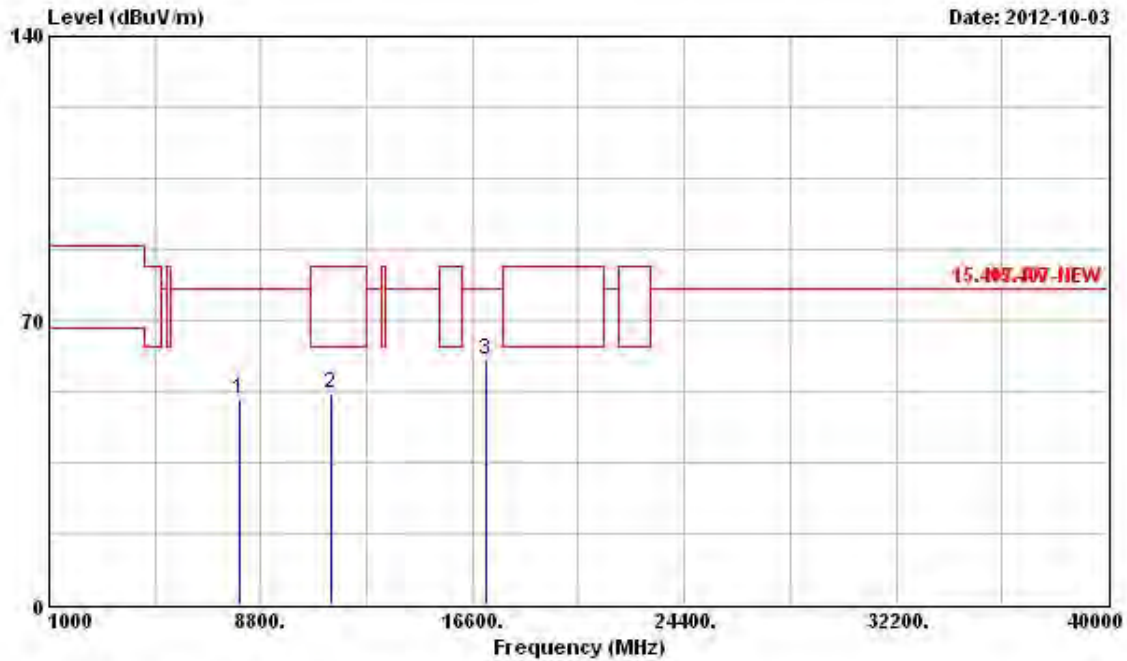


Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg
1 7992.000	50.84	-27.00	77.84	44.40	35.90	5.80	35.26	Peak	---	---
2 11400.000	52.03	-11.51	63.54	41.20	38.84	6.71	34.72	PK	---	---
3 17100.000	60.40	-17.44	77.84	44.11	41.66	8.61	33.98	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (FX)	F9
Operating Function	Transmit	Polarization	H

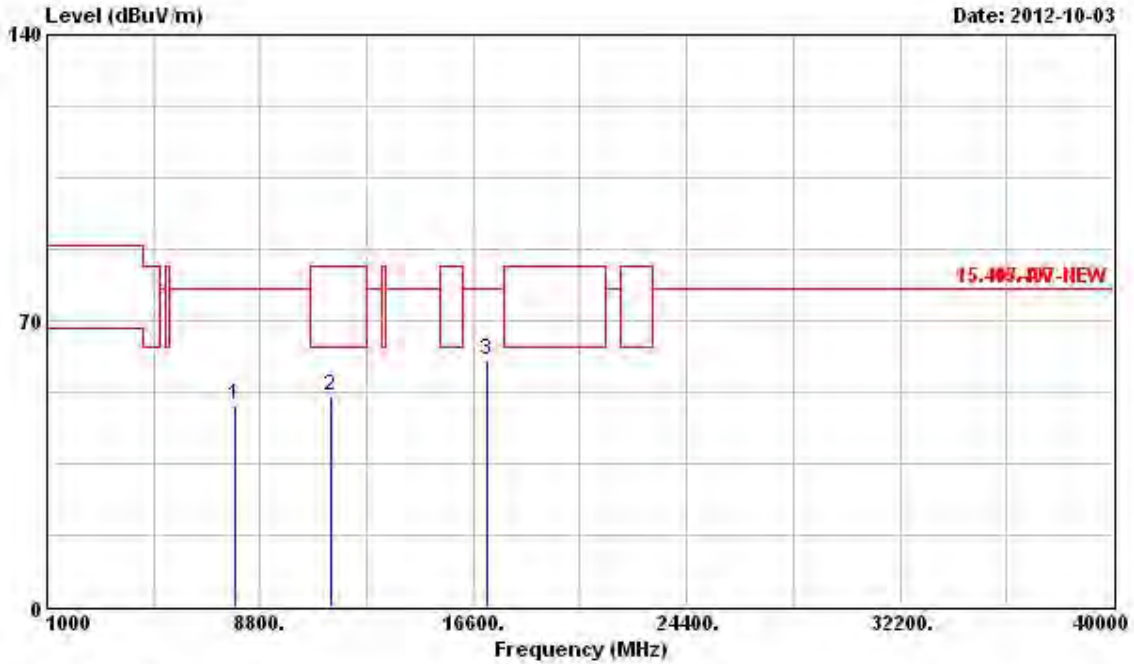


Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 7848.000	49.25	-28.59	77.84	42.84	35.87	5.77	35.23	Peak	---	---
2 11400.000	51.44	-12.10	63.54	40.61	38.84	6.71	34.72	PK	---	---
3 17100.000	60.10	-17.74	77.84	43.81	41.66	8.61	33.98	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



3.7.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11N-20M

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	HT20	Test Freq. (FX)	F1
Operating Function	Transmit	Polarization	V

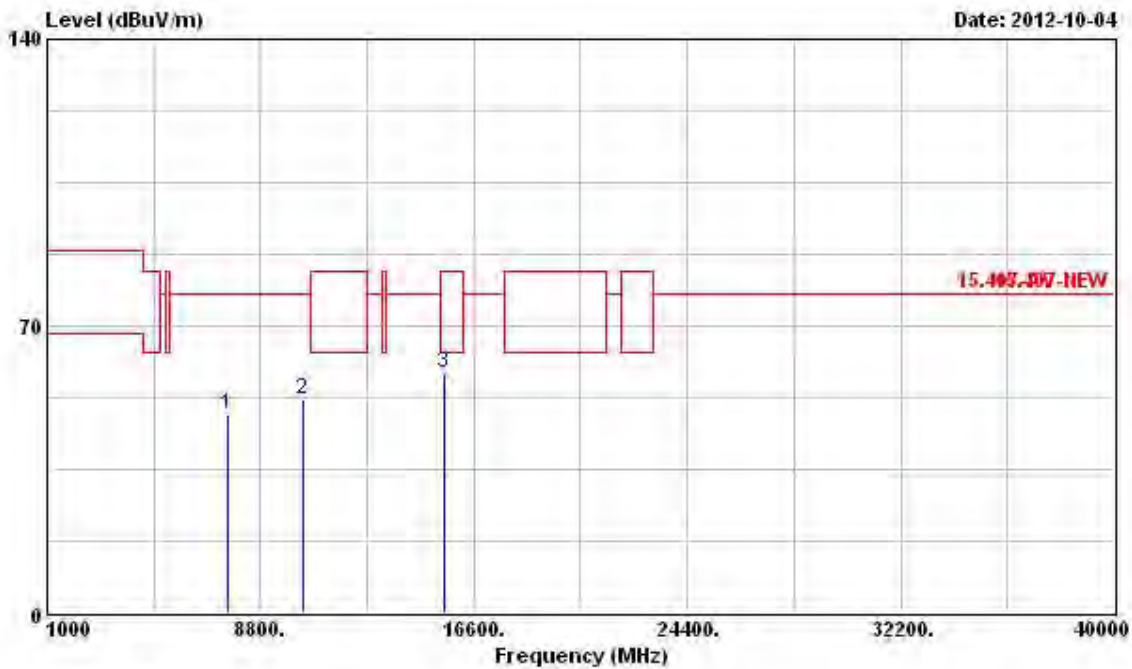


	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7620.000	48.46	-29.38	77.84	42.13	35.82	5.69	35.18 Peak	---	---
2	10360.000	51.85	-25.99	77.84	42.14	38.22	6.71	35.22 Peak	---	---
3	15540.000	58.48	-5.06	63.54	44.25	40.81	8.45	35.03 PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (FX)	F1
Operating Function	Transmit	Polarization	H

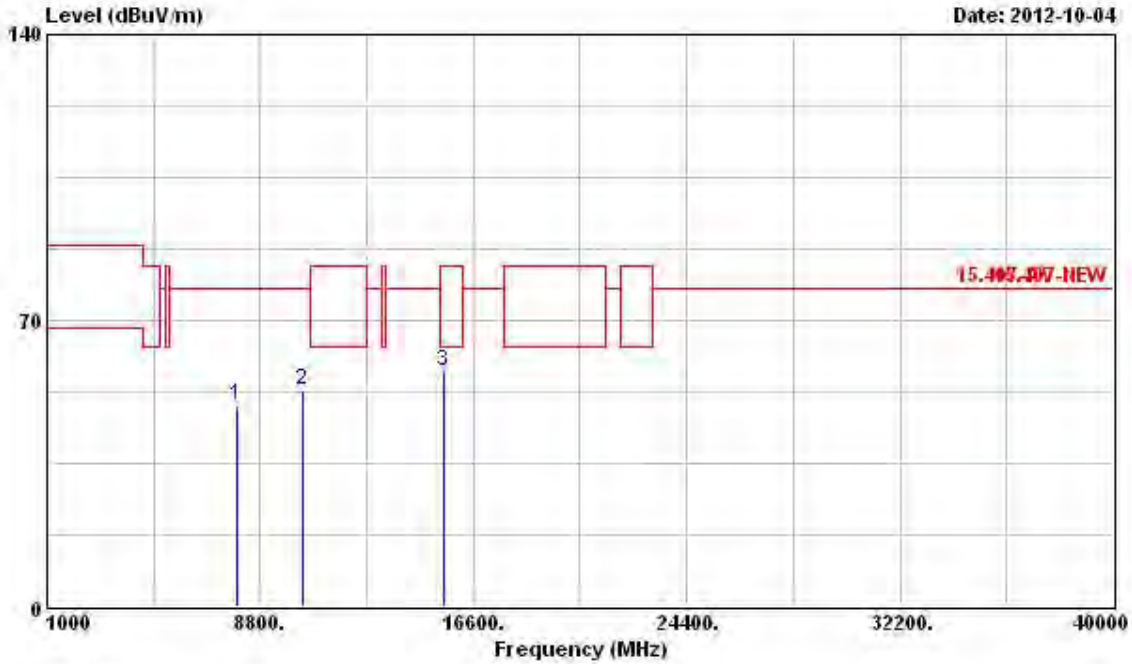


Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7944.000	49.38	-28.46	77.84	42.95	35.89	5.79	35.25 Peak	---	---
2	10360.000	52.79	-25.05	77.84	43.08	38.22	6.71	35.22 Peak	---	---
3	15540.000	57.63	-5.91	63.54	43.40	40.81	8.45	35.03 PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	V

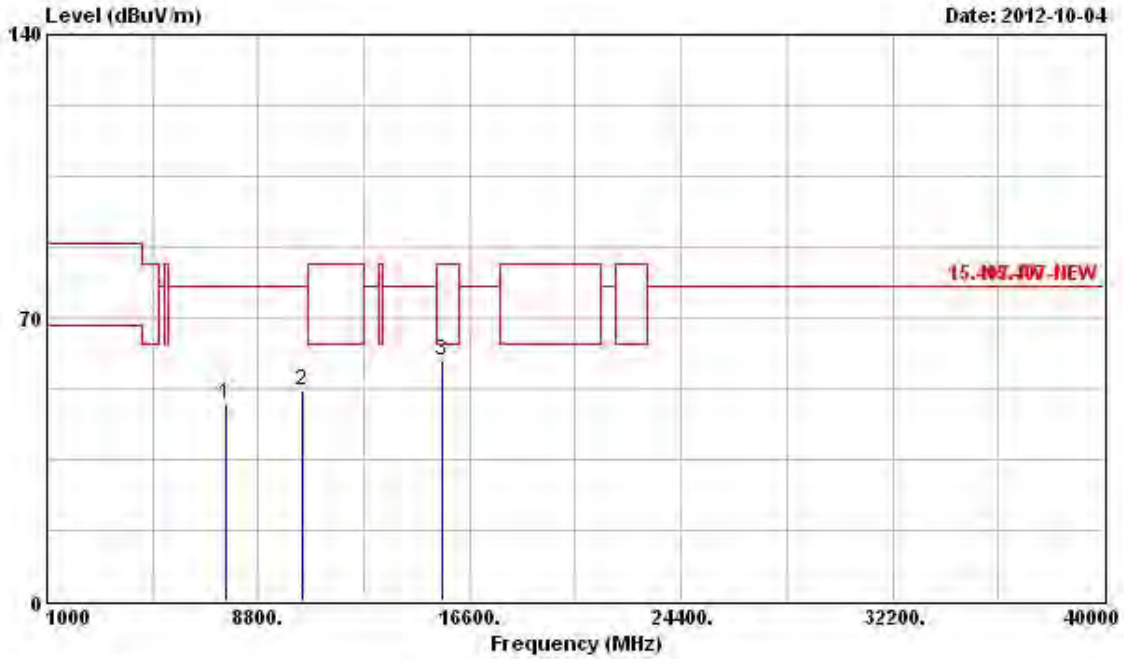


Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg
1	7608.000	48.90	-28.94	77.84	42.57	35.82	5.68	35.17 Peak	---	---
2	10400.000	51.85	-25.99	77.84	42.04	38.24	6.75	35.18 Peak	---	---
3	15600.000	59.60	-3.94	63.54	45.41	40.84	8.45	35.10 PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.




Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	HT20	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	H

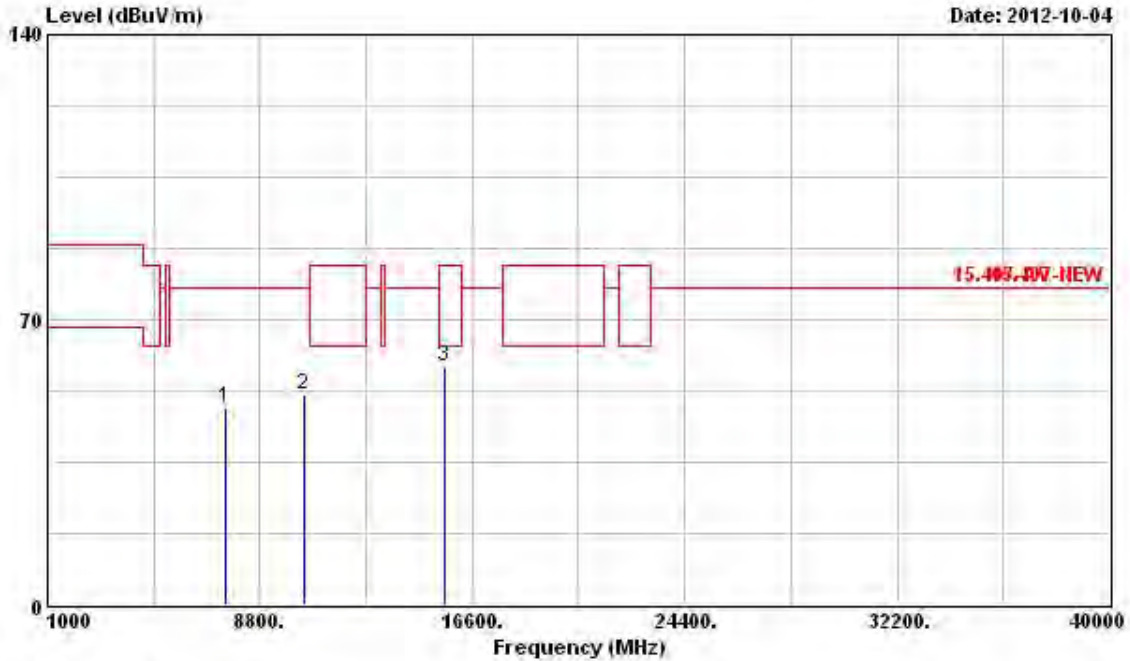

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7560.000	48.56	-29.28	77.84	42.24	35.81	5.67	35.16 Peak	---	---
2	10400.000	51.41	-26.43	77.84	41.60	38.24	6.75	35.18 Peak	---	---
3	15600.000	58.49	-5.05	63.54	44.30	40.84	8.45	35.10 PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

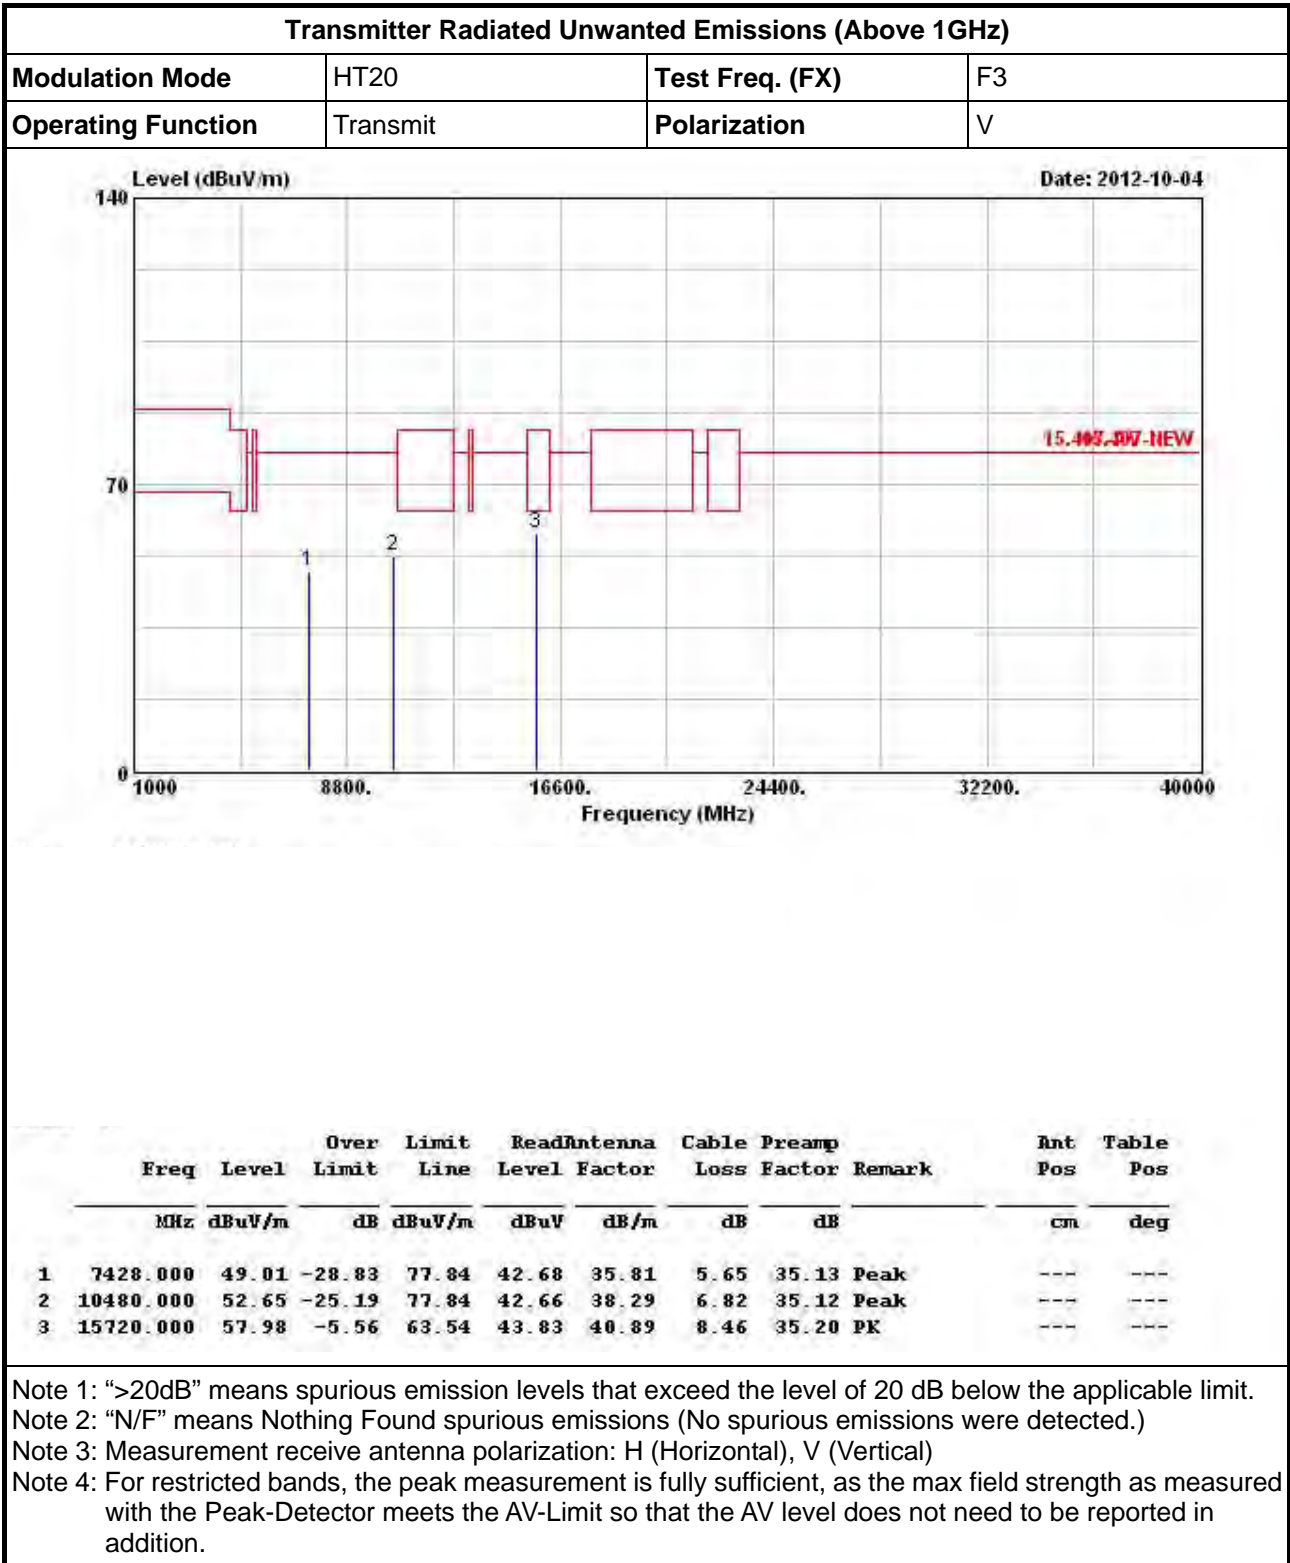


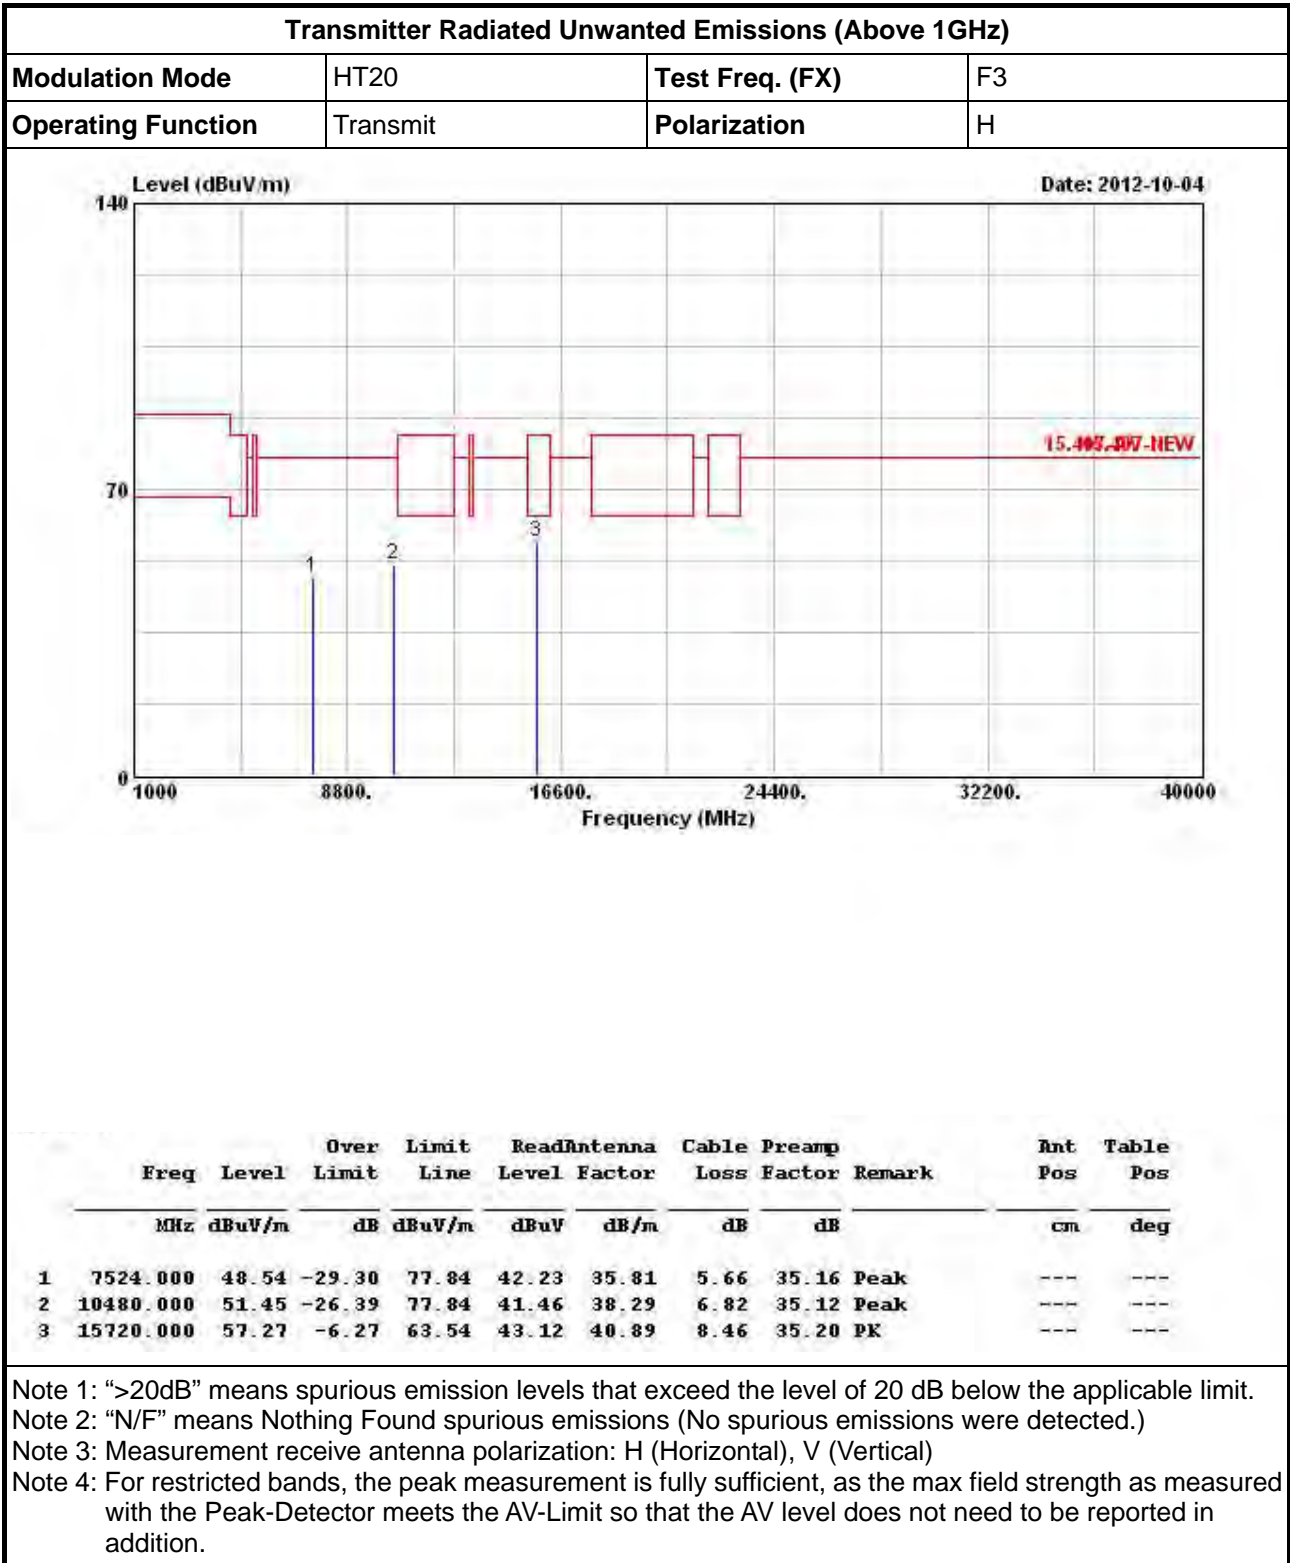



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (FX)	F4
Operating Function	Transmit	Polarization	V

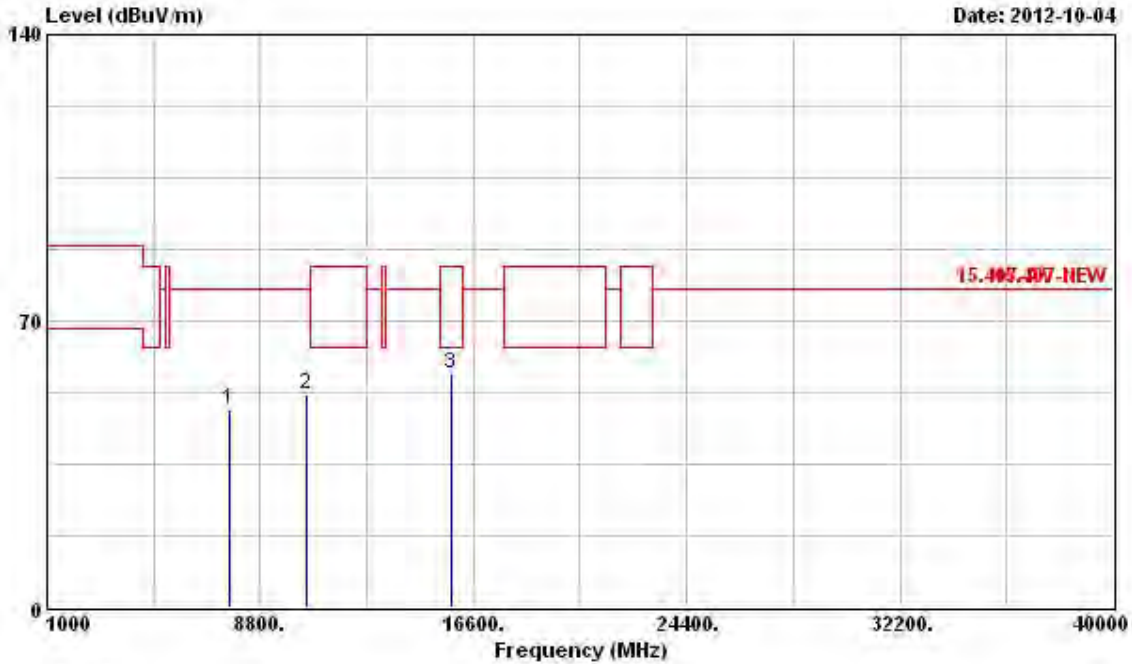


Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 7668.000	48.52	-29.32	77.84	42.17	35.83	5.71	35.19	Peak	---	---
2 10520.000	52.12	-25.72	77.84	42.06	38.31	6.85	35.10	Peak	---	---
3 15780.000	57.11	-6.43	63.54	43.02	40.91	8.46	35.28	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (FX)	F4
Operating Function	Transmit	Polarization	H

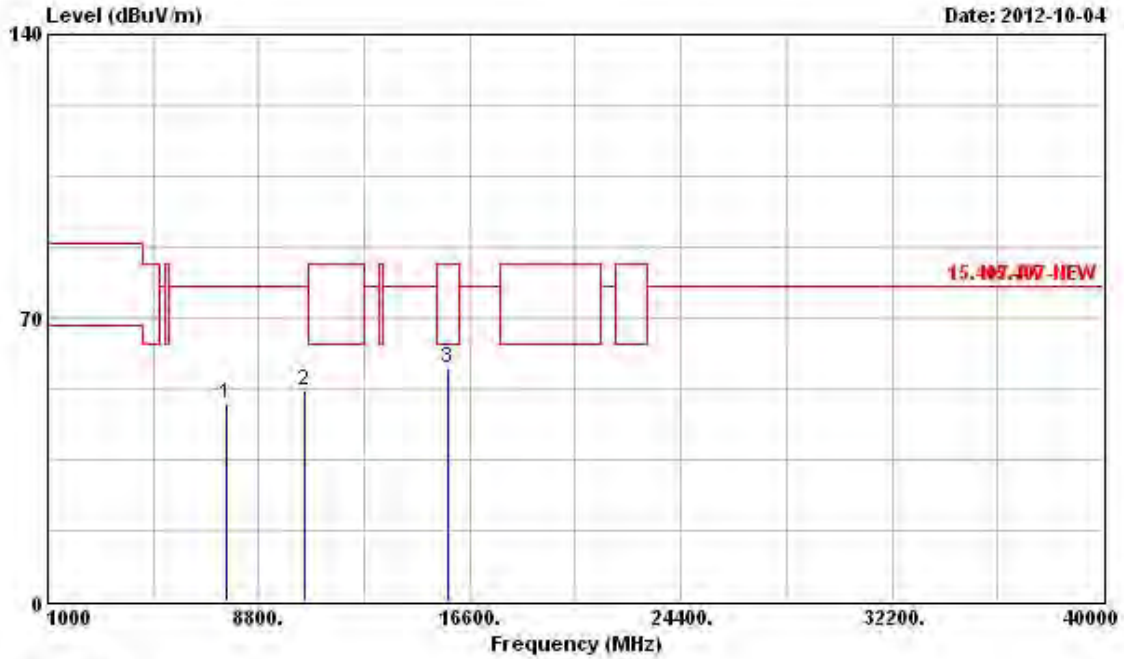


Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg
1 7572.000	48.66	-29.18	77.84	42.33	35.82	5.68	35.17	Peak	---	---
2 10520.000	51.97	-25.87	77.84	41.91	38.31	6.85	35.10	Peak	---	---
3 15780.000	57.64	-5.90	63.54	43.55	40.91	8.46	35.28	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (FX)	F5
Operating Function	Transmit	Polarization	V

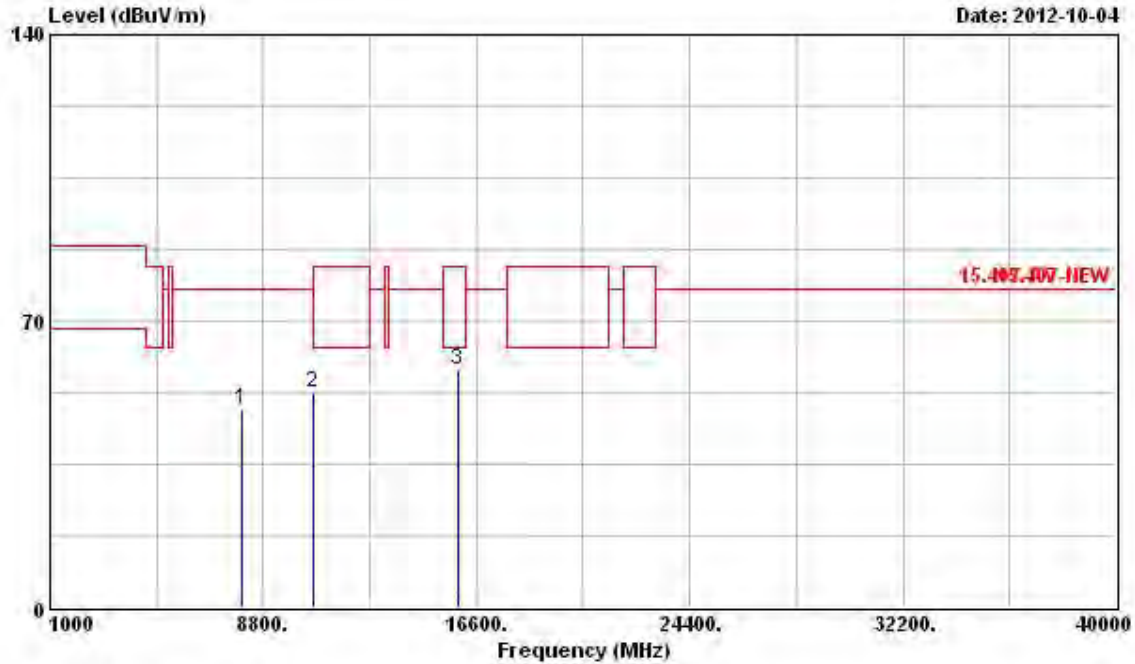


Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7992.000	48.39	-29.45	77.84	41.95	35.90	5.80	35.26 Peak	---	---
2	10600.000	52.53	-11.01	63.54	42.31	38.36	6.90	35.04 PK	---	---
3	15900.000	57.85	-5.69	63.54	43.80	40.96	8.47	35.38 PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (FX)	F5
Operating Function	Transmit	Polarization	H

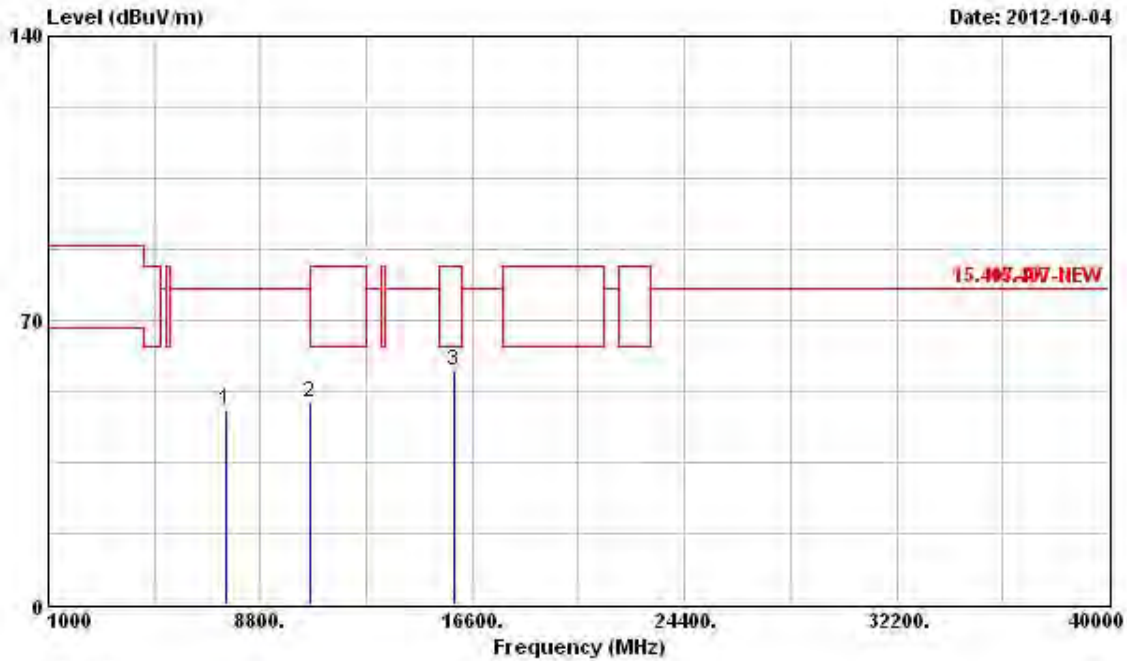


Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		cm	deg
1	7560.000	47.69	-30.15	77.84	41.37	35.81	5.67 35.16 Peak	---	---
2	10600.000	49.92	-13.62	63.54	39.70	38.36	6.90 35.04 PK	---	---
3	15900.000	57.45	-6.09	63.54	43.40	40.96	8.47 35.38 PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (FX)	F6
Operating Function	Transmit	Polarization	V

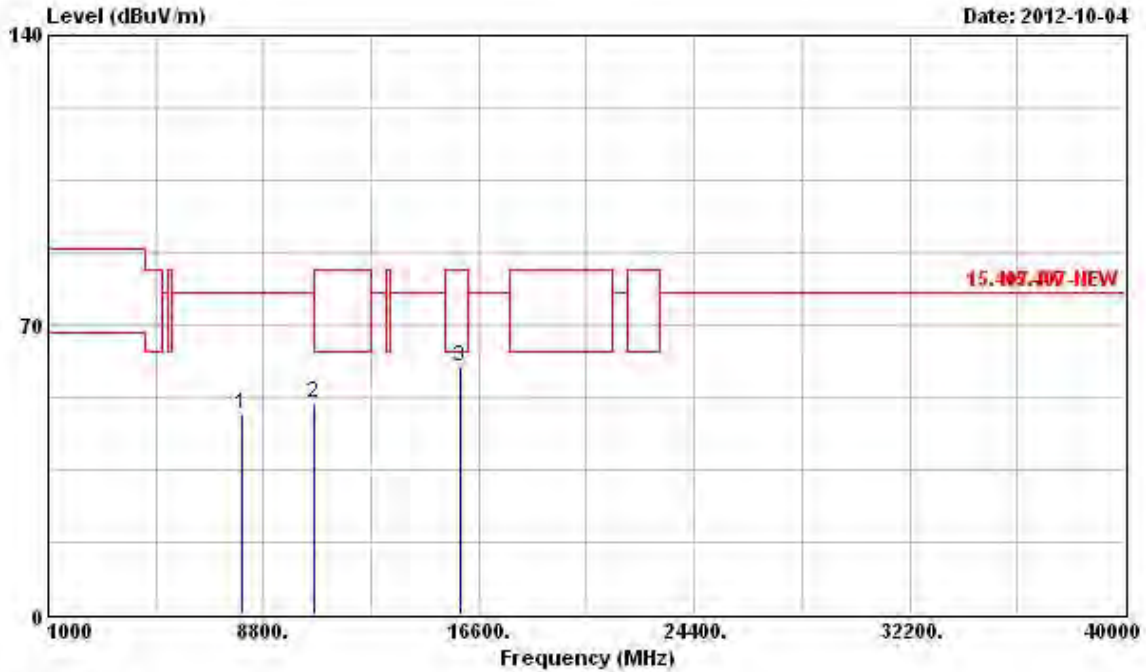


Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7992.000	48.47	-29.37	77.84	42.03	35.90	5.80	35.26 Peak	---	---
2	10640.000	50.98	-12.56	63.54	40.67	38.38	6.93	35.00 PK	---	---
3	15960.000	59.90	-3.64	63.54	45.89	40.99	8.47	35.45 PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (FX)	F6
Operating Function	Transmit	Polarization	H

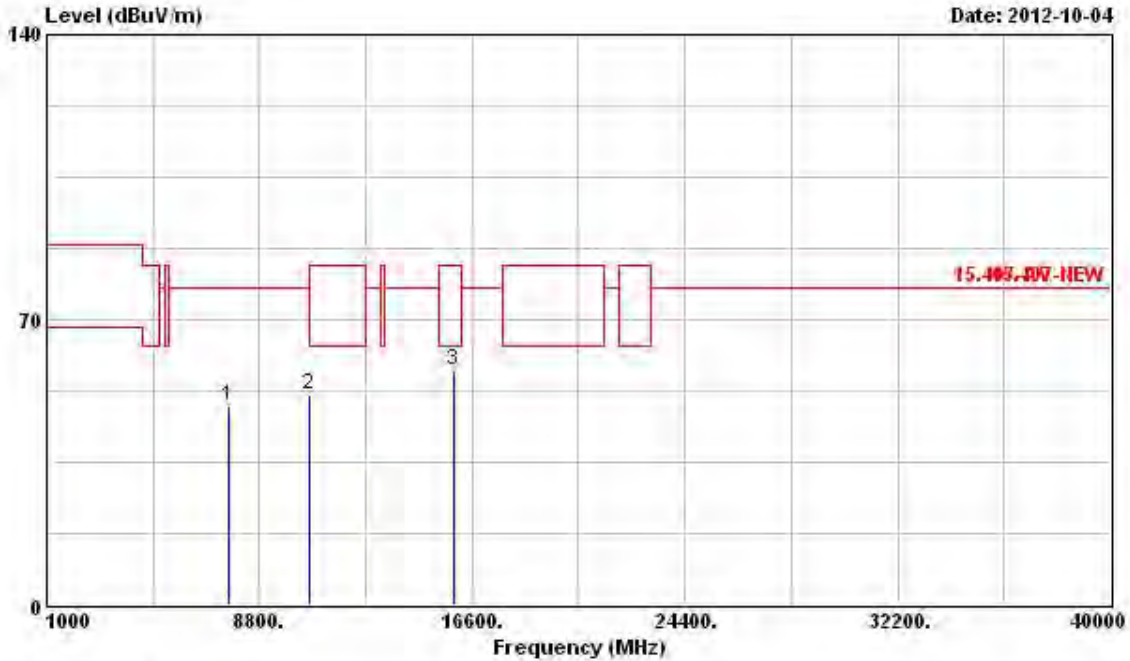


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7656.000	48.60	-29.24	77.84	42.25	35.83	5.71	35.19	Peak	---	---
2	10640.000	51.64	-11.90	63.54	41.33	38.38	6.93	35.00	PK	---	---
3	15960.000	57.56	-5.98	63.54	43.55	40.99	8.47	35.45	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (FX)	F7
Operating Function	Transmit	Polarization	V

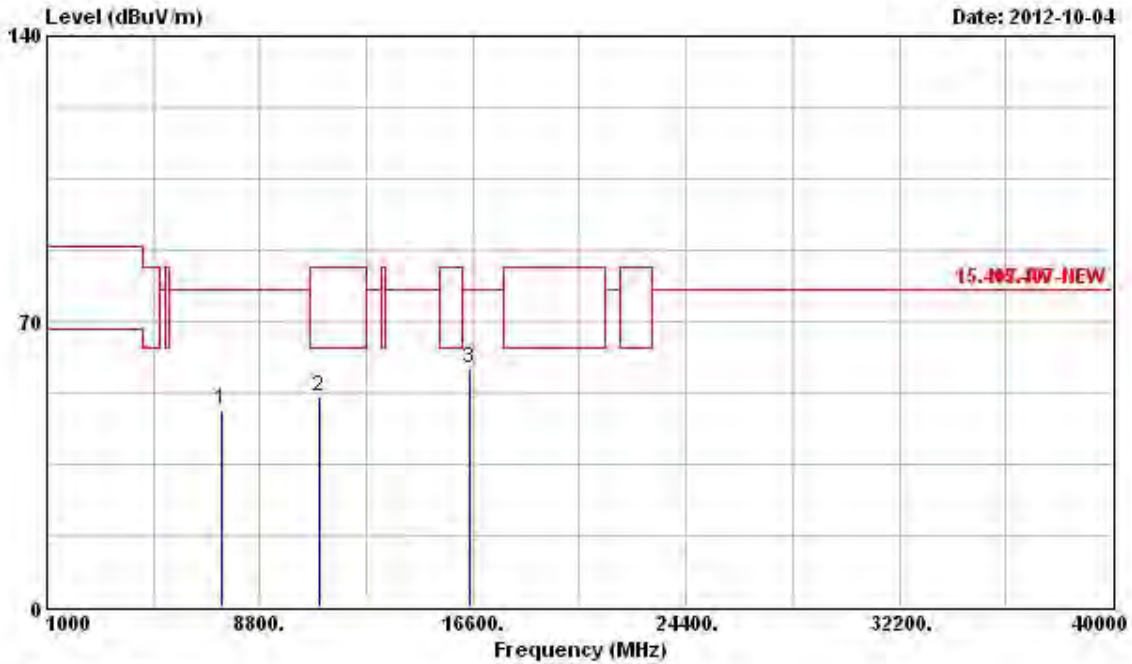


Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable Preamp	Loss Factor	Preamp	Remark	Ant Pos	Table Pos
MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg
1	7368.000	48.46	-29.38	77.84	42.12	35.82	5.64	35.12 Peak	---	---
2	11000.000	51.63	-11.91	63.54	40.58	38.60	7.17	34.72 PK	---	---
3	16500.000	58.52	-19.32	77.84	43.27	42.00	8.24	34.99 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.




Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (FX)	F7
Operating Function	Transmit	Polarization	H

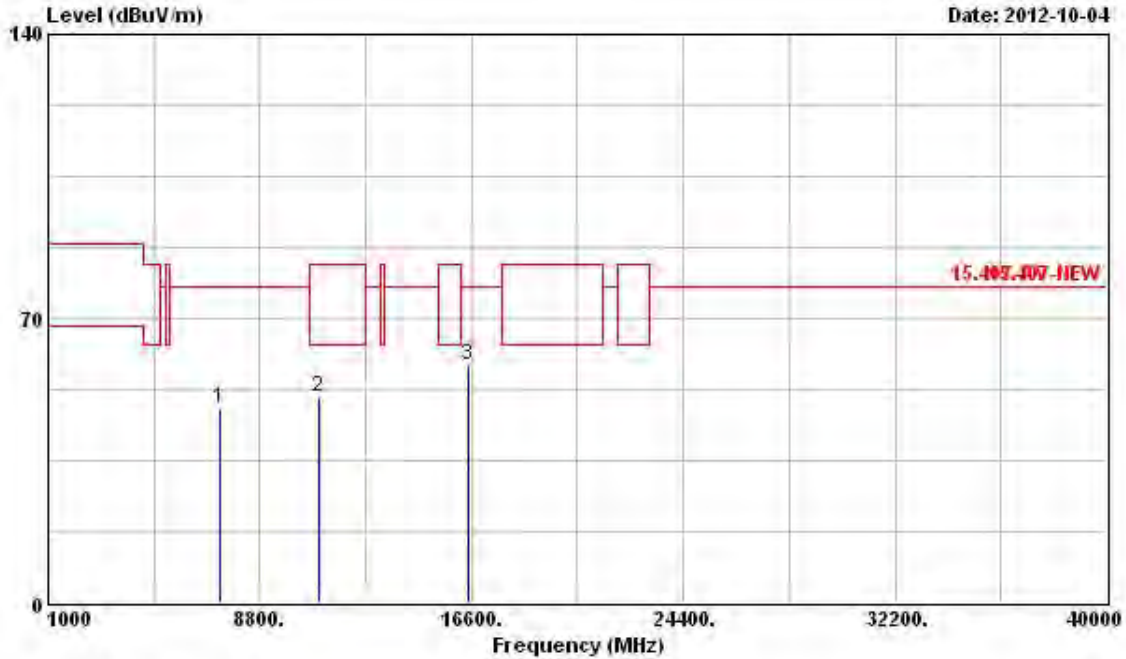

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg
1	7320.000	48.09	-29.75	77.84	41.72	35.83	5.64	35.10 Peak	---	---
2	11000.000	50.86	-32.68	83.54	39.81	38.60	7.17	34.72 PK	---	---
3	16500.000	58.36	-19.48	77.84	43.11	42.00	8.24	34.99 Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

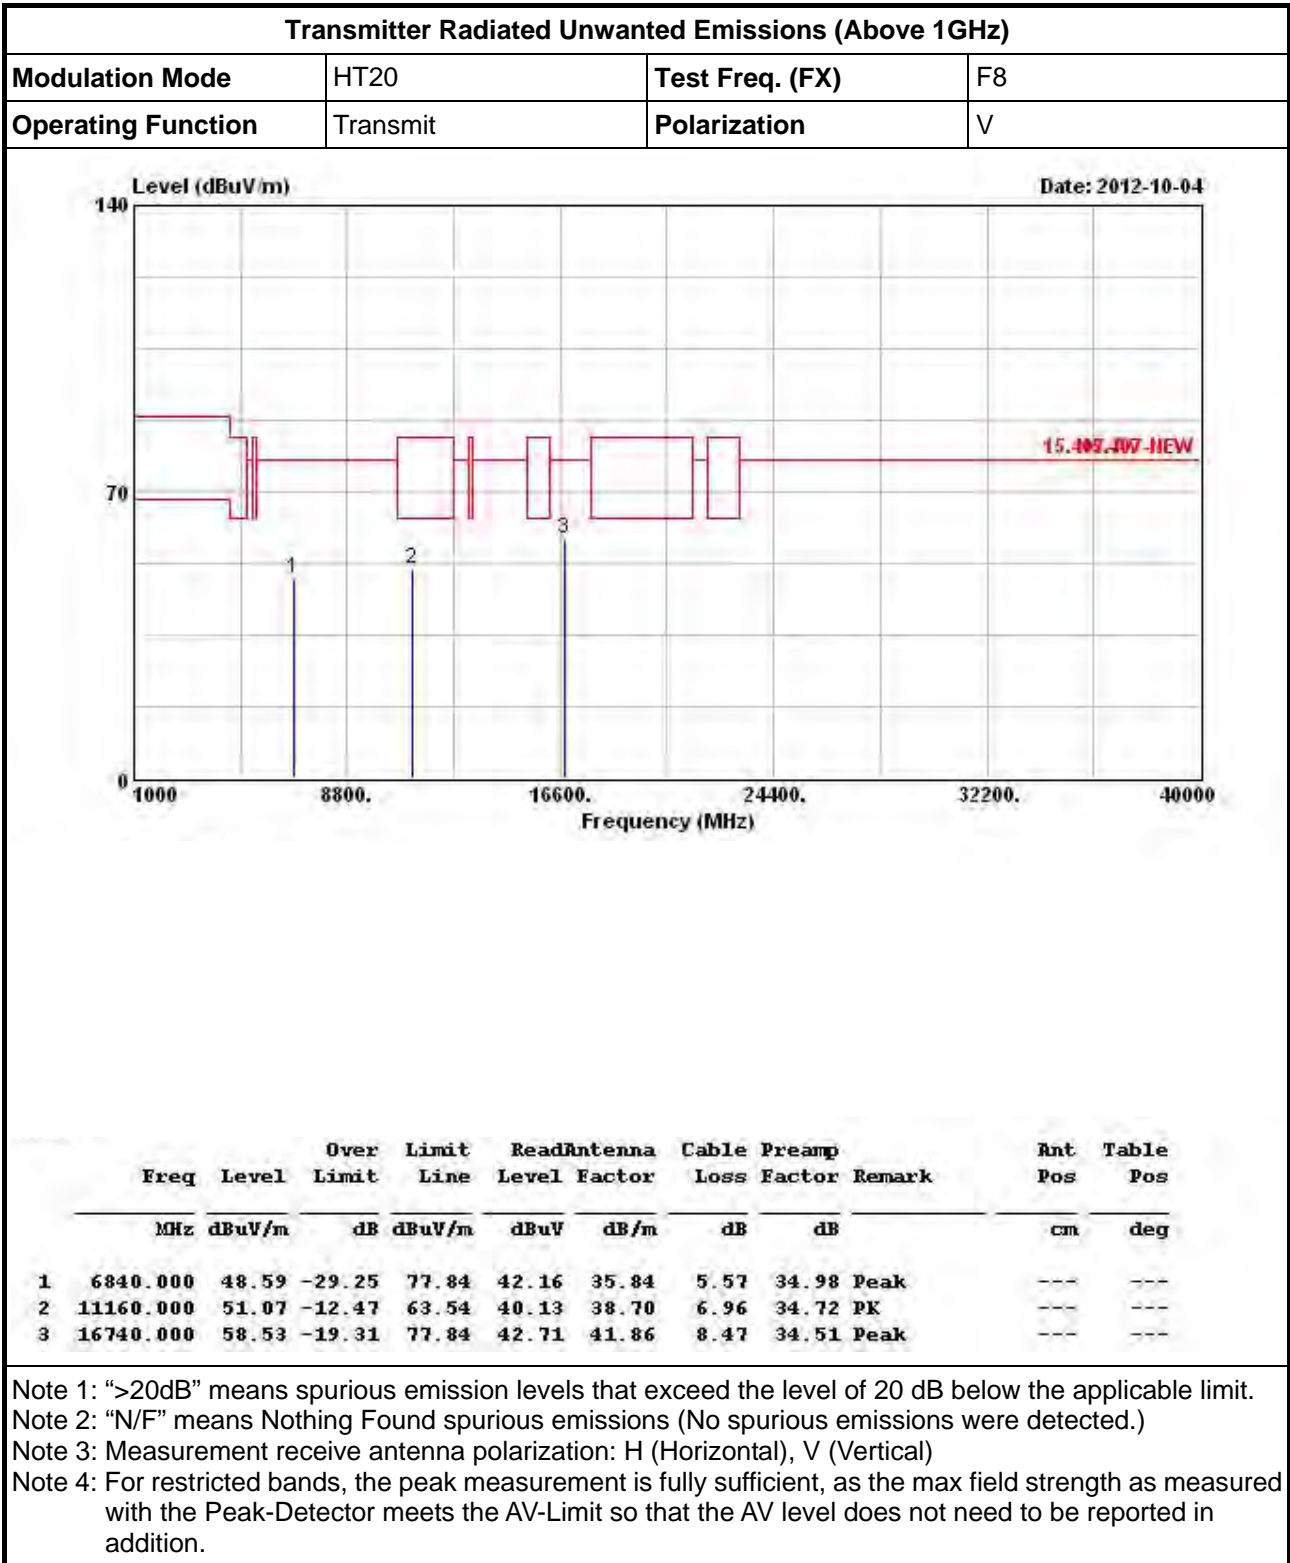



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (FX)	F8
Operating Function	Transmit	Polarization	H

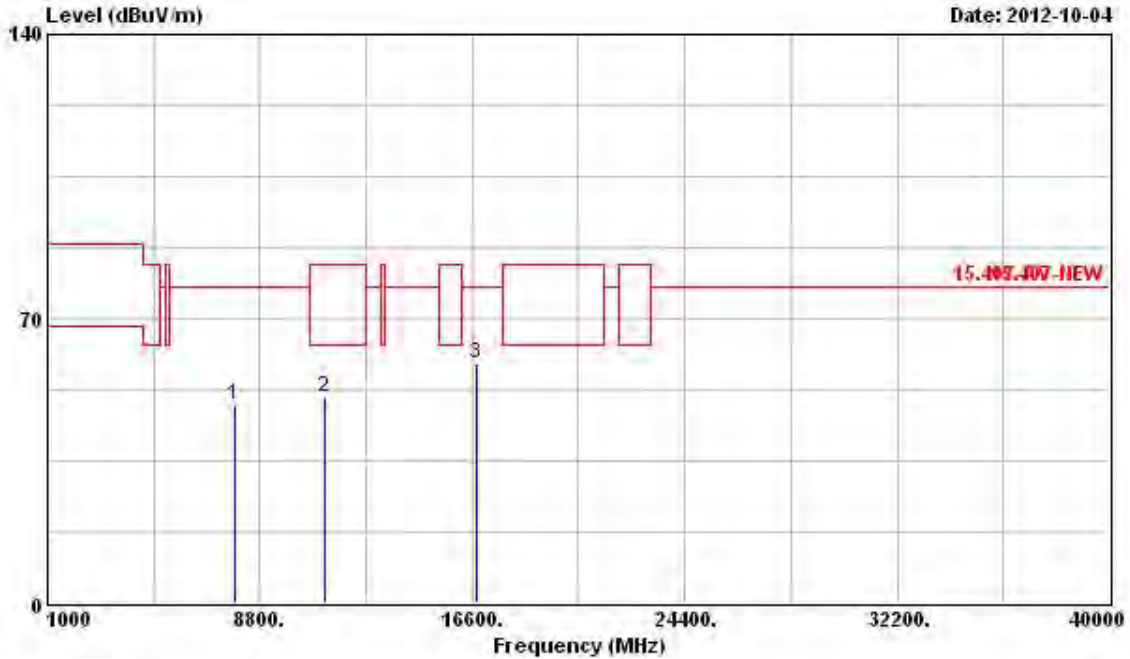


Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Remark	Ant Pos	Table Pos		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		
1	7848.000	48.61	-29.23	77.84	42.20	35.87	5.77	35.23	Peak	---	---
2	11160.000	50.69	-12.85	63.54	39.75	38.70	6.96	34.72	PK	---	---
3	16740.000	58.82	-19.02	77.84	43.00	41.86	8.47	34.51	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.




Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (FX)	F9
Operating Function	Transmit	Polarization	V

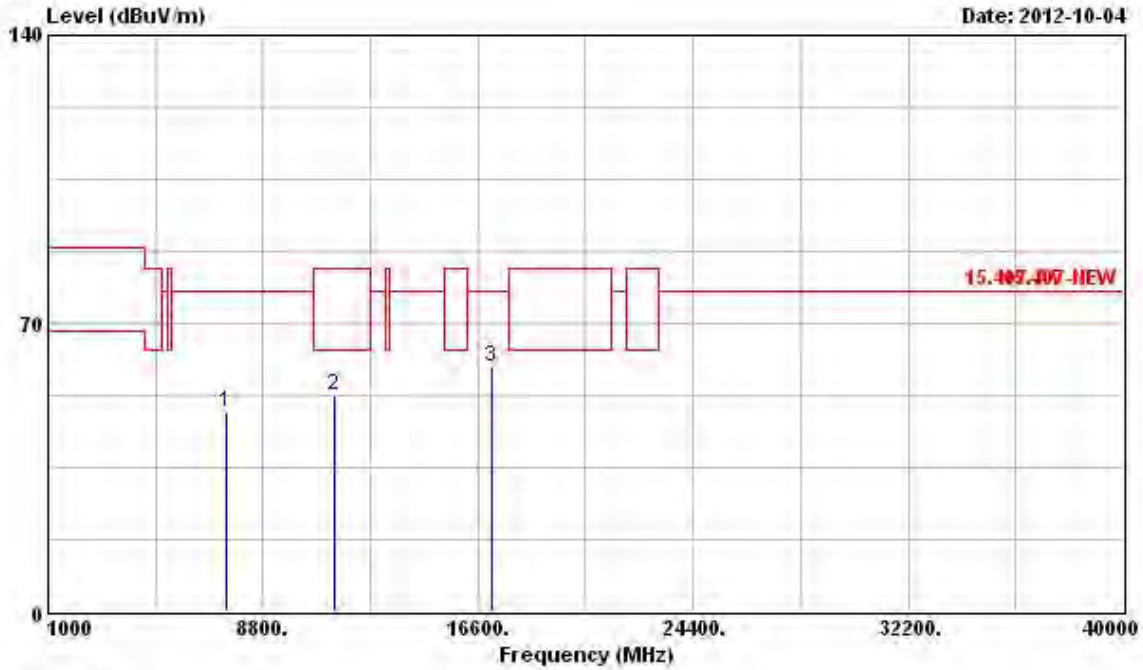

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark	Rnt Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7464.000	48.17	-29.67	77.84	41.84	35.81	5.66	35.14	Peak	---	---
2	11400.000	52.67	-10.87	63.54	41.84	38.84	6.71	34.72	PK	---	---
3	17100.000	59.31	-18.53	77.84	43.02	41.66	8.61	33.98	Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

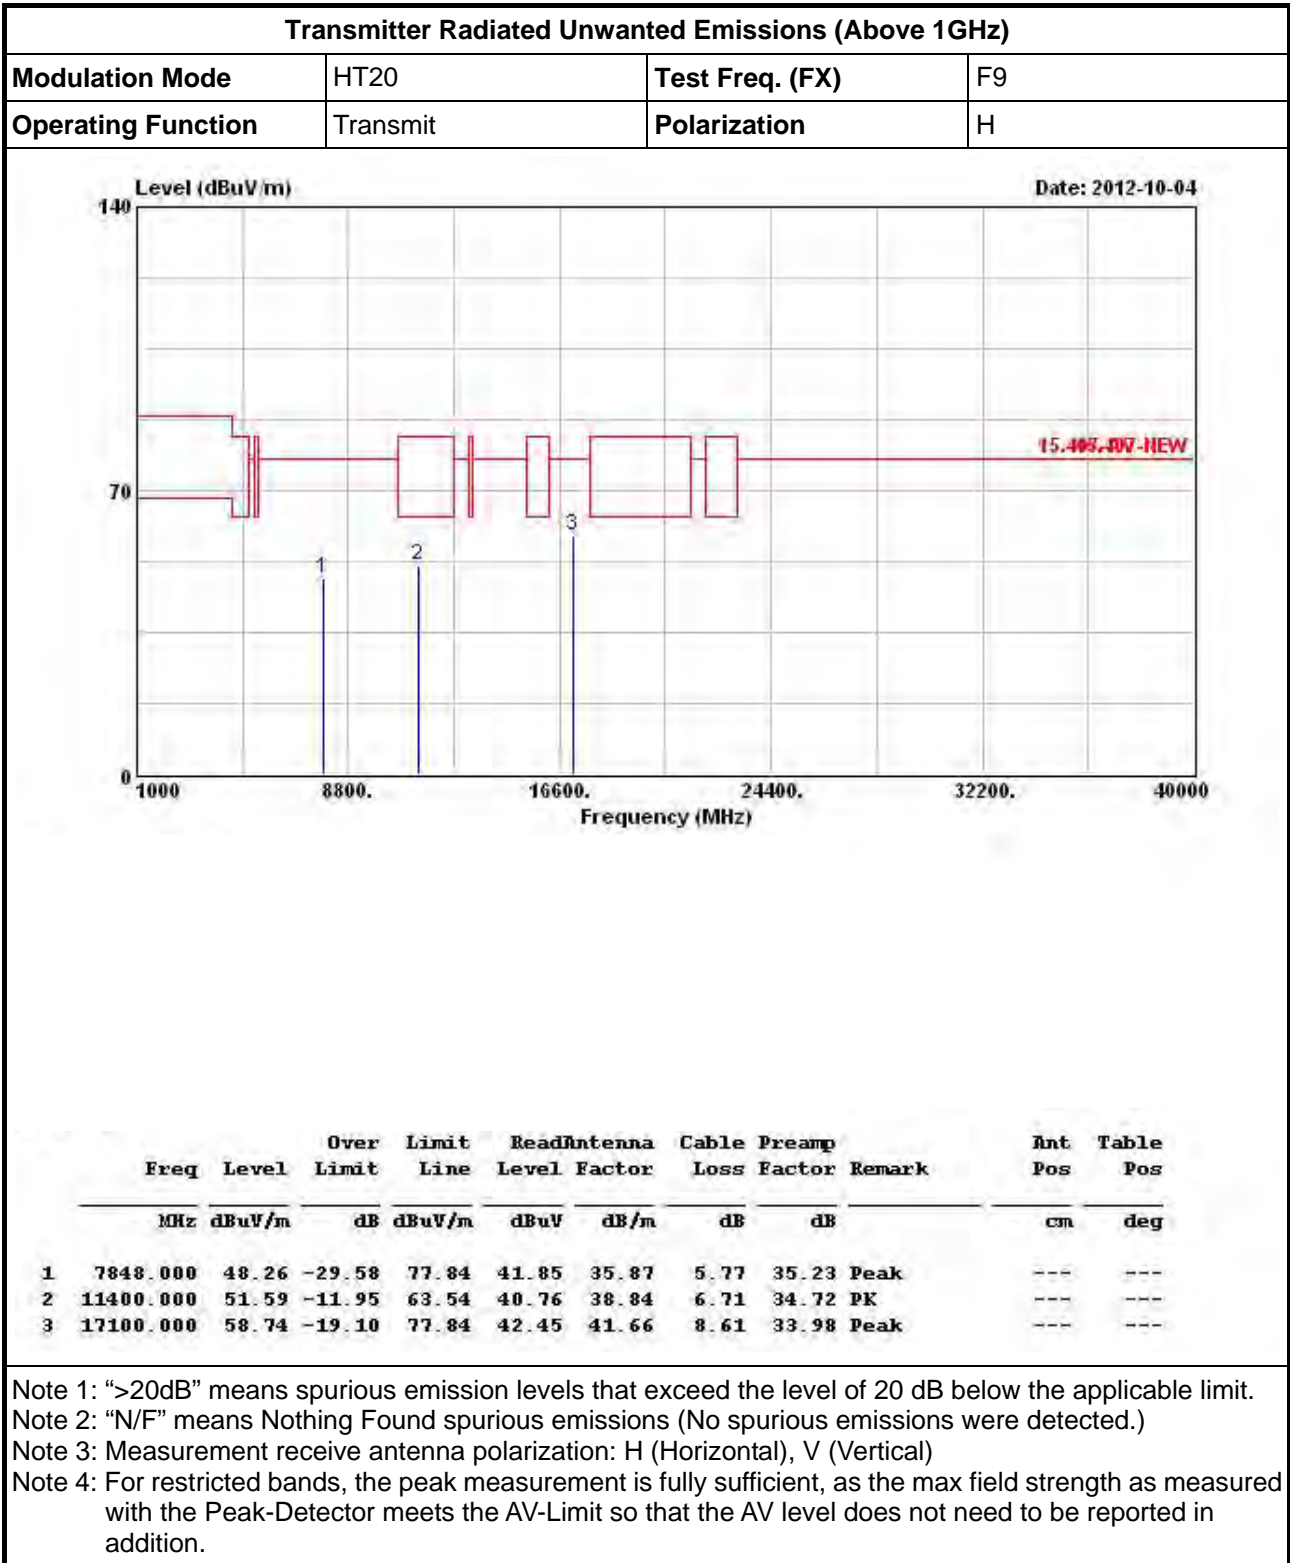



3.7.9 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11N-40M

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	HT40	Test Freq. (FX)	F1'
Operating Function	Transmit	Polarization	V

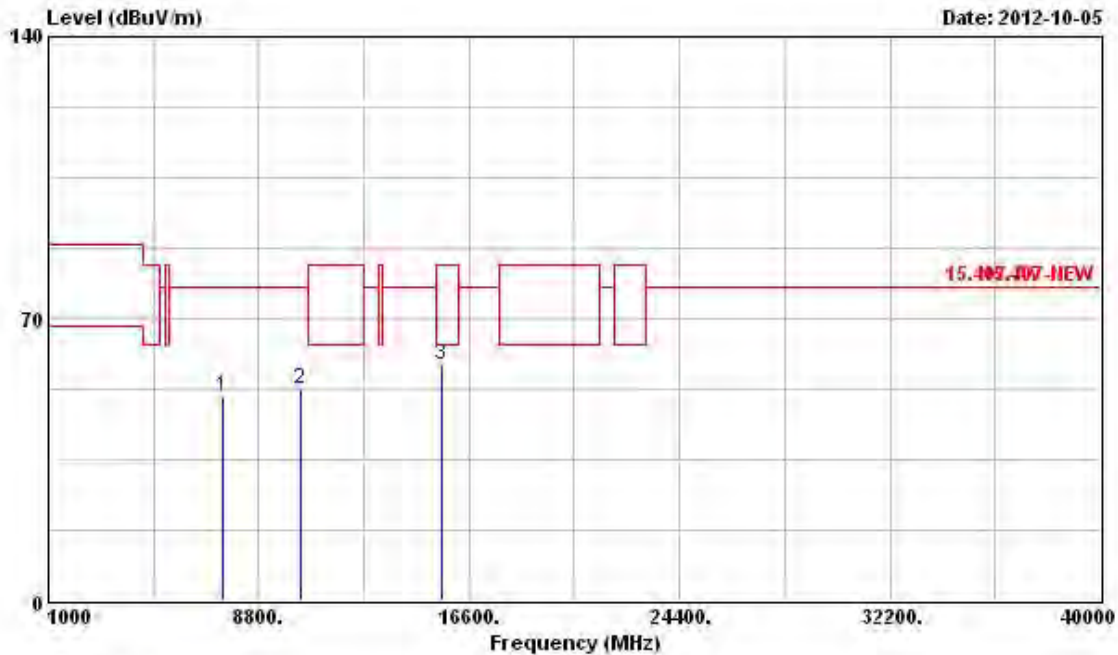


Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7464.000	50.61	-27.23	77.84	44.28	35.81	5.66	35.14 Peak	---	---
2	10380.000	52.58	-25.26	77.84	42.80	38.23	6.75	35.20 Peak	---	---
3	15570.000	58.54	-5.00	63.54	44.31	40.83	8.45	35.05 PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (FX)	F1'
Operating Function	Transmit	Polarization	H

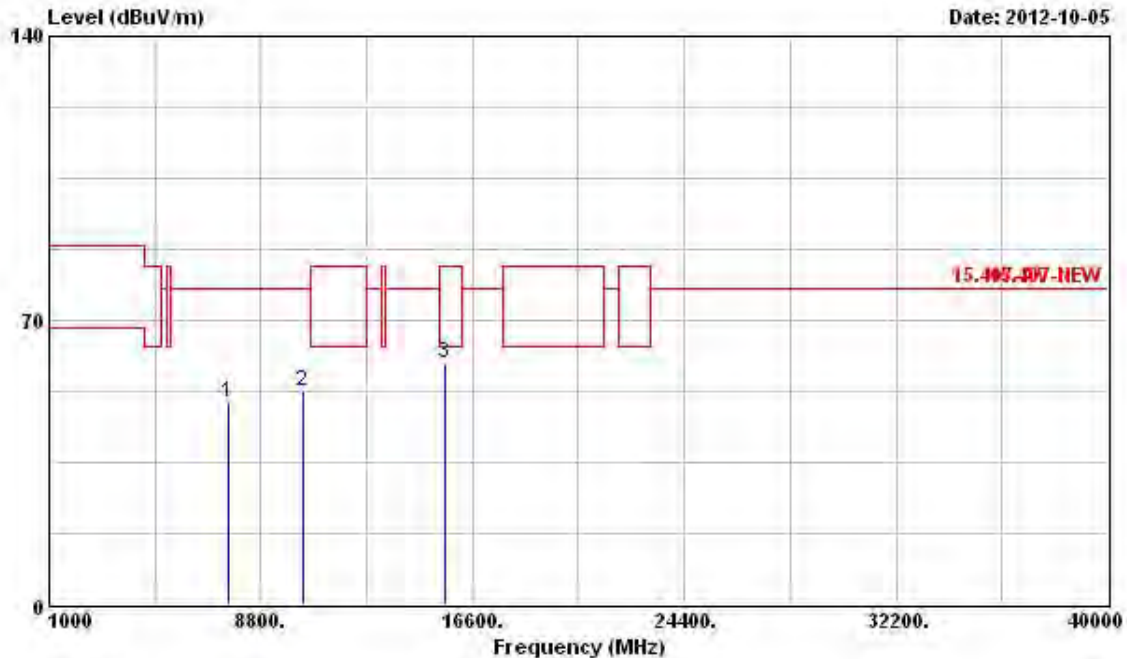


Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7608.000	49.74	-28.10	77.84	43.41	35.82	5.68	35.17 Peak	---	---
2	10380.000	52.73	-25.11	77.84	42.95	38.23	6.75	35.20 Peak	---	---
3	15570.000	59.19	-4.35	63.54	44.96	40.83	8.45	35.05 PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.




Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (FX)	F2'
Operating Function	Transmit	Polarization	V

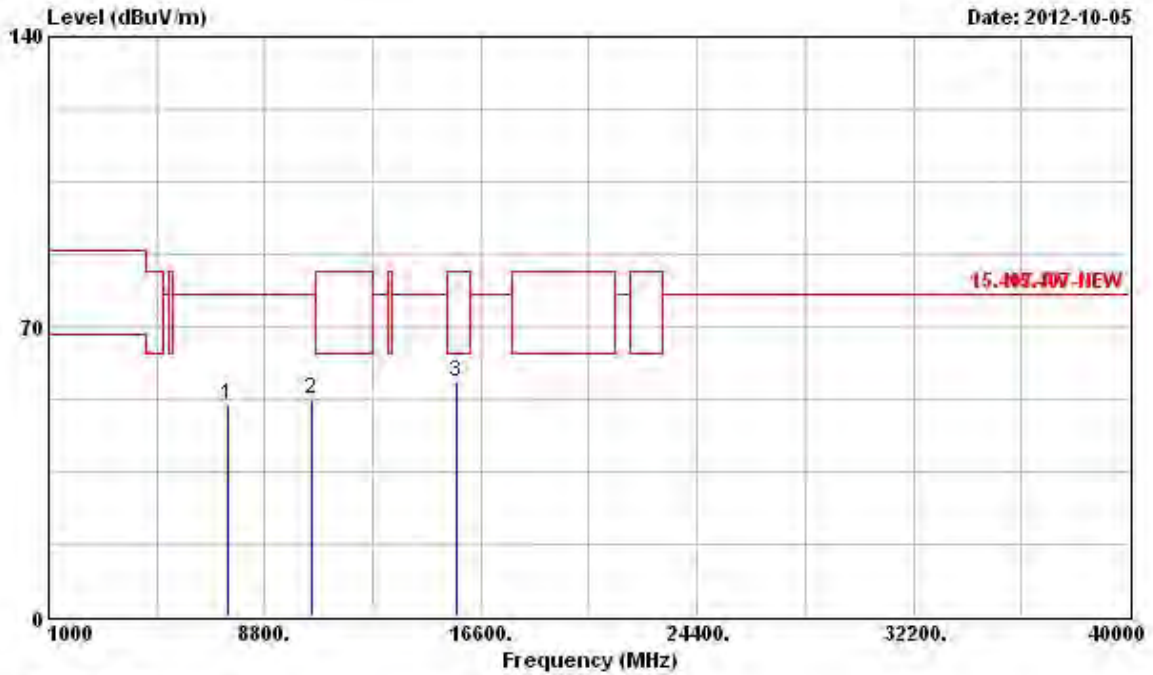

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg
1	7476.000	50.90	-26.94	77.84	44.58	35.80	5.66	35.14	Peak	---	---
2	10460.000	52.27	-25.57	77.84	42.32	38.27	6.82	35.14	Peak	---	---
3	15690.000	56.57	-6.97	63.54	42.41	40.88	8.46	35.18	PK	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

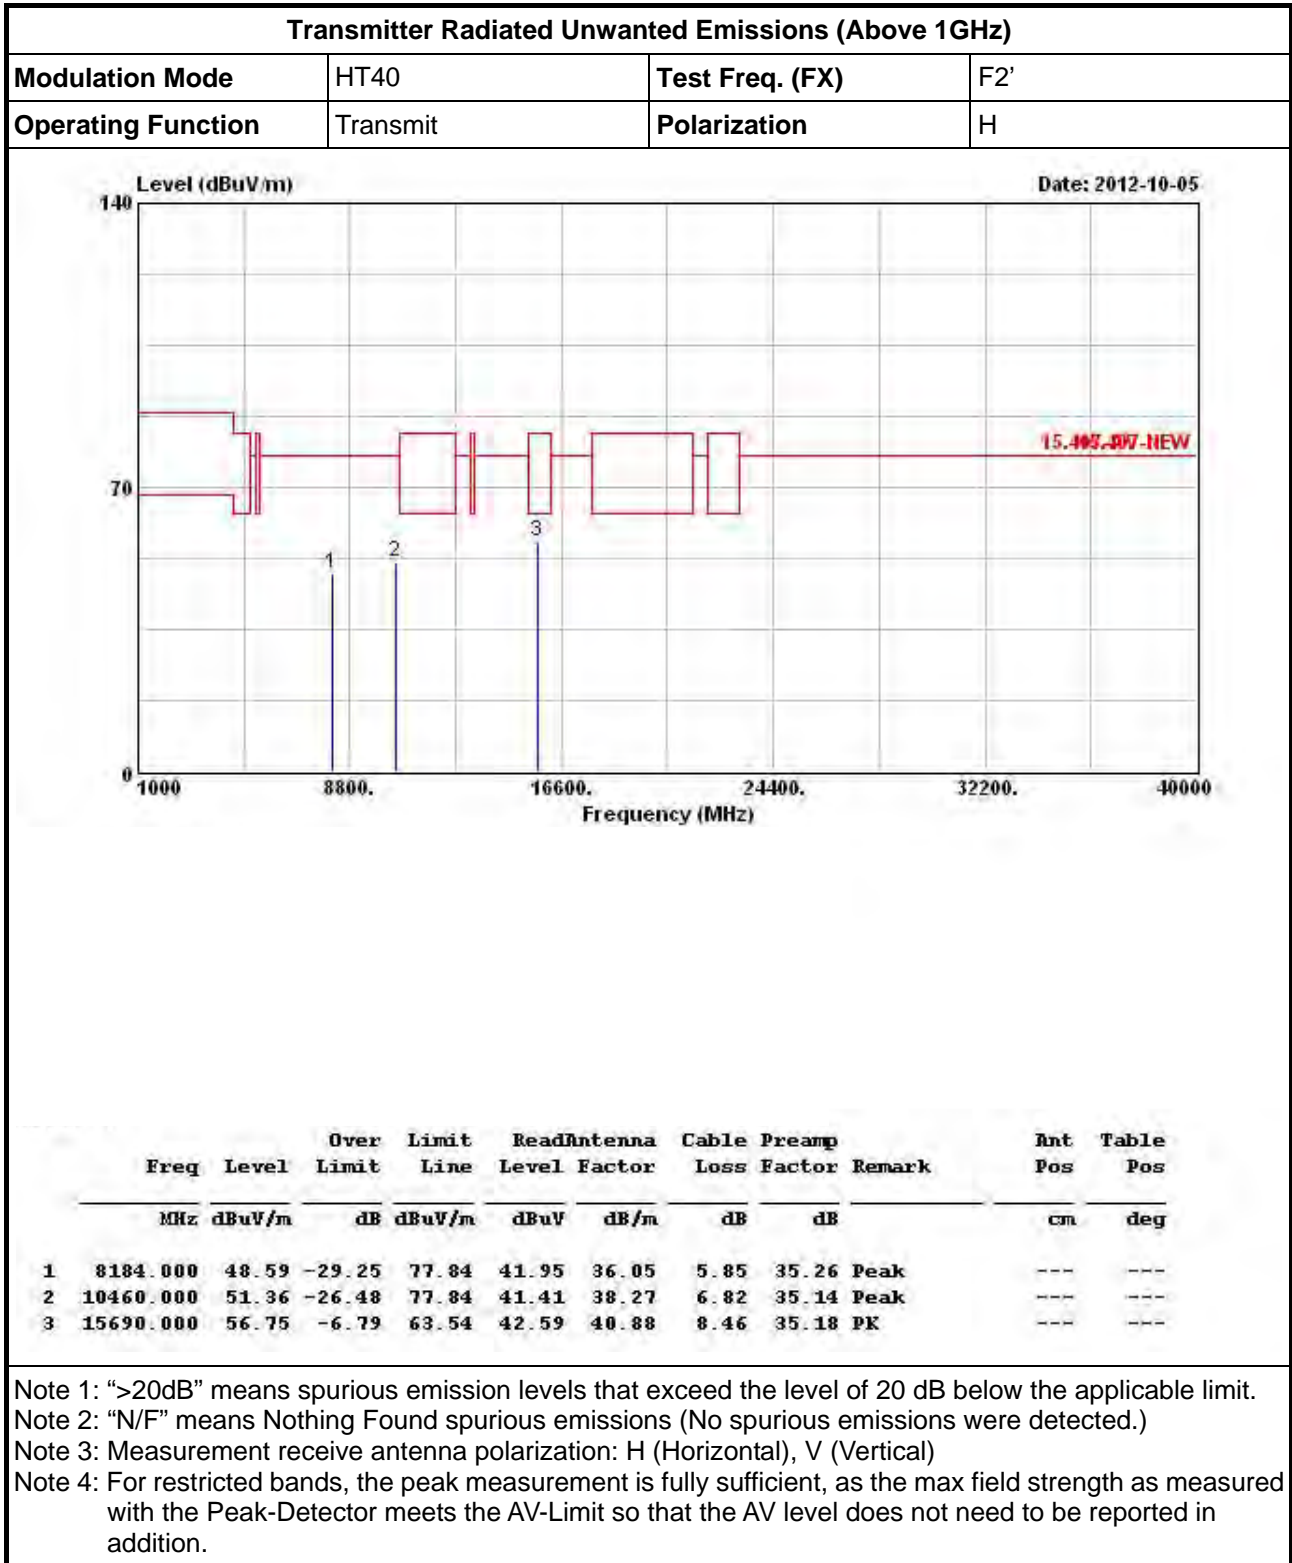



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (FX)	F4'
Operating Function	Transmit	Polarization	V

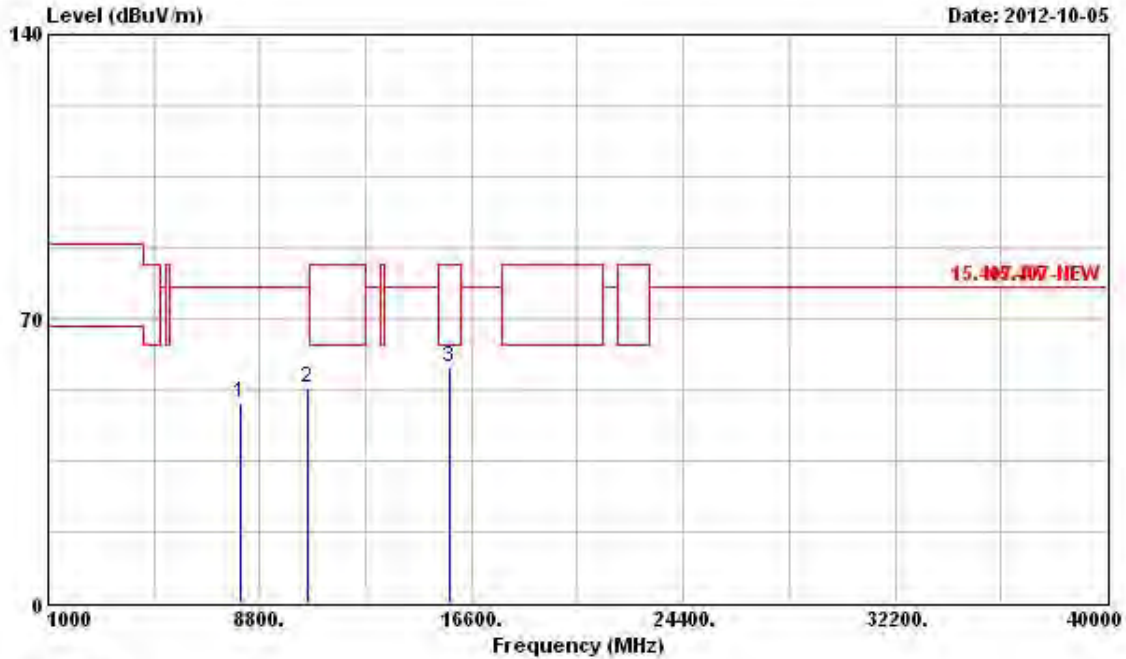


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg
1	8088.000	49.06	-28.78	77.84	42.53	35.97	5.83	35.27	Peak	---	---
2	10540.000	52.96	-24.88	77.84	42.84	38.32	6.88	35.08	Peak	---	---
3	15810.000	58.06	-5.48	63.54	43.98	40.92	8.46	35.30	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (FX)	F4'
Operating Function	Transmit	Polarization	H

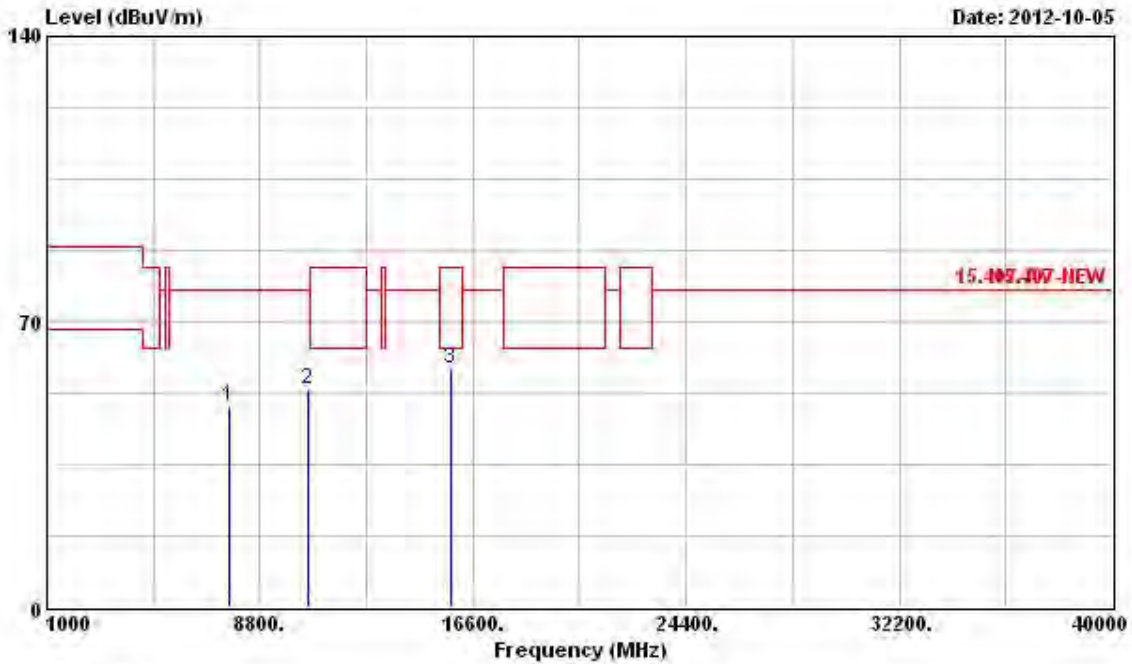


Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7668.000	49.28	-28.56	77.84	42.93	35.83	5.71	35.19 Peak	---	---
2	10540.000	53.31	-24.53	77.84	43.19	38.32	6.88	35.08 Peak	---	---
3	15810.000	58.35	-5.19	63.54	44.27	40.92	8.46	35.30 PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (FX)	F5'
Operating Function	Transmit	Polarization	V

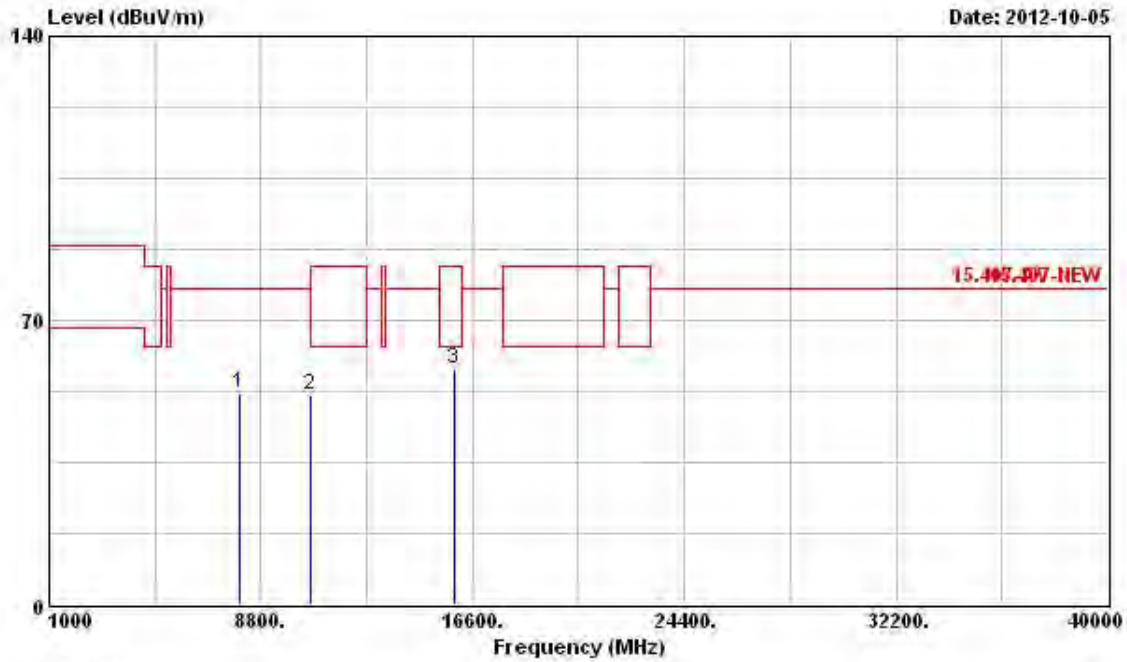


Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7992.000	51.89	-25.95	77.84	45.45	35.90	5.80	35.26 Peak	---	---
2	10620.000	51.69	-11.85	63.54	41.41	38.37	6.93	35.02 PK	---	---
3	15930.000	57.96	-5.58	63.54	43.92	40.97	8.47	35.40 PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (FX)	F5'
Operating Function	Transmit	Polarization	H

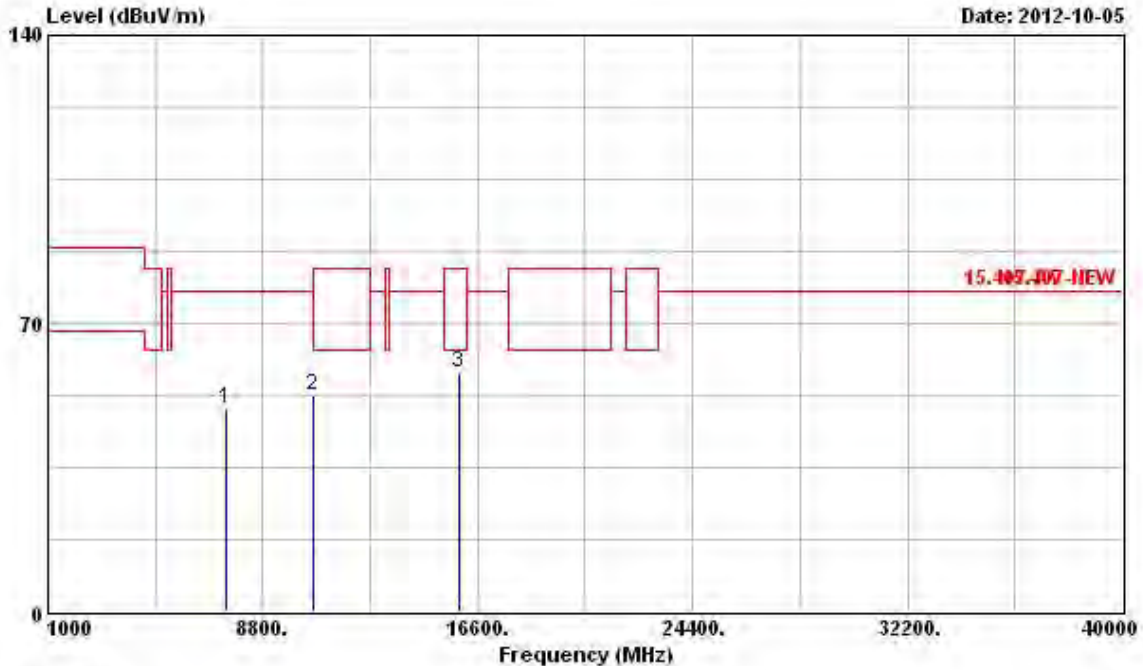


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Rnt Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7476.000	49.15	-28.69	77.84	42.83	35.80	5.66	35.14	Peak	---	---
2	10620.000	52.72	-10.82	63.54	42.44	38.37	6.93	35.02	PK	---	---
3	15930.000	58.14	-5.40	63.54	44.10	40.97	8.47	35.40	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (FX)	F7'
Operating Function	Transmit	Polarization	V

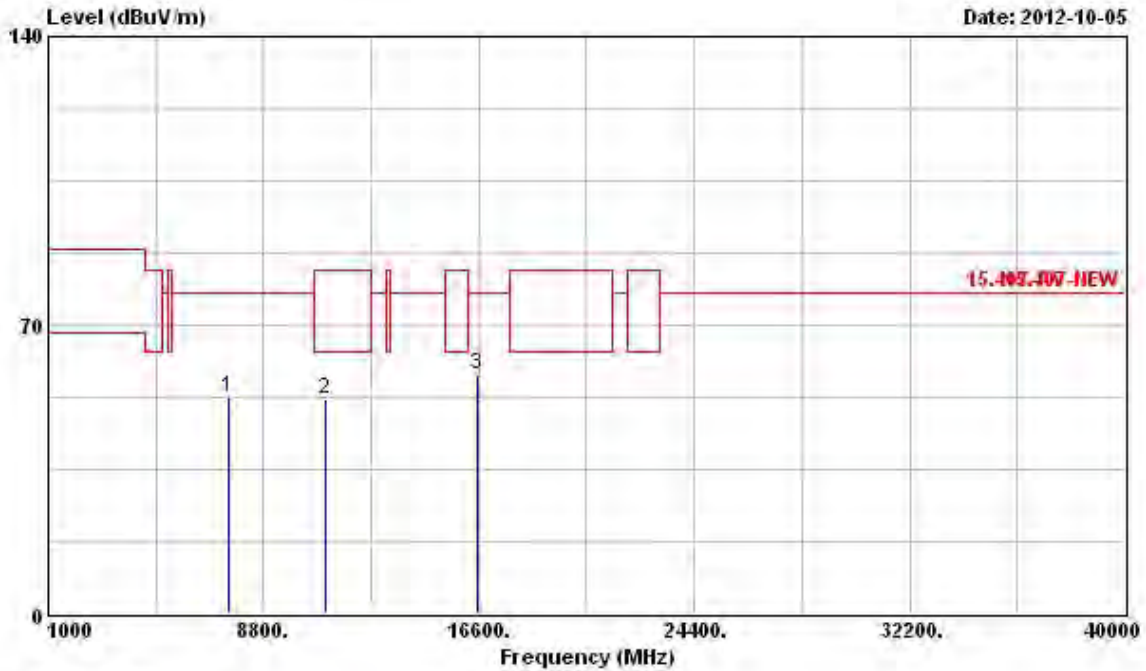


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7560.000	52.54	-25.30	77.84	46.22	35.81	5.67	35.16	Peak	---	---
2	11020.000	51.88	-11.66	63.54	40.86	38.61	7.13	34.72	PK	---	---
3	16530.000	57.83	-20.01	77.84	42.52	41.98	8.27	34.94	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.




Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (FX)	F7'
Operating Function	Transmit	Polarization	H

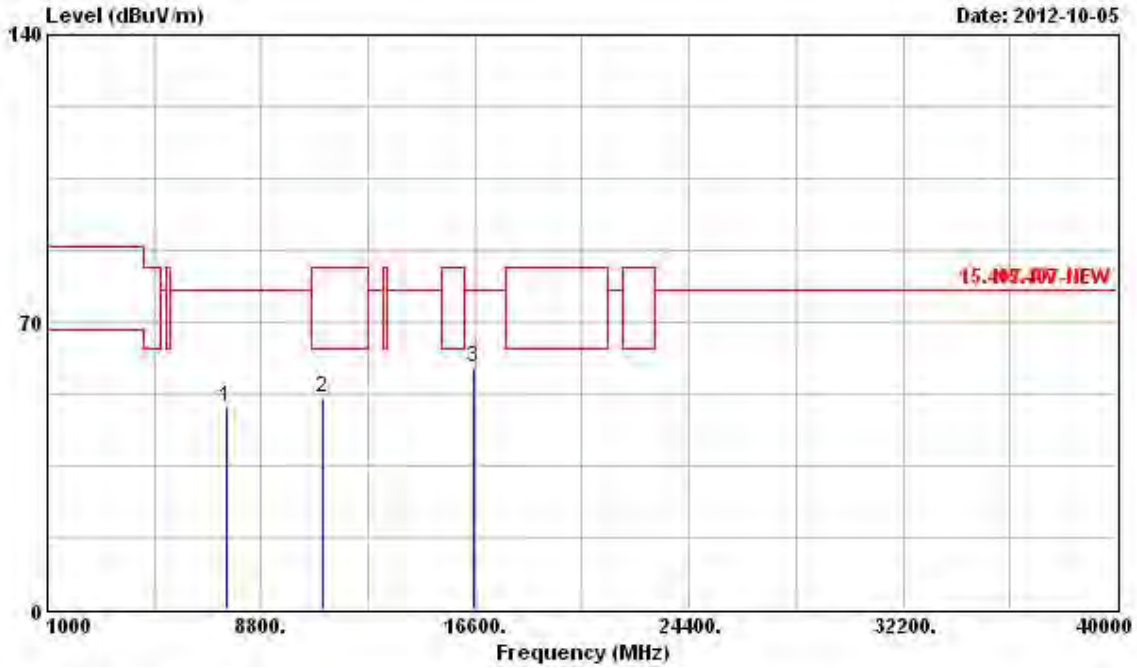

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7560.000	49.18	-28.66	77.84	42.86	35.81	5.67	35.16	Peak	---	---
2	11020.000	51.66	-11.88	63.54	40.64	38.61	7.13	34.72	PK	---	---
3	16530.000	58.78	-19.06	77.84	43.47	41.98	8.27	34.94	Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

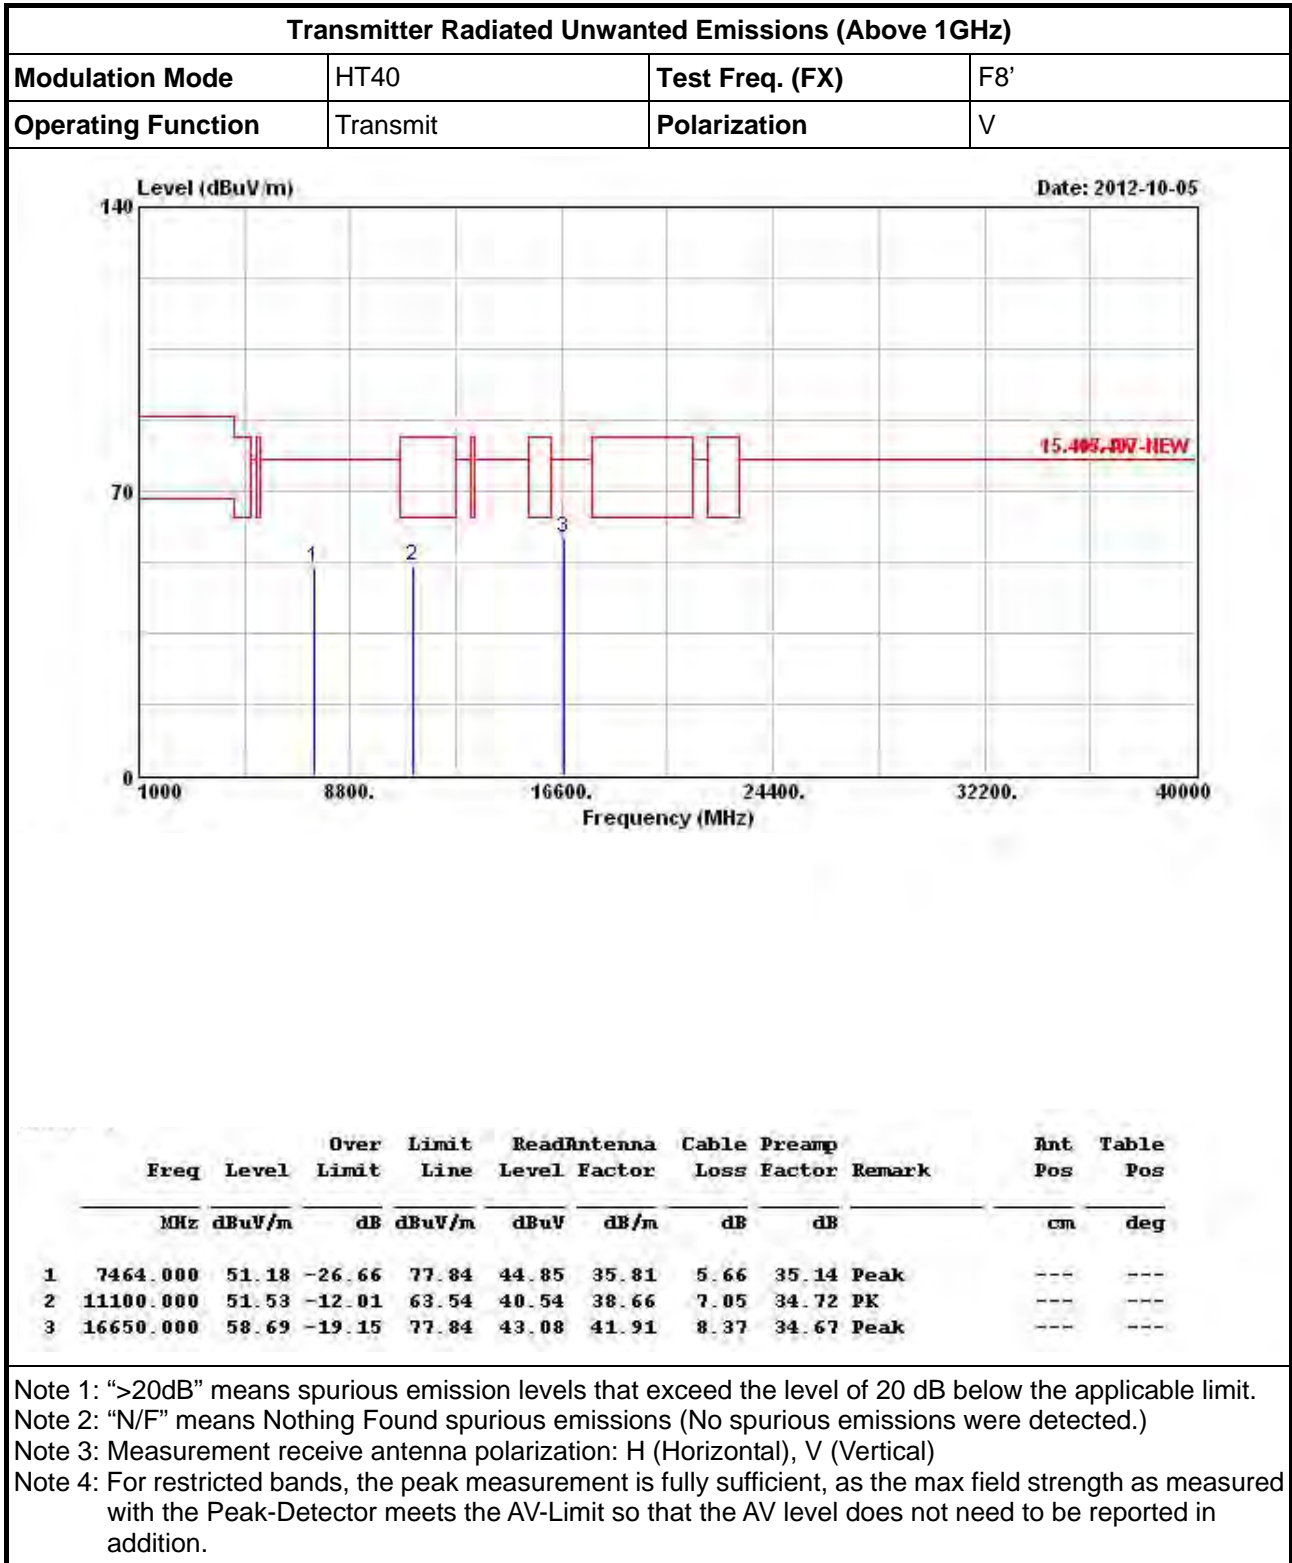



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (FX)	F8'
Operating Function	Transmit	Polarization	H

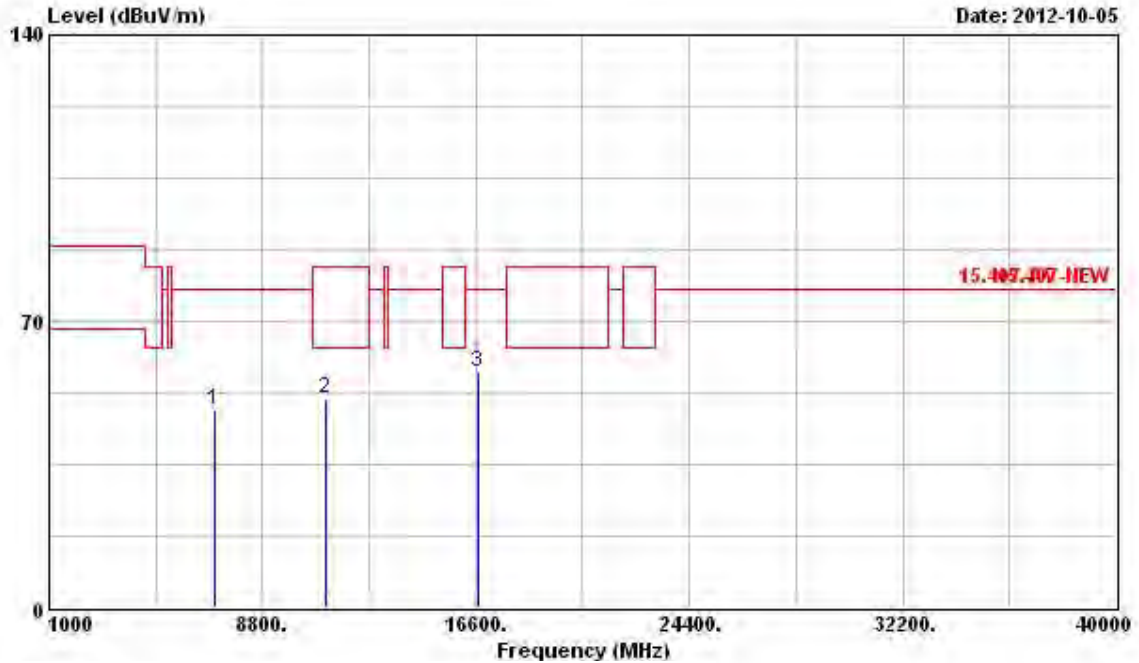


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg
1	7080.000	48.45	-29.39	77.84	42.00	35.88	5.61	35.04	Peak	---	---
2	11100.000	50.97	-12.57	63.54	39.98	38.66	7.05	34.72	PK	---	---
3	16650.000	57.53	-20.31	77.84	41.92	41.91	8.37	34.67	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (FX)	F9'
Operating Function	Transmit	Polarization	V

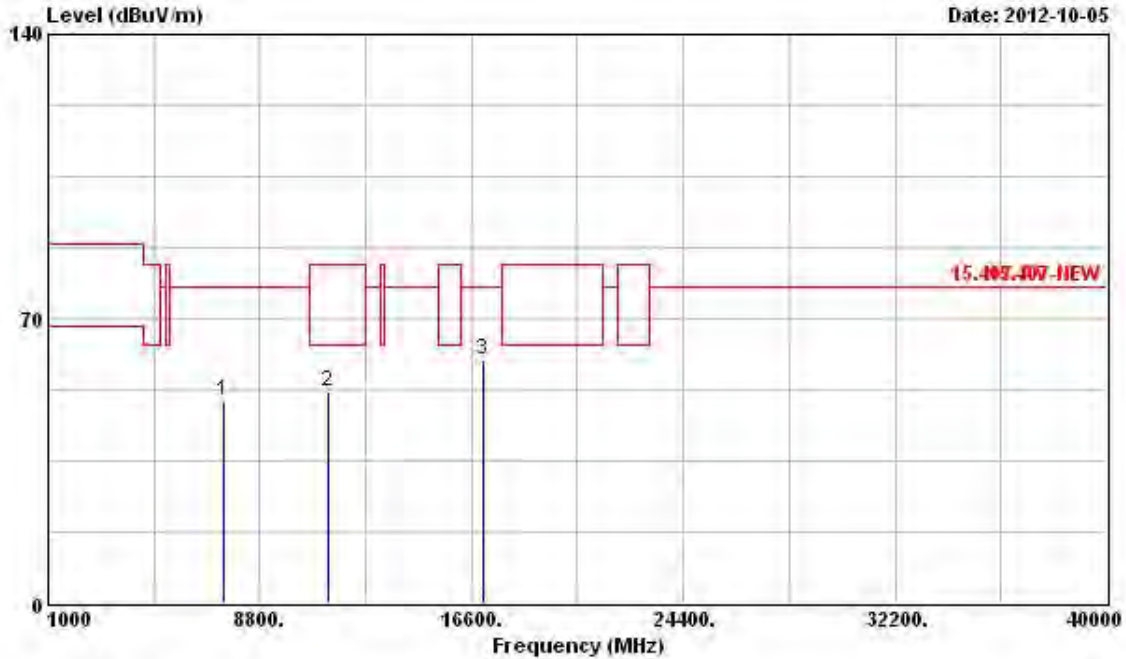


Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Remark	Ant Pos	Table Pos		
MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	cm	deg		
1	7464.000	49.70	-28.14	77.84	43.37	35.81	5.66	35.14	Peak	---	---
2	11340.000	51.98	-11.56	63.54	41.10	38.80	6.80	34.72	PK	---	---
3	17010.000	60.01	-17.83	77.84	43.65	41.69	8.65	33.98	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40-	Test Freq. (FX)	F9'
Operating Function	Transmit	Polarization	H

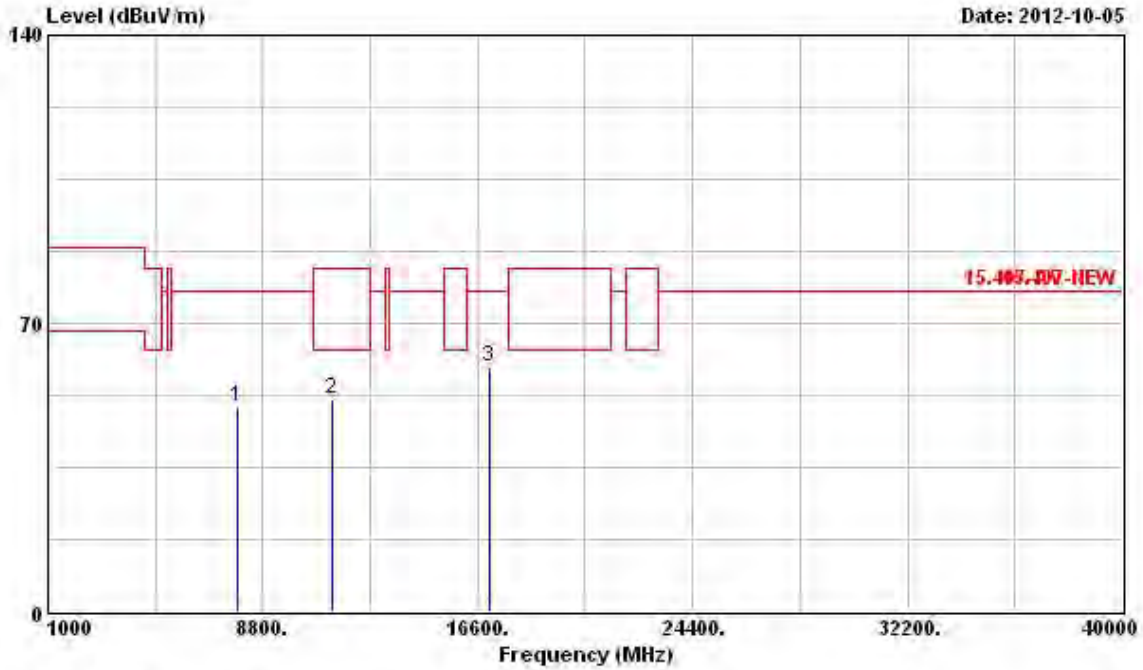

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7896.000	49.62	-28.22	77.84	43.20	35.88	5.78	35.24	Peak	---	---
2	11340.000	51.60	-11.94	63.54	40.72	38.80	6.80	34.72	PK	---	---
3	17010.000	59.52	-18.32	77.84	43.16	41.69	8.65	33.98	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

3.8 Frequency Stability

3.8.1 Frequency Stability Limit

Frequency Stability Limit	
UNII Devices	
<input checked="" type="checkbox"/>	In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
LE-LAN Devices	
<input checked="" type="checkbox"/>	N/A
IEEE Std. 802.11n-2009	
<input checked="" type="checkbox"/>	The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band and ± 25 ppm maximum for the 2.4 GHz band.


3.8.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.8.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.8 for frequency stability tests
<input checked="" type="checkbox"/>	Frequency stability with respect to ambient temperature
<input checked="" type="checkbox"/>	Frequency stability when varying supply voltage
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	For conducted measurements on devices with multiple transmit chains: Measurements need only to be performed on one of the active transmit chains (antenna outputs)
<input type="checkbox"/>	For radiated measurement. The equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted power level.

3.8.4 Test Setup

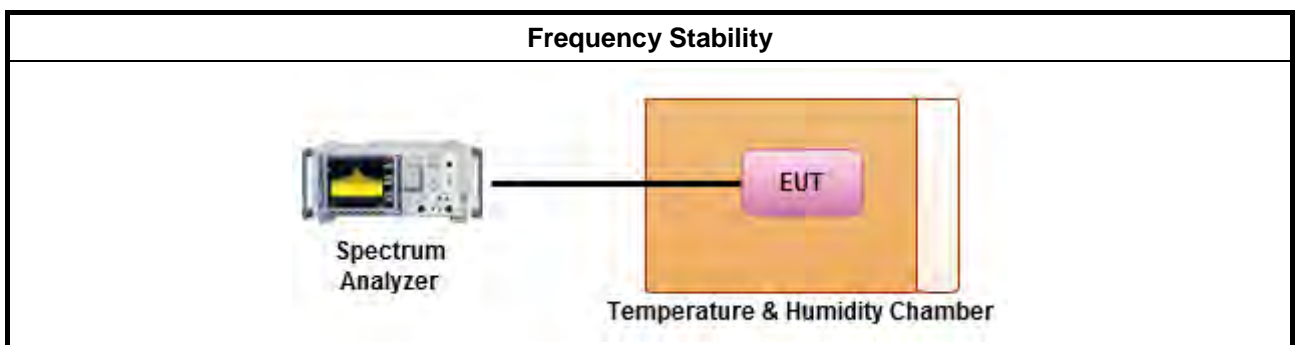

3.8.5 Test Result of Frequency Stability

Frequency Stability Result						
Mode		Frequency Stability (ppm)				
Condition	Freq. (MHz)	0 min	2 min	5 min	10 min	Limit
T _{20°C} V _{max}	5300	0.04	0.09	0.15	0.23	20.0
T _{20°C} V _{min}	5300	0.02	0.08	0.13	0.25	20.0
T _{50°C} V _{nom}	5300	-6.09	-6.08	-5.96	-6.00	20.0
T _{40°C} V _{nom}	5300	-4.92	-4.87	-4.85	-4.79	20.0
T _{30°C} V _{nom}	5300	-2.81	-2.77	-2.75	-2.70	20.0
T _{20°C} V _{nom}	5300	0.11	0.15	0.21	0.26	20.0
T _{10°C} V _{nom}	5300	2.28	2.36	2.38	2.42	20.0
T _{0°C} V _{nom}	5300	4.57	4.60	4.68	4.62	20.0
T _{-10°C} V _{nom}	5300	5.47	5.49	5.55	5.51	20.0
T _{-20°C} V _{nom}	5300	5.58	5.60	5.62	5.64	20.0
Result		Complied				
Note 1: Measure at 85 % [V _{min}] and 115 % [V _{max}] of the nominal voltage [V _{nom}]. Note 2: The nominal voltage refer test report clause 1.1.5 for EUT operational condition.						



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 23, 2012	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Feb. 08, 2012	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz ~ 30MHz	Apr. 20, 2012	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	CB049	9kHz ~ 30MHz	Apr. 25, 2012	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP 40	100305	9KHz~40GHz	Feb. 21, 2012	Conducted (TH01-HY)
Spectrum Analyzer	R&S	FSV 40	15195-01-00	9KHz~40GHz	Jan. 06, 2012	Conducted (TH01-HY)
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 02, 2012	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100°C	Dec. 07, 2011	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100302	10MHz ~ 40GHz	Nov. 22, 2011	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	1027452	300MHz ~ 40GHz	Jan. 12, 2012	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	1124009	300MHz ~ 40GHz	Jan. 12, 2012	Conducted (TH01-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345672/4	1GHz ~ 26.5GHz	Dec. 03, 2011	Conducted (TH01-HY)
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_104	SN 345668/4	1GHz ~ 26.5GHz	Dec. 03, 2011	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.



FCC RADIO TEST REPORT

Report No. : FR291203AN

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Sep. 14, 2012	Radiation (03CH02-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz 3m	May 10, 2012	Radiation (03CH02-HY)
Amplifier	Agilent	8447D	2944A11146	100kHz ~ 1.3GHz	Jul. 23, 2012	Radiation (03CH02-HY)
Amplifier	Agilent	8449B	3008A02373	1GHz ~ 26.5GHz	Aug. 10, 2012	Radiation (03CH02-HY)
Horn Antenna	ETS-LINDGREN	3117	00091920	1GHz ~ 18GHz	Nov. 15, 2011	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz ~ 1GHz	Nov. 11, 2011	Radiation (03CH02-HY)
RF Cable-high	SUHNER	SUCOFLEX106	03CH02-HY	1GHz ~ 40GHz	Mar. 06, 2012	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30MHz ~ 2GHz	Oct. 22, 2011	Radiation (03CH02-HY)
Turn Table	HD	DS 420	420/649/00	0~ 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	HD	MA 240	240/559/00	1 ~ 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	R&S	HFH2-Z2	860004/0001	9 kHz - 30 MHz	Jul. 03, 2012*	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is two year.

5 Certification of TAF Accreditation



The image shows a certificate of accreditation from the Taiwan Accreditation Foundation (TAF). The certificate is enclosed in a purple rounded rectangular border. At the top center is the TAF logo, which consists of the letters 'TAF' in a stylized font inside a purple oval. To the right of the logo, the text 'Certificate No. : L1190-120405' is printed. Below the logo, the name of the foundation is written in Chinese and English: '財團法人全國認證基金會' and 'Taiwan Accreditation Foundation'. The main title of the certificate is 'Certificate of Accreditation'. Below this, it states 'This is to certify that' followed by the name of the laboratory, 'Sporton International Inc.', and its full name, 'EMC & Wireless Communications Laboratory'. The address of the laboratory is listed as 'No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.'. The certificate then states 'is accredited in respect of laboratory'. A list of accreditation details follows, including the criteria (ISO/IEC 17025:2005), the accreditation number (1190), the date of accreditation (December 15, 2003), the effective period (January 10, 2010 to January 09, 2013), the accredited scope (Testing Field, see described in the Appendix), and the specific accreditation program (Accreditation Program for Designated Testing Laboratory for Commodities Inspection, Accreditation Program for Telecommunication Equipment Testing Laboratory, Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities). At the bottom right, there is a handwritten signature in blue ink that reads 'Jay-san Chen'. Below the signature, the name 'Jay-San Chen' is printed, followed by his title 'President, Taiwan Accreditation Foundation' and the date 'Date: April 05, 2012'. At the bottom left of the certificate, it says 'P1, total 24 pages'.

Certificate No. : L1190-120405

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria : ISO/IEC 17025:2005
Accreditation Number : 1190
Originally Accredited : December 15, 2003
Effective Period : January 10, 2010 to January 09, 2013
Accredited Scope : Testing Field, see described in the Appendix
Specific Accreditation Program : Accreditation Program for Designated Testing Laboratory for Commodities Inspection
Accreditation Program for Telecommunication Equipment Testing Laboratory
Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities

Jay-san Chen

Jay-San Chen
President, Taiwan Accreditation Foundation
Date: April 05, 2012

P1, total 24 pages