

FCC Test Report

Product Name	Portable Computer
Model No.	P109F
FCC ID.	E2K-P109F

Applicant	Dell Inc.
Address	One Dell Way, Round Rock, Texas 78682, USA

Date of Receipt	Dec. 22, 2020
Issued Date	Feb. 20, 2021
Report No.	20C0808R-E3032110111
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test Report

Issued Date: Feb. 20, 2021

Report No.: 20C0808R-E3032110111




Product Name	Portable Computer
Applicant	Dell Inc.
Address	One Dell Way, Round Rock, Texas 78682, USA
Manufacturer	Dell Inc.
Model No.	P109F
FCC ID.	E2K-P109F
EUT Rated Voltage	AC 100-240V, 50-60Hz
EUT Test Voltage	AC 120V/60Hz
Trade Name	ALIENWARE
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By :



(Senior Adm. Specialist / Joanne Lin)

Tested By :

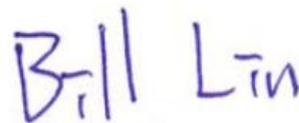

(Senior Engineer / Bill Lin)

Approved By :



(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Tested System Details.....	7
1.3. Configuration of Tested System	7
1.4. EUT Exercise Software	7
1.5. Test Facility	8
1.6. List of Test Equipment.....	9
1.7. Uncertainty	10
1.8. Summary of Test Results	11
2. CONDUCTED EMISSION	12
2.1. Test Setup	12
2.2. Limits.....	12
2.3. Test Procedure	13
2.4. Test Result of Conducted Emission.....	14
3. PEAK POWER OUTPUT	16
3.1. Test Setup	16
3.2. Limit	16
3.3. Test Procedure	16
3.4. Test Result of Peak Power Output	17
4. RADIATED EMISSION	18
4.1. Test Setup	18
4.2. Limits.....	19
4.3. Test Procedure	20
4.4. Test Result of Radiated Emission.....	22
5. DUTY CYCLE	30
5.1. Test Setup	30
5.2. Test Procedure	30
5.3. Test Result of Duty Cycle.....	31
6. EMI REDUCTION METHOD DURING COMPLIANCE TESTING	32
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

Revision History

Report No.	Version	Description	Issued Date
20C0808R-E3032110111	V1.0	Initial issue of report.	Feb. 20, 2021

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Portable Computer
Trade Name	ALIENWARE
Model No.	P109F
FCC ID.	E2K-P109F
Frequency Range	2402-2480MHz
Channel Number	V5.0: 40CH
Type of Modulation	V5.0: GFSK(2Mbps)
Antenna Type	PIFA Antenna
Channel Control	Auto
Antenna Gain	Refer to the table "Antenna List"
Power Cable	Shielded, 1.8m
Power Adapter	MFR: DELL, M/N: HA240PM190 Input: AC 100-240V~5A, 50-60Hz Output: 19.5V=12.31A, 240.0W Cable Out: Shielded, 1.8m, with two ferrite cores bonded.

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	Hong-BO Co., Ltd.	260-24363 (DC33002IL0L) (Main) 260-24362 (DC33002IL1L) (Aux)	PIFA Antenna	2.64dBi for 2.4GHz
2	Wistron Neweb Corporation	DC33002IK0L (81EABG15.G09) (Main) DC33002IK1L (81EABG15.G10) (Aux)	PIFA Antenna	0.74dBi for 2.4GHz

Note:

- (1) The antenna of EUT is conforming to FCC 15.203.
- (2) Only the higher gain antenna was tested and recorded in this report.

Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 01:	2404 MHz	Channel 02:	2406 MHz	Channel 03:	2408 MHz
Channel 04:	2410 MHz	Channel 05:	2412 MHz	Channel 06:	2414 MHz	Channel 07:	2416 MHz
Channel 08:	2418 MHz	Channel 09:	2420 MHz	Channel 10:	2422 MHz	Channel 11:	2424 MHz
Channel 12:	2426 MHz	Channel 13:	2428 MHz	Channel 14:	2430 MHz	Channel 15:	2432 MHz
Channel 16:	2434 MHz	Channel 17:	2436 MHz	Channel 18:	2438 MHz	Channel 19:	2440 MHz
Channel 20:	2442 MHz	Channel 21:	2444 MHz	Channel 22:	2446 MHz	Channel 23:	2448 MHz
Channel 24:	2450 MHz	Channel 25:	2452 MHz	Channel 26:	2454 MHz	Channel 27:	2456 MHz
Channel 28:	2458 MHz	Channel 29:	2460 MHz	Channel 30:	2462 MHz	Channel 31:	2464 MHz
Channel 32:	2466 MHz	Channel 33:	2468 MHz	Channel 34:	2470 MHz	Channel 35:	2472 MHz
Channel 36:	2474 MHz	Channel 37:	2476 MHz	Channel 38:	2478 MHz	Channel 39:	2480 MHz

Note:

1. The EUT is a Portable Computer with built-in WLAN (802.11a/b/g/n/ac/ax) with Bluetooth (5.0 and V3.0+HS, V2.1+EDR) transceiver, this report for Bluetooth V5.0.
2. This report is based on the comprehensive requirements of KDB 996369 D02. The end product only evaluates RF power and spurious emissions. The original RF module test report is 181210-03.TR04.
3. BT signal is only transmitted by Main antenna port.
4. These tests were conducted on a sample for the purpose of demonstrating compliance of transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
5. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.

Test Mode	Mode 1: Transmit - BLE
-----------	------------------------


1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1	External HDD	SanDisk	SanDisk Extreme 900	N/A
2	USB 3.0	Transcend	TS1TSJ25M3	D468623806
3	USB 3.0	Transcend	TS1TSJ25M3	D468623815
4	USB 3.0	Transcend	TS1TSJ25M3	D468623807
5	LCD Monitor	Lenovo	T24d	V5CZ4279
6	Microphone & Earphone	Verbatim	C09024VB	N/A

Signal Cable Type	Signal cable Description
A	USB Cable
B	USB Cable
C	USB Cable
D	USB Cable
E	HDMI Cable
F	Microphone & Earphone Cable

1.3. Configuration of Tested System

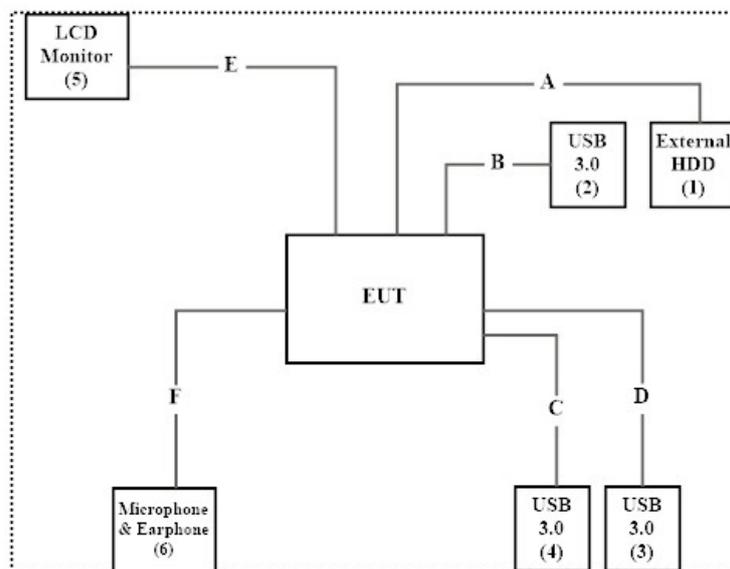

1.4. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.3.
- (2) Execute software “DRTU Ver. 22.3500.0.0-01462” on the EUT.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Press “OK” to start the continuous Transmit.
- (5) Verify that the EUT works properly.

1.5. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	10~40 °C	22°C
	Humidity (%RH)	10~90 %	44.3%
Radiated Emission	Temperature (°C)	10~40 °C	16.8°C
	Humidity (%RH)	10~90 %	60.9%
Conductive	Temperature (°C)	10~40 °C	22°C
	Humidity (%RH)	10~90 %	55%

USA : FCC Registration Number: TW0023

Canada : IC Registration Number: 25880

Site Description : Accredited by TAF
Accredited Number: 3023

Test Laboratory : DEKRA Testing and Certification Co., Ltd
Address : No.159, Sec. 2, Wenhua 1st Rd., Linkou Dist.,
New Taipei City 24457, Taiwan, R.O.C.

Phone number : 886-2-2602-7968
Fax number : 866-2-2602-3286
Email address : info.tw@dekra.com
Website : <http://www.dekra.com.tw>

1.6. List of Test Equipment

For Conduction measurements /ASR1

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	EMI Test Receiver	R&S	ESR7	101601	2020.05.28	2021.05.27
X	Two-Line V-Network	R&S	ENV216	101306	2020.03.25	2021.03.24
X	Two-Line V-Network	R&S	ENV216	101307	2020.04.17	2021.04.16
X	Coaxial Cable	DEKRA	RG400 BNC	RF001	2020.05.24	2021.05.23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Testing System V2.0

For Conducted measurements /ASR2

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Spectrum Analyzer	R&S	FSV30	103466	2020.12.28	2021.12.27
X	Peak Power Analyzer	KEYSIGHT	8900B	MY51000539	2020.05.13	2021.05.12
X	Power Sensor	KEYSIGHT	N1923A	MY59240002	2020.05.22	2021.05.21
X	Power Sensor	KEYSIGHT	N1923A	MY59240003	2020.05.22	2021.05.21

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Conduction Test System V9.0.5

For Radiated measurements /ACB1

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Loop Antenna	AMETEK	HLA6121	49611	2020.03.16	2021.03.15
X	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-674	2020.05.20	2021.05.19
X	Horn Antenna	ETS-Lindgren	3117	00201259	2020.10.23	2021.10.22
X	Horn Antenna	Com-Power	AH-840	101087	2020.06.08	2021.06.07
X	Pre-Amplifier	EMCI	EMC001330	980316	2020.06.23	2021.06.22
X	Pre-Amplifier	EMCI	EMC051835SE	980313	2020.11.25	2021.11.24
X	Pre-Amplifier	EMCI	EMC05820SE	980310	2020.06.24	2021.06.23
X	Pre-Amplifier	EMCI	EMC184045SE	980314	2020.06.10	2021.06.09
X	Filter	MICRO TRONICS	BRM50702	G251	2020.09.17	2021.09.16
	Filter	MICRO TRONICS	BRM50716	G188	2020.09.17	2021.09.16
X	EMI Test Receiver	R&S	ESR7	101601	2020.05.28	2021.05.27
X	Spectrum Analyzer	R&S	FSV40	101148	2020.03.16	2021.03.15
X	Coaxial Cable	SUHNER	SUCOFLEX 106	RF002	2020.07.03	2021.07.02
X	Mircoflex Cable	HUBER SUHNER	SUCOFLEX 102	MY3381/2	2020.06.10	2021.06.09

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Testing System V2.0

1.7. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document, and is described in each test chapter of this report.

The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.


Test item	Uncertainty	
Conducted Emission	± 3.42 dB	
Peak Power Output	± 0.91 dB	
Radiated Emission	Under 1GHz ± 4.06 dB	Above 1GHz ± 3.73 dB
Duty Cycle	± 2.31 ms	

1.8. Summary of Test Results

Description	Result
Conducted Emission	Pass
Peak Power Output	Pass
Radiated Emission	Pass
RF Antenna Conducted Test	Refer to Note 1
Band Edge	Refer to Note 1
6dB Bandwidth	Refer to Note 1
Power Density	Refer to Note 1
Duty Cycle	--
Note 1 : This report is a partial report. The test items above were based on the comprehensive requirements of KDB 996369 D02 in which only RF power, Transmitter unwanted emissions and Receiver spurious emissions were performed. For other test data please refer to original modular report. (Original report no.: 181210-03.TR04, Brand: Intel® Wi-Fi 6 AX200, Model: AX200NGW)	

2. Conducted Emission

2.1. Test Setup

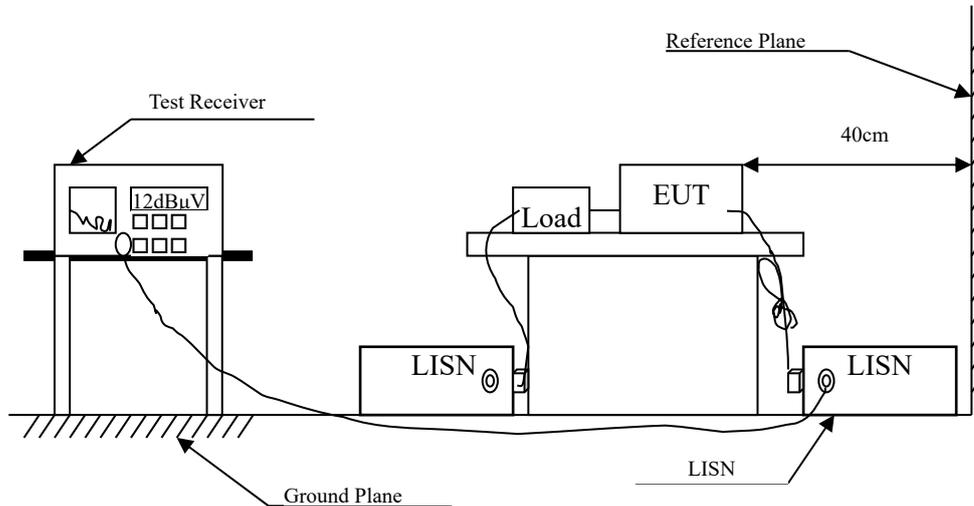

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dB μ V) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)


Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The EUT was setup to ANSI C63.4, 2014; tested to DTS test procedure of FCC KDB-558074 for compliance to FCC 47CFR Subpart C requirements.

2.4. Test Result of Conducted Emission

Product : Portable Computer
 Test Item : Conducted Emission Test
 Power Line : L 1
 Test Mode : Mode 1: Transmit - BLE (2440MHz)
 Test Date : 2021/02/19

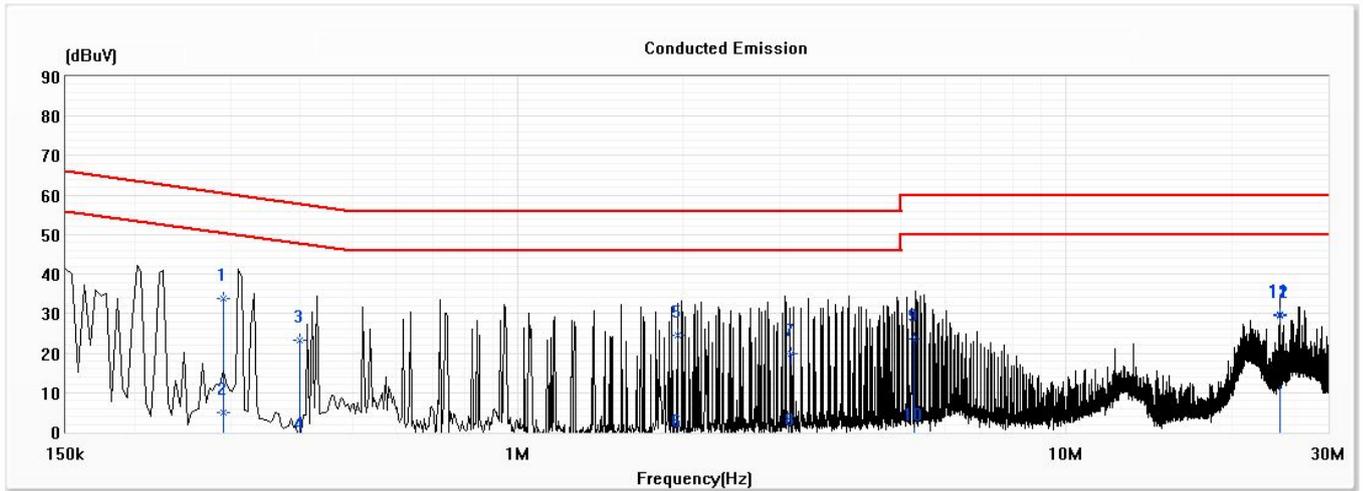


No	Frequency (MHz)	Emission Level (dBμV)	Limit (dBμV)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	0.291	33.89	60.50	-26.61	24.24	9.65	QP
2	0.291	4.85	50.50	-45.66	-4.81	9.65	AV
3	0.400	23.34	57.86	-34.52	13.68	9.66	QP
4	0.400	-3.60	47.86	-51.46	-13.26	9.66	AV
5	1.960	24.39	56.00	-31.61	14.67	9.72	QP
6	1.960	-3.11	46.00	-49.11	-12.83	9.72	AV
7	3.156	19.87	56.00	-36.13	10.13	9.75	QP
8	3.156	-2.66	46.00	-48.66	-12.41	9.75	AV
9	5.293	23.65	60.00	-36.35	13.85	9.80	QP
10	5.293	-1.69	50.00	-51.69	-11.49	9.80	AV
11	24.577	29.67	60.00	-30.33	19.71	9.96	QP
*12	24.577	29.33	50.00	-20.67	19.37	9.96	AV

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ * “ means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Portable Computer
 Test Item : Conducted Emission Test
 Power Line : N
 Test Mode : Mode 1: Transmit - BLE (2440MHz)
 Test Date : 2021/02/19

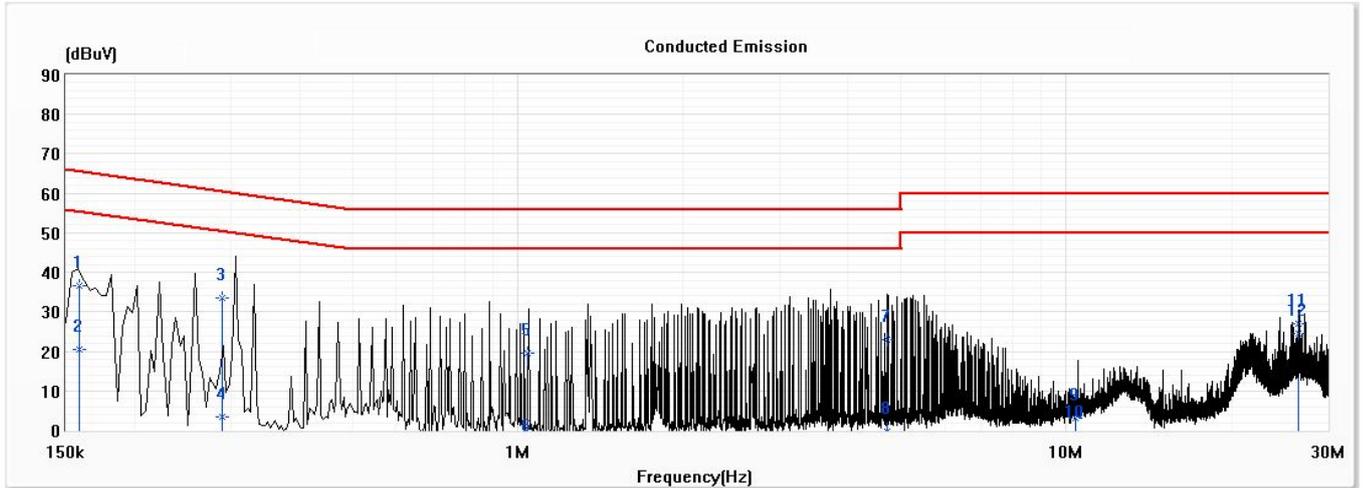


No	Frequency (MHz)	Emission Level (dBμV)	Limit (dBμV)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	0.159	36.48	65.53	-29.05	26.81	9.67	QP
2	0.159	20.43	55.53	-35.11	10.76	9.67	AV
3	0.290	33.39	60.54	-27.15	23.72	9.67	QP
4	0.290	3.41	50.54	-47.13	-6.26	9.67	AV
5	1.040	19.45	56.00	-36.55	9.76	9.69	QP
6	1.040	-4.57	46.00	-50.57	-14.26	9.69	AV
7	4.717	22.93	56.00	-33.07	13.13	9.80	QP
8	4.717	-0.41	46.00	-46.41	-10.21	9.80	AV
9	10.396	2.95	60.00	-57.05	-6.96	9.91	QP
10	10.396	-1.28	50.00	-51.28	-11.19	9.91	AV
11	26.551	26.92	60.00	-33.08	16.84	10.08	QP
*12	26.551	24.43	50.00	-25.57	14.35	10.08	AV

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ * “ means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3. Peak Power Output

3.1. Test Setup

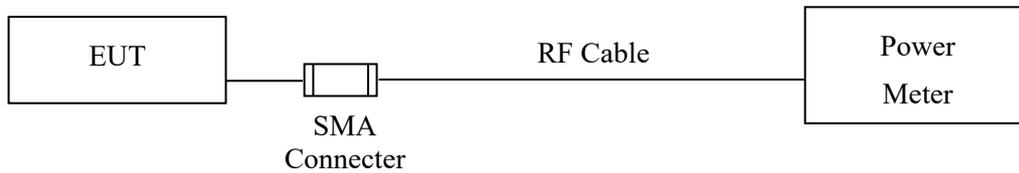

3.2. Limit

The maximum peak power shall be less 1Watt.

3.3. Test Procedure

The EUT was tested according to C63.10:2013 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using C63.10:2013 Section 11.9.1.3 PKPM1 Peak power meter method.

3.4. Test Result of Peak Power Output


Product : Portable Computer
Test Item : Peak Power Output
Test Mode : Mode 1: Transmit - BLE
Test Date : 2021/01/15

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	8.45	1 Watt= 30 dBm	Pass
Channel 19	2440.00	8.41	1 Watt= 30 dBm	Pass
Channel 39	2480.00	8.54	1 Watt= 30 dBm	Pass


4. Radiated Emission

4.1. Test Setup


Radiated Emission Under 30MHz

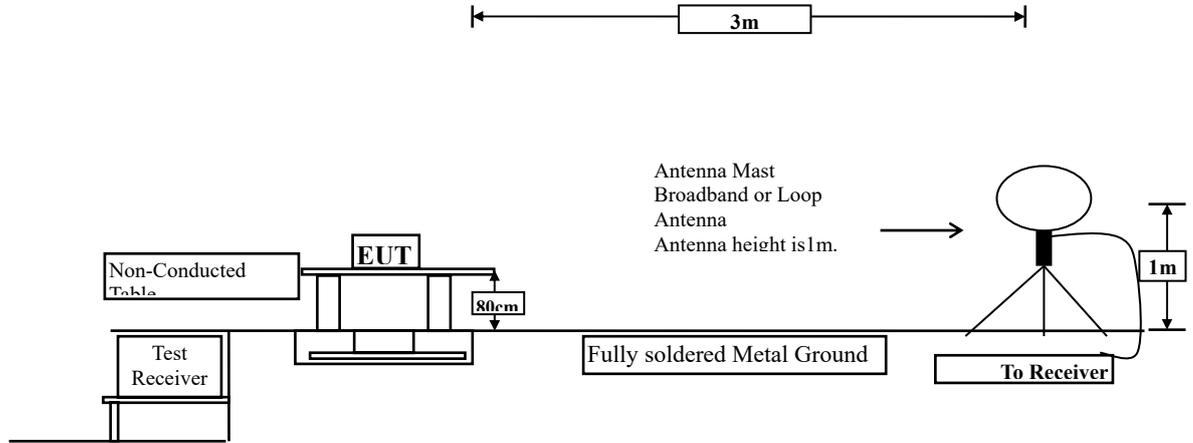

Radiated Emission Below 1GHz

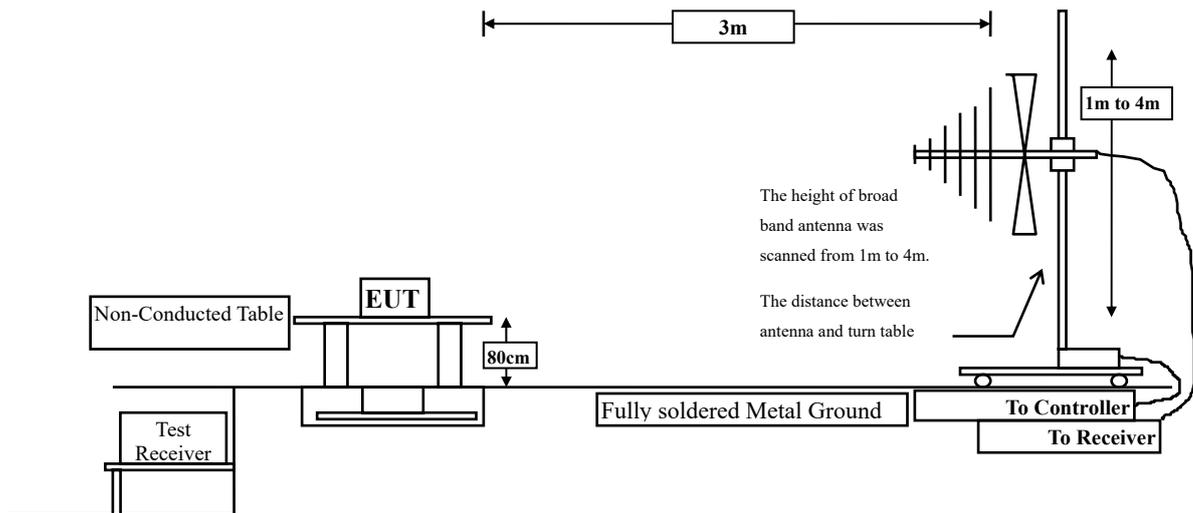

Radiated Emission Above 1GHz

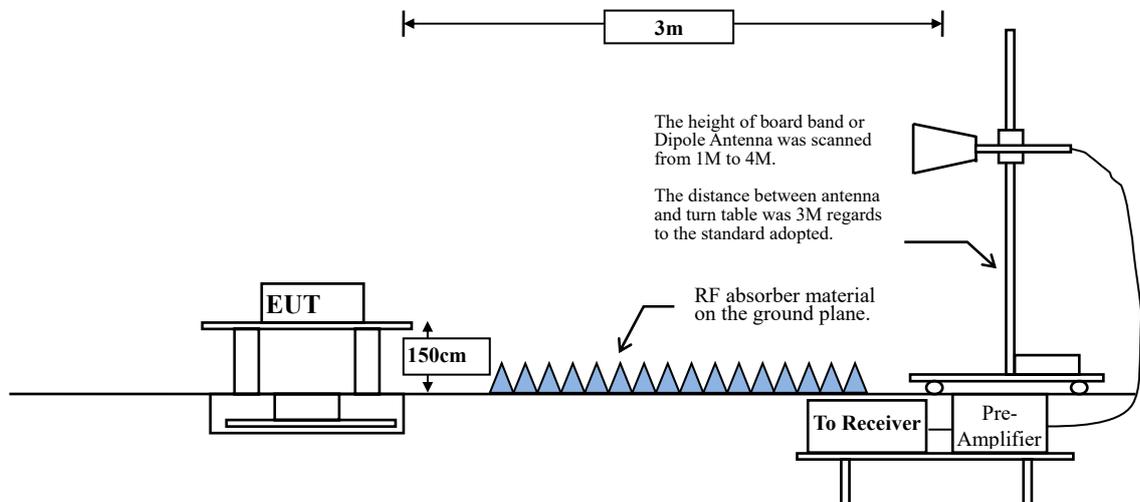

4.2. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remarks:
1. RF Voltage (dB μ V) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to C63.10:2013 Section 11.12.1 for compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna. The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

RBW and VBW Parameter setting:

According to C63.10 Section 11.12.2.4 Peak measurement procedure.

RBW = as specified in Table 1.

$VBW \geq 3 \times RBW$.

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to C63.10 Section 11.12.2.5 Average measurement procedure.

RBW = 1MHz.

VBW = 10Hz, when duty cycle $\geq 98\%$

$VBW \geq 1/T$, when duty cycle $< 98\%$

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)


2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
BLE	85.20	2.1300	469	500

Note: Duty Cycle Refer to Section 4

4.4. Test Result of Radiated Emission

Product : Portable Computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - BLE (2402MHz)
 Test Date : 2021/01/20

Horizontal

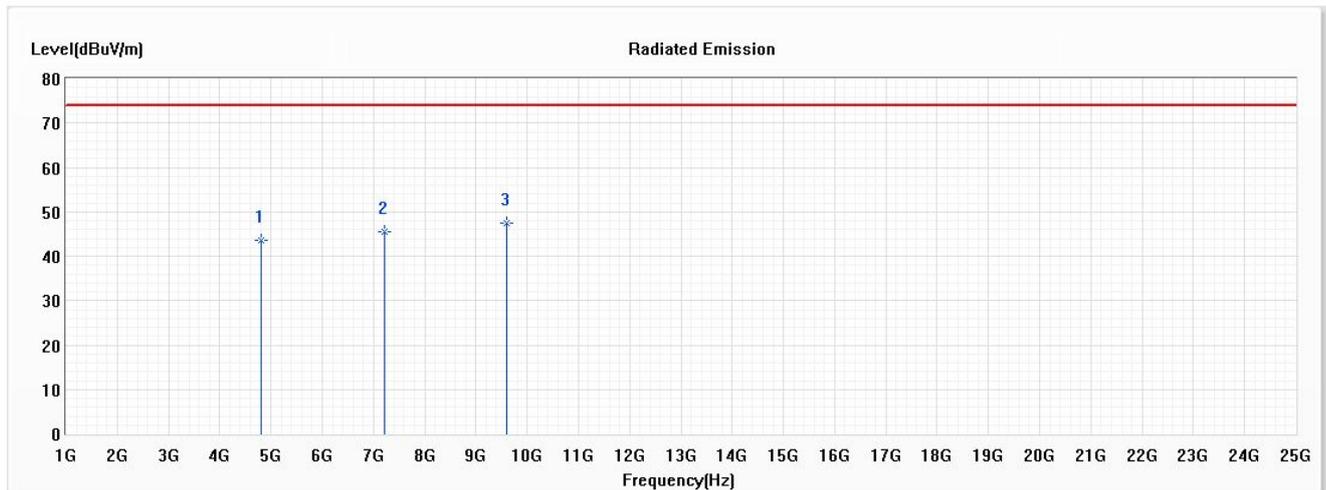


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	4804.000	43.53	74.00	-30.47	45.73	-2.20	PK
2	7206.000	45.62	74.00	-28.38	44.35	1.27	PK
* 3	9608.000	47.53	74.00	-26.47	44.01	3.52	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Portable Computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - BLE (2402MHz)
 Test Date : 2021/01/20

Vertical

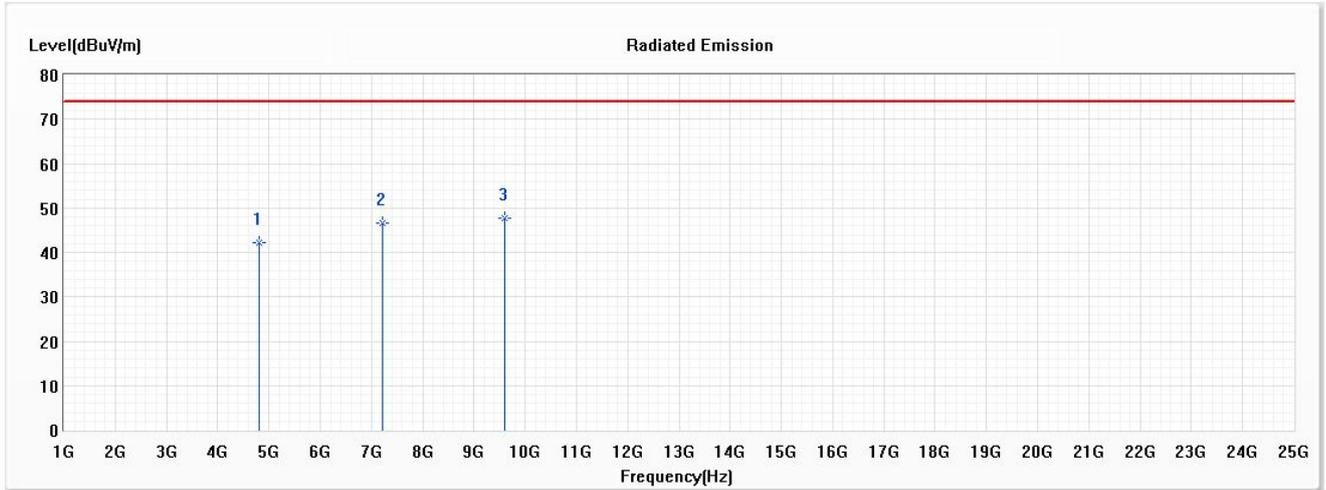


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	4804.000	42.34	74.00	-31.66	44.54	-2.20	PK
2	7206.000	46.67	74.00	-27.33	45.40	1.27	PK
* 3	9608.000	47.86	74.00	-26.14	44.34	3.52	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Portable Computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - BLE (2440MHz)
 Test Date : 2021/01/20

Horizontal

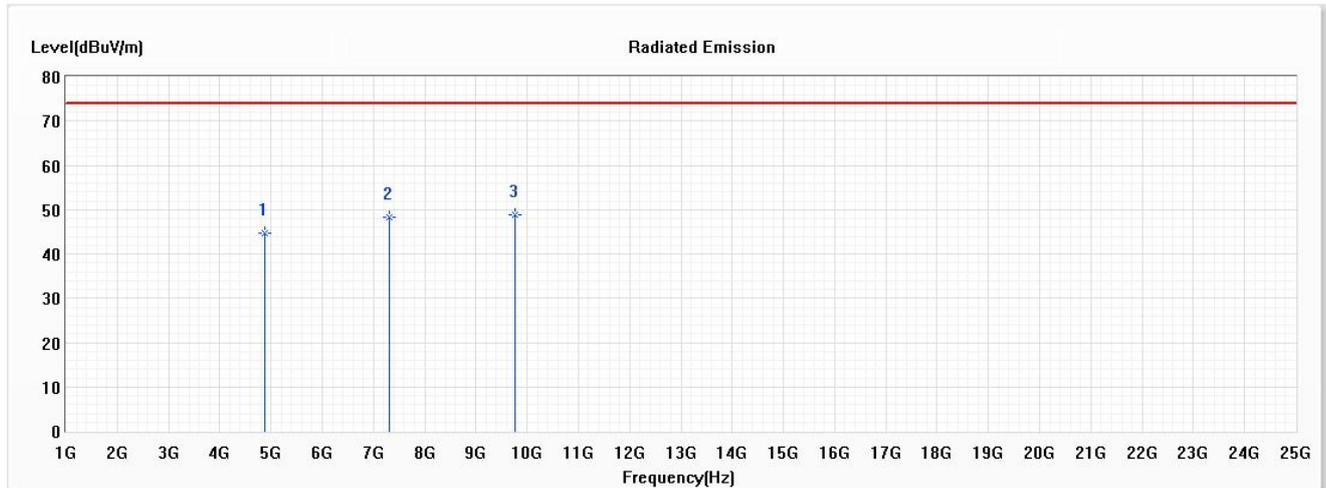


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4880.000	44.81	74.00	-29.19	47.11	-2.30	PK
2	7320.000	48.33	74.00	-25.67	47.07	1.26	PK
* 3	9760.000	48.75	74.00	-25.25	44.97	3.78	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Portable Computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - BLE (2440MHz)
 Test Date : 2021/01/20

Vertical

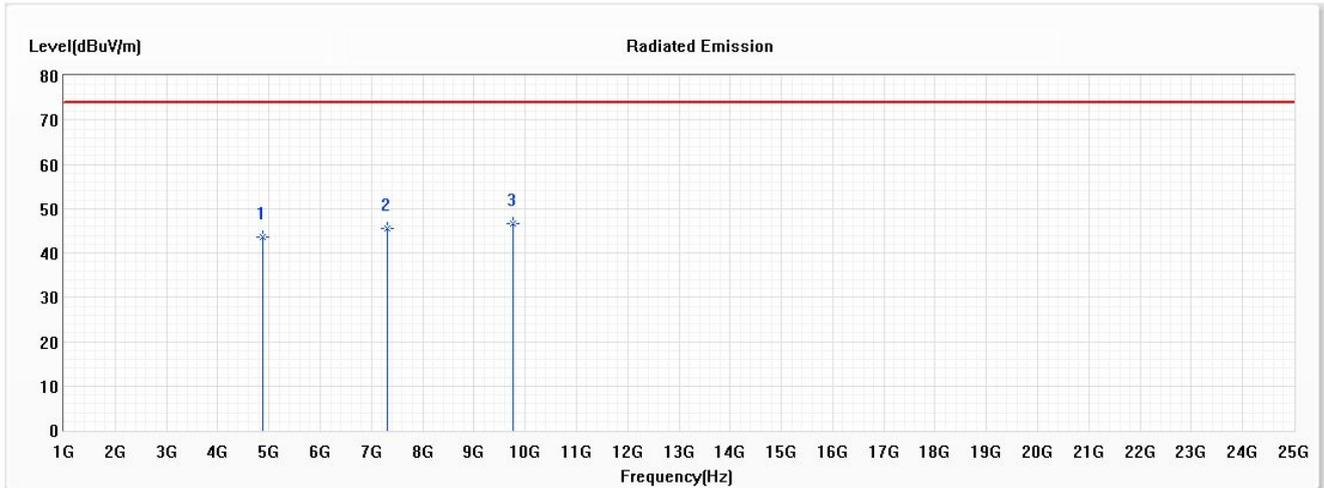


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	4880.000	43.57	74.00	-30.43	45.87	-2.30	PK
2	7320.000	45.43	74.00	-28.57	44.17	1.26	PK
* 3	9760.000	46.72	74.00	-27.28	42.94	3.78	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Portable Computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - BLE (2480MHz)
 Test Date : 2021/01/20

Horizontal

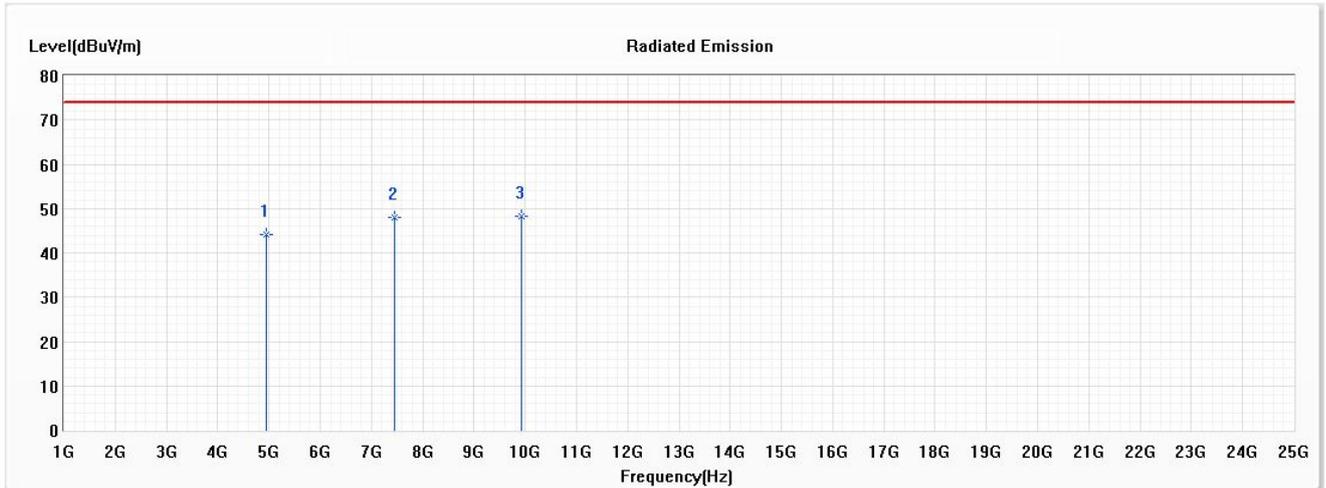


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	4960.000	44.26	74.00	-29.74	46.35	-2.09	PK
2	7440.000	47.88	74.00	-26.12	46.58	1.30	PK
* 3	9920.000	48.27	74.00	-25.73	44.26	4.01	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Portable Computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - BLE (2480MHz)
 Test Date : 2021/01/20

Vertical

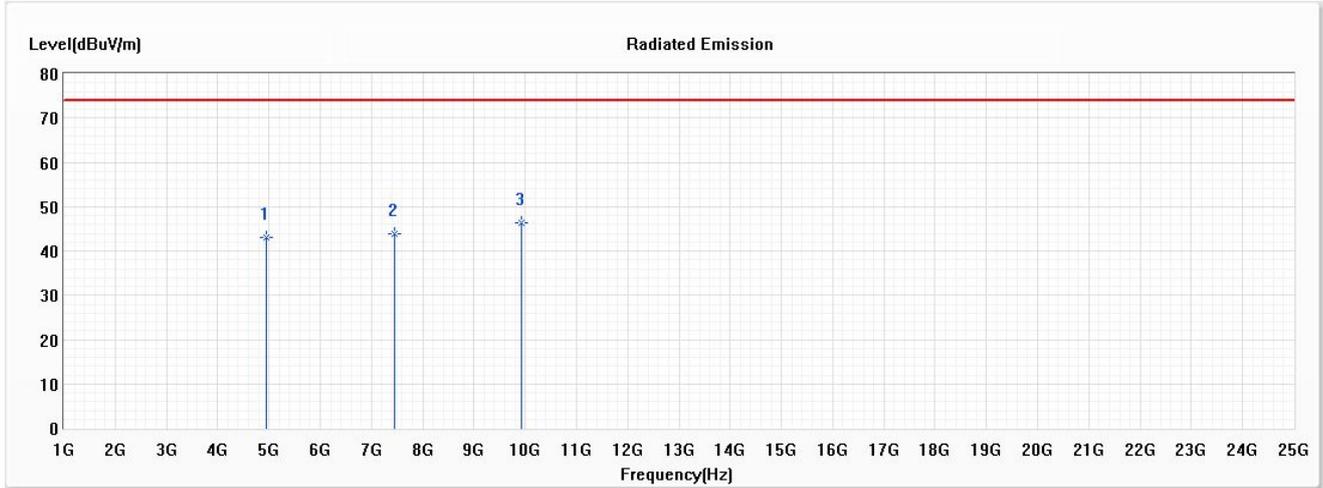


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	4960.000	42.91	74.00	-31.09	45.00	-2.09	PK
2	7440.000	43.74	74.00	-30.26	42.44	1.30	PK
* 3	9920.000	46.21	74.00	-27.79	42.20	4.01	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Mode : Mode 1: Transmit - BLE (2440MHz)
 Test Date : 2021/01/18

Horizontal

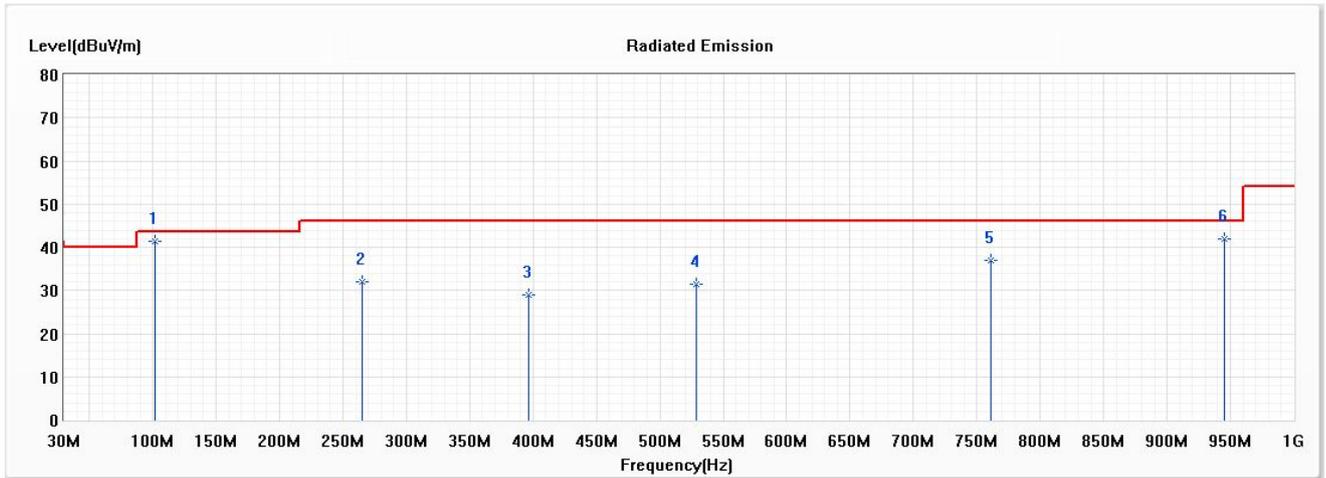


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	41.49	43.50	-2.01	56.65	-15.16	QP
2	264.768	31.93	46.00	-14.07	42.88	-10.95	QP
3	396.913	29.00	46.00	-17.00	36.35	-7.35	QP
4	529.058	31.41	46.00	-14.59	36.16	-4.75	QP
5	761.014	36.91	46.00	-9.09	37.75	-0.84	QP
6	945.174	41.95	46.00	-4.05	40.45	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Mode : Mode 1: Transmit - BLE (2440MHz)
 Test Date : 2021/01/18

Vertical

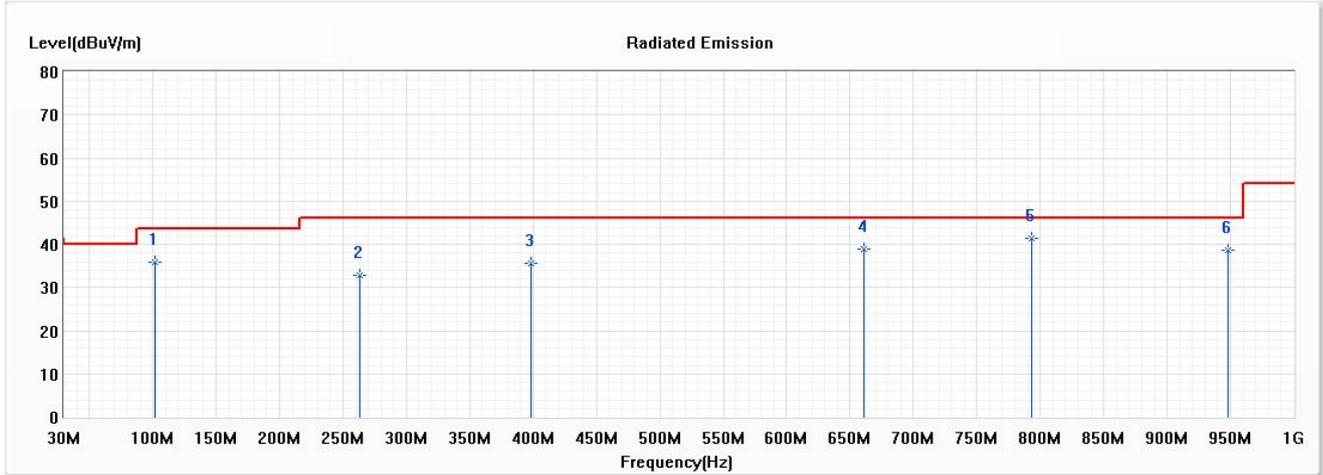


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	35.78	43.50	-7.72	50.94	-15.16	QP
2	263.362	32.80	46.00	-13.20	43.82	-11.02	QP
3	398.319	35.69	46.00	-10.31	43.01	-7.32	QP
4	661.203	38.97	46.00	-7.03	41.50	-2.53	QP
* 5	793.348	41.45	46.00	-4.55	41.87	-0.42	QP
6	947.986	38.59	46.00	-7.41	37.02	1.57	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

5. Duty Cycle

5.1. Test Setup

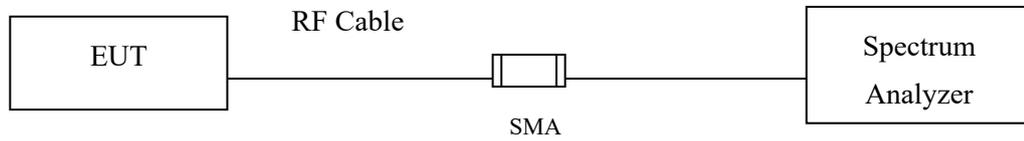

5.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to ANSI C63.10 2013 for compliance to FCC 47CFR 15.247 requirements.

5.3. Test Result of Duty Cycle

Product : Portable Computer
 Test Item : Duty Cycle
 Test Mode : Mode 1: Transmit - BLE


Duty Cycle Formula:

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff})$$

$$\text{Duty Factor} = 10 \text{ Log} (1/\text{Duty Cycle})$$

Results:

2.4GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
BLE	2.1300	2.5000	85.20	0.70

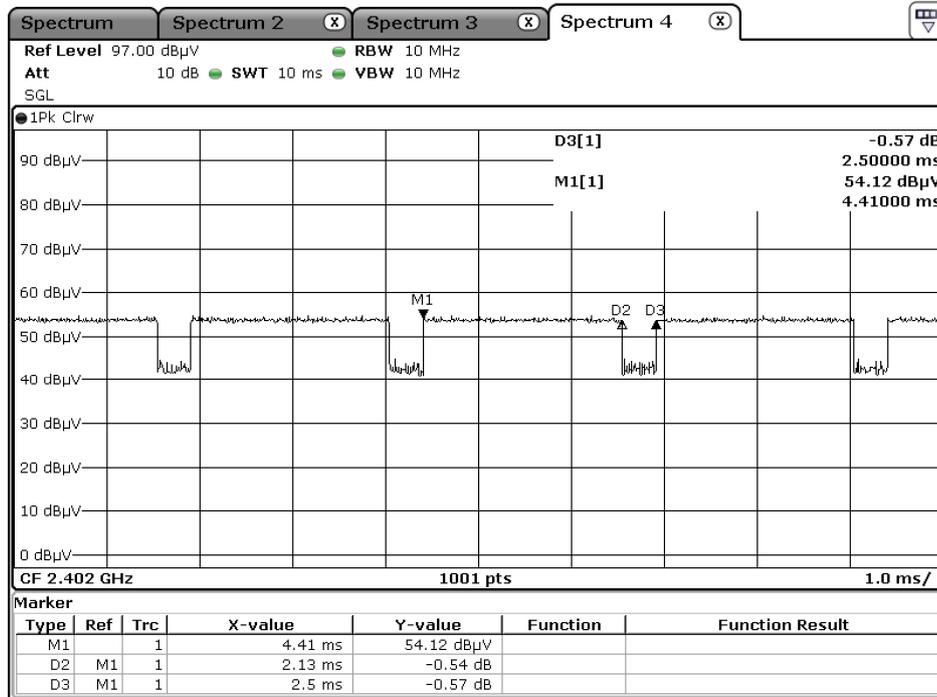

Date: 10.FEB.2021 14:36:45

6. EMI Reduction Method During Compliance Testing

No modification was made during testing.