

#01_LTE Band 7_20M_QPSK_1_0_Bottom of Laptop_0mm_Ch20850


Communication System: LTE-FDD; Frequency: 2510.000 MHz; Duty Cycle: 1:1
Medium: HSL_2600_231206 Medium parameters used: $f=2510.000$ MHz; $\sigma=1.87$ S/m; $\epsilon_r=39.3$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(7.1, 6.87, 7.24); Calibrated: 2023-03-08
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: ELI V8.0-I; Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (80.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.961 W/kg; SAR (10g) = 0.483 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.10 dB
SAR (1g) = 0.989 W/kg; SAR (8g) = 0.525 W/kg; SAR (10g) = 0.480 W/kg
Smallest distance from peaks to all points 3 dB below = 9.0 mm
Ratio of SAR at M2 to SAR at M1 = 79.6 %

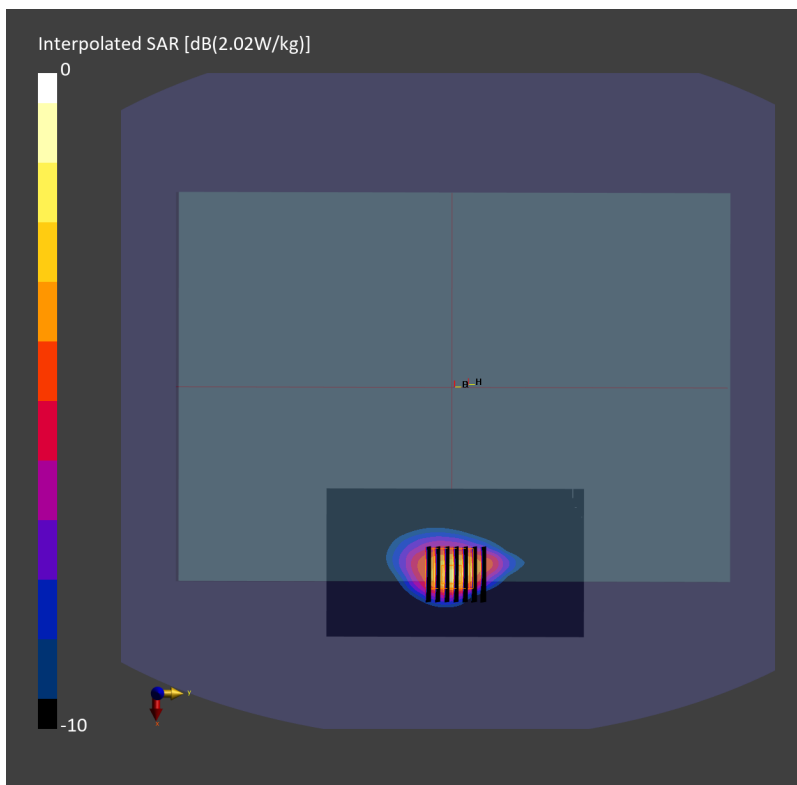

#02_LTE Band 25_20M_QPSK_1_0_Bottom of Laptop_0mm_Ch26140


Communication System: LTE-FDD; Frequency: 1860.000 MHz; Duty Cycle: 1:1
Medium: HSL_1900_231205 Medium parameters used: $f=1860.000$ MHz; $\sigma=1.39$ S/m; $\epsilon_r=39.2$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(7.54, 7.35, 7.67); Calibrated: 2023-03-08
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: ELI V8.0-I; Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.940 W/kg; SAR (10g) = 0.548 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.08 dB
SAR (1g) = 1.11 W/kg; SAR (8g) = 0.643 W/kg; SAR (10g) = 0.594 W/kg
Smallest distance from peaks to all points 3 dB below = 9.2 mm
Ratio of SAR at M2 to SAR at M1 = 83.3 %

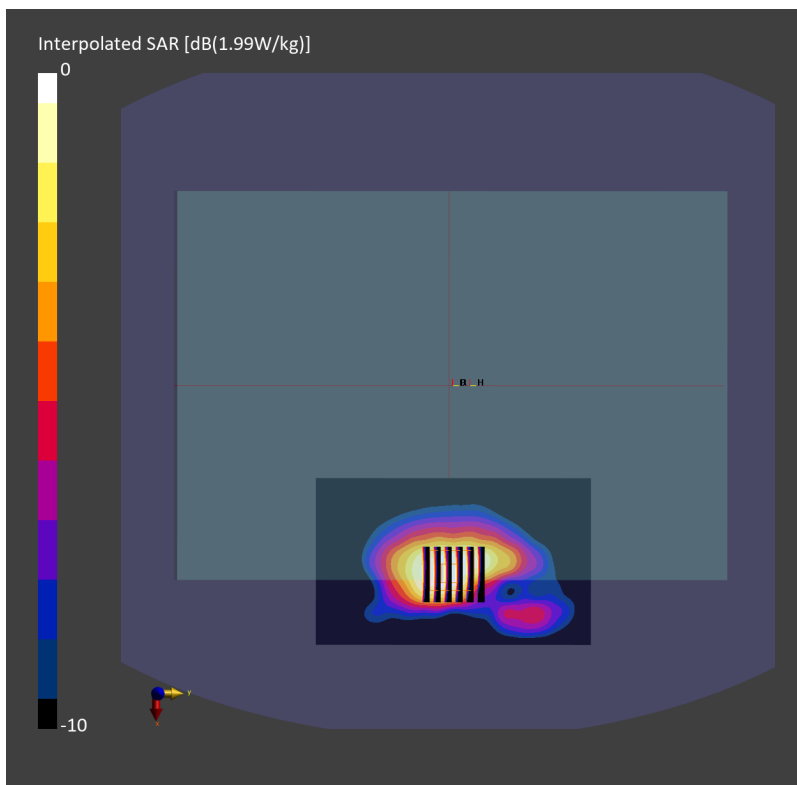

#03_LTE Band 30_10M_QPSK_1_0_Bottom of Laptop_0mm_Ch27710


Communication System: LTE-FDD; Frequency: 2310.000 MHz; Duty Cycle: 1:1
Medium: HSL_2300_231209 Medium parameters used: $f=2310.000$ MHz; $\sigma=1.66$ S/m; $\epsilon_r=40.1$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(7.32, 7.11, 7.45); Calibrated: 2023-03-08
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: ELI V8.0-I; Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.988 W/kg; SAR (10g) = 0.511 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 1.03 W/kg; SAR (8g) = 0.559 W/kg; SAR (10g) = 0.511 W/kg
Smallest distance from peaks to all points 3 dB below = 10.2 mm
Ratio of SAR at M2 to SAR at M1 = 80.9 %

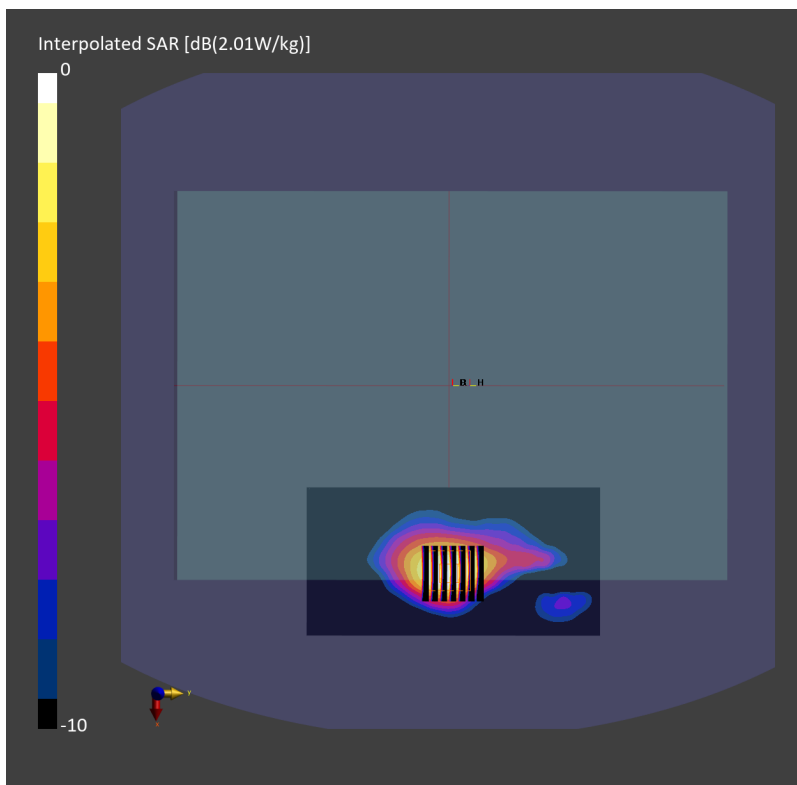

#04_LTE Band 66_20M_QPSK_1_0_Bottom of Laptop_0mm_Ch132572


Communication System: LTE-FDD; Frequency: 1770.000 MHz; Duty Cycle: 1:1
Medium: HSL_1750_231205 Medium parameters used: $f=1770.000$ MHz; $\sigma=1.38$ S/m; $\epsilon_r=40.6$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(7.86, 7.63, 7.94); Calibrated: 2023-03-08
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: ELI V8.0-I; Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.945 W/kg; SAR (10g) = 0.544 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.04 dB
SAR (1g) = 1.10 W/kg; SAR (8g) = 0.628 W/kg; SAR (10g) = 0.579 W/kg
Smallest distance from peaks to all points 3 dB below = 9.2 mm
Ratio of SAR at M2 to SAR at M1 = 80.9 %

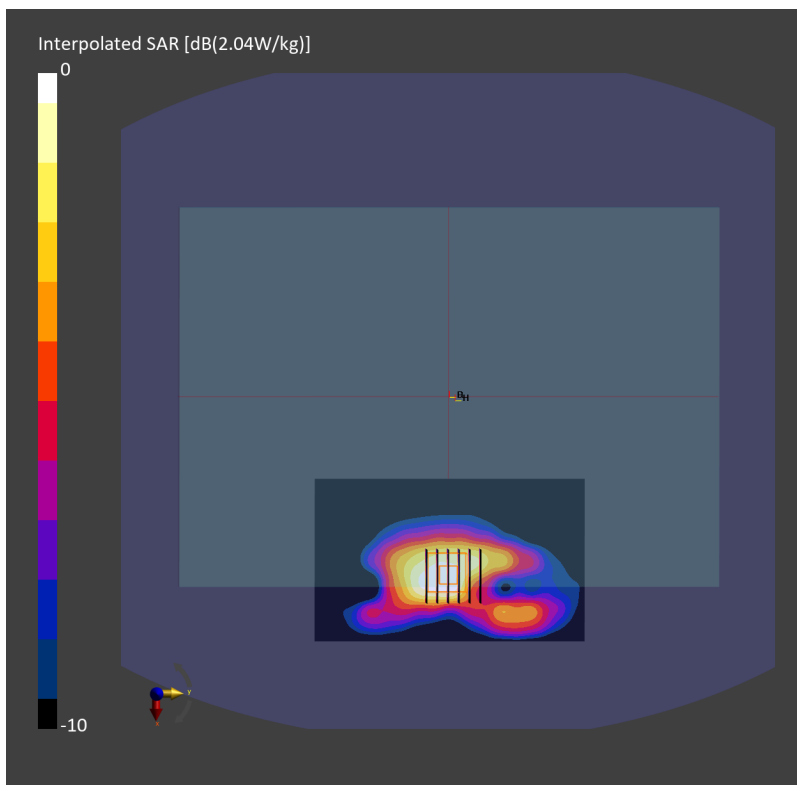

#05_LTE Band 41_20M_QPSK_1_0_Bottom of Laptop_0mm_Ch39750;HPUE


Communication System: LTE-TDD; Frequency: 2506.000 MHz; Duty Cycle: 1:2.33
Medium: HSL_2600_231206 Medium parameters used: $f=2506.000$ MHz; $\sigma=1.87$ S/m; $\epsilon_r=39.3$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(7.1, 6.87, 7.24); Calibrated: 2023-03-08
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: ELI V8.0-I; Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10172-CAH

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.975 W/kg; SAR (10g) = 0.469 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.03 dB
SAR (1g) = 0.958 W/kg; SAR (8g) = 0.508 W/kg; SAR (10g) = 0.463 W/kg
Smallest distance from peaks to all points 3 dB below = 9.5 mm
Ratio of SAR at M2 to SAR at M1 = 79.7 %

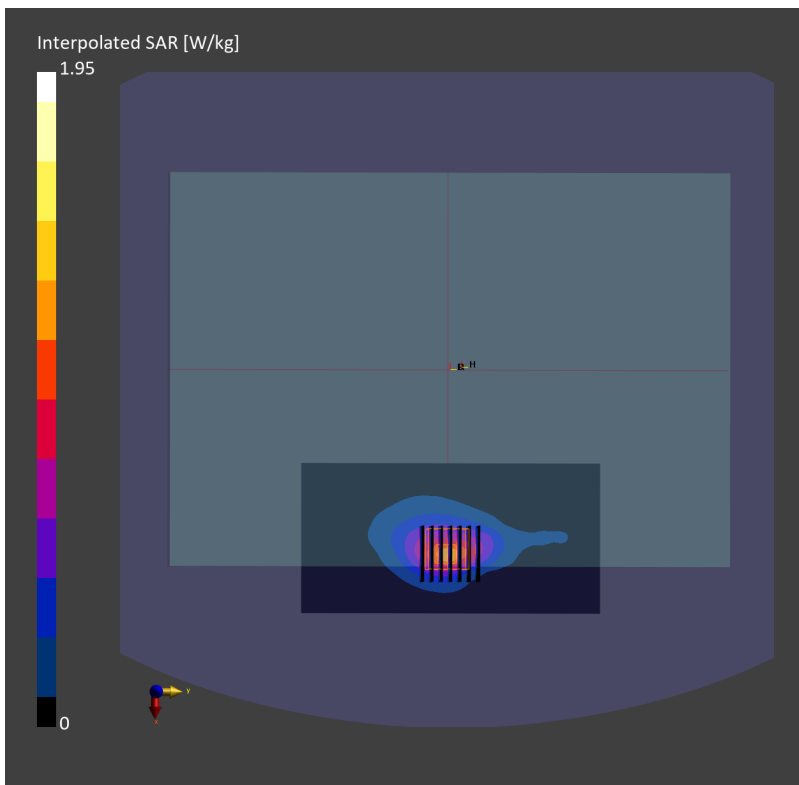

#06_LTE Band 42_20M_QPSK_1_0_Bottom of Laptop_0mm_Ch43340


Communication System: LTE-TDD; Frequency: 3575.000 MHz; Duty Cycle: 1:1.59
Medium: HSL_3500_231210 Medium parameters used: $f=3575.000$ MHz; $\sigma=3.05$ S/m; $\epsilon_r=37.7$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(6.18, 6.0, 6.31); Calibrated: 2023-03-08
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: ELI V8.0-I; Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10172-CAH

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 1.00 W/kg; SAR (10g) = 0.404 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
Power Drift = 0.05 dB
SAR (1g) = 1.03 W/kg; SAR (8g) = 0.452 W/kg; SAR (10g) = 0.404 W/kg
Smallest distance from peaks to all points 3 dB below = 8.0 mm
Ratio of SAR at M2 to SAR at M1 = 74.1 %

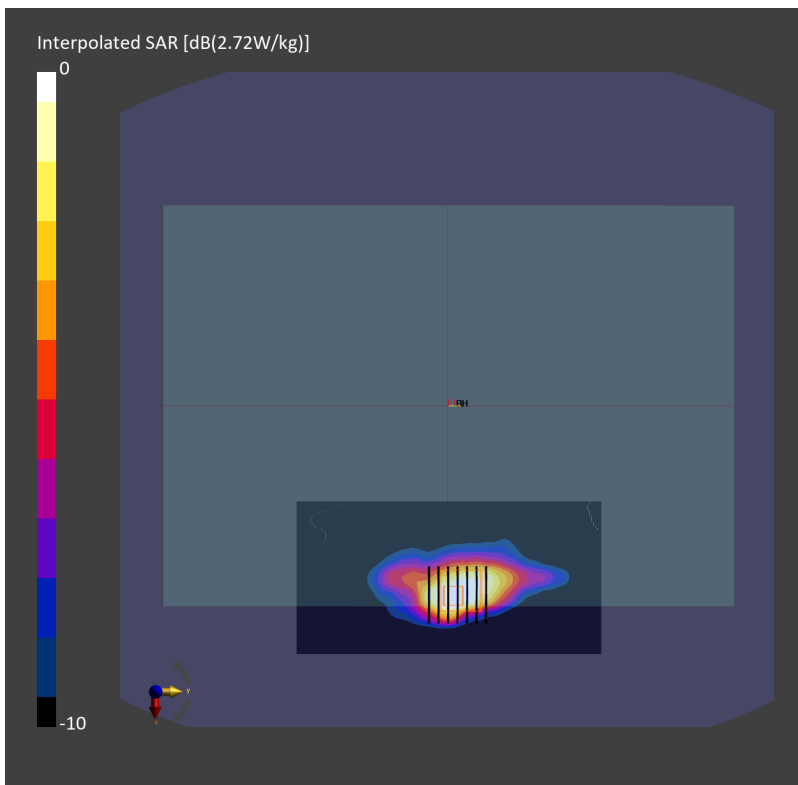

#07_LTE Band 43_20M_QPSK_1_0_Bottom of Laptop_0mm_Ch43690


Communication System: LTE-TDD; Frequency: 3610.000 MHz; Duty Cycle: 1:1.59
Medium: HSL_3700_231211 Medium parameters used: $f=3610.000$ MHz; $\sigma=3.07$ S/m; $\epsilon_r=37.7$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(6.15, 5.95, 6.26); Calibrated: 2023-03-08
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: ELI V8.0-I; Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10172-CAH

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.975 W/kg; SAR (10g) = 0.395 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
Power Drift = 0.05 dB
SAR (1g) = 1.01 W/kg; SAR (8g) = 0.444 W/kg; SAR (10g) = 0.397 W/kg
Smallest distance from peaks to all points 3 dB below = 7.7 mm
Ratio of SAR at M2 to SAR at M1 = 74.3 %

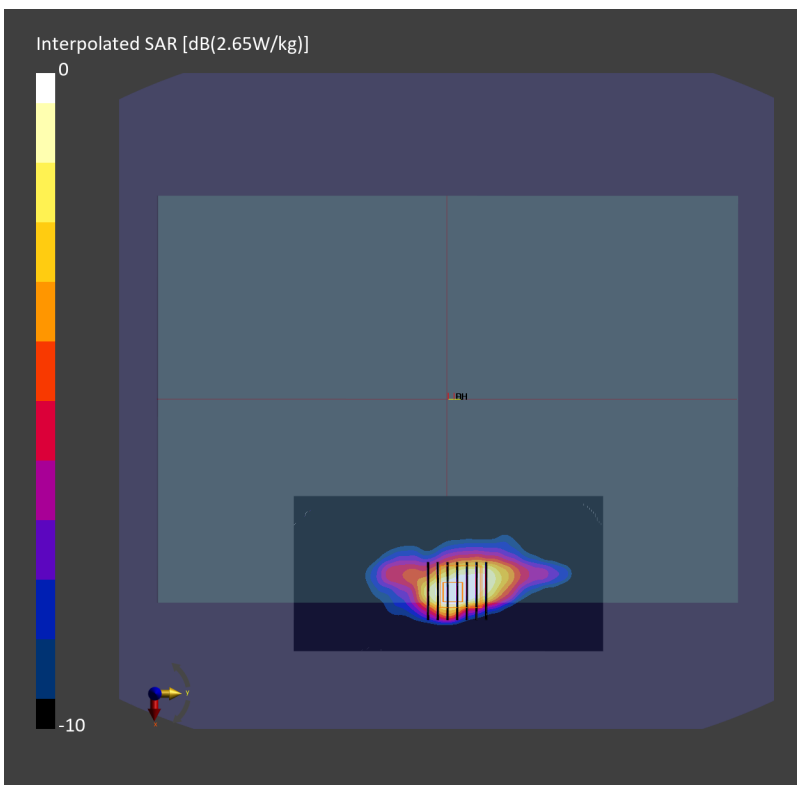

#08_LTE Band 48_20M_QPSK_1_0_Bottom of Laptop_0mm_Ch55830


Communication System: LTE-TDD; Frequency: 3609.000 MHz; Duty Cycle: 1:1.59
Medium: HSL_3700_231211 Medium parameters used: $f=3609.000$ MHz; $\sigma=3.07$ S/m; $\epsilon_r=37.7$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(6.15, 5.95, 6.26); Calibrated: 2023-03-08
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: ELI V8.0-I; Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10172-CAH

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.908 W/kg; SAR (10g) = 0.366 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
Power Drift = 0.05 dB
SAR (1g) = 0.936 W/kg; SAR (8g) = 0.410 W/kg; SAR (10g) = 0.367 W/kg
Smallest distance from peaks to all points 3 dB below = 7.7 mm
Ratio of SAR at M2 to SAR at M1 = 74.0 %

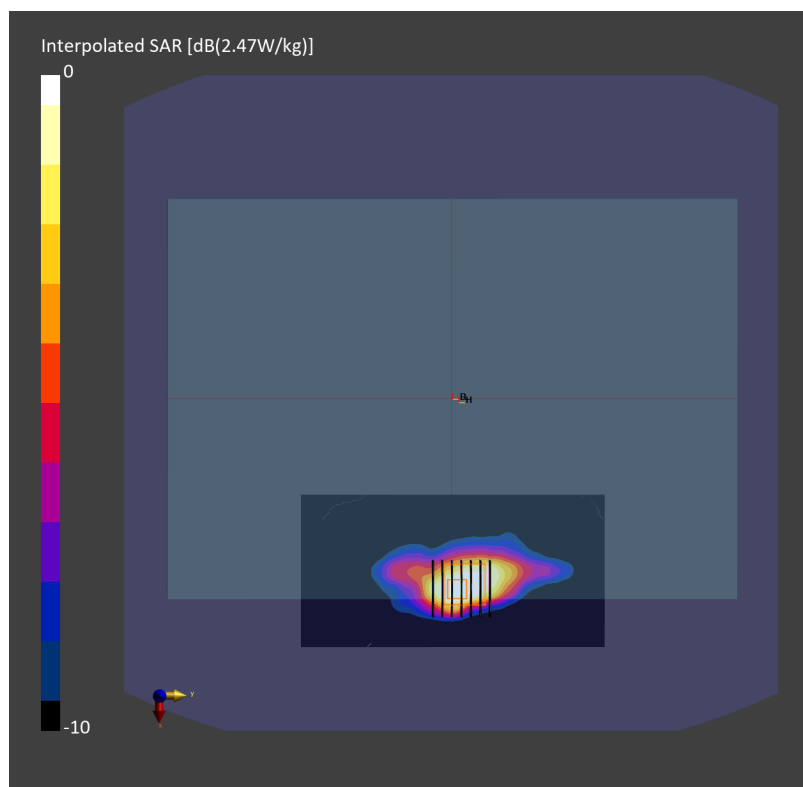

#09_FR1 n7_40M_BPSK_1_1_Bottom of Laptop_0mm_Ch507000


Communication System: 5G NR; Frequency: 2535.000 MHz; Duty Cycle: 1:1
Medium: HSL_2600_231206 Medium parameters used: $f=2535.000$ MHz; $\sigma=1.90$ S/m; $\epsilon_r=39.2$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(7.1, 6.87, 7.24); Calibrated: 2023-03-08
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: ELI V8.0-I; Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10935-AAD

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 1.04 W/kg; SAR (10g) = 0.508 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 1.04 W/kg; SAR (8g) = 0.552 W/kg; SAR (10g) = 0.504 W/kg
Smallest distance from peaks to all points 3 dB below = 9.3 mm
Ratio of SAR at M2 to SAR at M1 = 79.8 %

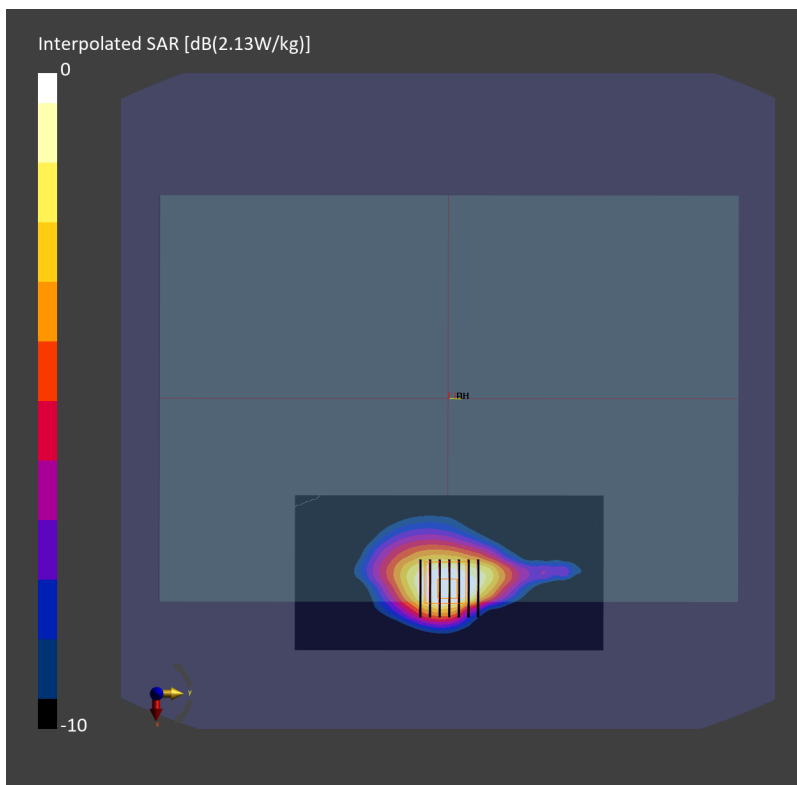

#10_FR1 n25_40M_BPSK_1_1_Bottom of Laptop_0mm_Ch376500


Communication System: 5G NR; Frequency: 1882.500 MHz; Duty Cycle: 1:1
Medium: HSL_1900_231205 Medium parameters used: $f=1882.500$ MHz; $\sigma=1.42$ S/m; $\epsilon_r=39.1$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(7.54, 7.35, 7.67); Calibrated: 2023-03-08
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: ELI V8.0-I; Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.942 W/kg; SAR (10g) = 0.521 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.02 dB
SAR (1g) = 1.00 W/kg; SAR (8g) = 0.576 W/kg; SAR (10g) = 0.532 W/kg
Smallest distance from peaks to all points 3 dB below = 10.3 mm
Ratio of SAR at M2 to SAR at M1 = 83.2 %

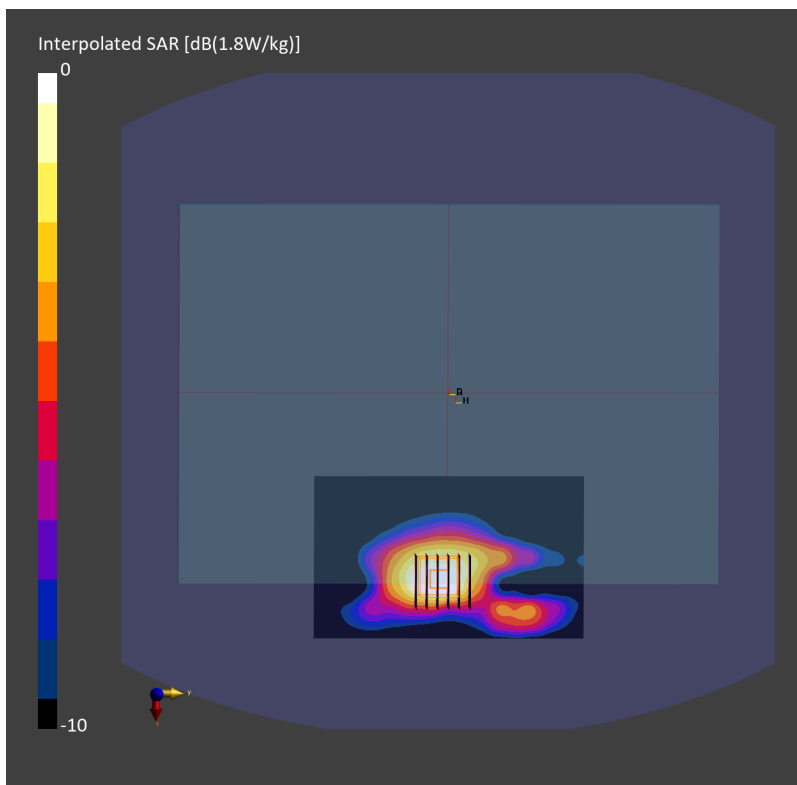

#11_FR1 n30_10M_BPSK_1_1_Bottom of Laptop_0mm_Ch462000


Communication System: 5G NR; Frequency: 2310.000 MHz; Duty Cycle: 1:1
Medium: HSL_2300_231209 Medium parameters used: $f=2310.000$ MHz; $\sigma=1.66$ S/m; $\epsilon_r=40.1$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(7.32, 7.11, 7.45); Calibrated: 2023-03-08
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: ELI V8.0-I; Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.941 W/kg; SAR (10g) = 0.475 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.03 dB
SAR (1g) = 0.959 W/kg; SAR (8g) = 0.523 W/kg; SAR (10g) = 0.478 W/kg
Smallest distance from peaks to all points 3 dB below = 10.1 mm
Ratio of SAR at M2 to SAR at M1 = 81.2 %

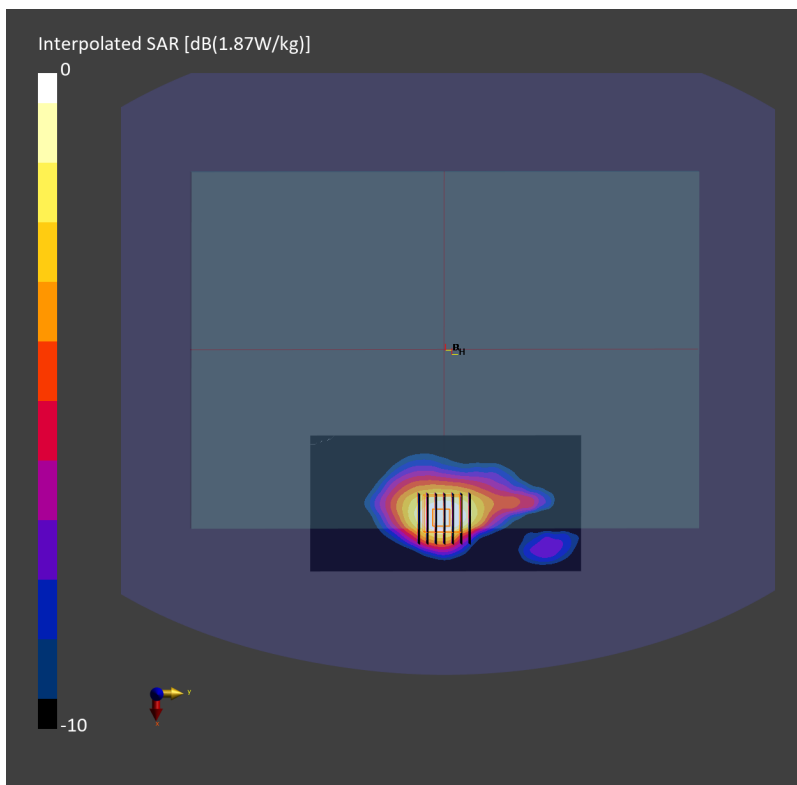

#12_FR1 n66_40M_BPSK_1_1_Bottom of Laptop_0mm_Ch349000


Communication System: 5G NR; Frequency: 1745.000 MHz; Duty Cycle: 1:1
Medium: HSL_1750_231205 Medium parameters used: $f=1745.000$ MHz; $\sigma=1.35$ S/m; $\epsilon_r=40.6$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(7.86, 7.63, 7.94); Calibrated: 2023-03-08
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: ELI V8.0-I; Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.908 W/kg; SAR (10g) = 0.527 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.03 dB
SAR (1g) = 1.06 W/kg; SAR (8g) = 0.610 W/kg; SAR (10g) = 0.563 W/kg
Smallest distance from peaks to all points 3 dB below = 9.2 mm
Ratio of SAR at M2 to SAR at M1 = 82.5 %

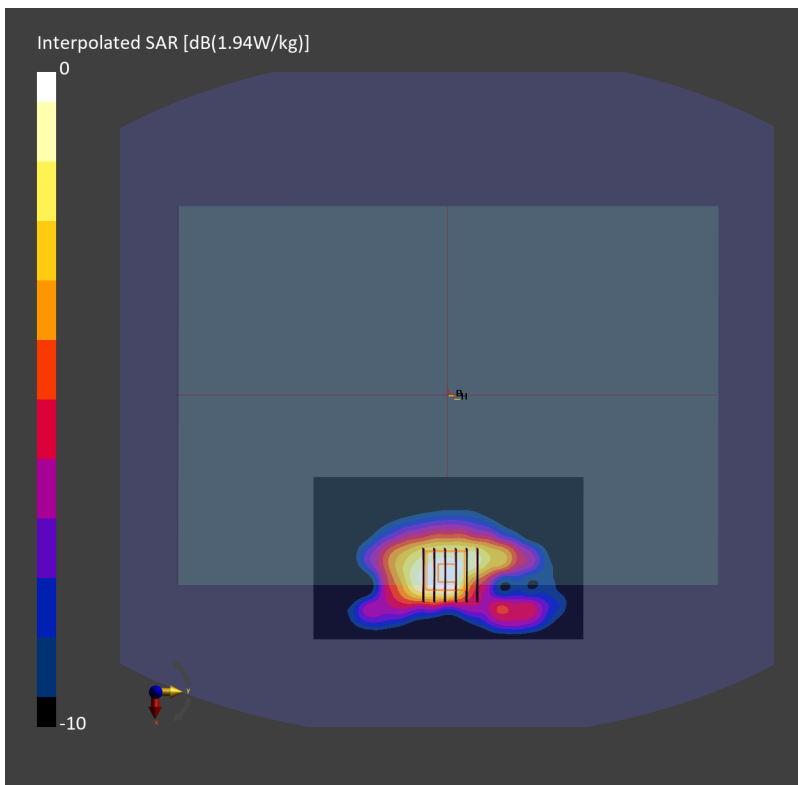

#13_FR1 n70_15M_BPSK_1_1_Bottom of Laptop_0mm_Ch340500


Communication System: 5G NR; Frequency: 1702.500 MHz; Duty Cycle: 1:1
Medium: HSL_1750_231205 Medium parameters used: $f=1702.500$ MHz; $\sigma=1.31$ S/m; $\epsilon_r=40.8$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(7.86, 7.63, 7.94); Calibrated: 2023-03-08
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: ELI V8.0-I; Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.905 W/kg; SAR (10g) = 0.534 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.02 dB
SAR (1g) = 1.05 W/kg; SAR (8g) = 0.609 W/kg; SAR (10g) = 0.563 W/kg
Smallest distance from peaks to all points 3 dB below = 9.7 mm
Ratio of SAR at M2 to SAR at M1 = 82.8 %

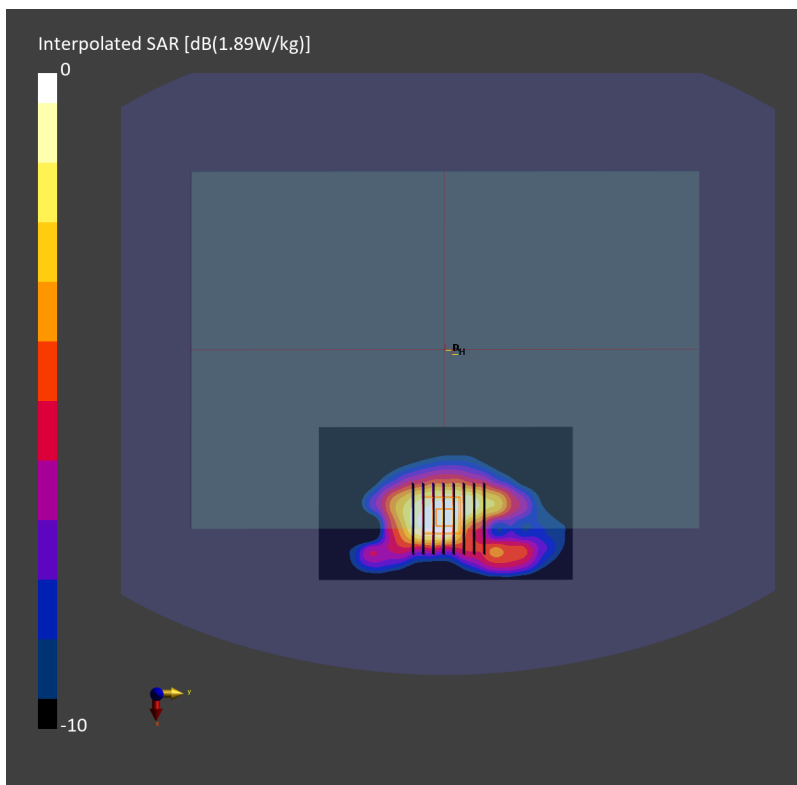

#14_FR1 n41_100M_BPSK_1_1_Bottom of Laptop_0mm_Ch518598


Communication System: 5G NR; Frequency: 2592.990 MHz; Duty Cycle: 1:1
Medium: HSL_2600_231206 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 39.0$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(7.1, 6.87, 7.24); Calibrated: 2023-03-08
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: ELI V8.0-I; Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.558 W/kg; SAR (10g) = 0.269 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.03 dB
SAR (1g) = 0.562 W/kg; SAR (8g) = 0.294 W/kg; SAR (10g) = 0.268 W/kg
Smallest distance from peaks to all points 3 dB below = 9.3 mm
Ratio of SAR at M2 to SAR at M1 = 79.2 %

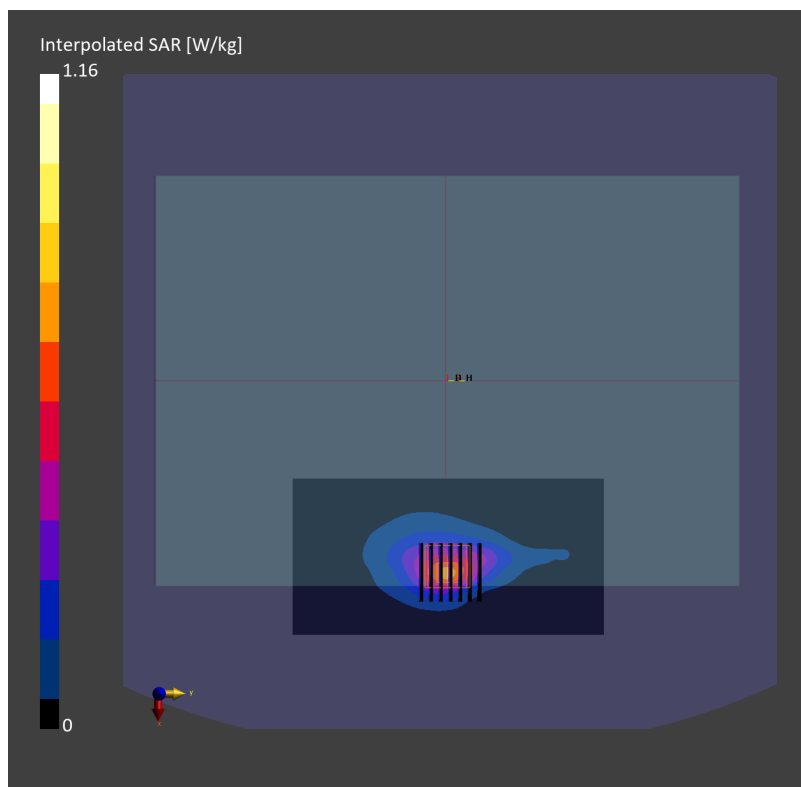

#15_FR1 n48_40M_BPSK_1_1_Bottom of Laptop_0mm_Ch641666


Communication System: 5G NR; Frequency: 3624.990 MHz; Duty Cycle: 1:1
Medium: HSL_3700_231209 Medium parameters used: $f=3624.985$ MHz; $\sigma=3.10$ S/m; $\epsilon_r=37.5$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(6.15, 5.95, 6.26); Calibrated: 2023-03-08
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: ELI V8.0-I; Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10903-AAD

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.997 W/kg; SAR (10g) = 0.403 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
Power Drift = 0.02 dB
SAR (1g) = 1.03 W/kg; SAR (8g) = 0.453 W/kg; SAR (10g) = 0.405 W/kg
Smallest distance from peaks to all points 3 dB below = 8.0 mm
Ratio of SAR at M2 to SAR at M1 = 74.5 %

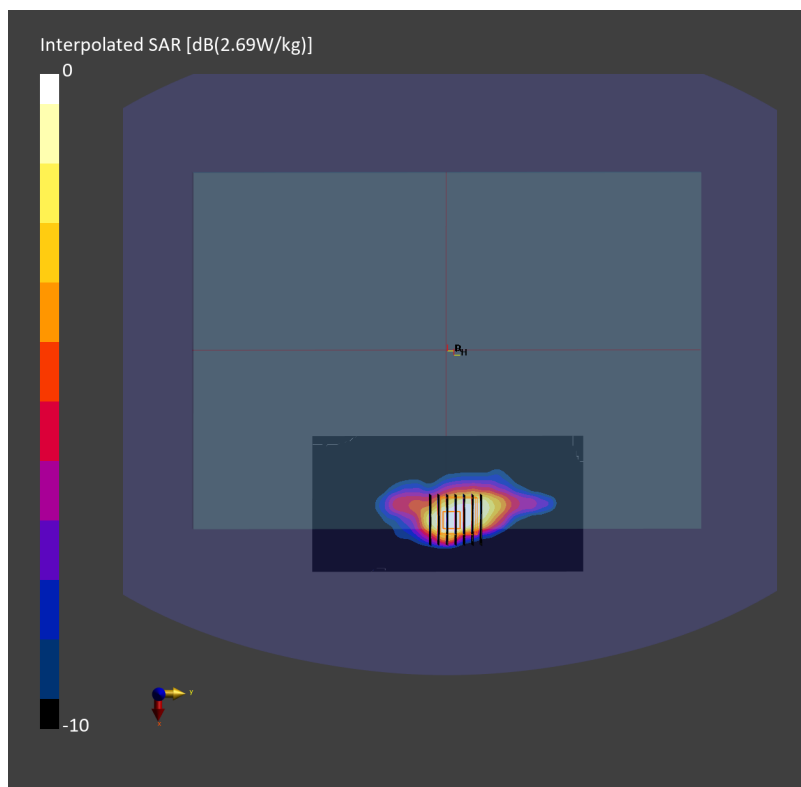

#16_FR1 n77_100M_BPSK_1_1_Bottom of Laptop_0mm_Ch656000

Communication System: 5G NR; Frequency: 3840.000 MHz; Duty Cycle: 1:1
Medium: HSL_3900_231209 Medium parameters used: $f=3840.000$ MHz; $\sigma=3.30$ S/m; $\epsilon_r=37.2$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(6.04, 5.85, 6.16); Calibrated: 2023-03-08
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: ELI V8.0-I; Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.644 W/kg; SAR (10g) = 0.265 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
Power Drift = 0.05 dB
SAR (1g) = 0.665 W/kg; SAR (8g) = 0.293 W/kg; SAR (10g) = 0.263 W/kg
Smallest distance from peaks to all points 3 dB below = 7.3 mm
Ratio of SAR at M2 to SAR at M1 = 71.9 %

