

# ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

# INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 22 SUBPART H, PART 24 SUBPART E and PART 27

Product Name:	OF Smart Phone
Trouter Maine.	
Brand Name:	DELL
Model Name:	V02S002
Model Difference:	N/A
FCC ID:	E2KV02S002
Report No.:	EH/2010/70044
Issue Date:	Sep. 21, 2010
FCC Rule Part:	2 , 22H & 24E & 27
Prepared for:	DELL Inc.
	One Dell Way, Round Rock, Tx 78682
Prepared by:	SGS Taiwan Ltd.
	<b>Electronics &amp; Communication Laboratory</b>
	No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei County, Taiwan.

*Note:* This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



FCC ID: E2KV02S002

Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 2 of 80

# **VERIFICATION OF COMPLIANCE**

DELL Inc.
One Dell Way, Round Rock, Tx 78682
Smart Phone
DELL
V02S002
N/A
E2KV02S002
EH/2010/70044
Jul. 28, 2010 ~ Sep. 15, 2010
Jul. 28, 2010

## We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA/EIA-603-C-2004 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rule FCC PART 22 subpart H, PART 24 subpart E and PART 27.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Bondi Jin	Date:	Sep. 21, 2010
	Bondi Liu / Engineer		
Prepared By:	makas	Date:	Sep. 21, 2010
-	Eva Kao / Asst. Supervisor		
Approved By:	ALNO HSieh	Date:	Sep. 21, 2010
-			

Arno Hsieh /Asst. Supervisor

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



# Version

Version No.	Date	Description		
00 Sep. 21, 2010		Initial creation of document		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 4 of 80

# **Table of Contents**

1.	GEN	NERAL PRODUCT INFORMATION	6
	1.1.	Related Submittal(s) / Grant (s)	9
	1.2.	Test Methodology	9
	1.3.	Test Facility	9
	1.4.	Special Accessories	9
	1.5.	Equipment Modifications	9
2.	SYS	STEM TEST CONFIGURATION	
	2.1.	EUT Configuration	10
	2.2.	EUT Exercise	10
	2.3.	Test Procedure	10
	2.4.	Measurement Equipment Used:	11
	2.5.	Configuration of Tested System	13
3.	SUN	MMARY OF TEST RESULTS	
4.	DES	SCRIPTION OF TEST MODES	
5.	RF I	POWER OUTPUT MEASUREMENT	
	5.1	Standard Applicable:	16
	5.2	Test Set-up:	17
	5.3	Measurement Procedure:	17
	5.4	Measurement Equipment Used:	17
	5.5	Measurement Result:	
6.	ERF	P, EIRP MEASUREMENT	
	6.1.	Standard Applicable:	
	6.2.	Test SET-UP (Block Diagram of Configuration):	
	6.3.	Measurement Procedure:	24
	6.4.	Measurement Equipment Used:	24
	6.5.	Measurement Result:	25
7.	99%	6 OCCUPIED BANDWIDTH MEASUREMENT	
	7.1.	Standard Applicable:	
	7.2.	Test Set-up:	
	7.3.	Measurement Procedure:	
	7.4.	Measurement Equipment Used:	
	7.5.	Measurement Result:	



### FCC ID: E2KV02S002

8.	OUT	OF BAND EMISSION AT ANTENNA TERMINALS	
	8.1.	Standard Applicable:	
	8.2.	Test SET-UP:	42
	8.3.	Measurement Procedure:	43
	8.4.	Measurement Equipment Used:	43
	8.5.	Measurement Result:	44
9.	FIEL	D STRENGTH OF SPURIOUS RADIATION MEASUREMENT	
	9.1.	Standard Applicable:	
	9.2.	EUT Setup (Block Diagram of Configuration):	56
	9.3.	Measurement Procedure:	57
	9.4.	Measurement Equipment Used:	57
	9.5.	Measurement Result:	57
10.	FRE	QUENCY STABILITY V.S. TEMPERATURE MEASUREMENT	
10.	<b>FRE</b> 10.1.	QUENCY STABILITY V.S. TEMPERATURE MEASUREMENT           Standard Applicable:	
10.		-	76
10.	10.1.	Standard Applicable:	76 76
10.	10.1. 10.2.	Standard Applicable: Test Set-up:	76 
10.	10.1. 10.2. 10.3.	Standard Applicable: Test Set-up: Measurement Procedure:	
10.	10.1. 10.2. 10.3. 10.4. 10.5.	Standard Applicable: Test Set-up: Measurement Procedure: Measurement Equipment Used:	
	10.1. 10.2. 10.3. 10.4. 10.5.	Standard Applicable: Test Set-up: Measurement Procedure: Measurement Equipment Used: Measurement Result:	
	<ol> <li>10.1.</li> <li>10.2.</li> <li>10.3.</li> <li>10.4.</li> <li>10.5.</li> <li>FREG</li> </ol>	Standard Applicable: Test Set-up: Measurement Procedure: Measurement Equipment Used: Measurement Result: QUENCY STABILITY V.S. VOLTAGE MEASUREMENT	
	<ol> <li>10.1.</li> <li>10.2.</li> <li>10.3.</li> <li>10.4.</li> <li>10.5.</li> <li>FREC</li> <li>11.1.</li> </ol>	Standard Applicable: Test Set-up: Measurement Procedure: Measurement Equipment Used: Measurement Result: QUENCY STABILITY V.S. VOLTAGE MEASUREMENT. Standard Applicable:	
	<ol> <li>10.1.</li> <li>10.2.</li> <li>10.3.</li> <li>10.4.</li> <li>10.5.</li> <li>FREC</li> <li>11.1.</li> <li>11.2.</li> </ol>	Standard Applicable: Test Set-up: Measurement Procedure: Measurement Equipment Used: Measurement Result: QUENCY STABILITY V.S. VOLTAGE MEASUREMENT. Standard Applicable: Test Set-up:	



# 1. GENERAL PRODUCT INFORMATION

#### General:

Product Name	Smart Phone			
Brand Name	DELL			
Model Name	V02S002			
Model Difference	N/A			
Micro USB Cable	Model No.: 5	Model No.: 5K.16R01.001 / CU04C04U05-K66-EF, Supplier: HELM		
Simple Hands-free (SHF)	<ol> <li>Model No.: 525283 / TY.2C190.003, Supplier: Foster</li> <li>Model No.: C055T / TY.2C190.001, Supplier: PCH</li> </ol>			
	3.7 Vdc re-ch	hargeable battery or 5Vdc by AC/DC power adapter		
Dowor Supply	Battery:	Model: 214L0 / 2C.214L0.001, Supplier: CHENG UEI		
Power Supply	Adapter:	Model No.: 32HD9/ 0005ADUUS, Supplier: PCH		
	Car Charge:	Model No.: DT933 / LD5V50-00, Supplier: PCH		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



#### GSM and WCDMA:

	Operating Frequency		Rated Power
	GSM/GPRS 850, Class 12	824.2 MHz- 848.8MHz	32.5 dBm
Cellular Phone Standards	EDGE 850, Class 12	824.2 MHz- 848.8MHz	26.5 dBm
Frequency Range and Power:	GSM/GPRS 1900, Class 12	1850.2MHz-1909.8MHz	29.5 dBm
	EDGE 1900, Class 12 1850.2MHz–1909.8MHz		25.5 dBm
	WCDMA/HSUPA/HSDPA Band IV 1712.4MHz–1752.6MHz		23.5 dBm
Hardware Version:	N/A		
Software Version:	N/A		
IMEI:	01228700XXXXXX		

Final Amplifier Voltage and Current Information:

Test Mode	DC voltage (V)	DC current (mA)
GPRS 850	3.3V	450
GPRS 1900	3.3V	380
EDGE 850	3.3V	360
EDGE 1900	3.3V	320
WCDMA Band 4	3.3V	660
HSUPA Band 4	3.3V	660



#### WLAN: 802.11 b/g

WEAR 002.11 0/5		
Frequency Range:	2412 – 2462MHz	
Channel number:	11 channels	
Max. Output Power:	802.11 b: 17.38 dBm 802.11 g: 13.84 dBm	
Modulation Technology:	DSSS, OFDM	
Modulation type:	CCK, DQPSK, DBPSK for DSSS 64QAM. 16QAM, QPSK, BPSK for OFDM	
Transition Rate:	802.11 b: 1/2/5.5/11 Mbps; 802.11 g: 6/9/12/18/24/36/48/54 Mbps	
Antenna Designation:	PIFA Antenna, -0.02dBi.	
Modulation type: Transition Rate:	CCK, DQPSK, DBPSK for DSSS 64QAM. 16QAM, QPSK, BPSK for OFDM 802.11 b: 1/2/5.5/11 Mbps; 802.11 g: 6/9/12/18/24/36/48/54 Mbps	

#### Bluetooth:

Bluetooth Version:	V2.1 + EDR (GFSK + $\pi/4$ DQPSK + 8DPSK)	
Channel number:	79 channels	
Modulation type:	Frequency Hopping Spread Spectrum	
Transmit Power: 6.76 dBm		
Frequency Range:	2.402GHz – 2.480GHz	
Dwell Time:	<= 0.4s	
Operating Mode:	Point-to-Point	
Antenna Designation:	PIFA Antenna, -0.02dBi.	

### This test report applies for GSM/GPRS/EDGE 850/1900, WCDMA/HSDPA/HSUPA band IV.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



### **1.1.** Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: <u>**E2KV02S002**</u> filing to comply with Section Part 22 subpart H, Part 24 subpart E and Part27 of the FCC CFR 47 Rules.

### **1.2.** Test Methodology

Both conducted and radiated testing were performed according to the procedures document of TIA/EIA 603C and FCC CFR 47.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057.

The Output power Procedure of KDB941225 (SAR Measurement Procedures for 3G devices, WCDMA / HSDPA) was used for EUT and Base station setting.

### **1.3.** Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number are: 990257 and 236194, Canada Registration Number: 4620A-4.

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 &10 meters) and FCC Registration Number: 94644.

All equipment is calibrated externally and traceable to SI (International System of Unit).

#### **1.4.** Special Accessories

Not available for this EUT intended for grant.

### **1.5. Equipment Modifications**

Not available for this EUT intended for grant.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. [No.134, Wu Kung Road, Wuku Industrial Zone, Taiwan /chti熙五股工業區五工路 134 號



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 10 of 80

# 2. SYSTEM TEST CONFIGURATION

### 2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2. EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency which was for the purpose of the measurements.

### 2.3. Test Procedure

### 2.3.1 AC Power Line Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4: 2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

### 2.3.2 Conducted Measurement at Antenna Port:

According to measurement procured TIA/EIA 603C, the EUT is placed on a turn table which is 0.8 m above ground plane. A low loss of RF cable was used to connect the antenna port of EUT to measurement equipment.

### 2.3.3 Radiated Emissions (ERP/EIRP):

The EUT is a placed on as turn table which is 80 cm above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both Horizontal and Vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna according to the requirements in Section 2 of TIA/EIA 603C.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

миналажеривные конструпление и понтриктери rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alle tion, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 Taiwan Ltd



# 2.4. Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
ТҮРЕ		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2010	04/18/2012
Spectrum Analyzer	Agilent	E4440A	US41160416	01/25/2010	01/24/2011
Radio Communication Analyzer	R&S	CMU200	111787	10/31/2008	10/30/2010
800 – 1000MHz Filter	Micro-Tronics	BRM13462	001	01/05/2010	01/04/2011
1800 – 2000MHz Filter	Micro-Tronics	BRM13463	001	01/05/2010	01/04/2011
Temperature Chamber	TERCHY	MHG-120LF	911009	04/30/2010	04/29/2012
Temperature Chamber	GIANT FORCE	GTH-150-40- CP-AR	MAA0512-018	02/24/2010	02/23/2012
DC Block	Agilent	BLK-18	155452	07/05/2010	07/04/2011
Attenuator	Mini-Circuit	BW-S20W5	N/A	07/05/2010	07/04/2011
Attenuator	Mini-Circuit	BW-S10W5	N/A	07/05/2010	07/04/2011
Attenuator	Mini-Circuit	BW-S6W5	N/A	07/05/2010	07/04/2011
Splitter	Agilent	11636B	N/A	07/05/2010	07/04/2011
DC Power Supply	Chroma	41901	777188	04/15/2010	04/14/2012

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 12 of 80

ERP, E	IRP MEASUREM	ENT EQUIPN	AENT List 966	Chamber	
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	R&S	FSP 40	100034	02/12/2010	02/11/2011
Bilog Antenna	SCHWAZBECK	VULB9160	3136	11/19/2009	11/18/2010
Dipole Antenna	SCHWAZBECK	VHAP	908/909	07/17/2010	07/16/2012
Dipole Antenna	SCHWAZBECK	UHAP	891/892	07/17/2010	07/16/2012
Horn antenna	SCHWAZBECK	BBHA 9120D	309/320	03/09/2009	03/08/2011
Signal Generator	R&S	SMR40	100210	02/10/2010	02/09/2012
Signal Generator	Agilent	E4438C	MY45093613	07/08/2010	07/07/2011
Pre-Amplifier	Agilent	8447D	1937A02834	11/28/2009	11/27/2010
Pre-Amplifier	Agilent	8449B	3008A01973	01/05/2010	01/04/2011
Attenuator	Mini-Circuit	BW-S20W5	001	07/05/2010	07/04/2011
Attenuator	Mini-Circuit	BW-S10W5	001	07/05/2010	07/04/2011
Attenuator	Mini-Circuit	BW-S6W5	001	07/05/2010	07/04/2011
Radio Communication Analyzer	R&S	CMU200	111787	10/31/2008	10/30/2010
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R
Controller	HD	HD100	N/A	N.C.R	N.C.R
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	01/05/2010	01/04/2011
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	01/05/2010	01/04/2011
Filter 800-1000	Micro-Tronics	BRM13462	1	01/05/2010	01/04/2011
Filter 1800-2000	Micro-Tronics	BRM13463	1	01/05/2010	01/04/2011
3m Site	SGS	966 chamber	N/A	11/08/2009	11/09/2010



### 2.5. Configuration of Tested System

### Fig. 2-1 Configuration of Tested System (Fixed Channel)



### **Remote Side**




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1.	Universal Radio Com- munication Tester	R&S	CMU200	102189	shielded	Un-shielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



# 3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§2.1046(a)	RF Power Output	Compliant
§2.1046(a)		
§22.913(a)(2)	ERP/ EIRP measurement	Compliant
§24.232(c)		Compliant
§27.50(d)(2)		
§2.1049(h)	99% Occupied Bandwidth	Compliant
§2.1051	Out of Band Emissions at Antenna	
§22.917(a)	Terminals and	Compliant
§24.238(a)	Band Edge	e empireme
§27.53(g)	2 2	
§2.1053		
§22.917(a)	Field Strength of Spurious Radiation	Compliant
§24.238(a)		F
§27.53(g)		
§2.1055(a)(1)		
§22.355	Frequency Stability vs. Temperature	Compliant
§24.235	The system system of the result	r ·· ·
§27.54		
§2.1055(d)(2)		
§22.355	Frequency Stability vs. Voltage	Compliant
§24.235	1 · · · · · · · · · · · · · · · · · · ·	r ···
<u>§27.54</u>		
§15.107;§15.207	AC Power Line Conducted Emission	Compliant

Max ERP/EIRP measurement result:

	dBm		W
GPRS 850 Band	33.10	ERP	2.042
PCS 1900 Band	29.41	ERP	0.873
EDGE 850 Band	30.36	EIRP	1.086
EDGE 1900 Band	29.14	EIRP	0.820
WCDMA Band IV	19.55	EIRP	0.090
HSUPA Band IV	22.66	EIRP	0.185

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 15 of 80

# 4. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

EUT staying in continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing.

The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for GSM/GPRS/EDGE and WCDMA Band IV with power adaptors. The worst-case of E2 position for GPRS 850 band, E2 position for GPRS 1900, H position, E2 position HSUPA Band IV were reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



# 5. RF POWER OUTPUT MEASUREMENT

### 5.1 Standard Applicable:

According to FCC §2.1046.

FCC 22.913(a) Mobile station are limited to 7W.

FCC 24.232(c) Peak Power Measurement

### 3GPP Power limitation for HSDPA and HSUPA

#### **Maximum Output Powers for HSDPA**

Sub-test in ta-	Power	Class 3	Power Class 4			
ble C.10.1.4	Power (dBm)	Tol (dB)	Power (dBm)	Tol (dB)		
1	+24	+1.7/-3.7	+21	+2.7/-2.7		
2	+24	+1.7/-3.7	+21	+2.7/-2.7		
3	+23.5	+2.2/-3.7	+20.5	+3.2/-2.7		
4	+23.5	+2.2/-3.7	+20.5	+3.2/-2.7		

#### Maximum Output Powers for HSUPA


Sub-test in table	Power	Class 3	Power Class 4			
C.11.1.3	Power (dBm)	Tol (dB)	Power (dBm)	Tol (dB)		
1	+24	+1.7/-6.7	+21	+2.7/-5.7		
2	+22	+3.7/-5.2	+19	+4.7/-4.2		
3	+23	+2.7/-5.2	+20	+3.7/-4.2		
4	+22	+3.7/-5.2	+19	+4.7/-4.2		
5	+24	+1.7/-6.7	+21	+2.7/-5.7		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 17 of 80

5.2 Test Set-up:

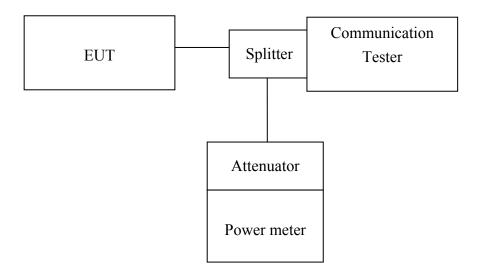

Note: Measurement setup for testing on Antenna connector

## **5.3 Measurement Procedure:**

The transmitter output was connected to a calibrated attenuator, the other end of which was connected to a power meter. Transmitter output was read off the power meter in dBm. The power output at the transmitter antenna port was determined by adding the value of the attenuator to the power meter reading. The Procedure of KDB941225(SAR Measurement Procedures for 3G devices, WCDMA/HSDPA) was used for EUT and Base station setting.RMC 12.2kps is used for this testing

## 5.4 Measurement Equipment Used:

Refer to section 2.4 in this report

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



### **5.5 Measurement Result:**

#### 5.1 RF Conducted Output Power

### 5.1.1.: GSM/EDGE (GMSK; 8-PSK)

#### **Result:**

	СН		1 Tim	e Slot		2 Time Slot				
Fre- quency		GMSK Mode		8-PSK	Mode	GMSK	GMSK Mode		Mode	
(MHz)		Peak Power	Peak Power AV Power Po		AV Power	Peak Power	AV Power	Peak Power	AV Power	
		(dBm)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)	
824.2	128	32.30	32.20	29.90	26.60	32.30	32.10	30.00	26.70	
836.6	190	32.30	32.20	30.00	26.70	32.30	32.10	30.00	26.70	
848.8	251	32.30	32.20	30.00	26.70	32.30	32.10	30.00	26.70	
1850.2	512	29.00	28.90	28.70	25.40	28.90	28.70	28.60	25.40	
1880.0	661	29.10	29.00	28.80	25.50	29.00	28.90	28.70	25.40	
1909.8	810	29.10	29.00	28.80	25.50	29.00	28.90	28.70	25.40	

	СН		3 Tim	e Slot		4 Time Slot					
Fre- quency		GMSK Mode		8-PSK	8-PSK Mode		Mode	8-PSK Mode			
(MHz)		Peak Power AV Power Peak Power AV Power		AV Power	Peak Power	AV Power	Peak Power	AV Power			
		(dBm)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)		
824.2	128	30.70	30.50	27.80	24.60	28.60	28.50	25.70	22.50		
836.6	190	30.70	30.50	27.80	24.60	28.60	28.50	25.80	22.60		
848.8	251	30.70	30.50	27.80	24.60	28.60	28.50	25.80	22.50		
1850.2	512	28.80	28.70	28.60	25.40	28.80	28.60	28.60	25.30		
1880.0	661	28.90	28.80	28.70	25.40	28.90	28.70	28.60	25.40		
1909.8	810	29.00	28.80	28.70	25.40	28.90	28.80	28.70	25.50		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



## 5.5.1.2: WCDMA mode

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 V8.4.0 specification. The EUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7). RMC 12.2kps is used for this testing.

### **Results:**

EUT Mode	Frequency (MHz)	СН	Peak Power (dBm)	AVG. Power (dBm)
	1712.4	1312	26.54	23.30
WCDMA Band IV	1732.6	1413	26.23	23.20
Dana I v	1752.6	1513	26.19	23.10

Note: The results above reflect max power with all up bits.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



### 5.5.13: HSDPA Release 6 mode

The following 4 Sub-Tests were completed according to the test requirements outlined in section 5.2A of the 3GPP TS34.121-1 V8.4.0 specification. All TX power requirements for Power Class 3 were met according to table 5.2AA.5 and 5.2B.5 All UE channels and power ratio's are set according to table C10.1.4 & C11.1.3 in the 3GPP TS34.121-1 V8.4.0. RMC 12.2kps is used for this testing

### **HSDPA SUB-TEST Setting**

.

### Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH(FOR HSDPA)

Sub-test	βc	βd	β <sub>d</sub> (SF)	βc/βd	βнs (Note1, Note 2)	<b>CM (dB)</b> (Note 3)	MPR (dB) (Note 3)	RMC (Kbps)
1	2/15	15/15	64	2/15	4/15	0.0	0.0	12.2
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0	12.2
3	15/15	8/15	64	15/8	30/15	1.5	0.5	12.2
4	15/15	4/15	64	15/4	30/15	1.5	0.5	12.2

Note: The recommended HSDPA MPRs are implemented as per following sub-tests.

Results:											
Mode	Sub-test	Transmi	tter Powe	r (dBm)	Power Class 3 Limita-	Comments					
			Channel		tion (dBm)						
		1312	1413	1513	]						
HSDPA(B4)	1	23.13	23.09	22.96	20.3dBm - 25.7dBm	Pass					
	2	23.18	23.06	22.95	20.3dBm - 25.7dBm	Pass					
	3	22.65	22.64	22.43	19.8dBm – 25.7dBm	m Pass					
	4	22.72	22.65	22.55	19.8dBm – 25.7dBm	Pass					

### 5.5.1.4: HSPA (HSDPA & HSUPA) Release 6 mode

The following 5 Sub-Tests were completed according to the test requirements outlined in section 5.2A of the 3GPP TS34.121-1 V8.4.0 specification. All TX power requirements for Power Class 3 were met according to table 5.2AA.5 and 5.2B.5 All UE channels and power ratio's are set according to table C11.1.3 in the 3GPP TS34.121-1 V8.4.0. RMC 12.2kps is used for this testing

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

миналажеривные конструпление и понтриктери n and, rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized altera tion, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 Taiwan Ltd



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 21 of 80

#### HSPA SUB-TEST Setting

#### Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH(FOR HSUPA)

Sub- test	βc	βa	β <sub>d</sub> (SF)	$\beta_c/\beta_d$	$\beta_{\rm HS}$	β <sub>ec</sub>	$\beta_{ed}$	β <sub>ed</sub> (SF)	$\begin{array}{c} \beta_{ed} \\ (Codes) \end{array}$	CM (dB)	MPR (dB)	AG Index	E-TFCI	RMC (Kbps)
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/22 5	1309/225	4	1	1.0	0.0	20	75	12.2
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67	12.2
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed}$ 1: 47/15 $\beta_{ed}$ 2: 47/15	4 4	2	2.0	1.0	15	92	12.2
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71	12.2
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81	12.2

Note: The recommended HSUPA are implemented as per following sub-tests.

<b>Results:</b>						
Mode			Power (dE Channel	Sm)	Power Class 3 Limita-	Comments
		1312	1413	1513	tion (dBm)	
HSUPA(B4)	1	23.22	23.18	23.04	18.8dBm – 25.7dBm	Pass
	2	21.27	21.25	21.08	16.8dBm – 25.7dBm	Pass
	3	22.28	22.20	22.12	17.8dBm – 25.7dBm	Pass
	4	21.40	21.30	21.12	16.8dBm – 25.7dBm	Pass
	5	23.11	23.04	22.95	18.8dBm – 25.7dBm	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



# 6. ERP, EIRP MEASUREMENT

### 6.1. Standard Applicable:

According to FCC §2.1046


FCC 22.913(a) Mobile station are limited to 7W ERP.

FCC 24.232(b) Mobile station are limited to 2W EIRP.

FCC 27.50(d)(2) Fixed, mobile, and portable (hand-held) stations are limited to 1W EIRP.

### 6.2. Test SET-UP (Block Diagram of Configuration):


(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

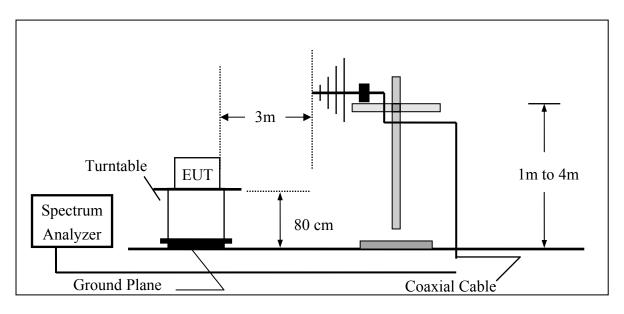

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 23 of 80

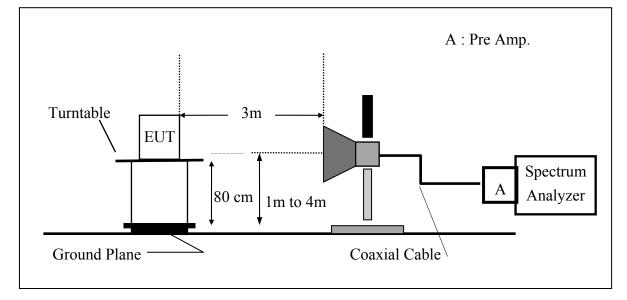

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

## (C) Substituted Method Test Set-UP

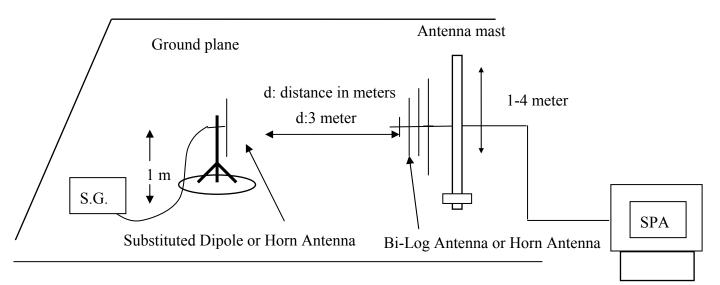

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



### 6.3. Measurement Procedure:

The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.

During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated.

ERP in frequency band 824.2 –848.80MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows:

EIRP in frequency band 1710-1755MHz and 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by a horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows:

ERP = S.G. output (dBm) + Antenna Gain (dBd) – Cable Loss (dB)

EIRP = S.G. output (dBm) + Antenna Gain (dBi) – Cable Loss (dB)

### 6.4. Measurement Equipment Used:

Refer to section 2.4 in this report

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 25 of 80

### 6.5. Measurement Result:

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	ERP (dBm)	Limit (dBm)
			Н	V	129.68	43.29	-7.87	3.62	31.79	38.45
			п	Н	118.71	32.44	-7.87	3.62	20.94	38.45
	824.20	128	E1	V	118.44	32.05	-7.87	3.62	20.55	38.45
	824.20	128	EI	Н	130.01	43.74	-7.87	3.62	32.24	38.45
			E2	V	119.20	32.81	-7.87	3.62	21.31	38.45
			EZ	Н	130.10	43.83	-7.87	3.62	32.33	38.45
			Н	V	129.60	43.35	-7.88	3.65	31.82	38.45
		190	11	Н	119.32	33.09	-7.88	3.65	21.56	38.45
GSM 850	836.60		E1	V	119.07	32.82	-7.88	3.65	21.29	38.45
05101 850	830.00			Н	130.69	44.46	-7.88	3.65	32.93	38.45
			E2	V	119.35	33.10	-7.88	3.65	21.57	38.45
				Н	130.71	44.48	-7.88	3.65	32.95	38.45
			Н	V	129.22	43.10	-7.88	3.68	31.54	38.45
	848.80		п	Н	118.37	32.18	-7.88	3.68	20.62	38.45
		251	E1	V	119.41	33.29	-7.88	3.68	21.73	38.45
		251	EI	Н	130.64	44.45	-7.88	3.68	32.89	38.45
			52	V	119.28	33.16	-7.88	3.68	21.60	38.45
			E2	Н	130.85	44.66	-7.88	3.68	33.10	38.45

### Remark :

(1) The RBW, VBW of SPA for frequency

RBW=300 KHz, VBW=1MHz,

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 26 of 80

### **Measurement Result:**

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
			Н	V	124.14	19.75	9.90	5.56	24.09	33.00
			п	Н	121.04	16.86	9.90	5.56	21.20	33.00
	1850.20	512	E1	V	123.91	19.52	9.90	5.56	23.86	33.00
	1650.20	512	LI	Н	128.31	24.13	9.90	5.56	28.47	33.00
			E2	V	117.94	13.55	9.90	5.56	17.89	33.00
			Ľ2	Н	128.66	24.48	9.90	5.84	28.54	33.00
			Н	V	124.75	20.39	9.99	5.61	24.77	33.00
		661	11	Н	121.38	17.24	9.99	5.61	21.61	33.00
PCS 1900	1880.00		E1	V	124.66	20.30	9.99	5.61	24.68	33.00
1031900	1000.00			Н	129.04	24.90	9.99	5.61	29.27	33.00
			E2	V	118.29	13.93	9.99	5.61	18.31	33.00
			Ľ2	Н	129.18	25.04	9.99	5.61	29.41	33.00
			Н	V	123.34	19.01	10.08	5.66	23.43	33.00
			11	Н	120.51	16.40	10.08	5.66	20.82	33.00
	1909.80	810	E1	V	123.74	19.41	10.08	5.66	23.83	33.00
		810	EI	Н	128.49	24.38	10.08	5.66	28.80	33.00
			E2	V	118.07	13.74	10.08	5.66	18.16	33.00
				Н	129.10	24.99	10.08	5.66	29.41	33.00

### Remark :

(1) The RBW, VBW of SPA for frequency

RBW=300 KHz, VBW=1MHz,

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 27 of 80

### **Measurement Result:**

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	ERP (dBm)	Limit (dBm)
			Н	V	127.71	41.32	-7.87	3.62	29.82	38.45
			п	Н	116.54	30.27	-7.87	3.62	18.77	38.45
	824.20	128	E1	V	117.15	30.76	-7.87	3.62	19.26	38.45
	824.20	120	LI	Н	127.25	40.98	-7.87	3.62	29.48	38.45
			E2	V	117.75	31.36	-7.87	3.62	19.86	38.45
			ΕZ	Н	127.28	41.01	-7.87	3.62	29.51	38.45
			Н	V	127.57	41.32	-7.88	3.65	29.79	38.45
		190	11	Н	117.11	30.88	-7.88	3.65	19.35	38.45
EDGE 850	836.60		E1	V	117.52	31.27	-7.88	3.65	19.74	38.45
EDGE 850	830.00			Н	127.84	41.61	-7.88	3.65	30.08	38.45
			E2	V	117.43	31.18	-7.88	3.65	19.65	38.45
				Н	127.73	41.50	-7.88	3.65	29.97	38.45
			Н	V	127.28	41.16	-7.88	3.68	29.60	38.45
			п	Н	116.62	30.43	-7.88	3.68	18.87	38.45
	848.80	251	E1	V	117.70	31.58	-7.88	3.68	20.02	38.45
		251	E1	Н	127.89	41.70	-7.88	3.68	30.14	38.45
			<b>F</b> 2	V	117.47	31.35	-7.88	3.68	19.79	38.45
			E2	Н	128.11	41.92	-7.88	3.68	30.36	38.45

### Remark :

(1) The RBW, VBW of SPA for frequency

RBW=300 KHz, VBW=1MHz,

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 28 of 80

### **Measurement Result:**

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
			Н	V	123.89	19.50	9.90	5.56	23.84	33.00
			п	Н	120.73	16.55	9.90	5.56	20.89	33.00
	1850.20	512	E1	V	124.17	19.78	9.90	5.56	24.12	33.00
	1830.20	312	LI	Н	128.29	24.11	9.90	5.56	28.45	33.00
			E2	V	118.17	13.78	9.90	5.56	18.12	33.00
			ΕZ	Н	128.62	24.44	9.90	5.84	28.50	33.00
		661	Н	V	124.57	20.21	9.99	5.61	24.59	33.00
			11	Н	121.17	17.03	9.99	5.61	21.40	33.00
EDGE 1900	1880.00		E1	V	125.16	20.80	9.99	5.61	25.18	33.00
EDGE 1900	1000.00			Н	128.62	24.48	9.99	5.61	28.85	33.00
			E2	V	118.70	14.34	9.99	5.61	18.72	33.00
			ΕZ	Н	128.91	24.77	9.99	5.61	29.14	33.00
			Н	V	123.05	18.72	10.08	5.66	23.14	33.00
			п	Н	120.37	16.26	10.08	5.66	20.68	33.00
	1909.80	910	E1	V	123.88	19.55	10.08	5.66	23.97	33.00
		810	EI	Н	127.94	23.83	10.08	5.66	28.25	33.00
			<b>F2</b>	V	118.72	14.39	10.08	5.66	18.81	33.00
			E2	Н	128.61	24.50	10.08	5.66	28.92	33.00

### Remark :

(1) The RBW, VBW of SPA for frequency

RBW=300 KHz, VBW=1MHz,

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 29 of 80

### **Measurement Result:**

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
			Н	V	118.83	11.81	9.48	5.17	16.13	33.00
				Н	113.59	6.62	9.48	5.17	10.93	33.00
	1712.40	1312	E1	V	119.99	12.97	9.48	5.17	17.29	33.00
	1/12.40	1312	LI	Н	121.20	14.23	9.48	5.17	18.54	33.00
			E2	V	105.40	-1.62	9.48	5.17	2.70	33.00
			EZ	Н	121.80	14.83	9.90	5.84	18.89	33.00
		1413	Н	V	116.70	9.69	9.54	5.20	14.03	33.00
			11	Н	111.73	4.77	9.54	5.20	9.11	33.00
WCDMA	1732.60		E1	V	118.22	11.21	9.54	5.20	15.55	33.00
IV	1/32.00			Н	119.88	12.92	9.54	5.20	17.26	33.00
			<b>F</b> 2	V	104.82	-2.19	9.54	5.20	2.15	33.00
			E2	Н	120.13	13.17	9.54	5.20	17.51	33.00
			Н	V	118.13	11.13	9.60	5.24	15.50	33.00
			п	Н	112.42	5.47	9.60	5.24	9.84	33.00
	1752 (0	1512	E1	V	118.96	11.96	9.60	5.24	16.33	33.00
	1752.60	1513	EI	Н	121.28	14.33	9.60	5.24	18.70	33.00
			E2	V	105.79	-1.21	9.60	5.24	3.16	33.00
			E2	Н	122.13	15.18	9.60	5.24	19.55	33.00

### **Remark:**

(1) The RBW, VBW of SPA for frequency

RBW= 5MHz , VBW= 8MHz

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 30 of 80

### **Measurement Result:**

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
			Н	V	120.38	13.36	9.48	5.17	17.68	33.00
			п	Н	114.85	7.88	9.48	5.17	12.19	33.00
	1712.40	1312	E1	V	121.04	14.02	9.48	5.17	18.34	33.00
	1/12.40	1312	LI	Н	122.24	15.27	9.48	5.17	19.58	33.00
			E2	V	105.82	-1.20	9.48	5.17	3.12	33.00
			ΕZ	Н	125.40	18.43	9.90	5.84	22.49	33.00
			Н	V	118.17	11.16	9.54	5.20	15.50	33.00
		1413	11	Н	112.31	5.35	9.54	5.20	9.69	33.00
HSUPA IV	1732.60		E1	V	118.88	11.87	9.54	5.20	16.21	33.00
IISUPA IV	1/52.00			Н	120.64	13.68	9.54	5.20	18.02	33.00
			E2	V	103.80	-3.21	9.54	5.20	1.13	33.00
				Н	123.57	16.61	9.54	5.20	20.95	33.00
			Н	V	119.52	12.52	9.60	5.24	16.89	33.00
			п	Н	113.59	6.64	9.60	5.24	11.01	33.00
	1752.60	1512	E1	V	119.98	12.98	9.60	5.24	17.35	33.00
		1513	EI	Н	122.11	15.16	9.60	5.24	19.53	33.00
			БЭ	V	106.39	-0.61	9.60	5.24	3.76	33.00
			E2	Н	125.24	18.29	9.60	5.24	22.66	33.00

### **Remark:**

(1) The RBW, VBW of SPA for frequency

RBW=5MHz, VBW=8MHz

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 31 of 80

# 7. 99% OCCUPIED BANDWIDTH MEASUREMENT

### 7.1. Standard Applicable:

According to §FCC 2.1049.

### 7.2. Test Set-up:

Refer to section 5.2 in this report

### 7.3. Measurement Procedure:

The EUT's output RF connector was connected with a short cable to the spectrum analyzer, RBW (10/30KHz) was set to about 1% of emission BW, VBW= 3 times RBW(30/100KHz), -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

### 7.4. Measurement Equipment Used:

Refer to section 2.4 in this report

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



### 7.5. Measurement Result:

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
	824.20	128	0.2453
GPRS 850	836.60	190	0.2454
	848.80	251	0.2440

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
	824.20	128	0.2460
<b>DEGE 850</b>	836.60	190	0.2471
	848.80	251	0.2428

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
	1850.20	512	0.2438
GPRS 1900	1880.00	661	0.2461
	1909.80	810	0.2464

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
	1850.20	512	0.2436
DEGE 1900	1880.00	661	0.2408
	1909.80	810	0.2428

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
WCDMA IV	1712.40	1312	4.1565
	1732.60	1413	4.1608
	1752.60	1513	4.1723

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
HSUPA IV	1712.40	1312	4.1498
	1732.60	1413	4.1710
	1752.60	1513	4.1706


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

			HIGHLED HIGHLE
台灣檢驗科技股份有限公司	t (886-2) 2299-3279	f (886-2) 2298-0488	www.tw.sgs.com




Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 33 of 80

Figure 7-1: GPRS 850 Channel Low

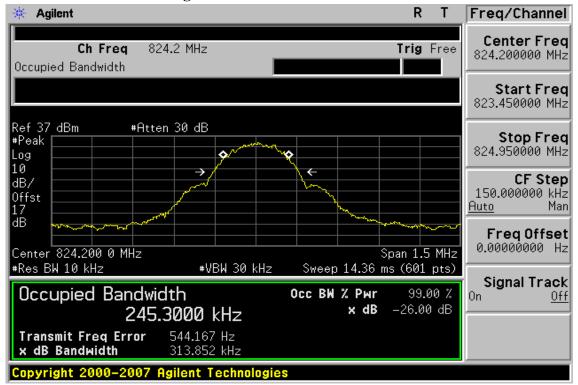

### Figure 7-2 GPRS 850 Channel Mid

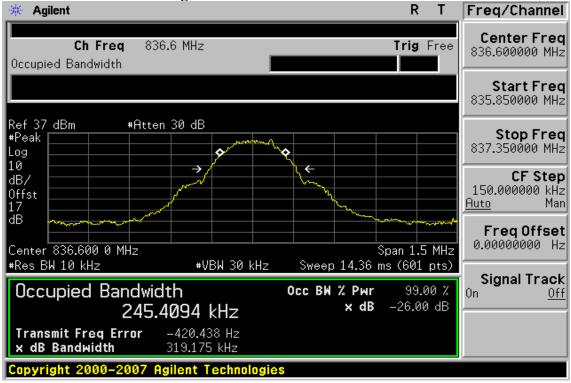


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 34 of 80

Figure 7-3: GPRS 850 Channel High

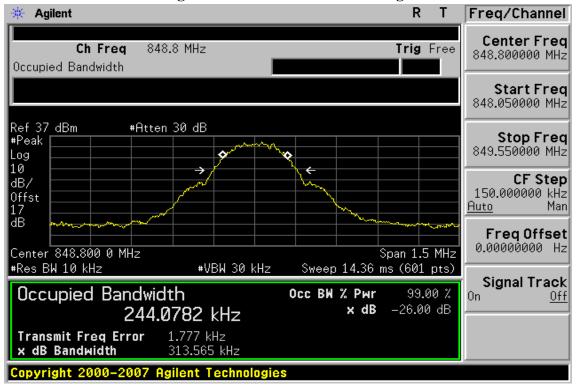

### Figure 7-4: GPRS 1900 Channel Low

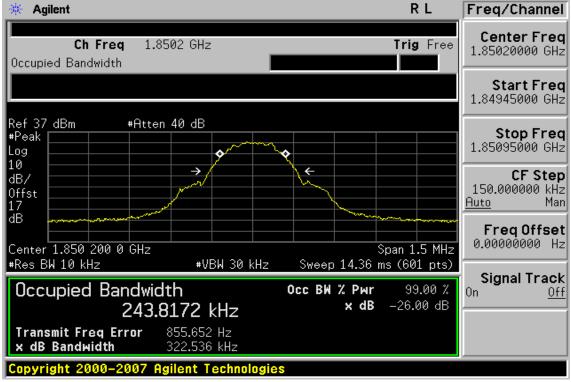


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 35 of 80

Figure 7-5 GPRS 1900 Channel Mid

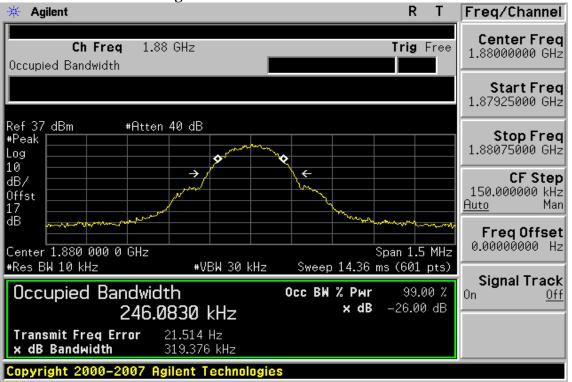

#### Figure 7-6: GPRS 1900 Channel High

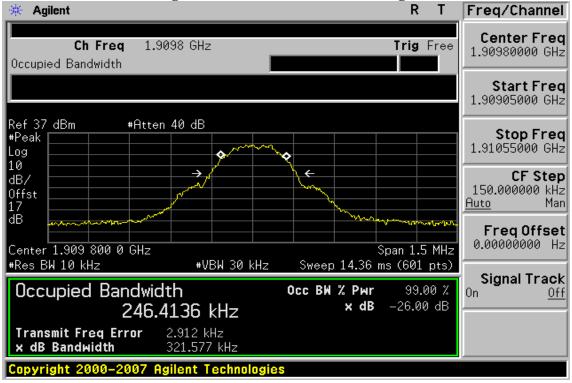

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_ad\_conditions.htm">www.sgs.com/terms\_ad\_conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indem-only junction issues defined therein. Any holder of this document is advised that information contained here on reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.
No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號




Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 36 of 80

Figure 7-7: EDGE 850 Channel Low

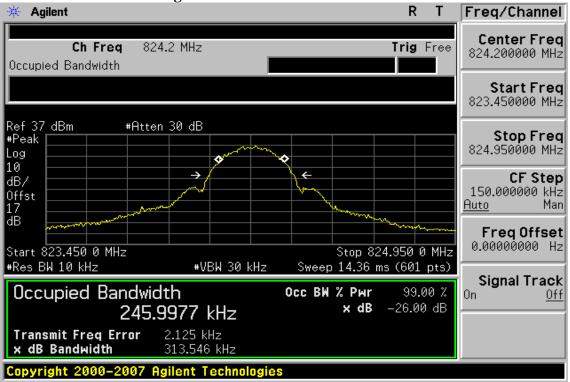

#### Figure 7-8 EDGE 850 Channel Mid

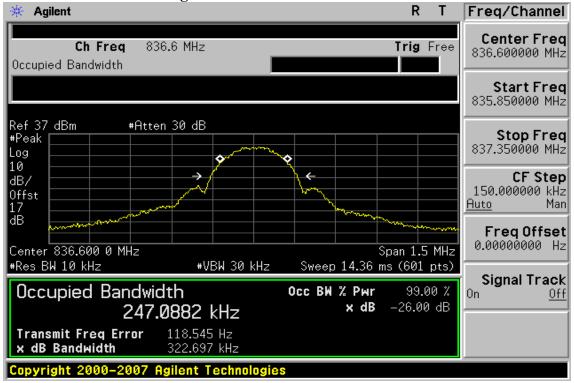

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.
SGS Taiwan Ltd.
No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號
台灣檢驗科技股份有限公司
t (886-2) 2299-3279
f (886-2) 2298-0488
www.tw.sgs.com



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 37 of 80

Figure 7-9: EDGE 850 Channel High


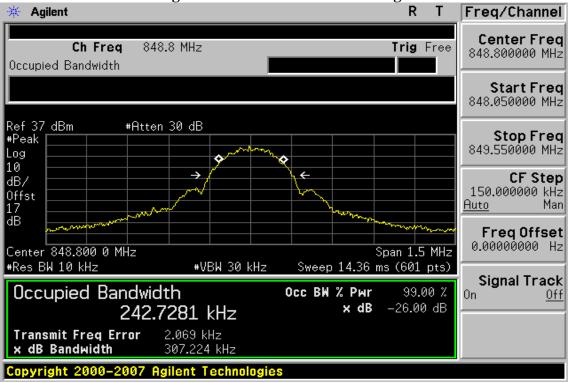


Figure 7-10: EDGE 1900 Channel Low



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

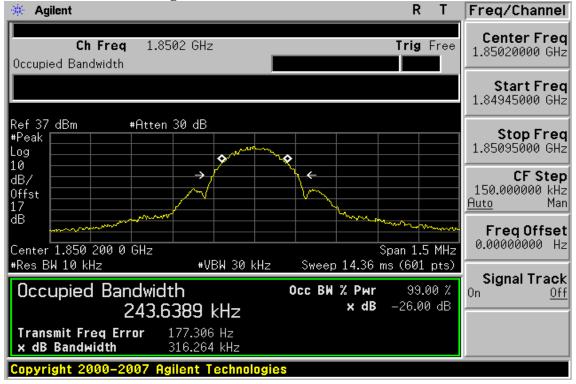

Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 38 of 80

Figure 7-11 EDGE 1900 Channel Mid


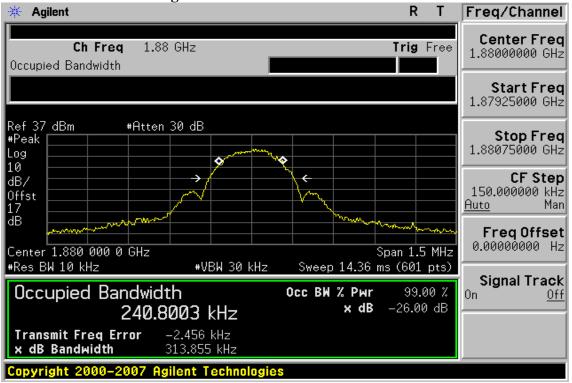


Figure 7-12: EDGE 1900 Channel High




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

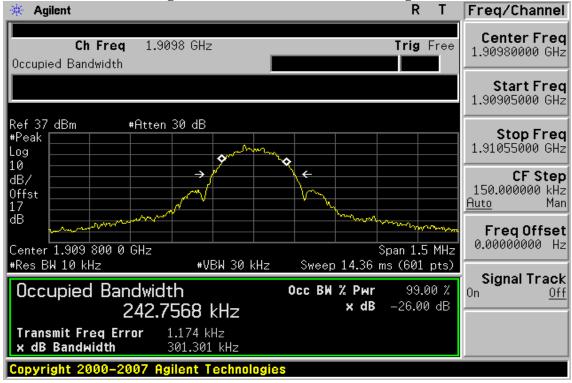


Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 39 of 80

Figure 7-13 WCDMA B4 Channel Low

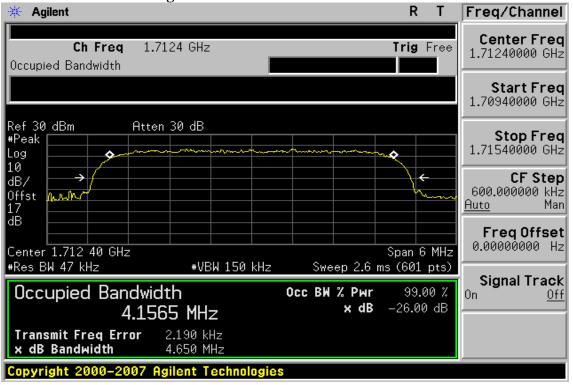



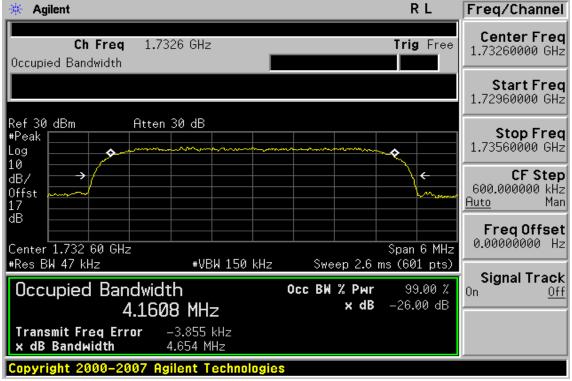


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 40 of 80



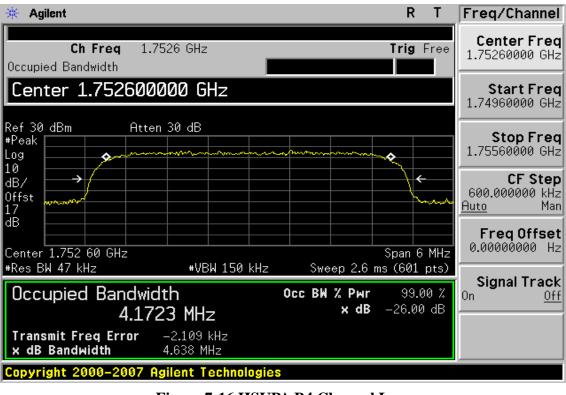



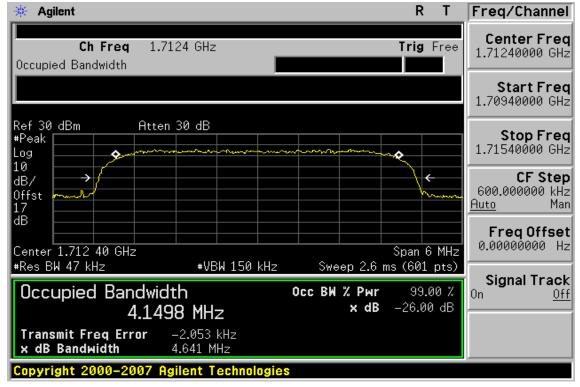


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 41 of 80

Figure 7-17 HSUPA B4 Channel Mid

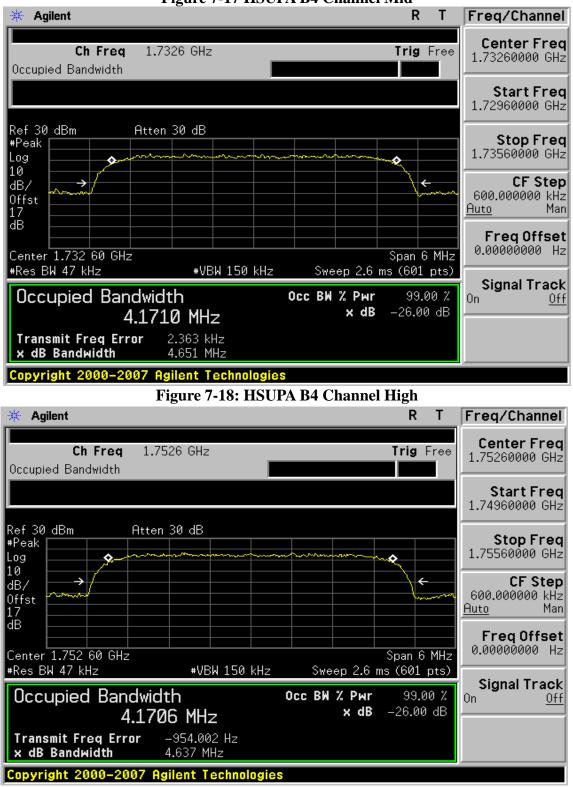

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 42 of 80

#### **OUT OF BAND EMISSION AT ANTENNA TERMINALS** 8.


# 8.1. Standard Applicable:

According to FCC §2.1051.

FCC §22.917(a),§24.238(a), §27.53(g) the magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the instruction manual and/ or alignment procedure, shall not be less than  $43 + 10 \log$  (mean output power in watts) dBc below the mean power output outside a license's frequency block (-13dBm)

### 8.2. Test SET-UP:

### Out of band emission

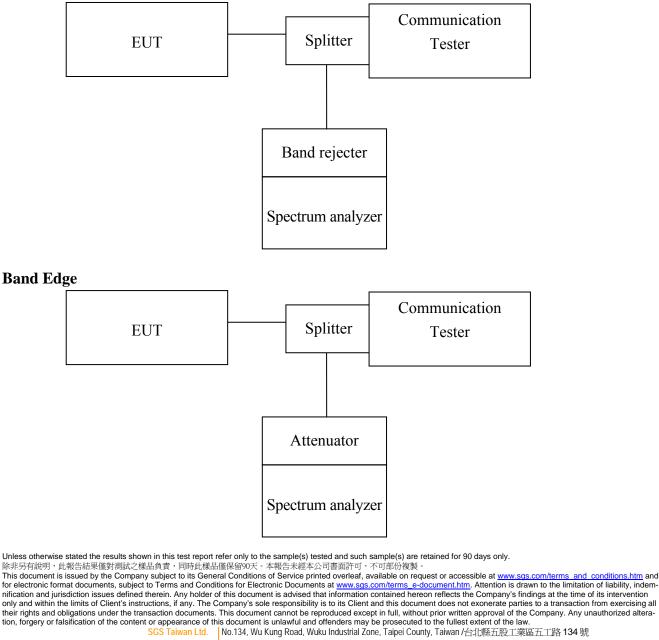

台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com

n and,



#### 8.3. Measurement Procedure:

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.

For the out of band: Set the RBW, VBW = 1MHz, Start=30MHz, Stop= 10 th harmonic. Limit = -13dBm

Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit, -13dBm.

# 8.4. Measurement Equipment Used:

Refer to section 2.4 in this report


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 44 of 80

# 8.5. Measurement Result:

Figure 8-1: Out of Band emission at antenna terminals- GPRS 850 Channel Lowest Agilent R Т Freq/Channel Mkr1 825 MHz Center Frea 33.20 dBm Ref 37 dBm #Atten 30 dB 1.26500000 GHz #Peak Log 10 Start Freq dB/ 30.0000000 MHz Offst 17 dB Stop Freq 2.50000000 GHz DI -13.0 CF Step dBm 247.000000 MHz LgAv Auto Man Start 30 MHz Stop 2.500 GHz Freq Offset #Res BW 1 MHz #VBW 1 MHz Sweep 4.12 ms (601 pts) 0.00000000 Hz Amplitude Marker Trace Type X Axis 825 MHz 1 (1)Frea 33.20 dBm Signal Track 0n Off. Copyright 2000-2007 Agilent Technologies

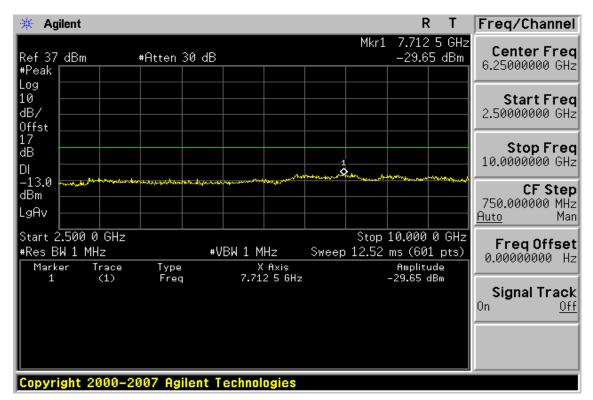

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 45 of 80


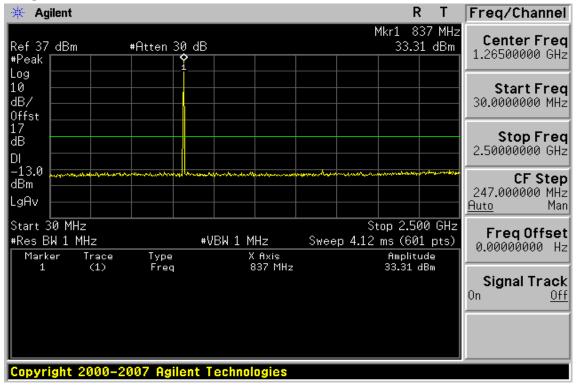


Figure 8-2: Out of Band emission at antenna terminals –GPRS 850 Channel Mid



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

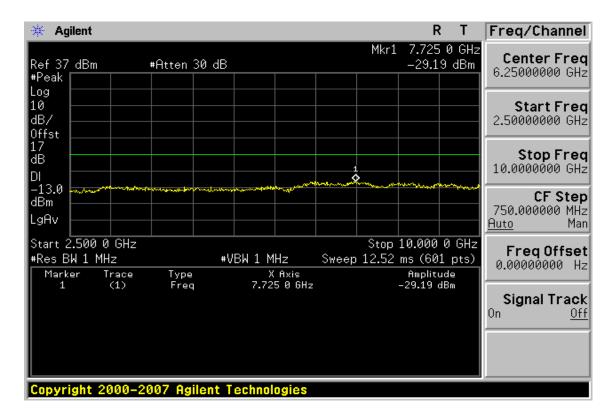

Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 46 of 80


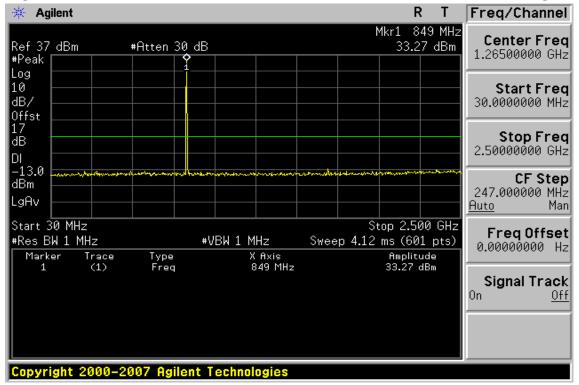


Figure 8-3: Out of Band emission at antenna terminals–GPRS 850 Channel Highest



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

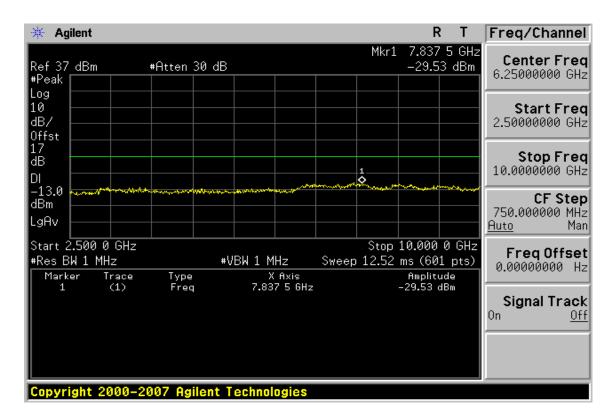

Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 47 of 80

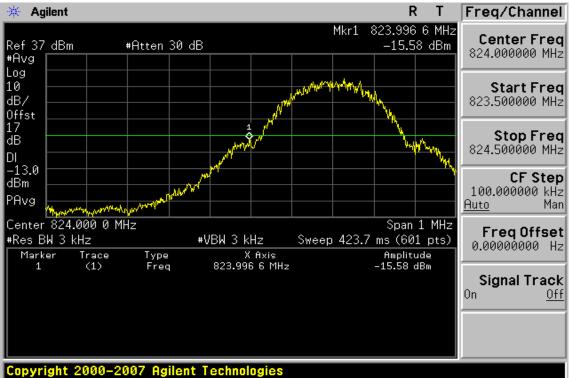


Figure 8-4: Band edge emission at antenna terminals -GPRS 850 Channel Lowest

#### Figure 8-5: Band edge emission at antenna terminals –GPRS 850 Channel Highest




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


台灣檢驗科技股份有限公司	f (886-2) 2298-0488	www.tw.sgs.com



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 48 of 80

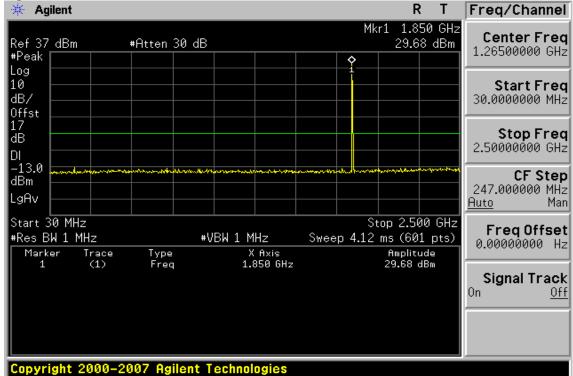

#### Figure 8-6: Out of Band emission at antenna terminals-GPRS 1900 Channel Lowest

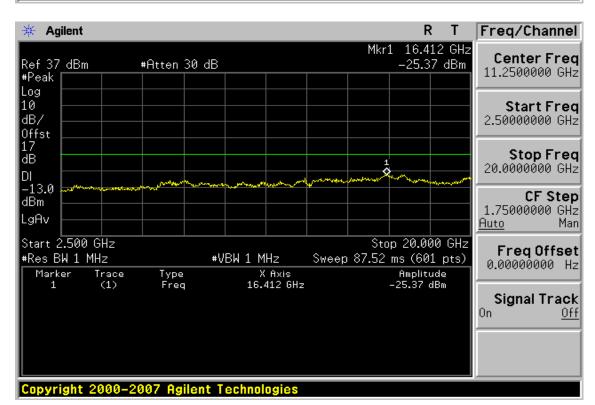

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indem of liability, indem on djurisdiction issues defined therein. Any holder of this document is advised that information contained here on reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 49 of 80


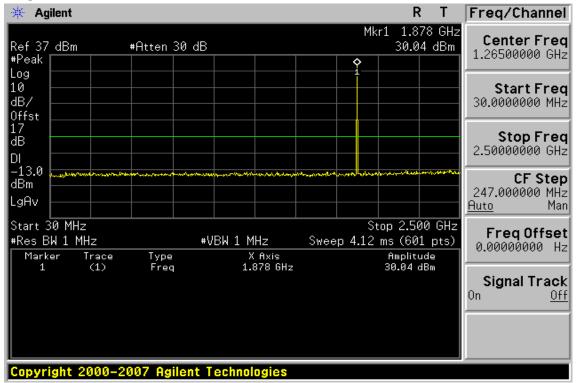


Figure 8-7: Out of Band emission at antenna terminals -GPRS 1900 Channel Mid



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

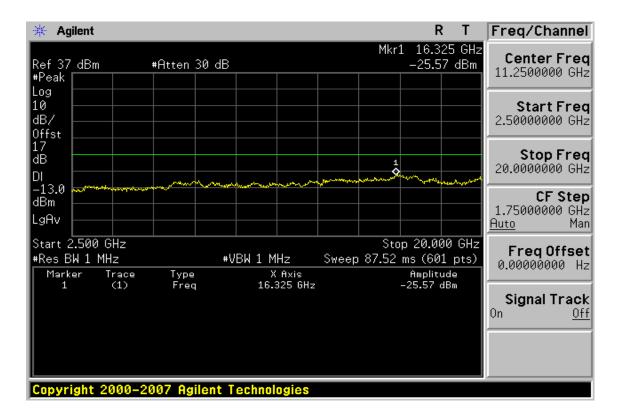

Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 50 of 80


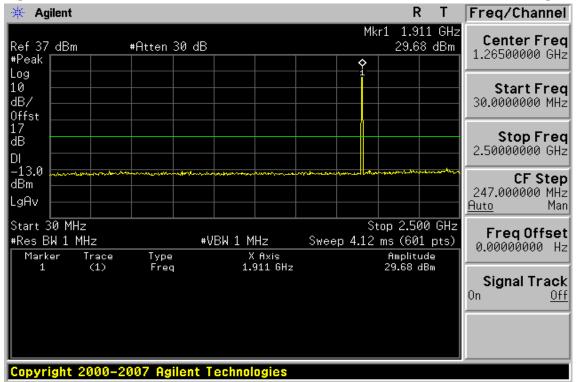


Figure 8-8: Out of Band emission at antenna terminals-GPRS 1900 Channel Highest




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

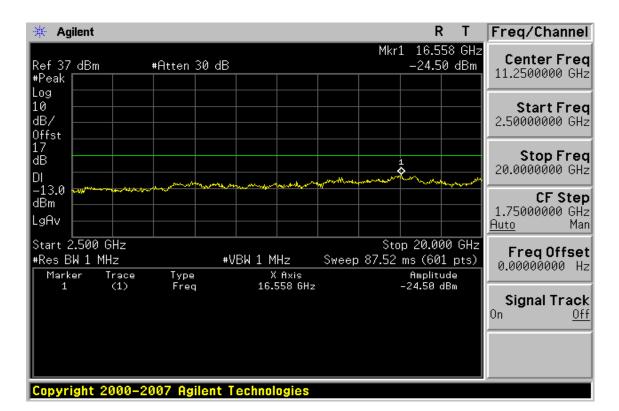


Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 51 of 80



Figure 8-9: Bad edge emission at antenna terminals -GPRS 1900 Channel Lowest



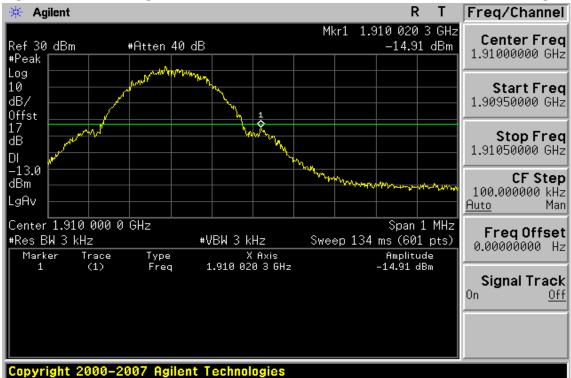


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


台灣檢驗科技股份有限公司	t (886-2) 2299-3279	f (886-2) 2298-0488	www.tw.sgs.com	



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 52 of 80

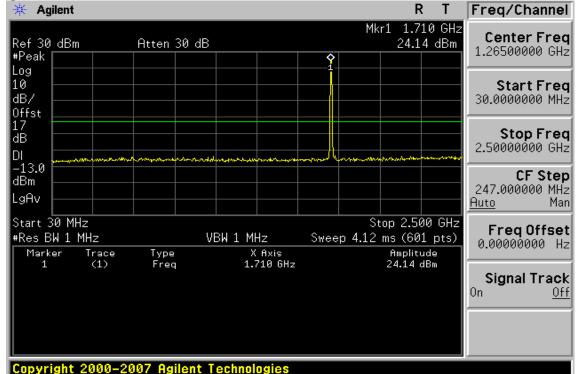

#### Figure 8-11: Out of Band emission at antenna terminals-WCDMA B4 Channel Lowest

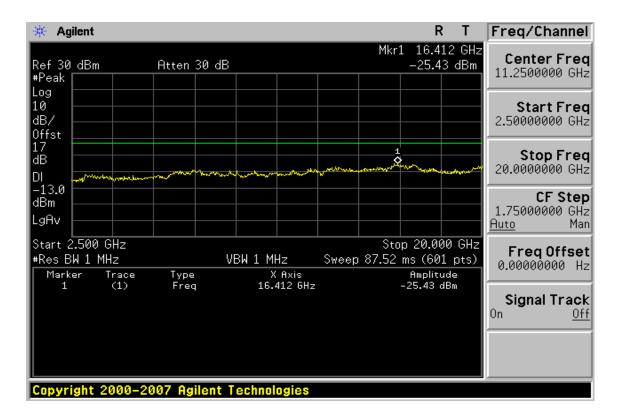

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 53 of 80


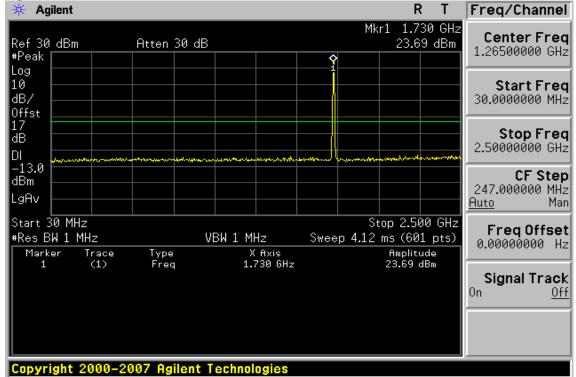


Figure 8-12: Out of Band emission at antenna terminals –WCDMA B4 Channel Mid




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. | No.134, Wu Kung Road, Wuku Industrial Zone, Taipel County, Taiwan /台北縣五股工路 134 號

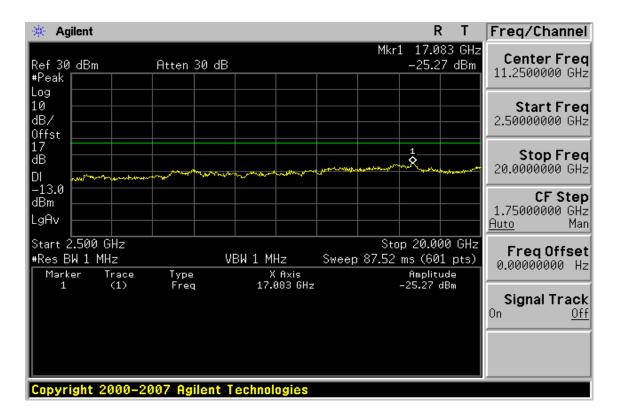

Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 54 of 80

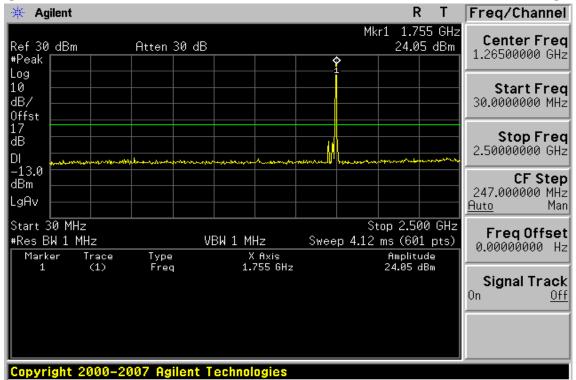

#### Figure 8-13: Out of Band emission at antenna terminals–WCDMA B4 Channel Highest

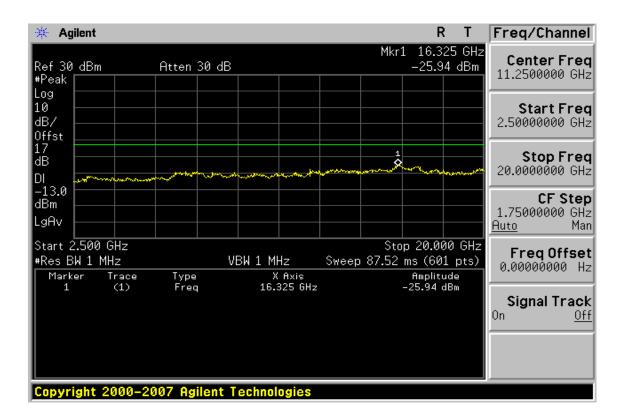


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 55 of 80



Figure 8-14: Band edge emission at antenna terminals –WCDMA B4 Channel Lowest



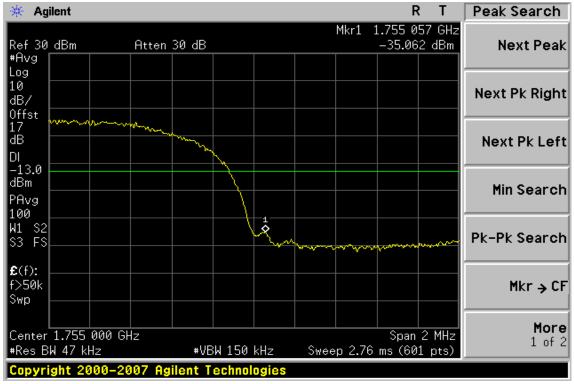

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



# 9. FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT


### 9.1. Standard Applicable:

According to FCC §2.1053,

FCC \$22.917(a), \$24.238(a), \$27.53(g) the magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the instruction manual and/ or alignment procedure, shall not be less than  $43 + 10 \log$  (mean output power in watts) dBc below the mean power output outside a license's frequency block (-13dBm)

### 9.2. EUT Setup (Block Diagram of Configuration):

(A)Radiated Emission Test Set-Up, Frequency Below 1000MHz

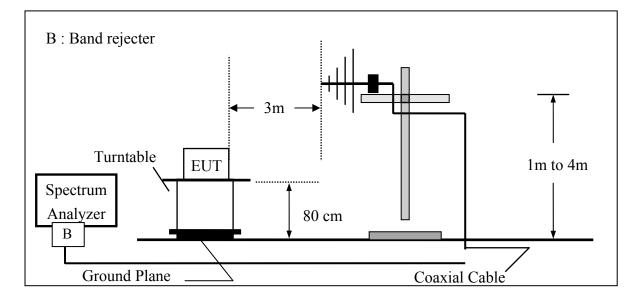


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taiwai /chit骤五股工業區五工路 134 號



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 57 of 80

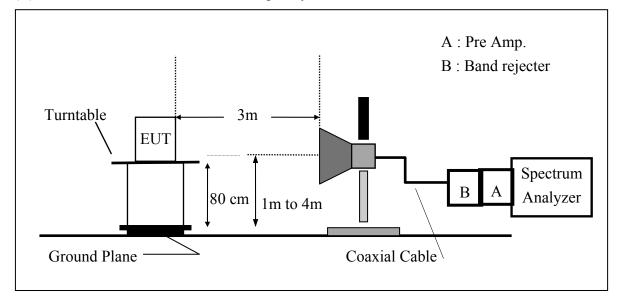

(B)Radiated Emission Test Set-UP Frequency Over 1 GHz

#### 9.3. Measurement Procedure:

The EUT was placed on a non-conductive; The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method.

The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.

ERP= S.G. output (dBm) + Antenna Gain (dBd) – Cable Loss (dB)

EIRP = S.G. output (dBm) + Antenna Gain(dBi) - Cable Loss (dB)

# 9.4. Measurement Equipment Used:

Refer to section 2.4 in this report

# 9.5. Measurement Result:

Refer to attach tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 58 of 80

### **Radiated Spurious Emission Measurement Result: GPRS 850 Mode**

Operation Mode	: TX CH Low E2 Mode	Test Date:	Sep. 21, 2010
Fundamental Frequency	: 824.20 MHz	Test By:	Bondi
Temperature	: 25°C	Pol:	Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
36.79	48.31	V	-54.42	-4.16	0.91	-59.49	-13.00	-46.49
90.14	47.81	V	-55.37	-7.75	1.27	-64.39	-13.00	-51.39
104.69	46.48	V	-55.01	-7.76	1.38	-64.15	-13.00	-51.15
824.00	71.22	V	-15.17	-7.87	3.62	-26.67	-13.00	-13.67
1648.40		V		9.29	5.23		-13.00	
2472.60	42.76	V	-58.25	10.08	6.53	-54.70	-13.00	-41.70
3296.80		V		12.17	7.71		-13.00	
4121.00		V		12.61	8.86		-13.00	
4945.20	39.23	V	-53.24	12.65	9.74	-50.33	-13.00	-37.33
5769.40		V		13.55	10.54		-13.00	
6593.60		V		12.05	11.30		-13.00	
7417.80		V		11.49	12.10		-13.00	
8242.00		V		11.48	12.71		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"----" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 59 of 80

### **Radiated Spurious Emission Measurement Result: GPRS 850 Mode**

Operation Mode	: TX CH Low E2 Mode	Test Date:	Sep. 21, 2010
Fundamental Frequency	: 824.20 MHz	Test By:	Bondi
Temperature	: 25°C	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
38.73	46.69	Н	-56.50	-3.25	0.90	-60.65	-13.00	-47.65
92.08	49.43	Н	-54.16	-7.75	1.29	-63.20	-13.00	-50.20
104.69	45.76	Н	-56.75	-7.76	1.38	-65.89	-13.00	-52.89
824.00	84.58	Н	-1.69	-7.87	3.62	-13.19	-13.00	-0.19
1648.40	44.19	Н	-60.21	9.29	5.23	-56.15	-13.00	-43.15
2472.60	42.01	Н	-58.90	10.08	6.53	-55.35	-13.00	-42.35
3296.80		Н		12.17	7.71		-13.00	
4121.00		Н		12.61	8.86		-13.00	
4945.20		Н		12.65	9.74		-13.00	
5769.40		Н		13.55	10.54		-13.00	
6593.60		Н		12.05	11.30		-13.00	
7417.80		Н		11.49	12.10		-13.00	
8242.00		Н		11.48	12.71		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"----" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 60 of 80

### **Radiated Spurious Emission Measurement Result: GPRS 850 Mode**

Operation Mode	: TX CH Mid E2 Mode	Test Date:	Sep. 21, 2010
Fundamental Frequency	: 836.60 MHz	Test By:	Bondi
Temperature	: 25°C	Pol:	Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
33.88	48.62	V	-54.95	-5.52	0.93	-61.40	-13.00	-48.40
90.14	48.56	V	-54.62	-7.75	1.27	-63.64	-13.00	-50.64
104.69	46.71	V	-54.78	-7.76	1.38	-63.92	-13.00	-50.92
1673.20	41.47	V	-63.09	9.36	5.27	-58.99	-13.00	-45.99
2509.80	43.60	V	-57.18	10.09	6.58	-53.68	-13.00	-40.68
3346.40		V		12.28	7.79		-13.00	
4183.00		V		12.62	8.93		-13.00	
5019.60	37.71	V	-54.44	12.67	9.81	-51.58	-13.00	-38.58
5856.20		V		13.68	10.62		-13.00	
6692.80		V		11.95	11.39		-13.00	
7529.40		V		11.45	12.20		-13.00	
8366.00		V		11.59	12.81		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belongs to narrowband spurious emission.

2 Remark"----" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) - Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 61 of 80

### **Radiated Spurious Emission Measurement Result: GPRS 850 Mode**

Operation Mode	: TX CH Mid E2 Mode	Test Date:	Sep. 21, 2010
Fundamental Frequency	: 836.60 MHz	Test By:	Bondi
Temperature	: 25°C	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
38.73	44.35	Н	-58.84	-3.25	0.90	-62.99	-13.00	-49.99
92.08	49.82	Н	-53.77	-7.75	1.29	-62.81	-13.00	-49.81
104.69	45.02	Н	-57.49	-7.76	1.38	-66.63	-13.00	-53.63
1673.20	45.75	Н	-58.63	9.36	5.27	-54.53	-13.00	-41.53
2509.80	41.09	Н	-59.61	10.09	6.58	-56.11	-13.00	-43.11
3346.40		Н		12.28	7.79		-13.00	
4183.00		Н		12.62	8.93		-13.00	
5019.60		Н		12.67	9.81		-13.00	
5856.20		Н		13.68	10.62		-13.00	
6692.80		Н		11.95	11.39		-13.00	
7529.40		Н		11.45	12.20		-13.00	
8366.00		Н		11.59	12.81		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"----" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) – Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 62 of 80

### **Radiated Spurious Emission Measurement Result: GPRS 850 Mode**

Operation Mode	: TX CH High E2 Mode	Test Date:	Sep. 21, 2010
Fundamental Frequency	: 848.80 MHz	Test By:	Bondi
Temperature	: 25°C	Pol:	Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
33.88	48.86	V	-54.71	-5.52	0.93	-61.16	-13.00	-48.16
92.08	47.97	V	-54.96	-7.75	1.29	-64.00	-13.00	-51.00
106.63	47.05	V	-54.26	-7.77	1.39	-63.41	-13.00	-50.41
849.00	71.77	V	-14.35	-7.88	3.68	-25.91	-13.00	-12.91
1697.60	41.20	V	-63.34	9.44	5.31	-59.21	-13.00	-46.21
2546.40	41.18	V	-59.46	10.20	6.63	-55.90	-13.00	-42.90
3395.20		V		12.38	7.87		-13.00	
4244.00		V		12.63	9.00		-13.00	
5092.80	37.18	V	-54.80	12.74	9.88	-51.93	-13.00	-38.93
5941.60		V		13.81	10.70		-13.00	
6790.40		V		11.86	11.48		-13.00	
7639.20		V		11.40	12.27		-13.00	
8488.00		V		11.70	12.91		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"----" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) - Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 63 of 80

### **Radiated Spurious Emission Measurement Result: GPRS 850 Mode**

Operation Mode	: TX CH High E2 Mode	Test Date:	Sep. 21, 2010
Fundamental Frequency	: 848.80 MHz	Test By:	Bondi
Temperature	: 25°C	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
38.73	43.70	Н	-59.49	-3.25	0.90	-63.64	-13.00	-50.64
92.08	50.17	Н	-53.42	-7.75	1.29	-62.46	-13.00	-49.46
104.69	44.95	Н	-57.56	-7.76	1.38	-66.70	-13.00	-53.70
849.00	84.05	Н	-2.14	-7.88	3.68	-13.70	-13.00	-0.70
1697.60	45.95	Н	-58.40	9.44	5.31	-54.27	-13.00	-41.27
2546.40	42.27	Н	-58.33	10.20	6.63	-54.77	-13.00	-41.77
3395.20		Н		12.38	7.87		-13.00	
4244.00		Н		12.63	9.00		-13.00	
5092.80		Н		12.74	9.88		-13.00	
5941.60	41.17	Н	-48.57	13.81	10.70	-45.46	-13.00	-32.46
6790.40		Н		11.86	11.48		-13.00	
7639.20		Н		11.40	12.27		-13.00	
8488.00		Н		11.70	12.91		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"----" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) - Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 64 of 80

# **Radiated Spurious Emission Measurement Result: GPRS 1900 Mode**

Operation Mode	: TX CH Low E2 Mode	Test Date:	Sep. 21, 2010
Fundamental Frequency	: 1850.20MHz	Test By:	Bondi
Temperature	: 25°C	Pol:	Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
33.88	50.41	V	-53.16	-5.52	0.93	-59.61	-13.00	-46.61
67.83	45.06	V	-66.63	-0.95	1.14	-68.72	-13.00	-55.72
101.78	44.98	V	-56.78	-7.76	1.37	-65.90	-13.00	-52.90
1850.00	69.34	V	-35.05	9.90	5.56	-30.71	-13.00	-17.71
3700.40		V		12.61	8.31		-13.00	
5550.60	54.43	V	-36.41	13.23	10.33	-33.51	-13.00	-20.51
7400.80		V		11.50	12.08		-13.00	
9251.00		V		11.92	13.50		-13.00	
11101.20		V		11.66	15.11		-13.00	
12951.40		V		13.63	16.60		-13.00	
14801.60		V		12.76	17.95		-13.00	
16651.80		V		15.92	19.14		-13.00	
18502.00		V		18.75	10.40		-13.00	

	30MHz - 80MHz: 5.04dB	
Measurement uncertainty	80MHz -1000MHz: 3.76dB	
	1GHz - 13GHz: 4.45dB	

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"----" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) - Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 65 of 80

# **Radiated Spurious Emission Measurement Result: GPRS 1900 Mode**

Operation Mode	: TX CH Low E2 Mode	Test Date:	Sep. 21, 2010
Fundamental Frequency	: 1850.20MHz	Test By:	Bondi
Temperature	: 25°C	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
33.88	45.55	Н	-59.15	-5.52	0.93	-65.59	-13.00	-52.59
101.78	46.41	Н	-56.40	-7.76	1.37	-65.53	-13.00	-52.53
1850.00	82.96	Н	-21.22	9.90	5.56	-16.88	-13.00	-3.88
3700.40		Н		12.61	8.31		-13.00	
5550.60	52.10	Н	-38.95	13.23	10.33	-36.05	-13.00	-23.05
7400.80		Н		11.50	12.08		-13.00	
9251.00		Н		11.92	13.50		-13.00	
11101.20		Н		11.66	15.11		-13.00	
12951.40		Н		13.63	16.60		-13.00	
14801.60		Н		12.76	17.95		-13.00	
16651.80		Н		15.92	19.14		-13.00	
18502.00		Н		18.75	10.40		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"----" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) - Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 66 of 80

#### **Radiated Spurious Emission Measurement Result: GPRS 1900 Mode**

Operation Mode	: TX CH Mid E2 Mode	Test Date:	Sep. 21, 2010
Fundamental Frequency	: 1880MHz	Test By:	Bondi
Temperature	: 25°C	Pol:	Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
33.88	47.68	V	-55.89	-5.52	0.93	-62.34	-13.00	-49.34
101.78	46.32	V	-55.44	-7.76	1.37	-64.56	-13.00	-51.56
3760.00		V		12.60	8.39		-13.00	
5640.00	44.60	V	-45.98	13.36	10.41	-43.03	-13.00	-30.03
7520.00		V		11.45	12.19		-13.00	
9400.00		V		11.93	13.61		-13.00	
11280.00		V		11.92	15.27		-13.00	
13160.00		V		13.33	16.71		-13.00	
15040.00		V		13.76	18.15		-13.00	
16920.00		V		15.27	19.32		-13.00	
18800.00		V		18.68	16.58		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"----" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) - Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

際ポデラ付説の 「近報古福米電封測調心(医師員貞)「同時近後価値保留90人で 今年数古木總本公司書面計可) 个可部(力像聚)。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 67 of 80

#### **Radiated Spurious Emission Measurement Result: GPRS 1900 Mode**

Operation Mode	: TX CH Mid E2 Mode	Test Date:	Sep. 21, 2010
Fundamental Frequency	: 1880MHz	Test By:	Bondi
Temperature	: 25°C	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
33.88	45.40	Н	-59.30	-5.52	0.93	-65.74	-13.00	-52.74
101.78	45.40	Н	-57.41	-7.76	1.37	-66.54	-13.00	-53.54
3760.00		Н		12.60	8.39		-13.00	
5640.00	43.39	Н	-47.36	13.36	10.41	-44.41	-13.00	-31.41
7520.00		Н		11.45	12.19		-13.00	
9400.00		Н		11.93	13.61		-13.00	
11280.00		Н		11.92	15.27		-13.00	
13160.00		Н		13.33	16.71		-13.00	
15040.00		Н		13.76	18.15		-13.00	
16920.00		Н		15.27	19.32		-13.00	
18800.00		Н		18.68	16.58		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"----" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) - Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

開まれのサビル報告結果電料調味に使品具す、同時式体品性保留外灯、今本報告未總本公司書面計可・个可部け使要。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions</u> in fability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 68 of 80

### **Radiated Spurious Emission Measurement Result: GPRS 1900 Mode**

Operation Mode	: TX CH High E2 Mode	Test Date:	Sep. 21, 2010
Fundamental Frequency	: 1909.8 MHz	Test By:	Bondi
Temperature	: 25°C	Pol:	Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
72.68	43.70	V	-67.97	-1.45	1.18	-70.59	-13.00	-57.59
101.78	46.28	V	-55.48	-7.76	1.37	-64.60	-13.00	-51.60
1910.00	68.76	V	-35.57	10.08	5.66	-31.15	-13.00	-18.15
3819.60		V		12.60	8.47		-13.00	
5729.40	43.97	V	-46.35	13.49	10.50	-43.35	-13.00	-30.35
7639.20		V		11.40	12.27		-13.00	
9549.00		V		11.95	13.74		-13.00	
11458.80		V		12.17	15.43		-13.00	
13368.60		V		12.97	16.82		-13.00	
15278.40		V		15.00	18.29		-13.00	
17188.20		V		14.47	19.52		-13.00	
19098.00		V		18.66	20.78		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"----" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) - Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 69 of 80

### **Radiated Spurious Emission Measurement Result: GPRS 1900 Mode**

Operation Mode	: TX CH High E2 Mode	Test Date:	Sep. 21, 2010
Fundamental Frequency	: 1909.8 MHz	Test By:	Bondi
Temperature	: 25°C	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
33.88	44.94	Н	-59.76	-5.52	0.93	-66.20	-13.00	-53.20
101.78	44.75	Н	-58.06	-7.76	1.37	-67.19	-13.00	-54.19
1910.00	81.43	Н	-22.68	10.08	5.66	-18.26	-13.00	-5.26
3819.60		Н		12.60	8.47		-13.00	
5729.40	43.55	Н	-46.90	13.49	10.50	-43.91	-13.00	-30.91
7639.20		Н		11.40	12.27		-13.00	
9549.00		Н		11.95	13.74		-13.00	
11458.80		Н		12.17	15.43		-13.00	
13368.60		Н		12.97	16.82		-13.00	
15278.40		Н		15.00	18.29		-13.00	
17188.20		Н		14.47	19.52		-13.00	
19098.00		Н		18.66	20.78		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"----" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) - Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

開まれのサビル報告結果電料調味に使品具す、同時式体品性保留外灯、今本報告未總本公司書面計可・个可部け使要。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions</u> in fability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 70 of 80

# Radiated Spurious Emission Measurement Result: HSUPA Band IV Mode

Operation Mode	: TX CH Low H Mode	Test Date:	Sep. 21, 2010
Fundamental Frequency	: 1712.40MHz	Test By:	Bondi
Temperature	: 25°C	Pol:	Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
36.79	46.83	V	-55.90	-4.16	0.75	-60.81	-13.00	-47.81
104.69	50.70	V	-52.43	-7.76	1.24	-61.43	-13.00	-48.43
895.24	35.32	V	-51.07	-7.94	3.81	-62.83	-13.00	-49.83
1710.00	65.05	V	-41.97	9.47	5.16	-37.65	-13.00	-24.65
3424.80		V		12.45	7.35		-13.00	
5137.20		V		12.79	9.36		-13.00	
6849.60		V		11.80	10.94		-13.00	
8562.00		V		11.73	12.66		-13.00	
10274.40		V		11.85	13.80		-13.00	
11986.80		V		13.15	15.25		-13.00	
13699.20		V		12.32	16.55		-13.00	
15411.60		V		15.69	18.06		-13.00	
17124.00		V		14.68	19.79		-13.00	

	30MHz - 80MHz: 5.04dB	
Measurement uncertainty	80MHz -1000MHz: 3.76dB	
	1GHz - 13GHz: 4.45dB	

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"----" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) - Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 71 of 80

# Radiated Spurious Emission Measurement Result: HSUPA Band IV Mode

Operation Mode	: TX CH Low H Mode	Test Date:	Sep. 21, 2010
Fundamental Frequency	: 1712.40MHz	Test By:	Bondi
Temperature	: 25°C	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
38.73	44.43	Н	-58.76	-3.25	0.77	-62.78	-13.00	-49.78
104.69	45.30	Н	-57.47	-7.76	1.24	-66.47	-13.00	-53.47
790.48	33.24	Н	-55.08	-7.87	3.52	-66.48	-13.00	-53.48
1710.00	81.08	Н	-25.89	9.47	5.16	-21.58	-13.00	-8.58
3424.80	77.55	Н	-24.71	12.45	7.35	-19.62	-13.00	-6.62
5137.20	68.65	Н	-27.36	12.79	9.36	-23.93	-13.00	-10.93
6849.60		Н		11.80	10.94		-13.00	
8562.00		Н		11.73	12.66		-13.00	
10274.40		Н		11.85	13.80		-13.00	
11986.80		Н		13.15	15.25		-13.00	
13699.20		Н		12.32	16.55		-13.00	
15411.60		Н		15.69	18.06		-13.00	
17124.00		Н		14.68	19.79		-13.00	

	30MHz - 80MHz: 5.04dB	
Measurement uncertainty	80MHz -1000MHz: 3.76dB	
	1GHz - 13GHz: 4.45dB	

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"----" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) - Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 72 of 80

# Radiated Spurious Emission Measurement Result: HSUPA Band IV Mode

Operation Mode	: TX CH Mid H Mode	Test Date:	Sep. 21, 2010
Fundamental Frequency	: 1732.6MHz	Test By:	Bondi
Temperature	: 25°C	Pol:	Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
36.79	46.52	V	-56.21	-4.16	0.75	-61.12	-13.00	-48.12
104.69	50.78	V	-52.35	-7.76	1.24	-61.35	-13.00	-48.35
3465.20		V		12.53	7.38		-13.00	
5197.80		V		12.85	9.41		-13.00	
6930.40		V		11.72	11.05		-13.00	
8663.00		V		11.77	12.74		-13.00	
10395.60		V		11.75	13.95		-13.00	
12128.20		V		13.35	15.32		-13.00	
13860.80		V		11.98	16.77		-13.00	
15593.40		V		16.35	18.21		-13.00	
17326.00		V		14.02	19.68		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"----" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) - Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

開まれのサビル報告結果電料調味に使品具す、同時式体品性保留外灯、今本報告未總本公司書面計可・个可部け使要。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions</u> in fability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 73 of 80

# Radiated Spurious Emission Measurement Result: HSUPA Band IV Mode

Operation Mode	: TX CH Mid H Mode	Test Date:	Sep. 21, 2010
Fundamental Frequency	: 1732.6MHz	Test By:	Bondi
Temperature	: 25°C	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
38.73	44.28	Н	-58.91	-3.25	0.77	-62.93	-13.00	-49.93
104.69	45.45	Н	-57.32	-7.76	1.24	-66.32	-13.00	-53.32
3465.20	73.26	Н	-28.97	12.53	7.38	-23.82	-13.00	-10.82
5197.80	62.51	Н	-33.37	12.85	9.41	-29.93	-13.00	-16.93
6930.40		Н		11.72	11.05		-13.00	
8663.00		Н		11.77	12.74		-13.00	
10395.60		Н		11.75	13.95		-13.00	
12128.20		Н		13.35	15.32		-13.00	
13860.80		Н		11.98	16.77		-13.00	
15593.40		Н		16.35	18.21		-13.00	
17326.00		Н		14.02	19.68		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"----" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) - Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

際ポデラ付説の 「近報古福米電封測調心(医師員貞)「同時近後価値保留90人で 今年数古木總本公司書面計可) 个可部(力像聚)。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 74 of 80

# Radiated Spurious Emission Measurement Result: HSUPA Band IV Mode

Operation Mode	: TX CH High H Mode	Test Date:	Sep. 21, 2010
Fundamental Frequency	: 1752.6 MHz	Test By:	Bondi
Temperature	: 25°C	Pol:	Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
36.79	45.56	V	-57.17	-4.16	0.75	-62.08	-13.00	-49.08
104.69	48.46	V	-54.67	-7.76	1.24	-63.67	-13.00	-50.67
1755.00	62.27	V	-44.73	9.61	5.24	-40.36	-13.00	-27.36
3505.20		V		12.61	7.42		-13.00	
5257.80		V		12.91	9.46		-13.00	
7010.40		V		11.65	11.14		-13.00	
8763.00		V		11.80	12.82		-13.00	
10515.60		V		11.66	14.08		-13.00	
12268.20		V		13.54	15.39		-13.00	
14020.80		V		11.67	16.95		-13.00	
15773.40		V		16.75	18.27		-13.00	
17526.00		V		13.21	19.62		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"----" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) - Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

開まれのサビル報告結果電料調味に使品具す、同時式体品性保留外灯、今本報告未總本公司書面計可・个可部け使要。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions</u> in fability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2010/70044 Issue Date: Sep. 21, 2010 Page: 75 of 80

# Radiated Spurious Emission Measurement Result: HSUPA Band IV Mode

Operation Mode	: TX CH High H Mode	Test Date:	Sep. 21, 2010
Fundamental Frequency	: 1752.6 MHz	Test By:	Bondi
Temperature	: 25°C	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
38.73	44.94	Н	-58.25	-3.25	0.77	-62.27	-13.00	-49.27
104.69	43.86	Н	-58.91	-7.76	1.24	-67.91	-13.00	-54.91
1755.00	80.47	Н	-26.48	9.61	5.24	-22.11	-13.00	-9.11
3505.20	75.15	Н	-27.03	12.61	7.42	-21.84	-13.00	-8.84
5257.80	66.50	Н	-29.26	12.91	9.46	-25.81	-13.00	-12.81
7010.40		Н		11.65	11.14		-13.00	
8763.00		Н		11.80	12.82		-13.00	
10515.60		Н		11.66	14.08		-13.00	
12268.20		Н		13.54	15.39		-13.00	
14020.80		Н		11.67	16.95		-13.00	
15773.40		Н		16.75	18.27		-13.00	
17526.00		Н		13.21	19.62		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"----" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) - Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



# **10. FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT**

# **10.1. Standard Applicable:**

According to FCC §2.1055(a) (1)


Frequency Tolerance: +/-2.5ppm for 850MHz band

+/-2.5ppm for 1900MHz band

+/-2.5ppm for 1700MHz band

# 10.2. Test Set-up:

Temperature Chamber

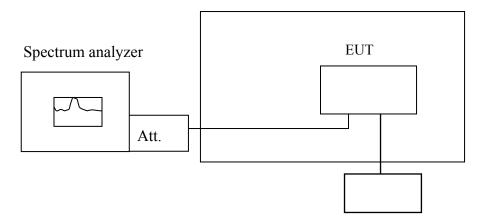

Variable DC Power Supply

Note: Measurement setup for testing on Antenna connector

# **10.3. Measurement Procedure:**

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to  $-30^{\circ}$ C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with  $10^{\circ}$ C increased per stage until the highest temperature of  $+50^{\circ}$ C reached.

# **10.4. Measurement Equipment Used:**

Refer to section 2.4 in this report

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to Terms and Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Electronic Documents at <u>www.sqs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



### **10.5. Measurement Result:**

Reference Frequency: GPRS 850 Mid Channel 836.6 MHz @ 25°C							
	Limit: +/- 2.5 ppm = 2091 Hz						
Power Supply	Environment	Frequency	Dolta (Uz)	Limit (Hz)			
Vdc	Temperature (°C)	(MHz)	Delta (Hz)	Linint (HZ)			
3.7	-30	836.599989	6.00	2091			
3.7	-20	836.599995	0.00	2091			
3.7	-10	836.599993	2.00	2091			
3.7	0	836.599989	6.00	2091			
3.7	10	836.599987	8.00	2091			
3.7	20	836.599995	0.00	2091			
3.7	30	836.599991	4.00	2091			
3.7	40	836.599985	10.00	2091			
3.7	50	836.599988	7.00	2091			

Refere	Reference Frequency: GPRS 1900 Mid Channel 1880 MHz @ 20°C						
	Limit: +/- 2.5 ppm = 4700 Hz						
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)			
Vdc	Temperature (°C)	(MHz)	Della (IIZ)	Linit (112)			
3.7	-30	1879.999982	-5.00	4700			
3.7	-20	1879.999980	-3.00	4700			
3.7	-10	1879.999983	-6.00	4700			
3.7	0	1879.999979	-2.00	4700			
3.7	10	1879.999981	-4.00	4700			
3.7	20	1879.999977	0.00	4700			
3.7	30	1879.999971	6.00	4700			
3.7	40	1879.999979	-2.00	4700			
3.7	50	1879.999967	10.00	4700			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indem-nification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized altera-tion, forgery or falsification of the content or appearance of this document to anotafend from any be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Reference Frequency: WCDMA IV Mid Channel 1732.6(ARFCN1413) MHz @ 25°C							
	Limit: +/- 2.5 ppm = 4331 Hz						
Power Supply	Environment	Frequency					
Vdc	Temperature (°C)	(MHz)	Delta (Hz)	Limit (Hz)			
3.7	-30	1732.600002	-8.00	4331			
3.7	-20	1732.599998	-4.00	4331			
3.7	-10	1732.599997	-3.00	4331			
3.7	0	1732.599995	-1.00	4331			
3.7	10	1732.599997	-3.00	4331			
3.7	20	1732.599994	0.00	4331			
3.7	30	1732.599992	2.00	4331			
3.7	40	1732.599995	-1.00	4331			
3.7	50	1732.599989	5.00	4331			

Note: The battery is rated 3.7V dc.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



# 11. FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT

# 11.1. Standard Applicable:

According to FCC 2.1055(a) (1)

Frequency Tolerance: +/-2.5ppm for 850MHz band

+/-2.5ppm for 1900MHz band

+/-2.5ppm for 1700MHz band

### 11.2. Test Set-up:

Refer to section 10.2 in this report

### **11.3. Measurement Procedure:**

Set chamber temperature to  $25^{\circ}$ C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.

# **11.4. Measurement Equipment Used:**

Refer to section 2.4 in this report

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



# **11.5. Measurement Result:**

Reference Frequency: GPRS 850 Mid Channel 836.6 MHz @ 25°C							
	Limit: +/- 2.5 ppm = 2091 Hz						
Power Supply	Environment	Frequency					
Vdc	Temperature (°C)	(MHz)	Delta (Hz)	Limit (Hz)			
4.2	25.00	836.599992	3.00	2091.00			
3.7	25.00	836.599995	0.00	2091.00			
3.5	25.00	836.599993	2.00	2091.00			
3.4 (Endpoint)	25.00	836.599986	9.00	2091.00			

Reference Frequency: GPRS 1900 Mid Channel 1880 MHz @ 25°C						
Limit: +/- 2.5 ppm = 4700 Hz						
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)		
Vdc	Temperature (°C)	(MHz)				
4.2	25	1879.999975	2.00	4700		
3.7	25	1879.999977	0.00	4700		
3.5	25	1879.999974	3.00	4700		
3.4 (Endpoint)	25	1879.999968	9.00	4700		

Reference Frequency: WCDMA IV Mid Channel 1732.6 MHz(ARFCN1413) @ 25°C						
Limit: +/- 2.5 ppm = 4331 Hz						
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)		
Vdc	Temperature (°C)	(MHz)				
4.2	25	1732.599987	7.00	4331		
3.7	25	1732.599994	0.00	4331		
3.5	25	1732.599996	-2.00	4331		
3.4	25		13.00	4331		
(Endpoint)	23	1732.599981	15.00	т <i>ээ</i> т		

Note: The battery is rated 3.7V dc.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。