

FCC ID: E2KV02S002

Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 1 of 69

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF

Product Name:	Smart Phone
Brand Name:	DELL
Model Name:	V02S002
Model Different:	N/A
FCC ID:	E2KV02S002
Report No.:	EH/2010/70045
Issue Date:	Oct. 21, 2010
FCC Rule Part:	§15.247, Cat: DSS
Prepared for:	DELL Inc.
	One Dell Way, Round Rock, Tx 78682
Prepared by:	SGS Taiwan Ltd.
	Electronics & Communication Laboratory
	No. 134, Wu Kung Rd., Wuku Industrial Zone,
	Taipei County, Taiwan.



Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279

台灣檢驗科技股份有限公司	1
--------------	---

f (886-2) 2298-0488 www.tw.sqs.com



FCC ID: E2KV02S002

Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 2 of 69

VERIFICATION OF COMPLIANCE

DELL Inc.
One Dell Way, Round Rock, Tx 78682
Smart Phone
DELL
V02S002
N/A
E2KV02S002
EH/2010/70045
Jul. 28, 2010 ~ Sep. 15, 2010
Jul. 28, 2010

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Jazz Huang	Date:	Oct. 21, 2010
	Jazz Huang / Engineer		
Prepared By:	makas	Date:	Oct. 21, 2010
-	Eva Kao / Asst. Supervisor		
Approved By:	ALNO HSieh	Date:	Oct. 21, 2010
	Arno Hsieh / Asst. Supervisor		



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 3 of 69

Version

Version No.	Date	Description
00	Oct. 21, 2010	Initial creation of document

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Table of Contents

1.	GEN	ERAL INFORMATION	7
	1.1.	Product Description	7
	1.2.	Related Submittal(s) / Grant (s)	
	1.3.	Test Methodology	
	1.4.	Test Facility	
	1.5.	Special Accessories	
	1.6.	Equipment Modifications	
2.	SYST	FEM TEST CONFIGURATION	
	2.1.	EUT Configuration	11
	2.2.	EUT Exercise	
	2.3.	Test Procedure	11
	2.4.	Configuration of Tested System	
3.	SUM	MARY OF TEST RESULTS	
4.	DES	CRIPTION OF TEST MODES	
5.	CON	DUCTED EMISSION TEST	14
	5.1.	Standard Applicable	14
	5.2.	EUT Setup	14
	5.3.	Measurement Procedure	14
	5.4.	Measurement Equipment Used:	
	5.5.	Measurement Result	
6.	PEA	K OUTPUT POWER MEASUREMENT	
	6.1.	Standard Applicable	
	6.2.	Measurement Equipment Used	
	6.3.	Test Set-up:	
	6.4.	Measurement Procedure:	
	6.5.	Measurement Result	
7.	20dB	BAND WIDTH	24
	7.1.	Standard Applicable	
	7.2.	Measurement Equipment Used	
	7.3.	Test Set-up	
	7.4.	Measurement Procedure:	
	7.5.	Measurement Result:	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



8.	100K	Hz BANDWIDTH OF BAND EDGES MEASUREMENT	30
	8.1.	Standard Applicable	30
	8.2.	Measurement Equipment Used	30
	8.3.	Test SET-UP:	31
	8.4.	Measurement Procedure	32
	8.5.	Field Strength Calculation	32
	8.6.	Measurement Result	32
9.	SPUR	LIOUS RADIATED EMISSION TEST	39
	9.1.	Standard Applicable	39
	9.2.	Measurement Equipment Used:	39
	9.3.	Test SET-UP:	39
	9.4.	Measurement Procedure:	39
	9.5.	Field Strength Calculation	40
	9.6.	Measurement Result:	40
10.	FRE(QUENCY SEPARATION	53
	10.1.	Standard Applicable	53
	10.2.	Measurement Equipment Used:	53
	10.3.	Test Set-up:	53
	10.4.	Measurement Procedure:	53
	10.5.	Measurement Result:	53
11.	NUM	BER OF HOPPING FREQUENCY	55
	11.1.	Standard Applicable	55
	11.2.	Measurement Equipment Used:	55
	11.3.	Test Set-up:	55
	11.4.	Measurement Procedure:	55
	11.5.	Measurement Result:	55
12.	TIME	C OF OCCUPANCY (DWELL TIME)	58
	12.1.	Standard Applicable	58
	12.2.	Measurement Equipment Used:	58
	12.3.	Test Set-up:	58
	12.4.	Measurement Procedure:	58
	12.5.	Measurement Result	59



FCC ID: E2KV02S002

Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 6 of 69

13.	Peak 2	Power Spectral Density	66
	13.1.	Standard Applicable	
	13.2.	Measurement Equipment Used:	
	13.3.	Test Set-up:	
	13.4.	Measurement Procedure:	
	13.5.	Measurement Result	
14.	ANTI	ENNA REQUIREMENT	69
	14.1.	Standard Applicable	69
	14.2.	Antenna Connected Construction	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



1. GENERAL INFORMATION

1.1. Product Description

General[.]

Product Name	Smart Phone		
Brand Name	DELL		
Model Name	V02S002		
Model Difference	N/A		
Micro USB Cable	Model No.: 5K.16R01.001 / CU04C04U05-K66-EF, Supplier: HELM		
Simple Hands-free (SHF)		No.: 525283 / TY.2C190.003, Supplier: Foster No.: C055T / TY.2C190.001, Supplier: PCH	
	3.7 Vdc re-cł	nargeable battery or 5Vdc by AC/DC power adapter	
Dowor Supply	Battery:	Model: 214L0 / 2C.214L0.001, Supplier: CHENG UEI	
Power Supply	Adapter:	Model No.: 32HD9/ 0005ADUUS, Supplier: PCH	
	Car Charge:	Model No.: DT933 / LD5V50-00, Supplier: PCH	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



GSM and WCDMA:

	Operating Frequency		Rated Power	
	GSM/GPRS 850, Class 12	824.2 MHz- 848.8MHz	32.5 dBm	
Cellular Phone Standards	EDGE 850, Class 12	824.2 MHz- 848.8MHz	26.5 dBm	
Frequency Range and Power:	GSM/GPRS 1900, Class 12	1850.2MHz-1909.8MHz	29.5 dBm	
	EDGE 1900, Class 12	1850.2MHz-1909.8MHz	25.5 dBm	
	WCDMA/HSUPA/HSDPA Band IV	1712.4MHz-1752.6MHz	23.5 dBm	
Hardware Version:	N/A			
Software Version:	N/A			
IMEI:	01228700XXXXXX			

Final Amplifier Voltage and Current Information:

Test Mode	DC voltage (V)	DC current (mA)
GPRS 850	3.3V	450
GPRS 1900	3.3V	380
EDGE 850	3.3V	360
EDGE 1900	3.3V	320
WCDMA Band 4	3.3V	660
HSUPA Band 4	3.3V	660

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



WLAN: 802.11 b/g

Frequency Range:	2412 – 2462MHz
Channel number:	11 channels
Max. Output Power:	802.11 b: 17.38 dBm 802.11 g: 13.84 dBm
Modulation Technology:	DSSS, OFDM
Modulation type:	CCK, DQPSK, DBPSK for DSSS 64QAM. 16QAM, QPSK, BPSK for OFDM
Transition Rate:	802.11 b: 1/2/5.5/11 Mbps; 802.11 g: 6/9/12/18/24/36/48/54 Mbps
Antenna Designation:	PIFA Antenna, -0.02dBi.

Bluetooth.

Bluetooth Version:	V2.1 + EDR (GFSK + $\pi/4DQPSK + 8DPSK$)
Channel number:	79 channels
Modulation type:	Frequency Hopping Spread Spectrum
Transmit Power:	6.76 dBm
Frequency Range:	2.402GHz – 2.480GHz
Dwell Time:	<= 0.4s
Operating Mode:	Point-to-Point
Antenna Designation:	PIFA Antenna, -0.02dBi.

The EUT is compliance with Bluetooth 2.1 + EDR Standard.

This report applies for Bluetooth 2.1 with EDR

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



1.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: <u>**E2KV02S002**</u> filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

1.3. Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance 3 meters.

Tested in accordance with FCC Public Notice DA 00-705

1.4. Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number are: 990257 and 236194, Canada Registration Number: 4620A-04.

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 &10 meters) and FCC Registration Number: 94644.

1.5. Special Accessories

Not available for this EUT intended for grant.

1.6. Equipment Modifications

Not available for this EUT intended for grant.



2. SYSTEM TEST CONFIGURATION

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

2.3. Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4: 2003.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna. according to the requirements in Section 8 and 13 and Subclause 8.3.1.2 of ANSI C63.4: 2003 and DA 00-705.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 12 of 69

2.4. Configuration of Tested System

Fig. 2-1 AC Power line and Radiated Emission Configuration




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1	N/A					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

and conditions.htm and.



3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207	Conducted Emission	Compliant
§15.247(b)	Peak Output Power	Compliant
§15.247(a)	20dB Bandwidth	No Limit
§15.247(d)	100 KHz Bandwidth Of Fre-	Compliant
	quency Band Edges	
§15.247(d)	Spurious Emission	Compliant
§15.247(a)(1)	Frequency Separation	Compliant
§15.247(a)(1)(iii)	Number of hopping frequency	Compliant
§15.247(a)(1)(iii)	Time of Occupancy	Compliant
§15.247(e)	Peak Power Density	Compliant
§15.203	Antenna Requirement	Compliant

4. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting mode is programmed.

Channel Low, Mid and High with highest rated data rate were chosen for full testing.

After compared the power of three modulation type: GFSK, π /4DQPSK and 8DPSK and found the power of 8DPSK is larger than other and the Duty Cycle of DH5 also larger than DH1, DH3. So chose modulation: 8DPSK and Data Rate: DH5 as a worst case to carry out every test item

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責;同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms</u> for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u>. Attention is drawn to the lim

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_ad_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the law.



5. CONDUCTED EMISSION TEST

5.1. Standard Applicable

According to §15.207. frequency within 150KHz to 30MHz shall not exceed the limit table as below.

Fraguenay range		nits
Frequency range	(LD)	(uV)
MHz	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Note		
1 The lawser limit shall apply at the	the second s	

1. The lower limit shall apply at the transition frequencies

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

5.2. EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4: 2003.
- 2. The EUT was plug-in the AC/DC Power adapter. The host system was placed on the center of the back edge on the test table. The peripherals was placed on the side of the host PC system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
- 3. The spacing between the peripherals was 10 centimeters.
- 4. External I/O cables were draped along the edge of the test table and bundle when necessary.
- 5. The host system was connected with 120Vac/60Hz power source.

5.3. Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemonly and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. | No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



5.4. Measurement Equipment Used:

Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
ТҮРЕ		NUMBER	NUMBER	CAL.				
EMI Test Receiver	R&S	ESCS30	828985/004	09/15/2010	09/14/2011			
LISN	Rolf-Heine	NNB-2/16Z	99012	02/02/2010	02/01/2011			
LISN	FCC	FCC-LISN-50/250-25-2-01	04034	02/02/2010	02/01/2011			
Coaxial Cables	N/A	WK CE Cable	N/A	10/30/2009	10/29/2010			

5.5. Measurement Result

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indem-only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unawful and offenders may he prosecuted to the law. tion, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 16 of 69

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	Operation Mode			Test Date:	Sep. 14, 2010
Temperature:	24 °C	Humidity:	56 %	Test By:	Jason

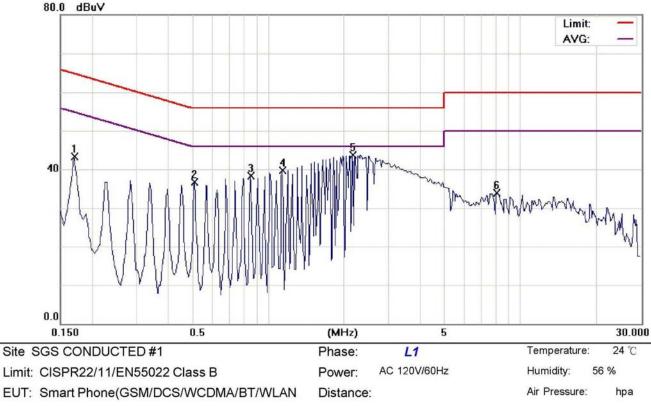

M/N: V02S002

Note: WLAN /BT Operation


No.	Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1700	43.13	0.13	43.26	64.96	-21.70	peak	
2		0.5100	36.65	0.12	36.77	56.00	-19.23	peak	
3		0.8500	38.09	0.12	38.21	56.00	-17.79	peak	
4		1.1400	39.48	0.13	39.61	56.00	-16.39	peak	
5	*	2.1600	43.63	0.16	43.79	56.00	-12.21	peak	
6		8.0400	33.62	0.38	34.00	60.00	-26.00	peak	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Winser Statute Stat and conditions.htm and. for electronic format documents, subject to the conditions for electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indem-nification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 17 of 69

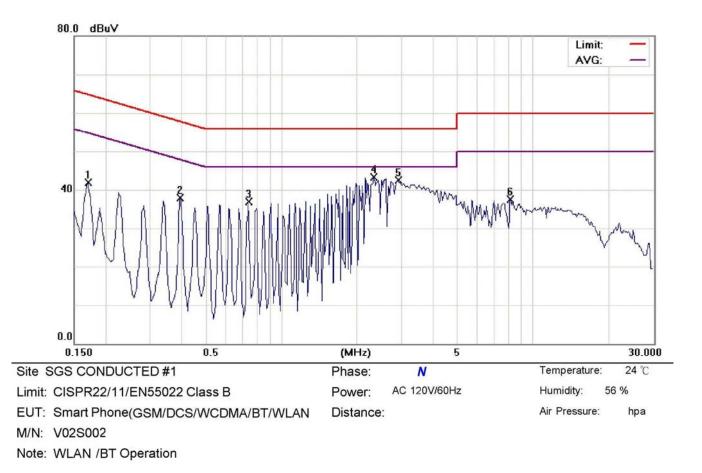

No. Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over			
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment	
1	0.1700	41.84	0.14	41.98	64.96	-22.98	peak		
2	0.3950	37.73	0.12	37.85	57.96	-20.11	peak		
3	0.7400	36.75	0.13	36.88	56.00	-19.12	peak		
4 *	2.3300	43.14	0.17	43.31	56.00	-12.69	peak		
5	2.9000	42.33	0.18	42.51	56.00	-13.49	peak		
6	8.1400	37.16	0.37	37.53	60.00	-22.47	peak		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contention of the state of the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責, 同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indem-nification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their right or and oblight to report the transport of the transport of the transport of the company. Apulation of the transport of the transport. and conditions.htm and. their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or anabation because of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 18 of 69

6. PEAK OUTPUT POWER MEASUREMENT


6.1. Standard Applicable

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1Watt. For all other frequency hopping systems in the 2400 – 2483.5MHz band: 0.125 Watts.

Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
ТҮРЕ		NUMBER	NUMBER	CAL.				
Power Sensor	Anritsu	MA2411B	917032	01/21/2010	01/20/2012			
Power Meter	Anritsu	ML2495A	1005007	02/17/2010	02/16/2012			
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2010	04/18/2012			
Spectrum Analyzer	Agilent	E4440A	MY45304525	01/25/2010	01/24/2011			
DC Block	Agilent	BLK-18	155452	07/05/2010	07/04/2011			
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/05/2010	01/04/2011			
Attenuator	Mini-Circuit	BW-S6W5	001	07/05/2010	07/04/2011			
Attenuator	Mini-Circuit	BW-S10W5	001	07/05/2010	07/04/2011			
Attenuator	Mini-Circuit	BW-S20W5	001	07/05/2010	07/04/2011			
Splitter	Agilent	11636B	N/A	07/05/2010	07/04/2011			

6.2. Measurement Equipment Used

6.3. Test Set-up:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



6.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (BDR model: max peak RBW/VBW = 1MHz, EDR model: max peak RBW = 1.5MHz VBW = 5MHz)
- 3. Record the max. reading.
- 4. Repeat above procedures until all frequency measured were complete.

6.5. Measurement Result

BDR Mode

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2402.00	5.32	0.00	5.32	0.00340	1
2441.00	6.34	0.00	6.34	0.00431	1
2480.00	6.28	0.00	6.28	0.00425	1

EDR Mode

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2402.00	5.44	0.00	5.44	0.00350	1
2441.00	6.62	0.00	6.62	0.00459	1
2480.00	6.76	0.00	6.76	0.00474	1


offset: 7dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms electronic documents is drawn to the limitation of liability, indem-nification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 20 of 69

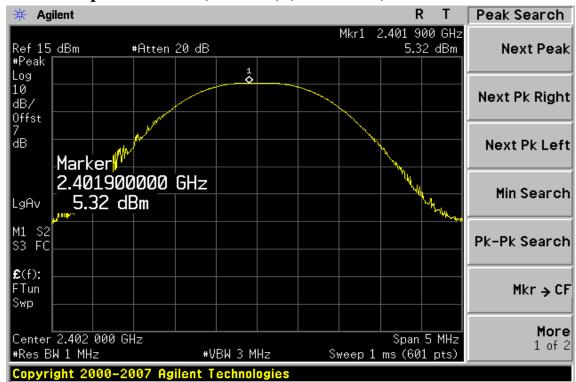

Peak Power Output Data Plot (CH Low) (BDR mode)

Peak Power Output Data Plot (CH Mid) (BDR mode)




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 21 of 69

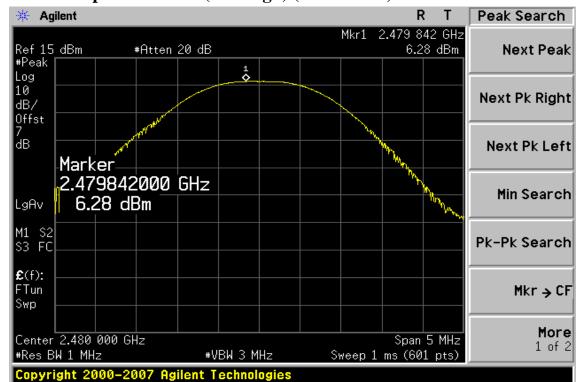


Peak Power Output Data Plot (CH High) (BDR mode)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製




Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 22 of 69

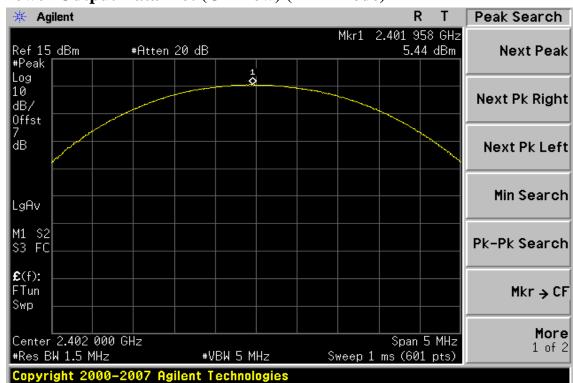

Peak Power Output Data Plot (CH Low) (EDR mode)

Peak Power Output Data Plot (CH Mid) (EDR mode)

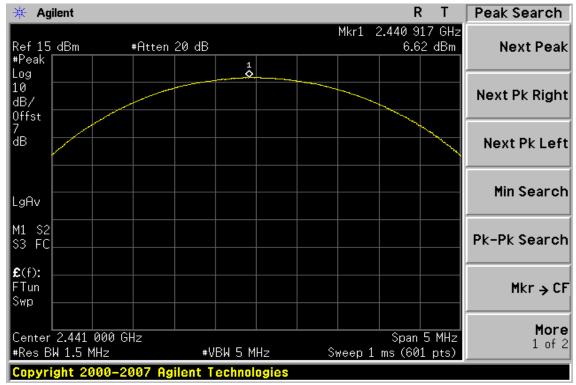

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

SGS Taiwan Ltd.	No. 134, Wu Kung Road, Wu	iku Industriai Zone, Taipei County, Taiwan /台北縣:	134 號 <u>134</u> 號
台灣檢驗科技股份有限公司	t (886-2) 2299-3279	f (886-2) 2298-0488	www.tw.sgs.com
			Member of SGS Group



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 23 of 69

🔆 Agilent Peak Search R Т Mkr1 2.479 917 GHz Ref 15 dBm 6.76 dBm #Atten 20 dB Next Peak #Peak Log 10 Next Pk Right dB/ Offst dΒ Next Pk Left Marker 2.479917000 GHz Min Search 6.76 dBm LgAv M1 S2 S3 FC Pk-Pk Search **£**(f): FTun Mkr → CF Swp More Center 2.480 000 GHz Span 5 MHz 1 of 2 #Res BW 1.5 MHz ₩VBW 5 MHz Sweep 1 ms (601 pts) Copyright 2000-2007 Agilent Technologies

Peak Power Output Data Plot (CH High) (EDR mode)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 24 of 69

7. 20dB BAND WIDTH

7.1. Standard Applicable

For frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB band-width.

7.2. Measurement Equipment Used

Refer to section 6.2 for details.

7.3. Test Set-up

Refer to section 6.3 for details.

7.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW > 1 % of Bandwidth., VBW > RBW, Span= 3MHz, Sweep=auto
- 4. Mark the peak frequency and –20dB (upper and lower) frequency.
- 5. Repeat above procedures until all frequency measured were complete.



7.5. Measurement Result:

BDR Mode

СН	Bandwidth	
	(MHz)	
Lower	0.927	
Mid	0.931	
Higher	0.925	

EDR Mode

СН	Bandwidth	2/3 Bandwidth
	(MHz)	(MHz)
Lower	1.273	0.849
Mid	1.275	0.850
Higher	1.277	0.851

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 26 of 69

20dB Band Width Test Data CH-Low (BDR mode)



20dB Band Width Test Data CH-Mid (BDR mode)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 27 of 69

20dB Band Width Test Data CH-High (BDR mode)




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 28 of 69

20dB Band Width Test Data CH-Low (EDR mode)

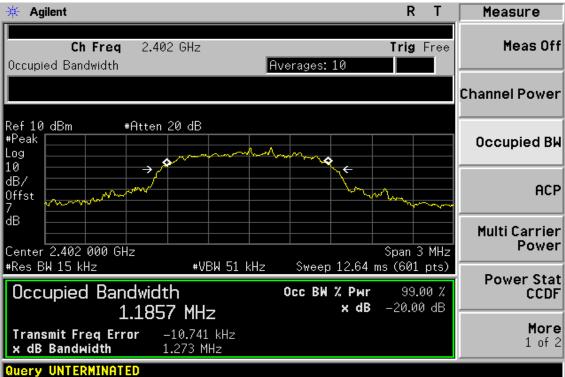

20dB Band Width Test Data CH-Mid (EDR mode)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 29 of 69

20dB Band Width Test Data CH-High (EDR mode)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



8. 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

8.1. Standard Applicable

According to §15.247(d), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

8.2. Measurement Equipment Used

8.2.1. Conducted Emission at antenna port:

Refer to section 6.2 for details.

8.2.2. Radiated emission:

966 Chamber					
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	R&S	FSP 40	100034	02/12/2010	02/11/2011
Bilog Antenna	SCHWAZBECK	VULB9160	3136	11/19/2009	11/18/2010
Horn antenna	SCHWAZBECK	BBHA 9120D	9120D-673	03/09/2009	03/08/2011
Pre-Amplifier	Agilent	8447D	1937A02834	11/28/2009	11/28/2010
Pre-Amplifier	Agilent	8449B	3008A01973	01/05/2010	01/04/2011
Radio Communication Analyzer	R & S	CMU200	102189	10/31/2008	10/30/2010
DC Block	Agilent	BLK-18	155452	07/05/2010	07/04/2011
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R
Controller	HD	HD100	N/A	N.C.R	N.C.R
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	01/05/2010	01/04/2011
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	01/05/2010	01/04/2011
3m Site	SGS	966 chamber	N/A	11/08/2009	11/09/2010

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 31 of 69


8.3. Test SET-UP:

8.3.1. Conducted Emission at antenna port:


Refer to section 6.3 for details.

8.3.2. Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

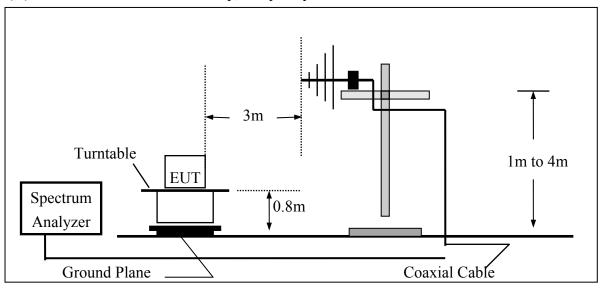

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

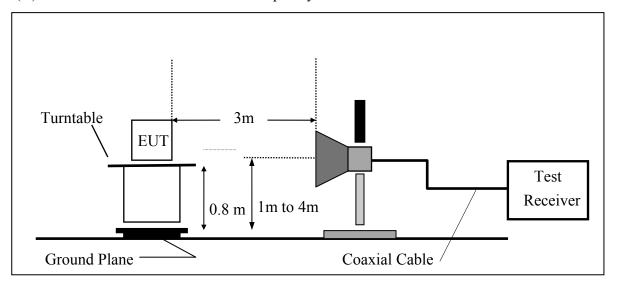

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

			Member of SGS Group
台灣檢驗科技股份有限公司	t (886-2) 2299-3279	f (886-2) 2298-0488	www.tw.sgs.com
SGS Taiwall Llu.	INO. 154, WU KUNY KUdu, Wuku II	nuusinai zone, Taipei County, Taiwan / 🖂	际丑版上未迪丑上哈 134 號



8.4. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Span=25MHz, Sweep = auto
- 5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
- 6. Repeat above procedures until all frequency measured were complete.
- 7. Radiated Emission refer to section 9.

8.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

8.6. Measurement Result


Note: Refer to next page spectrum analyzer data chart and tabular data sheets.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 33 of 69



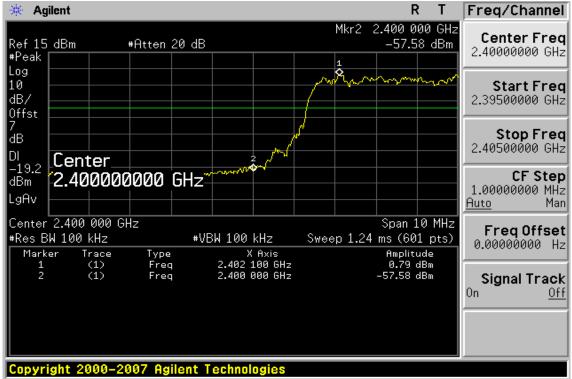

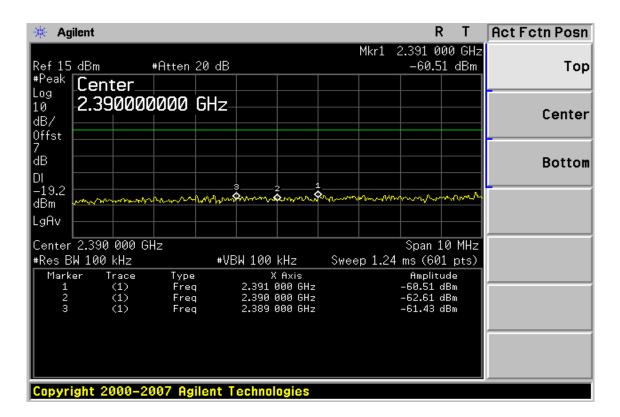


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 34 of 69

Conducted Emission: Enable Test Data CH-High

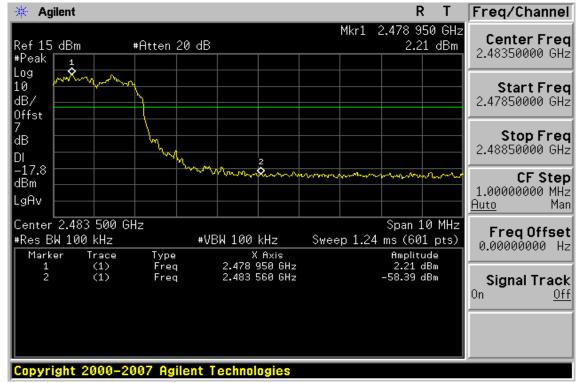

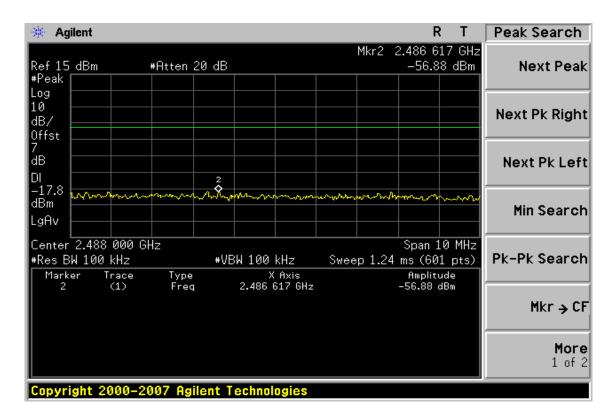



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 35 of 69



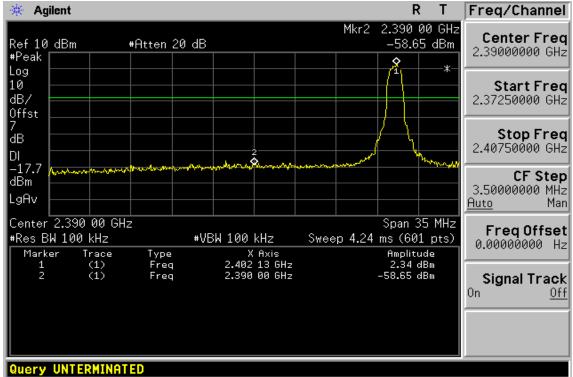

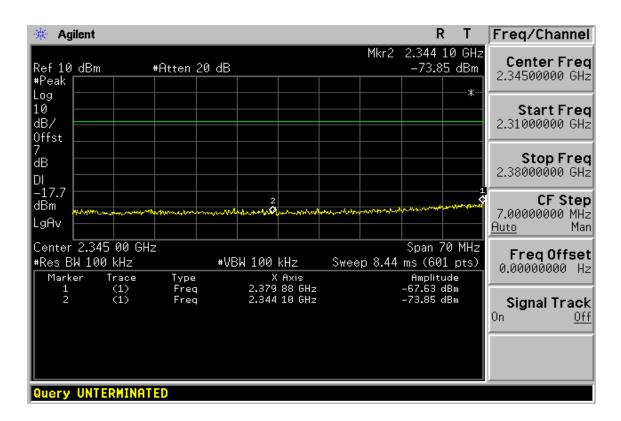


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 36 of 69

Conducted Emission: Disabled Test Data CH-High

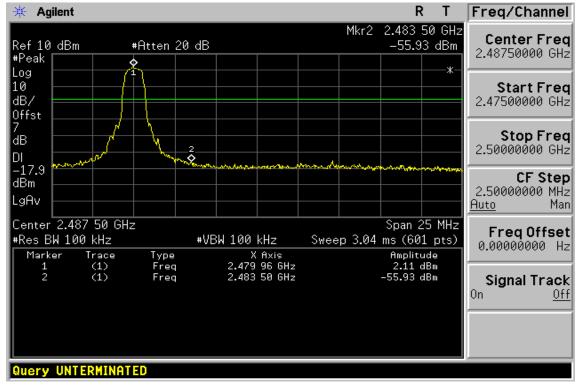

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Radiated Emission: (EDR mode)

Operation Mode	TX CH Low	Test Date	Sep. 26, 2010
Fundamental Frequency	2402 MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	L im it	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m	(dB)	
2390.00	44.73		-1.39	43.34		74.00	54.00	-10.66	Peak
2400.00	45.53		-1.36	44.17		74.00	54.00	-9.83	Peak
Operation			CH Low				est Date	Sep. 26,	2010
Fundamen	ital Freque	ncy 2402	2 MHz			Τe	est By	Jazz	
Temperatu	ire	25 °C	2			Po	ol	Hor.	
Humidity		65 %	, D						
	Peak	AV		Actu	al FS	Peak	AV		

		Реак	AV		Actu	al FS	Реак	ΑV		
	Freq.	Reading	Reading	Ant./CL	Peak	AV	L im it	Limit	Margin	Remark
i	(MHz)	(dBuV)	(dBuV)	CF(dB)	(d Bu V/m)	(dBuV/m)	(dBuV/m)(dBuV/m)	(dB)	
	2390.00	44.78		-1.39	43.39		74.00	54.00	-10.61	Peak
	2400.00	44.42		-1.36	43.06		74.00	54.00	-10.94	Peak

Remark :

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (3) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



FCC ID: E2KV02S002

Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 38 of 69

Radiated Emission: (EDR mode)

Fundamental Frequency Temperature	25 °C	Test Date Test By Pol	Sep. 26, 2010 Jazz Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
2483.50	44.29		-0.92	43.37		74.00	54.00	-10.63	Peak
Operation Mode TX CH High						Те	st Date	Sep. 26,	2010
Fundamen	tal Freque	ncy 2480) MHz			Te	st By	Jazz	
Temperatu	ire	25 °C	2			Ро	1	Hor.	
Humidity		65 %	, D						
	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
2483.50	44.44		-0.92	43.52		74.00	54.00	-10.48	Peak

Remark :

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (3) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 39 of 69

9. SPURIOUS RADIATED EMISSION TEST

9.1. Standard Applicable

According to \$15.247(d), all other emissions outside these bands shall not exceed the general radiated emission limits specified in \$15.209(a). And according to \$15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

9.2. Measurement Equipment Used:

9.2.1. Conducted Emission at antenna port: Refer to section 6.2 for details.

9.2.2. Radiated emission:

Refer to section 8.2 for details.

9.3. Test SET-UP:

9.3.1. Conducted Emission at antenna port: Refer to section 6.3 for details.

9.3.2. Radiated emission:

Refer to section 8.3 for details.

9.4. Measurement Procedure:

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7. Repeat above procedures until all frequency measured were complete.



9.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$\mathbf{FS} = \mathbf{RA} + \mathbf{AF} + \mathbf{CL} - \mathbf{AG}$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)		
	RA = Reading Amplitude	AG = Amplifier Gain		
	AF = Antenna Factor			

9.6. Measurement Result:


Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 41 of 69

Conducted Spurious Emission Measurement Result (Worst: EDR mode) Ch Low 30MHz – 3GHz

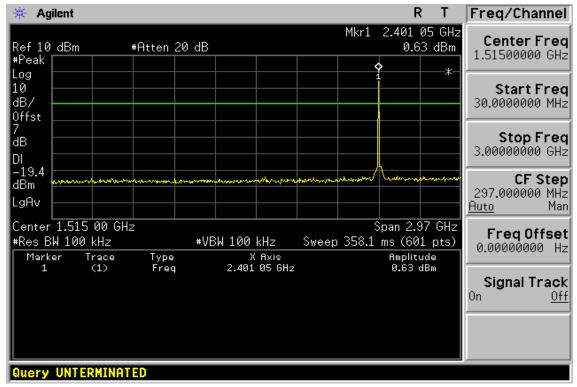

Ch Low 3GHz - 26.5GHz

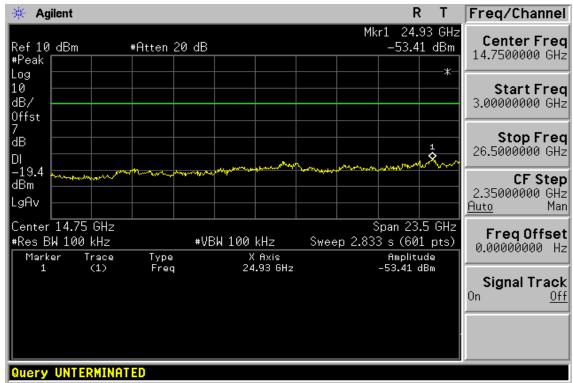


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製




Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 42 of 69

Ch Mid 30MHz – 3GHz

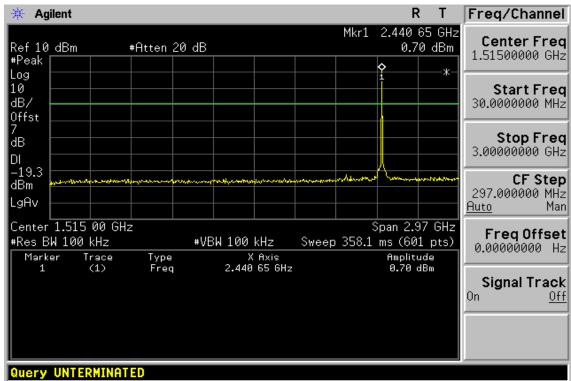



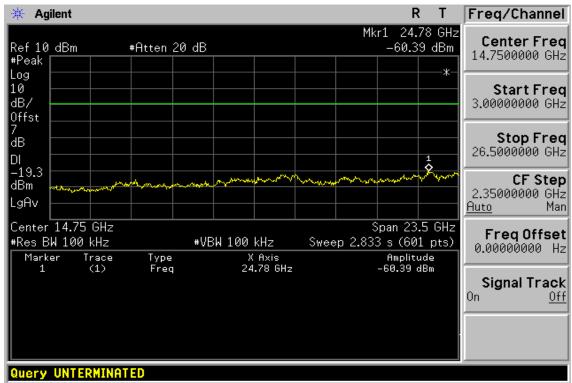


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此聚告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Electronic Documents at <u>www.sgs.com/terms_ed-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 43 of 69

Ch High 30MHz – 3GHz

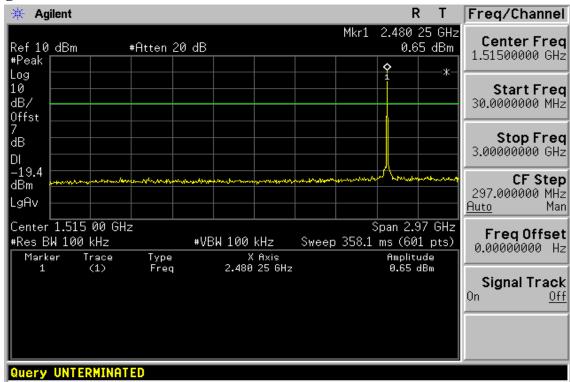



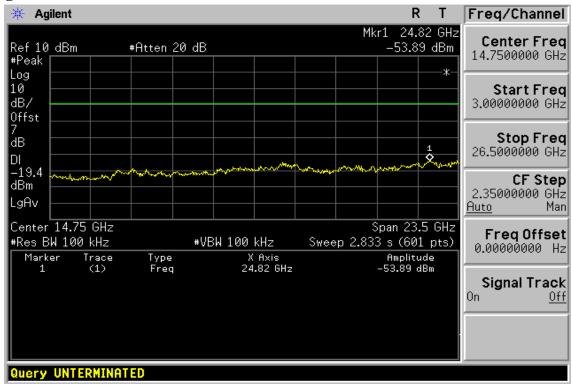

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此聚告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Electronic Documents at <u>www.sgs.com/terms_ed-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 44 of 69

Radiated Spurious Emission Measurement Result (below 1GHz) (EDR mode)

Operation Mode	TX CH Low	Test Date	Sep. 26, 2010
Fundamental Frequency	2402MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor.
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin	
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
92.08	V	Peak	47.72	-17.38	30.34	43.50	-13.16	
798.24	V	Peak	33.15	-3.08	30.07	46.00	-15.93	
92.08	Н	Peak	49.46	-17.38	32.08	43.50	-11.42	
895.24	Н	Peak	32.34	-1.13	31.21	46.00	-14.79	

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz °
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	TX CH Mid	Test Date	Sep. 26, 2010
Fundamental Frequency	2441MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor.
Humidity	65 %		

	Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
_	(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
	92.08	V	Peak	47.70	-17.38	30.32	43.50	-13.18
	880.69	V	Peak	32.66	-1.44	31.22	46.00	-14.78
	92.08	Н	Peak	49.47	-17.38	32.09	43.50	-11.41
	800.18	Н	Peak	32.15	-3.04	29.11	46.00	-16.89

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz °
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	TX CH High	Test Date	Sep. 26, 2010
Fundamental Frequency	2480MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor.
Humidity	65 %		

	Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
_	(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
	92.08	V	Peak	47.80	-17.38	30.42	43.50	-13.08
	778.84	V	Peak	32.79	-3.58	29.21	46.00	-16.79
	92.08	Н	Peak	49.88	-17.38	32.50	43.50	-11.00
	838.98	Н	Peak	32.30	-2.19	30.11	46.00	-15.89

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz °
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH Low	Test Date	Sep. 26, 2010
Fundamental Frequency	2402 MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4804.0	33.84		6.04	39.88		74.00	54.00	-14.12	Peak
7206.0						74.00	54.00		
9608.0						74.00	54.00		
12010.0						74.00	54.00		
14412.0						74.00	54.00		
16814.0						74.00	54.00		
19216.0						74.00	54.00		
21618.0						74.00	54.00		
24020.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

tion, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized altera-



Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH Low	Test Date	Sep. 26, 2010
Fundamental Frequency	2402 MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4804.0	32.95		6.04	38.99		74.00	54.00	-15.01	Peak
7206.0						74.00	54.00		
9608.0						74.00	54.00		
12010.0						74.00	54.00		
14412.0						74.00	54.00		
16814.0						74.00	54.00		
19216.0						74.00	54.00		
21618.0						74.00	54.00		
24020.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indeminfication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 49 of 69

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH Mid	Test Date	Sep. 26, 2010
Fundamental Frequency	2441 MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

		Peak	AV		Actual FS		Peak	AV	Margin	Remark
_	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
	4882.0	33.22		6.04	39.26		74.00	54.00	-14.74	Peak
	7323.0						74.00	54.00		
	9764.0						74.00	54.00		
	12205.0						74.00	54.00		
	14646.0						74.00	54.00		
	17087.0						74.00	54.00		
	19528.0						74.00	54.00		
	21969.0						74.00	54.00		
	24410.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 50 of 69

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH Mid	Test Date	Sep. 26, 2010
Fundamental Frequency	2441 MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor.
Humidity	65 %		

		Peak	AV		Actual FS		Peak	AV	Margin	Remark
_	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
	4882.0	32.90		6.04	38.94		74.00	54.00	-15.06	Peak
	7323.0						74.00	54.00		
	9764.0						74.00	54.00		
	12205.0						74.00	54.00		
	14646.0						74.00	54.00		
	17087.0						74.00	54.00		
	19528.0						74.00	54.00		
	21969.0						74.00	54.00		
	24410.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 51 of 69

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH High	Test Date	Sep. 26, 2010
Fundamental Frequency	2480 MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

		Peak	AV		Actual FS		Peak	AV	Margin	Remark
_	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
_	4960.0	32.80		6.04	38.84		74.00	54.00	-15.16	Peak
	7440.0						74.00	54.00		
	9920.0						74.00	54.00		
	12400.0						74.00	54.00		
	14880.0						74.00	54.00		
	17360.0						74.00	54.00		
	19840.0						74.00	54.00		
	22320.0						74.00	54.00		
	24800.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 52 of 69

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH High	Test Date	Sep. 26, 2010
Fundamental Frequency	2480 MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor.
Humidity	65 %		

	Peak	AV		Actual FS		Peak	AV	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4960.0	34.24		6.04	40.28		74.00	54.00	-13.72	Peak
7440.0						74.00	54.00		
9920.0						74.00	54.00		
12400.0						74.00	54.00		
14880.0						74.00	54.00		
17360.0						74.00	54.00		
19840.0						74.00	54.00		
22320.0						74.00	54.00		
24800.0						74.00	54.00		

Remark:

1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.

5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



10. FREQUENCY SEPARATION

10.1. Standard Applicable

According to \$15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.

10.2. Measurement Equipment Used:

Refer to section 6.2 for details.

10.3. Test Set-up:

Refer to section 6.3 for details.

10.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = middle of hopping channel.
- 4. Set the spectrum analyzer as RBW,VBW=100KHz/100KHz, Adjust Span to 5.0 MHz, Sweep = auto.
- 5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

10.5. Measurement Result:

Channel separation (MHz)	Limit	Result
1	>=25KHz or 2/3 times 20dB bandwidth	PASS

Note: Refer to next page for plots.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 54 of 69

Frequency Separation Test Data

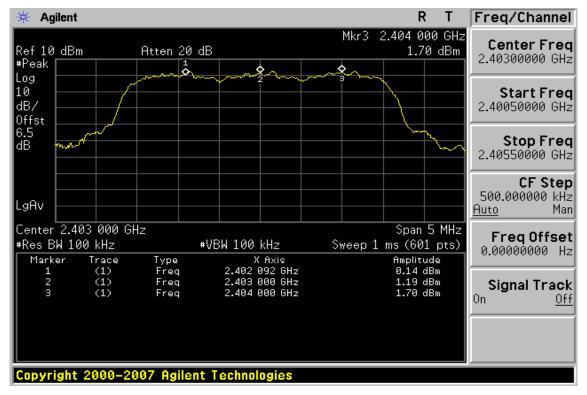

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



11. NUMBER OF HOPPING FREQUENCY

11.1. Standard Applicable

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

11.2. Measurement Equipment Used:

Refer to section 6.2 for details.

11.3. Test Set-up:

Refer to section 6.3 for details.

11.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 4. Set the spectrum analyzer as RBW, VBW=430KHz/1.3MHz,
- 5. Max hold, view and count how many channel in the band.


11.5. Measurement Result:

Note: Refer to next page for plots.




Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 56 of 69

Channel Number

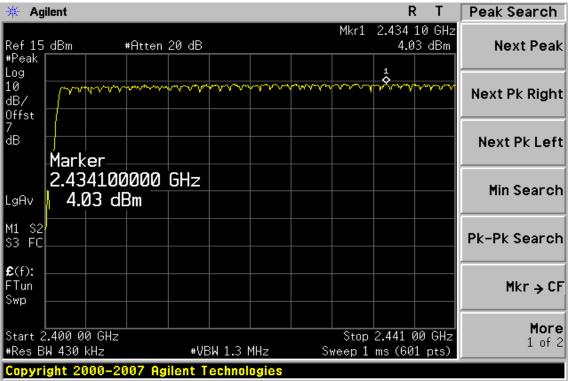

2.4 GHz – 2.441GHz

2.441 GHz – 2.4835GHz

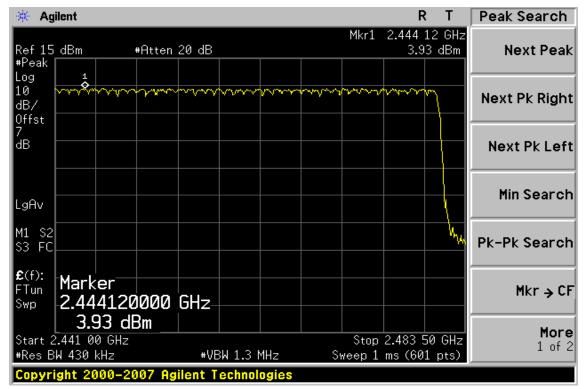

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

SGS Taiwan Ltd.	No. 134, Wu Kung Road, Wu	uku indusinai zone, Taipei County, Taiwan/台北縣	154 號
台灣檢驗科技股份有限公司	t (886-2) 2299-3279	f (886-2) 2298-0488	www.tw.sgs.com
			Member of SGS Group



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 57 of 69

AFH Mode

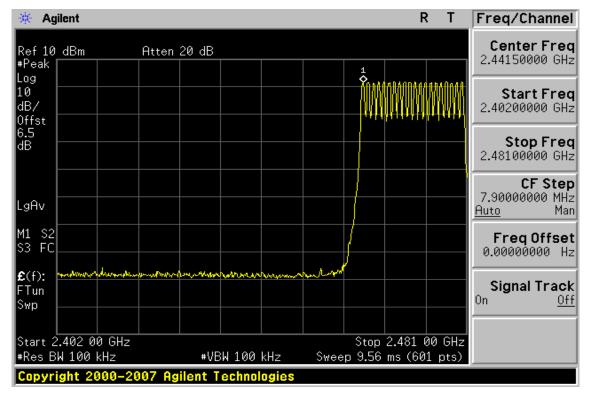

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contention of the state of the results shown in this test report feiter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indem-nification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their right one advisionia upday the transaction from exercising downwaters. This downwaters approximate the transaction from exercising all their right one advisionia upday the transaction parts and the transaction from exercising all their right one advisionia upday the transaction from exercising downwaters. This downwaters approximate approximate approximate the transaction from exercising all their right one advisionia transaction from exercising all for the transaction from exercising all their right one advisionia transaction from exercising all for the transaction from exercising all for the transaction from exercising all for the transaction for the transaction form exercising all for the transaction form exercising all for the transaction formed avecart in formation exercising all formations approximate the transaction forme exercising all formations approximate the transaction forme exercising all formations approximate the transaction formed exercising all formations approximate the transactions for the transactions for the transactions formed ex their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 58 of 69

12. TIME OF OCCUPANCY (DWELL TIME)

12.1. Standard Applicable

According to \$15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

12.2. Measurement Equipment Used:

Refer to section 6.2 for details.

12.3. Test Set-up:

Refer to section 6.3 for details.

12.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=1MHz/1MHz, Span = 0Hz, Adjust Sweep = 2ms-5ms.
- 5. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



FCC ID: E2KV02S002

Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 59 of 69

12.5. Measurement Result

A period time = $0.4 \text{ (ms)} * 79 = 31.6 \text{ (s)}$							
CH Low	DH1 time slot $=$	0.390 (ms) * (1600/2/79) * 31.6 = 124.80	(ms)				
	DH3 time slot $=$	1.633 (ms) * (1600/4/79) * 31.6 = 261.28	(ms)				
	DH5 time slot $=$	2.883 (ms) * (1600/6/79) * 31.6 = 307.52	(ms)				
CH Mid	DH1 time slot $=$	0.390 (ms) * (1600/2/79) * 31.6 = 124.80	(ms)				
	DH3 time slot $=$	1.633 (ms) * (1600/4/79) * 31.6 = 261.28	(ms)				
	DH5 time slot $=$	2.883 (ms) * (1600/6/79) * 31.6 = 307.52	(ms)				
CH High	DH1 time slot $=$	0.390 (ms) * (1600/2/79) * 31.6 = 124.80	(ms)				
	DH3 time slot $=$	1.633 (ms) * (1600/4/79) * 31.6 = 261.28	(ms)				
	DH5 time slot =	2.883 (ms) * (1600/6/79) * 31.6 = 307.52	(ms)				

Note: Refer to next page for plots.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indem-nification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized altera-tion, forgery or falsification of the content or appearance of this document tainoffenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號




Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 60 of 69

CH-Low

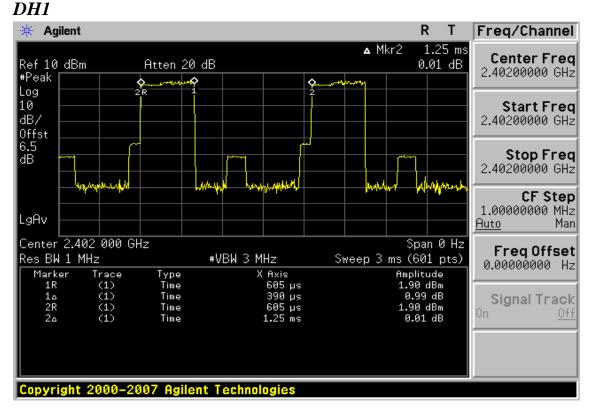

DH3

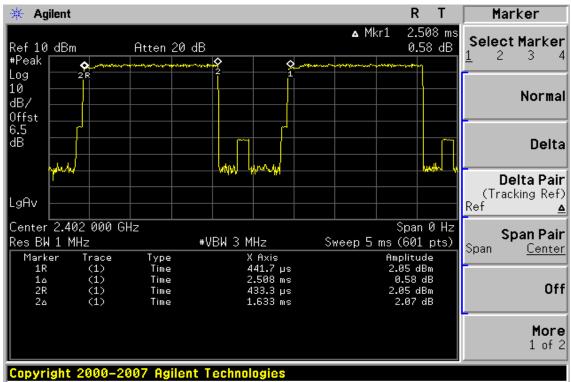


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 61 of 69

DH5

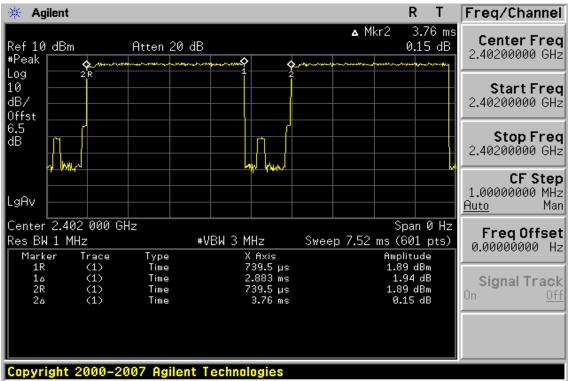


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

WeikBorder and Such only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 62 of 69

CH-Mid

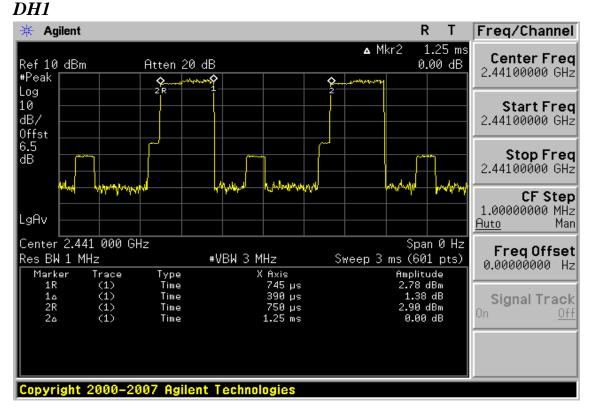

DH3

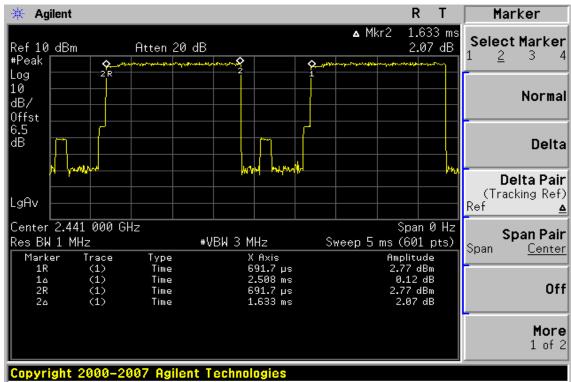


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 63 of 69



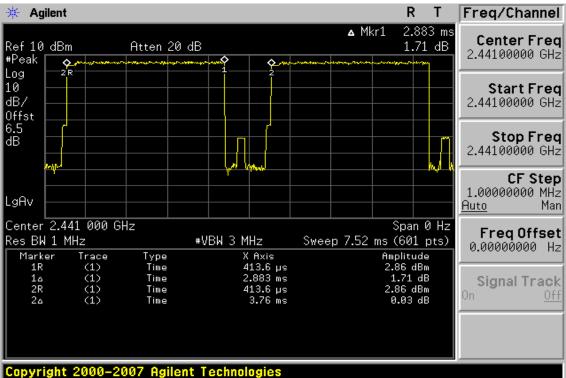


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contention of the state of the results shown in this test report refer only to the sample(s) tested and such sample(s) are related to 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責, 同時比樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indem-nification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their right one do hold to include the transaction from exercising all their right one do hold the transaction approved to the transaction from exercising all their right one do hold the transaction parts and the transaction from exercising all their right one do hold to form approved to the company form and the particular and this document does not exonerate parties to a transaction from exercising all their right one do hold to form parts and the parts a their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 64 of 69

CH-High

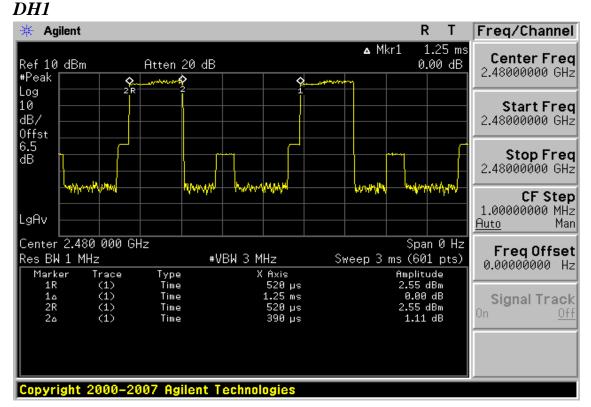

DH3

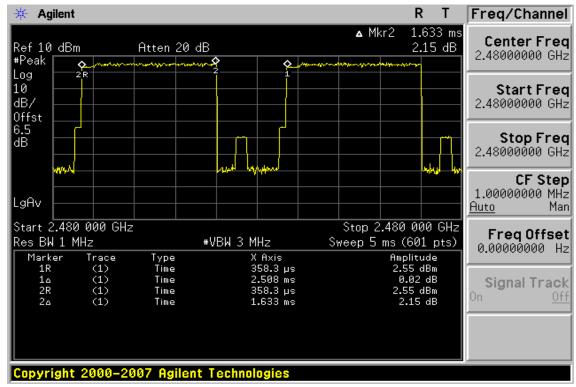


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 65 of 69

DH5

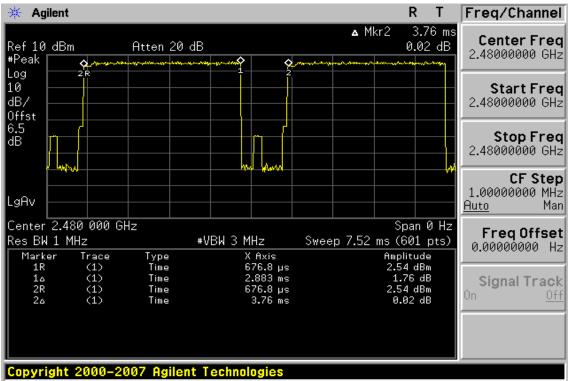

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contention of the state of the results shown in this test report refer only to the sample(s) tested and such sample(s) are related to 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責, 同時比樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indem-nification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their right one do hold to include the transaction from exercising all their right one do hold the transaction approved to the transaction from exercising all their right one do hold the transaction parts and the transaction from exercising all their right one do hold to form approved to the company form and the particular and this document does not exonerate parties to a transaction from exercising all their right one do hold to form parts and the parts a their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



13. Peak Power Spectral Density

13.1. Standard Applicable

According to §15.247(e), for direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3kHz band during any time interval of continuous transmission.

13.2. Measurement Equipment Used:

Refer to section 6.2 for details.

13.3. Test Set-up:

Refer to section 6.3 for details.

13.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 3KHz, VBW = 10KHz, Span = 1.5MHz, Sweep=100s
- 4. Record the max. reading.
- 5. Repeat above procedures until all frequency measured were complete.

13.5. Measurement Result

EDR Mode

СН	RF Power Density Reading (dBm)	Cable loss (dB)	RF Power Density Level (dBm)	Maximum Limit (dBm)
Low	-12.20	0.00	-12.20	8
Mid	-11.28	0.00	-11.28	8
High	-11.57	0.00	-11.57	8

offset 7dB

Note: Refer to next page for plots.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 67 of 69



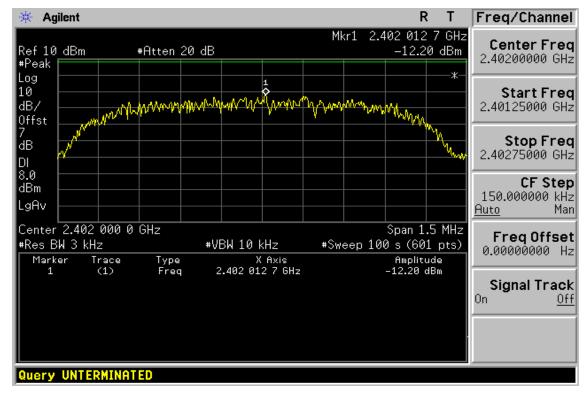

Power Spectral Density Test Plot (Worst: EDR mode) (CH-Mid)

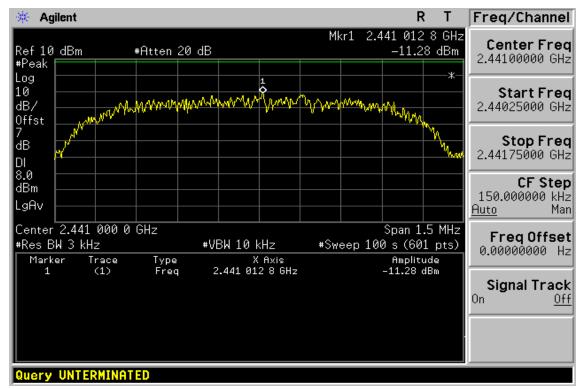


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 68 of 69

Power Spectral Density Test Plot (Worst: EDR mode) (CH-High)

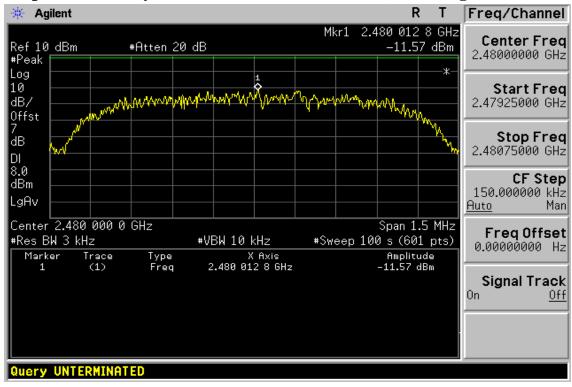

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: ER/2010/70045 Issue Date: Oct. 21, 2010 Page: 69 of 69

14. ANTENNA REQUIREMENT

14.1. Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

14.2. Antenna Connected Construction

The directional gains of antenna used for transmitting is -0.02 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。