


SAMSUNG K&M 27MHz Block Diagram

1. Block Diagram of RF Keyboard

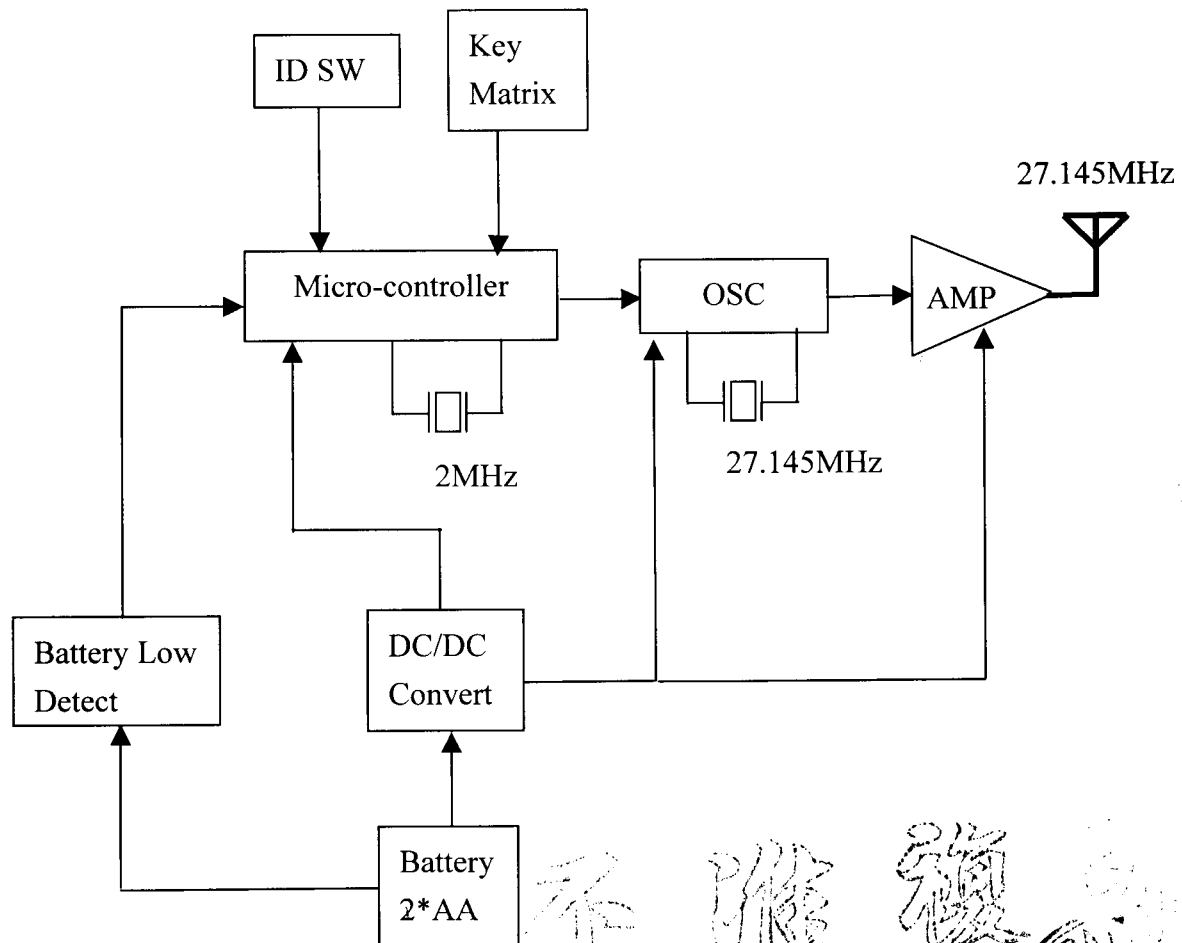

KB:

When Power on, Micro controller is starting to detect the function input signal.

Ex: ID switch, Key matrix

After detecting signals, micro controller encoder data and send data to OSC and local OSC. Then modulation through AMP and turned to radio signal.

文件編號 20040202005			
版次	/	頁次	15-P12