

Radio Test Report

*FCC Part 90 Subpart Z
3650 MHz to 3700 MHz*

Model: Mercury 3650 Outdoor Subscriber

COMPANY: GE MDS LLC
175 Science Parkway
Rochester, NY 14620

TEST SITE(S): NTS Silicon Valley
41039 Boyce Road.
Fremont, CA. 94538-2435

REPORT DATE: July 19, 2012

FINAL TEST DATES: January 19, 21, 28 and 31, February 3, 10, 11
and 14, 2011


TOTAL NUMBER OF PAGES: 83

PROGRAM MGR /
TECHNICAL REVIEWER:



David W. Bare
Chief Engineer

QUALITY ASSURANCE DELEGATE /
FINAL REPORT PREPARER:

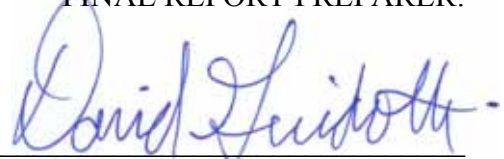

David Guidotti
Senior Technical Writer



NTS Silicon Valley is accredited by the A2LA, certificate number 0214.26, to perform the test(s) listed in this report, except where noted otherwise. This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full

REVISION HISTORY

Rev#	Date	Comments	Modified By
-	07-19-2012	First release	

TABLE OF CONTENTS

REVISION HISTORY2

TABLE OF CONTENTS3

SCOPE.....4

OBJECTIVE5

STATEMENT OF COMPLIANCE.....5

DEVIATIONS FROM THE STANDARDS.....5

TEST RESULTS.....6

 FCC PART 90Z – BASE AND FIXED STATIONS, 3650 – 3700 MHZ6

 EXTREME CONDITIONS7

 MEASUREMENT UNCERTAINTIES.....7

EQUIPMENT UNDER TEST (EUT) DETAILS.....8

 GENERAL.....8

 OTHER EUT DETAILS.....8

 ENCLOSURE.....8

 MODIFICATIONS.....8

 SUPPORT EQUIPMENT.....8

 EUT INTERFACE PORTS9

 EUT OPERATION.....9

TESTING10

 GENERAL INFORMATION.....10

RF PORT MEASUREMENT PROCEDURES11

 OUTPUT POWER.....11

 BANDWIDTH MEASUREMENTS12

 CONDUCTED SPURIOUS EMISSIONS.....12

 TRANSMITTER MASK MEASUREMENTS.....13

 FREQUENCY STABILITY.....13

 TRANSIENT FREQUENCY BEHAVIOR:.....13

RADIATED EMISSIONS MEASUREMENTS.....14

 INSTRUMENTATION15

 FILTERS/ATTENUATORS15

 ANTENNAS.....15

 ANTENNA MAST AND EQUIPMENT TURNTABLE.....15

SAMPLE CALCULATIONS16

 SAMPLE CALCULATIONS - CONDUCTED SPURIOUS EMISSIONS16

 SAMPLE CALCULATIONS –RADIATED FIELD STRENGTH.....16

 SAMPLE CALCULATIONS –RADIATED POWER.....17

RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS18

APPENDIX A TEST EQUIPMENT CALIBRATION DATA19

APPENDIX B TEST DATA21

END OF REPORT83

SCOPE

Tests have been performed on the GE MDS LLC model Mercury 3650 Outdoor Subscriber, pursuant to the relevant requirements of the following standard(s) in order to obtain device certification against the regulatory requirements of the Federal Communications Commission and Industry Canada.

- Code of Federal Regulations (CFR) Title 47 Part 2
- CFR 47 Part 90 (Private Land Mobile Radio Service) Subpart Z

Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in the following reference standards and as outlined in NTS Silicon Valley test procedures:

ANSI C63.4:2003
ANSI TIA-603-C August 17, 2004

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant Industry Canada performance and procedural standards.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

The test results recorded herein are based on a single type test of the GE MDS LLC model Mercury 3650 Outdoor Subscriber and therefore apply only to the tested sample. The sample was selected and prepared by Dennis McCarthy of GE MDS LLC.

OBJECTIVE

The primary objective of the manufacturer is compliance with the regulations outlined in the previous section.

Prior to marketing in the USA, the device requires certification. Prior to marketing in Canada, Class I transmitters, receivers and transceivers require certification.

Certification is a procedure where the manufacturer submits test data and technical information to a certification body and receives a certificate or grant of equipment authorization upon successful completion of the certification body's review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

STATEMENT OF COMPLIANCE

The tested sample of GE MDS LLC model Mercury 3650 Outdoor Subscriber complied with the requirements of the standards and frequency bands declared in the scope of this test report.

Maintenance of compliance is the responsibility of the manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the device with respect to the standards detailed in this test report.

DEVIATIONS FROM THE STANDARDS

No deviations were made from the published requirements listed in the scope of this report.

TEST RESULTS

FCC Part 90Z – Base and Fixed Stations, 3650 – 3700 MHz

FCC	Description	Measured	Limit	Result
Transmitter Modulation, output power and other characteristics				
§2.1033 (c) (5) § 90.1321(b)	Frequency ranges (Listed for each channel spacing)	3.5MHz 3653-3697 MHz 5.0MHz 3653-3697MHz 7.0MHz 3654-3696MHz 8.75MHz 3655-3695MHz 10.0MHz 3656-3694MHz	3650-3700 MHz Note 1	Complies
§2.1033 (c) (6) §2.1033 (c) (7) §2.1046 § 90.1321	EIRP – Total power (Maximum for each channel spacing)	3.5 MHz: 34.3dBm 5.0 MHz: 35.8dBm 7.0 MHz: 37.5dBm 8.75 MHz: 38.5dBm 10.0 MHz: 39.0dBm	25 Watts	Complies
	EIRP – PSD (Maximum)	3.5 MHz: 30.0dBm/MHz 5.0 MHz: 29.7dBm/MHz 7.0 MHz: 29.8dBm/MHz 8.75 MHz: 29.8dBm/MHz 10.0 MHz: 30.0dBm/MHz	30 dBm/MHz	Complies
§2.1033 (c) (4)	Emission types	G1D	Information only	-
§2.1047 § 90.210	Emission mask	Device complies with spectral mask – refer to test data	Mask B	Complies
§2.1049	Occupied (99%) Bandwidth	3.5 MHz: 3.2 MHz 5.0 MHz: 4.5 MHz 7.0 MHz: 6.6 MHz 8.75 MHz: 8.2 MHz 10.0 MHz: 9.2 MHz	Information only	-
Transmitter spurious emissions				
§2.1051 §2.1057 §90.1323	At the antenna terminals	-19.3 dBm	-13 dBm/MHz	Complies
	Radiated (eirp)	-28.8 dBm		Complies
Receiver spurious emissions				
15.109	Field strength	Not applicable, note 2		
Other details				
§90.1319	Policies of use	Refer to operational description for details of the implementation.	Device must employ a contention-based protocol.	Complies
§2.1055 §90.213(a)	Frequency stability	575 Hz / 0.16 ppm	To be specified in the station authorization	-
§1.1307(b) §2.1093 §90.1335	RF Exposure	Although RF exposure compliance is addressed at the time of licensing an MPE calculation has been provided to demonstrate compliance with limits at distances of 22cm or more from the antennas.		
§2.1033 (c) (8)	Final radio frequency amplifying circuit's dc voltages and currents for normal operation over the power range	6Vdc, 1.2A for each chain	Information only	-
-	Antenna Gain	This application is submitted for antennas of 18 dBi gain.		
Notes				
1) The upper part of the allocated band from 3675 – 3700 MHz requires the device to use an unrestricted contention-based protocol.				
2) Receiver spurious emissions requirements only apply to devices that operate (tune) below 960MHz.				

EXTREME CONDITIONS

Frequency stability is determined over extremes of temperature and voltage. The extremes of voltage were 85 to 115 percent of the nominal value.

The extremes of temperature were -30°C to +50°C as specified in FCC §2.1055(a)(1).

MEASUREMENT UNCERTAINTIES

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2) and were calculated in accordance with NAMAS document NIS 81 and M3003.

Measurement Type	Measurement Unit	Frequency Range	Expanded Uncertainty
RF frequency	Hz	25 to 7,000 MHz	1.7×10^{-7}
RF power, conducted	dBm	25 to 7,000 MHz	± 0.52 dB
Conducted emission of transmitter	dBm	25 to 40,000 MHz	± 0.7 dB
Conducted emission of receiver	dBm	25 to 40,000 MHz	± 0.7 dB
Radiated emission (substitution method)	dBm	25 to 40,000 MHz	± 2.5 dB
Radiated emission (field strength)	dB μ V/m	25 to 1,000 MHz 1 to 40 GHz	± 3.6 dB ± 6.0 dB

EQUIPMENT UNDER TEST (EUT) DETAILS

GENERAL

The GE MDS LLC model Mercury 3650 Outdoor Subscriber is a wireless transceiver which is designed to transmit and receive data. Normally, the EUT would be placed on a pole or tower using the panel antenna during operation. The EUT was, therefore, placed vertical in this position during emissions testing to simulate the end user environment. The electrical rating of the EUT is 10-60vdc @ 3amps max.

The sample was received on January 19, 2011 and tested on January 19, 21, 28 and 31, February 3, 10, 11 and 14, 2011. The EUT consisted of the following component(s):

Company	Model	Description	Serial Number	FCC ID
GE MDS LLC	MERCURY 3650 Outdoor Subscriber	Broadband wireless transceiver	Pre-Production	E5MDS- MERCODU3A

OTHER EUT DETAILS

The EUT antenna is a dual polarized panel integral to the device.

ENCLOSURE

The EUT enclosure is primarily constructed of die cast metal. It measures approximately 27 cm wide by 27cm deep by 8 cm high.

MODIFICATIONS

No modifications were made to the EUT during the time the product was at Elliott.

SUPPORT EQUIPMENT

The following equipment was used as support equipment for testing:

Company	Model	Description	Serial Number	FCC ID
Dell	Inspiron 3800	Laptop	-	DoC
Vantec	UGT-CR-920	Card Reader	-	DoC
Netgear	FS108	Network Switch	-	-

EUT INTERFACE PORTS

The I/O cabling configuration during testing was as follows:

Port	Connected To	Description	Cable(s)	
			Shielded or Unshielded	Length(m)
Serial	Laptop	Multiwire	Shielded	7
Ethernet	POE adapter	Cat 5	Shielded	7
POE Adapter	Network switch	Cat 5	Shielded	1
USB	Card Reader	Multiwire	Shielded	1.5

EUT OPERATION

During emissions testing the EUT set to transmit a continuous OFDM modulated signal at the selected frequency.

Preliminary measurements on all different data rates indicated that QAM16 was representative of the highest power, highest power spectral density and widest signal bandwidths for all modulations, therefore final measurements were made using this modulation.

TESTING

GENERAL INFORMATION

Antenna port measurements were taken at the NTS Silicon Valley test site located at 41039 Boyce Road, Fremont, CA 94538-2435.

Radiated spurious emissions measurements were taken at the NTS Silicon Valley Anechoic Chambers and/or Open Area Test Site(s) listed below. The sites conform to the requirements of ANSI C63.4: 2003 *American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz* and CISPR 16-1-4:2007 - *Specification for radio disturbance and immunity measuring apparatus and methods Part 1-4: Radio disturbance and immunity measuring apparatus Ancillary equipment Radiated disturbances*. They are on file with the FCC and industry Canada.


Site	Registration Numbers		Location
	FCC	Canada	
Chamber 3	769238	IC 2845B-3	41039 Boyce Road Fremont, CA 94538-2435
Chamber 4	211948	IC 2845B-4	
Chamber 5	211948	IC 2845B-5	
Chamber 7	A2LA Accredited	IC 2845B-7	

In the case of Open Area Test Sites, ambient levels are at least 6 dB below the specification limits with the exception of predictable local TV, radio, and mobile communications traffic.

Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent requirements.

RF PORT MEASUREMENT PROCEDURES

Conducted measurements are performed with the EUT's rf input/output connected to the input of a spectrum analyzer, power meter or modulation analyzer. When required an attenuator, filter and/or dc block is placed between the EUT and the spectrum analyzer to avoid overloading the front end of the measurement device. Measurements are corrected for the insertion loss of the attenuators and cables inserted between the rf port of the EUT and the measurement equipment.

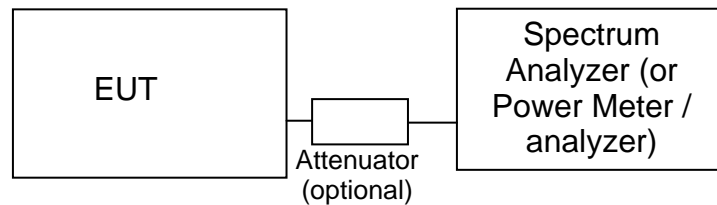

Test Configuration for Antenna Port Measurements

For devices with an integral antenna the output power and spurious emissions are measured as a field strength at a test distance of (typically) 3m and then converted to an eirp using a substitution measurement (refer to RADIATED EMISSIONS MEASUREMENTS). All other measurements are made as detailed below but with the test equipment connected to a measurement antenna directed at the EUT.

OUTPUT POWER

Output power is measured using a power meter and an average sensor head, a spectrum analyzer or a power meter and peak power sensor head as required by the relevant rule part(s). Where necessary measurements are gated to ensure power is only measured over periods that the device is transmitting.

Power measurements made directly on the rf power port are, when appropriate, converted to an EIRP by adding the gain of the highest gain antenna that can be used with the device under test, as specified by the manufacturer.

BANDWIDTH MEASUREMENTS

The 6dB, 20dB and/or 26dB signal bandwidth is measured in using the bandwidths recommended by ANSI C63.4. When required, the 99% bandwidth is measured using the methods detailed in RSS GEN. The measurement bandwidth is set to be at least 1% of the instrument's frequency span.

CONDUCTED SPURIOUS EMISSIONS

Initial scans are made using a peak detector (RBW=VBW) and using scan rates to ensure that the EUT transmits before the sweep moves out of each resolution bandwidth (for transmit mode measurements). Where the limits are expressed as an average power the spectrum analyzer is tuned to that frequency with a narrow span (wide enough to capture the emission and its sidebands) and the resolution and video bandwidths are adjusted as required by the reference measurement standards. For transmitter measurements the appropriate detector (average, peak, normal, sample, quasi-peak) is used when making measurements for licensed devices. For receiver conducted spurious measurements the detector is set to peak.

TRANSMITTER MASK MEASUREMENTS

The transmitter mask measurements are made using resolution bandwidths as specified in the pertinent rule part(s). Where narrower bandwidths are used the measurement is corrected to account for the reduced bandwidth by either using the adjacent channel power function of the spectrum analyzer to sum the power across the required measurement bandwidth. The frequency span of the analyzer is set to ensure the fundamental signal and all significant sidebands are displayed.

The top of the mask may be set by the total output power of the signal, the power of the unmodulated signal or the peak value of the signal in the reference bandwidth being used for the mask measurement.

FREQUENCY STABILITY

The EUT is placed inside a temperature chamber with all support and test equipment located outside of the chamber. The temperature is varied across the specified frequency range in 10 degree increments with frequency measurements made at each temperature step. The EUT is allowed enough time to stabilize at each temperature variation.

The spectrum analyzer is configured to give a 5- or 6-digit display for the marker-frequency function. The spectrum analyzer's built-in frequency counter is used to measure the maximum deviation of the fundamental frequency at each temperature. Where possible the device is set to transmit an unmodulated signal. Where this is not possible the frequency drift is determined by finding a stable point on the signal (e.g. the null at the centre of an OFDM signal) or by calculating a centre frequency based on the upper and lower XdB points (where X is typically 6dB or 10dB) on the signal's skirts.

TRANSIENT FREQUENCY BEHAVIOR:

The TIA/EIA 603 procedure is used to determine compliance with transient frequency timing requirements as the radio is keyed on and off.

The EUTs rf output is connected via a combiner/splitter to the test receiver/spectrum analyzer and to a diode detector. The test receiver or spectrum analyzer video output is connected to an oscilloscope, which is triggered by the output from the diode detector.

Plots showing Ton, T1, and T2 are made when turning on the transmitter and showing T3 when turning off the transmitter.

RADIATED EMISSIONS MEASUREMENTS

Receiver radiated spurious emissions measurements are made in accordance with ANSI C63.4:2003 by measuring the field strength of the emissions from the device at a specific test distance and comparing them to a field strength limit. Where the field strength limit is specified at a longer distance than the measurement distance the measurement is extrapolated to the limit distance.

Transmitter radiated spurious emissions are initially measured as a field strength. The eirp or erp limit as specified in the relevant rule part(s) is converted to a field strength at the test distance and the emissions from the EUT are then compared to that limit. Emissions within 20dB of this limit are the subjected to a substitution measurement.

All radiated emissions measurements are performed in two phases. A preliminary scan of emissions is conducted in either an anechoic chamber or on an OATS during which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed across the complete frequency range of interest and at each operating frequency identified in the reference standard. One or more of these is with the antenna polarized vertically while the one or more of these is with the antenna polarized horizontally. Initial scans are made using a peak detector (RBW=VBW) and using scan rates to ensure that the EUT transmits before the sweep moves out of each resolution bandwidth (for transmit mode).

During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied and cable positions are varied to determine the highest emission relative to the limit. For transmitter spurious emissions, where the limit is expressed as an effective radiated power, the eirp or erp is converted to a field strength limit.

Final measurements are made on an OATS or in a semi-anechoic chamber at the significant frequencies observed during the preliminary scan(s) using the same process of rotating the EUT and raising/lowering the measurement antenna to find the highest level of the emission. The field strength is recorded and, for receiver spurious emissions, compared to the field strength limit. For the final measurement the appropriate detectors (average, peak, normal, sample, quasi-peak) are used. For receiver measurements below 1GHz the detector is a Quasi-Peak detector, above 1GHz a peak detector is used and the peak value (RB=VB=1MHz) and average value (RB=1MHz, VB=10Hz) are recorded.

For transmitter spurious emissions, the radiated power of all emissions within 20dB of the calculated field strength limit are determined using a substitution measurement. The substitution measurement is made by replacing the EUT with an antenna of known gain (typically a dipole antenna or a double-ridged horn antenna), connected to a signal source. The output power of the signal generator is adjusted until the maximum field strength from the substitution antenna is similar to the field strength recorded from the EUT. The erp of the EUT is then calculated.

INSTRUMENTATION

An EMI receiver as specified in CISPR 16-1-1 is used for radiated emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 7000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary.

For measurements above the frequency range of the receivers and for all conducted measurements a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis.

Measurement bandwidths for the test instruments are set in accordance with the requirements of the standards referenced in this document.

Software control is used to correct the measurements for transducer factors (e.g. antenna) and the insertion loss of cables, attenuators and other series elements to obtain the final measurement value. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are exported in a graphic and/or tabular format, as appropriate.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the EUT antenna port or receiving antenna and the test receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

ANTENNAS

A combination of biconical, log periodic or bi-log antennas are used to cover the range from 30 MHz to 1000 MHz. Broadband antennas or tuned dipole antennas are used over the entire 25 to 1000 MHz frequency range as the reference antenna for substitution measurements.

Above 1000 MHz, a dual-ridge guide horn antenna or octave horn antenna are used as reference and measurement antennas.

The antenna calibration factors are included in site factors that are programmed into the test receivers and instrument control software when measuring the radiated field strength.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height.

Table mounted devices are placed on a non-conductive table at a height of 80 centimeters above the floor. Floor mounted equipment is placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor. The EUT is positioned on a motorized turntable to allow it to be rotated during testing to determine the angle with the highest level of emissions.

SAMPLE CALCULATIONS**SAMPLE CALCULATIONS - CONDUCTED SPURIOUS EMISSIONS**

Measurements are compared directly to the conducted emissions specification limit (decibel form). The calculation is as follows:

$$R_r - S = M$$

where:

$$\begin{aligned} R_r &= \text{Measured value in dBm} \\ S &= \text{Specification Limit in dBm} \\ M &= \text{Margin to Specification in +/- dB} \end{aligned}$$

SAMPLE CALCULATIONS - RADIATED FIELD STRENGTH

Measurements of radiated field strength are compared directly to the specification limit (decibel form). The receiver and/or control software corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

A distance factor is used when measurements are made at a test distance that is different to the specified limit distance by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

$$\begin{aligned} F_d &= \text{Distance Factor in dB} \\ D_m &= \text{Measurement Distance in meters} \\ D_s &= \text{Specification Distance in meters} \end{aligned}$$

For electric field measurements below 30MHz the extrapolation factor is either determined by making measurements at multiple distances or a theoretical value is calculated using the formula:

$$F_d = 40 * \text{LOG}_{10} (D_m/D_s)$$

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

$$R_r = \text{Receiver Reading in dBuV/m}$$

- F_d = Distance Factor in dB
 R_c = Corrected Reading in dBuV/m
 L_s = Specification Limit in dBuV/m
 M = Margin in dB Relative to Spec

SAMPLE CALCULATIONS –RADIATED POWER

The erp/eirp limits for transmitter spurious measurements are converted to a field strength in free space using the following formula:

$$E = \frac{\sqrt{30 P G}}{d}$$

where:

- E = Field Strength in V/m
 P = Power in Watts
 G = Gain of isotropic antenna (numeric gain) = 1
 D = measurement distance in meters

The field strength limit is then converted to decibel form (dBuV/m) and the margin of a given emission peak relative to the limit is calculated (refer to *SAMPLE CALCULATIONS –RADIATED FIELD STRENGTH*).

When substitution measurements are required (all signals with less than 20dB of margin relative to the calculated field strength limit) the eirp of the spurious emission is calculated using:

$$P_{EUT} = P_s - (E_s - E_{EUT})$$

and

$$P_s = G + P_{in}$$

where:

- P_s = effective isotropic radiated power of the substitution antenna (dBm)
 P_{in} = power input to the substitution antenna (dBm)
 G = gain of the substitution antenna (dBi)
 E_s = field strength the substitution antenna (dBm) at eirp P_s
 E_{EUT} = field strength measured from the EUT

Where necessary the effective isotropic radiated power is converted to effective radiated power by subtracting the gain of a dipole (2.2dBi) from the eirp value.

RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from receivers as detailed in FCC Part 15.109, RSS 210 Table 2, RSS GEN Table 1 and RSS 310 Table 3. Note that receivers operating outside of the frequency range 30 MHz – 960 MHz are exempt from the requirements of 15.109.

Frequency Range (MHz)	Limit (uV/m @ 3m)	Limit (dBuV/m @ 3m)
30 to 88	100	40
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

Appendix A Test Equipment Calibration Data

T81665

Frequency Stability, 20-Oct-10

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Fluke Mfg. Inc.	True RMS Multimeter	111	1557	3/9/2011
Agilent	PSA, Spectrum Analyzer, (installed options, 111, 115, 123, 1DS, B7J, HYX,	E4446A	2139	1/6/2011
Thermotron	Temp Chamber (w/ F4 Watlow Controller)	S1.2	2170	7/1/2011

T81815

Radio Antenna Port (Power and Spurious Emissions), 18-Jan-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Agilent	PSA, Spectrum Analyzer, (installed options, 111, 115, 123, 1DS, B7J, HYX,	E4446A	2139	2/6/2011

Radiated Emissions, 30 - 1,000 MHz, 22-Jan-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	EMC Spectrum Analyzer, 9 KHz - 22 GHz	8593EM	1319	11/22/2011
Rohde & Schwarz	Test Receiver, 9 kHz-2750 MHz	ESCS 30	1337	11/24/2011
Sunol Sciences	Biconilog, 30-3000 MHz	JB3	1548	6/24/2012
Com-Power Corp.	Preamplifier, 30-1000 MHz	PAM-103	2234	5/19/2011

Radiated Emissions, 1000 - 37,000 MHz, 22-Jan-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
EMCO	Antenna, Horn, 1-18 GHz (SA40-Blu)	3115	1386	9/21/2012
Hewlett Packard	SpecAn 9 kHz - 40 GHz, (SA40) Purple	8564E (84125C)	1771	8/26/2011
Hewlett Packard	Head (Inc W1-W4, 1946, 1947) Purple	84125C	1772	5/6/2011
Hewlett Packard	Microwave Preamplifier, 1- 26.5GHz	8449B	1780	11/23/2011
A.H. Systems	Blue System Horn, 18-40GHz	SAS-574, p/n: 2581	2159	3/18/2011

Radiated Emissions, 30 - 18,000 MHz, 29-Jan-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
EMCO	Antenna, Horn, 1-18 GHz	3115	786	12/11/2011
Hewlett Packard	EMC Spectrum Analyzer, 9 KHz - 22 GHz	8593EM	1319	11/22/2011
Rohde & Schwarz	Test Receiver, 0.009-2750 MHz	ESN	1332	1/17/2012
Sunol Sciences	Biconilog, 30-3000 MHz	JB3	1548	6/24/2012
Hewlett Packard	SpecAn 9 kHz - 40 GHz, (SA40) Purple	8564E (84125C)	1771	8/26/2011
Hewlett Packard	Microwave Preamplifier, 1- 26.5GHz	8449B	2199	2/11/2011
Com-Power Corp.	Preamplifier, 30-1000 MHz	PAM-103	2234	5/19/2011

Radiated Emissions, 30 - 37,000 MHz, 03-Feb-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
EMCO	Antenna, Horn, 1-18 GHz	3115	786	12/11/2011
Rohde & Schwarz	Power Sensor, 1uW-100mW,	NRV-Z51	1069	7/19/2011

EMCO	DC-18 GHz, 50ohms Antenna, Horn, 1-18 GHz (SA40-Red)	3115	1142	8/2/2012
Hewlett Packard	SpecAn 9 kHz - 40 GHz, FT (SA40) Blue	8564E (84125C)	1393	4/14/2011
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1630	3/31/2011
Sunol Sciences	Biconilog, 30-3000 MHz	JB3	1657	5/28/2012
Rohde & Schwarz	Power Meter, Dual Channel	NRVD	1787	12/23/2011
Hewlett Packard	Preamplifier, 100 kHz - 1.3 GHz	8447D OPT 010	1826	5/27/2011
Agilent	PSG, Performance Signal Generator, (installed options, HEH, HEC, 602, 420)	E8267C	2200	5/5/11

Appendix B Test Data

T81665 Pages 22 – 24

T81815 Pages 25 - 82



EMC Test Data

Client:	GE MDS LLC	Job Number:	J81612
Model:	MERCURY ODU	T-Log Number:	T81665
		Account Manager:	Susan Pelzl
Contact:	Dennis McCarthy		-
Emissions Standard(s):	FCC Part 90, RSS-119	Class:	-
Immunity Standard(s):	-	Environment:	Radio

EMC Test Data

For The

GE MDS LLC

Model

MERCURY ODU

Date of Last Test: 2/3/2011



Radio Test Data

Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: T81665
	Account Manager: Susan Pelzl
Contact: Dennis McCarthy	
Standard: FCC Part 90, RSS-119	Class: -

RSS 197 and FCC Part 90 Frequency Stability

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 2/3/2011	Config. Used: 1
Test Engineer: Rafael Varelas	Config Change: none
Test Location: FT EMC #4	EUT Voltage: 13.8 VDC

General Test Configuration

The EUT's RF port was connected to the measurement instrument's RF port, via an attenuator or dc-block if necessary. The EUT was placed inside an environmental chamber.

Ambient Conditions:	Temperature:	21.3 °C
	Rel. Humidity:	38 %

Summary of Results

Run #	Test Performed	Limit	Result	Value / Margin
1-2	Frequency and Voltage Stability	Part 90.213	Pass	575 Hz / 0.16 ppm

Modifications Made During Testing:

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.



Radio Test Data

Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: T81665
	Account Manager: Susan Pelzl
Contact: Dennis McCarthy	
Standard: FCC Part 90, RSS-119	Class: -

Run #1: Temperature Vs. Frequency (Fixed stations in the 3650-3675 MHz band)

- Note 1: For all tests: Unmodulated signal using mode QAM16 at frequency 3662.5 MHz with power setting of 27 dBm was used. Analyzer settings were as follow: RBW=VBW= 1kHz and Span=5kHz.
- Note 2: Frequency stability is to be specified in the station authorization.

Temperature (Celsius)	Reference Frequency (MHz)	Measured frequency (MHz)	Drift (Hz)	Limit (Hz)
-30	3662.492600	3662.498348	575	Note 2
-20	3662.492600	3662.498048	545	Note 2
-10	3662.492600	3662.497181	458	Note 2
0	3662.492600	3662.497448	485	Note 2
10	3662.492600	3662.497631	503	Note 2
20	3662.492600	3662.497948	535	Note 2
30	3662.492600	3662.497406	481	Note 2
40	3662.492600	3662.497164	456	Note 2
50	3662.492600	3662.496756	416	Note 2

Run #2: Voltage Vs. Frequency

Nominal Voltage is 13.8Vdc.

Voltage (Dc)	Reference Frequency (MHz)	Frequency Drift (MHz)	Drift (Hz)	Limit (Hz)
85%	3662.492218	3662.497906	569	Note 2
115%	3662.492218	3662.497898	568	Note 2

Worst case drift: 574.8 Hz
0.16 ppm



EMC Test Data

Client:	GE MDS	Job Number:	J81612
Model:	Mercury ODU	T-Log Number:	T81815
		Account Manager:	Susan Pelzl
Contact:	Dennis McCarthy		-
Emissions Standard(s):	FCC Part 90, RSS-119	Class:	-
Immunity Standard(s):	-	Environment:	-

EMC Test Data

For The

GE MDS

Model

Mercury ODU

Date of Last Test: 4/5/2011



EMC Test Data

Client:	GE MDS	Job Number:	J81612
Model:	Mercury ODU	T-Log Number:	T81815
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC Part 90, RSS-119	Class:	-

RSS 197 Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 2/11/2011& 2/14/11	Config. Used: 1
Test Engineer: Rafael Varelas/John Caizzi	Config Change: None
Test Location: Chamber #7	EUT Voltage: 13.8Vdc

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. All remote support equipment was located outside the chamber.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature:	20-25 °C
Rel. Humidity:	30-40 %

Summary of Results

Run #	Mode	Channel	BW	Test Performed	Limit	Result / Margin
1-6	16QAM	High Channel	All	Radiated Emissions, 30 MHz-37 GHz	FCC 90.210 Mask B	-23.7dBm @ 11090.635MHz (-10.7dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.





EMC Test Data

Client:	GE MDS	Job Number:	J81612
Model:	Mercury ODU	T-Log Number:	T81815
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC Part 90, RSS-119	Class:	-

Run #1: Radiated Spurious Emissions, 30 - 37000 MHz.


Run #1a: High Channel @ 3697.0 MHz. Operating Mode: 5.0 MHz BW

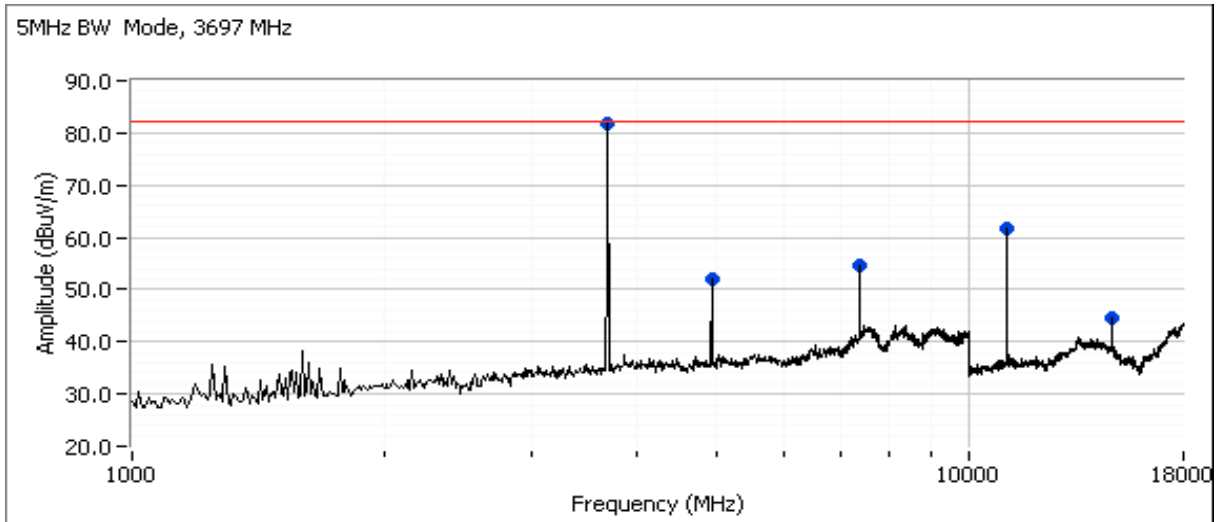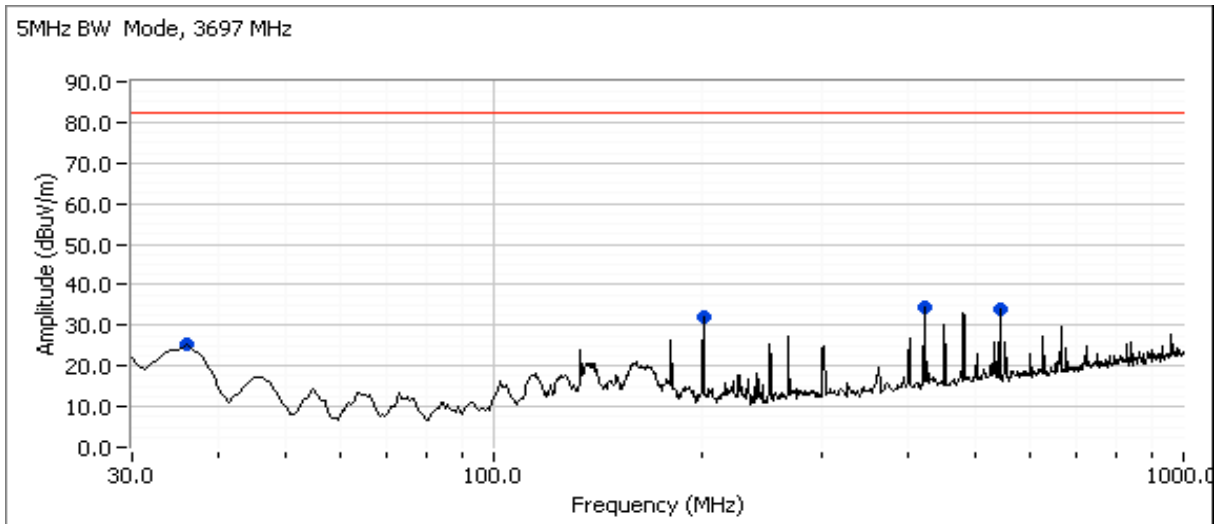



EMC Test Data

Client:	GE MDS	Job Number:	J81612
Model:	Mercury ODU	T-Log Number:	T81815
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC Part 90, RSS-119	Class:	-


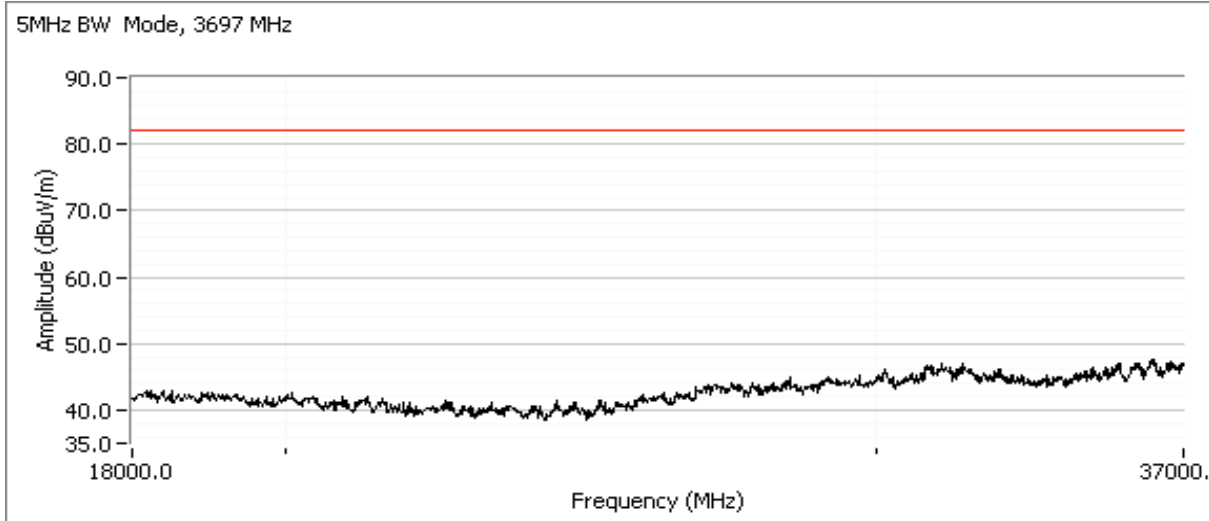


Run #1a: High Channel @ 3697.0 MHz

Frequency MHz	Level dB μ V/m	Pol v/h	FCC 90.210		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
								5MHz BW
36.075	25.6	V	82.2	-56.6	Peak	316	3.5	5MHz BW
201.450	31.9	H	82.2	-50.3	Peak	136	1.5	5MHz BW
420.750	34.5	H	82.2	-47.7	Peak	341	2.5	5MHz BW
541.500	34.0	H	82.2	-48.2	Peak	164	1.5	5MHz BW
14829.000	44.6	V	82.2	-37.6	Peak	157	1.0	5MHz BW
11090.630	76.5	V	82.2	-5.7	PK	208	1.0	RB 1 MHz;VB 3 MHz;Pk 5MHz BW
3697.000	81.9	V	-	-	Peak	190	1.6	Fundamental 5MHz BW
4929.280	55.0	V	82.2	-27.2	PK	181	1.1	RB 1 MHz;VB 3 MHz;Pk 5MHz BW
7394.530	63.1	H	82.2	-19.1	PK	175	1.0	RB 1 MHz;VB 3 MHz;Pk 5MHz BW

Client: GE MDS	Job Number: J81612
Model: Mercury ODU	T-Log Number: T81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -


Run #1b: High Channel @ 3696 MHz. Operating Mode: 7.0 MHz BW

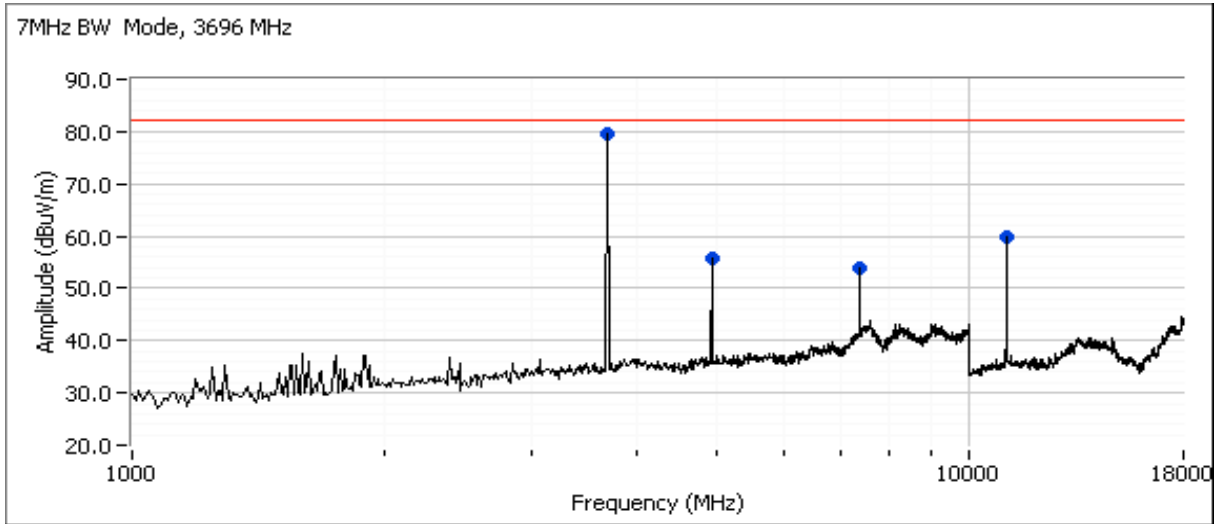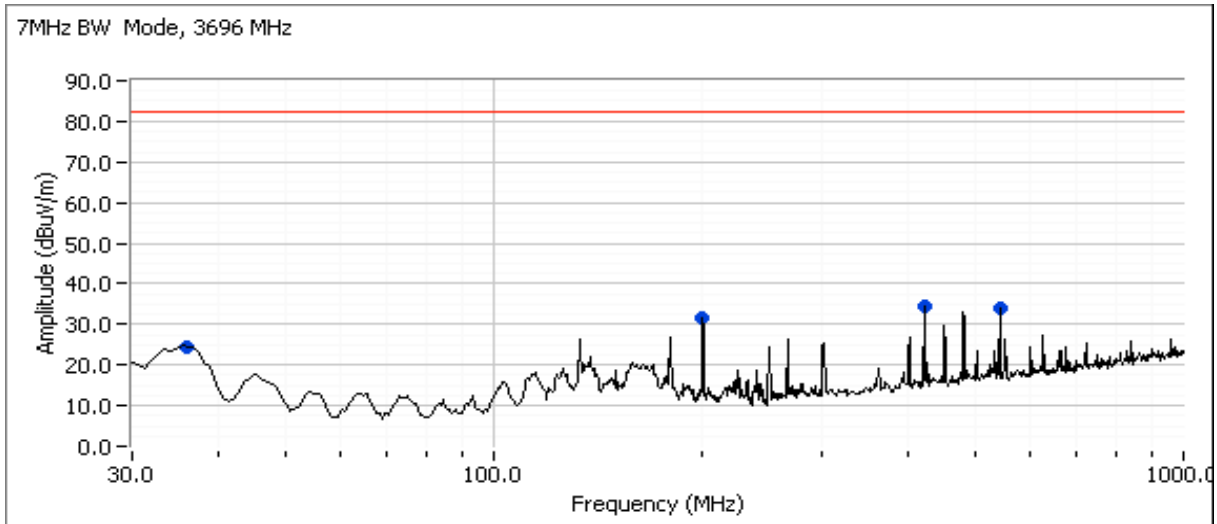



EMC Test Data

Client:	GE MDS	Job Number:	J81612
Model:	Mercury ODU	T-Log Number:	T81815
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC Part 90, RSS-119	Class:	-

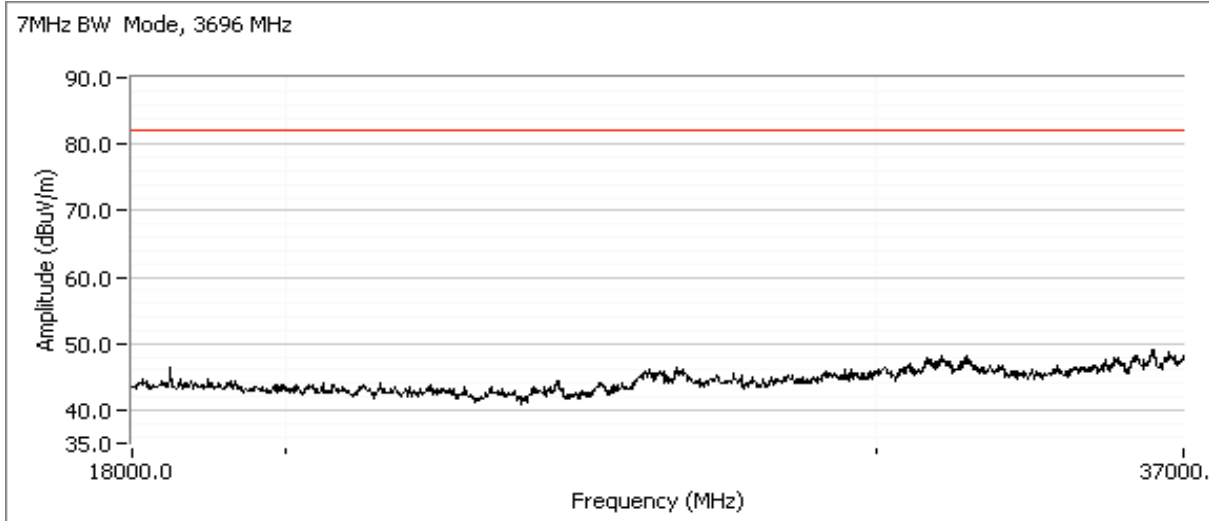


Run #1b: High Channel @ 3696 MHz

Frequency MHz	Level dB μ V/m	Pol v/h	FCC 90.210		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
36.075	24.4	H	82.2	-57.8	Peak	301	3.0	7MHz BW
200.775	31.6	H	82.2	-50.6	Peak	141	1.5	7MHz BW
420.750	34.3	H	82.2	-47.9	Peak	100	2.5	7MHz BW
541.500	33.8	H	82.2	-48.4	Peak	164	1.5	7MHz BW
7391.530	63.1	V	82.2	-19.1	PK	156	1.4	RB 1 MHz;VB 3 MHz;Pk 7MHz BW
4928.040	56.2	V	82.2	-26.0	PK	176	1.7	RB 1 MHz;VB 3 MHz;Pk 7MHz BW
3695.960	79.4	V	-	-	Peak	132	1.6	Fundamental 7MHz BW
11085.960	76.3	V	82.2	-5.9	PK	226	1.2	RB 1 MHz;VB 3 MHz;Pk 7MHz BW

Client: GE MDS	Job Number: J81612
Model: Mercury ODU	T-Log Number: T81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -

Run #1c: High Channel @ 3695 MHz Operating Mode: 8.75 MHz BW

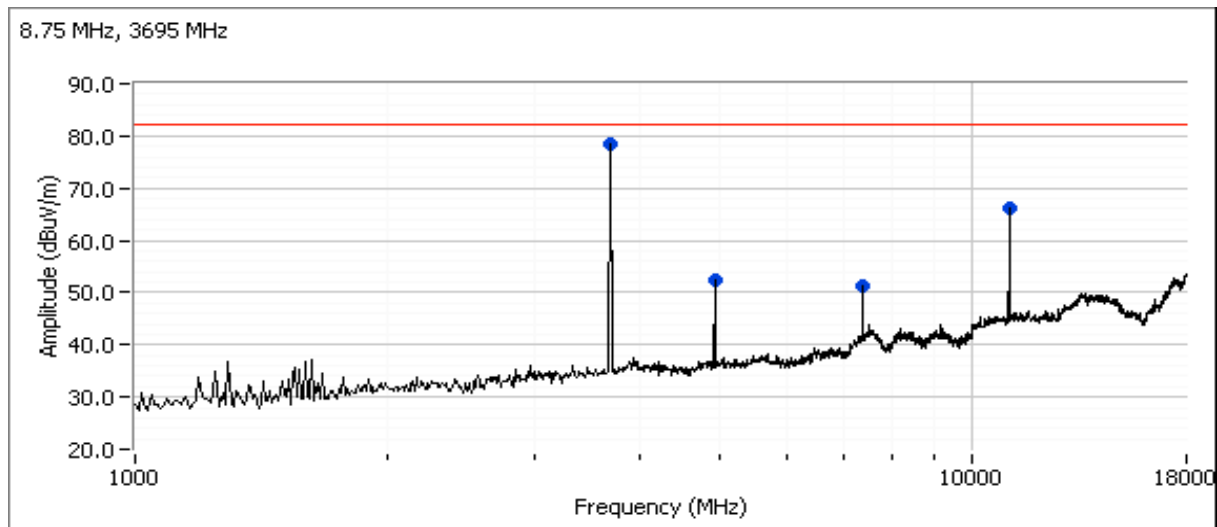


Run #1c: High Channel @ 3695 MHz

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
3695.000	78.4	V	82.2	-3.8	Peak	128	1.3	Fundamental
7391.630	61.0	V	82.2	-21.2	PK	156	1.46	RB 1 MHz;VB 3 MHz
4926.630	55.0	V	82.2	-27.2	PK	183	1.21	RB 1 MHz;VB 3 MHz
11078.270	72.7	V	82.2	-9.5	PK	184	1.20	RB 1 MHz;VB 3 MHz

Note 1 Since emissions in the 30-1000 MHz & 18-37 GHz ranges were the same for 5 MHz BW & 7 MHz BW modes, those scans were not repeated for 8.75 MHz BW.

Client: GE MDS	Job Number: J81612
Model: Mercury ODU	T-Log Number: T81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -

Run #1d: High Channel @ 3694 MHz Operating Mode: 10.0 MHz BW

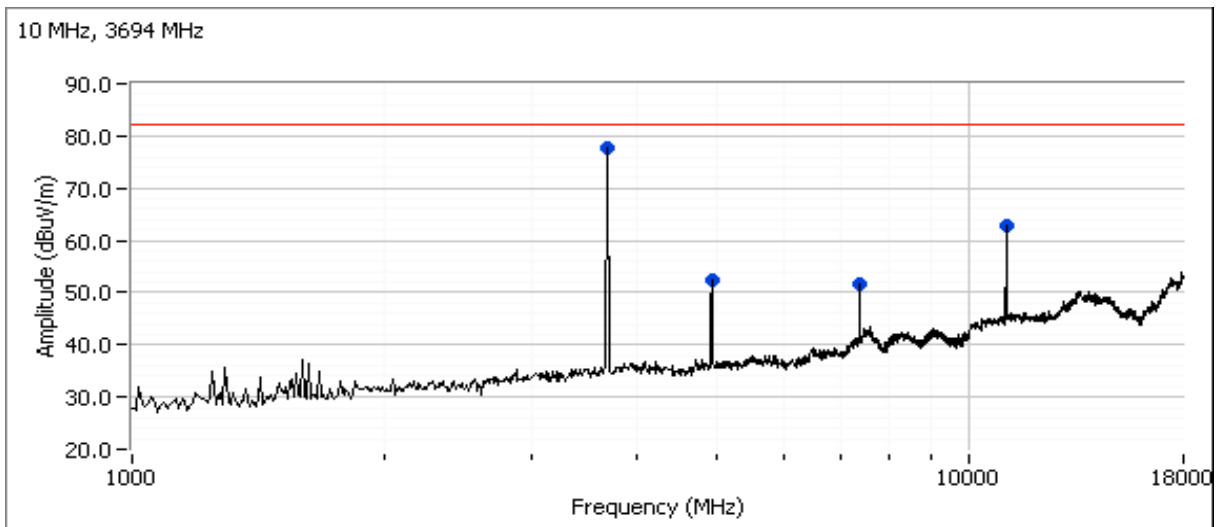


Run #1d: High Channel @ 3694 MHz

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
3695.000	77.7	V	82.2	-4.5	Peak	198	1.6	
7387.970	59.9	H	82.2	-22.3	PK	200	1.00	RB 1 MHz;VB 3 MHz
4925.360	54.7	V	82.2	-27.5	PK	184	1.20	RB 1 MHz;VB 3 MHz
11082.670	71.9	V	82.2	-10.3	PK	210	1.01	RB 1 MHz;VB 3 MHz

Note 1 Since emissions in the 30-1000 MHz & 18-37 GHz ranges were the same for 5 MHz BW & 7 MHz BW modes, those scans were not repeated for 10 MHz BW.

Client:	GE MDS	Job Number:	J81612
Model:	Mercury ODU	T-Log Number:	T81815
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC Part 90, RSS-119	Class:	-

Run #1e: High Channel @ 3697 MHz Operating Mode: 3.5 MHz BW

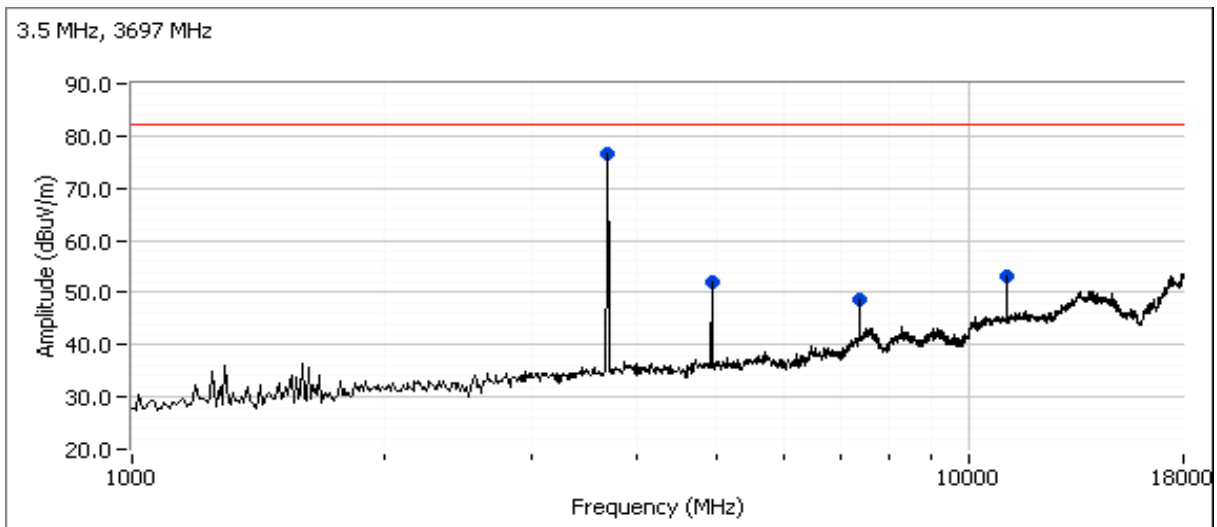

Run #1e: High Channel @ 3697 MHz

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
3695.000	76.5	V	82.2	-5.7	Peak	174	1.0	
11091.530	61.0	H	82.2	-21.2	PK	152	1.1	RB 1 MHz;VB 3 MHz;Pk
7394.250	64.8	V	82.2	-17.4	PK	156	1.3	RB 1 MHz;VB 3 MHz;Pk
4929.280	54.6	V	82.2	-27.6	PK	185	1.2	RB 1 MHz;VB 3 MHz;Pk

Note 1 | Since emissions in the 30-1000 MHz & 18-37 GHz ranges were the same for 5 MHz BW & 7 MHz BW modes, those scans were not repeated for 3.5 MHz BW.



EMC Test Data

Client:	GE MDS	Job Number:	J81612
Model:	Mercury ODU	T-Log Number:	T81815
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC Part 90, RSS-119	Class:	-

Run #6: Radiated Spurious Emissions, Transmit Mode: Substitution Measurements

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
7391.530	63.1	V	82.2	-19.1	PK	156	1.4	RB 1 MHz;VB 3 MHz 7MHz BW
7394.250	64.8	V	82.2	-17.4	PK	156	1.3	RB 1 MHz;VB 3 MHz 3.5 MHz
7394.530	63.1	H	82.2	-19.1	PK	175	1.0	RB 1 MHz;VB 3 MHz 5MHz BW
11078.270	72.7	V	82.2	-9.5	PK	184	1.20	RB 1 MHz;VB 3 MHz 8.75 MHz
11082.670	71.9	V	82.2	-10.3	PK	210	1.01	RB 1 MHz;VB 3 MHz 10 MHz
11085.960	76.3	V	82.2	-5.9	PK	226	1.2	RB 1 MHz;VB 3 MHz 7MHz BW
11090.630	76.5	V	82.2	-5.7	PK	208	1.0	RB 1 MHz;VB 3 MHz 5MHz BW

Vertical

Frequency MHz	Substitution measurements			Site Factor ⁴	EUT measurements			eirp Limit dBm	erp Limit dBm	Margin dB
	Pin ¹	Gain ²	FS ³		FS ⁵	eirp (dBm)	erp (dBm)			
11078.270	-2.7	12.2	107.5	98.0	72.7	-25.3	-27.5		-13.0	-14.5
11082.670	-2.7	12.2	107.5	98.0	71.9	-26.1	-28.3		-13.0	-15.3
11085.960	-2.7	12.2	107.5	98.0	76.3	-21.7	-23.9		-13.0	-10.9
11090.630	-2.7	12.2	107.5	98.0	76.5	-21.5	-23.7		-13.0	-10.7
Horizontal										
7391.530	-3.1	10.0	104.3	97.4	63.1	-34.3	-36.5		-13.0	-23.5
7394.250	-3.1	10.0	104.3	97.4	64.8	-32.6	-34.8		-13.0	-21.8
7394.530	-3.1	10.0	104.3	97.4	63.1	-34.3	-36.5		-13.0	-23.5

- Note 1:* Pin is the input power (dBm) to the substitution antenna
- Note 2:* Gain is the gain (dBi) for the substitution antenna. A dipole has a gain of 2.2dBi.
- Note 3:* FS is the field strength (dBuV/m) measured from the substitution antenna.
- Note 4:* Site Factor - this is the site factor to convert from a field strength in dBuV/m to an eirp in dBm.
- Note 5:* EUT field strength as measured during initial run.



EMC Test Data

Client:	GE MDS	Job Number:	J81612
Model:	Mercury ODU	T-Log Number:	T81815
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC Part 90, RSS-119	Class:	-

RSS 197 and FCC Part 90 Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 1/21/2011, 1/28/11& 2/3/11
 Test Engineer: M. Birgani/R. Varelas/J.Caizzi
 Test Location: Chamber #7

Config. Used: 1
 Config Change: None
 EUT Voltage: PoE

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. All remote support equipment was located outside the chamber.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions: Temperature: 20-25 °C
 Rel. Humidity: 30-40 %

Summary of Results

Run #	Mode	Channel	BW	Test Performed	Limit	Result / Margin
1-6	16QAM	All	All	Radiated Emissions, 30 MHz-37 GHz	FCC 90.210 Mask B	-28.8 dBm ERP @ 10957.520 MHz (-15.8 dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard



No deviations were made from the requirements of the standard.

Client:	GE MDS	Job Number:	J81612
Model:	Mercury ODU	T-Log Number:	T81815
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC Part 90, RSS-119	Class:	-

Run #1: Radiated Spurious Emissions, 30 - 37000 MHz. Operating Mode: 5.0 MHz BW

Run #1a: Low Channel @ 3653.0 MHz


5MHz Bandwidth - Low channel

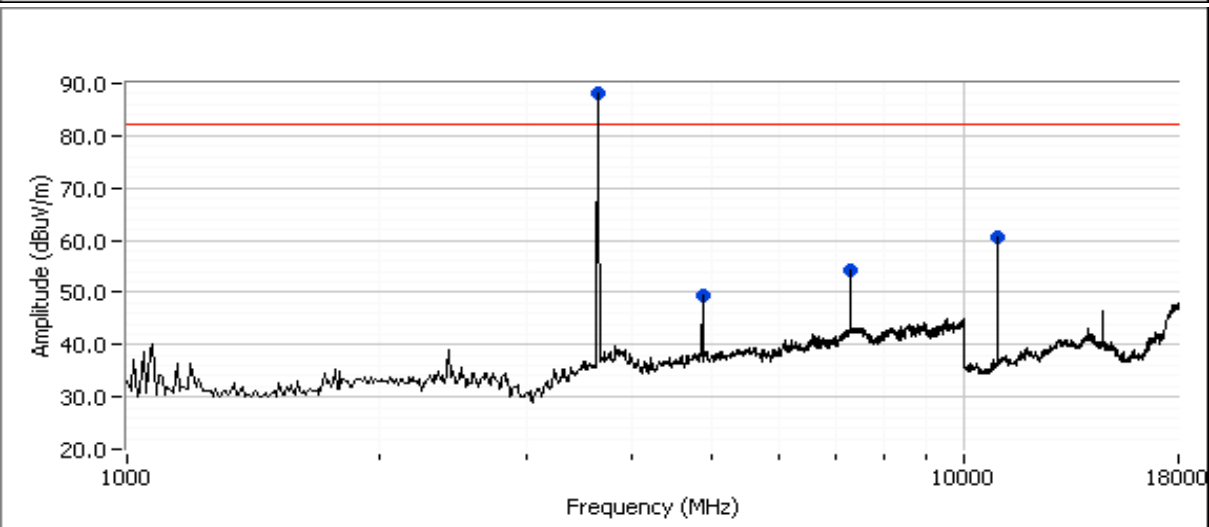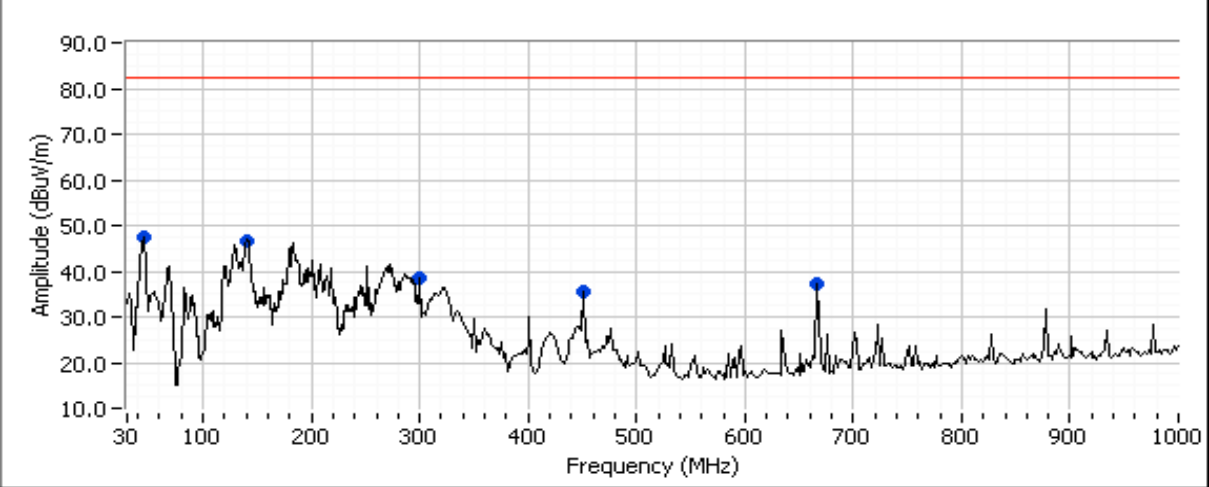



EMC Test Data

Client:	GE MDS	Job Number:	J81612
Model:	Mercury ODU	T-Log Number:	T81815
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC Part 90, RSS-119	Class:	-

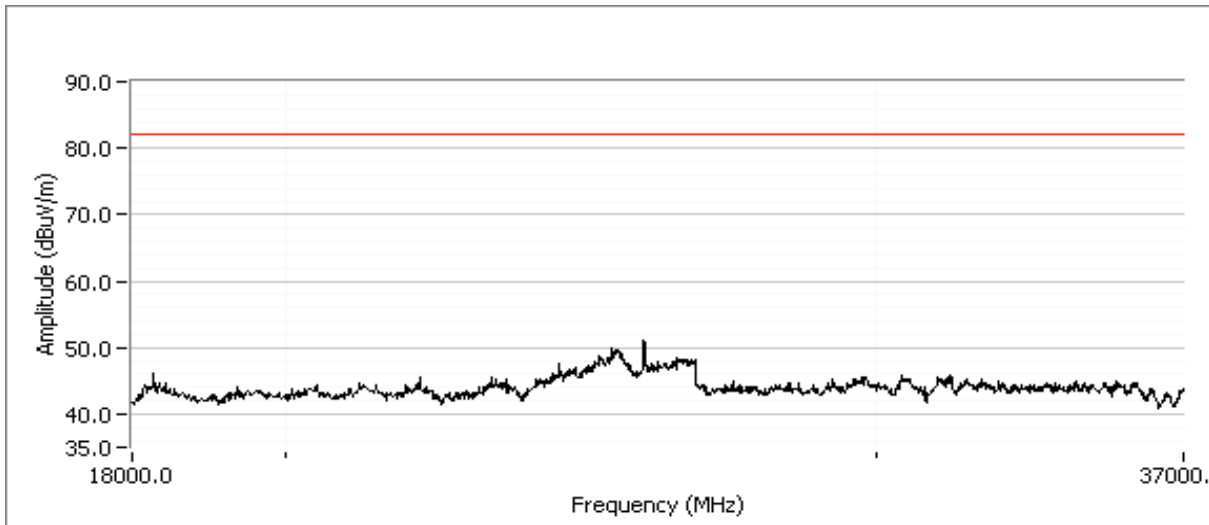



Run #1a: Low Channel @ 3653.0 MHz, 5MHz BW

Frequency MHz	Level dB μ V/m	Pol v/h	FCC 90.210		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
44.850	47.3	V	82.2	-34.9	Peak	11	1.0	5MHz BW
140.700	46.8	V	82.2	-35.4	Peak	146	1.0	5MHz BW
300.000	38.4	V	82.2	-43.8	Peak	164	1.5	5MHz BW
665.750	37.2	H	82.2	-45.0	Peak	210	1.5	5MHz BW
450.500	35.6	V	82.2	-46.6	Peak	199	1.0	5MHz BW
4868.330	49.4	V	82.2	-32.8	Peak	168	1.3	5MHz BW
3653.000	96.9	V	N/A	-	PK	151	1.0	RB 1 MHz;VB 3 MHz;Pk 5MHz BW
3653.000	85.1	V	N/A	-	PK	151	1.0	RB 100 kHz;VB 100 kHz 5MHz BW
7304.000	58.7	V	82.2	-23.5	PK	202	1.9	RB 1 MHz;VB 3 MHz;Pk 5MHz BW
10957.520	70.1	V	82.2	-12.1	PK	177	1.0	RB 1 MHz;VB 3 MHz;Pk 5MHz BW

Client: GE MDS	Job Number: J81612
Model: Mercury ODU	T-Log Number: T81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -

Run #1b: Center Channel @ 3662.5 MHz


5MHz Bandwidth - Center channel

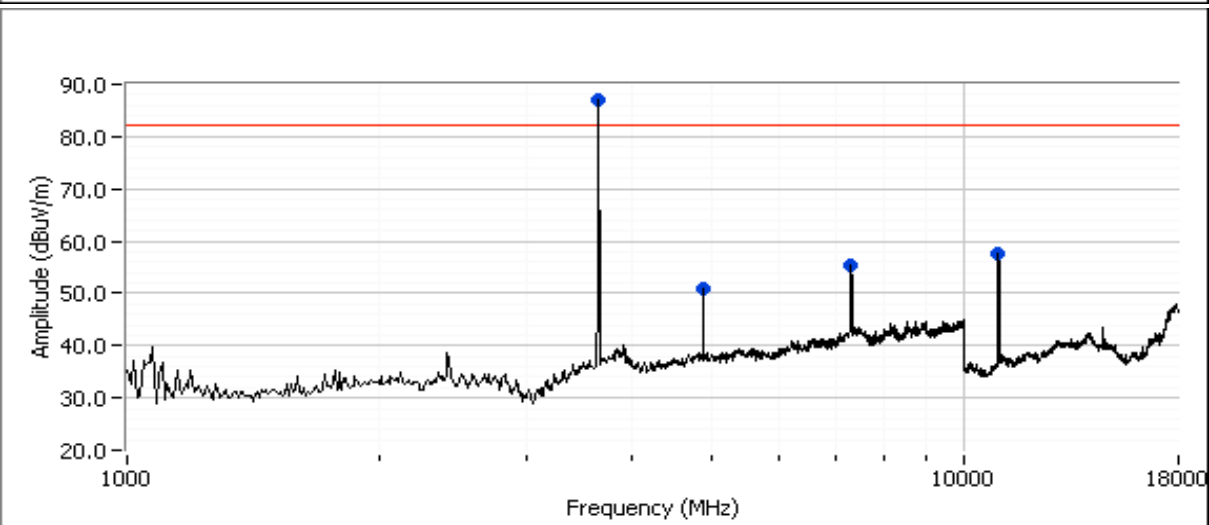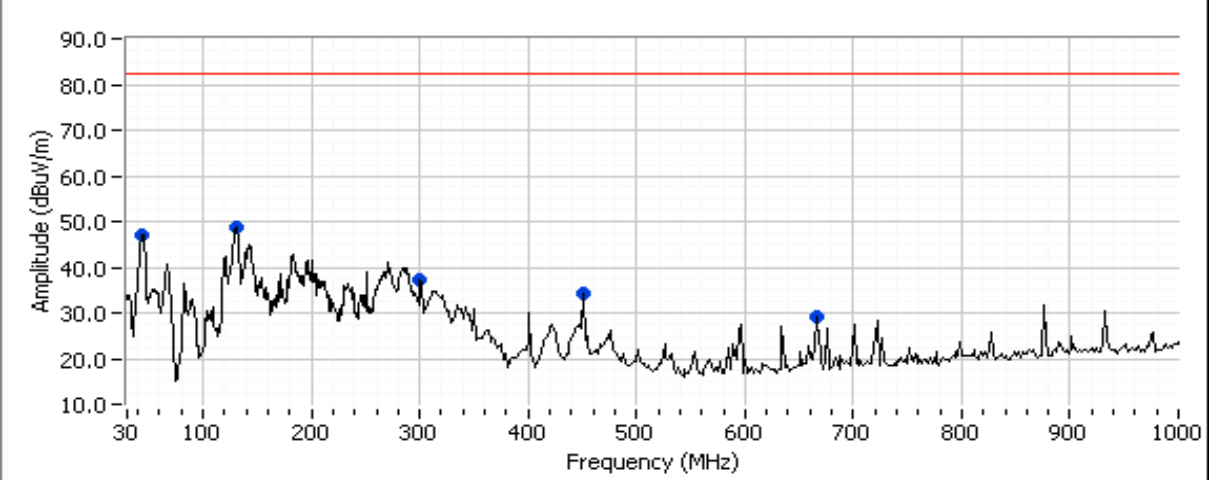



EMC Test Data

Client:	GE MDS	Job Number:	J81612
Model:	Mercury ODU	T-Log Number:	T81815
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC Part 90, RSS-119	Class:	-


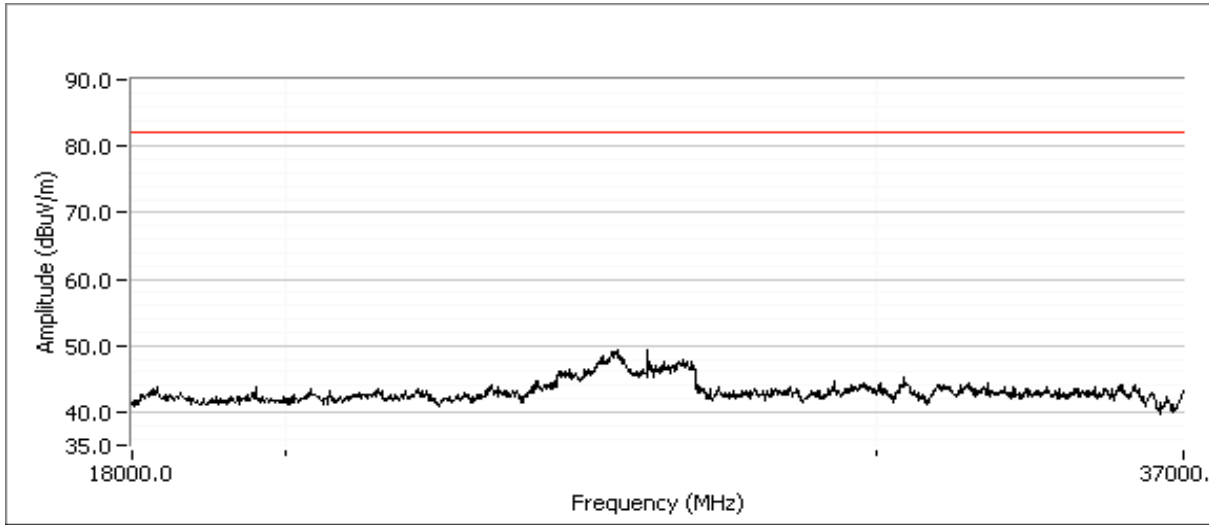


Run #1b: Center Channel @ 3662.5 MHz

Frequency MHz	Level dB μ V/m	Pol v/h	FCC 90.210		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
44.175	47.2	V	82.2	-35.0	Peak	123	1.0	
130.575	48.6	H	82.2	-33.6	Peak	206	2.5	
300.000	37.1	V	82.2	-45.1	Peak	151	1.5	
450.500	34.3	V	82.2	-47.9	Peak	224	1.0	
665.750	29.2	H	82.2	-53.0	Peak	108	1.5	
10973.330	57.6	V	82.2	-24.6	Peak	232	1.3	
4877.500	50.9	V	82.2	-31.3	Peak	168	1.3	
7322.500	55.3	V	82.2	-26.9	Peak	144	1.0	
3662.500	97.8	V	N/A	-	PK	210	1.0	RB 1 MHz;VB 3 MHz;Pk
3662.500	86.1	V	N/A	-	PK	210	1.0	RB 100 kHz;VB 100 kHz;Pk

Client: GE MDS	Job Number: J81612
Model: Mercury ODU	T-Log Number: T81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -


Run #1c: High Channel @ 3672.0 MHz

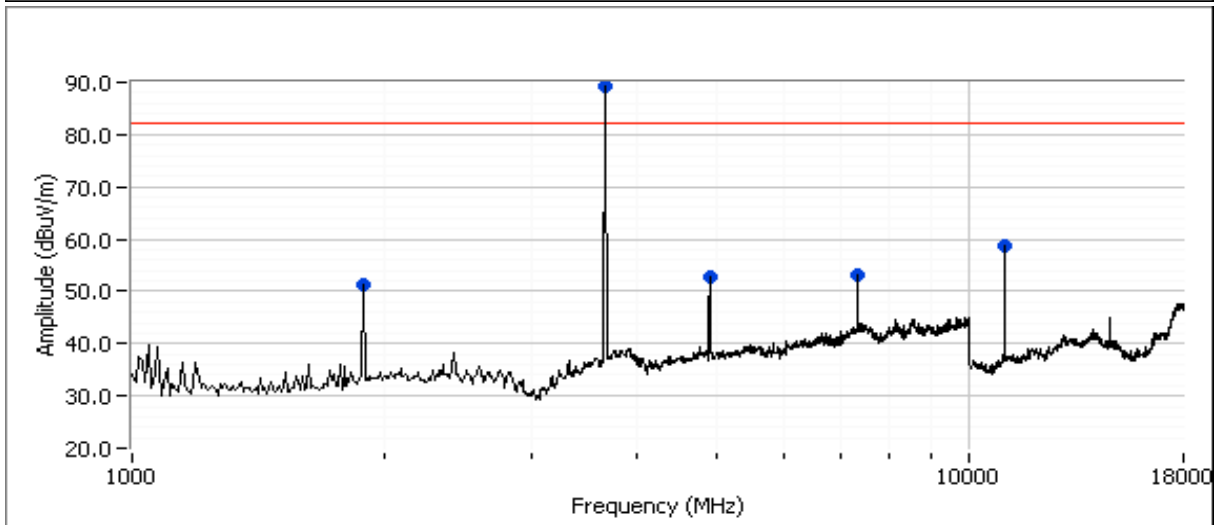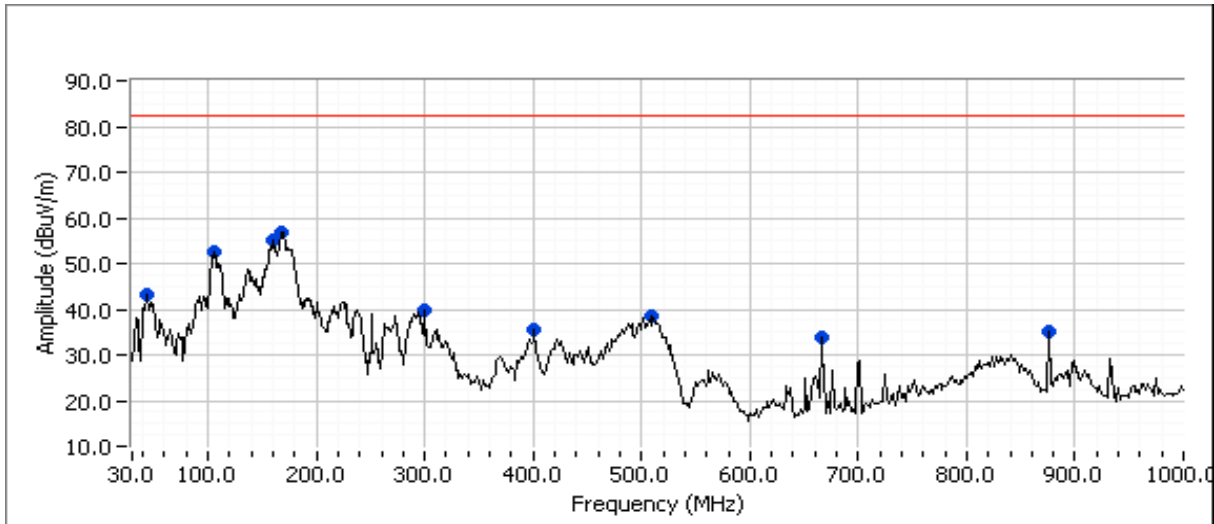



EMC Test Data

Client:	GE MDS	Job Number:	J81612
Model:	Mercury ODU	T-Log Number:	T81815
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC Part 90, RSS-119	Class:	-

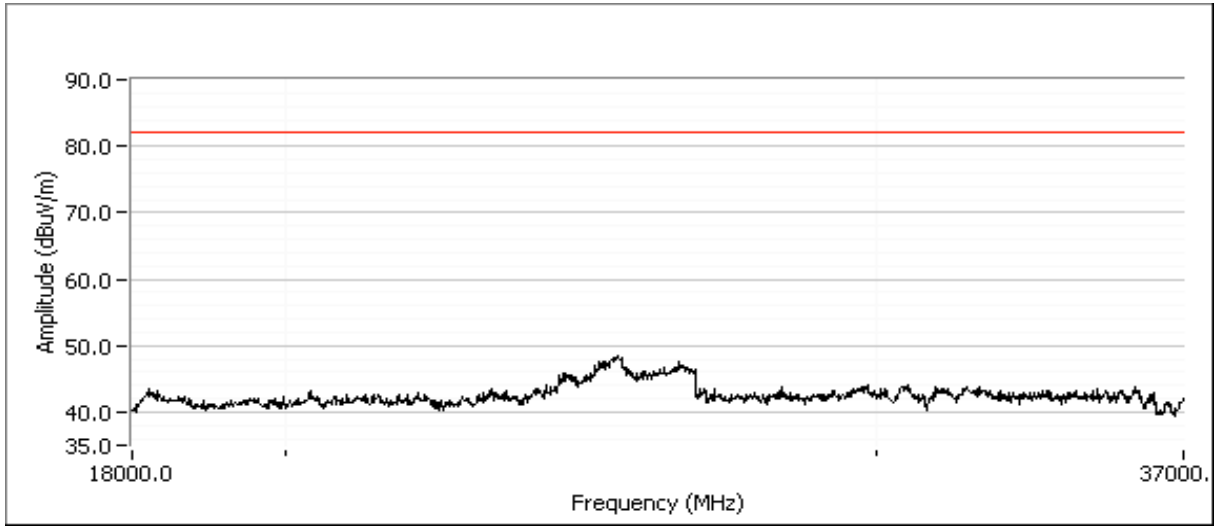



Run #1c: High Channel @ 3672.0 MHz

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
43.500	43.4	V	82.2	-38.8	Peak	10	1.0	
106.275	52.5	V	82.2	-29.7	Peak	19	1.0	
160.950	55.2	H	82.2	-27.0	Peak	23	2.5	
168.375	56.9	H	82.2	-25.3	Peak	1	1.5	
300.000	39.8	H	82.2	-42.4	Peak	0	1.0	
401.500	35.5	H	82.2	-46.7	Peak	138	2.5	
510.000	38.4	H	82.2	-43.8	Peak	1	1.5	
665.750	33.7	H	82.2	-48.5	Peak	59	3.0	
875.750	35.0	H	82.2	-47.2	Peak	49	1.5	
1889.170	51.2	V	82.2	-31.0	Peak	202	1.6	
4895.830	52.8	V	82.2	-29.4	Peak	166	1.3	
11016.000	58.5	V	82.2	-23.7	Peak	232	1.3	
7345.830	53.2	V	82.2	-29.0	Peak	203	1.6	
3672.000	99.5	V	N/A	-	PK	198	1.0	RB 1 MHz;VB 3 MHz;Pk
3672.000	85.3	V	N/A	-	PK	198	1.0	RB 100 kHz;VB 100 kHz;Pk

Client:	GE MDS	Job Number:	J81612
Model:	Mercury ODU	T-Log Number:	T81815
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC Part 90, RSS-119	Class:	-

Run #2: Radiated Spurious Emissions, 30 - 18000 MHz. Operating Mode: 3.5 MHz

Low Channel @ 3653 MHz

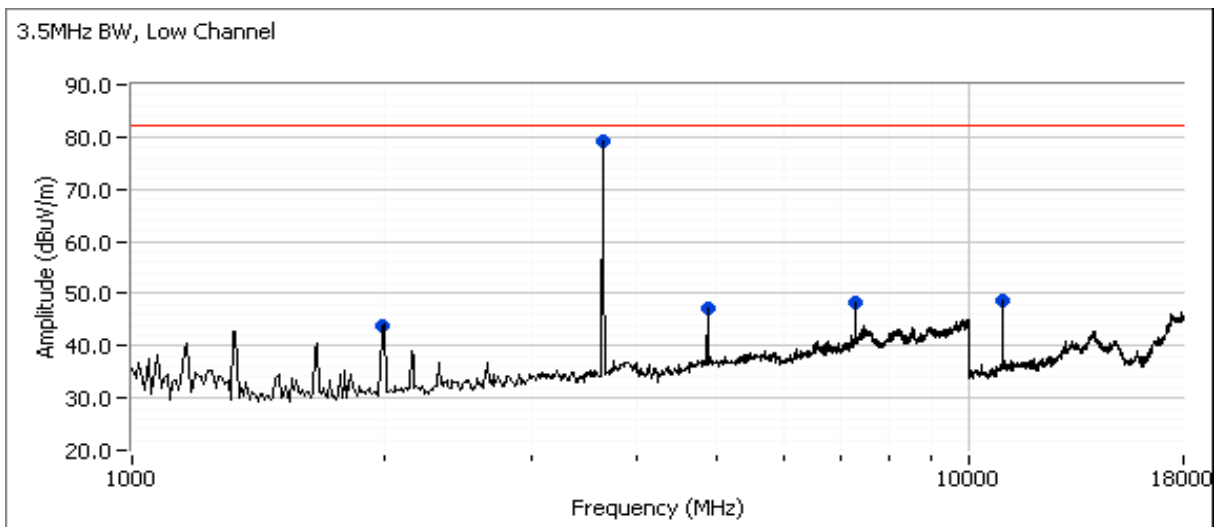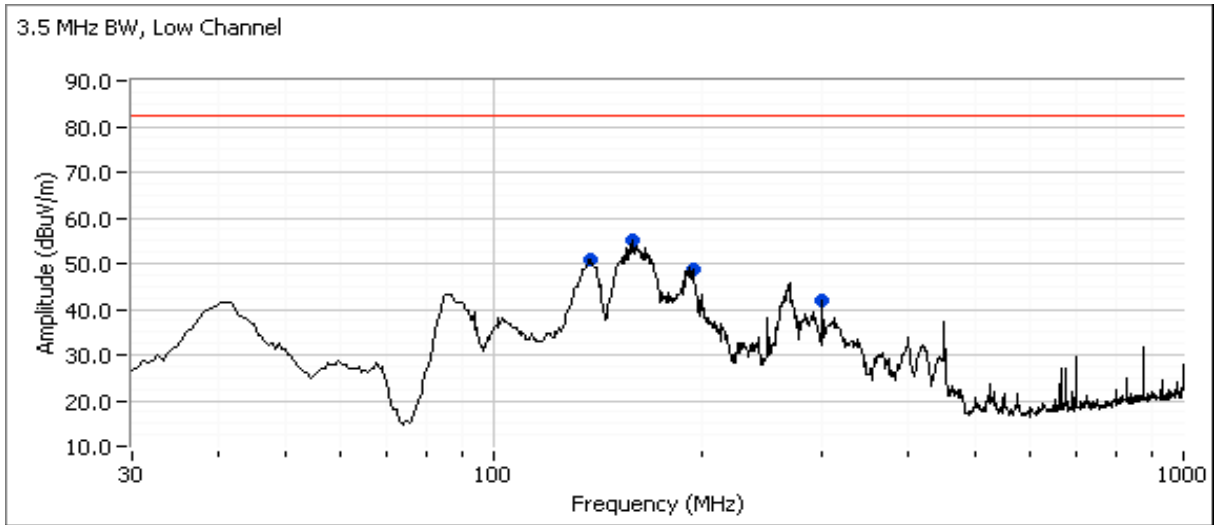



EMC Test Data

Client:	GE MDS	Job Number:	J81612
Model:	Mercury ODU	T-Log Number:	T81815
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC Part 90, RSS-119	Class:	-



Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
158.778	55.2	H	82.2	-27.0	Peak	121	1.5	
138.216	50.9	H	82.2	-31.3	Peak	144	2.0	
194.489	48.8	H	82.2	-33.4	Peak	174	1.5	
300.000	41.9	H	82.2	-40.3	Peak	111	1.0	
1990.000	43.8	V	82.2	-38.4	Peak	75	1.0	
3653.000	79.3	V	-	-	Peak	197	1.6	Fundamental
4868.330	47.3	V	82.2	-34.9	Peak	159	1.6	
7305.000	48.2	V	82.2	-34.0	Peak	202	1.6	
10946.670	48.6	V	82.2	-33.6	Peak	202	1.3	

Note 1: Based on the measurements at the three channels using 5 MHz mode, only measurements at the low channel and from 30-18000 MHz were considered necessary in the 3.5 MHz mode.

Client: GE MDS	Job Number: J81612
Model: Mercury ODU	T-Log Number: T81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -

Run #3: Radiated Spurious Emissions, 30 - 18000 MHz. Operating Mode: 7 MHz

Low Channel @ 3654 MHz

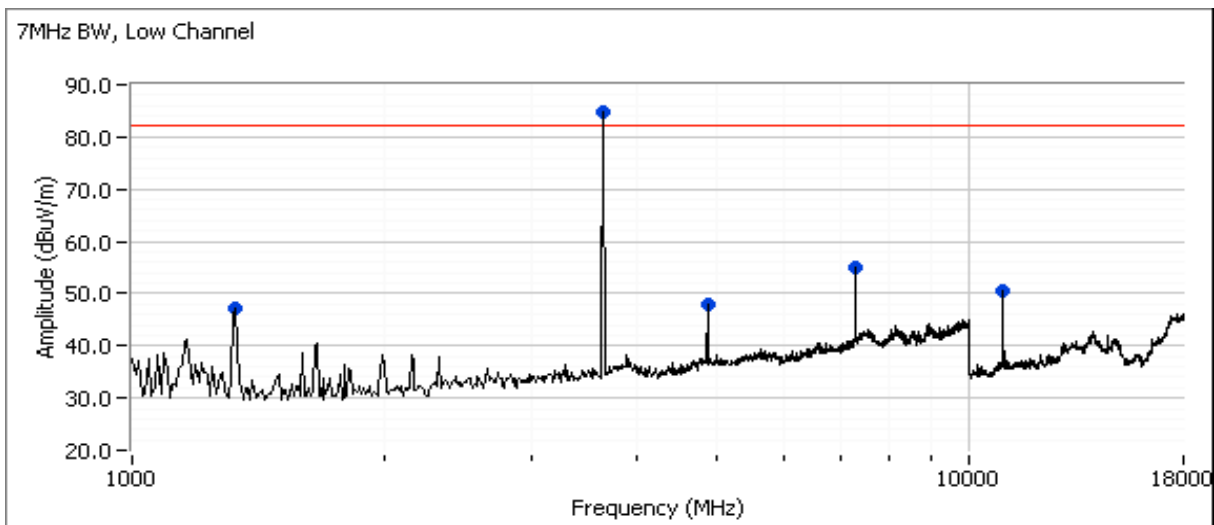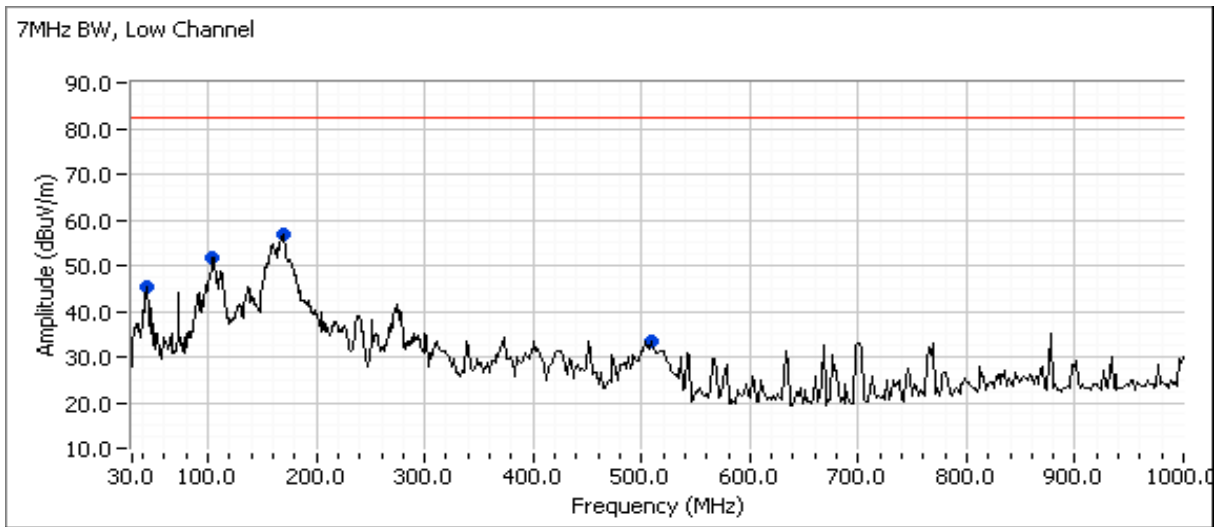



EMC Test Data

Client:	GE MDS	Job Number:	J81612
Model:	Mercury ODU	T-Log Number:	T81815
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC Part 90, RSS-119	Class:	-



Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
42.825	45.2	V	82.2	-37.0	Peak	214	1.0	7MHz BW
104.250	51.8	V	82.2	-30.4	Peak	88	1.0	7MHz BW
167.623	55.7	H	82.2	-26.5	PK	117	2.0	PK (0.10s) 7MHz BW
508.250	33.6	H	82.2	-48.6	Peak	110	1.5	7MHz BW
1330.000	47.2	V	82.2	-35.0	Peak	32	1.6	7MHz BW
3654.250	84.7	V	-	-	Peak	204	1.0	Fundamental 7MHz BW
4868.330	48.0	V	82.2	-34.2	Peak	176	1.6	7MHz BW
7308.070	64.6	V	82.2	-17.6	PK	205	1.4	RB 1 MHz;VB 3 MHz;Pk 7MHz BW
10965.320	66.3	V	82.2	-15.9	PK	178	1.0	RB 1 MHz;VB 3 MHz;Pk 7MHz BW

Note 1: Based on the measurements at the three channels using 5 MHz mode, only measurements at the low channel and from 30-18000 MHz were considered necessary in the 7 MHz mode.

Client: GE MDS	Job Number: J81612
Model: Mercury ODU	T-Log Number: T81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -

Run #4: Radiated Spurious Emissions, 30 - 18000 MHz. Operating Mode: 8.75 MHz

Low Channel @ 3655 MHz

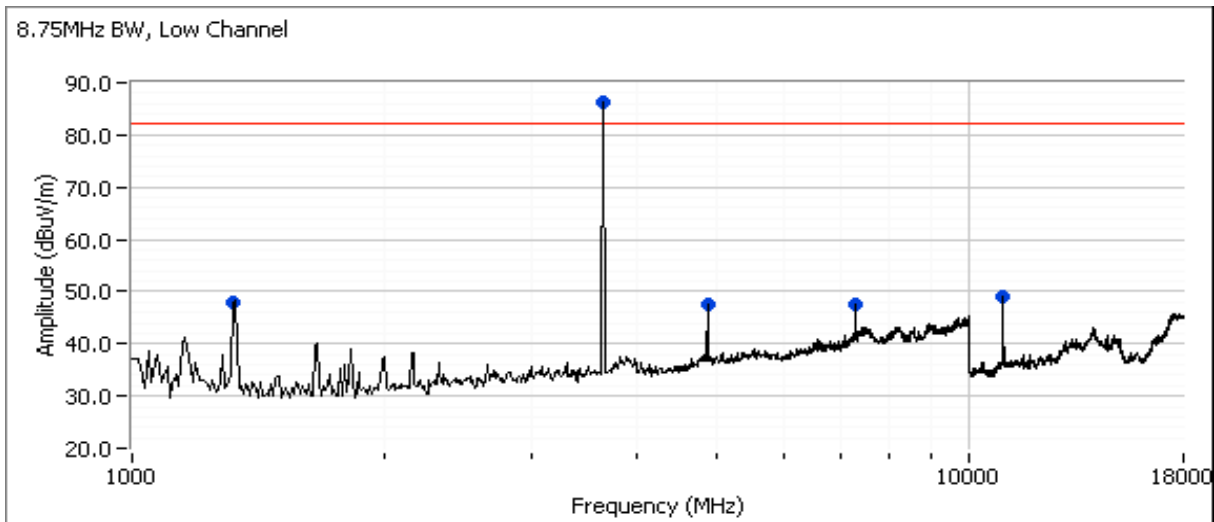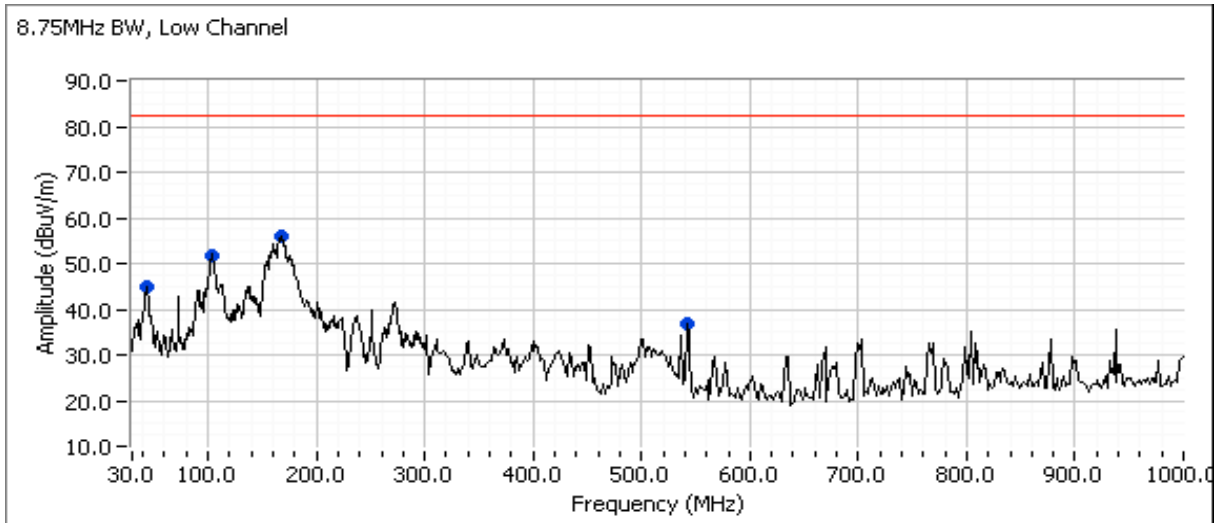



EMC Test Data

Client:	GE MDS	Job Number:	J81612
Model:	Mercury ODU	T-Log Number:	T81815
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC Part 90, RSS-119	Class:	-



Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
43.500	45.1	V	82.2	-37.1	Peak	102	1.0	8.75 BW
102.900	51.6	V	82.2	-30.6	Peak	144	1.0	8.75 BW
167.623	55.6	H	82.2	-26.6	PK	117	2.0	PK (0.10s) 8.75 BW
541.500	37.0	V	82.2	-45.2	Peak	28	1.0	8.75 BW
1320.830	47.8	V	82.2	-34.4	Peak	168	1.3	8.75 BW
3655.000	86.4	V	-	-	Peak	202	1.0	Fundamental 8.75 BW
4868.330	47.5	V	82.2	-34.7	Peak	168	1.3	8.75 BW
7310.830	47.4	V	82.2	-34.8	Peak	200	1.9	8.75 BW
10958.530	65.0	V	82.2	-17.2	PK	176	1.1	RB 1 MHz;VB 3 MHz;Pk 8.75 BW

Note 1: Based on the measurements at the three channels using 5 MHz mode, only measurements at the low channel and form 30-18000 MHz were considered necessary in the 8.75 MHz mode.

Client: GE MDS	Job Number: J81612
Model: Mercury ODU	T-Log Number: T81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -

Run #5: Radiated Spurious Emissions, 30 - 18000 MHz. Operating Mode: 10 MHz

Low Channel @ 3656 MHz

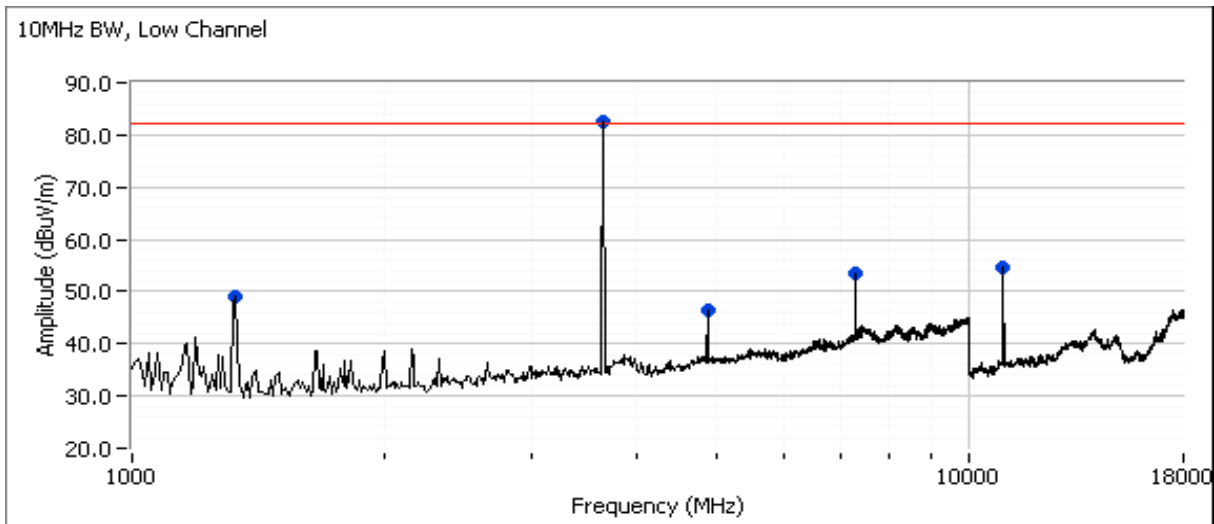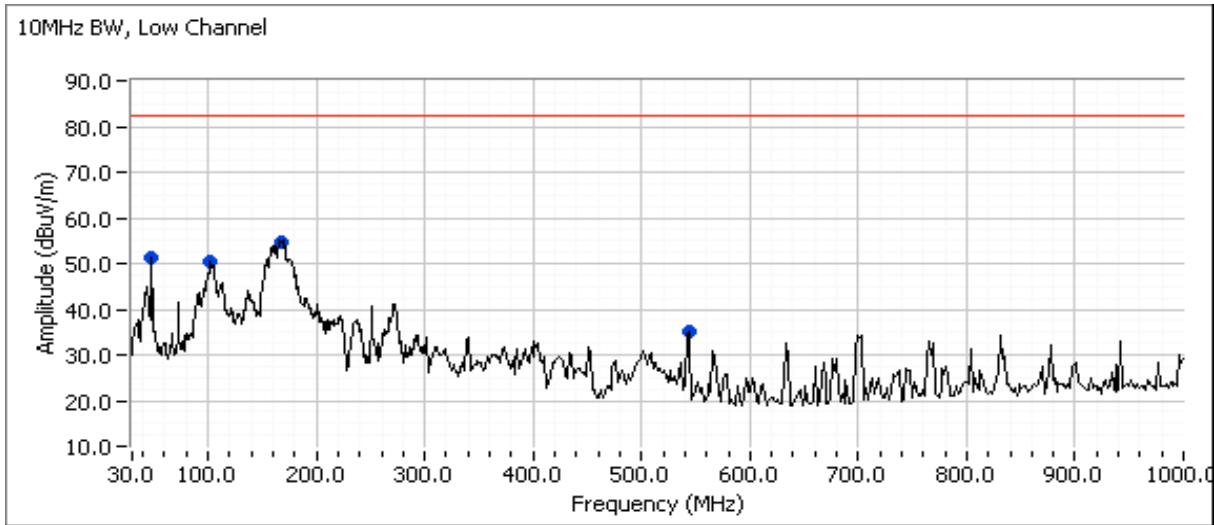



EMC Test Data

Client:	GE MDS	Job Number:	J81612
Model:	Mercury ODU	T-Log Number:	T81815
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC Part 90, RSS-119	Class:	-

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
167.623	55.6	H	82.2	-26.6	PK	117	2.0	PK (0.10s) 10MHz BW
48.225	51.2	V	82.2	-31.0	Peak	345	1.0	10MHz BW
101.550	50.3	V	82.2	-31.9	Peak	102	1.0	10MHz BW
543.250	35.1	V	82.2	-47.1	Peak	57	1.0	10MHz BW
1330.000	49.2	V	82.2	-33.0	Peak	81	1.0	10MHz BW
3656.000	82.5	V	-	-	Peak	217	1.6	Fundamental 10MHz BW
4868.330	46.5	V	82.2	-35.7	Peak	180	1.6	10MHz BW
7309.990	62.4	V	82.2	-19.8	PK	210	1.4	RB 1 MHz;VB 3 MHz;Pk 10MHz BW
10964.790	64.6	V	82.2	-17.6	PK	170	1.3	RB 1 MHz;VB 3 MHz;Pk 10MHz BW

Note 1: Based on the measurements at the three channels using 5 MHz mode, only measurements at the low channel and form 30-18000 MHz were considered necessary in the 10 MHz mode.



EMC Test Data

Client:	GE MDS	Job Number:	J81612
Model:	Mercury ODU	T-Log Number:	T81815
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC Part 90, RSS-119	Class:	-

Run #6: Radiated Spurious Emissions, Transmit Mode: Substitution Measurements

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
7308.070	64.6	V	82.2	-17.6	PK	205	1.4	7MHz BW
7309.990	62.4	V	82.2	-19.8	PK	210	1.4	10MHz BW
10957.520	70.1	V	82.2	-12.1	PK	177	1.0	5MHz BW
10958.530	65.0	V	82.2	-17.2	PK	176	1.1	8.75 BW
10964.790	64.6	V	82.2	-17.6	PK	170	1.3	10MHz BW
10965.320	66.3	V	82.2	-15.9	PK	178	1.0	7MHz BW

Vertical

Frequency MHz	Substitution measurements			Site Factor ⁴	EUT measurements			eirp Limit dBm	erp Limit dBm	Margin dB
	Pin ¹	Gain ²	FS ³		FS ⁵	eirp (dBm)	erp (dBm)			
7308.070	-3.1	10.0	105.6	98.7	64.6	-34.1	-36.3		-13.0	-23.3
7309.990	-3.1	10.0	105.8	98.9	62.4	-36.5	-38.7		-13.0	-25.7
10957.520	-2.7	12.2	107.5	98.0	70.1	-27.9	-30.1		-13.0	-17.1
10958.530	-2.7	12.2	107.9	98.4	65.0	-33.4	-35.6		-13.0	-22.6
10964.790	-2.7	12.2	107.5	98.0	64.6	-33.4	-35.6		-13.0	-22.6
10965.320	-2.7	12.2	107.7	98.2	66.3	-31.9	-34.1		-13.0	-21.1
Horizontal										
7308.070	-3.1	10.0	104.3	97.4	64.6	-32.8	-35.0		-13.0	-22.0
7309.990	-3.1	10.0	104.2	97.3	62.4	-34.9	-37.1		-13.0	-24.1
10957.520	-2.7	12.2	106.2	96.7	70.1	-26.6	-28.8		-13.0	-15.8
10958.530	-2.7	12.2	106.1	96.6	65.0	-31.6	-33.8		-13.0	-20.8
10964.790	-2.7	12.2	105.7	96.2	64.6	-31.6	-33.8		-13.0	-20.8
10965.320	-2.7	12.2	106.0	96.5	66.3	-30.2	-32.4		-13.0	-19.4

Note 1: Pin is the input power (dBm) to the substitution antenna

Note 2: Gain is the gain (dBi) for the substitution antenna. A dipole has a gain of 2.2dBi.

Note 3: FS is the field strength (dBuV/m) measured from the substitution antenna.

Note 4: Site Factor - this is the site factor to convert from a field strength in dBuV/m to an eirp in dBm.

Note 5: EUT field strength as measured during initial run.

Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
	Account Manager: Susan Pelzl
Contact: Dennis McCarthy	
Standard: FCC Part 90, RSS-119	Class: -

RSS-19& - Antenna Port Measurements Power, PSD, Bandwidth and Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 2/10/2011
 Test Engineer: Rafael Varelas
 Test Location: Lab 4

Config. Used: 1
 Config Change: none
 EUT Voltage: PoE

Summary of Results

Run #	Test Performed	Limit	Pass / Fail	Result / Margin
2	Power	Part 90	Pass	38.5 dBm (7.1 Watts)
2	PSD	1 Watt/MHz 90.1321(a)	Pass	30 dBm (1 Watt)
2	99% Bandwidth	-	N/A	3.2, 4.5, 6.6, 8.2 & 9.2 MHz
3	Emissions Mask	90.210 Mask	Pass	All emissions within the Mask
4	Antenna Conducted Out of Band Spurious	90.210 Mask	Pass	All spurious emissions less than -13 dBm

General Test Configuration

When measuring the conducted emissions from the EUT's antenna port, the antenna port of the EUT was connected to the spectrum analyzer or power meter via a suitable attenuator to prevent overloading the measurement system. All measurements are corrected to allow for the external attenuators and cables used.

Ambient Conditions:
 Temperature: 20.6 °C
 Rel. Humidity: 34 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.



EMC Test Data

Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
	Account Manager: Susan Pelzl
Contact: Dennis McCarthy	
Standard: FCC Part 90, RSS-119	Class: -

Run #1: Bandwidth, Output Power and Power Spectral Density - MIMO Systems

Power

Frequency (MHz)	Software Setting ¹	Modulation	Measured Output Power ² dBm			Total		Limit (dBm)	Max Power (W)	Pass or Fail
			Chain 1	Chain 2	Chain 3	mW	dBm			
7MHz Mode										
3662	1750	QPSK	12.8	12.3		36.0	15.6	-	-	-
3662	1750	16QAM	12.6	12.1		34.4	15.4	-	-	-
3662	1750	64QAM	12.8	12.3		36.0	15.6	-	-	-

PSD

Frequency (MHz)	99% ⁴ BW	Modulation	PSD ³ dBm/MHz			Total PSD		Limit	Pass or Fail
			Chain 1	Chain 2	Chain 3	mW/MHz	dBm/MHz		
7MHz Mode									
3662	6.60	QPSK	5.0	4.6		6.0	7.8	-	-
3662	6.60	16QAM	4.9	4.4		5.8	7.7	-	-
3662	6.60	64QAM	5.0	4.6		6.0	7.8	-	-

Note 1:	Power setting is the software setting used to set the output power.
Note 2:	Output power measured using RBW=100kHz VBW=300kHz , detector = rms, sweep time 10 seconds, max hold. The total power was integrated over the span (span > 2x channel bandwidth). Transmitted signal was not continuous but the analyzer was configured with a gated sweep such that the analyzer was only sweeping when the device was transmitting.
Note 3:	The psd was measured using the following analyzer settings: RB=1MHz, VB=3MHz, detector = rms, sweep time 10 seconds, max hold. Multiple sweeps were made until the display had no new "peaks".
Note 4:	99% Bandwidth measured in accordance with RSS GEN - RB > 1% of span and VB >=3xRB
Note 5:	For MIMO systems the total output power and total PSD are calculated form the sum of the powers of the individual chains (in linear terms).
Note 6:	Based on above results, Power and PSD for all types of modulations. QPSK had the highest PSD and Power values, 16 QAM had the lowest PSD and Power values. Thus all other BW mode testing was performed using QPSK.



EMC Test Data

Client:	GE MDS LLC	Job Number:	J81612
Model:	MERCURY ODU	T-Log Number:	J81815
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC Part 90, RSS-119	Class:	-

Run #2: Bandwidth, Output Power and Power Spectral Density - MIMO Systems

Limits from 90.321(a): Base and fixed stations are limited to 25 watts/25 MHz equivalent isotropically radiated power (EIRP). In any event, the peak EIRP power density shall not exceed 1 Watt in any one-megahertz slice of spectrum (30dBm/MHz).

	Chain 1	Chain 2	Chain 3	Coherent	Effective ⁵	EIRP (mW)	EIRP (dBm)
Antenna Gain (dBi):	18	18		Yes	21.0	7120.7	38.5

Power - Limit accounts for maximum antenna gain at this power setting.

Frequency (MHz)	Software Setting ¹	Modulation	Measured Output Power ² dBm			Total		EIRP dBm	Limit (eirp) dBm	Pass or Fail
			Chain 1	Chain 2	Chain 3	mW	dBm			
3.5MHz Mode										
3697	1300/1100	QPSK	9.9	10.2		20.2	13.1	34.1	44.0	PASS
5.0MHz Mode										
3697	1600/1500	QPSK	11.9	11.7		30.3	14.8	35.8	44.0	PASS
7.0MHz Mode										
3696	1700/1700	QPSK	13.2	13.8		44.9	16.5	37.5	44.0	PASS
8.75MHz Mode										
3695	1900/1800	QPSK	14.4	14.1		53.2	17.3	38.3	44.0	PASS
10.0MHz Mode										
3694	2000/1900	QPSK	14.7	14.3		56.4	17.5	38.5	44.0	PASS

Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -

PSD

Frequency (MHz)	99% ⁴ BW	Modulation	PSD ³ dBm/MHz			Total PSD		PSD EIRP dBm/MHz	Limit (eirp) dBm/MHz	Pass or Fail
			Chain 1	Chain 2	Chain 3	mW/MHz	dBm/MHz			
3.5MHz Mode										
3697	3.2	QPSK	5.4	5.6		7.1	8.5	29.5	30.0	PASS
5.0MHz Mode										
3697	4.5	QPSK	5.9	5.6		7.5	8.8	29.8	30.0	PASS
7.0MHz Mode										
3696	6.6	QPSK	5.6	6.1		7.7	8.9	29.9	30.0	PASS
8.75MHz Mode										
3695	8.2	QPSK	5.9	5.5		7.4	8.7	29.7	30.0	PASS
10.0MHz Mode										
3694	9.2	QPSK	6.0	5.3		7.4	8.7	29.7	30.0	PASS

Note 1: Power setting is the software setting used to set the output power.

Note 2: Output power measured using RBW=100kHz VBW=300kHz, detector = rms, sweep time 10 seconds, max hold. The total power was integrated over the span (span >= 1.5x channel bandwidth). The sweep time was such that the dwell time per any one display point was less than the "on-time" for the transmitter (4ms). The plot for the channel with the highest power is provided below.

Note 3: The PSD was measured using the following analyzer settings: RB=1MHz, VB=3MHz, detector = rms, sweep time 10 seconds, max hold. Multiple sweeps were made until the display had no new "peaks". The plot for the channel with the highest power is provided below. The sweep time was such that the dwell time per any one display point was less than the "on-time" for the transmitter (4ms).

Note 4: 99% Bandwidth measured in accordance with RSS GEN - RB > 1% of span and VB >= 3xRB

Note 5: For MIMO systems the total output power and total PSD are calculated from the sum of the powers of the individual chains (in linear terms). The antenna gain used to determine the EIRP and limits for PSD/Output power depends on the operating mode of the MIMO device. If the signals are non-coherent between the transmit chains, then the gain used to determine the limits is the highest gain of the individual chains, and the EIRP is the sum of the products of gain and power on each chain. If the signals are coherent, then the effective antenna gain is the sum (in linear terms) of the gains for each chain, and the EIRP is the product of the effective gain and total power.

Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -


Run #3: Unwanted emissions, QPSK at power setting used for Power measurements

Number of transmit chains: 2
 Spurious Limit: -23.0 dBm/100kHz (-13dBm/MHz) eirp
 Adjustment for 2 chains: -3.0 dB adjustment for multiple chains.
 Limit Used On Plots: -26.0 dBm/100 kHz

MIMO Devices: The plots were obtained for the chain with the highest PSD and the limit was adjusted to account for all chains transmitting simultaneously

Band edge Measurements

3.5MHz BW

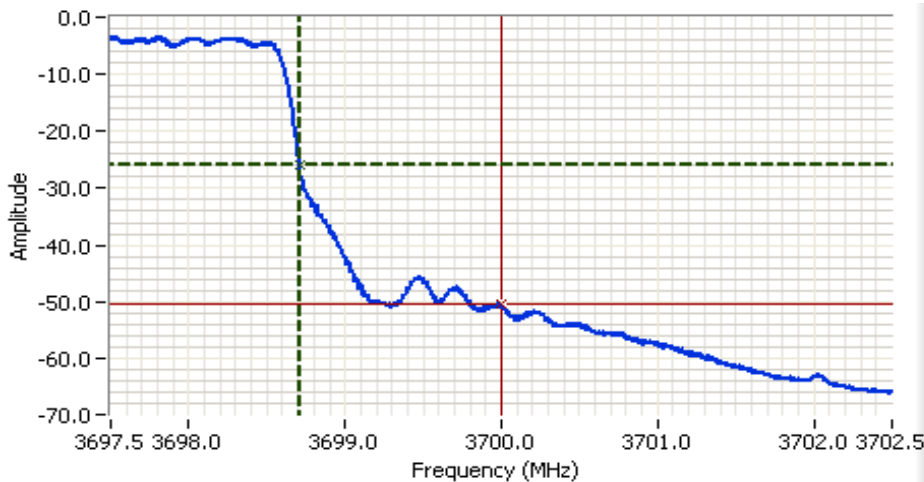

Analyzer Settings
 Agilent Technologies, E4446A
 CF: 3700.000 MHz
 SPAN: 5.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: RMS
 Attn: 10 DB
 RL Offset: 21.0 DB
 Sweep Time: 10.0s
 Ref Lvl: 14.0 DBM

Comments
 BE @ 3700 MHz, Chain 1
 QPSK 3.5MHz


Cursor 1 3698.7109 -26.00
 Cursor 2 3700.0000 -50.49
 Delta Freq. 1.289
 Delta Amplitude 24.49



Plot for high channel (3697 MHz), power setting(s) = 1300, BW= 3.5, MOD=QPSK
-50.5dBm in 100 kHz (corrected by $10 \cdot \log(100\text{kHz}/1\text{MHz})$) yeilds -40.5dBm in 1 MHz

Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -

5.0MHz BW

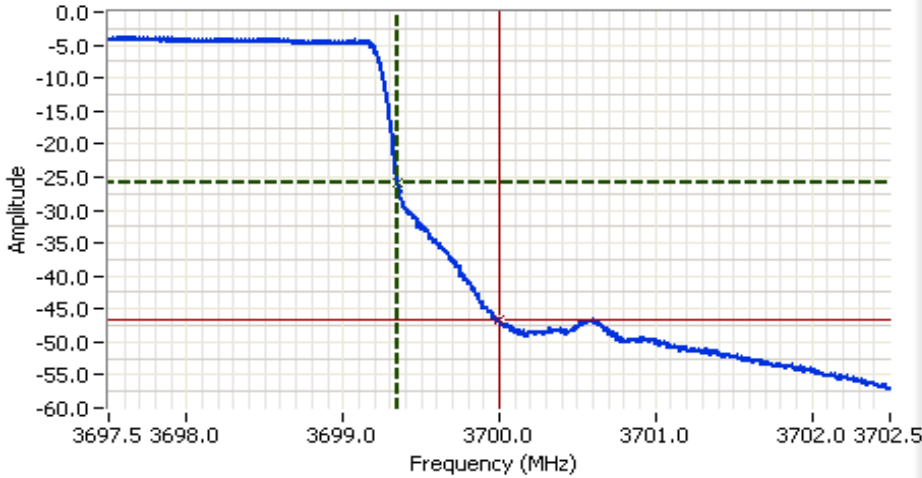

Analyzer Settings
 Agilent Technologies, E4446A
 CF: 3700.000 MHz
 SPAN: 5.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: RMS
 Attn: 10 DB
 RL Offset: 21.0 DB
 Sweep Time: 10.0s
 Ref Lvl: 14.0 DBM

Comments
 BE @ 3700 MHz, Chain 0
 QPSK 5.0MHz BW

Cursor 1	3699.3490	-26.00	
Cursor 2	3700.0000	-46.61	

Delta Freq. 651 kHz


Delta Amplitude 20.61



Plot for high channel (3697 MHz), power setting(s) = 1600, BW= 5.0, MOD=QPSK
-46.6dBm in 100 kHz (corrected by $10 \cdot \log(100\text{kHz}/1\text{MHz})$) yeilds -36.6dBm in 1 MHz

Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -

7.0MHz BW

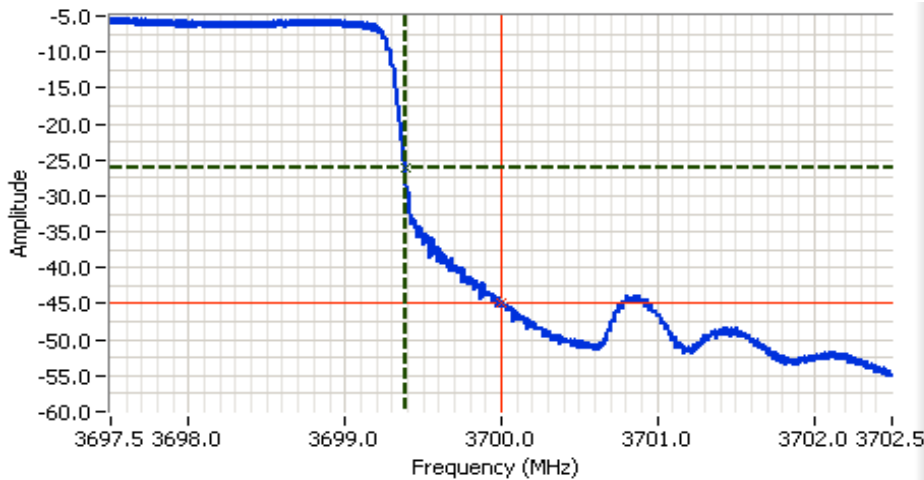

Analyzer Settings
 Agilent Technologies, E4446A
 CF: 3700.000 MHz
 SPAN: 5.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: RMS
 Attn: 10 DB
 RL Offset: 10.7 DB
 Sweep Time: 10.0s
 Ref Lvl: 8.7 DBM

Comments

Cursor 1	3699.3833	-26.08	
Cursor 1	3700.0000	-44.87	


Delta Freq. 617 kHz

Delta Amplitude 18.79



Plot for high channel (3696 MHz), power setting(s) = 1700, BW= 7.0, MOD=QPSK
 -44dBm in 100 kHz (corrected by $10 \cdot \log(100\text{kHz}/1\text{MHz})$) yeilds -34dBm in 1 MHz

8.75MHz BW

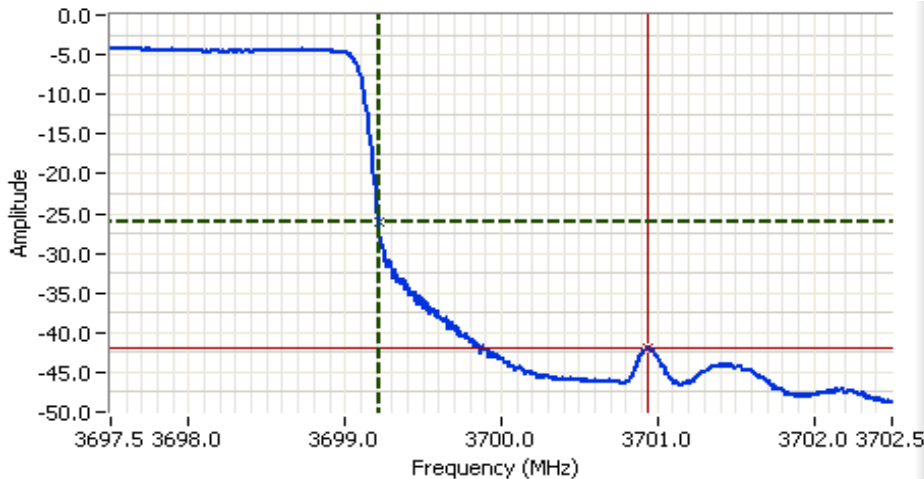

Analyzer Settings
 Agilent Technologies, E4446A
 CF: 3700.000 MHz
 SPAN: 5.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: RMS
 Attn: 10 DB
 RL Offset: 21.0 DB
 Sweep Time: 10.0s
 Ref Lvl: 14.0 DBM

Comments

BE @ 3700 MHz, Chain 0
 QPSK 8.75MHz BW

Cursor 1	3699.2187	-26.00	
Cursor 2	3700.9333	-41.86	

Delta Freq. 1.715


Delta Amplitude 15.86



Plot for high channel (3695 MHz), power setting(s) = 1900, BW= 8.75, MOD=QPSK
 -41.9dBm in 100 kHz (corrected by $10 \cdot \log(100\text{kHz}/1\text{MHz})$) yeilds -31.9dBm in 1 MHz

Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -

10.0MHz BW

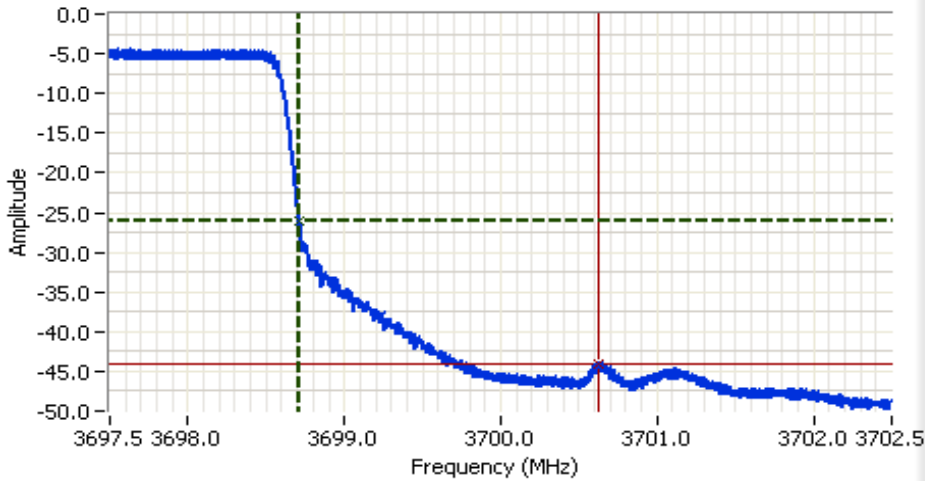

Analyzer Settings
 Agilent Technologies, E4446A
 CF: 3700.000 MHz
 SPAN: 5.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: RMS
 Attn: 10 DB
 RL Offset: 21.0 DB
 Sweep Time: 10.0s
 Ref Lvl: 14.0 DBM

Comments
 BE @ 3700 MHz, Chain 0
 QPSK 10MHz BW

Cursor 1	3698.7109	-26.00	
Cursor 2	3700.6250	-44.01	

Delta Freq. 1.914
 Delta Amplitude 18.01



Plot for high channel (3694 MHz), power setting(s) = 2000, BW= 10.0, MOD=QPSK
-44.0dBm in 100 kHz (corrected by $10 \cdot \log(100\text{kHz}/1\text{MHz})$) yeilds -34.0dBm in 1 MHz



Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -

Run #4: Out Of Band Spurious Emissions - Antenna Conducted



Number of transmit chains: 2
 Spurious Limit: -13.0 dBm/MHz eirp
 Adjustment for 2 chains: -3.0 dB adjustment for multiple chains.
 Limit Used On Plots -16.0 dBm/MHz

MIMO Devices: The plots were obtained for each chain individually and the limit was adjusted to account for all chains transmitting simultaneously

Plots Showing Out-Of-Band Emissions (RBW=VBW=1MHz above 1 GHz and 120 kHz below 1 GHz)

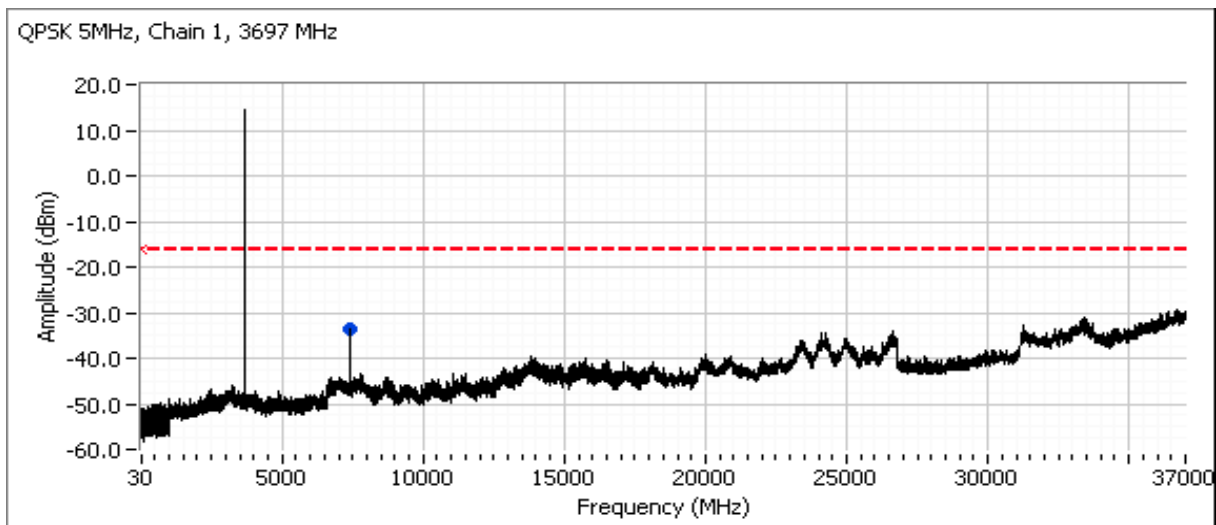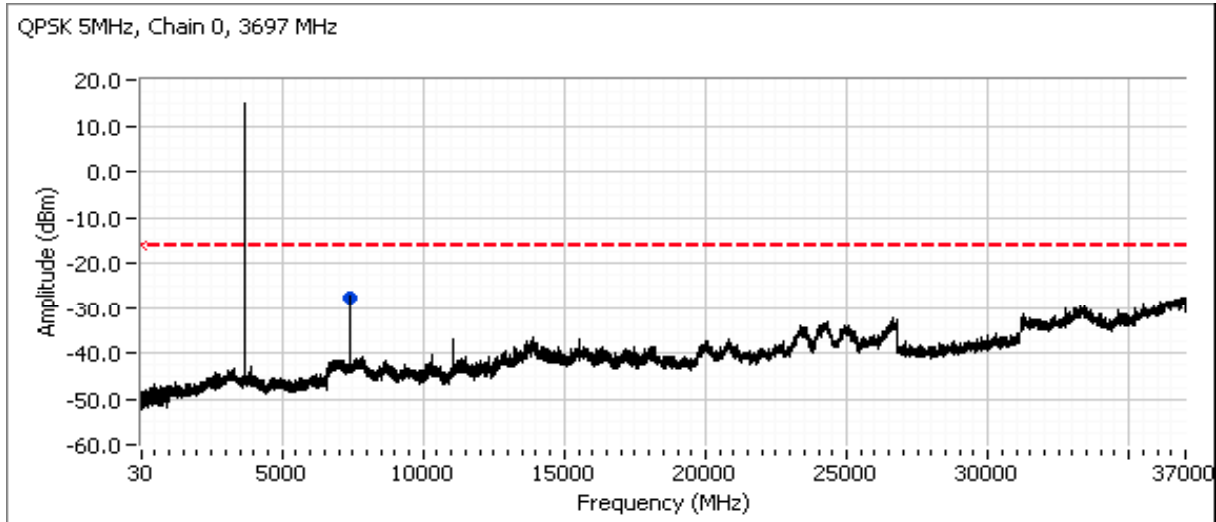

Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -

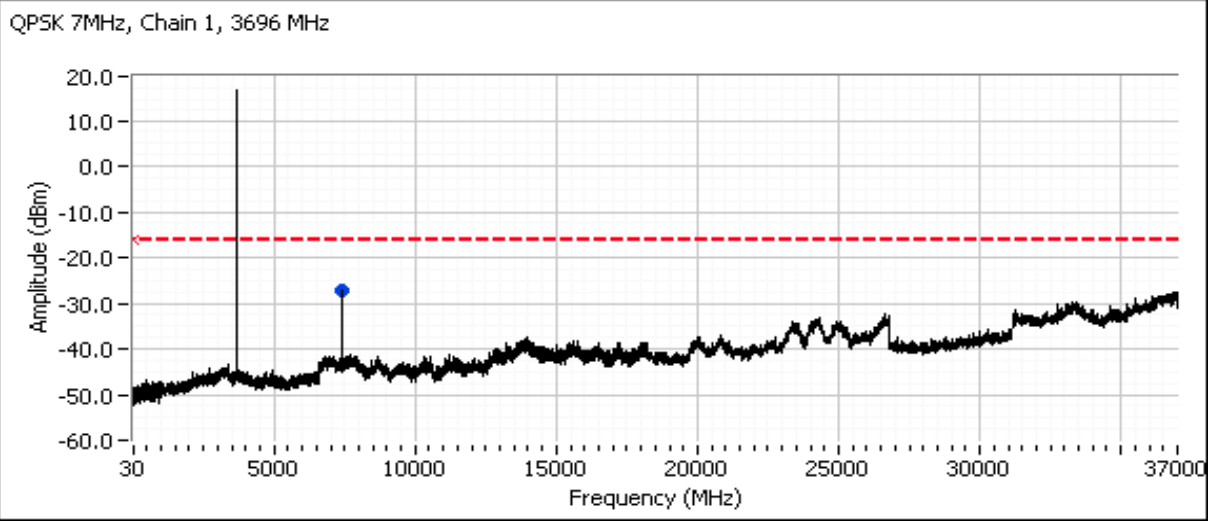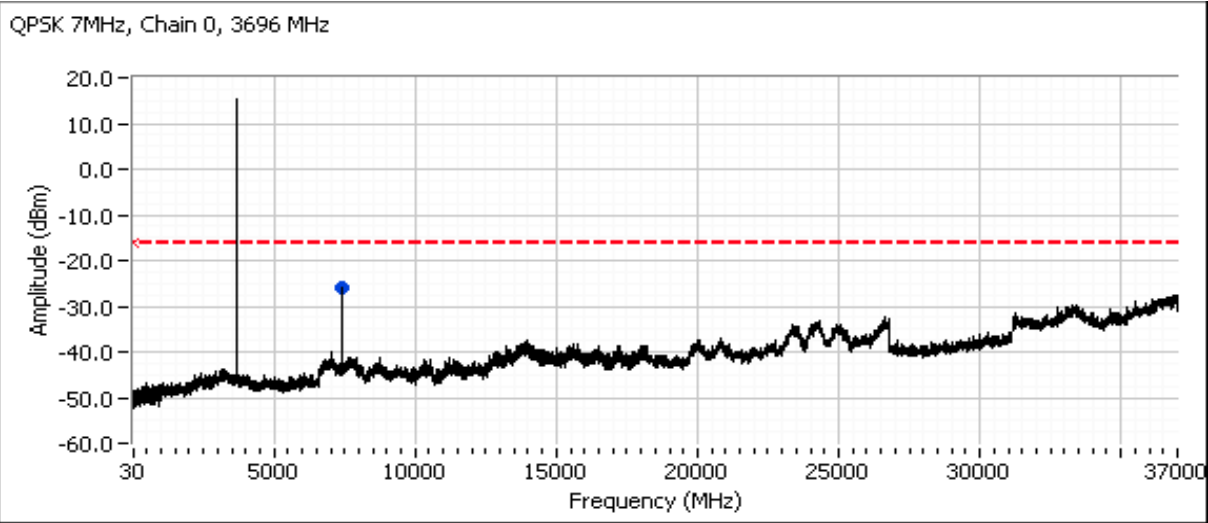

Note: As all the emissions were similar between 5 and 7 Mhz BW modes, testing in the other BW modes was not considered necessary.

Client:	GE MDS LLC	Job Number:	J81612
Model:	MERCURY ODU	T-Log Number:	J81815
		Account Manager:	Susan Pelzl
Contact:	Dennis McCarthy		
Standard:	FCC Part 90, RSS-119	Class:	-

RSS-197 and FCC 90Z - Antenna Port Measurements Power, PSD, Bandwidth and Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 1/19/2011
 Test Engineer: Rafael Varelas
 Test Location: Lab 4

Config. Used: 1
 Config Change: none
 EUT Voltage: PoE

Summary of Results

Run #	Test Performed	Limit	Pass / Fail	Result / Margin
2	Power	Part 90	Pass	39.0 dBm (8.0 Watts)
2	PSD	1 Watt/MHz 90.1321(a)	Pass	30 dBm (1 Watt)
2	99% Bandwidth	-	N/A	3.2, 4.5, 6.6, 8.2 & 9.2 MHz
3	Emissions Mask	90.210 Mask	Pass	All emissions within the Mask
4	Antenna Conducted Out of Band Spurious	90.210 Mask	Pass	All spurious emissions less than -13 dBm

General Test Configuration

When measuring the conducted emissions from the EUT's antenna port, the antenna port of the EUT was connected to the spectrum analyzer or power meter via a suitable attenuator to prevent overloading the measurement system. All measurements are corrected to allow for the external attenuators and cables used.

Ambient Conditions:
 Temperature: 20.9 °C
 Rel. Humidity: 35 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.



EMC Test Data

Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -

Run #1: Bandwidth, Output Power and Power Spectral Density - MIMO Systems

Power

Frequency (MHz)	Software Setting ¹	Modulation	Measured Output Power ² dBm			Total		Limit (dBm)	Max Power (W)	Pass or Fail
			Chain 1	Chain 2	Chain 3	mW	dBm			
7MHz Mode										
3662	1750	QPSK	12.8	12.3		36.0	15.6	-	-	-
3662	1750	16QAM	12.6	12.1		34.4	15.4	-	-	-
3662	1750	64QAM	12.8	12.3		36.0	15.6	-	-	-

PSD

Frequency (MHz)	99% ⁴ BW	Modulation	PSD ³ dBm/MHz			Total PSD		Limit	Pass or Fail
			Chain 1	Chain 2	Chain 3	mW/MHz	dBm/MHz		
7MHz Mode									
3662	6.60	QPSK	5.0	4.6		6.0	7.8	-	-
3662	6.60	16QAM	4.9	4.4		5.8	7.7	-	-
3662	6.60	64QAM	5.0	4.6		6.0	7.8	-	-

Note 1:	Power setting is the software setting used to set the output power.
Note 2:	Output power measured using RBW=100kHz VBW=300kHz , detector = rms, sweep time 10 seconds, max hold. The total power was integrated over the span (span > 2x channel bandwidth). Transmitted signal was not continuous but the analyzer was configured with a gated sweep such that the analyzer was only sweeping when the device was transmitting.
Note 3:	The psd was measured using the following analyzer settings: RB=1MHz, VB=3MHz, detector = rms, sweep time 10 seconds, max hold. Multiple sweeps were made until the display had no new "peaks".
Note 4:	99% Bandwidth measured in accordance with RSS GEN - RB > 1% of span and VB >=3xRB
Note 5:	For MIMO systems the total output power and total PSD are calculated form the sum of the powers of the individual chains (in linear terms).
Note 6:	Based on above results, Power and PSD for all types of modulations. QPSK had the highest PSD and Power values, 16 QAM had the lowest PSD and Power values. Thus all other BW mode testing was performed using QPSK.

Client:	GE MDS LLC	Job Number:	J81612
Model:	MERCURY ODU	T-Log Number:	J81815
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC Part 90, RSS-119	Class:	-

Run #2: Bandwidth, Output Power and Power Spectral Density - MIMO Systems

Limits from 90.321(a): Base and fixed stations are limited to 25 watts/25 MHz equivalent isotropically radiated power (EIRP). In any event, the peak EIRP power density shall not exceed 1 Watt in any one-megahertz slice of spectrum (30dBm/MHz).

	Chain 1	Chain 2	Chain 3	Coherent	Effective ⁵	EIRP (mW)	EIRP (dBm)
Antenna Gain (dBi):	18	18		Yes	21.0	8014.9	39.0

Power - Limit accounts for maximum antenna gain at this power setting.

Frequency (MHz)	Software Setting ¹	Modulation	Measured Output Power ² dBm			Total		EIRP dBm	Limit (eirp) dBm	Pass or Fail
			Chain 1	Chain 2	Chain 3	mW	dBm			
3.5MHz Mode										
3653	1140/1240	QPSK	9.6	10.5		20.3	13.1	34.1	44.0	PASS
3662	1140/1140	QPSK	10.4	10.2		21.4	13.3	34.3	44.0	PASS
3672	1140/1140	QPSK	10.6	10.0		21.5	13.3	34.3	44.0	PASS
5.0MHz Mode										
3653	1700/1900	QPSK	11.1	12.3		29.9	14.8	35.8	44.0	PASS
3662	1700/1700	QPSK	11.6	12.0		30.2	14.8	35.8	44.0	PASS
3672	1700/1700	QPSK	11.9	11.6		29.9	14.8	35.8	44.0	PASS
7.0MHz Mode										
3654	2000/2000	QPSK	13.8	13.0		43.9	16.4	37.4	44.0	PASS
3662	1900/2000	QPSK	13.3	13.7		44.8	16.5	37.5	44.0	PASS
3671	1900/1900	QPSK	13.5	13.1		42.8	16.3	37.3	44.0	PASS
8.75MHz Mode										
3655	2100/2100	QPSK	14.6	13.9		53.4	17.3	38.3	44.0	PASS
3662	2100/2100	QPSK	14.4	14.4		55.1	17.4	38.4	44.0	PASS
3670	2000/2100	QPSK	14.2	14.8		56.5	17.5	38.5	44.0	PASS
10.0MHz Mode										
3656	2300/2300	QPSK	15.4	14.6		63.5	18.0	39.0	44.0	PASS
3662	2200/2300	QPSK	14.8	15.1		62.6	18.0	39.0	44.0	PASS
3669	2200/2200	QPSK	15.0	14.5		59.8	17.8	38.8	44.0	PASS

Client:	GE MDS LLC	Job Number:	J81612
Model:	MERCURY ODU	T-Log Number:	J81815
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC Part 90, RSS-119	Class:	-

PSD

Frequency (MHz)	99% ⁴ BW	Modulation	PSD ³ dBm/MHz			Total PSD		PSD EIRP dBm/MHz	Limit (eirp) dBm/MHz	Pass or Fail
			Chain 1	Chain 2	Chain 3	mW/MHz	dBm/MHz			
3.5MHz Mode										
3653	3.2	QPSK	5.2	6.2		7.5	8.7	29.7	30.0	PASS
3662	3.2	QPSK	5.8	5.8		7.6	8.8	29.8	30.0	PASS
3672	3.2	QPSK	6.2	5.7		7.9	9.0	30.0	30.0	PASS
5.0MHz Mode										
3653	4.5	QPSK	5.0	6.2		7.3	8.6	29.6	30.0	PASS
3662	4.5	QPSK	5.4	5.9		7.4	8.7	29.7	30.0	PASS
3672	4.5	QPSK	5.7	5.5		7.3	8.6	29.6	30.0	PASS
7.0MHz Mode										
3654	6.6	QPSK	6.1	5.4		7.5	8.8	29.8	30.0	PASS
3662	6.6	QPSK	5.6	6.0		7.6	8.8	29.8	30.0	PASS
3671	6.6	QPSK	5.8	5.4		7.3	8.6	29.6	30.0	PASS
8.75MHz Mode										
3655	8.2	QPSK	5.9	5.2		7.2	8.6	29.6	30.0	PASS
3662	8.2	QPSK	5.8	5.7		7.5	8.8	29.8	30.0	PASS
3670	8.2	QPSK	5.5	6.1		7.6	8.8	29.8	30.0	PASS
10.0MHz Mode										
3656	9.2	QPSK	6.3	5.6		7.9	9.0	30.0	30.0	PASS
3662	9.2	QPSK	5.8	6.1		7.9	9.0	30.0	30.0	PASS
3669	9.2	QPSK	5.9	5.5		7.4	8.7	29.7	30.0	PASS

Note 1: Power setting is the software setting used to set the output power.

Note 2: Output power measured using RBW=100kHz VBW=300kHz, detector = rms, sweep time 10 seconds, max hold. The total power was integrated over the span (span >= 1.5x channel bandwidth). The sweep time was such that the dwell time per any one display point was less than the "on-time" for the transmitter (4ms). The plot for the channel with the highest power is provided below.


Note 3: The PSD was measured using the following analyzer settings: RB=1MHz, VB=3MHz, detector = rms, sweep time 10 seconds, max hold. Multiple sweeps were made until the display had no new "peaks". The plot for the channel with the highest power is provided below. The sweep time was such that the dwell time per any one display point was less than the "on-time" for the transmitter (4ms).

Note 4: 99% Bandwidth measured in accordance with RSS GEN - RB > 1% of span and VB >= 3xRB


Note 5: For MIMO systems the total output power and total PSD are calculated from the sum of the powers of the individual chains (in linear terms). The antenna gain used to determine the EIRP and limits for PSD/Output power depends on the operating mode of the MIMO device. If the signals are non-coherent between the transmit chains, then the gain used to determine the limits is the highest gain of the individual chains, and the EIRP is the sum of the products of gain and power on each chain. If the signals are coherent, then the effective antenna gain is the sum (in linear terms) of the gains for each chain, and the EIRP is the product of the effective gain and total power.

Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -


Run #3a: Unwanted emissions (Masks), QPSK at power setting used for Power measurements

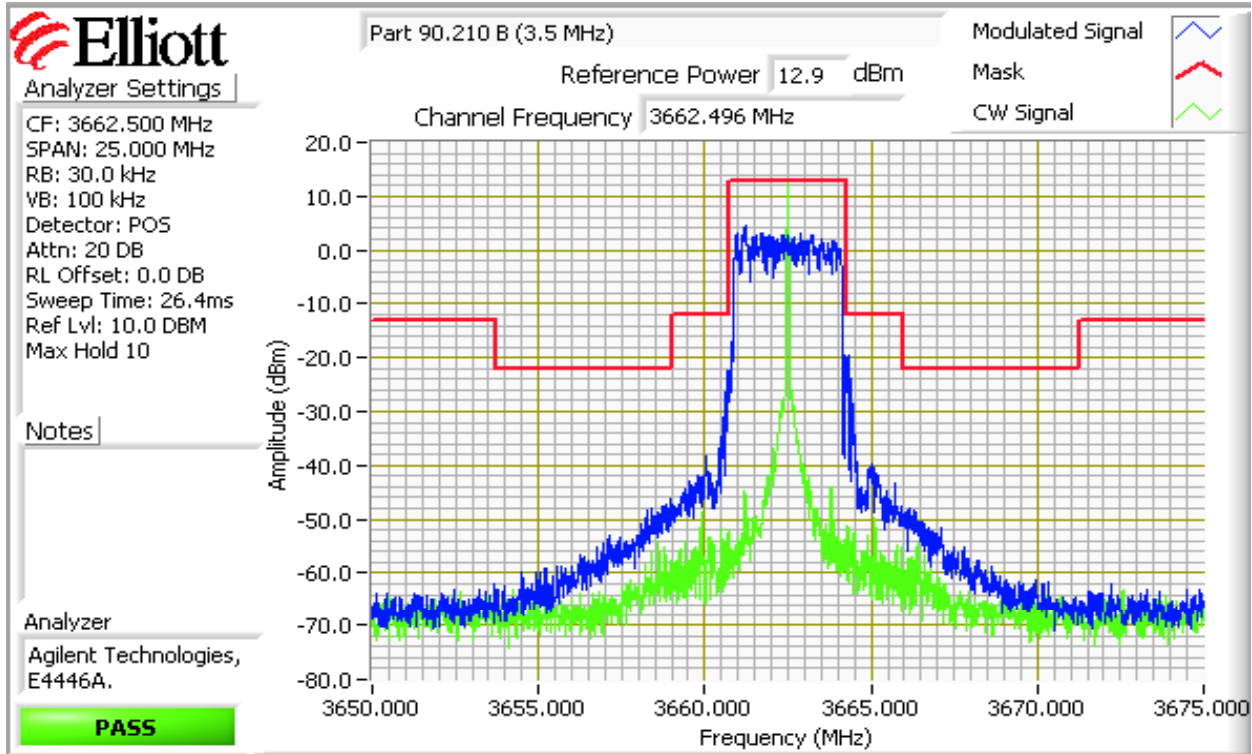


Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -

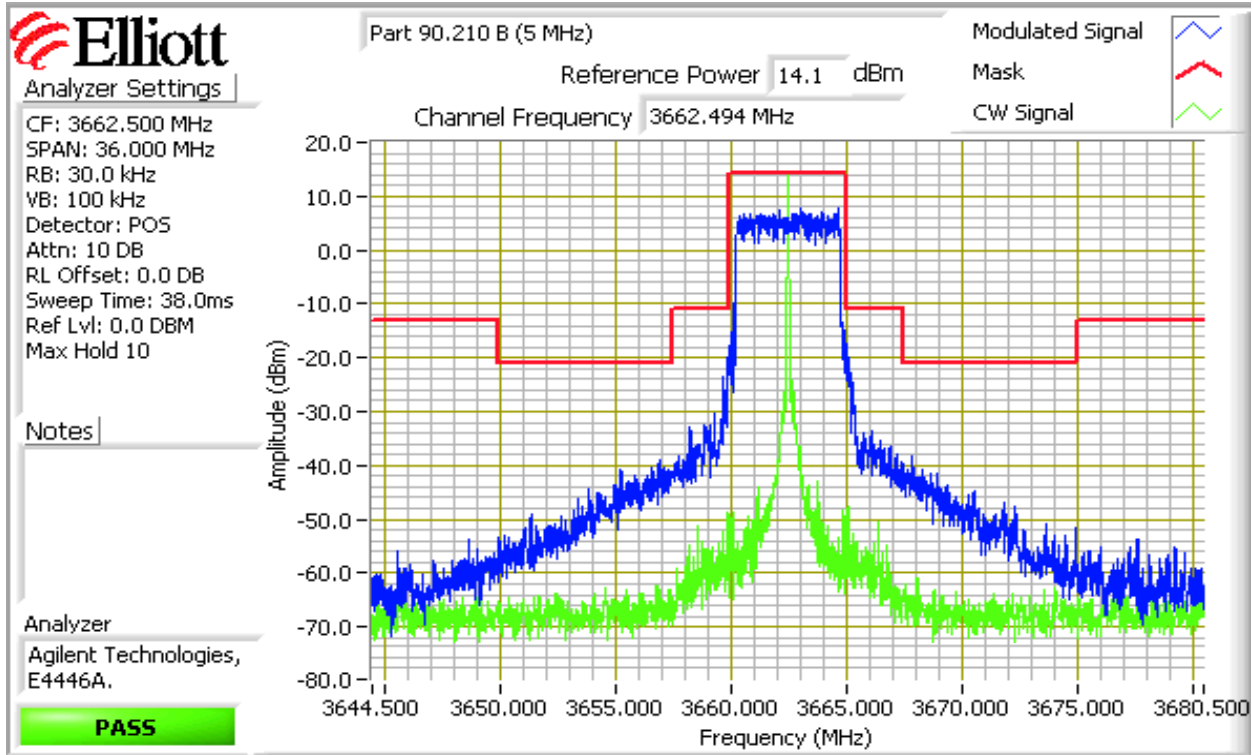


Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -

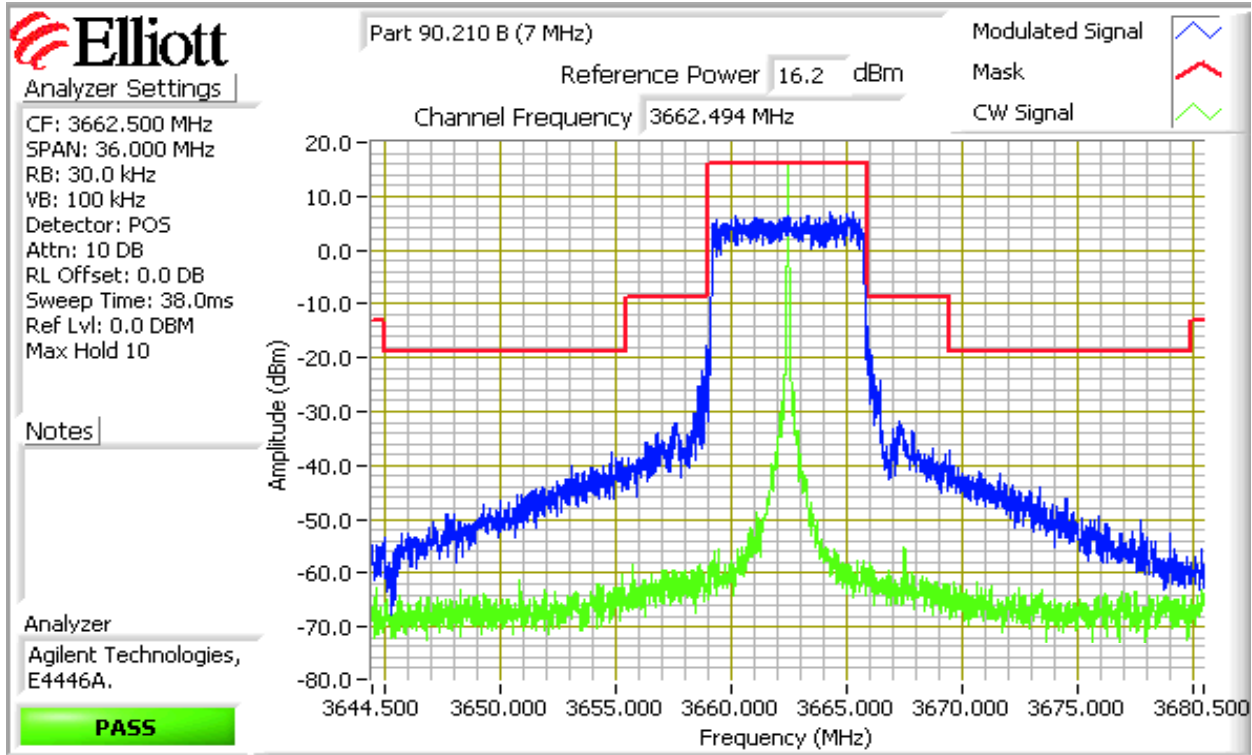

Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -

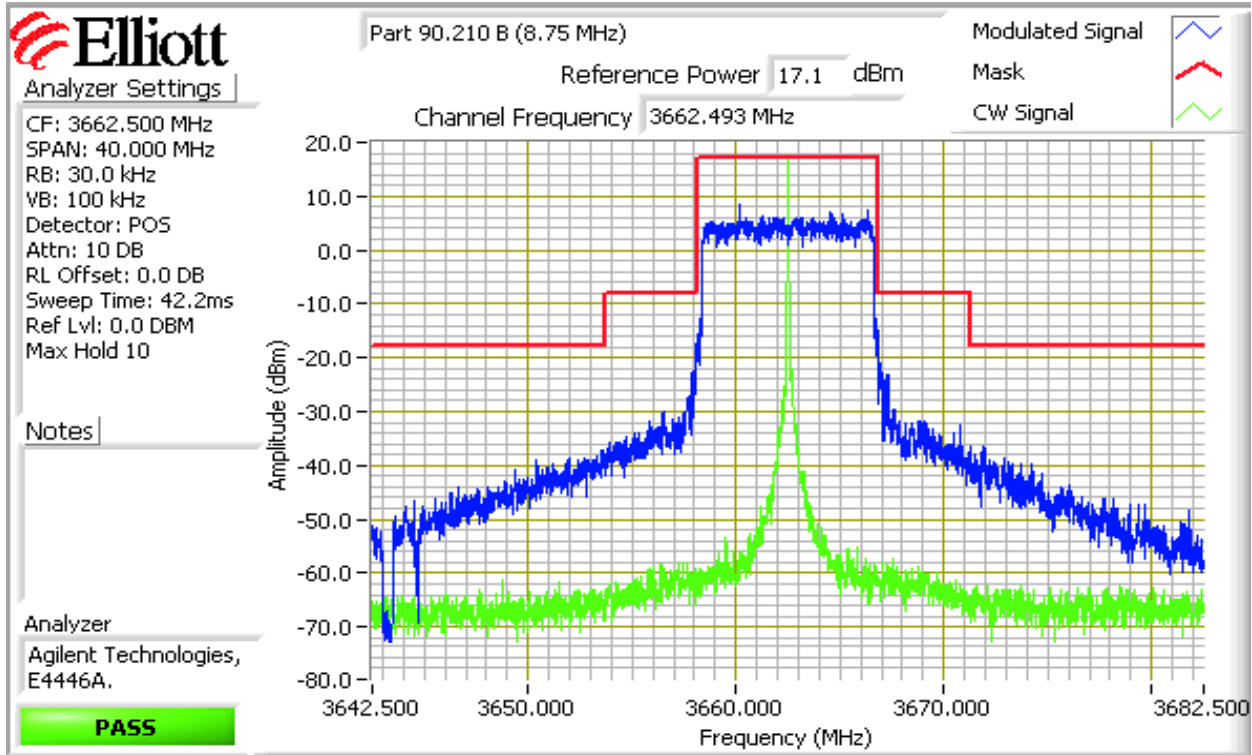

Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -

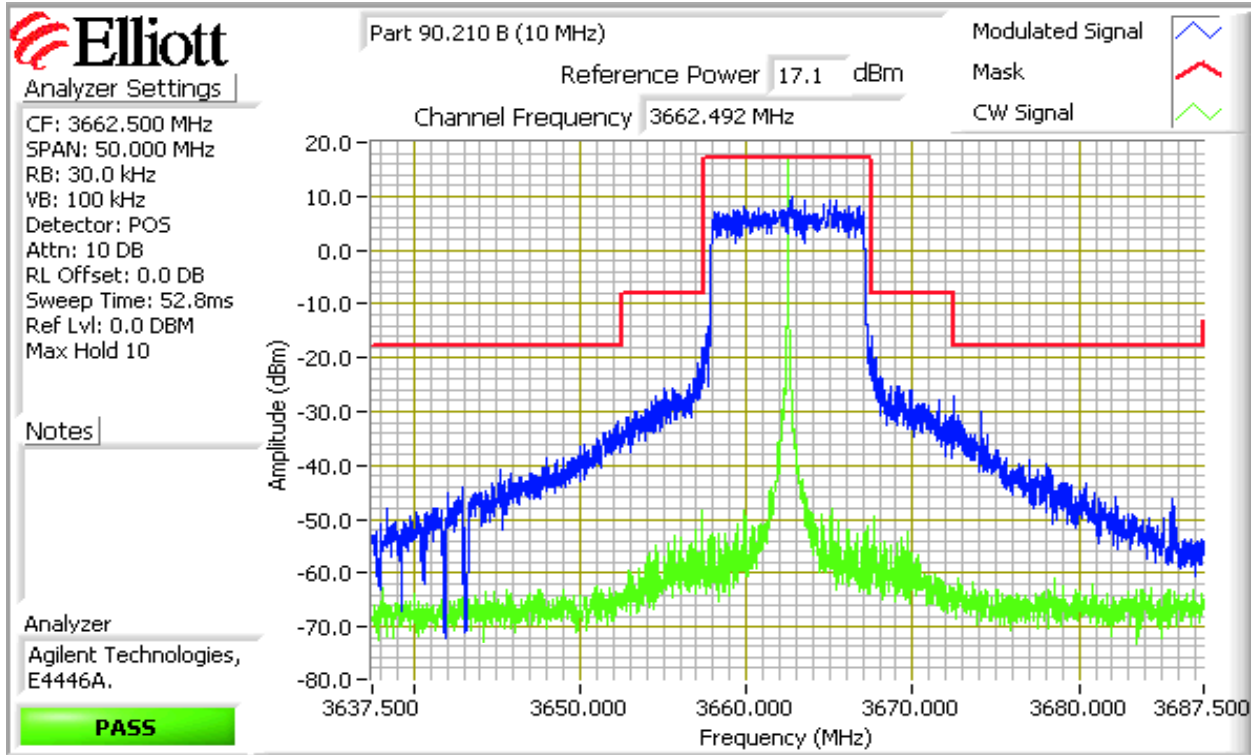


Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -

Run #3b: Unwanted emissions, QPSK at power setting used for Power measurements

Number of transmit chains: 2
 Spurious Limit: -23.0 dBm/100kHz (-13dBm/MHz) eirp
 Adjustment for 2 chains: -3.0 dB adjustment for multiple chains.
 Limit Used On Plots: -26.0 dBm/100 kHz

MIMO Devices: The plots were obtained for the chain with the highest PSD and the limit was adjusted to account for all chains transmitting simultaneously

**Band edge Measurements
 3.5MHz BW**

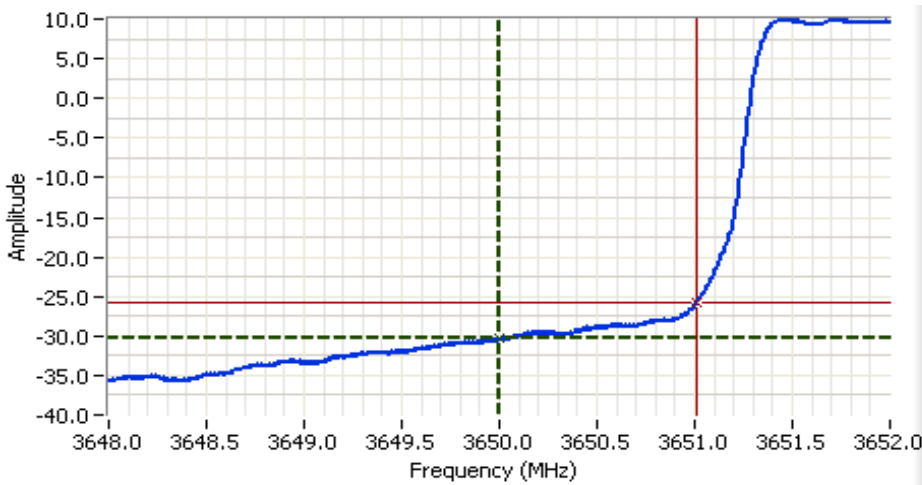

Analyzer Settings
 Agilent Technologies, E4446A
 CF: 3650.000 MHz
 SPAN: 4.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: RMS
 Attn: 20 DB
 RL Offset: 21.0 DB
 Sweep Time: 10.0s
 Ref Lvl: 25.0 DBM

Comments


Cursor 1	3650.0000	-30.31	
Cursor 2	3651.0133	-25.90	

Delta Freq. 1.013
 Delta Amplitude 4.41



Plot for low channel (3653 MHz), power setting(s) = 1240, BW=3.5, MOD=QPSK
 -30.3dBm in 100 kHz (corrected by 10*log(100kHz/1MHz)) yeilds -20.3dBm in 1 MHz

Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -

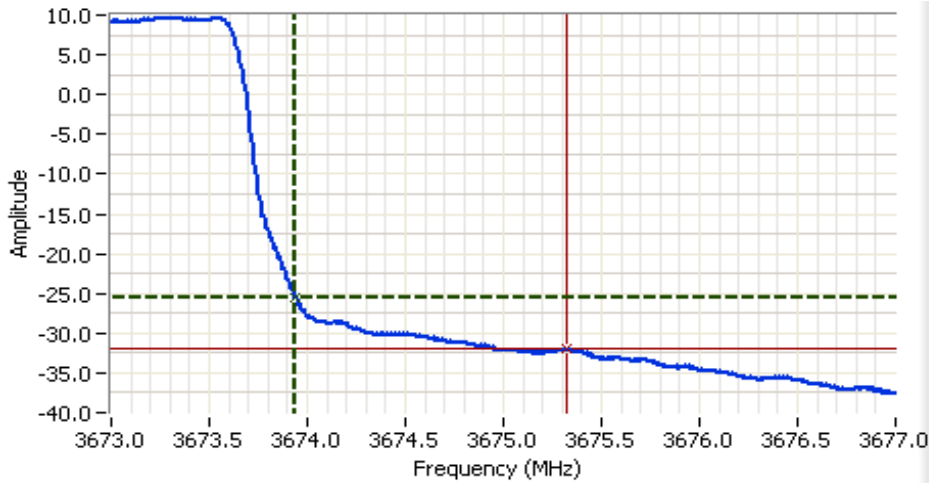

Analyzer Settings
 Agilent Technologies, E4446A
 CF: 3675.000 MHz
 SPAN: 4.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: RMS
 Attn: 20 DB
 RL Offset: 21.0 DB
 Sweep Time: 10.0s
 Ref Lvl: 25.0 DBM

Comments

Cursor 1	3673.9400	-25.43	+	-	+	-
Cursor 2	3675.3267	-31.83	+	-	+	-


Delta Freq. 1.387
 Delta Amplitude 6.40



Plot for high channel (3672 MHz), power setting(s) = 1140, BW= 3.5, MOD=QPSK
-31.8dBm in 100 kHz (corrected by $10 \cdot \log(100\text{kHz}/1\text{MHz})$) yeilds -21.8dBm in 1 MHz

Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -

5.0MHz BW

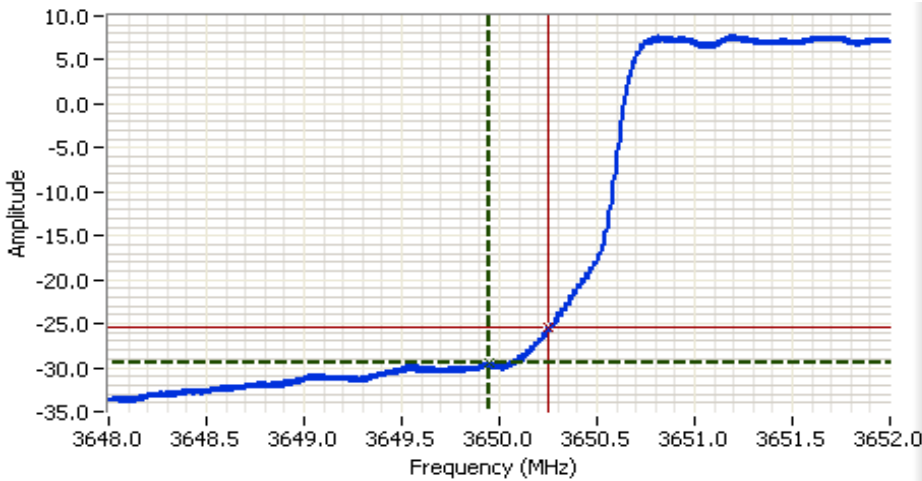

Analyzer Settings
 Agilent Technologies, E4446A
 CF: 3650.000 MHz
 SPAN: 4.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: RMS
 Attn: 20 DB
 RL Offset: 21.0 DB
 Sweep Time: 10.0s
 Ref Lvl: 25.0 DBM


Comments

Cursor 1 3649.9468 -29.42
 Cursor 2 3650.2467 -25.45

Delta Freq. 300 kHz
 Delta Amplitude 3.97



Plot for low channel (3653 MHz), power setting(s) = 1900, BW= 5.0, MOD=QPSK
 -29.4dBm in 100 kHz (corrected by $10 \cdot \log(100\text{kHz}/1\text{MHz})$) yeilds -19.4dBm in 1 MHz

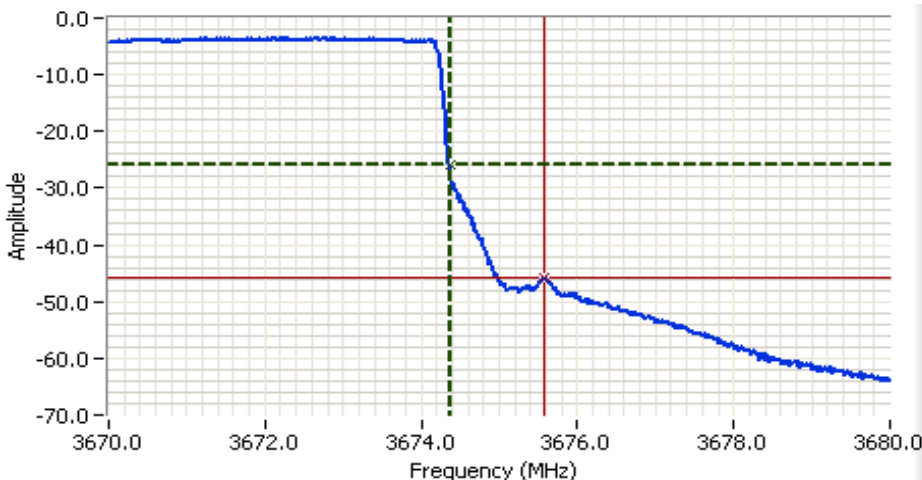

Analyzer Settings
 Agilent Technologies, E4446A
 CF: 3675.000 MHz
 SPAN: 10.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: RMS
 Attn: 10 DB
 RL Offset: 21.0 DB
 Sweep Time: 10.0s
 Ref Lvl: 14.0 DBM

Comments

BE @ 3675 MHz, Chain 0
 QPSK 5MHz BW

Cursor 1 3674.3750 -26.00
 Cursor 2 3675.5667 -45.74


Delta Freq. 1.192
 Delta Amplitude 19.74



Plot for high channel (3672 MHz), power setting(s) = 1700, BW= 5.0, MOD=QPSK
 -45.7dBm in 100 kHz (corrected by $10 \cdot \log(100\text{kHz}/1\text{MHz})$) yeilds -35.7dBm in 1 MHz

Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -

7.0MHz BW

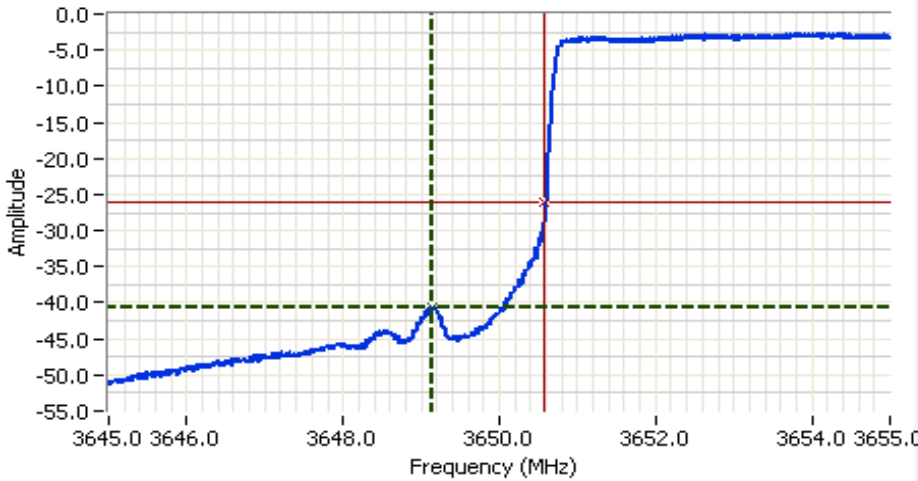


Analyzer Settings
 Agilent Technologies, E4446A
 CF: 3650.000 MHz
 SPAN: 10.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: RMS
 Attn: 10 DB
 RL Offset: 21.0 DB
 Sweep Time: 10.0s
 Ref Lvl: 14.0 DBM

Comments
 BE @ 3650 MHz, Chain 0
 QPSK 7MHz BW

Cursor 1 3649.1499 -40.58
 Cursor 2 3650.5729 -26.00
 Delta Freq. 1.423
 Delta Amplitude 14.58



Plot for low channel (3654 MHz), power setting(s) = 2000, BW= 7.0, MOD=QPSK
 -40.6dBm in 100 kHz (corrected by $10 \cdot \log(100\text{kHz}/1\text{MHz})$) yeilds -30.6dBm in 1 MHz

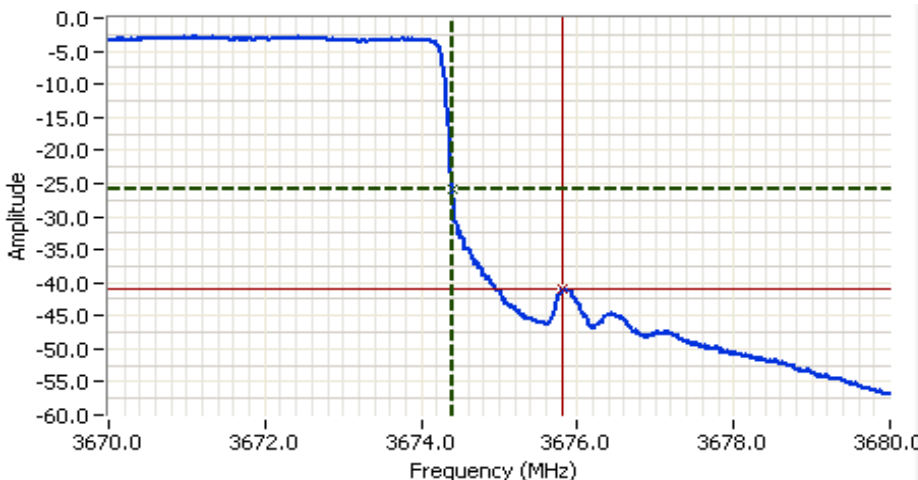

Analyzer Settings
 Agilent Technologies, E4446A
 CF: 3675.000 MHz
 SPAN: 10.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: RMS
 Attn: 10 DB
 RL Offset: 21.0 DB
 Sweep Time: 10.0s
 Ref Lvl: 14.0 DBM

Comments
 BE @ 3675 MHz, Chain 0
 QPSK 7MHz BW


Cursor 1 3674.4010 -26.00
 Cursor 2 3675.8167 -40.83
 Delta Freq. 1.416
 Delta Amplitude 14.83



Plot for high channel (3671 MHz), power setting(s) = 1900, BW= 7.0, MOD=QPSK
 -40.8dBm in 100 kHz (corrected by $10 \cdot \log(100\text{kHz}/1\text{MHz})$) yeilds -30.8dBm in 1 MHz

Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -

8.75MHz BW

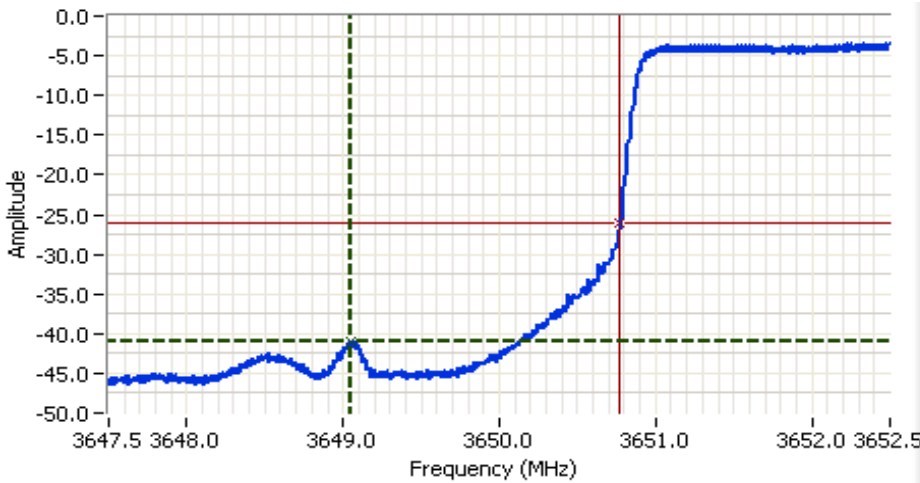

Analyzer Settings
 Agilent Technologies, E4446A
 CF: 3650.000 MHz
 SPAN: 5.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: RMS
 Attn: 10 DB
 RL Offset: 21.0 DB
 Sweep Time: 10.0s
 Ref Lvl: 14.0 DBM


Comments
 BE @ 3650 MHz, Chain 0
 QPSK 8.75MHz BW

Cursor 1	3649.0500	-41.04	
Cursor 2	3650.7682	-26.00	

Delta Freq. 1.718
 Delta Amplitude 15.04



Plot for low channel (3655 MHz), power setting(s) = 2100, BW= 8.75, MOD=QPSK
 -41.0dBm in 100 kHz (corrected by $10 \cdot \log(100\text{kHz}/1\text{MHz})$) yeilds -31.0dBm in 1 MHz

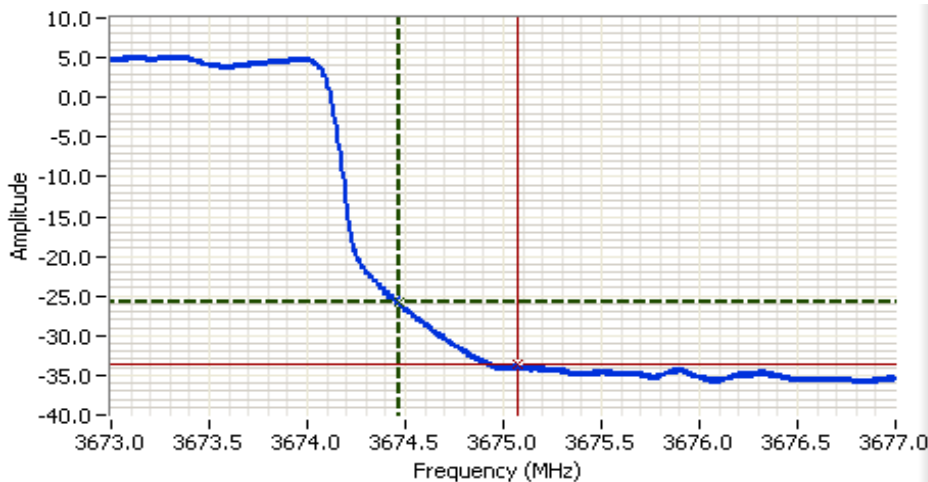

Analyzer Settings
 Agilent Technologies, E4446A
 CF: 3675.000 MHz
 SPAN: 4.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: RMS
 Attn: 20 DB
 RL Offset: 21.0 DB
 Sweep Time: 10.0s
 Ref Lvl: 25.0 DBM

Comments

Cursor 1	3674.4667	-25.86	
Cursor 2	3675.0732	-33.68	


Delta Freq. 607 kHz
 Delta Amplitude 7.82



Plot for high channel (3670 MHz), power setting(s) = 2100, BW= 8.75, MOD=QPSK
 -33.7dBm in 100 kHz (corrected by $10 \cdot \log(100\text{kHz}/1\text{MHz})$) yeilds -23.7dBm in 1 MHz

Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -

10.0MHz BW

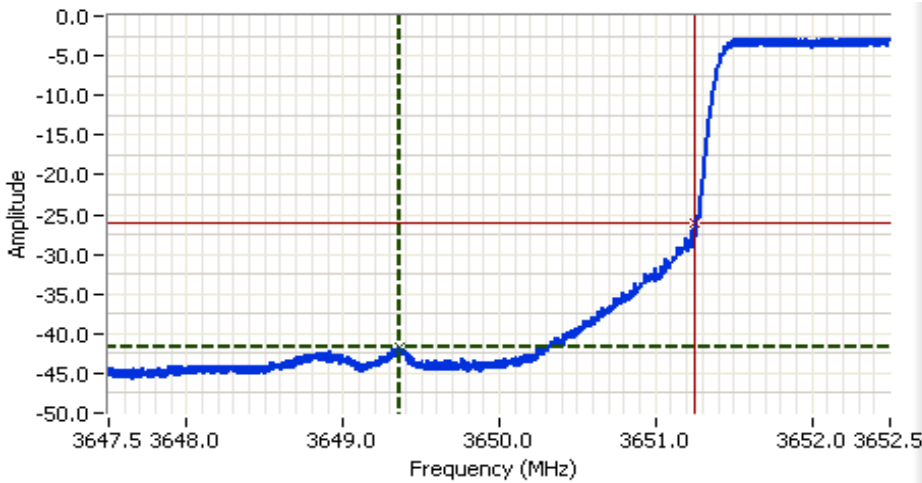

Analyzer Settings
 Agilent Technologies, E4446A
 CF: 3650.000 MHz
 SPAN: 5.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: RMS
 Attn: 10 DB
 RL Offset: 21.0 DB
 Sweep Time: 10.0s
 Ref Lvl: 14.0 DBM


Comments
 BE @ 3650 MHz, Chain 0
 QPSK 10MHz BW

Cursor 1	3649.3667	-41.72	
Cursor 2	3651.2500	-26.00	

Delta Freq. 1.883
 Delta Amplitude 15.72



Plot for low channel (3656 MHz), power setting(s) = 2300, BW= 10.0, MOD=QPSK
 -41.7dBm in 100 kHz (corrected by $10 \cdot \log(100\text{kHz}/1\text{MHz})$) yeilds -31.7dBm in 1 MHz

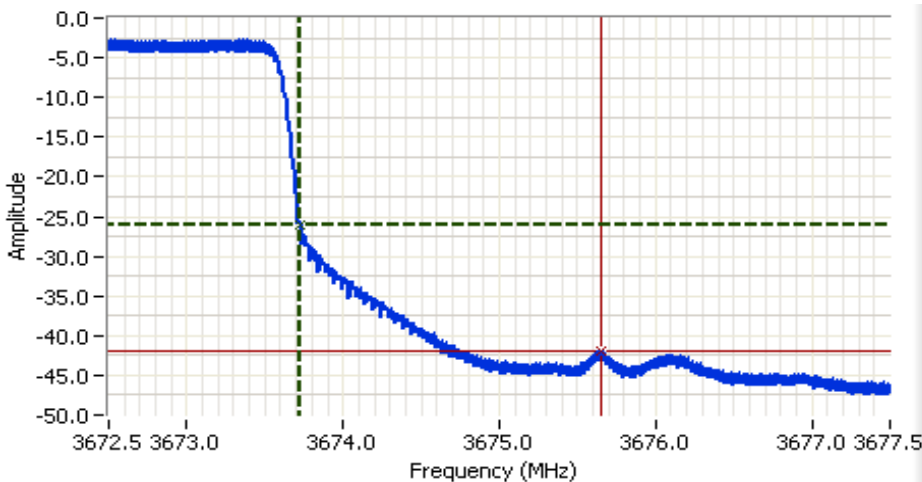

Analyzer Settings
 Agilent Technologies, E4446A
 CF: 3675.000 MHz
 SPAN: 5.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: RMS
 Attn: 10 DB
 RL Offset: 21.0 DB
 Sweep Time: 10.0s
 Ref Lvl: 14.0 DBM

Comments
 BE @ 3675 MHz, Chain 0
 QPSK 10MHz BW

Cursor 1	3673.7240	-26.00	
Cursor 2	3675.6499	-41.87	

Delta Freq. 1.926
 Delta Amplitude 15.87



Plot for high channel (3669 MHz), power setting(s) = 2200, BW= 10.0, MOD=QPSK
 -41.9dBm in 100 kHz (corrected by $10 \cdot \log(100\text{kHz}/1\text{MHz})$) yeilds -31.9dBm in 1 MHz

Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -



Run #4: Out Of Band Spurious Emissions - Antenna Conducted

Number of transmit chains: 2
 Spurious Limit: -13.0 dBm/MHz eirp
 Adjustment for 2 chains: -3.0 dB adjustment for multiple chains.
 Limit Used On Plots -16.0 dBm/MHz

MIMO Devices: The plots were obtained for each chain individually and the limit was adjusted to account for all chains transmitting simultaneously


Plots Showing Out-Of-Band Emissions (RBW=VBW=1MHz above 1 GHz and 120 kHz below 1 GHz)

Low channel

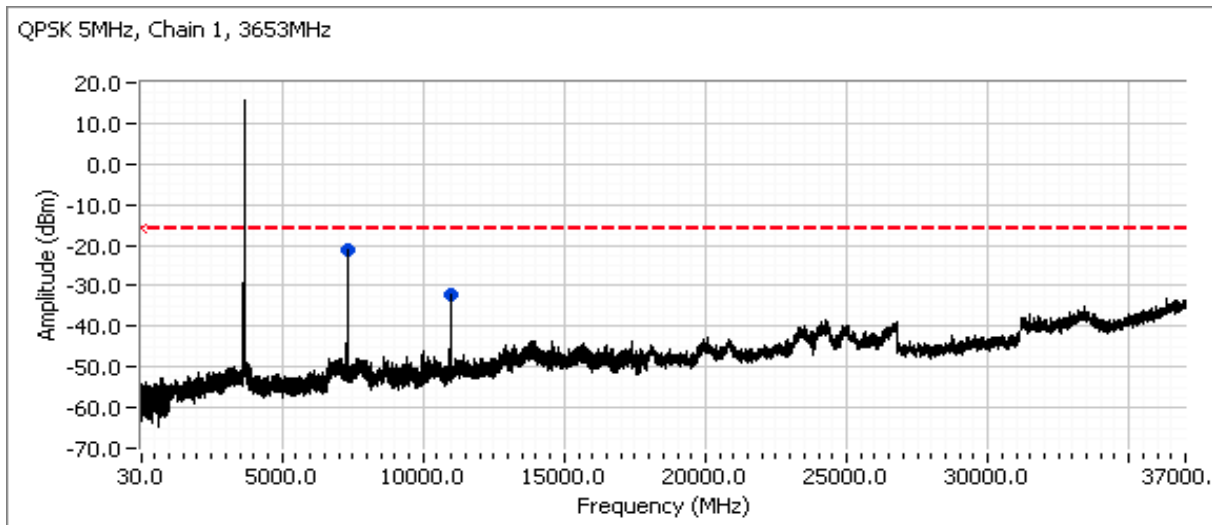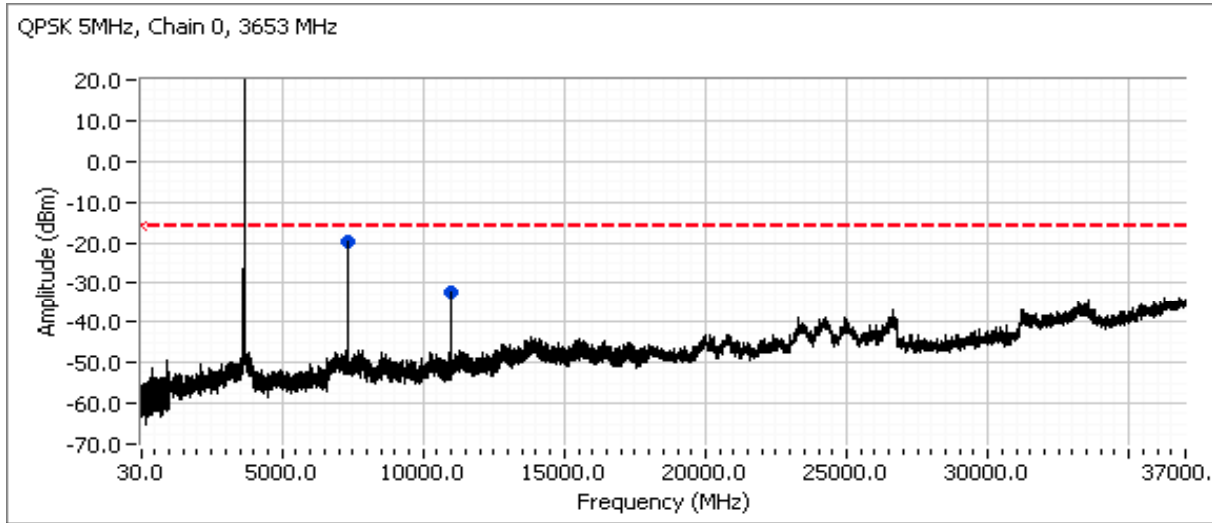


Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -

QPSK 7MHz, Chain 0, 3654 MHz

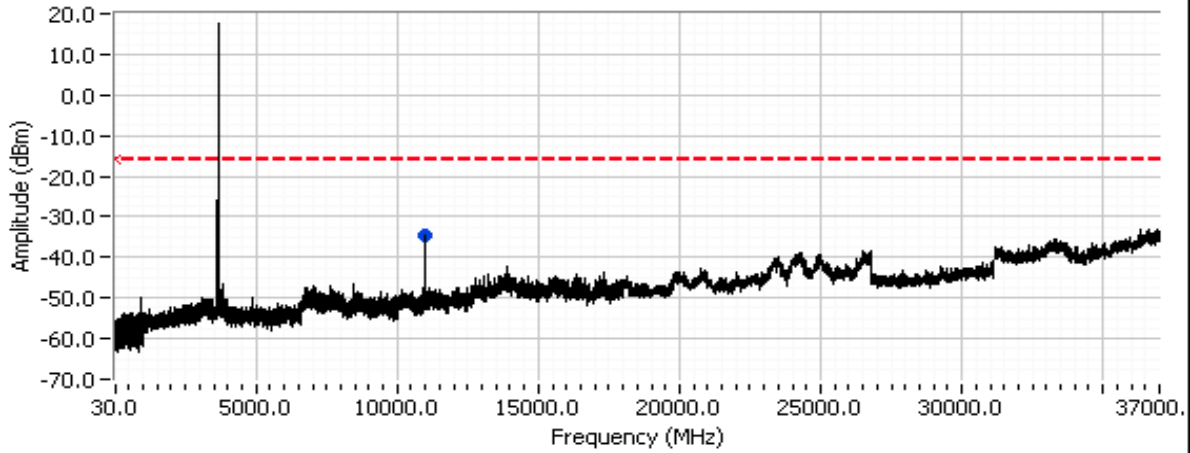



QPSK 7MHz, Chain 1, 3654MHz

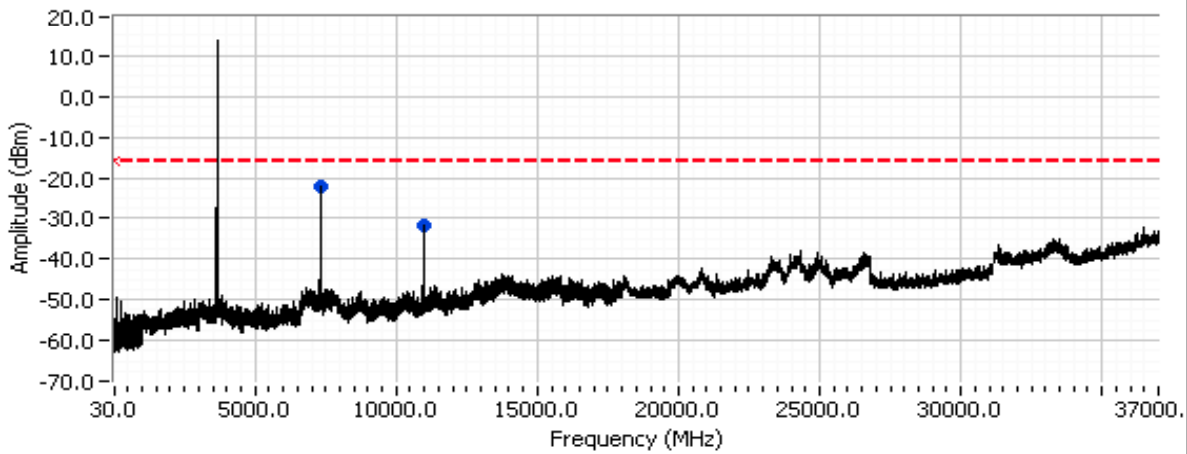



Note: As all the emissions were similar between 5 and 7 Mhz BW modes, testing in the other BW modes was not considered necessary.

Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -

Center channel

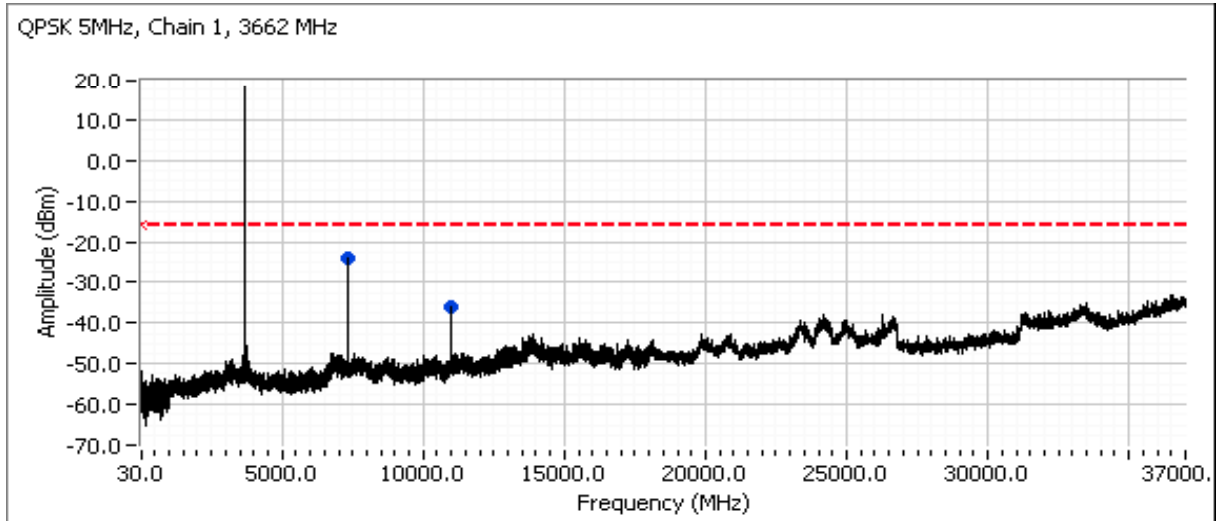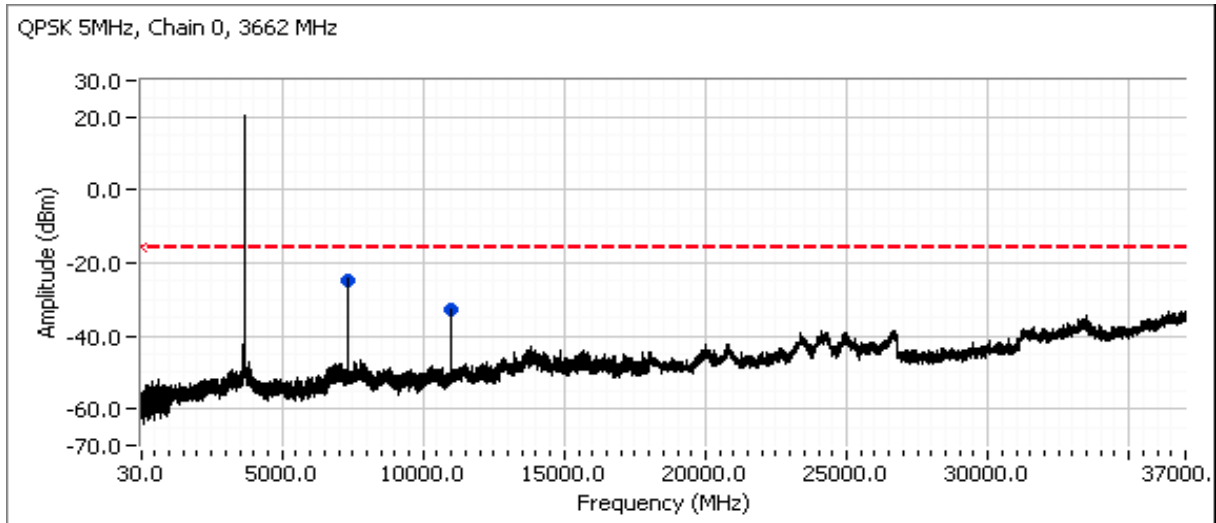



Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
	Account Manager: Susan Pelzl
Contact: Dennis McCarthy	
Standard: FCC Part 90, RSS-119	Class: -

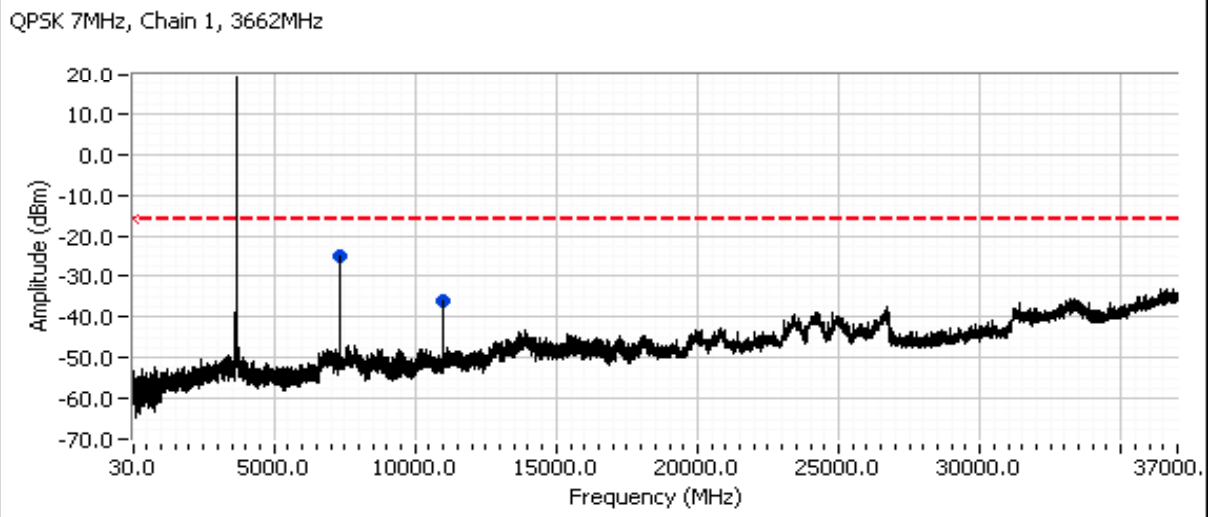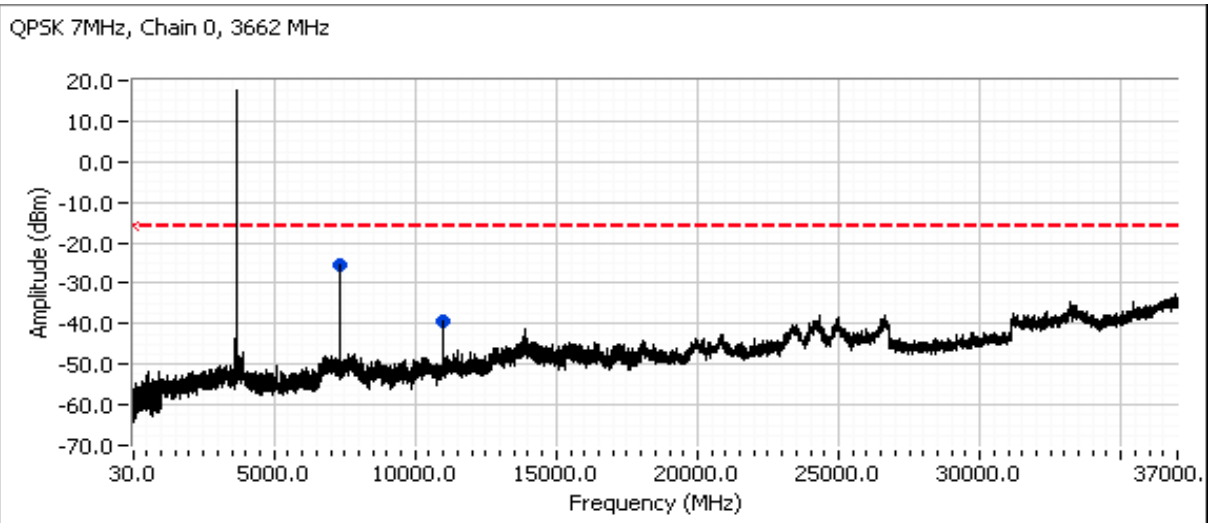



Note: As all the emissions were similar between 5 and 7 Mhz BW modes, testing in the other BW modes was not considered necessary.

Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -

High channel

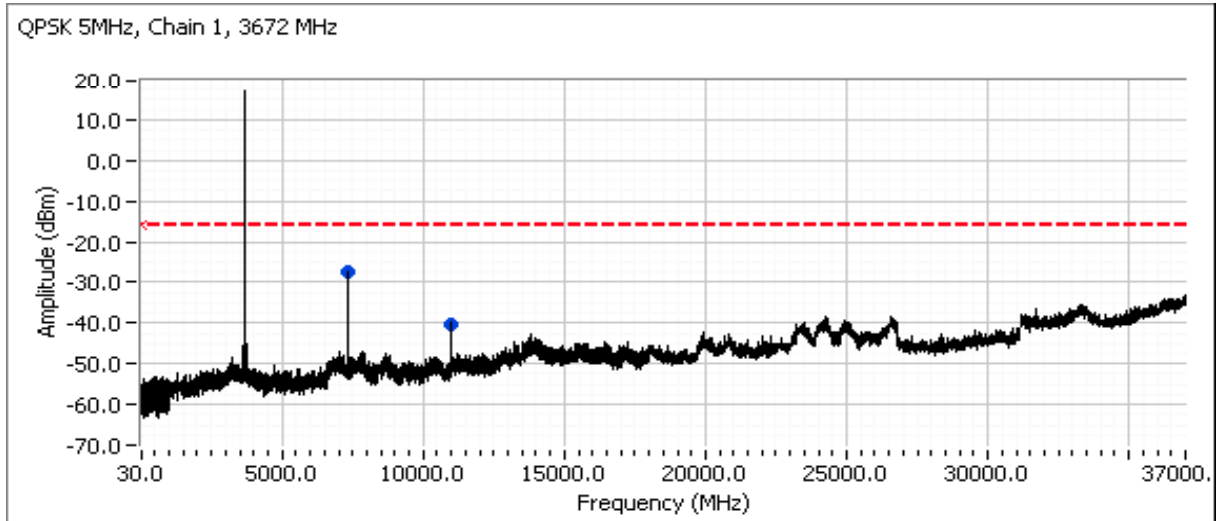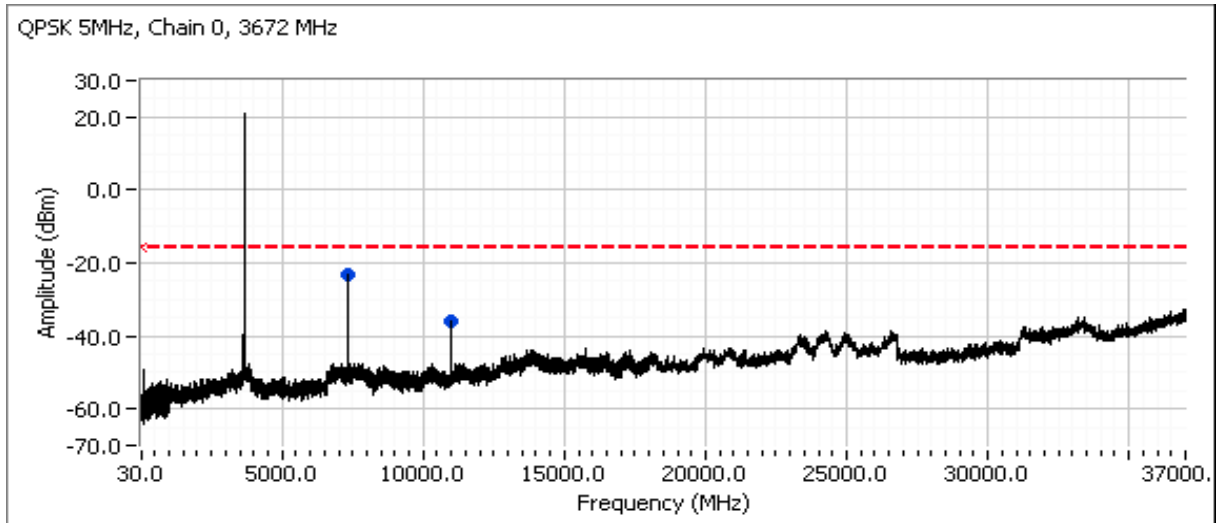

Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC Part 90, RSS-119	Class: -

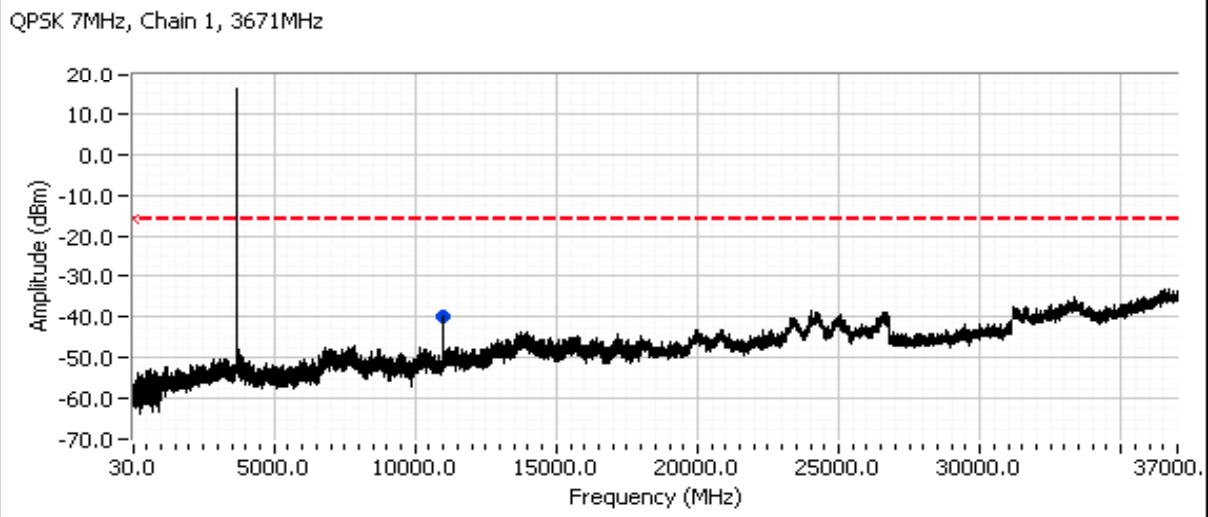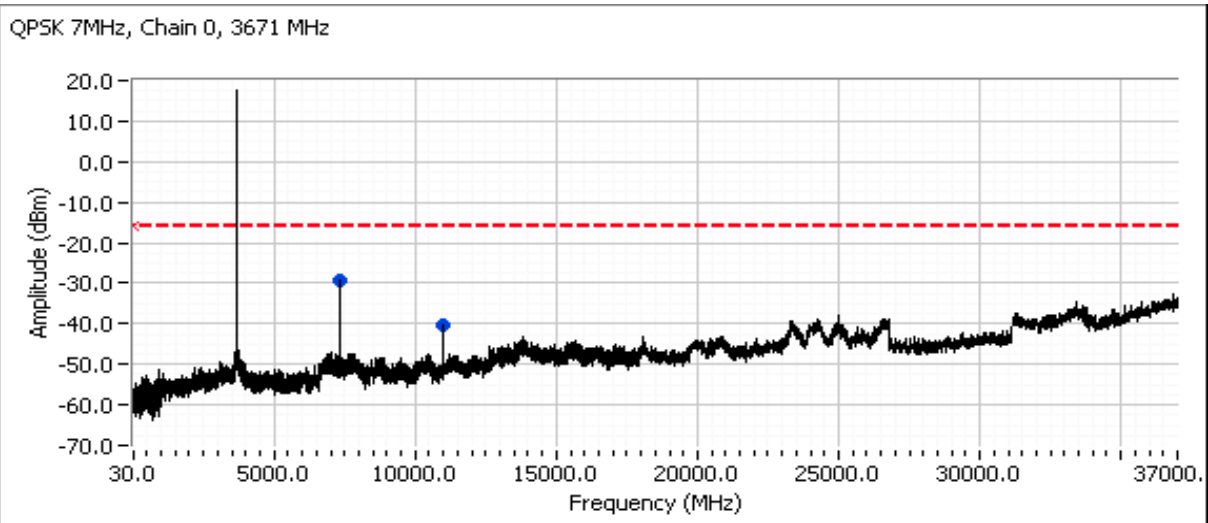

Note: As all the emissions were similar between 5 and 7 Mhz BW modes, testing in the other BW modes was not considered necessary.



EMC Test Data

Client: GE MDS LLC	Job Number: J81612
Model: MERCURY ODU	T-Log Number: J81815
	Account Manager: Susan Pelzl
Contact: Dennis McCarthy	
Standard: FCC Part 90, RSS-119	Class: -

Frequency MHz	Level dBm	Port	FCC Part 90		Detector	Channel	Mode	Comments
			Limit	Margin				
7323.110	-25.0	RF	-16.0	-9.0	Peak	QPSK 5MHz, chain 0, 3662 MHz		
10989.660	-33.0	RF	-16.0	-17.0	Peak	QPSK 5MHz, chain 0, 3662 MHz		
7326.110	-23.0	RF	-16.0	-7.0	Peak	QPSK 5MHz, chain 0, 3672 MHz		
10989.660	-35.8	RF	-16.0	-19.8	Peak	QPSK 5MHz, chain 0, 3672 MHz		
7305.100	-19.7	RF	-16.0	-3.7	Peak	QPSK 5MHz, chain 0, 3653 MHz		
10957.650	-32.3	RF	-16.0	-16.3	Peak	QPSK 5MHz, chain 0, 3653 MHz		
7323.110	-24.0	RF	-16.0	-8.0	Peak	QPSK 5MHz, chain 1, 3662 MHz		
10989.660	-35.9	RF	-16.0	-19.9	Peak	QPSK 5MHz, chain 1, 3662 MHz		
7344.110	-27.5	RF	-16.0	-11.5	Peak	QPSK 5MHz, chain 1, 3672 MHz		
11013.670	-40.2	RF	-16.0	-24.2	Peak	QPSK 5MHz, chain 1, 3672 MHz		
7305.100	-21.2	RF	-16.0	-5.2	Peak	QPSK 5MHz, chain 1, 3653 MHz		
10957.650	-32.0	RF	-16.0	-16.0	Peak	QPSK 5MHz, chain 1, 3653 MHz		
7323.110	-24.8	RF	-16.0	-8.8	Peak	QPSK 7MHz, chain 1, 3662 MHz		
10989.660	-36.0	RF	-16.0	-20.0	Peak	QPSK 7MHz, chain 1, 3662 MHz		
11013.670	-40.0	RF	-16.0	-24.0	Peak	QPSK 7MHz, chain 1, 3671 MHz		
7308.100	-22.3	RF	-16.0	-6.3	Peak	QPSK 7MHz, chain 1, 3654 MHz		
10962.990	-31.8	RF	-16.0	-15.8	Peak	QPSK 7MHz, chain 1, 3654 MHz		
7326.110	-25.7	RF	-16.0	-9.7	Peak	QPSK 7MHz, chain 0, 3662 MHz		
10984.330	-39.5	RF	-16.0	-23.5	Peak	QPSK 7MHz, chain 0, 3662 MHz		
7338.110	-29.3	RF	-16.0	-13.3	Peak	QPSK 7MHz, chain 0, 3671 MHz		
11008.340	-40.3	RF	-16.0	-24.3	Peak	QPSK 7MHz, chain 0, 3671 MHz		
10960.320	-34.7	RF	-16.0	-18.7	Peak	QPSK 7MHz, chain 0, 3654 MHz		

End of Report

This page is intentionally blank and marks the last page of this test report.