

EMC Test Report

*Application for
Class II Permissive Change/Reassessment*

*Industry Canada RSS-Gen Issue 3 / RSS 210 Issue 8
FCC Part 15 Subpart C*

Model: MESH2400OEM

IC CERTIFICATION #: 101D-MESH2400
FCC ID: E5MDS-MESH2400

APPLICANT: GE MDS LLC
175 Science Parkway
Rochester, NY 14620

TEST SITE(S): Elliott Laboratories
41039 Boyce Road.
Fremont, CA. 94538-2435

IC SITE REGISTRATION #: 2845B-3; 2845B-4, 2845B-7

REPORT DATE: February 2, 2011

FINAL TEST DATES: November 4, December 8 and 9, 2011


TOTAL NUMBER OF PAGES: 44

PROGRAM MGR /
TECHNICAL REVIEWER:



David W. Bare
Chief Engineer

QUALITY ASSURANCE DELEGATE /
FINAL REPORT PREPARER:

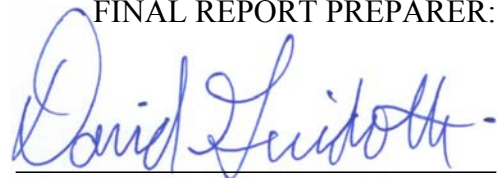

David Guidotti
Senior Technical Writer



Elliott Laboratories is accredited by the A2LA, certificate number 0214.26, to perform the test(s) listed in this report, except where noted otherwise. This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full

REVISION HISTORY

Rev#	Date	Comments	Modified By
-	2/2/2012	First release	

TABLE OF CONTENTS

REVISION HISTORY	2
TABLE OF CONTENTS	3
SCOPE.....	4
OBJECTIVE	5
STATEMENT OF COMPLIANCE.....	6
DEVIATIONS FROM THE STANDARDS.....	6
TEST RESULTS SUMMARY	7
DIGITAL TRANSMISSION SYSTEMS (2400 – 2483.5MHZ).....	7
GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS.....	7
MEASUREMENT UNCERTAINTIES.....	8
EQUIPMENT UNDER TEST (EUT) DETAILS.....	9
GENERAL.....	9
OTHER EUT DETAILS.....	9
ANTENNA SYSTEM.....	9
ENCLOSURE.....	9
MODIFICATIONS.....	9
SUPPORT EQUIPMENT.....	9
EUT INTERFACE PORTS.....	10
EUT OPERATION.....	10
PROPOSED MODIFICATION DETAILS.....	10
GENERAL.....	10
PRINTED WIRING BOARD LAYOUT.....	10
TEST SITE.....	11
GENERAL INFORMATION.....	11
CONDUCTED EMISSIONS CONSIDERATIONS.....	11
RADIATED EMISSIONS CONSIDERATIONS.....	11
MEASUREMENT INSTRUMENTATION	12
RECEIVER SYSTEM.....	12
INSTRUMENT CONTROL COMPUTER.....	12
LINE IMPEDANCE STABILIZATION NETWORK (LISN).....	12
FILTERS/ATTENUATORS.....	13
ANTENNAS.....	13
ANTENNA MAST AND EQUIPMENT TURNTABLE.....	13
INSTRUMENT CALIBRATION.....	13
TEST PROCEDURES	14
EUT AND CABLE PLACEMENT.....	14
CONDUCTED EMISSIONS.....	14
RADIATED EMISSIONS.....	15
CONDUCTED EMISSIONS FROM ANTENNA PORT.....	17
BANDWIDTH MEASUREMENTS.....	17
SPECIFICATION LIMITS AND SAMPLE CALCULATIONS.....	18
CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(A), RSS GEN.....	18
GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS.....	19
RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS.....	19
OUTPUT POWER LIMITS – DIGITAL TRANSMISSION SYSTEMS.....	20
TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS AND DTS SYSTEMS.....	20
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS.....	20
SAMPLE CALCULATIONS - RADIATED EMISSIONS.....	21
SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION.....	22
APPENDIX A TEST EQUIPMENT CALIBRATION DATA	23
APPENDIX B TEST DATA	24
END OF REPORT	44

SCOPE

An electromagnetic emissions test has been performed on the GE MDS LLC model MESH2400OEM, pursuant to the following rules:

Industry Canada RSS-Gen Issue 3

RSS 210 Issue 8 "Low-power License-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment"

FCC Part 15 Subpart C

Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in the following reference standards and as outlined in Elliott Laboratories test procedures:

ANSI C63.4:2003

FCC DTS Measurement Procedure KDB558074, March 2005

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant Industry Canada performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

OBJECTIVE

The primary objective of the manufacturer is compliance with the regulations outlined in the previous section.

Prior to marketing in the USA, all unlicensed transmitters and transceivers require certification. Receive-only devices operating between 30 MHz and 960 MHz are subject to either certification or a manufacturer's declaration of conformity, with all other receive-only devices exempt from the technical requirements.

Prior to marketing in Canada, Class I transmitters, receivers and transceivers require certification. Class II devices are required to meet the appropriate technical requirements but are exempt from certification requirements.

Certification is a procedure where the manufacturer submits test data and technical information to a certification body and receives a certificate or grant of equipment authorization upon successful completion of the certification body's review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

STATEMENT OF COMPLIANCE

The tested sample of GE MDS LLC model MESH2400OEM complied with the requirements of the following regulations:

Industry Canada RSS-Gen Issue 3

RSS 210 Issue 8 "Low-power License-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment"

FCC Part 15 Subpart C

Maintenance of compliance is the responsibility of the manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the device with respect to the standards detailed in this test report.

The test results recorded herein are based on a single type test of GE MDS LLC model MESH2400OEM and therefore apply only to the tested sample. The sample was selected and prepared by Dennis McCarthy of GE MDS LLC.

DEVIATIONS FROM THE STANDARDS

No deviations were made from the published requirements listed in the scope of this report.

TEST RESULTS SUMMARY**DIGITAL TRANSMISSION SYSTEMS (2400 – 2483.5MHz)**

FCC Rule Part	RSS Rule Part	Description	Measured Value / Comments	Limit / Requirement	Result
15.247(a)	RSS 210 A8.2	Digital Modulation	Systems uses DSSS techniques	System must utilize a digital transmission technology	Complies
15.247 (a) (2)	RSS 210 A8.2 (1)	6dB Bandwidth	1.53 MHz	>500kHz	Complies
15.247 (b) (3)	RSS 210 A8.2 (4)	Output Power (multipoint systems)	2.5 mW 20.9 mW 1.8 mW	1Watt, EIRP limited to 4 Watts.	Complies
15.247(d)	RSS 210 A8.2 (2)	Power Spectral Density	7.7 dBm / 3kHz	8dBm/3kHz	Complies
15.247(c)	RSS 210 A8.5	Antenna Port Spurious Emissions 30MHz – 25 GHz	Same as original	< -30dBc ^{Note 2}	Complies
15.247(c) / 15.209	RSS 210 A8.5	Radiated Spurious Emissions 30MHz – 25 GHz	52.0dBuV/m @ 2499.4MHz (-2.0dB)	15.207 in restricted bands, all others <-30dBc ^{Note 2}	Complies
Note 1: EIRP calculated using antenna gain of 4 dBi for the highest EIRP system.					
Note 2: Limit of -30dBc used because the power was measured using the UNII test procedure (maximum power averaged over a transmission burst).					

GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS

FCC Rule Part	RSS Rule part	Description	Measured Value / Comments	Limit / Requirement	Result (margin)
15.203	-	RF Connector	u.fl connector	Unique or integral antenna required	Complies
15.207	RSS GEN Table 2	AC Conducted Emissions	14.0dB μ V @ 0.434MHz (Margin -33.3dB)	Refer to page 18	Complies
15.109	RSS GEN 7.2.3 Table 1	Receiver spurious emissions	39.1dB μ V/m @ 2452.7MHz (Margin -14.9dB)	Refer to page 19	Complies
15.247 (b) (5) 15.407 (f)	RSS 102	RF Exposure Requirements	Refer to MPE calculations, RSS 102 declaration and User Manual statements.	Refer to OET 65, FCC Part 1 and RSS 102	Complies
-	RSP 100 RSS GEN 7.1.5	User Manual		Statement required regarding non-interference	Complies
-	RSP 100 RSS GEN 7.1.5	User Manual		Statement for products with detachable antenna	Complies
-	RSP 100 RSS GEN 4.4.1	99% Bandwidth	2.9 MHz	Information only	N/A

MEASUREMENT UNCERTAINTIES

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with UKAS document LAB 34.

Measurement Type	Measurement Unit	Frequency Range	Expanded Uncertainty
RF power, conducted (power meter)	dBm	25 to 7000 MHz	± 0.52 dB
RF power, conducted (Spectrum analyzer)	dBm	25 to 7000 MHz	± 0.7 dB
Conducted emission of transmitter	dBm	25 to 26500 MHz	± 0.7 dB
Conducted emission of receiver	dBm	25 to 26500 MHz	± 0.7 dB
Radiated emission (substitution method)	dBm	25 to 26500 MHz	± 2.5 dB
Radiated emission (field strength)	dB μ V/m	25 to 1000 MHz	± 3.6 dB
		1000 to 40000 MHz	± 6.0 dB
Conducted Emissions (AC Power)	dB μ V	0.15 to 30 MHz	± 2.4 dB

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The GE MDS LLC model MESH2400OEM is a wireless remote module used to provide remote connectivity over a MESH radio for industrial equipment. For testing purposes the MESH2400OEM was evaluated installed on an adapter board with no enclosure. The combination was tested as table-top equipment. The electrical rating of the EUT is 7-30 Volts DC, .5A max.

The sample was received on November 4, 2011 and tested on November 4, December 8 and 9, 2011. The EUT consisted of the following component(s):

Company	Model	Description	Serial Number	FCC ID
GE MDS LLC	MESH2400 OEM	Wireless Module	1994126	E5MDS-MESH2400

OTHER EUT DETAILS

The EUT operates on 15 equally spaced channels from 2405 to 2475 MHz.

ANTENNA SYSTEM

The module uses a non-standard U.FL antenna connector, thereby meeting the requirements of FCC §15.203.

The antennas used with the system are:

- Omni, GEMDS part number 97-4278A72, 4dBi gain
- Yagi, GE MDS part number 97-4278A01, 10dBi gain
- Panel, GE MDS part number 97-4278A16, 13dBi gain

ENCLOSURE

The Mesh 2400 does not have an enclosure as it is designed to be installed within the enclosure of GE MDS host devices.

MODIFICATIONS

No modifications were made to the EUT during the time the product was at Elliott.

SUPPORT EQUIPMENT

The following equipment was used as local support equipment for testing:

Company	Model	Description	Serial Number	FCC ID
Agilent	E3610A	Power Supply	MY40011740	-
Dell	PP18L	Laptop	14030653249	-

No remote support equipment was used during testing.

EUT INTERFACE PORTS

The I/O cabling configuration during testing was as follows:

Port	Connected To	Description	Cable(s)	
			Shielded or Unshielded	Length(m)
Adapter board RJ11	Laptop	Multiwire	Unshielded	2.0
AC Power (DC Power Supply)	AC Mains	3 Wire	Unshielded	2.0
DC Power (EUT)	DC Power Supply	2 Wire	Unshielded	1.0

EUT OPERATION

During testing, the EUT was set to transmit continuously on the selected channel for transmitter related measurements. Receiver spurious emissions were measured with the EUT configured for receive mode on the selected channel.

PROPOSED MODIFICATION DETAILS**GENERAL**

This section details the modifications to the GE MDS LLC model MESH2400OEM being proposed. All performance and construction deviations from the characteristics originally reported to the FCC are addressed.

PRINTED WIRING BOARD LAYOUT

The printing wiring board is similar to the original certified module except the length has been increased slightly to accommodate a new microcontroller and traces from radio chip to new microcontroller. The radio circuitry and layout is identical to the originally approved device.

TEST SITE**GENERAL INFORMATION**

Final test measurements were taken at the test sites listed below. Pursuant to section 2.948 of the FCC's Rules and section 3.3 of RSP-100, construction, calibration, and equipment data has been filed with the Commission and with industry Canada.

Site	Registration Numbers		Location
	FCC	Canada	
Chamber 3	769238	2845B-3	41039 Boyce Road Fremont, CA 94538-2435
Chamber 4	211948	2845B-4	
Chamber 7	A2LA accreditation	2845B-7	

ANSI C63.4:2003 recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement. The test site(s) contain separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent requirements of ANSI C63.4:2003.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions tests are performed in conformance with ANSI C63.4:2003. Measurements are made with the EUT connected to the public power network through nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

RADIATED EMISSIONS CONSIDERATIONS

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment or in a semi-anechoic chamber. The test sites are maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4:2003 guidelines and meet the Normalized Site Attenuation (NSA) requirements of ANSI C63.4:2003.

MEASUREMENT INSTRUMENTATION

RECEIVER SYSTEM

An EMI receiver as specified in CISPR 16-1-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements. If the repetition frequency of the signal being measured is below 20Hz, peak measurements are made in lieu of Quasi-Peak measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz, unless the signal is pulsed in which case the average (or video) bandwidth of the measuring instrument is reduced to onset of pulse desensitization and then increased.

INSTRUMENT CONTROL COMPUTER

The receivers utilize either a Rohde & Schwarz EZM Spectrum Monitor/Controller or contain an internal Spectrum Monitor/Controller to view and convert the receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers.

The Spectrum Monitor provides a visual display of the signal being measured. In addition, the controller or a personal computer run automated data collection programs which control the receivers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

ANTENNAS

A loop antenna is used below 30 MHz. For the measurement range 30 MHz to 1000 MHz either a combination of a biconical antenna and a log periodic or a bi-log antenna is used. Above 1000 MHz, horn antennas are used. The antenna calibration factors to convert the received voltage to an electric field strength are included with appropriate cable loss and amplifier gain factors to determine an overall site factor, which is then programmed into the test receivers or incorporated into the test software.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height. Measurements below 30 MHz are made with the loop antenna at a fixed height of 1m above the ground plane.

ANSI C63.4:2003 specifies that the test height above ground for table mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

TEST PROCEDURES

EUT AND CABLE PLACEMENT

The regulations require that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4:2003, and the worst-case orientation is used for final measurements.

CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

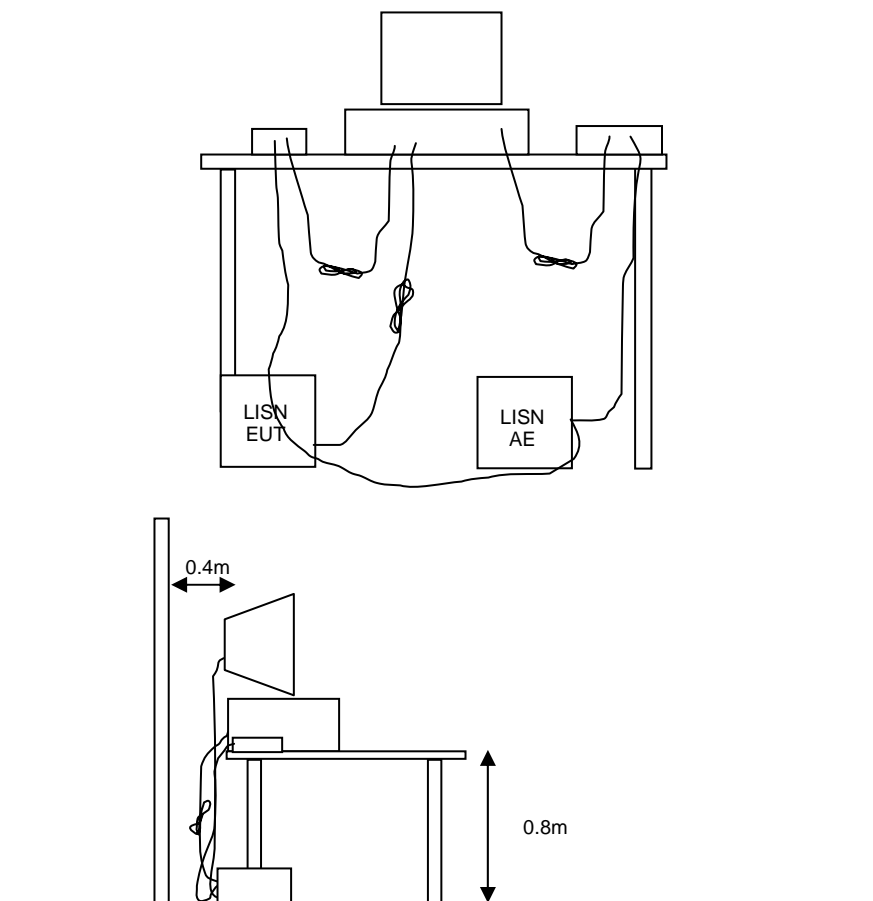


Figure 1 Typical Conducted Emissions Test Configuration


RADIATED EMISSIONS

A preliminary scan of the radiated emissions is performed in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed, one scan for each antenna polarization (horizontal and vertical; loop parallel and perpendicular to the EUT). During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied (for measurements above 30 MHz) and cable positions are varied to determine the highest emission relative to the limit. Preliminary scans may be performed in a fully anechoic chamber for the purposes of identifying the frequencies of the highest emissions from the EUT.


A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth, which results in the highest emission is then maintained while varying the antenna height from one to four meters (for measurements above 30 MHz, measurements below 30 MHz are made with the loop antenna at a fixed height of 1m). The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain.

When testing above 18 GHz, the receive antenna is located at 1 meter from the EUT and the antenna height is restricted to a maximum of 2.5 meters.

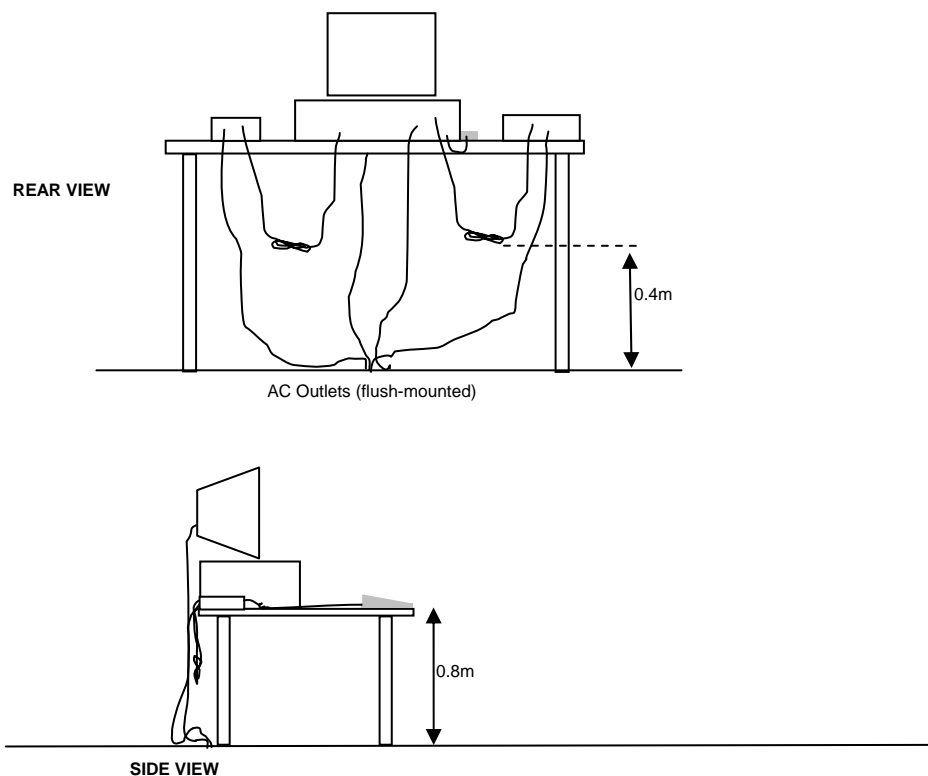


Typical Test Configuration for Radiated Field Strength Measurements

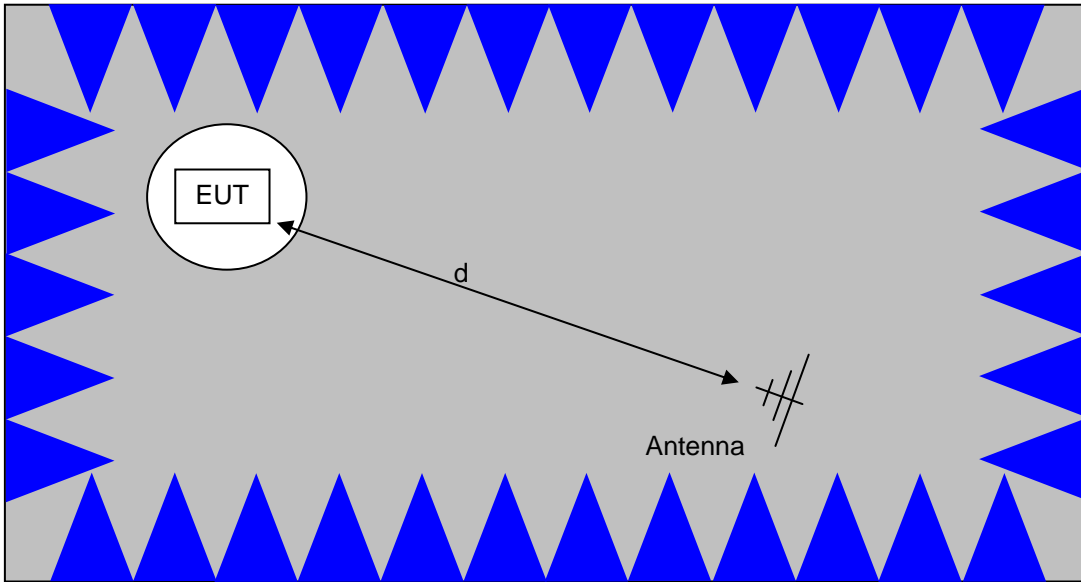

The anechoic materials on the walls and ceiling ensure compliance with the normalized site attenuation requirements of CISPR 16 / CISPR 22 / ANSI C63.4 for an alternate test site at the measurement distances used.


Floor-standing equipment is placed on the floor with insulating supports between the unit and the ground plane.

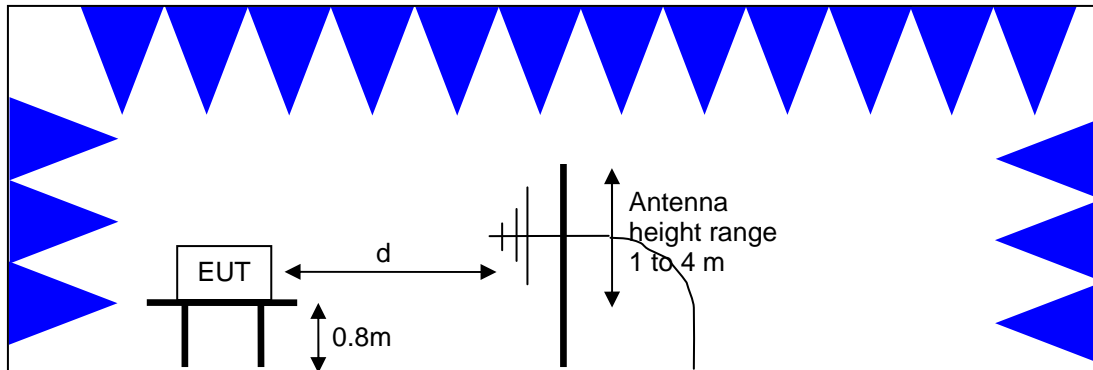

Test Configuration for Radiated Field Strength Measurements
Semi-Anechoic Chamber, Plan and Side Views

CONDUCTED EMISSIONS FROM ANTENNA PORT

Direct measurements of power, bandwidth and power spectral density are performed, where possible, with the antenna port of the EUT connected to either the power meter or spectrum analyzer via a suitable attenuator and/or filter. These are used to ensure that the front end of the measurement instrument is not overloaded by the fundamental transmission.

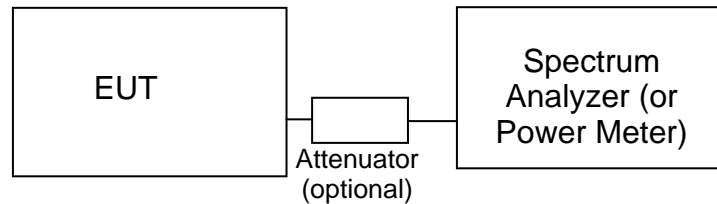**Test Configuration for Antenna Port Measurements**

Measurement bandwidths (video and resolution) are set in accordance with the relevant standards and Elliott's test procedures for the type of radio being tested. When power measurements are made using a resolution bandwidth less than the signal bandwidth the power is calculated by summing the power across the signal bandwidth using either the analyzer channel power function or by capturing the trace data and calculating the power using software. In both cases the summed power is corrected to account for the equivalent noise bandwidth (ENBW) of the resolution bandwidth used.

If power averaging is used (typically for certain digital modulation techniques), the EUT is configured to transmit continuously. Power averaging is performed using either the built-in function of the analyzer or, if the analyzer does not feature power averaging, using external software. In both cases the average power is calculated over a number of sweeps (typically 100). When the EUT cannot be configured to continuously transmit then either the analyzer is configured to perform a gated sweep to ensure that the power is averaged over periods that the device is transmitting or power averaging is disabled and a max-hold feature is used.

If a power meter is used to make output power measurements the sensor head type (peak or average) is stated in the test data table.

BANDWIDTH MEASUREMENTS

The 6dB, 20dB and/or 26dB signal bandwidth is measured in using the bandwidths recommended by ANSI C63.4. When required, the 99% bandwidth is measured using the methods detailed in RSS GEN.

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS

The limits for conducted emissions are given in units of microvolts, and the limits for radiated emissions are given in units of microvolts per meter at a specified test distance. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

For reference, converting the specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. These limits in both linear and logarithmic form are as follows:

CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(a), RSS GEN

The table below shows the limits for the emissions on the AC power line from an intentional radiator and a receiver.

Frequency (MHz)	Average Limit (dBuV)	Quasi Peak Limit (dBuV)
0.150 to 0.500	Linear decrease on logarithmic frequency axis between 56.0 and 46.0	Linear decrease on logarithmic frequency axis between 66.0 and 56.0
0.500 to 5.000	46.0	56.0
5.000 to 30.000	50.0	60.0

GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from transmitters that fall in restricted bands¹ (with the exception of transmitters operating under FCC Part 15 Subpart D and RSS 210 Annex 9), the limits for all emissions from a low power device operating under the general rules of RSS 310 (tables 3 and 4), RSS 210 (table 2) and FCC Part 15 Subpart C section 15.209.

Frequency Range (MHz)	Limit (uV/m)	Limit (dBuV/m @ 3m)
0.009-0.490	2400/F _{KHz} @ 300m	67.6-20*log ₁₀ (F _{KHz}) @ 300m
0.490-1.705	24000/F _{KHz} @ 30m	87.6-20*log ₁₀ (F _{KHz}) @ 30m
1.705 to 30	30 @ 30m	29.5 @ 30m
30 to 88	100 @ 3m	40 @ 3m
88 to 216	150 @ 3m	43.5 @ 3m
216 to 960	200 @ 3m	46.0 @ 3m
Above 960	500 @ 3m	54.0 @ 3m

RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from receivers as detailed in FCC Part 15.109, RSS 210 Table 2, RSS GEN Table 1 and RSS 310 Table 3. Note that receivers operating outside of the frequency range 30 MHz – 960 MHz are exempt from the requirements of 15.109.

Frequency Range (MHz)	Limit (uV/m @ 3m)	Limit (dBuV/m @ 3m)
30 to 88	100	40
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

¹ The restricted bands are detailed in FCC 15.203, RSS 210 Table 1 and RSS 310 Table 2

OUTPUT POWER LIMITS – DIGITAL TRANSMISSION SYSTEMS

The table below shows the limits for output power and output power density. Where the signal bandwidth is less than 20 MHz the maximum output power is reduced to the power spectral density limit plus 10 times the log of the bandwidth (in MHz).

Operating Frequency (MHz)	Output Power	Power Spectral Density
902 – 928	1 Watt (30 dBm)	8 dBm/3kHz
2400 – 2483.5	1 Watt (30 dBm)	8 dBm/3kHz
5725 – 5850	1 Watt (30 dBm)	8 dBm/3kHz

The maximum permitted output power is reduced by 1dB for every dB the antenna gain exceeds 6dBi. Fixed point-to-point applications using the 5725 – 5850 MHz band are not subject to this restriction.

TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS and DTS SYSTEMS

The limits for unwanted (spurious) emissions from the transmitter falling in the restricted bands are those specified in the general limits sections of FCC Part 15 and RSS 210. All other unwanted (spurious) emissions shall be at least 20dB below the level of the highest in-band signal level (30dB if the power is measured using the sample detector/power averaging method).

SAMPLE CALCULATIONS - CONDUCTED EMISSIONS

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_r - S = M$$

where:

R_r = Receiver Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

A distance factor, when used for electric field measurements above 30MHz, is calculated by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

$$F_d = \text{Distance Factor in dB}$$

$$D_m = \text{Measurement Distance in meters}$$

$$D_s = \text{Specification Distance in meters}$$

For electric field measurements below 30MHz the extrapolation factor is either determined by making measurements at multiple distances or a theoretical value is calculated using the formula:

$$F_d = 40 * \text{LOG}_{10} (D_m/D_s)$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

$$R_r = \text{Receiver Reading in dBuV/m}$$

$$F_d = \text{Distance Factor in dB}$$

$$R_c = \text{Corrected Reading in dBuV/m}$$

$$L_s = \text{Specification Limit in dBuV/m}$$

$$M = \text{Margin in dB Relative to Spec}$$

SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION

Where the radiated electric field strength is expressed in terms of the equivalent isotropic radiated power (eirp), or where a field strength measurement of output power is made in lieu of a direct measurement, the following formula is used to convert between eirp and field strength at a distance of d (meters) from the equipment under test:

$$E = \frac{1000000 \sqrt{30 P}}{d} \quad \text{microvolts per meter}$$

where P is the eirp (Watts)

For a measurement at 3m the conversion from a logarithmic value for field strength (dBuV/m) to an eirp power (dBm) is -95.3dB.

Appendix A Test Equipment Calibration Data**Conducted Emissions - AC Power Ports, 04-Nov-11**

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Rohde & Schwarz	Pulse Limiter	ESH3 Z2	1401	4/21/2012
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1538	11/15/2011
Fischer Custom Comm	LISN, 25A, 150kHz to 30MHz, 25 Amp,	FCC-LISN-50-25-2- 09	2000	10/18/2012
Fischer Custom Comm	LISN, 25A, 150kHz to 30MHz, 25 Amp,	FCC-LISN-50-25-2- 09	2001	9/15/2012

Radio Antenna Port (Power), 08-Dec-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1630	4/13/2012

Radiated Emissions, 1000 - 26,500 MHz, 09-Dec-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	Microwave Preamplifier, 1- 26.5GHz	8449B	263	12/9/2012
EMCO	Antenna, Horn, 1-18 GHz (SA40-Red)	3115	1142	8/2/2012
Hewlett Packard	SpecAn 30 Hz -40 GHz, SV (SA40) Red	8564E (84125C)	1148	8/15/2012
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	1683	8/3/2012

Appendix B Test Data

T85356 Pages 25 - 43



EMC Test Data

Client:	GE MDS LLC	Job Number:	J85302
Model:	MESH2400OEM	T-Log Number:	T85356
		Account Manager:	Susan Pelzl
Contact:	Dennis McCarthy		-
Emissions Standard(s):	FCC 15.247 / RSS 210 / EN 300 440	Class:	B
Immunity Standard(s):	EN 301 489-1, -3	Environment:	-

EMC Test Data

For The

GE MDS LLC

Model

MESH2400OEM

Date of Last Test: 1/12/2012

Client:	GE MDS LLC	Job Number:	J85302
Model:	MESH2400OEM	T-Log Number:	T85356
		Account Manager:	Susan Pelzl
Contact:	Dennis McCarthy		
Standard:	FCC 15.247 / RSS 210 / EN 300 440	Class:	N/A

**RSS 210 and FCC 15.247 (DTS) Antenna Port Measurements
Power, PSD, Bandwidth and Spurious Emissions**

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 12/8/2011
 Test Engineer: Rafael Varelas
 Test Location: Fremont Chamber #3

Config. Used: 1
 Config Change: None
 EUT Voltage: 15V DC

General Test Configuration

The EUT was connected to the spectrum analyzer or power meter via a suitable attenuator. All measurements were made on a single chain.

All measurements have been corrected to allow for the external attenuators used.

Ambient Conditions:

Temperature: 21 °C
 Rel. Humidity: 37 %

Summary of Results

Run #	Pwr setting	Channel	Test Performed	Limit	Pass / Fail	Result / Margin
1	9	11	Output Power	15.247(b)	Pass	2.5 mW
	13	18				20.9 mW
	9	25				1.8 mW

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.


Client:	GE MDS LLC	Job Number:	J85302
Model:	MESH2400OEM	T-Log Number:	T85356
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC 15.247 / RSS 210 / EN 300 440	Class:	N/A

Run #1: Output Power

Power Setting ²	Frequency (MHz)	Output Power		Antenna Gain (dBi)	Result	EIRP ^{Note 2}		Output Power	
		(dBm) ¹	mW			dBm	W	(dBm) ³	mW
	Omni Antenna								
9	Channel 11 (2405MHz)	4.0	2.5	4.0	Pass	8.0	0.006	2.4	1.7
13	Channel 18 (2440 MHz)	13.2	20.9	4.0	Pass	17.2	0.052	13.3	21.4
9	Channel 25 (2475 MHz)	2.5	1.8	4.0	Pass	6.5	0.004	1.5	1.4
	Yagi Antenna								
5	Channel 11 (2405MHz)	-3.7	0.4	10.0	Pass	6.3	0.004	-4.1	0.4
6	Channel 18 (2440 MHz)	-1.1	0.8	10.0	Pass	8.9	0.008	-2.2	0.6
6	Channel 25 (2475 MHz)	-1.7	0.7	10.0	Pass	8.3	0.007	-2.6	0.5
	Panel Antenna								
8	Channel 15 (2425MHz)	1.6	1.5	13.0	Pass	14.6	0.029	1.3	1.3
6	Channel 18 (2440 MHz)	-1.1	0.8	13.0	Pass	11.9	0.015	-2.2	0.6
5	Channel 25 (2475 MHz)	-4.1	0.4	13.0	Pass	9.0	0.008	-4.9	0.3

Note 1:	Output power measured using a spectrum analyzer (see plot below) with RBW=1MHz, VB=3 MHz, sample detector, power averaging on (transmitted signal was continuous) and power integration over 10 MHz (option #2, method 1 in KDB 558074, equivalent to method 1 of DA-02-2138A1 for U-NII devices). Spurious limit becomes -30dBc .
Note 2:	Power setting - the software power setting used during testing, included for reference only.
Note 3:	Powers are within 0.5dB of the original filing.

Client:	GE MDS LLC	Job Number:	J85302
Model:	MESH2400OEM	T-Log Number:	T85356
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC 15.247 / RSS 210 / EN 300 440	Class:	N/A

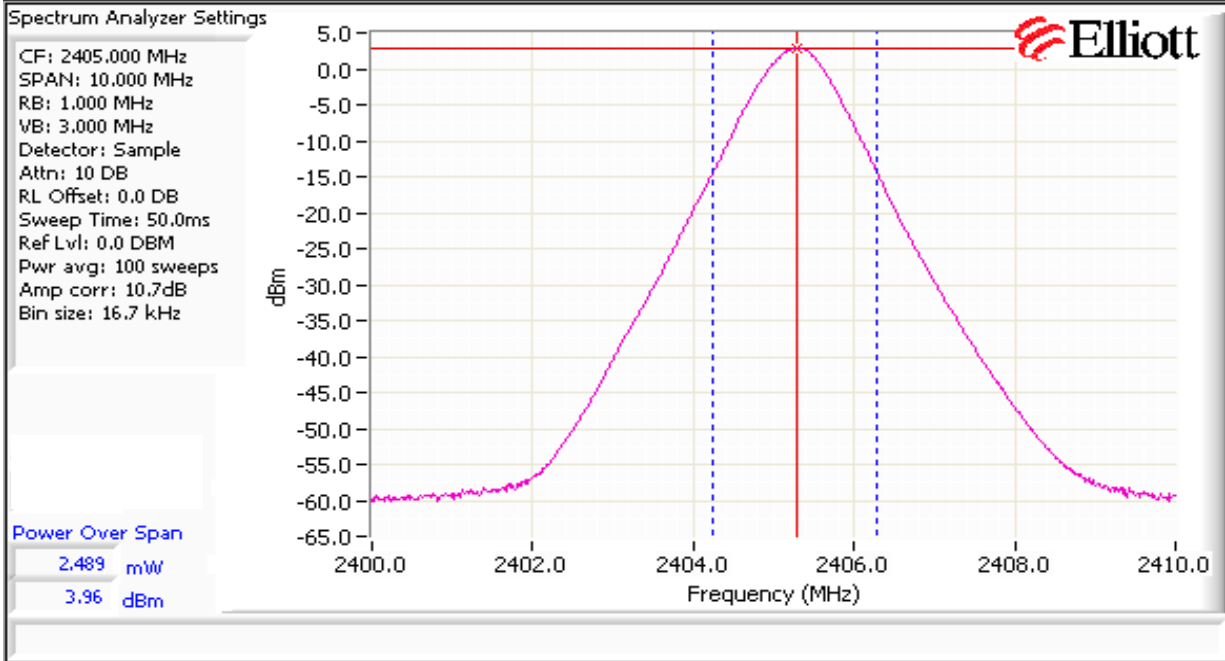

Client:	GE MDS LLC	Job Number:	J85302
Model:	MESH2400OEM	T-Log Number:	T85356
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC 15.247 / RSS 210 / EN 300 440	Class:	N/A

RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature: 20.6 °C
Rel. Humidity: 35 %

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

Run #	Antenna	Channel	Power Setting	Measured Power	Test Performed	Limit	Result / Margin
1a	4dBi Omni	low	9	4.0	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	51.7dBµV/m @ 2381.5MHz (-2.3dB)
			9	4.0	Radiated Emissions, 30MHz - 26GHz	FCC Part 15.209 / 15.247(c)	42.5dBµV/m @ 2213.3MHz (-11.5dB)
1b	4dBi Omni	Middle	12	8.4	Radiated Emissions, 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	51.6dBµV/m @ 2200.2MHz (-2.4dB)
1c	4dBi Omni	high	9	2.5	Restricted Band Edge (2483.5 MHz)	FCC Part 15.209 / 15.247(c)	52.0dBµV/m @ 2499.4MHz (-2.0dB)
			9	2.5	Radiated Emissions, 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	46.5dBµV/m @ 2211.3MHz (-7.5dB)
2a	10dBi Yagi	low	5	-3.7	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	47.5dBµV/m @ 2358.9MHz (-6.5dB)
2b	10dBi Yagi	high	6	-1.7	Restricted Band Edge (2483.5 MHz)	FCC Part 15.209 / 15.247(c)	47.9dBµV/m @ 2484.5MHz (-6.1dB)
3a	13dBi Panel	low	8	1.6	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	48.4dBµV/m @ 2353.2MHz (-5.6dB)

Client:	GE MDS LLC	Job Number:	J85302
Model:	MESH2400OEM	T-Log Number:	T85356
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC 15.247 / RSS 210 / EN 300 440	Class:	N/A

Run #	Antenna	Channel	Power Setting	Measured Power	Test Performed	Limit	Result / Margin
3b	13dBi Panel	high	5	-4.1	Restricted Band Edge (2483.5 MHz)	FCC Part 15.209 / 15.247(c)	48.4dB μ V/m @ 2353.2MHz (-5.6dB)
4	13dBi Panel	center	Rx	-	Radiated Emissions, 1 - 8 GHz	RSS-210	39.1dB μ V/m @ 2452.7MHz (-14.9dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Based on the limited change to the board,only the above worst case tests from original testing were performed.

Client:	GE MDS LLC	Job Number:	J85302
Model:	MESH2400OEM	T-Log Number:	T85356
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC 15.247 / RSS 210 / EN 300 440	Class:	N/A

Run #1: Radiated Spurious Emissions, 30 - 26,000 MHz.

Date of Test: 12/9/2011
 Test Engineer: Rafael Varelas
 Test Location: FT Chamber #7

Run #1a: Low Channel @ 2405 MHz, EUT with Omni Antenna


Fundamental Signal Field Strength: Peak and average values measured in 1 MHz, and peak value measured in 100kHz

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2405.260	104.0	V	-	-	AVG	186	1.1	RB 1 MHz;VB 10 Hz;Pk
2405.210	104.1	V	-	-	PK	186	1.1	RB 1 MHz;VB 3 MHz;Pk
2405.250	104.1	V	-	-	PK	186	1.1	RB 100 kHz;VB 100 kHz;Pk
2405.290	89.3	H	-	-	AVG	71	1.0	RB 1 MHz;VB 10 Hz;Pk
2405.330	89.5	H	-	-	PK	71	1.0	RB 1 MHz;VB 3 MHz;Pk

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2381.530	51.7	V	54.0	-2.3	AVG	229	1.1	RB 1 MHz;VB 10 Hz;Pk
2381.000	59.2	V	74.0	-14.8	PK	229	1.1	RB 1 MHz;VB 3 MHz;Pk
2350.600	47.2	H	54.0	-6.8	AVG	105	1.3	RB 1 MHz;VB 10 Hz;Pk
2373.530	58.7	H	74.0	-15.3	PK	105	1.3	RB 1 MHz;VB 3 MHz;Pk

RB 1 MHz; VB 10 Hz Avg (Black Trace); Pk (Blue Trace) Vertical

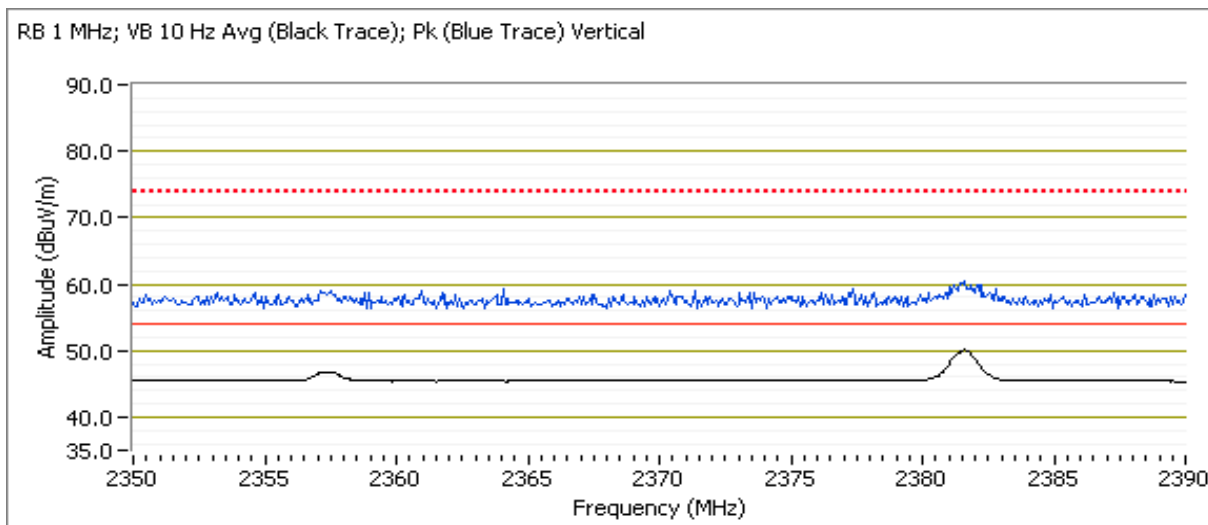



Client:	GE MDS LLC	Job Number:	J85302
Model:	MESH2400OEM	T-Log Number:	T85356
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC 15.247 / RSS 210 / EN 300 440	Class:	N/A

Other Spurious Emissions

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247		Detector PK/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2213.260	42.5	V	54.0	-11.5	AVG	54	1.0	RB 1 MHz;VB 10 Hz;Pk
2213.440	50.9	V	74.0	-23.1	PK	54	1.0	RB 1 MHz;VB 3 MHz;Pk
30.000	20.2	V	40.0	-19.8	Peak	173	1.0	
199.750	23.4	V	43.5	-20.1	Peak	91	1.0	
2093.390	51.4	V	70.0	-18.6	Peak	0	1.0	

Note 1: For emissions in restricted bands, the limit of 15.209 was used.

Note 2: No emissions above 18 GHz were found above the noise floor.

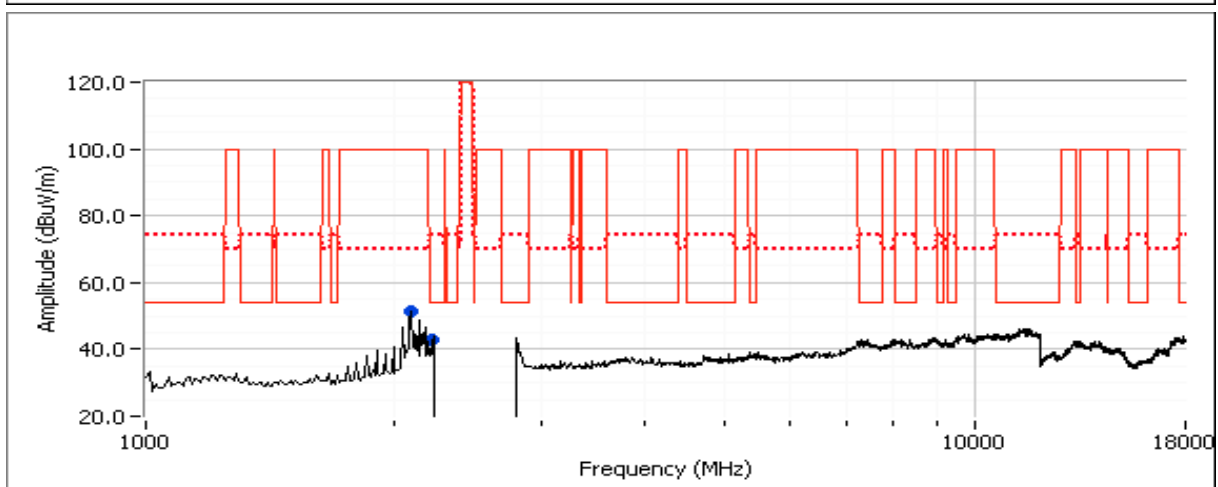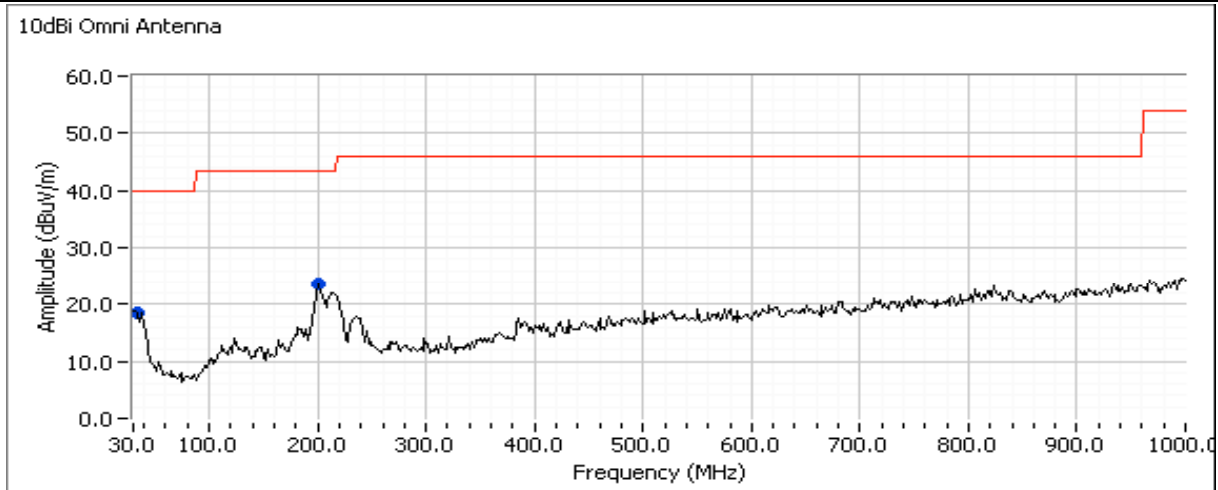


Client:	GE MDS LLC	Job Number:	J85302
Model:	MESH2400OEM	T-Log Number:	T85356
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC 15.247 / RSS 210 / EN 300 440	Class:	N/A

Run #1b: Center Channel @ 2440 MHz, EUT with Omni Antenna

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247		Detector PK/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2200.230	51.6	V	54.0	-2.4	AVG	32	1.0	RB 1 MHz;VB 10 Hz;Pk pwr12
2200.090	56.2	V	74.0	-17.8	PK	32	1.0	RB 1 MHz;VB 3 MHz;Pk pwr12
7320.600	41.9	V	54.0	-12.1	AVG	164	1.3	RB 1 MHz;VB 10 Hz;Pk pwr12
7320.560	50.3	V	74.0	-23.7	PK	164	1.3	RB 1 MHz;VB 3 MHz;Pk pwr12
2080.370	55.9	V	70.0	-14.1	Peak	94	1.0	

- Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.
- Note 2: Since no emisisions below 1GHz were found from the radio on the low channel, testing was limited to 1-18 GHz.

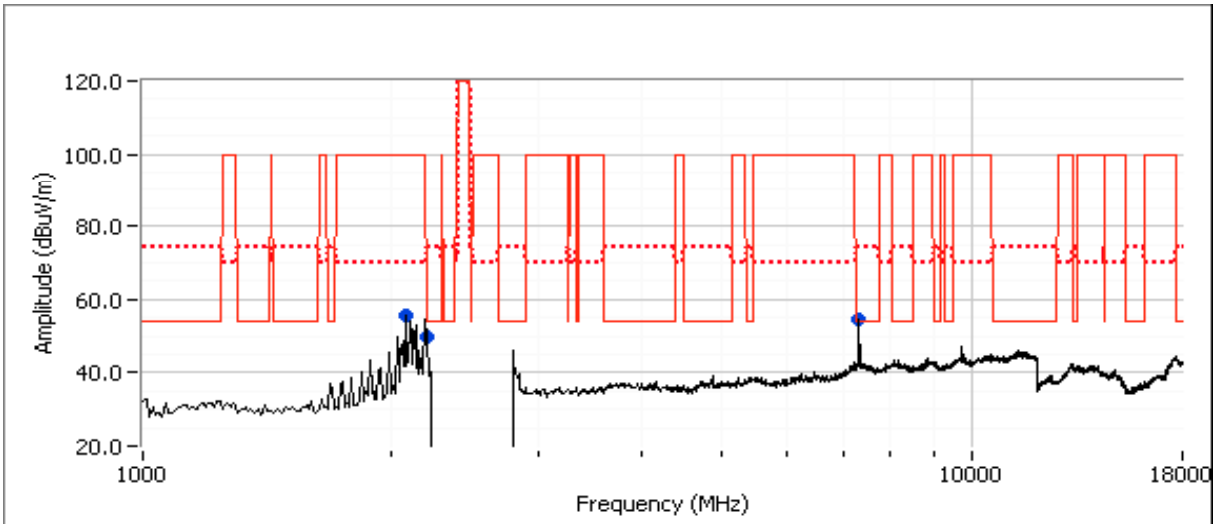

Client:	GE MDS LLC	Job Number:	J85302
Model:	MESH2400OEM	T-Log Number:	T85356
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC 15.247 / RSS 210 / EN 300 440	Class:	N/A

Run #1c: High Channel @ 2475 MHz, EUT with Omni Antenna


Fundamental Signal Field Strength: Peak and average values measured in 1 MHz, and peak value measured in 100kHz

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2475.280	103.5	V	-	-	AVG	266	1.0	RB 1 MHz;VB 10 Hz;Pk
2475.280	103.7	V	-	-	PK	266	1.0	RB 1 MHz;VB 3 MHz;Pk
2475.240	103.6	V	-	-	PK	266	1.0	RB 100 kHz;VB 100 kHz;Pk
2475.300	87.2	H	-	-	AVG	239	1.0	RB 1 MHz;VB 10 Hz;Pk
2475.230	87.4	H	-	-	PK	239	1.0	RB 1 MHz;VB 3 MHz;Pk

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2499.370	52.0	V	54.0	-2.0	AVG	230	1.0	RB 1 MHz;VB 10 Hz;Pk
2499.010	60.8	V	74.0	-13.2	PK	230	1.0	RB 1 MHz;VB 3 MHz;Pk
2498.540	47.8	H	54.0	-6.2	AVG	104	1.0	RB 1 MHz;VB 10 Hz;Pk
2493.760	58.5	H	74.0	-15.5	PK	104	1.0	RB 1 MHz;VB 3 MHz;Pk

RB 1 MHz; VB 10 Hz Avg (Black Trace); Pk (Blue Trace) Vertical

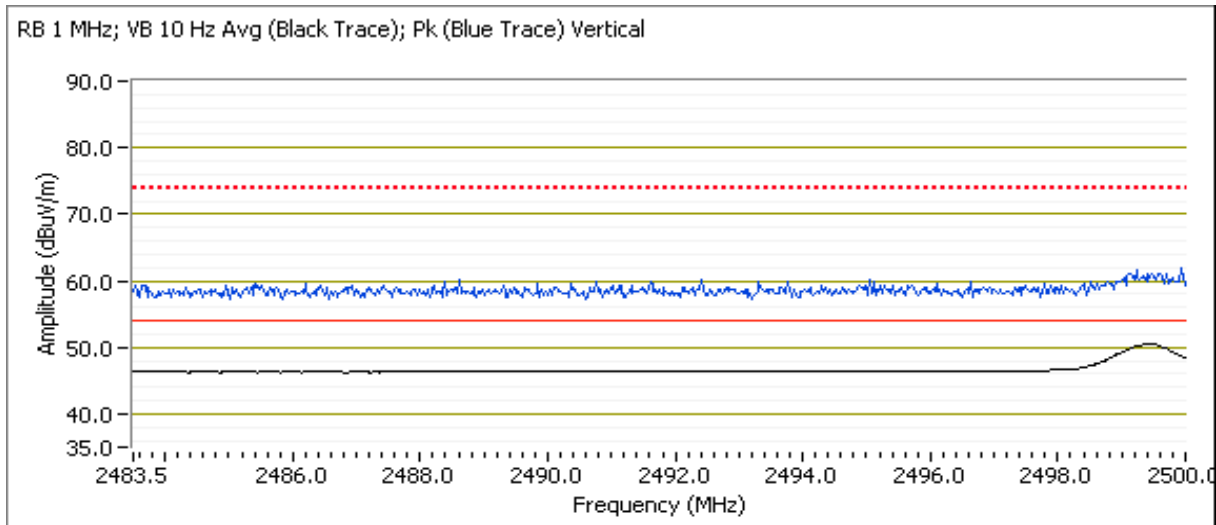


Client:	GE MDS LLC	Job Number:	J85302
Model:	MESH2400OEM	T-Log Number:	T85356
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC 15.247 / RSS 210 / EN 300 440	Class:	N/A

Other Spurious Emissions

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
2211.260	46.5	V	54.0	-7.5	AVG	98	1.0	RB 1 MHz;VB 10 Hz;Pk
2211.110	52.8	V	74.0	-21.2	PK	98	1.0	RB 1 MHz;VB 3 MHz;Pk
2115.390	51.9	V	73.6	-21.7	Peak	217	1.0	

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is not in a restricted band but the more stringent restricted band limit was used.

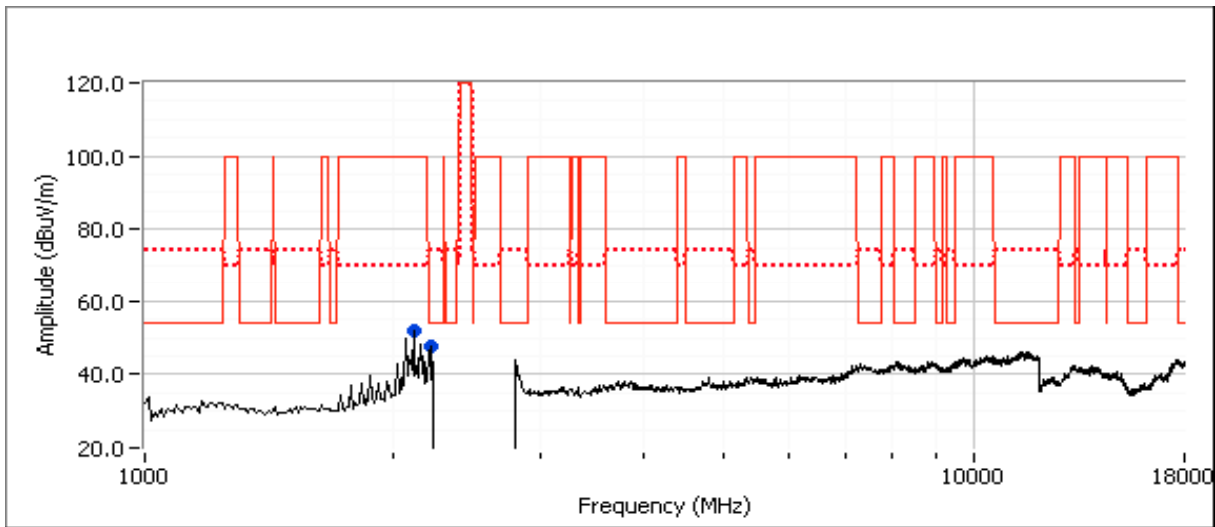


Client:	GE MDS LLC	Job Number:	J85302
Model:	MESH2400OEM	T-Log Number:	T85356
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC 15.247 / RSS 210 / EN 300 440	Class:	N/A

Run #2a: Low Channel @ 2405 MHz, EUT with Yagi Antenna

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2358.870	47.5	V	54.0	-6.5	AVG	202	1.0	RB 1 MHz;VB 10 Hz;Pk
2362.600	59.5	V	74.0	-14.5	PK	202	1.0	RB 1 MHz;VB 3 MHz;Pk
2350.730	47.3	H	54.0	-6.7	AVG	20	1.0	RB 1 MHz;VB 10 Hz;Pk
2389.730	58.9	H	74.0	-15.1	PK	20	1.0	RB 1 MHz;VB 3 MHz;Pk

RB 1 MHz; VB 10 Hz Avg (Black Trace); Pk (Blue Trace) Vertical

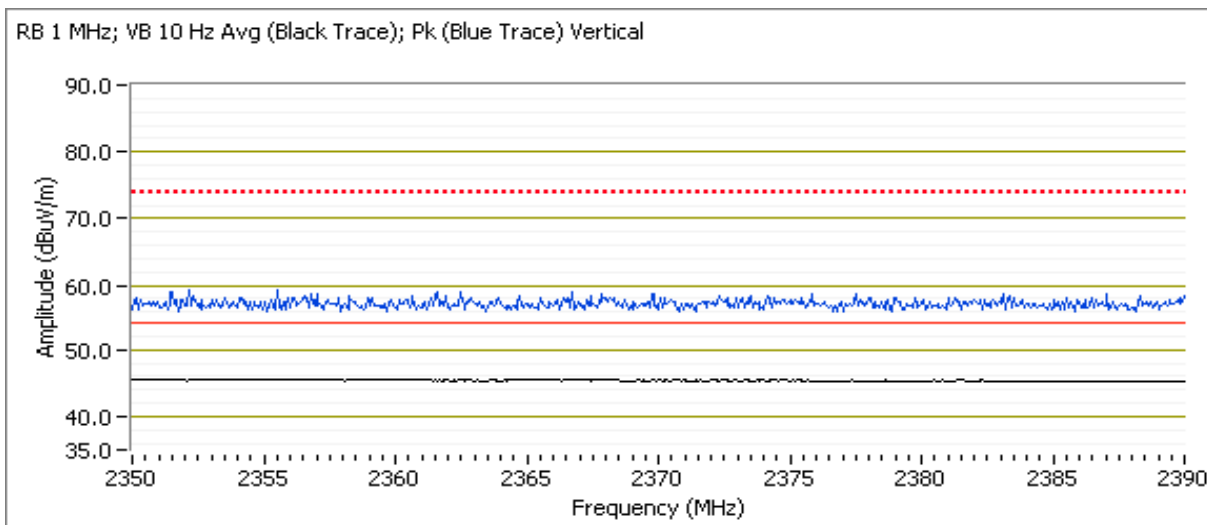


Client:	GE MDS LLC	Job Number:	J85302
Model:	MESH2400OEM	T-Log Number:	T85356
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC 15.247 / RSS 210 / EN 300 440	Class:	N/A

Run #2b: High Channel @ 2475 MHz, EUT with Yagi Antenna

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2484.490	47.9	V	54.0	-6.1	AVG	176	1.0	RB 1 MHz;VB 10 Hz;Pk
2483.870	58.7	V	74.0	-15.3	PK	176	1.0	RB 1 MHz;VB 3 MHz;Pk
2499.170	47.8	H	54.0	-6.2	AVG	272	1.0	RB 1 MHz;VB 10 Hz;Pk
2487.680	58.8	H	74.0	-15.2	PK	272	1.0	RB 1 MHz;VB 3 MHz;Pk

RB 1 MHz; VB 10 Hz Avg (Black Trace); Pk (Blue Trace) Vertical

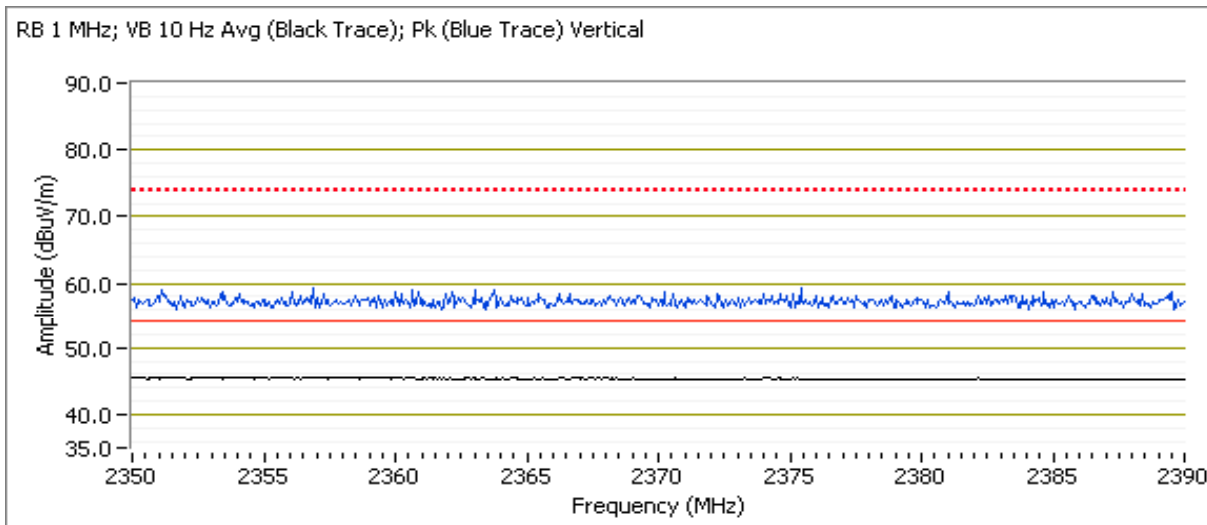


Client:	GE MDS LLC	Job Number:	J85302
Model:	MESH2400OEM	T-Log Number:	T85356
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC 15.247 / RSS 210 / EN 300 440	Class:	N/A

Run #3a: Low Channel @ 2425 MHz, EUT with Panel Antenna
Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
2353.200	48.4	H	54.0	-5.6	AVG	168	1.0	RB 1 MHz;VB 10 Hz;Pk
2363.400	59.0	H	74.0	-15.0	PK	168	1.0	RB 1 MHz;VB 3 MHz;Pk
2350.730	47.2	V	54.0	-6.8	AVG	99	1.0	RB 1 MHz;VB 10 Hz;Pk
2368.270	58.6	V	74.0	-15.4	PK	99	1.0	RB 1 MHz;VB 3 MHz;Pk

RB 1 MHz; VB 10 Hz Avg (Black Trace); Pk (Blue Trace) Horizontal

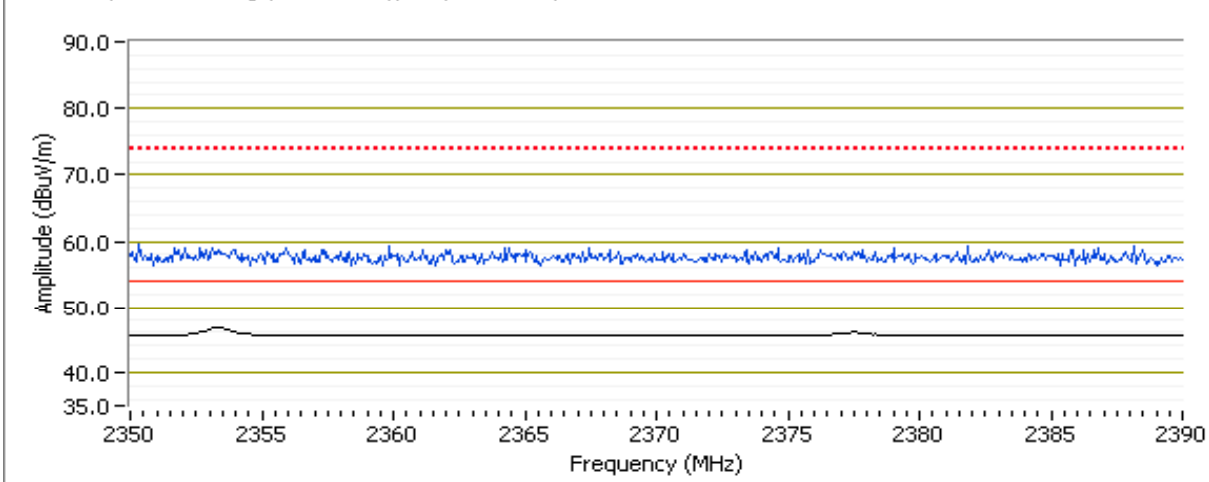


Client:	GE MDS LLC	Job Number:	J85302
Model:	MESH2400OEM	T-Log Number:	T85356
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC 15.247 / RSS 210 / EN 300 440	Class:	N/A

Run #3b: High Channel @ 2475 MHz, EUT with Panel Antenna
Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
2499.090	47.7	H	54.0	-6.3	AVG	269	1.0	RB 1 MHz;VB 10 Hz;Pk
2483.990	59.8	H	74.0	-14.2	PK	269	1.0	RB 1 MHz;VB 3 MHz;Pk
2495.300	47.7	V	54.0	-6.3	AVG	360	1.2	RB 1 MHz;VB 10 Hz;Pk
2493.120	59.7	V	74.0	-14.3	PK	360	1.2	RB 1 MHz;VB 3 MHz;Pk


RB 1 MHz; VB 10 HzAvg (Black Trace); Pk (Blue Trace) Horizontal

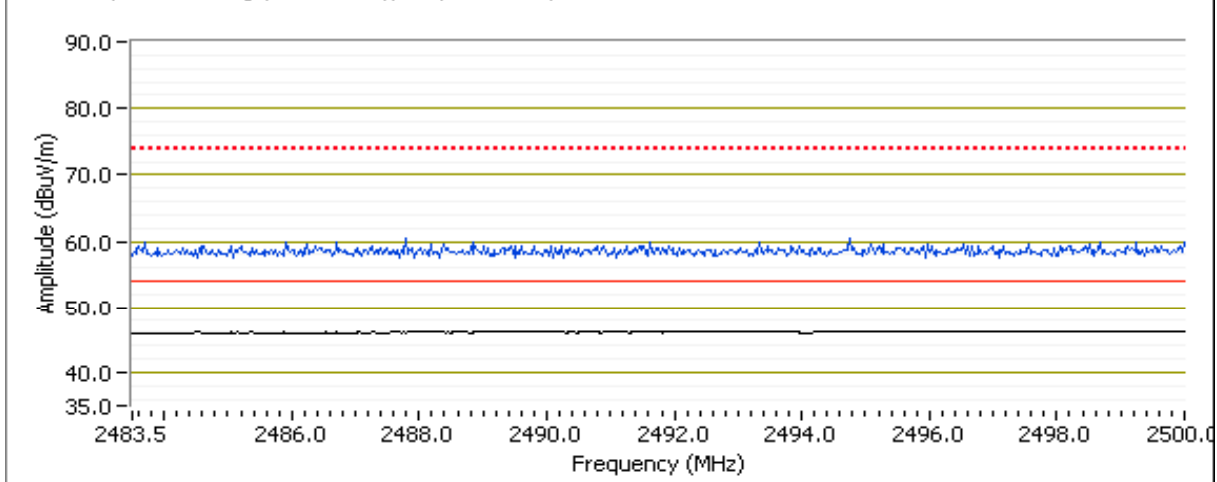

Client:	GE MDS LLC	Job Number:	J85302
Model:	MESH2400OEM	T-Log Number:	T85356
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC 15.247 / RSS 210 / EN 300 440	Class:	N/A

Run #4: Center Channel @ 2440 MHz, EUT with Panel Antenna

Frequency MHz	Level dB μ V/m	Pol v/h	RSS-210		Detector PK/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2452.690	39.1	V	54.0	-14.9	AVG	318	1.3	RB 1 MHz;VB 10 Hz;Pk
2452.170	43.8	V	74.0	-30.2	PK	318	1.3	RB 1 MHz;VB 3 MHz;Pk

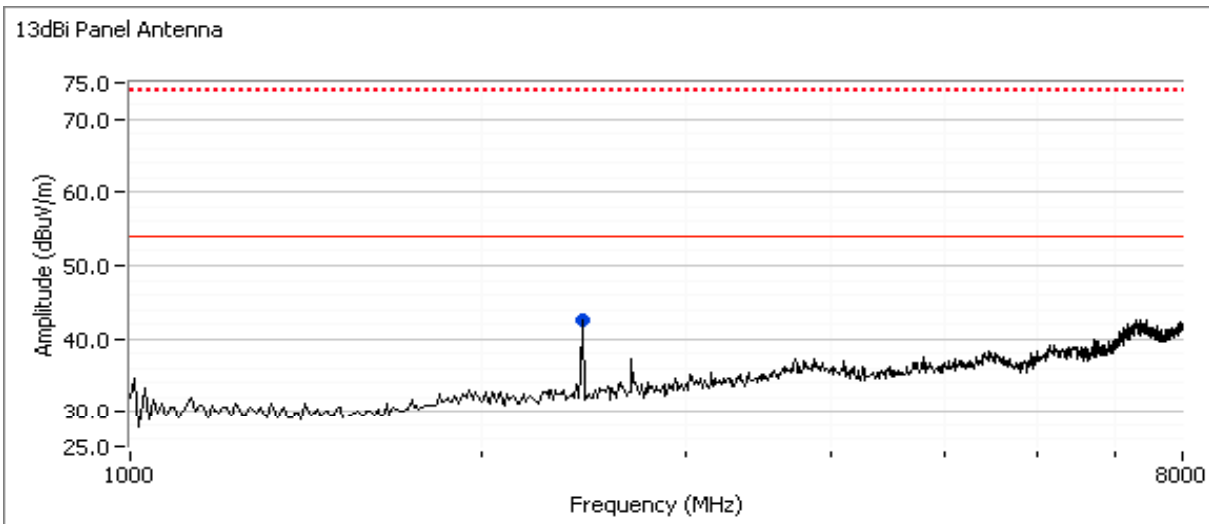

Client:	GE MDS LLC	Job Number:	J85302
Model:	MESH2400OEM	T-Log Number:	T85356
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC 15.247 / RSS 210 / EN 300 440	Class:	B

Conducted Emissions

(Elliott Laboratories Fremont Facility, Semi-Anechoic Chamber)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 11/4/2011
 Test Engineer: Vishal Narayan
 Test Location: Fremont Chamber #4

Config. Used: 1
 Config Change: None
 EUT Voltage: 120V/60Hz

General Test Configuration

For tabletop equipment, the EUT was located on a wooden table inside the semi-anechoic chamber, 40 cm from a vertical coupling plane and 80cm from the LISN. A second LISN was used for all local support equipment. Remote support equipment was located outside of the semi-anechoic chamber. Any cables running to remote support equipment were routed through metal conduit and when possible passed through a ferrite clamp upon exiting the chamber.

Ambient Conditions:
 Temperature: 20 °C
 Rel. Humidity: 41 %

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	CE, AC Power, 120V/60Hz	Class B	Pass	14.0dBµV @ 0.434MHz (-33.2dB)

Modifications Made During Testing



No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client: GE MDS LLC	Job Number: J85302
Model: MESH2400OEM	T-Log Number: T85356
Contact: Dennis McCarthy	Account Manager: Susan Pelzl
Standard: FCC 15.247 / RSS 210 / EN 300 440	Class: B

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz

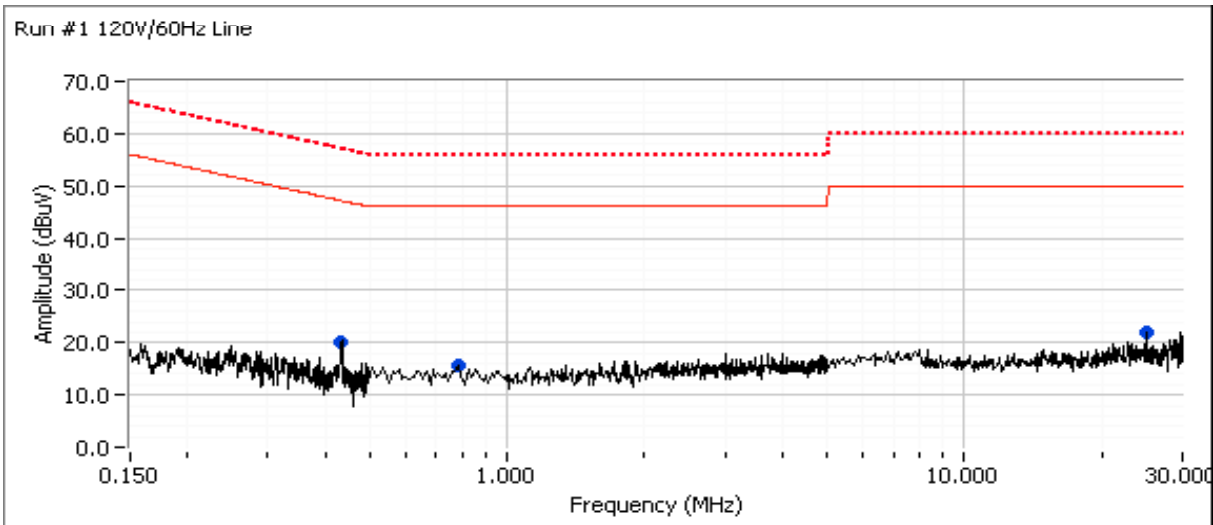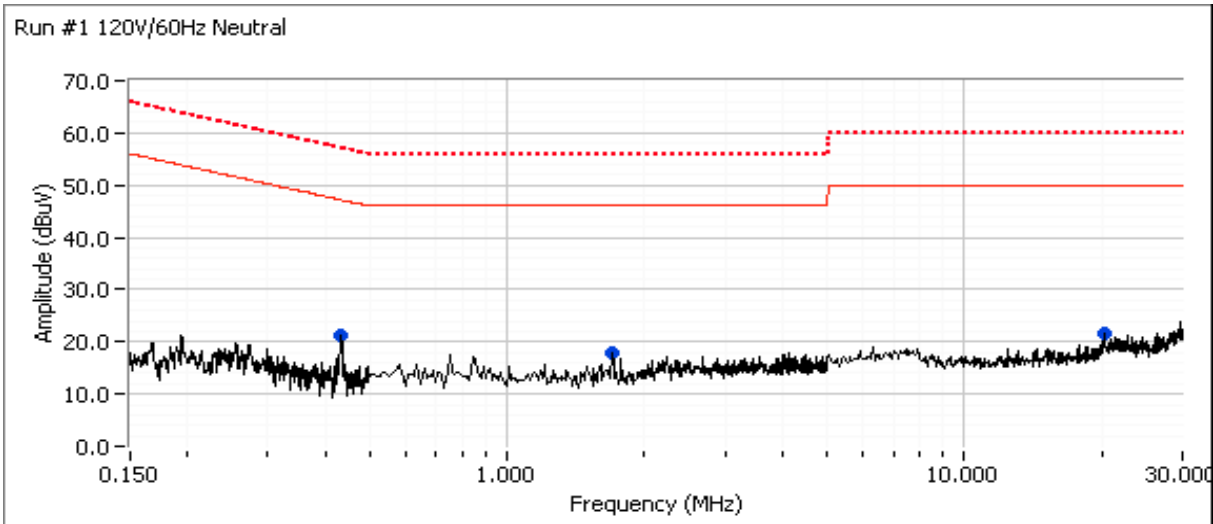

Client:	GE MDS LLC	Job Number:	J85302
Model:	MESH2400OEM	T-Log Number:	T85356
Contact:	Dennis McCarthy	Account Manager:	Susan Pelzl
Standard:	FCC 15.247 / RSS 210 / EN 300 440	Class:	B

Continuation of Run #1
Preliminary peak readings captured during pre-scan (peak readings vs. average limit)

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.434	21.2	Neutral	47.2	-26.0	Peak	
0.435	20.1	Line	47.2	-27.1	Peak	
24.940	22.1	Line	50.0	-27.9	Peak	
1.699	17.8	Neutral	46.0	-28.2	Peak	
20.281	21.6	Neutral	50.0	-28.4	Peak	
0.780	15.8	Line	46.0	-30.2	Peak	

Final quasi-peak and average readings

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.434	14.0	Neutral	47.2	-33.2	AVG	AVG (0.10s)
0.435	10.4	Line	47.2	-36.8	AVG	AVG (0.10s)
1.699	5.1	Neutral	46.0	-40.9	AVG	AVG (0.10s)
0.434	16.2	Neutral	57.2	-41.0	QP	QP (1.00s)
24.940	7.9	Line	50.0	-42.1	AVG	AVG (0.10s)
1.699	13.7	Neutral	56.0	-42.3	QP	QP (1.00s)
20.281	7.7	Neutral	50.0	-42.3	AVG	AVG (0.10s)
0.780	2.3	Line	46.0	-43.7	AVG	AVG (0.10s)
0.435	13.4	Line	57.2	-43.8	QP	QP (1.00s)
20.281	13.0	Neutral	60.0	-47.0	QP	QP (1.00s)
24.940	12.3	Line	60.0	-47.7	QP	QP (1.00s)
0.780	6.0	Line	56.0	-50.0	QP	QP (1.00s)

End of Report

This page is intentionally blank and marks the last page of this test report.