


Plots for Section 90.210 Emission Mask H.




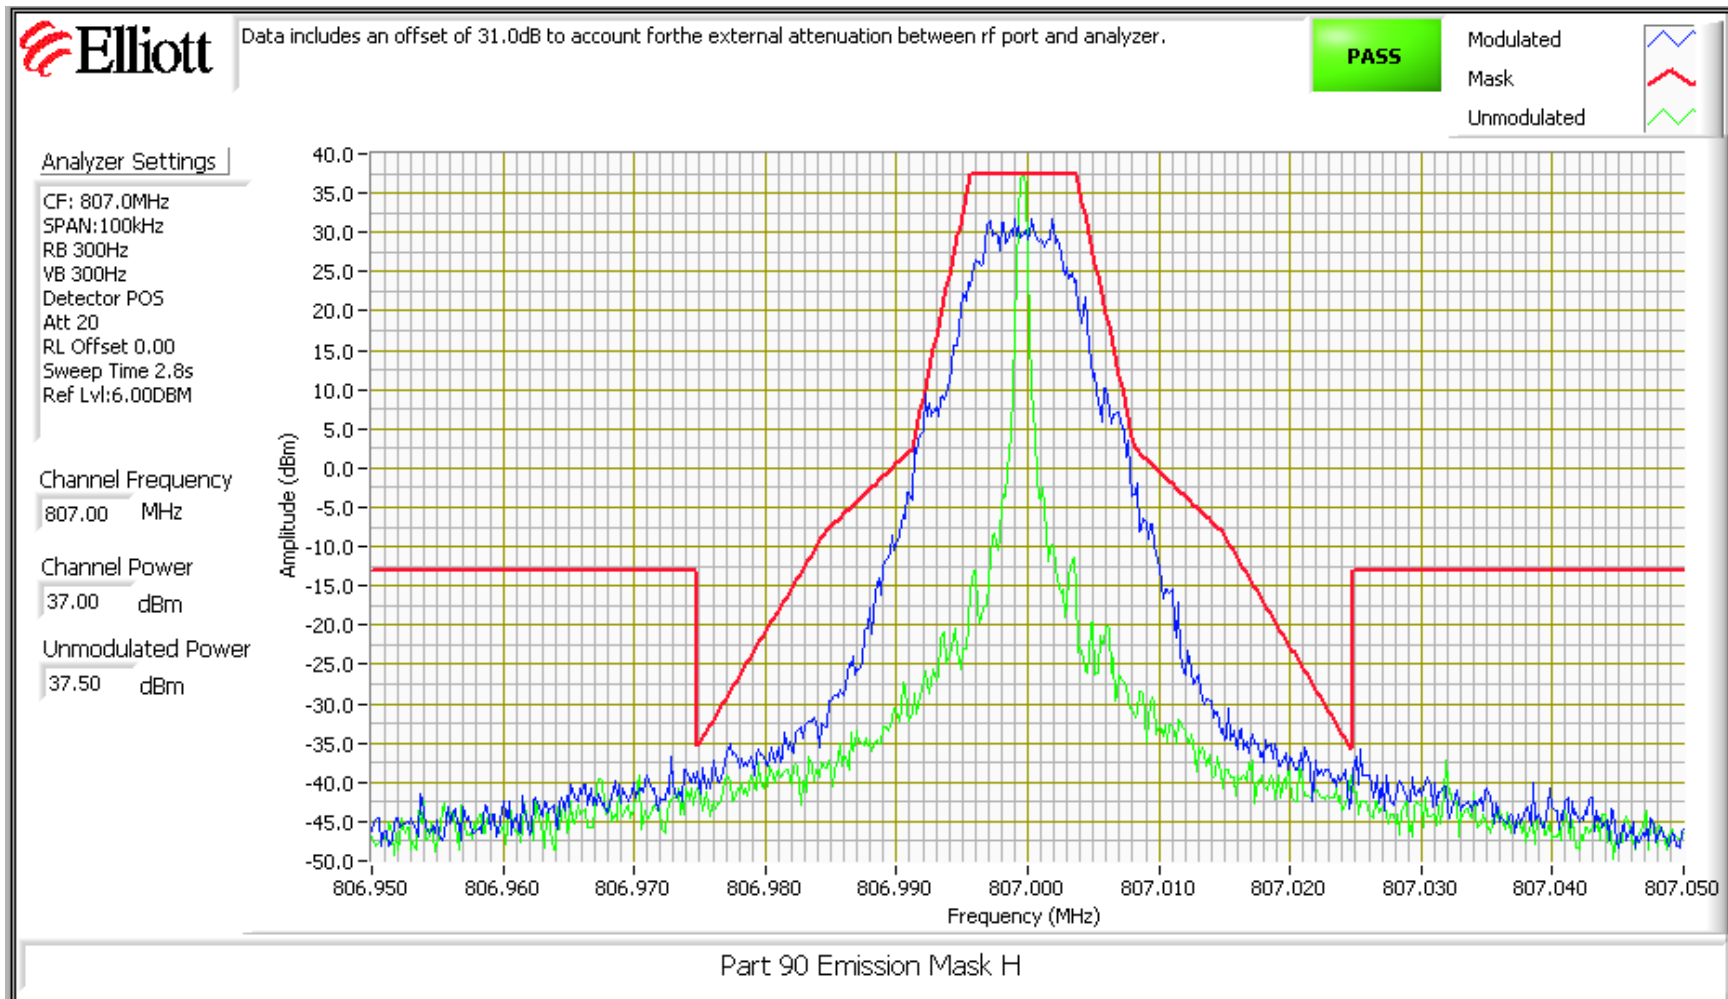

Data includes an offset of 32.0dB to account for the external attenuation between rf port and analyzer.

PASS

Modulated
Mask
Unmodulated



Analyzer Settings

CF: 852.0MHz
SPAN: 100kHz
RB 300Hz
VB 300Hz
Detector POS
Att 20
RL Offset 0.00
Sweep Time 2.8s
Ref Lvl: 5.00dBm

Channel Frequency


852.00 MHz

Channel Power

37.00 dBm

Unmodulated Power

36.67 dBm

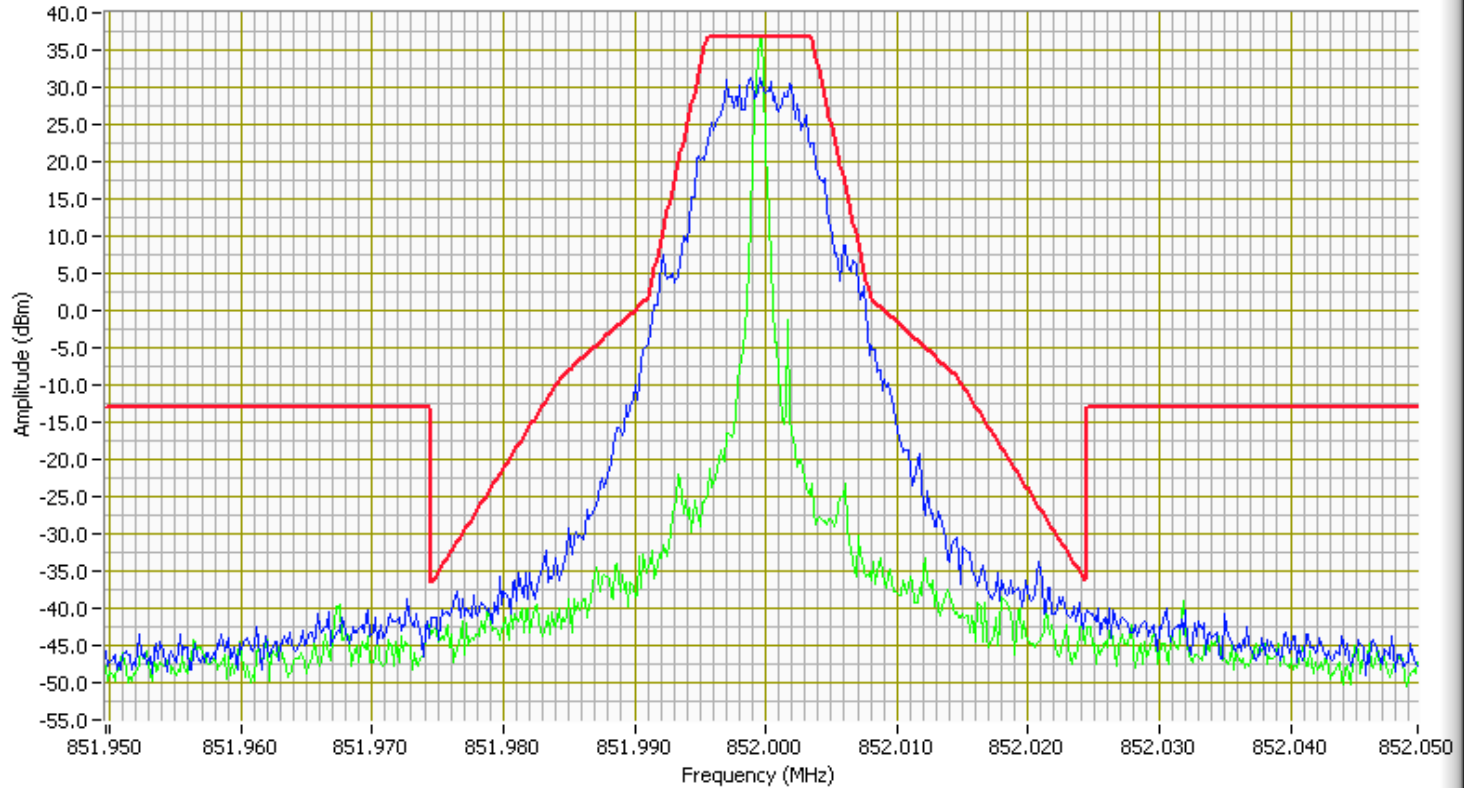

Part 90 Emission Mask H