

FCC TEST REPORT

REPORT NO.: RF940907A01

MODEL NO.: 5213URF2

RECEIVED: Sep. 7, 2005

TESTED: Sep. 14, 2005

ISSUED: Sep. 21, 2005

APPLICANT: BEHAVIOR TECH COMPUTER CORP.

ADDRESS: 2F, 51, Tung Hsing Rd., Taipei, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

This test report consists of 17 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



No. 2177-01



0528
ILAC MRA

Table of Contents

1	CERTIFICATION	3
2	SUMMARY OF TEST RESULTS	4
2.1	MEASUREMENT UNCERTAINTY	4
3	GENERAL INFORMATION	5
3.1	GENERAL DESCRIPTION OF EUT	5
3.1	DESCRIPTION OF TEST MODES	6
3.1.1	CONFIGURATION OF SYSTEM UNDER TEST	6
3.1.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	7
3.2	GENERAL DESCRIPTION OF APPLIED STANDARDS	8
3.3	DESCRIPTION OF SUPPORT UNITS	8
4	TEST PROCEDURE AND RESULT	9
4.1	CONDUCTED EMISSION MEASUREMENT	9
4.2	RADIATED EMISSION MEASUREMENT	9
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	9
4.2.2	TEST INSTRUMENT	10
4.2.3	TEST PROCEDURE	11
4.2.4	TEST SETUP	12
4.2.5	EUT OPERATING CONDITION	12
4.2.6	TEST RESULT	13
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	15
6	INFORMATION ON THE TESTING LABORATORIES	16
	APPENDIX-A	A-1

1 CERTIFICATION

PRODUCT: Wireless Keyboard
BRAND NAME: BTC
MODEL NO: 5213URF2
APPLICANT: BEHAVIOR TECH COMPUTER CORP.
TEST SAMPLE: ENGINEERING SAMPLE
TESTED: Sep. 14, 2005
STANDARDS: FCC Part 15, Subpart C (Section 15.227),
ANSI C63.4 -2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Jessica Cheng , **DATE:** Sep. 21, 2005
(Jessica Cheng)

TECHNICAL
ACCEPTANCE : Ken Liu , **DATE:** Sep. 21, 2005
Responsible for RF (Ken Liu)

APPROVED BY : Cody Chang , **DATE:** Sep. 21, 2005
(Cody Chang / Deputy Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD PARAGRAPH	TEST TYPE	RESULT	REMARK
15.207	Conducted Emission Test	N/A	Power supply is 3Vdc from batteries
15.227 15.209	Radiated Emission Test	PASS	Minimum passing margin is -8.11dB at 518.23MHz

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Frequency	Uncertainty
Radiated emissions	30MHz ~ 200MHz (Horizontal)	3.47 dB
	30MHz ~ 200MHz (Vertical)	3.62 dB
	200MHz ~1000MHz (Horizontal)	3.64 dB
	200MHz ~1000MHz (Vertical)	3.62 dB

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless Keyboard
MODEL NO.	5213URF2
POWER SUPPLY	3.0Vdc from batteries
MODULATION TYPE	FSK
CARRIER FREQUENCY OF EACH CHANNEL	26.995MHz, 27.045MHz, 27.095MHz, 27.145MHz, 27.195MHz.
NUMBER OF CHANNEL	5
ANTENNA TYPE	Loop antenna
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT is a Wireless Keyboard
2. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.


3.1 DESCRIPTION OF TEST MODES

Five channels were provided to this EUT

Channel	Frequency (MHz)
1	26.995MHz
2	27.045MHz
3	27.095MHz
4	27.145MHz
5	27.195MHz

Note: Channel 4 (27.145MHz) was the worst case and chosen for final test.

3.1.1 CONFIGURATION OF SYSTEM UNDER TEST

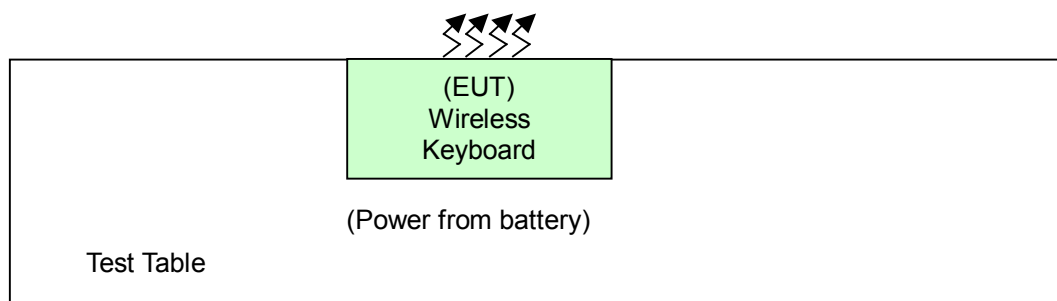

3.1.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to		Description
	PLC	RE<1G	
1	Note	v	NA

Where PLC: Power Line Conducted Emission

RE<1G RE: Radiated Emission below 1GHz

Note: No need to concern of Conducted Emission due to the EUT is powered by battery.

Radiated Emission Test (Below 1 GHz):

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT	Available Channel	Tested Channel	Modulation Type
Wireless Keyboard	1 ~ 5	4	FSK

3.2 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Wireless Keyboard. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.227)

ANSI C63.4 -2003

All test items have been performed and recorded as per the above standards.

3.3 DESCRIPTION OF SUPPORT UNITS

NA

4 TEST PROCEDURE AND RESULT

4.1 CONDUCTED EMISSION MEASUREMENT

NA

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

According to 15.227 the field strength of Emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBuV/m)	
	Peak	Average
26.96-27.28	100	80

Field strength limits are at the distance of 3 meters, Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENT

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESMI	839013/007 839379/002	Feb. 03, 2006
Spectrum Analyzer ROHDE & SCHWARZ	FSEK30	100049	Aug. 14, 2006
BILOG Antenna SCHWARZBECK	VULB9163	121	Jun. 01, 2006
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-407	Jan. 06, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170242	Jan. 23, 2006
Preamplifier Agilent	8447D	2944A10638	Dec. 21, 2005
Preamplifier Agilent	8449B	3008A01959	Dec. 21, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218188/218189 /231134	Apr. 19, 2006
RF signal cable Worken	8D-FB	Cable-HYCH5-02	Apr. 21, 2006
Software ADT.	ADT_Radiated_ V7.6.01	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA
Antenna Tower Controller EMCO	2090	NA	NA
Turn Table EMCO	2087-2.03	NA	NA
Turn Table Controller EMCO	2090	NA	NA
Loop Antenna	HFH2-Z2	100070	Nov. 14, 2005

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 4.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-4.


4.2.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak method or average method as specified and then reported in data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.

4.2.4 TEST SETUP

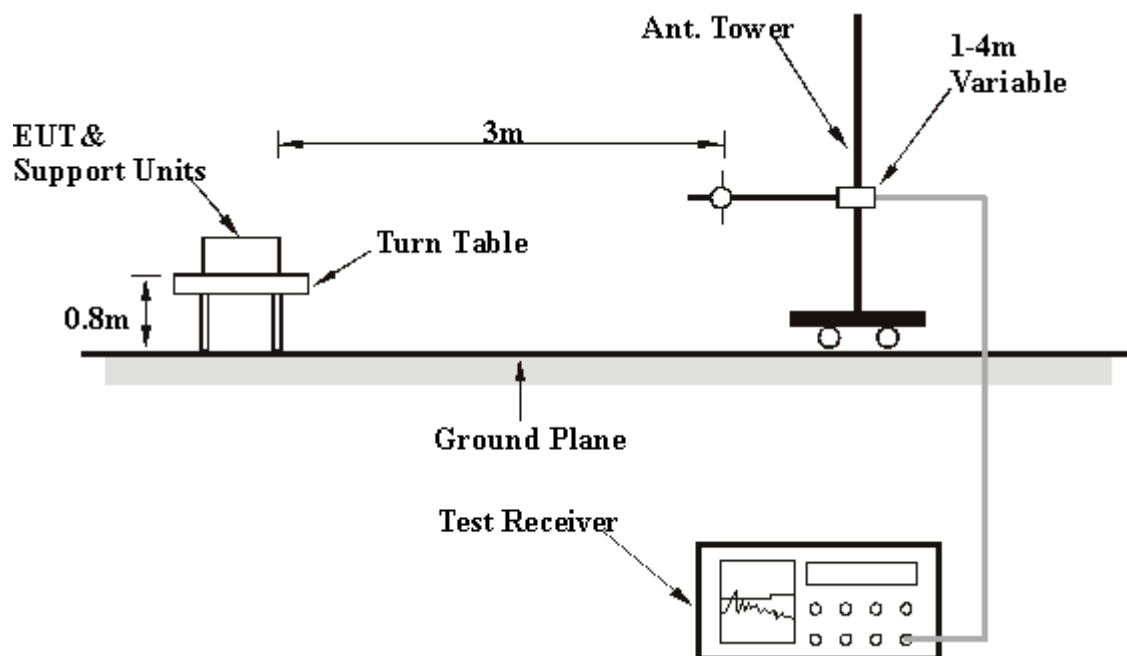

For the actual test configuration, please refer to the related item in this test report - Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITION

Set EUT under transmission condition continuously at specific channel frequency.

4.2.6 TEST RESULT

EUT	Wireless Keyboard	MEASUREMENT DETAIL	
INPUT POWER	3Vdc	MODEL	5213URF2
ENVIRONMENTAL CONDITIONS	25deg. C, 65% RH, 1005hPa	FREQUENCY RANGE	Below 1000MHz
TESTED BY	Jamison Chan	DETECTOR FUNCTION	Peak / Average

TEST DISTANCE: 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*27.145	56.65PK	100.00	-43.35	2.27	19	46.00	10.65
2	*27.145	30.75AV	80.00	-49.25	2.27	19	20.10	10.65

REMARKS:

- 1 Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
- 2 Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 3 The other emission levels were very low against the limit.
- 4 Margin value = Emission level – Limit value.
- 5 "*"= Fundamental frequency.
- 6 Loop antenna was used for all radiated emission below 30MHz.

EUT	Wireless Keyboard	MEASUREMENT DETAIL	
INPUT POWER	3Vdc	MODEL	5213URF2
ENVIRONMENTAL CONDITIONS	25deg. C, 65% RH, 1005hPa	FREQUENCY RANGE	Below 1000MHz
TESTED BY	Jamison Chan	DETECTOR FUNCTION	Quasi-Peak

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	82.81	27.45 QP	40.00	-12.55	2.00 H	310	17.88	9.57
2	217.53	29.17 QP	46.00	-16.83	1.00 H	106	17.87	11.30
3	246.63	37.34 QP	46.00	-8.66	1.25 H	166	25.03	12.31
4	355.49	31.55 QP	46.00	-14.45	2.50 H	100	15.88	15.67
5	463.27	37.08 QP	46.00	-8.92	2.00 H	214	19.72	17.36
6	518.23	37.89 QP	46.00	-8.11	1.75 H	154	19.23	18.66
7	571.04	34.81 QP	46.00	-11.19	1.50 H	148	15.10	19.72
8	626.01	34.70 QP	46.00	-11.30	1.25 H	310	13.74	20.96
9	680.98	32.81 QP	46.00	-13.19	1.25 H	232	11.40	21.41


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	137.78	20.37 QP	43.50	-23.13	2.50 V	232	11.96	8.42
2	245.56	24.70 QP	46.00	-21.30	1.75 V	220	12.43	12.27
3	354.41	27.00 QP	46.00	-19.00	3.00 V	208	11.36	15.64
4	463.27	29.76 QP	46.00	-16.24	1.75 V	106	12.40	17.36
5	518.23	30.45 QP	46.00	-15.55	1.50 V	82	11.79	18.66
6	539.79	35.33 QP	46.00	-10.67	2.50 V	16	16.35	18.98
7	658.34	30.49 QP	46.00	-15.51	1.25 V	22	9.11	21.38
8	836.18	29.17 QP	46.00	-16.83	1.25 V	46	4.92	24.25
9	939.64	31.07 QP	46.00	-14.93	1.75 V	28	5.68	25.39

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

RADIATED EMISSION TEST

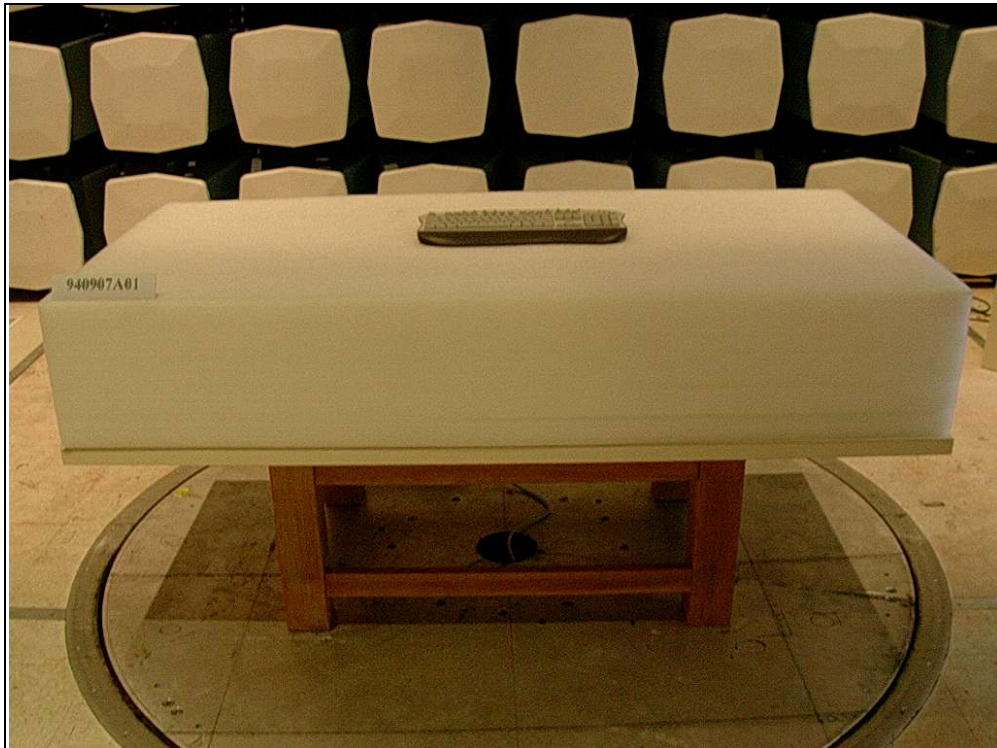

6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025

USA	FCC, NVLAP, UL , A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.