



FCC TEST REPORT

REPORT NO.: F910527A06

MODEL NO.: 8170

RECEIVED: May 27, 2002

TESTED: June 3, 2002

APPLICANT: BEHAVIOR TECH COMPUTER CORP.

ADDRESS: 2F, 51, TUNG HSING RD., TAIPEI,
TAIWAN, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 25 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any U.S. government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



0528
ILAC MRA



Lab Code: 200102-0



Table of Contents

1	CERTIFICATION.....	3
2	SUMMARY OF TEST RESULTS	4
3	GENERAL INFORMATION	5
3.1	GENERAL DESCRIPTION OF EUT	5
3.2	DESCRIPTION OF SUPPORT UNITS.....	6
4	EMISSION TEST	7
4.1	CONDUCTED EMISSION MEASUREMENT.....	7
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	7
4.1.2	TEST INSTRUMENTS.....	7
4.1.3	TEST PROCEDURE	8
4.1.4	DEVIATION FROM TEST STANDARD	8
4.1.5	TEST SETUP.....	8
4.1.6	EUT OPERATING CONDITIONS	9
4.1.7	TEST RESULTS (A)	10
4.1.8	TEST RESULTS (B)	12
4.2	RADIATED EMISSION MEASUREMENT	14
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	14
4.2.2	TEST INSTRUMENTS.....	14
4.2.3	TEST PROCEDURE	15
4.2.4	DEVIATION FROM TEST STANDARD	15
4.2.5	TEST SETUP.....	16
4.2.6	EUT OPERATING CONDITIONS	16
4.2.7	TEST RESULTS (A)	17
4.2.8	TEST RESULTS (B)	19
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	21
6	APPENDIX - INFORMATION ON THE TESTING LABORATORIES.....	25



1 CERTIFICATION

PRODUCT: KEYBOARD
BRAND NAME: CREATIVE
MODEL NO: 8170
TEST ITEM: ENGINEERING SAMPLE
APPLICANT: BEHAVIOR TECH COMPUTER CORP.
STANDARDS: FCC Part 15, Subpart B, Class B
CISPR 22: 1997, Class B
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility on June 3, 2002. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

CHECKED BY: Kathy Tseng, **DATE:** June 4, 2002
(Kathy Tseng)

APPROVED BY: Fred Chen, **DATE:** June 4, 2002
(Fred Chen, Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Remarks
FCC Part 15, Subpart B, CISPR 22: 1997, Class B	Conducted Test	PASS	Meets Class B Limit Minimum passing margin is -14.62 dB at 7.757 MHz
	Radiated Test	PASS	Meets Class B Limit Minimum passing margin is -6.1 dB at 199.93 MHz

NOTE: For conducted emission test, the test limit used is according to FCC Part 15.107. In this part, conducted emission test for telecom port is not mentioned and therefore this item is not tested.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	KEYBOARD
MODEL NO.	8170
POWER SUPPLY	DC 8V, 100mA (from PC)
DATA CABLE	PS/2 Shielded 3m

NOTE: The EUT is a PS/2 KEYBOARD attached with a piano keyboard.

During the test, both of the keyboard were tested separately and their data were recorded in this report:

Mode 1: Keyboard function

Mode 2: Piano function

For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



3.2 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PC	HP	DTPC 27	21402951	FCC DoC Approved
2	MONITOR	ADI	CM100	020058T10200182	FCC DoC Approved
3	PRINTER	EPSON	LQ-300+	DCGY017081	FCC DoC Approved
4	MODEM	ACEEX	1414	980020533	IFAXDM1414
5	PS/2 MOUSE	LOGITECH	M-S61	HCA11824170	JNZ211403
6	SPEAKER	JAZZ	J-008	J80391997	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.8 m braid shielded wire, terminated with VGA connector via metallic frame, w/o core
3	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
4	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
5	1.8 m Non shielded wire, terminated with PS/2 connector via drain wire, w/o core.
6	1.5 m wrapped shielded wire, terminated via drain wire, with 3.5 mm phone plug, w/o core.

NOTE: All power cords of the above support units are non shielded (1.8m).



4 EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

- NOTES:**
- (1) The lower limit shall apply at the transition frequencies.
 - (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 - (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	July 4, 2002
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	839135/006	July 3, 2002
* ROHDE & SCHWARZ 4-wire ISN	ENY41	838119/028	Dec. 2, 2002
* ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Dec. 2, 2002
EMCO-L.I.S.N. (for peripheral)	3825/2	9204-1964	July 3, 2002
Software	Cond-V2.0M	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C02.01	July 5, 2002
HP Terminator (For EMCO LISN)	11593A	E1-01-298	Feb. 20, 2003
HP Terminator (For EMCO LISN)	11593A	E1-01-299	Feb. 20, 2003
Shielded Room	Site 2	ADT-C02	NA
VCCI Site Registration No.	Site 2	C-240	NA

- NOTE:**
1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. “*”: These equipment are used for conducted telecom port test only (if tested).


4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

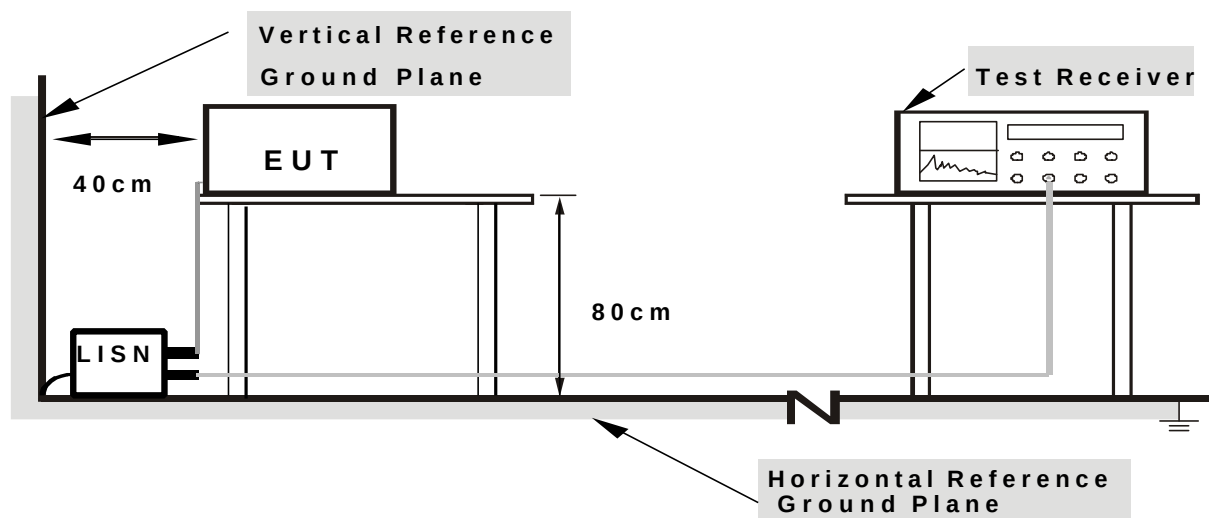

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.



4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power of all equipment.
- b. PC ran a test program to enable all functions.
- c. PC read and wrote messages from FDD and HDD.
- d. EUT sent "H" character to PC (mode 1)
- e. EUT sent Media message to PC (mode 2)
- f. PC sent "H" messages to monitor and monitor displayed "H" patterns on screen.
- g. PC sent "H" messages to modem.
- h. PC sent "H" messages to printer and then printer printed them on paper.
- i. Repeated steps c-i.

4.1.7 TEST RESULTS (A)

EUT	KEYBOARD	MODEL	8170
MODE	1	6dB BANDWIDTH	9 kHz
INPUT POWER	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 55 % RH, 1005 hPa	TESTED BY: Jim Hsiang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.10	38.17	-	38.27	-	64.08	54.08	-25.81	-
2	0.285	0.10	29.00	-	29.10	-	60.66	50.66	-31.56	-
3	0.567	0.10	26.95	-	27.05	-	56.00	46.00	-28.95	-
4	3.786	0.28	29.23	-	29.51	-	56.00	46.00	-26.49	-
5	7.753	0.43	44.02	-	44.45	-	60.00	50.00	-15.55	-
6	11.740	0.60	30.50	-	31.10	-	60.00	50.00	-28.90	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

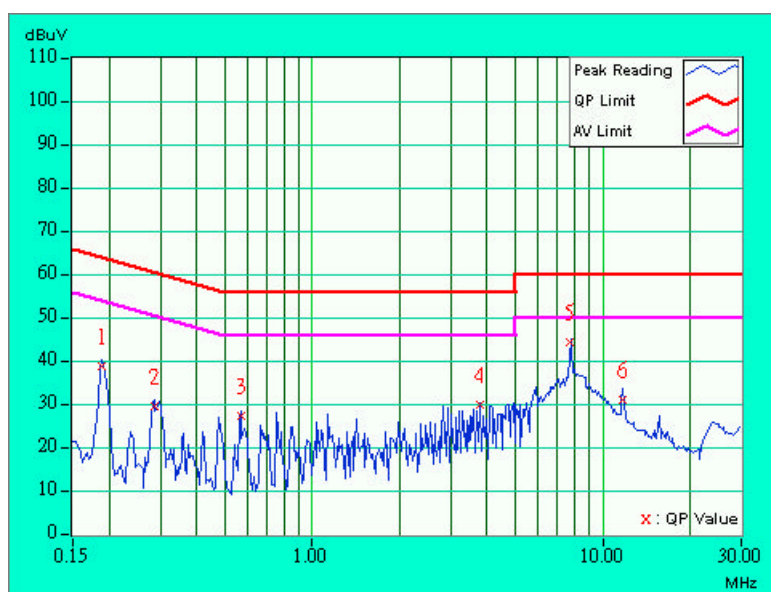



EUT	KEYBOARD	MODEL	8170
MODE	1	6dB BANDWIDTH	9 kHz
INPUT POWER	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 55 % RH, 1005 hPa	TESTED BY: Jim Hsiang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.10	41.20	-	41.30	-	64.08	54.08	-22.78	-
2	0.472	0.10	36.07	-	36.17	-	56.48	46.48	-20.31	-
3	0.757	0.10	34.27	-	34.37	-	56.00	46.00	-21.63	-
4	1.420	0.10	34.44	-	34.54	-	56.00	46.00	-21.46	-
5	7.757	0.36	45.02	-	45.38	-	60.00	50.00	-14.62	-
6	11.748	0.47	29.18	-	29.65	-	60.00	50.00	-30.35	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

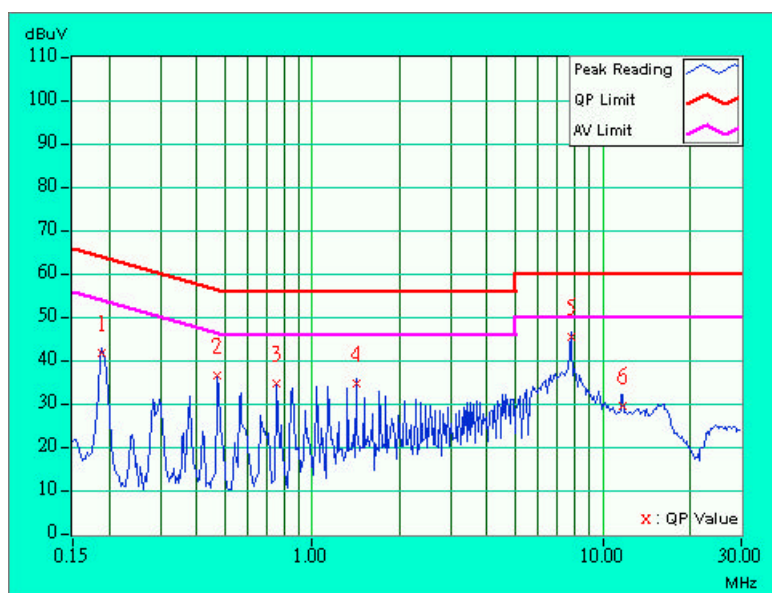

4.1.8 TEST RESULTS (B)

EUT	KEYBOARD	MODEL	8170
MODE	2	6dB BANDWIDTH	9 kHz
INPUT POWER	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 55 % RH, 1005 hPa	TESTED BY: Jim Hsiang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.10	38.65	-	38.75	-	64.07	54.07	-25.32	-
2	0.282	0.10	32.41	-	32.51	-	60.75	50.75	-28.24	-
3	2.367	0.14	25.27	-	25.41	-	56.00	46.00	-30.59	-
4	4.167	0.31	28.63	-	28.94	-	56.00	46.00	-27.06	-
5	7.744	0.42	42.67	-	43.09	-	60.00	50.00	-16.91	-
6	11.746	0.60	30.92	-	31.52	-	60.00	50.00	-28.48	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

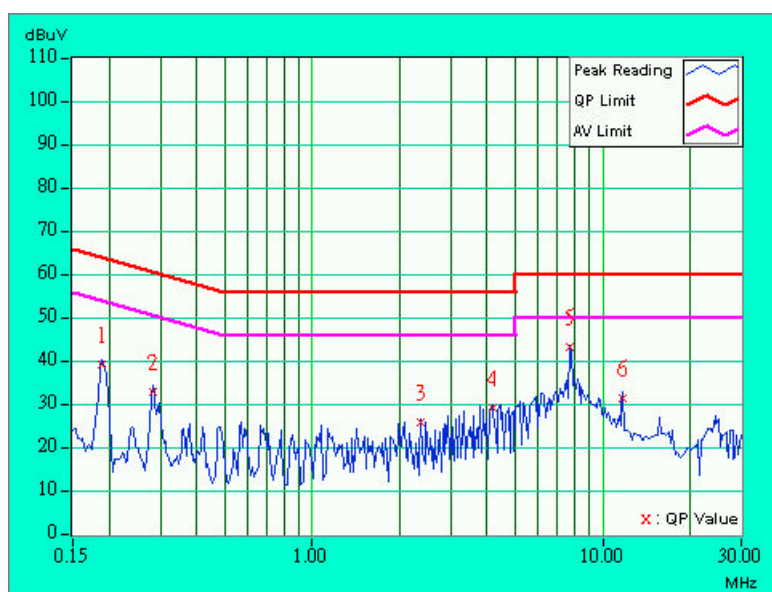

EUT	KEYBOARD	MODEL	8170
MODE	2	6dB BANDWIDTH	9 kHz
INPUT POWER	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 55 % RH, 1005 hPa	TESTED BY: Jim Hsiang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.10	40.59	-	40.69	-	64.08	54.08	-23.39	-
2	0.474	0.10	34.73	-	34.83	-	56.45	46.45	-21.62	-
3	0.757	0.10	32.84	-	32.94	-	56.00	46.00	-23.06	-
4	1.041	0.10	32.31	-	32.41	-	56.00	46.00	-23.59	-
5	7.007	0.35	31.35	-	31.70	-	60.00	50.00	-28.30	-
6	7.745	0.36	42.85	-	43.21	-	60.00	50.00	-16.79	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

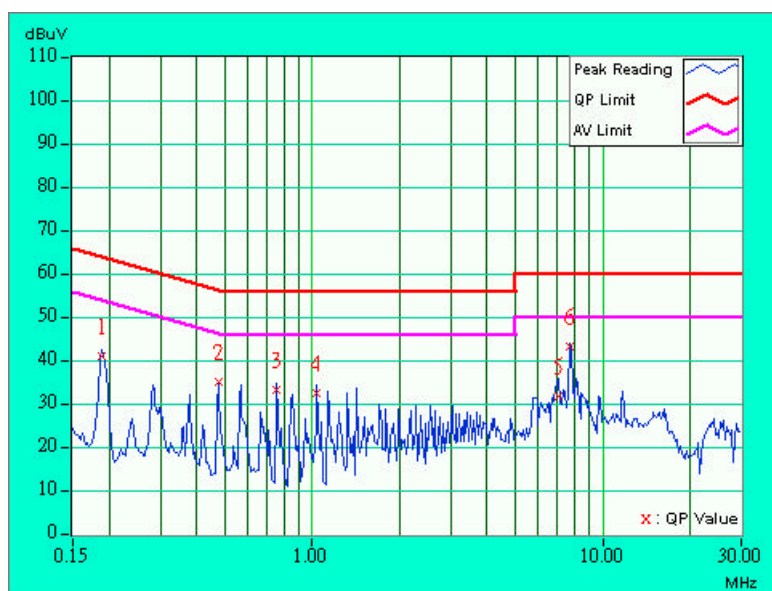



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	dBuV/m
30 – 230	40	30
230 - 1000	47	37

NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8594A	3144A00308	Aug. 22, 2002
HP Preamplifier	8447D	2944A08119	July. 17, 2002
* HP Preamplifier	8449B	3008A01201	Dec. 06, 2002
* HP Preamplifier	8449B	3008A01292	Aug. 21 & 2002
ROHDE & SCHWARZ TEST RECEIVER	ESCS 30	838251/021	Jan. 15, 2003
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 23, 2002
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Jan. 27, 2003
* CHASE Bilog Antenna	CBL6112A	2329	May 10, 2003
* SCHWARZBECK Horn Antenna	BBHA9120 -D1	D130	July 6, 2002
* EMCO Horn Antenna	3115	9312-4192	April 9, 2003
* EMCO Turn Table	1060	1195	NA
* EMCO Tower	1051	1163	NA
* Software	AS61D4	NA	NA
* ANRITSU RF Switches	MP59B	E10124	May 9, 2003
* TIMES RF cable	LMR-600	CABLE-ST2-01	May 9, 2003
Open Field Test Site	Site 2	ADT-R02	May 11 & 2003
VCCI Site Registration No.	Site 2	R-237	NA

NOTE: 1. The measurement uncertainty is less than +/- 3.0dB, which is calculated as per the NAMAS document NIS81.

2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

3. "*" = These equipment are used for the final measurement.

4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.




4.2.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10-meter open field site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi- peak method or average method as specified and then reported In Data sheet peak mode and QP mode.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

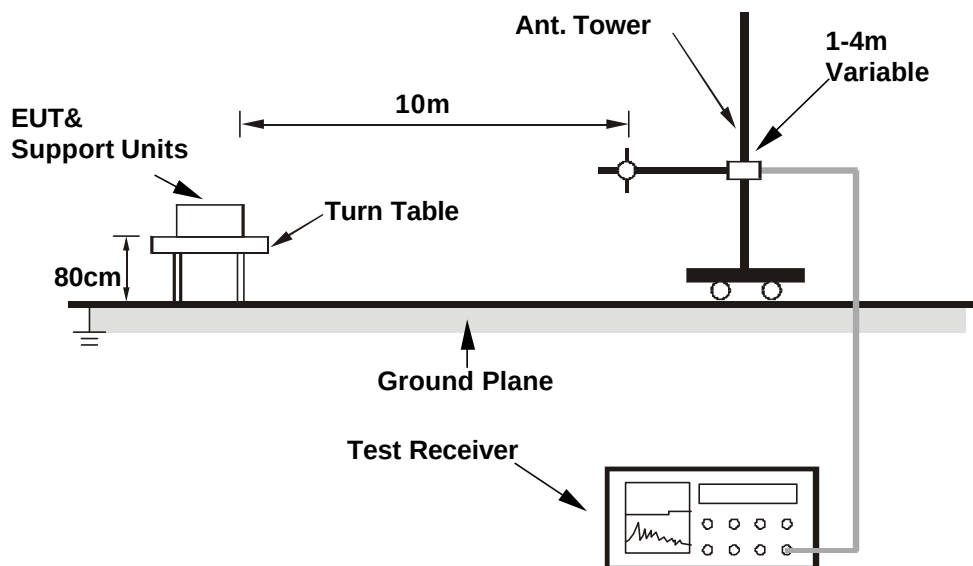

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6


4.2.7 TEST RESULTS (A)

EUT	KEYBOARD	MODEL	8170
MODE	1	FREQUENCY RANGE	30-1000 MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	25 deg. C, 55 % RH, 1005 hPa	TESTED BY: Jim Hsiang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Gain (dB)	Correction Factor (dB/m)
1	47.99	18.6 QP	30.00	-11.40	3.73H	169	9.15	8.53	0.92	0.00	-9.45
2	59.95	21.4 QP	30.00	-8.60	3.45H	283	14.07	6.29	1.04	0.00	-7.33
3	76.03	19.0 QP	30.00	-11.00	4.00H	258	11.59	6.24	1.17	0.00	-7.41
4	143.98	22.6 QP	30.00	-7.40	4.00H	347	9.69	11.17	1.74	0.00	-12.91
5	180.00	20.5 QP	30.00	-9.50	4.00H	272	9.96	8.66	1.87	0.00	-10.54
6	199.90	21.2 QP	30.00	-8.80	4.00H	225	10.28	8.90	2.05	0.00	-10.94
7	424.01	26.7 QP	37.00	-10.30	2.63H	110	7.92	15.47	3.31	0.00	-18.78
8	860.02	23.6 QP	37.00	-13.40	1.62H	238	-1.32	19.88	5.07	0.00	-24.96

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
 2. Correction Factor(dB/m) = Pre-Amplifier Gain (dB) - Antenna Factor (dB/m) - Cable Factor (dB)
 3. Pre-Amplifier Gain (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
 4. The other emission levels were very low against the limit.
 5. Margin value = Emission level – Limit value.

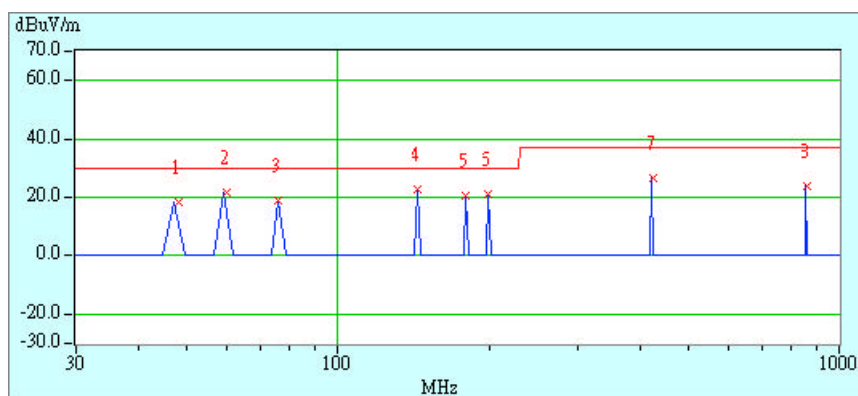




EUT	KEYBOARD	MODEL	8170
MODE	1	FREQUENCY RANGE	30-1000 MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	25 deg. C, 55 % RH, 1005 hPa	TESTED BY: Jim Hsiang	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Gain (dB)	Correction Factor (dB/m)
1	39.15	22.3 QP	30.00	-7.70	1.79V	284	8.17	13.35	0.78	0.00	-14.13
2	59.96	20.7 QP	30.00	-9.30	1.61V	204	13.37	6.29	1.04	0.00	-7.33
3	79.98	24.0 QP	30.00	-6.00	1.98V	185	14.93	7.88	1.19	0.00	-9.07
4	135.99	22.9 QP	30.00	-7.10	1.00V	155	9.76	11.48	1.66	0.00	-13.14
5	199.90	22.5 QP	30.00	-7.50	1.00V	46	11.55	8.90	2.05	0.00	-10.94
6	215.98	20.1 QP	30.00	-9.90	1.00V	177	8.15	9.78	2.17	0.00	-11.95
7	315.97	22.9 QP	37.00	-14.10	1.81V	200	7.42	12.78	2.70	0.00	-15.48
8	465.98	26.7 QP	37.00	-10.30	1.92V	90	6.72	16.28	3.69	0.00	-19.99
9	860.18	27.9 QP	37.00	-9.10	2.26V	238	2.94	19.88	5.07	0.00	-24.97

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
 2. Correction Factor(dB/m) = Pre-Amplifier Gain (dB) - Antenna Factor (dB/m) - Cable Factor (dB)
 3. Pre-Amplifier Gain (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
 4. The other emission levels were very low against the limit.
 5. Margin value = Emission level – Limit value.

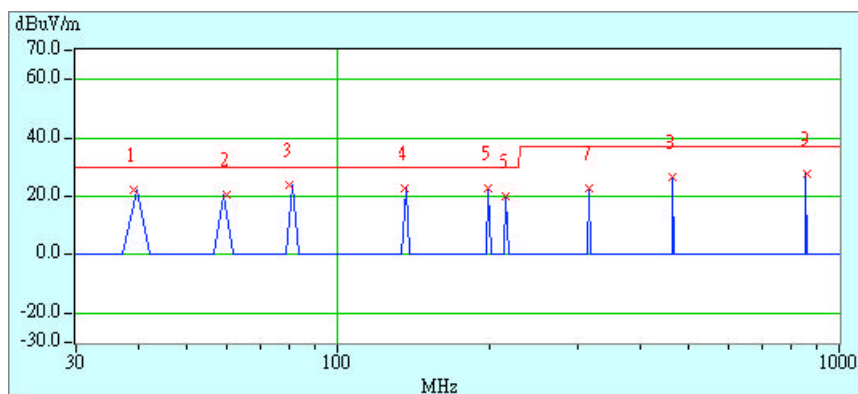


4.2.8 TEST RESULTS (B)

EUT	KEYBOARD	MODEL	8170
MODE	2	FREQUENCY RANGE	30-1000 MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	25 deg. C, 55 % RH, 1005 hPa	TESTED BY: Jim Hsiang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Gain (dB)	Correction Factor (dB/m)
1	47.96	20.7 QP	30.00	-9.30	4.00H	256	11.25	8.53	0.92	0.00	-9.45
2	59.94	22.4 QP	30.00	-7.60	3.69H	272	15.07	6.29	1.04	0.00	-7.33
3	76.05	20.4 QP	30.00	-9.60	4.00H	66	12.99	6.24	1.17	0.00	-7.41
4	112.11	19.8 QP	30.00	-10.20	4.00H	158	7.32	11.09	1.39	0.00	-12.48
5	199.96	21.3 QP	30.00	-8.70	4.00H	167	10.36	8.90	2.05	0.00	-10.95
6	424.08	27.2 QP	37.00	-9.80	3.08H	329	8.38	15.51	3.33	0.00	-18.85
7	648.07	25.9 QP	37.00	-11.10	2.28H	204	2.93	18.56	4.42	0.00	-22.97
8	859.98	25.1 QP	37.00	-11.90	2.02H	281	0.14	19.88	5.07	0.00	-24.96

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
 2. Correction Factor(dB/m) = Pre-Amplifier Gain (dB) - Antenna Factor (dB/m) - Cable Factor (dB)
 3. Pre-Amplifier Gain (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
 4. The other emission levels were very low against the limit.
 5. Margin value = Emission level – Limit value.

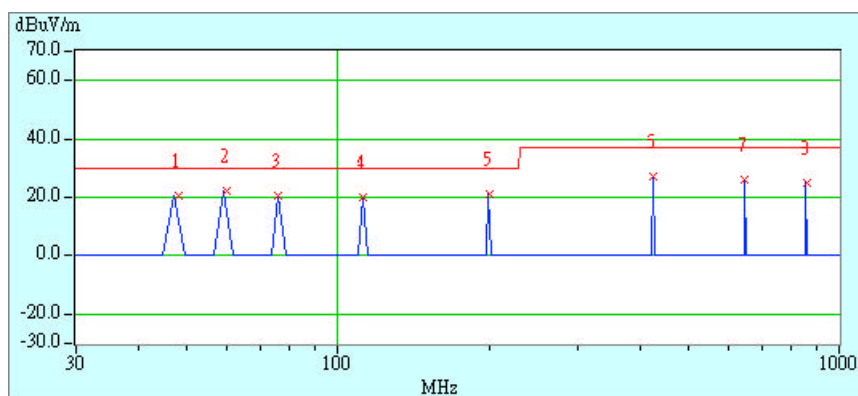


EUT	KEYBOARD	MODEL	8170
MODE	2	FREQUENCY RANGE	30-1000 MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	25 deg. C, 55 % RH, 1005 hPa	TESTED BY: Jim Hsiang	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Gain (dB)	Correction Factor (dB/m)
1	37.91	23.6 QP	30.00	-6.40	1.69V	138	8.74	14.03	0.82	0.00	-14.86
2	59.89	21.4 QP	30.00	-8.60	1.56V	158	14.07	6.29	1.04	0.00	-7.34
3	80.20	22.8 QP	30.00	-7.20	1.77V	275	13.73	7.88	1.19	0.00	-9.08
4	112.04	23.6 QP	30.00	-6.40	1.00V	153	11.12	11.09	1.39	0.00	-12.48
5	199.93	23.9 QP	30.00	-6.10	1.00V	294	12.96	8.90	2.05	0.00	-10.95
6	215.96	20.9 QP	30.00	-9.10	1.00V	271	8.95	9.78	2.17	0.00	-11.95
7	240.03	24.1 QP	37.00	-12.90	1.00V	303	10.69	11.06	2.35	0.00	-13.41
8	316.01	25.5 QP	37.00	-11.50	1.43V	151	10.01	12.78	2.70	0.00	-15.48
9	860.70	26.7 QP	37.00	-10.30	2.68V	342	1.76	19.87	5.07	0.00	-24.95

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
 2. Correction Factor(dB/m) = Pre-Amplifier Gain (dB) - Antenna Factor (dB/m) - Cable Factor (dB)
 3. Pre-Amplifier Gain (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
 4. The other emission levels were very low against the limit.
 5. Margin value = Emission level – Limit value.

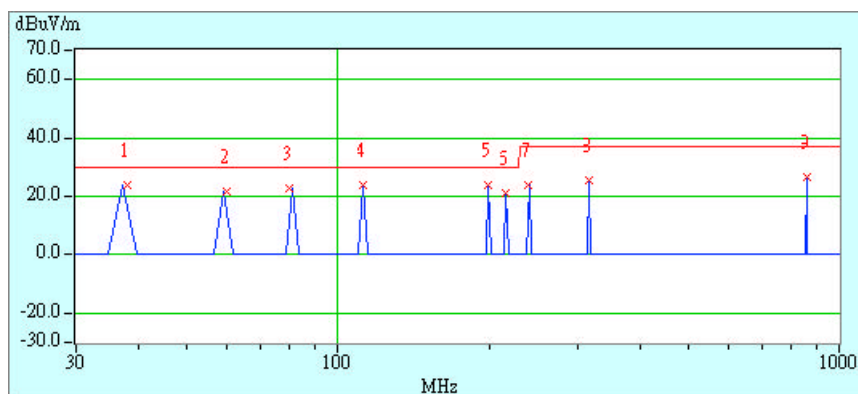

5 PHOTOGRAPHS OF THE TEST CONFIGURATION


CONDUCTED EMISSION TEST (MODE 1)




CONDUCTED EMISSION TEST (MODE 2)



RADIATED EMISSION TEST (MODE 1)

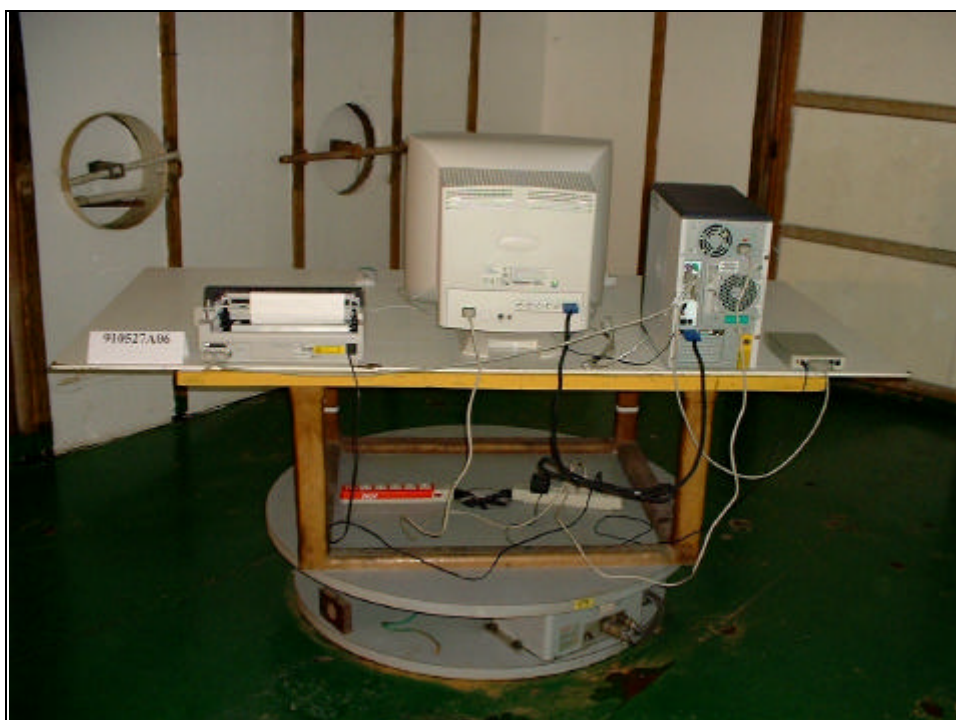

RADIATED EMISSION TEST (MODE 2)

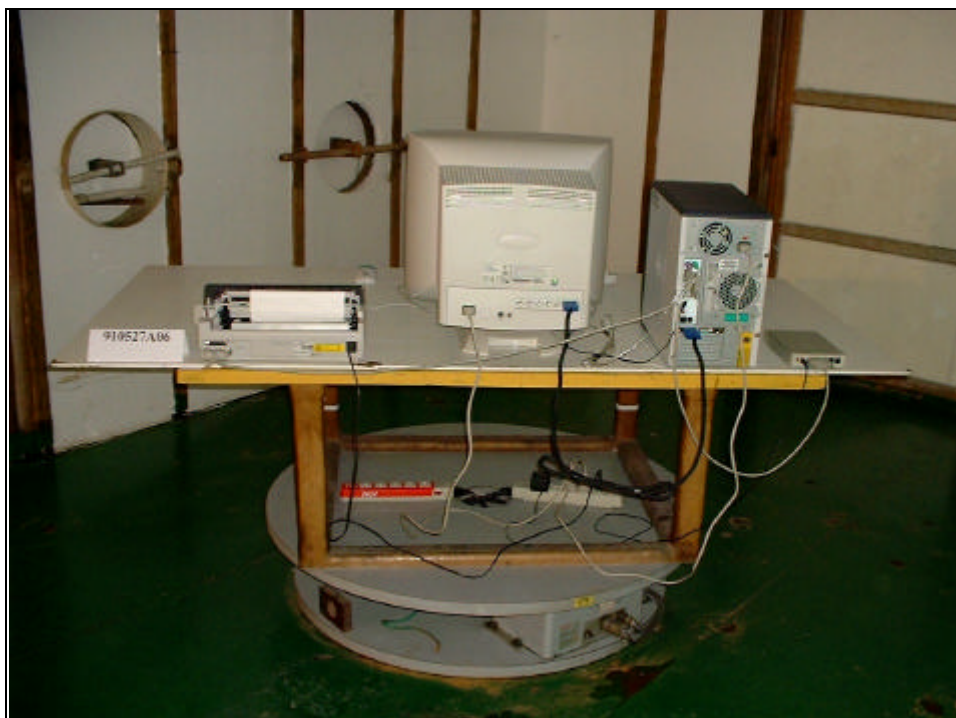



6 APPENDIX - INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO, DNV
Canada	INDUSTRY CANADA
R.O.C.	CNLA, BSMI

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Lin Kou RF & Telecom Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.