



FCC TEST REPORT

REPORT NO.: F900720A09B

MODEL NO.: M851

RECEIVED: Dec. 6, 2002

TESTED: Dec. 10, 2002

APPLICANT: BEHAVIOR TECH COMPUTER CORP.

ADDRESS: 2F, 51, TUNG HSING RD., TAIPEI,
TAIWAN, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei, Taiwan,
R.O.C.

This test report consists of 19 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any U.S. government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



0528
ILAC MRA



Lab Code: 200102-0



Table of Contents

1	CERTIFICATION.....	3
2	SUMMARY OF TEST RESULTS	4
3	GENERAL INFORMATION	5
3.1	GENERAL DESCRIPTION OF EUT	5
3.2	DESCRIPTION OF SUPPORT UNITS	6
4	EMISSION TEST	7
4.1	CONDUCTED EMISSION MEASUREMENT.....	7
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	7
4.1.2	TEST INSTRUMENTS.....	7
4.1.3	TEST PROCEDURE.....	8
4.1.4	DEVIATION FROM TEST STANDARD.....	8
4.1.5	TEST SETUP.....	8
4.1.6	EUT OPERATING CONDITIONS	9
4.1.7	TEST RESULTS	10
4.2	RADIATED EMISSION MEASUREMENT.....	12
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	12
4.2.2	TEST INSTRUMENTS.....	12
4.2.3	TEST PROCEDURE.....	13
4.2.4	DEVIATION FROM TEST STANDARD.....	13
4.2.5	TEST SETUP.....	14
4.2.6	EUT OPERATING CONDITIONS	14
4.2.7	TEST RESULTS	15
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	17
6	APPENDIX - INFORMATION ON THE TESTING LABORATORIES	19



1 CERTIFICATION

PRODUCT: MOUSE
BRAND NAME: BTC
MODEL NO: M851
TEST ITEM: ENGINEERING SAMPLE
APPLICANT: BEHAVIOR TECH COMPUTER CORP.
STANDARDS: FCC Part 15, Subpart B, Class B
CISPR 22: 1997, Class B
ANSI C63.4-1992, Class B

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility on Dec. 10, 2002. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

CHECKED BY: Betty Yen , **DATE:** Dec. 13, 2002
(Betty Yen)

APPROVED BY: Fred Chen , **DATE:** Dec. 13, 2002
(Fred Chen, Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Remarks
FCC Part 15, Subpart B, CISPR 22: 1997, Class B ANSI C63.4-1992, Class B	Conducted Test	PASS	Meets Class B Limit Minimum passing margin is -11.48 dB at 0.603 MHz
	Radiated Test	PASS	Meets Class B Limit Minimum passing margin is -9.00 dB at 111.68 MHz

NOTE: For conducted emission test, the test limit used is according to FCC Part 15.107. In this part, conducted emission test for telecom port is not mentioned and therefore this item is not tested.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	MOUSE
MODEL NO.	M851
POWER SUPPLY	DC 5V, 50mA (from PC)
DATA CABLE	Shielded (1.7m)

NOTE: This report is prepared for Class II Permissive Change. The main changes are its outer appearance and layout were changed.

For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



3.2 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PERSONAL COMPUTER	HP	Brio BA410	SG12106026	FCC DoC Approved
2	MONITOR	ADI	CM100	020058T10200184	FCC DoC Approved
3	PRINTER	EPSON	LQ-300+	DCGY017090	FCC DoC Approved
4	MODEM	ACEEX	1414	980020532	IFAXDM1414
5	PS/2 KEYBOARD	BTC	5121W	A00801374	E5XKB5121WTH0110

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.8 m braid shielded wire, terminated with VGA connector via metallic frame, w/o core
3	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
4	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
5	1.6 m foil shielded wire, terminated with PS/2 connector via metallic frame, w/o core.

NOTE: All power cords of the above support units are non shielded (1.8m).

4 EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

NOTES: (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

(3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESHS 30	838765/002	July 25, 2003
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	835239/001	May 09, 2003
ROHDE & SCHWARZ 4-wire ISN	ENY41	935154/007	May 10, 2003
ROHDE & SCHWARZ 2-wire ISN	ENY22	833823/026	May 10, 2003
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	835239/002	May 09, 2003
Software	Cond-V2M1	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C09.01	June 10, 2003
JYEBAO Terminator (For ROHDE & SCHWARZ LISN)	BNC 3950-0000	E1-01-379	June 11, 2003

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. “*”: These equipment are used for conducted telecom port test only (if tested).

3. The test was performed in ADT Shielded Room No. 9.

4. The VCCI Site Registration No. is C-1312.


4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

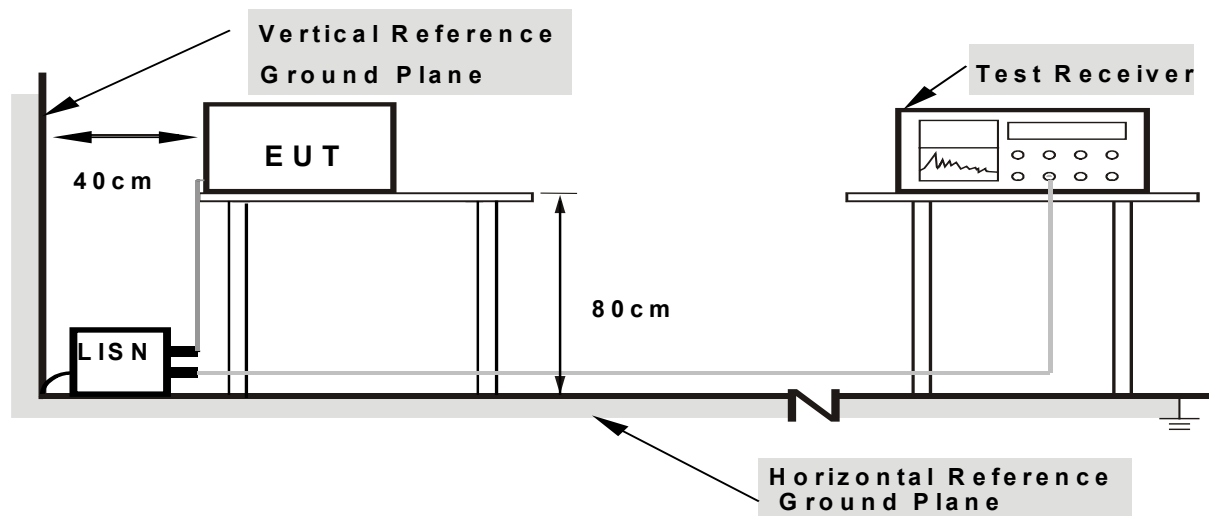

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.



4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power of all equipment.
- b. PC read a test program to enable all functions.
- c. PC read and wrote messages from FDD and HDD.
- d. PC sent "H" messages to monitor and monitor displayed "H" patterns on screen.
- e. PC sent "H" messages to modem.
- f. PC sent "H" messages to printer, and the printer printed them on paper.
- g. Steps c-g were repeated.

4.1.7 TEST RESULTS

EUT	MOUSE	MODEL	M851
		6dB BANDWIDTH	9 kHz
INPUT POWER	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	18 deg. C, 55 % RH, 1005 hPa	TESTED BY: Arthur Lin	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.201	0.10	51.25	-	51.35	-	63.57	53.57	-12.22	-
2	0.301	0.10	41.68	-	41.78	-	60.20	50.20	-18.42	-
3	0.603	0.13	44.39	-	44.52	-	56.00	46.00	-11.48	-
4	1.409	0.20	40.80	-	41.00	-	56.00	46.00	-15.00	-
5	2.716	0.24	39.35	-	39.59	-	56.00	46.00	-16.41	-
6	9.055	0.55	29.57	-	30.12	-	60.00	50.00	-29.88	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

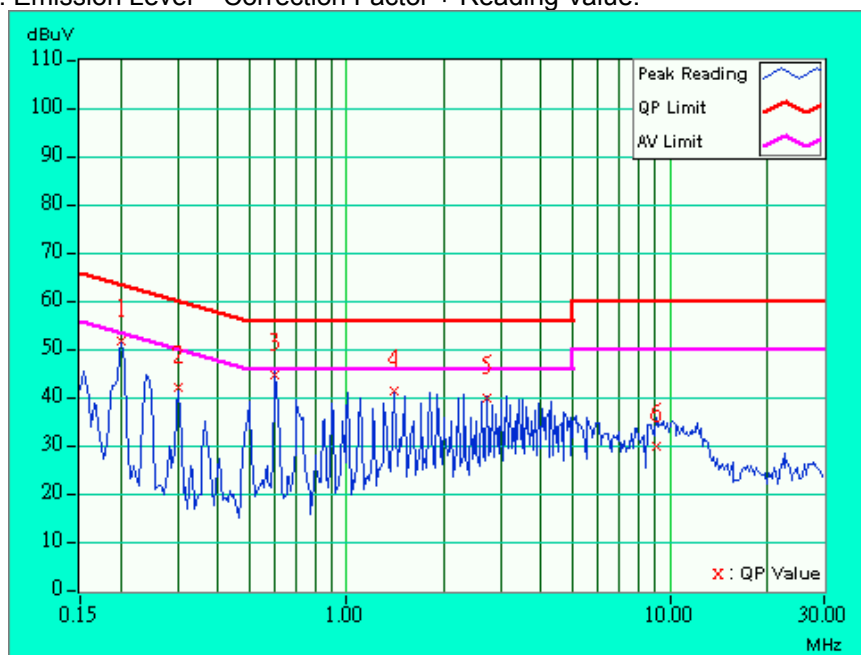

EUT	MOUSE	MODEL	M851
		6dB BANDWIDTH	9 kHz
INPUT POWER	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	18 deg. C, 55 % RH, 1005 hPa	TESTED BY: Arthur Lin	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.201	0.10	47.99	-	48.09	-	63.57	53.57	-15.48	-
2	0.237	0.10	44.64	-	44.74	-	62.20	52.20	-17.46	-
3	0.603	0.13	42.53	-	42.66	-	56.00	46.00	-13.34	-
4	1.006	0.20	40.98	-	41.18	-	56.00	46.00	-14.82	-
5	1.408	0.24	39.90	-	40.14	-	56.00	46.00	-15.86	-
6	11.778	0.57	26.98	-	27.55	-	60.00	50.00	-32.45	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

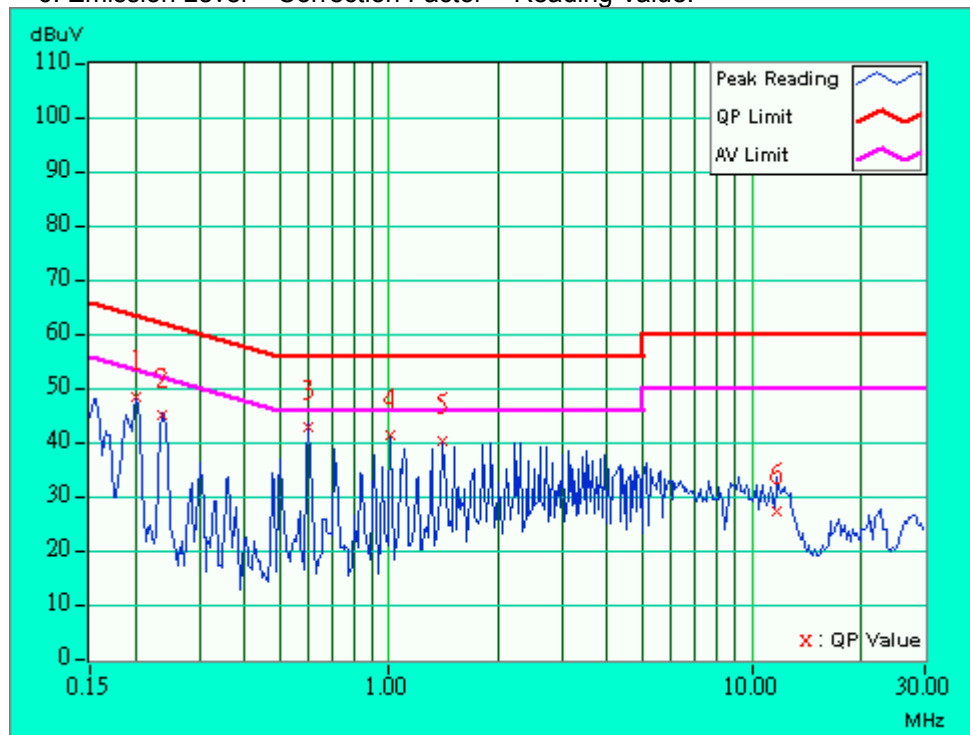

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	dBuV/m
30 – 230	40	30
230 - 1000	47	37

- NOTE:**
- (1) The lower limit shall apply at the transition frequencies.
 - (2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
 - (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8594E	3520A01861	Feb. 03, 2003
HP Preamplifier	8447D	2944A08118	Nov. 10, 2003
* HP Preamplifier	8449B	3008A01201	Dec. 01, 2003
* HP Preamplifier	8449B	3008A01292	Aug. 07, 2003
* ROHDE & SCHWARZ TEST RECEIVER	ESVS 10	840241/010	Sept. 23, 2003
SCHWARZBECK Tunable Dipole Antenna	VHBA 9123 UHA 9105	E101516 E101055	Nov. 22, 2003
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Jan. 27, 2003
* CHASE BILOG Antenna	CBL6112B	2433	Aug. 27, 2003
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	July 3, 2003
* EMCO Horn Antenna	3115	9312-4192	April 9, 2003
* CHANCE Turn Table	U200	9701	NA
* CHANCE Tower	AT-100	CM-A003	NA
* Software	ADT_Radiated V5.09	NA	NA
* ANRITSU RF Switches	MP59B	6100034537	Aug. 23, 2003
* TIMES RF cable	LMR-600	CABLE-ST3-01	Aug. 23, 2003

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. "*" = These equipment are used for the final measurement.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The test was performed in ADT Open Site No. 3.
 5. The VCCI Site Registration No. is R-269.




4.2.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10-meter open field site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi- peak method or average method as specified and then reported In Data sheet peak mode and QP mode.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

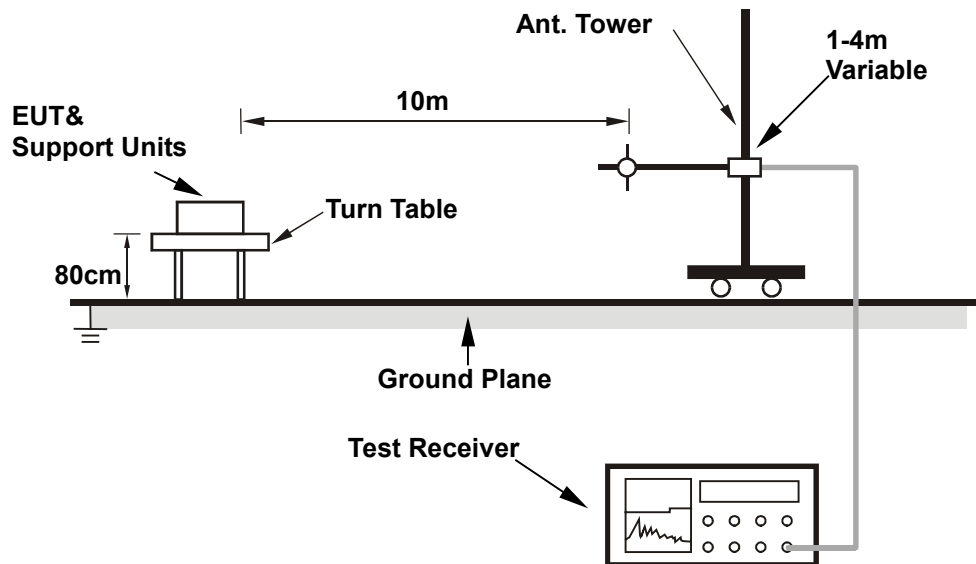

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6


4.2.7 TEST RESULTS

EUT	MOUSE	MODEL	M851
		FREQUENCY RANGE	30-1000 MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	18 deg. C, 55 % RH, 1005 hPa	TESTED BY: Arthur Lin	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	68.77	17.0 QP	30.00	-13.00	4.00 H	310	10.70	6.30
2	111.68	21.0 QP	30.00	-9.00	4.00 H	1	8.50	12.50
3	152.57	17.7 QP	30.00	-12.30	4.00 H	252	6.70	11.00
4	176.05	19.0 QP	30.00	-11.00	4.00 H	217	8.80	10.20
5	190.90	18.4 QP	30.00	-11.60	4.00 H	324	7.90	10.50
6	200.29	18.3 QP	30.00	-11.70	4.00 H	281	7.60	10.70
7	217.37	19.9 QP	30.00	-10.10	4.00 H	262	8.00	11.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

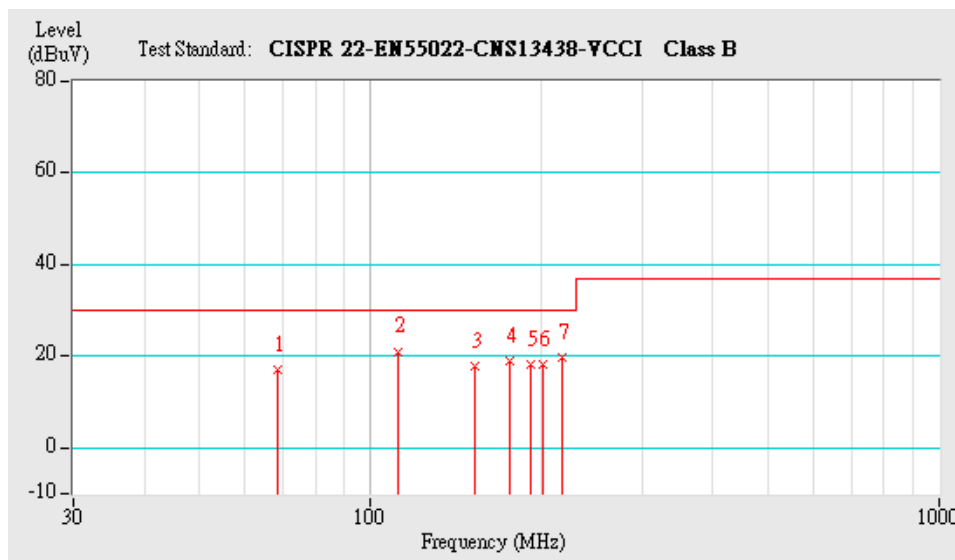


EUT	MOUSE	MODEL	M851
		FREQUENCY RANGE	30-1000 MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	18 deg. C, 55 % RH, 1005 hPa	TESTED BY: Arthur Lin	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	63.87	19.1 QP	30.00	-10.90	1.62 V	26	12.70	6.30
2	108.54	20.5 QP	30.00	-9.50	1.00 V	160	8.30	12.20
3	132.84	19.9 QP	30.00	-10.10	1.00 V	109	7.40	12.50
4	140.95	19.7 QP	30.00	-10.30	1.00 V	201	7.70	11.90
5	156.95	20.3 QP	30.00	-9.70	1.00 V	357	9.60	10.70
6	169.08	17.6 QP	30.00	-12.40	1.00 V	209	7.30	10.30
7	200.44	19.4 QP	30.00	-10.60	1.00 V	186	8.70	10.70
8	214.84	18.6 QP	30.00	-11.40	1.00 V	87	6.90	11.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

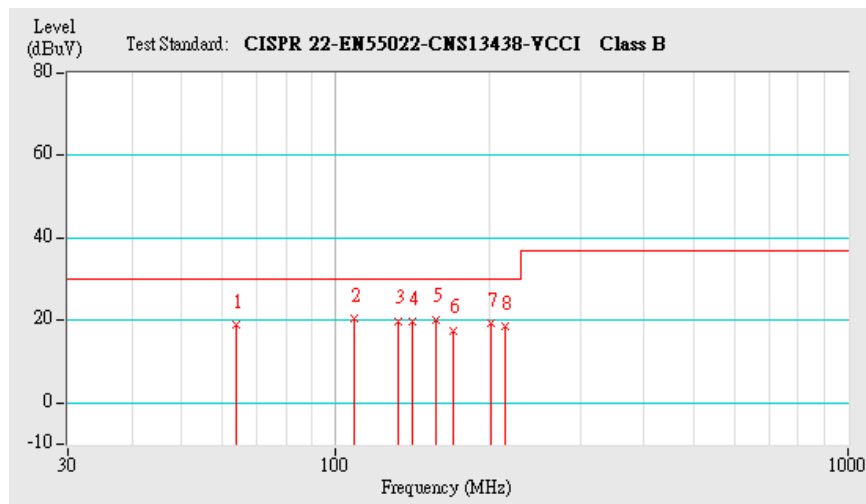

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST





6 APPENDIX - INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
Canada	INDUSTRY CANADA
R.O.C.	CNLA, BSMI

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:
Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC Lab:
Tel: 886-35-935343
Fax: 886-35-935342

Lin Kou Safety Lab:
Tel: 886-2-26093195
Fax: 886-2-26093184

Lin Kou RF & Telecom Lab.
Tel: 886-3-3270910
Fax: 886-3-3270892

Email: service@mail.adt.com.tw
Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.