

# FCC Test Report

**Equipment** : RF Module  
**Brand Name** : Chicony  
**Model No.** : AR5B22  
**FCC ID** : E8H-AR5B22  
**Standard** : 47 CFR FCC Part 15.247  
47 CFR FCC Part 15.407  
**Operating Band** : 2400 MHz – 2483.5 MHz  
5150 MHz – 5250 MHz  
5250 MHz – 5350 MHz  
5470 MHz – 5725 MHz  
5725 MHz – 5850 MHz  
**Applicant** : Chicony Electronics Co., Ltd.  
**Manufacturer** : No.25,Wugong 6th RD.,Wugu Dist.,  
New Taipei City 248 , Taiwan (R.O.C)

The product sample received on Jun. 16, 2015 and completely tested on Jul. 21, 2015. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

  
Kevin Liang / Assistant Manager





### Revision History

Report No.	Version	Description	Issued Date
FR561307	Rev. 01	Initial issue of report	Oct. 23, 2015

# 1 CO-LOCATION

## 1.1 Transmitter Radiated Unwanted Emissions

### 1.1.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 30 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.



### 1.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

1.1.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 10.1 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 10.2 for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 10.2.3.3 and 8.2.1 Option 1 (spectral trace averaging)
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 10.2.3.3 and 8.2.1 Option 2 (slow sweep speed).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 10.2.3.2 and 8.1.1 measurement procedure peak limit.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 10.2.3.1 measurement procedure Quasi-Peak limit.
<input checked="" type="checkbox"/>	For radiated measurement, refer as FCC KDB 558074, clause 10.2.1.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. For 1 GHz to 5 GHz, test distance is 3m; For 5 GHz to 40 GHz, test distance is 3m.
<input type="checkbox"/>	For conducted and cabinet radiation measurement, refer as FCC KDB 558074, clause 10.2.2.
<input type="checkbox"/>	For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.
<input type="checkbox"/>	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB

### 1.1.4 Test Setup

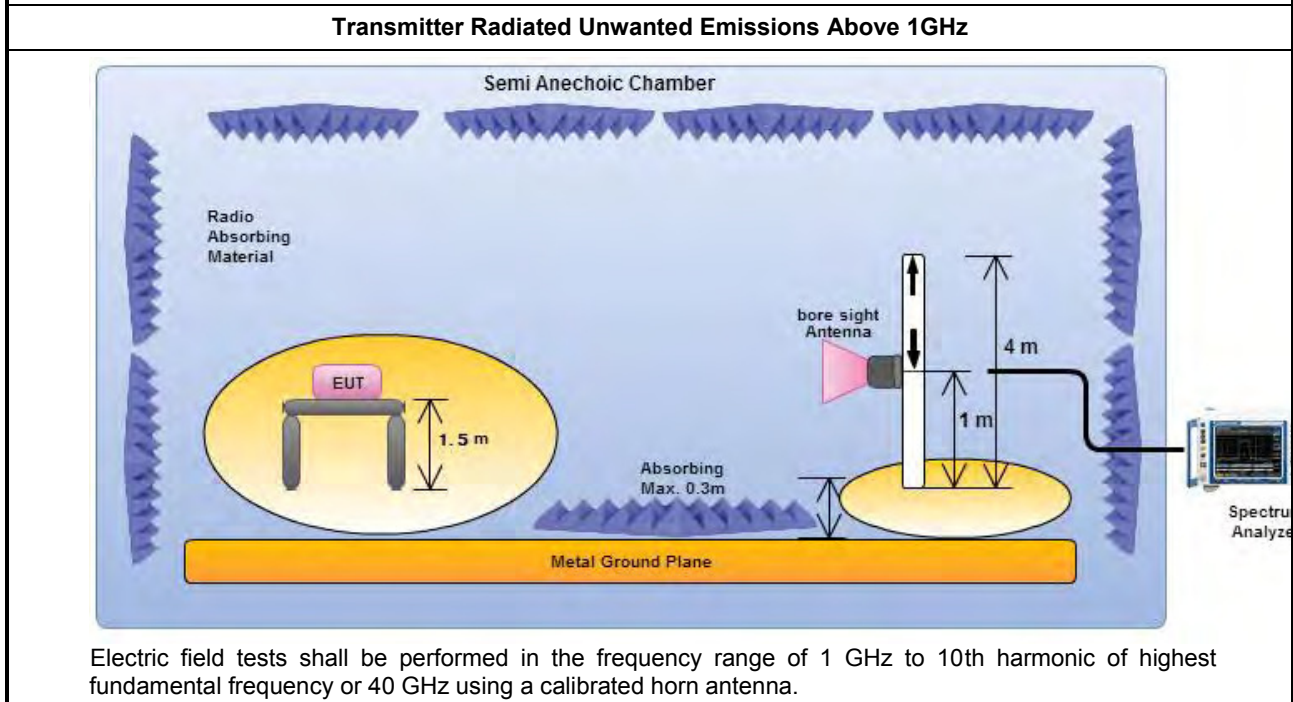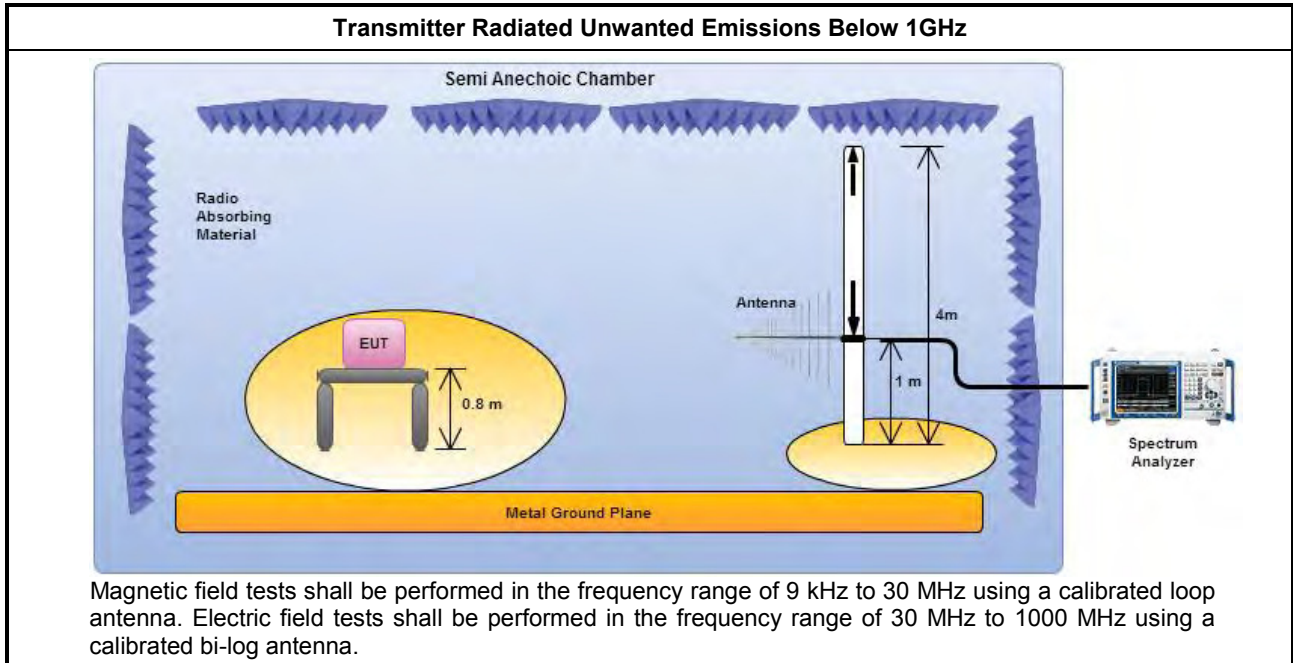


Note: FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 02, 2014.

### 1.1.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)


All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

1.1.6 Results of Radiated Emissions (30MHz~1GHz)

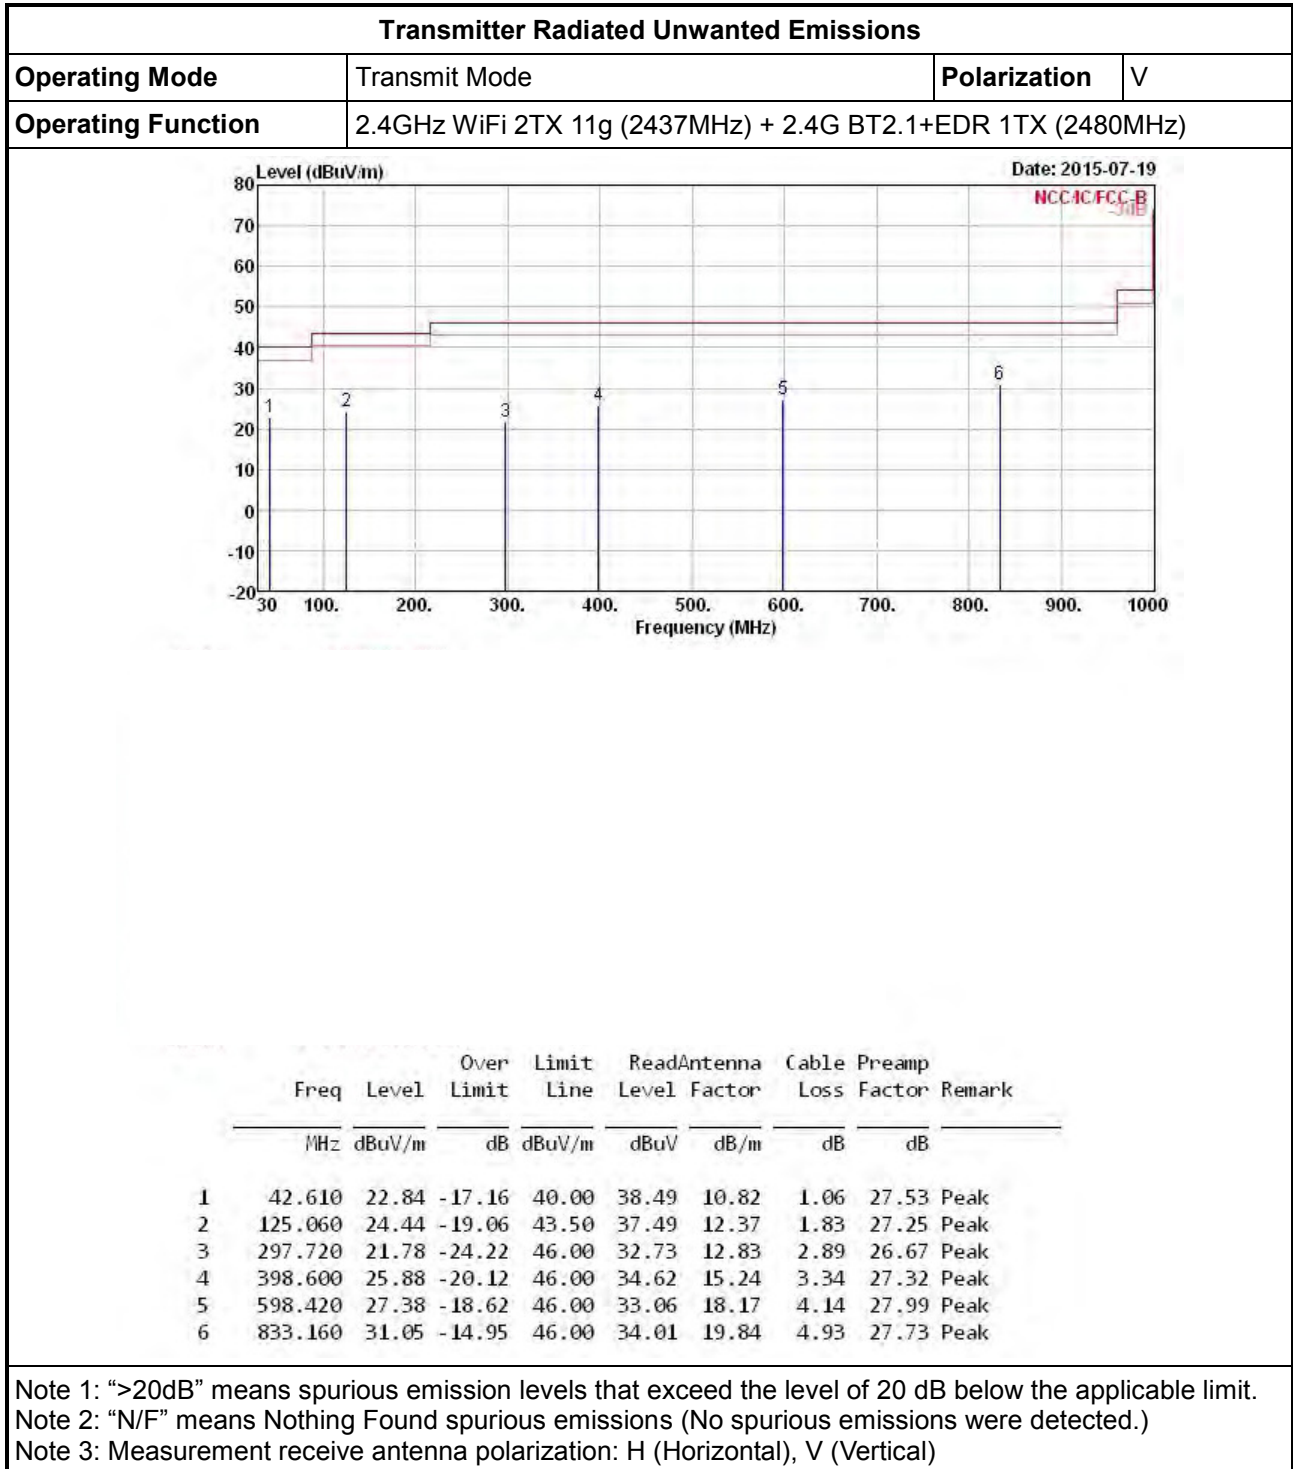




Transmitter Radiated Unwanted Emissions			
Operating Mode	Transmit Mode	Polarization	H
Operating Function	2.4GHz WiFi 2TX 11g (2437MHz) + 2.4G BT2.1+EDR 1TX (2480MHz)		

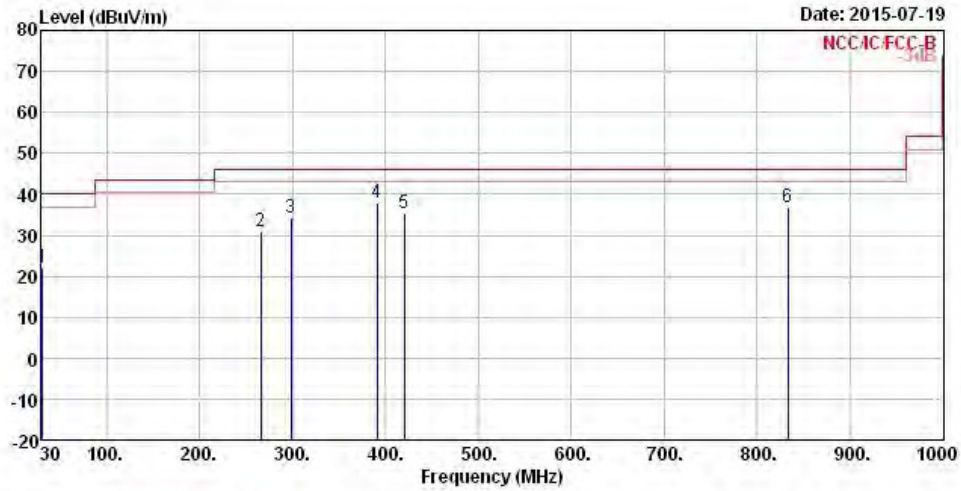



	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	30.970	22.23	-17.77	40.00	31.52	17.42	0.85	27.56	Peak
2	265.710	30.80	-15.20	46.00	42.10	12.77	2.70	26.77	Peak
3	298.690	34.28	-11.72	46.00	45.20	12.85	2.89	26.66	Peak
4	390.840	37.89	-8.11	46.00	46.91	14.95	3.30	27.27	Peak
5	419.940	35.42	-10.58	46.00	43.48	15.97	3.40	27.43	Peak
6	833.160	36.73	-9.27	46.00	39.69	19.84	4.93	27.73	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

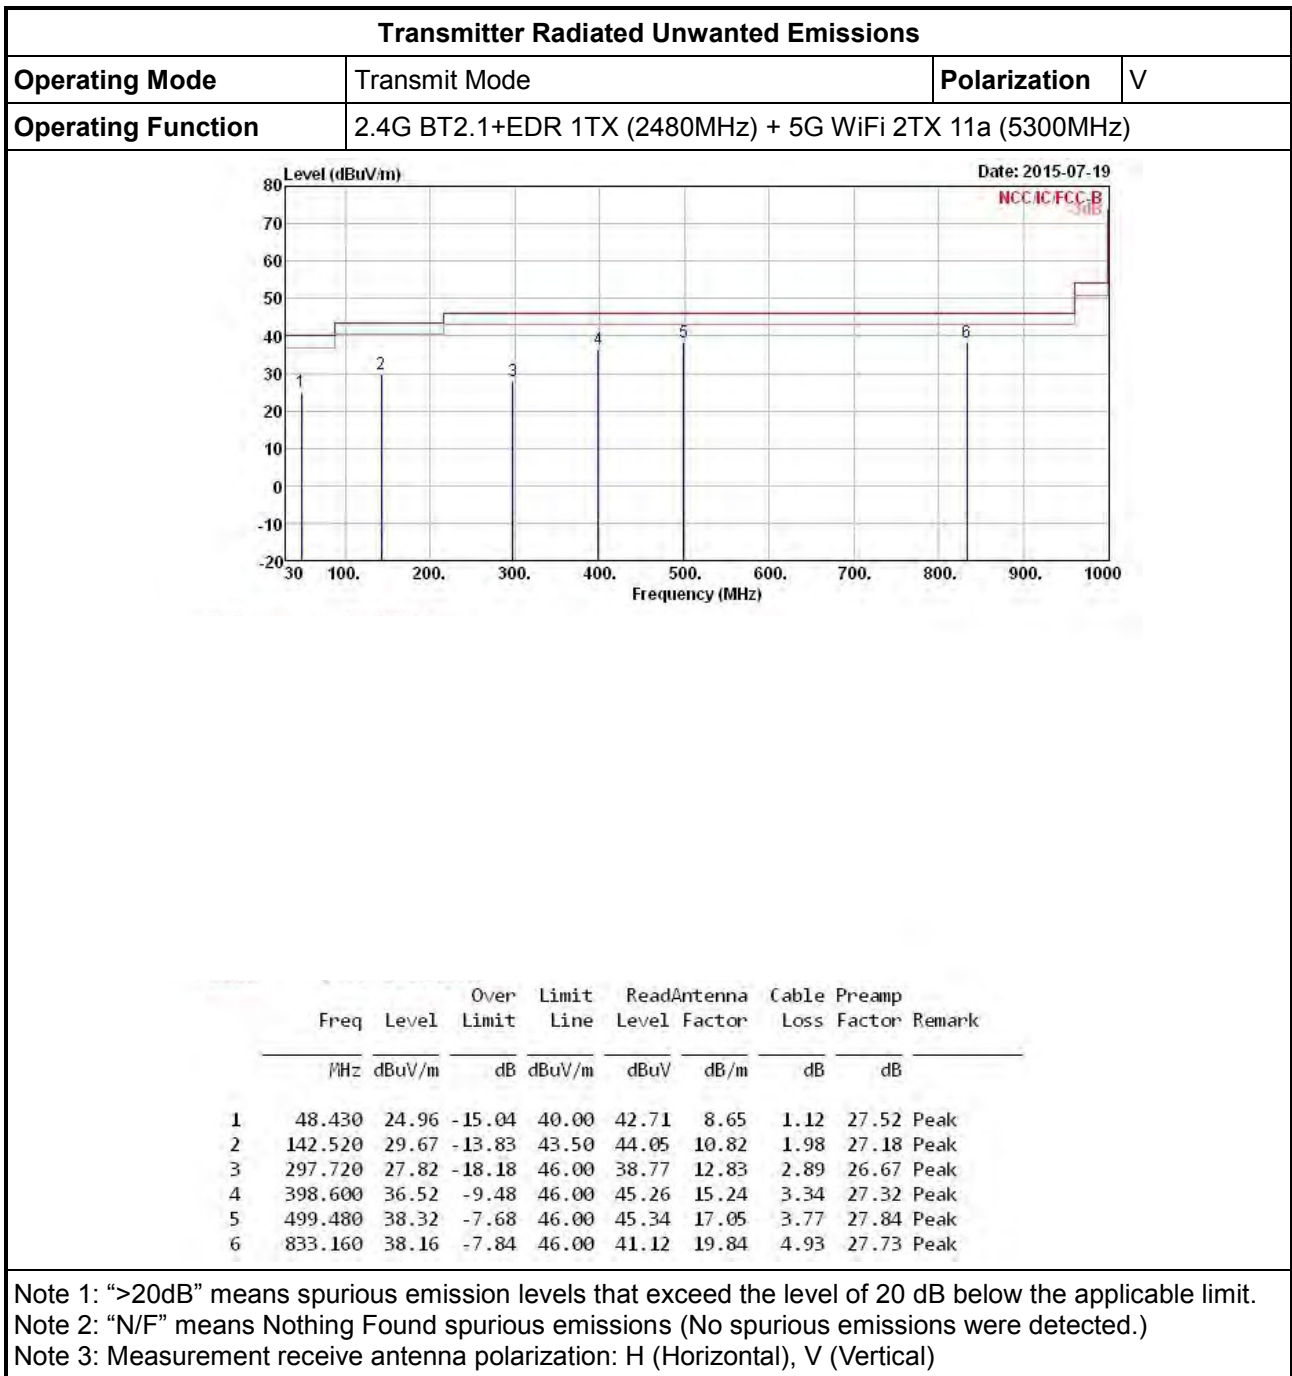




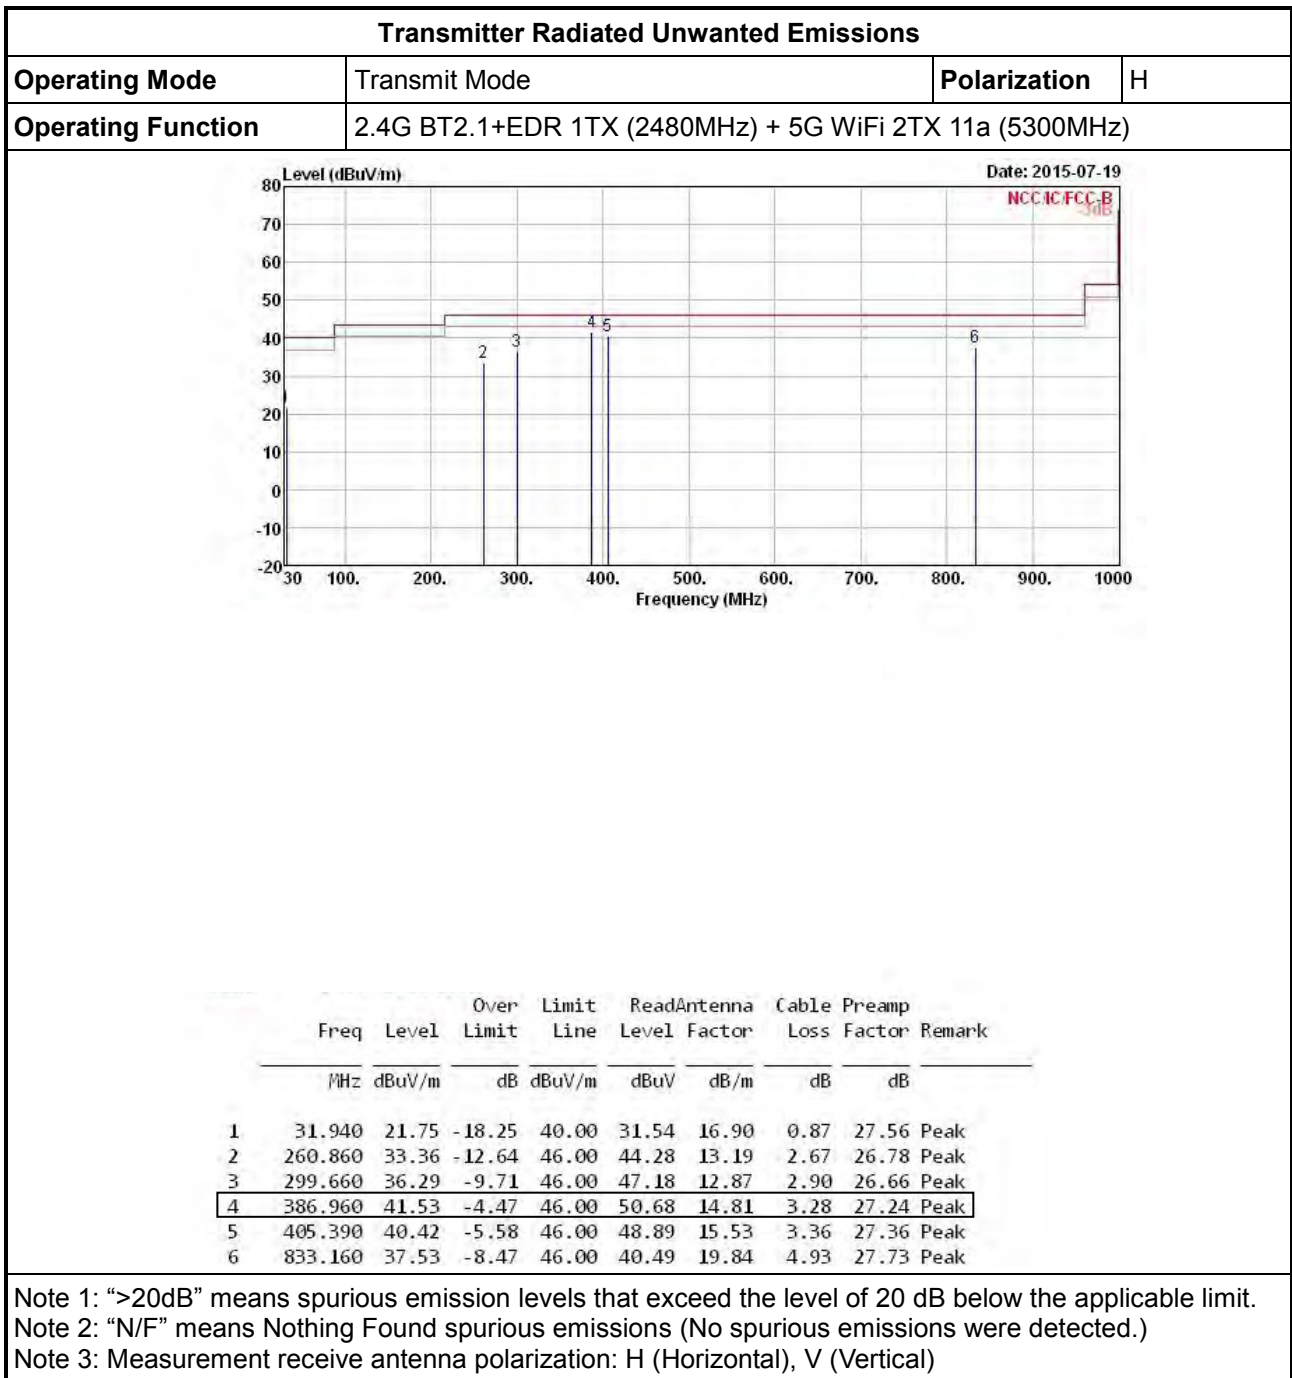

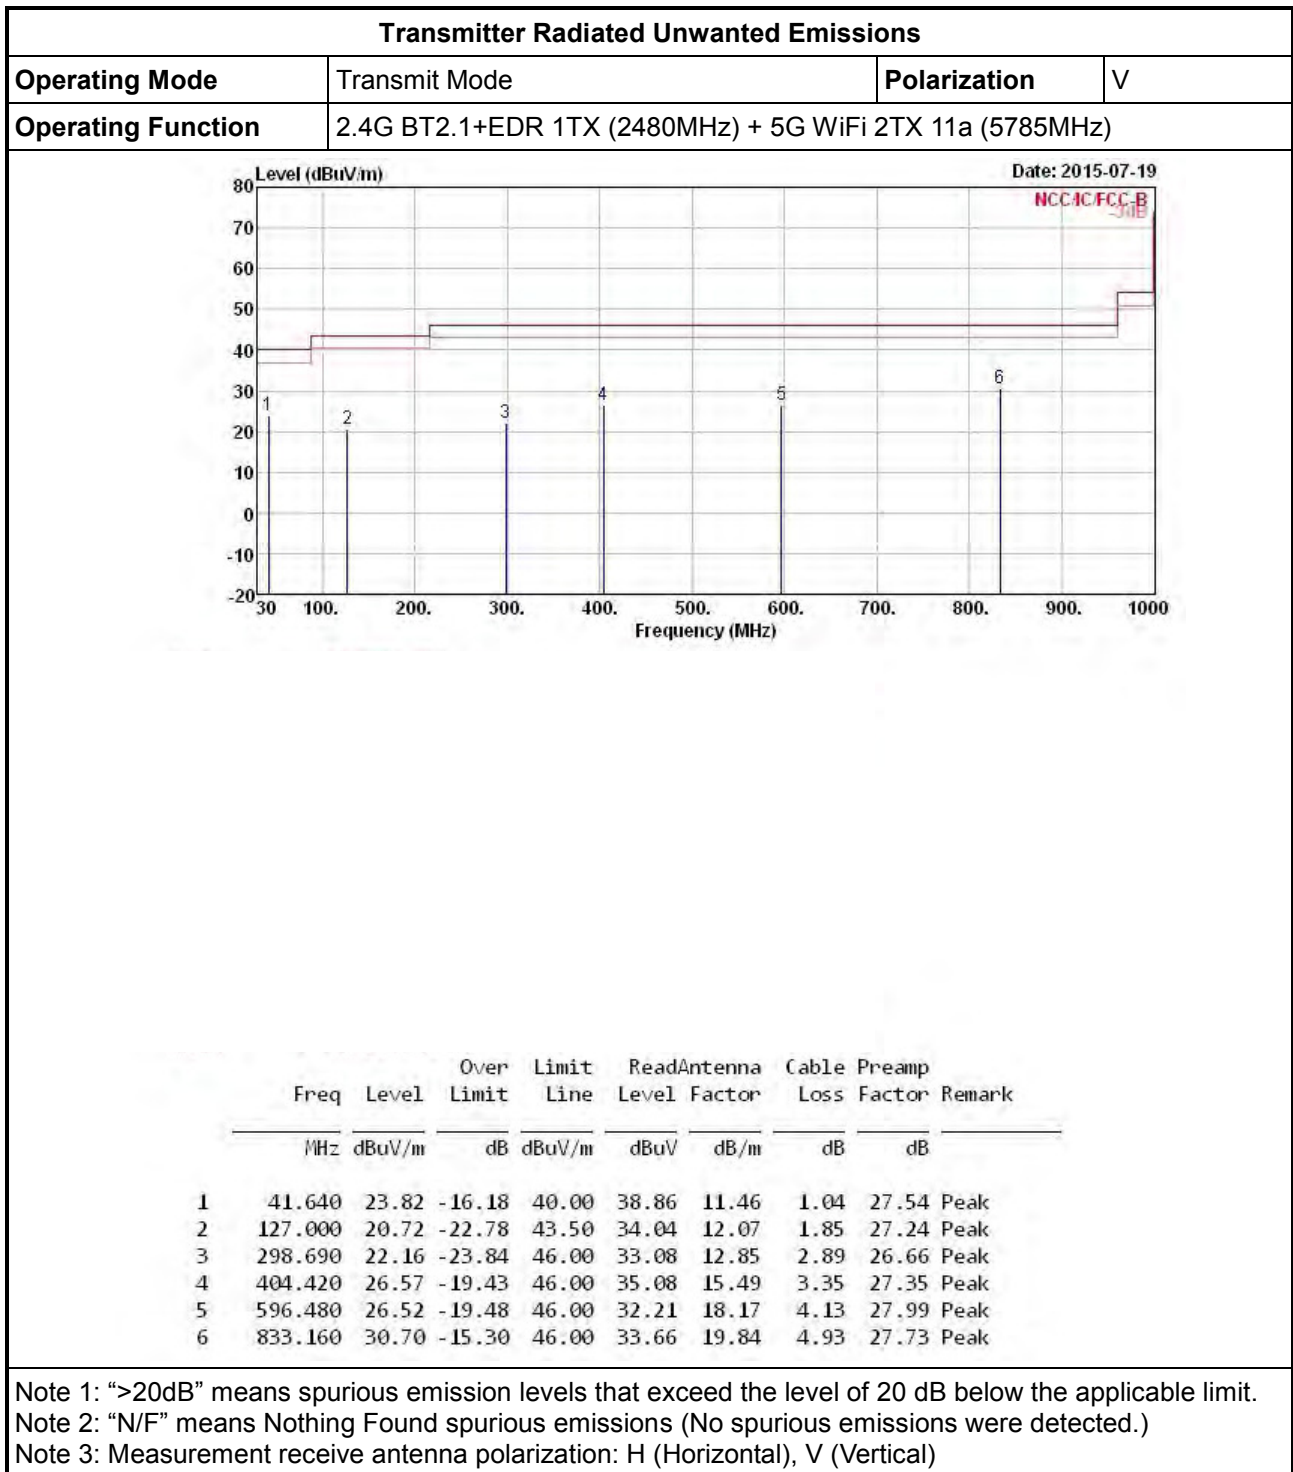



Transmitter Radiated Unwanted Emissions			
Operating Mode	Transmit Mode	Polarization	H
Operating Function	2.4G BT2.1+EDR 1TX (2480MHz) + 5G WiFi 2TX 11a (5785MHz)		

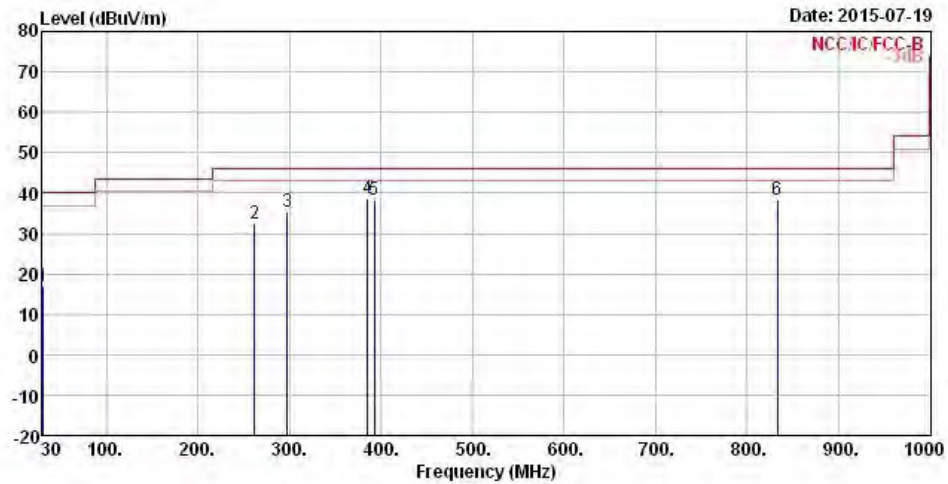


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	30.970	17.06	-22.94	40.00	26.35	17.42	0.85	27.56	Peak
2	261.830	32.45	-13.55	46.00	43.45	13.10	2.68	26.78	Peak
3	297.720	35.24	-10.76	46.00	46.19	12.83	2.89	26.67	Peak
4	385.020	38.52	-7.48	46.00	47.74	14.74	3.27	27.23	Peak
5	392.780	38.32	-7.68	46.00	47.27	15.02	3.31	27.28	Peak
6	833.160	38.13	-7.87	46.00	41.09	19.84	4.93	27.73	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)




1.1.7 Results for Radiated Emissions (1GHz~10th Harmonic)

Transmitter Radiated Unwanted Emissions	
Operating Function	2.4GHz WiFi 2TX 11g (2437MHz) + 2.4G BT2.1+EDR 1TX (2480MHz)
Polarization	V

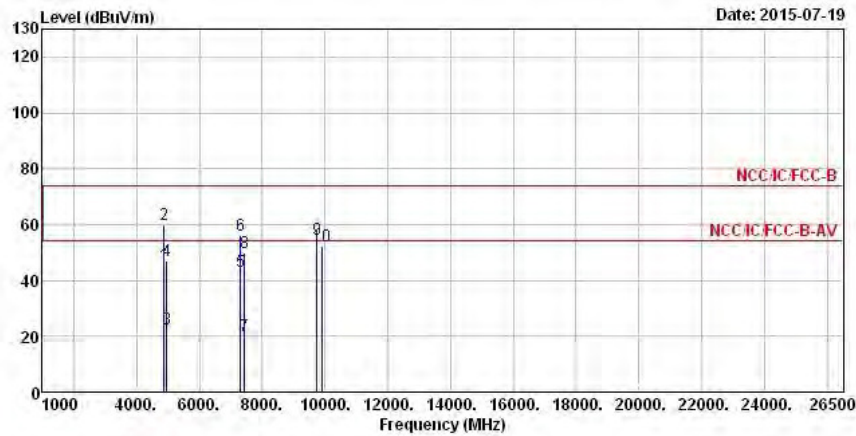


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB	dB	
1	4874.000	45.64	-8.36	54.00	40.20	33.38	4.51	32.45 Average
2	4874.000	60.01	-13.99	74.00	54.57	33.38	4.51	32.45 Peak
3	4960.000	22.71	-31.29	54.00	17.11	33.47	4.57	32.44 Average
4	4960.000	47.21	-26.79	74.00	41.61	33.47	4.57	32.44 Peak
5	7311.000	43.11	-10.89	54.00	33.70	36.33	5.75	32.67 Average
6	7311.000	56.31	-17.69	74.00	46.90	36.33	5.75	32.67 Peak
7	7440.000	20.00	-34.00	54.00	10.40	36.53	5.79	32.72 Average
8	7440.000	50.11	-23.89	74.00	40.51	36.53	5.79	32.72 Peak
9	9748.000	54.79	-19.21	74.00	43.67	37.55	6.71	33.14 Peak
10	9920.000	52.22	-21.78	74.00	41.04	37.51	6.80	33.13 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

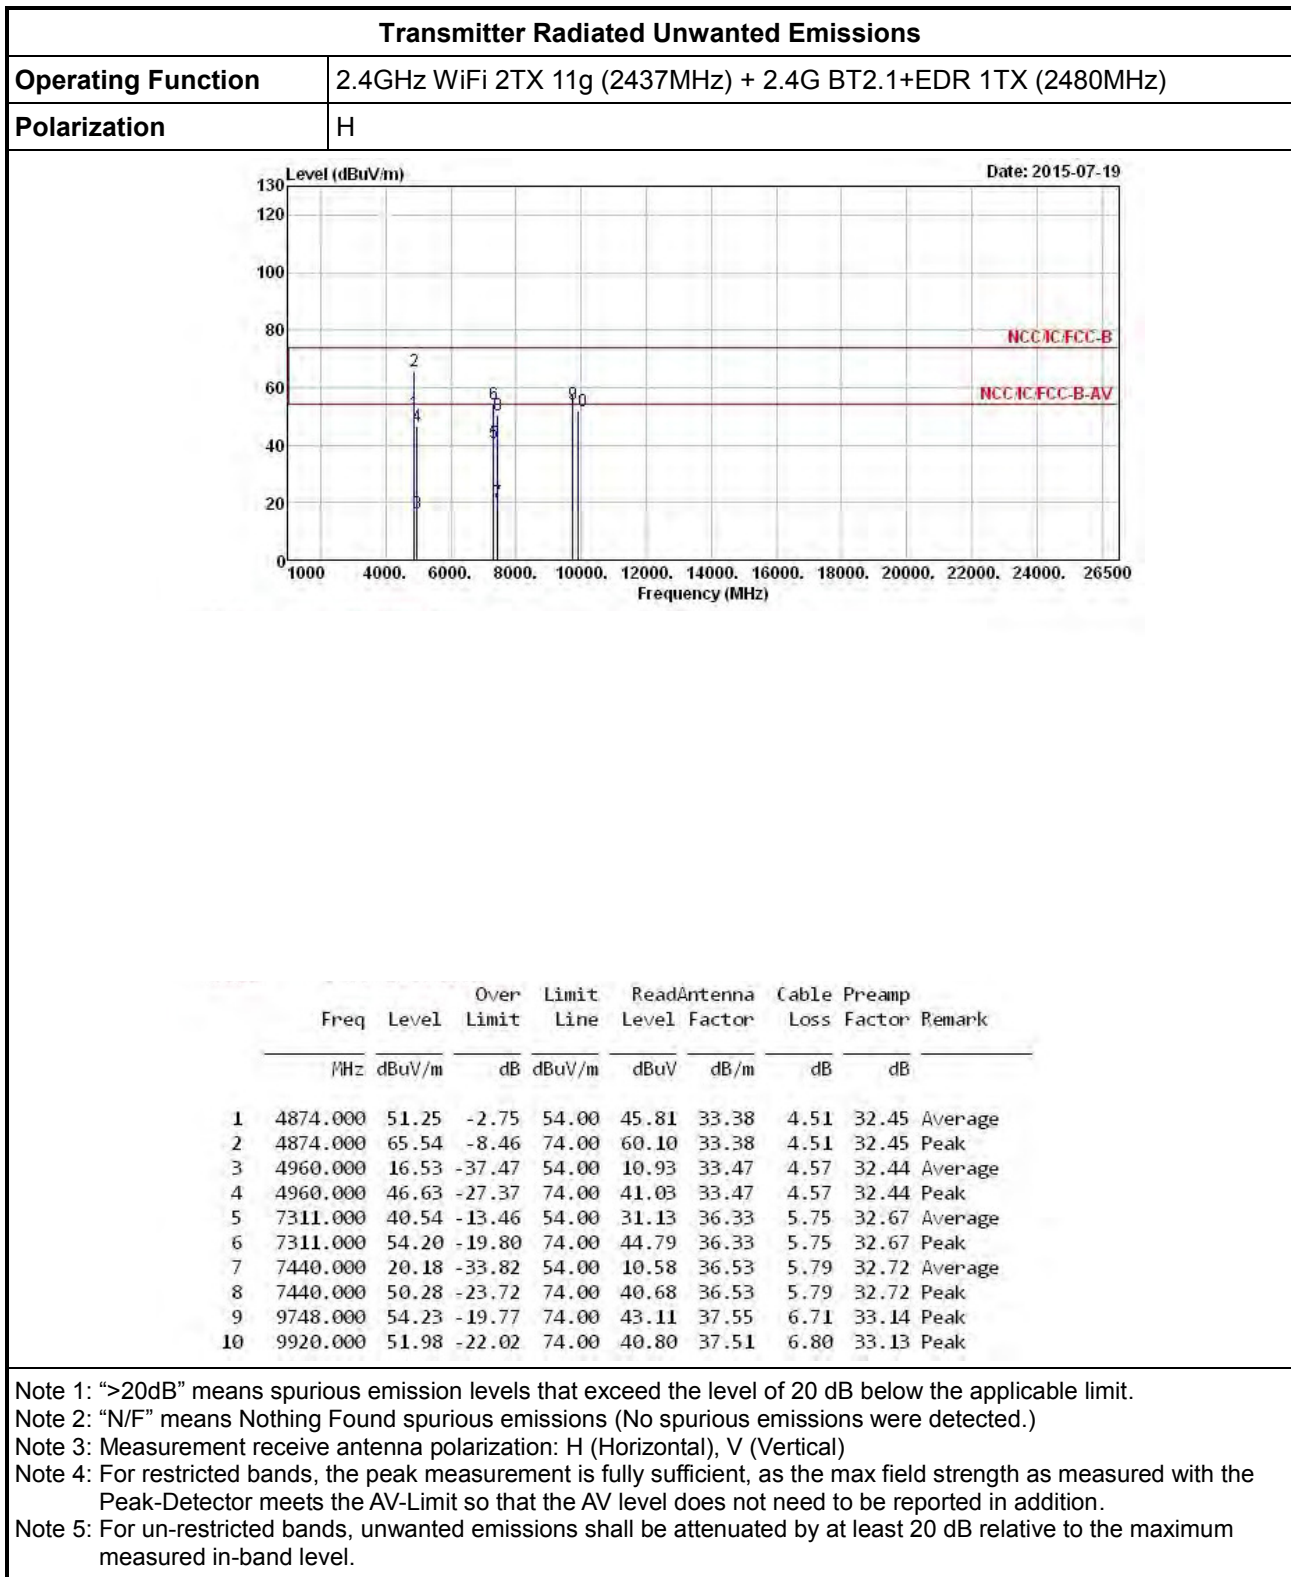




Transmitter Radiated Unwanted Emissions	
Operating Function	2.4G BT2.1+EDR 1TX (2480MHz) + 5G WiFi 2TX 11a (5300MHz)
Polarization	V

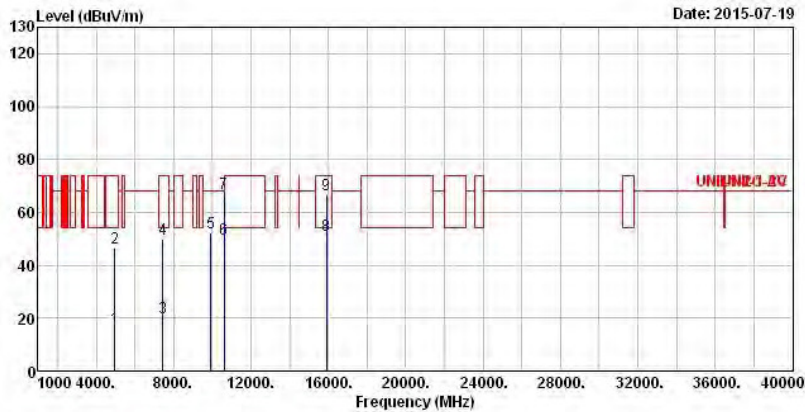

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	4960.000	16.52	-37.48	54.00	10.92	33.47	4.57	32.44 Average
2	4960.000	46.62	-27.38	74.00	41.02	33.47	4.57	32.44 Peak
3	7440.000	20.03	-33.97	54.00	10.43	36.53	5.79	32.72 Average
4	7440.000	50.13	-23.87	74.00	40.53	36.53	5.79	32.72 Peak
5	9920.000	52.42	-15.78	68.20	41.24	37.51	6.80	33.13 Peak
6	10600.000	49.72	-4.28	54.00	37.44	37.86	7.05	32.63 Average
7	10600.000	66.96	-7.04	74.00	54.68	37.86	7.05	32.63 Peak
8	15900.000	51.12	-2.88	54.00	35.93	38.66	8.89	32.36 Average
9	15900.000	66.59	-7.41	74.00	51.40	38.66	8.89	32.36 Peak


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

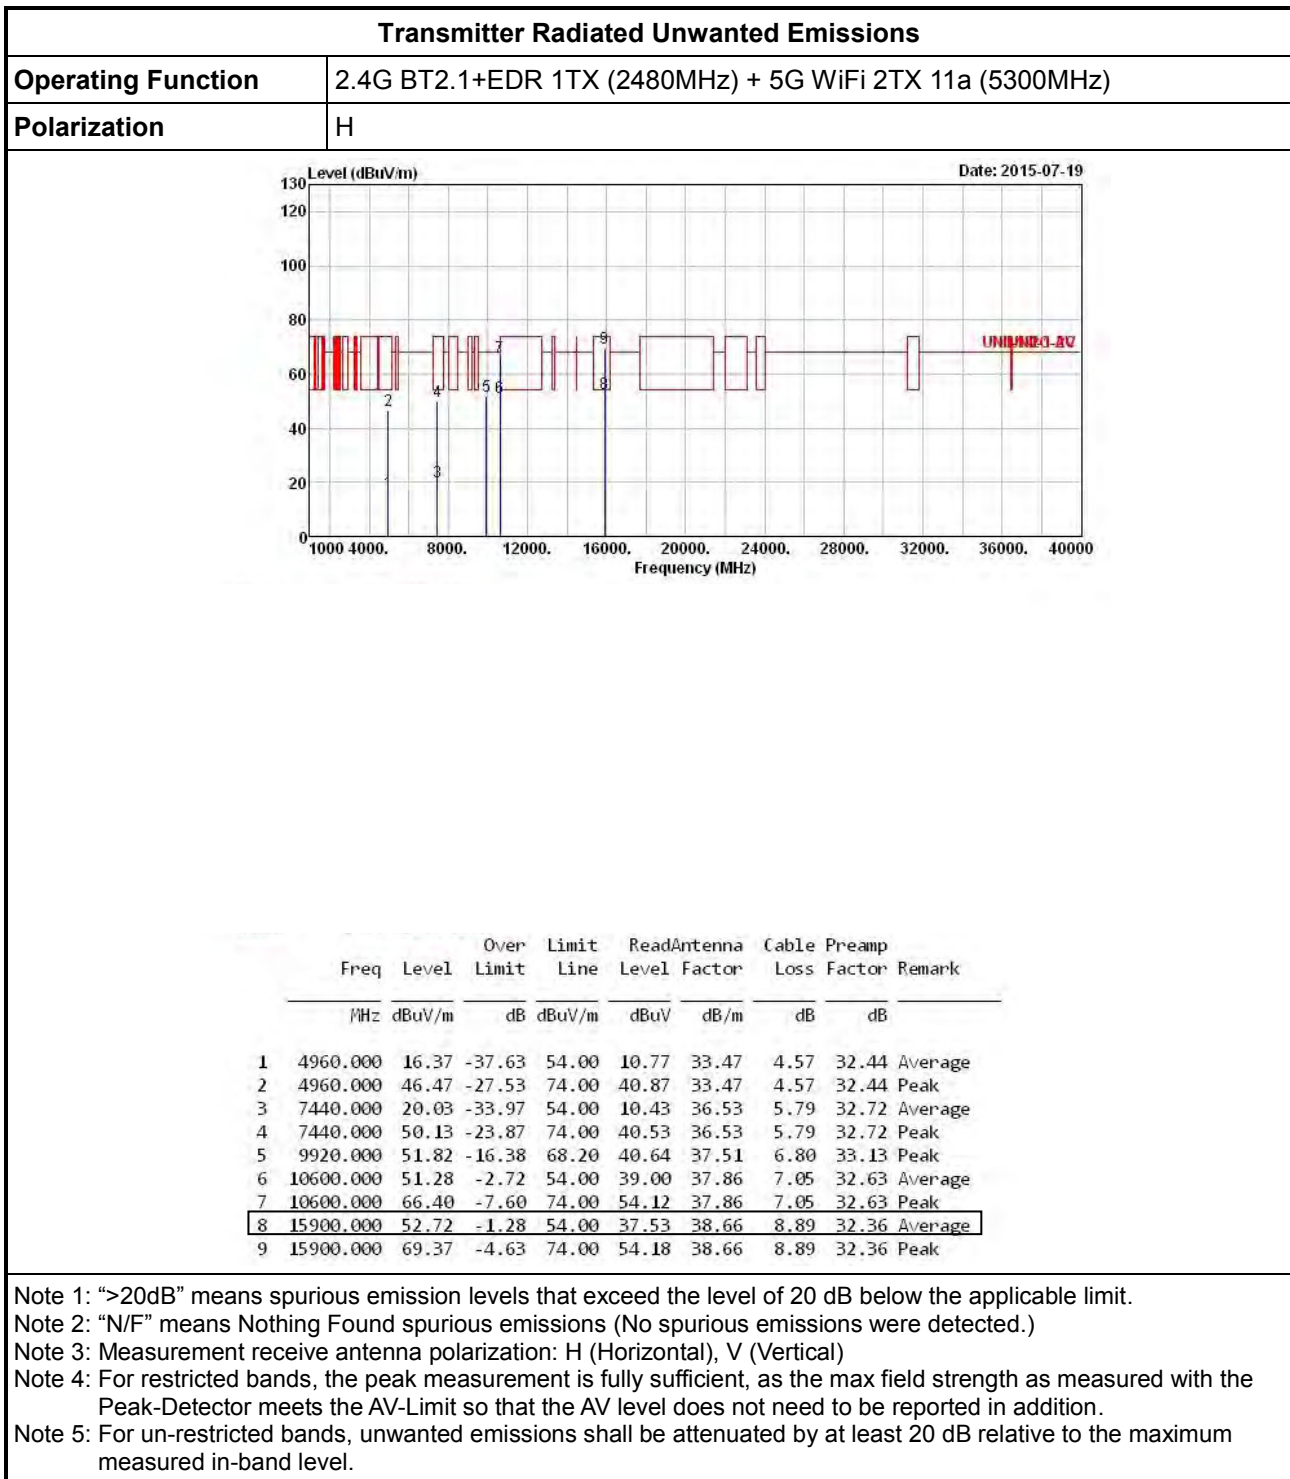



**Transmitter Radiated Unwanted Emissions**


<b>Operating Function</b>	2.4G BT2.1+EDR 1TX (2480MHz) + 5G WiFi 2TX 11a (5785MHz)
<b>Polarization</b>	V

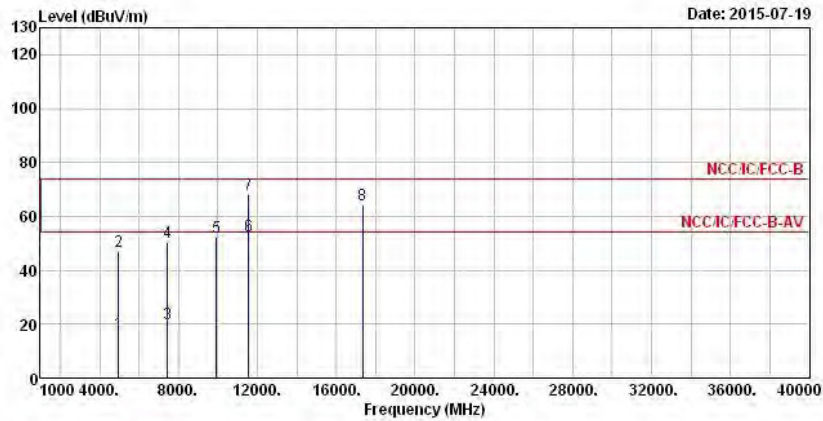

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4960.000	16.99	-37.01	54.00	11.39	33.47	4.57	32.44	Average
2	4960.000	47.09	-26.91	74.00	41.49	33.47	4.57	32.44	Peak
3	7440.000	20.17	-33.83	54.00	10.57	36.53	5.79	32.72	Average
4	7440.000	50.27	-23.73	74.00	40.67	36.53	5.79	32.72	Peak
5	9920.000	52.30	-21.70	74.00	41.12	37.51	6.80	33.13	Peak
6	11570.000	52.58	-1.42	54.00	38.84	38.61	7.55	32.42	Average
7	11570.000	68.28	-5.72	74.00	54.54	38.61	7.55	32.42	Peak
8	17355.000	64.28	-9.72	74.00	44.54	41.66	9.54	31.46	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



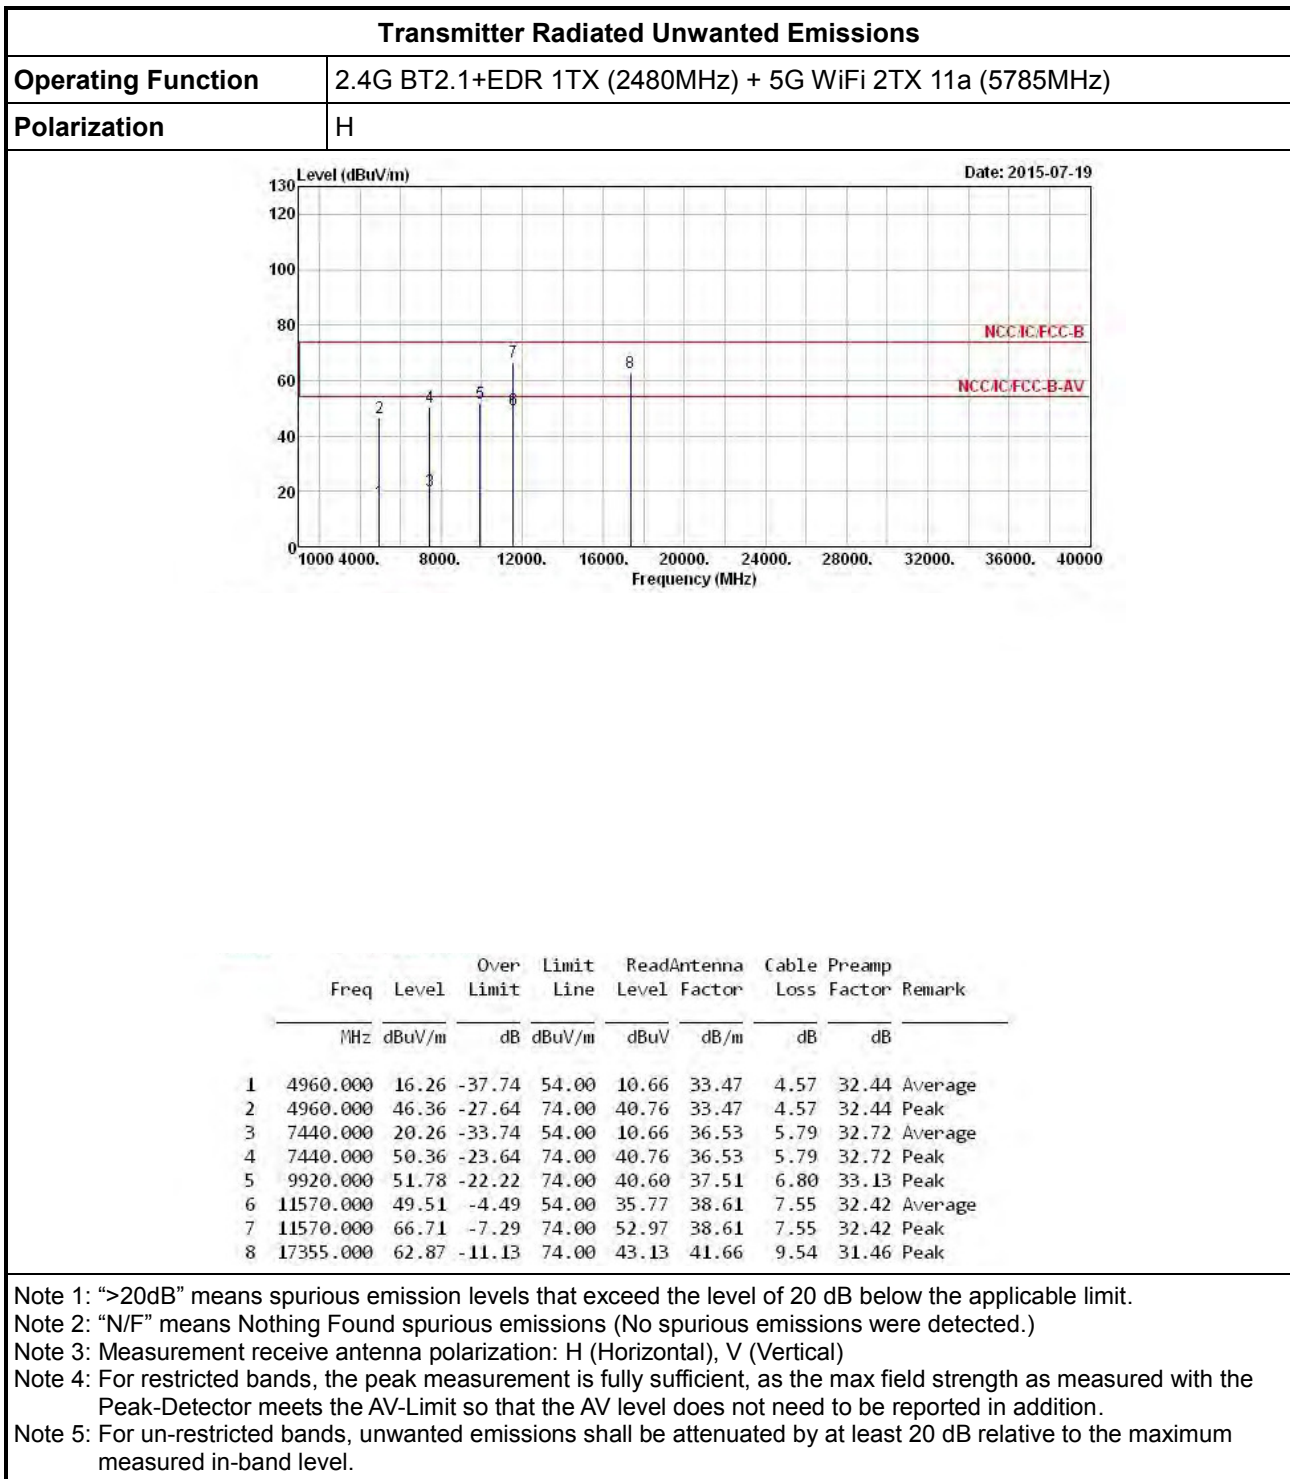



## 2 TEST EQUIPMENT AND CALIBRATION DATA

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Nov. 29, 2014	Radiated Emission
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May 11, 2015	Radiated Emission
Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	Sep. 01, 2014	Radiated Emission
Spectrum	R&S	FSP40	100004	9kHz ~ 40GHz	Apr. 02, 2015	Radiated Emission
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Sep. 20, 2014	Radiated Emission
Horn Antenna	AARONIA AG	POWERLOG 70180	05192	1GHz ~ 18GHz	May 01, 2015	Radiated Emission
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	18GHz ~ 40GHz	Jan. 27, 2015	Radiated Emission
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 15, 2014	Radiated Emission
RF Cable-high	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Dec. 12, 2014	Radiated Emission
Turn Table	EM Electronics	EM Electronics	060615	0 ~ 360 degree	N/A	Radiated Emission
Antenna Mast	MF	MF-7802	MF780208179	1 ~ 4 m	N/A	Radiated Emission

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	EMC INSTRUMENTS	EMC184045B	980192	18GHz ~ 40GHz	Aug. 25.2014	Radiated Emission

Note: Calibration Interval of instruments listed above is two years.