

# FCC TEST REPORT

**REPORT NO.:** RF940712A08

**MODEL NO.:** MP-0550

**RECEIVED:** July 12, 2005

**TESTED:** Aug. 8 ~ 30, 2005

**ISSUED:** Sep. 5, 2005

**APPLICANT:** Chicony Electronics Co., Ltd.

**ADDRESS:** No. 25, Wu-Gong 6th Rd., Wu Ku Industrial Park,  
Taipei Hsien, Taiwan, R.O.C.

**ISSUED BY:** Advance Data Technology Corporation

**LAB LOCATION:** No. 47, 14<sup>th</sup> Ling, Chia Pau Tsuen, Lin Kou Hsiang  
244, Taipei Hsien, Taiwan, R.O.C.

This test report consists of 50 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



NO. 2177-01



0528  
ILAC MRA



## TABLE OF CONTENTS

1.	CERTIFICATION.....	4
2.	SUMMARY OF TEST RESULTS.....	5
2.1	MEASUREMENT UNCERTAINTY .....	6
3.	GENERAL INFORMATION .....	7
3.1	GENERAL DESCRIPTION OF EUT .....	7
3.2	DESCRIPTION OF TEST MODES .....	8
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST .....	9
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....	10
3.3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	11
3.3.4	DESCRIPTION OF SUPPORT UNITS.....	12
4.	TEST TYPES AND RESULTS.....	13
4.1	CONDUCTED EMISSION MEASUREMENT .....	13
4.2	RADIATED EMISSION MEASUREMENT .....	13
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	13
4.2.2	TEST INSTRUMENTS .....	14
4.2.3	TEST PROCEDURES.....	15
4.2.4	DEVIATION FROM TEST STANDARD .....	15
4.2.5	TEST SETUP .....	16
4.2.6	EUT OPERATING CONDITIONS.....	16
4.2.7	TEST RESULTS.....	17
4.3	NUMBER OF HOPPING FREQUENCY USED.....	25
4.3.1	LIMIT OF HOPPING FREQUENCY USED .....	25
4.3.2	TEST INSTRUMENTS .....	25
4.3.3	TEST PROCEDURES.....	25
4.3.4	DEVIATION FROM TEST STANDARD .....	26
4.3.5	TEST SETUP .....	26
4.3.6	TEST RESULTS.....	26
4.4	DWELL TIME ON EACH CHANNEL.....	28
4.4.1	LIMIT OF DWELL TIME USED .....	28
4.4.2	TEST INSTRUMENTS .....	28
4.4.3	TEST PROCEDURES.....	28
4.4.4	DEVIATION FROM TEST STANDARD .....	28
4.4.5	TEST SETUP .....	29
4.4.6	TEST RESULTS.....	29
4.5	CHANNEL BANDWIDTH .....	32
4.5.1	LIMITS OF CHANNEL BANDWIDTH.....	32
4.5.2	TEST INSTRUMENTS .....	32
4.5.3	TEST PROCEDURE .....	32
4.5.4	DEVIATION FROM TEST STANDARD .....	33
4.5.5	TEST SETUP .....	33
4.5.6	EUT OPERATING CONDITION .....	33
4.5.7	TEST RESULTS.....	33
4.6	HOPPING CHANNEL SEPARATION .....	36
4.6.1	LIMIT OF HOPPING CHANNEL SEPARATION .....	36



4.6.2	TEST INSTRUMENTS .....	36
4.6.3	TEST PROCEDURES.....	36
4.6.4	DEVIATION FROM TEST STANDARD .....	37
4.6.5	TEST SETUP .....	37
4.6.6	TEST RESULTS.....	37
4.7	MAXIMUM PEAK OUTPUT POWER.....	40
4.7.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT .....	40
4.7.2	TEST INSTRUMENTS .....	40
4.7.3	TEST PROCEDURES.....	40
4.7.4	DEVIATION FROM TEST STANDARD .....	40
4.7.5	TEST SETUP .....	41
4.7.6	EUT OPERATING CONDITION.....	41
4.7.7	TEST RESULTS.....	41
4.8	BAND EDGES MEASUREMENT.....	44
4.8.1	LIMITS OF BAND EDGES MEASUREMENT .....	44
4.8.2	TEST INSTRUMENTS .....	44
4.8.3	TEST PROCEDURE .....	44
4.8.4	DEVIATION FROM TEST STANDARD .....	44
4.8.5	EUT OPERATING CONDITION.....	44
4.8.6	TEST RESULTS.....	45
4.9	ANTENNA REQUIREMENT.....	48
4.9.1	STANDARD APPLICABLE.....	48
4.9.2	ANTENNA CONNECTED CONSTRUCTION.....	48
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION .....	49
6.	INFORMATION ON THE TESTING LABORATORIES.....	50



## 1. CERTIFICATION

**PRODUCT:** Bluetooth keyboard  
**MODEL NO.:** MP-0550  
**BRAND NAME:** Chicony  
**APPLICANT:** Chicony Electronics Co., Ltd.  
**TESTED:** Aug. 8 ~ 30, 2005  
**TEST SAMPLE:** ENGINEERING SAMPLE  
**STANDARDS:** FCC Part 15, Subpart C (Section 15.247)  
FCC Part 15, Subpart B, Class B  
ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY** : Annie Chang , **DATE:** Sep. 5, 2005  
( Annie Chang )

**TECHNICAL ACCEPTANCE** : Ken Liu , **DATE:** Sep. 5, 2005  
Responsible for RF ( Ken Liu )

**APPROVED BY** : Cody Chang , **DATE:** Sep. 5, 2005  
( Cody Chang / Deputy Manager )

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

<b>APPLIED STANDARD: FCC Part 15, Subpart C</b>			
<b>STANDARD SECTION</b>	<b>TEST TYPE AND LIMIT</b>	<b>RESULT</b>	<b>REMARK</b>
15.207	AC Power Conducted Emission	N/A	The EUT power from AAA battery x2
15.247(a)(1)(iii)	Number of Hopping Frequency Used Spec.: At least 15 channels	PASS	Meet the requirement of limit.
15.247(a)(1)(iii)	Dwell Time on Each Channel Spec. : Max. 0.4 second within 31.6 second	PASS	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation Spec. : Min. 25 kHz or 20 dB bandwidth, whichever is greater (see Note 1) 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Spec.: max. 30dBm (see Note 1)	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Spec.: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -6.15 dB at 2483.50MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.

**NOTE:** If The Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.



APPLIED STANDARD: FCC Part 15, Subpart B			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
FCC Part 15, Subpart B, Class B	Conducted Emission	N/A	The EUT power from AAA battery x2
	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -11.62dB at 82.48MHz

## 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

MEASUREMENT	UNCERTAINTY
Radiated emissions	3.86 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Bluetooth keyboard
<b>MODEL NO.</b>	MP-0550
<b>POWER SUPPLY</b>	3Vdc from AAA battery x2
<b>MODULATION TYPE</b>	GFSK
<b>RADIO TECHNOLOGY</b>	FHSS
<b>TRANSFER RATE</b>	585.6Kbps
<b>FREQUENCY RANGE</b>	2400 ~ 2483.5 MHz
<b>NUMBER OF CHANNEL</b>	79
<b>OUTPUT POWER</b>	1.884mW
<b>ANTENNA TYPE</b>	Strip antenna with -1.9dBi gain
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	NA
<b>ASSOCIATED DEVICES</b>	NA

**NOTE:**

1. The EUT is wireless keyboard with Bluetooth technology.
2. As client requests, the test data of FCC Part 15, Subpart C and FCC Part 15, Subpart B were combined in this test report.
3. For more detailed features description, please refer to the manufacturer's specifications or User's Manual.


### 3.2 DESCRIPTION OF TEST MODES

79 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2431	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		



### 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

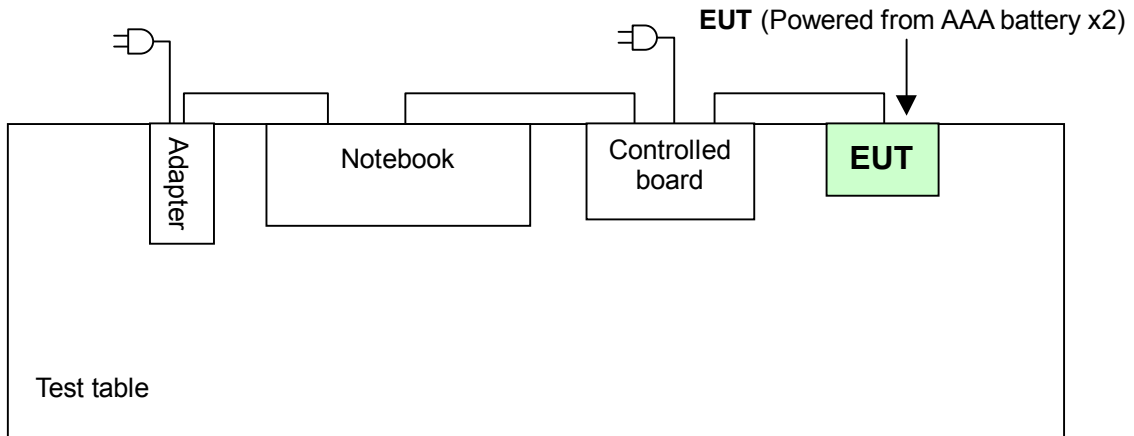

Note:

EUT has no build-in test mode available, a EUT control module was supplied by the manufacture during the test to control the EUT output channel and transmission mode.



### 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	Applicable to			Description
	RE<1G	RE≥1G	APCM	
A	√	√	√	Transmission mode (FCC Part 15, Subpart C)
B	√	-	-	Transmission mode (FCC Part 15, Subpart B)

Where **PLC**: Power Line Conducted Emission

**RE<1G**: Radiated Emission below 1GHz

**RE≥1G**: Radiated Emission above 1GHz

**APCM**: Antenna Port Conducted Measurement

#### **RADIATED EMISSION TEST (BELOW 1 GHz):**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, packet types and X, Y, Z Axis.

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE	AXIS
A	0 to 78	78	FHSS	GFSK	DH3	X
B	0 to 78	78	FHSS	GFSK	DH3	X

#### **RADIATED EMISSION TEST (ABOVE 1 GHz):**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, packet types and X, Y, Z Axis.

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE	AXIS
A	0 to 78	0, 39, 78	FHSS	GFSK	DH3	X



### **BANDEDGE MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0 to 78	0, 78	FHSS	GFSK	DH3

### **ANTENNA PORT CONDUCTED MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
A	0 to 78	0, 39, 78	FHSS	GFSK

### **3.3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a Bluetooth keyboard. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C. (15.247)**

**FCC Part 15, Subpart B, Class B**

**ANSI C63.4- 2003**

All test items have been performed and recorded as per the above standards.



### 3.3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	DELL	D600	CN-0G5152-48643-487-0213	FCC DoC Approved
2	Controlled board	Chicony	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A
2	N/A

**NOTE:** All power cords of the above support units are non-shielded (1.8m).



## 4. TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

N/A

### 4.2 RADIATED EMISSION MEASUREMENT

#### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



## 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	May 22, 2006
HP Preamplifier	8449B	3008A01924	Sep. 19, 2005
HP Preamplifier	8449B	3008A01638	Sep. 30, 2005
SCHWARZBECK Tunable Dipole Antenna	VHA 9103	NA	Oct. 29, 2005
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
ROHDE & SCHWARZ TEST RECEIVER	ESI7	836697/012	Nov. 05, 2005
Schwarzbeck Antenna	VULB 9168	137	Feb. 27, 2006
Schwarzbeck Antenna	VHBA 9123	480	Apr. 11, 2006
EMCO Horn Antenna	3115	6714	Oct. 28, 2005
EMCO Horn Antenna	3115	9312-4192	Feb. 28, 2006
ADT. Turn Table	TT100	0306	NA
ADT. Tower	AT100	0306	NA
Software	ADT_Radiated_V 6	NA	NA
TIMES RF cable	LL142	CABLE-CH6-01	Dec. 19, 2005

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
  2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  3. The test was performed in ADT Chamber No. 6.
  4. The Industry Canada Reference No. IC 3789-6.



### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.

### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation

## 4.2.5 TEST SETUP

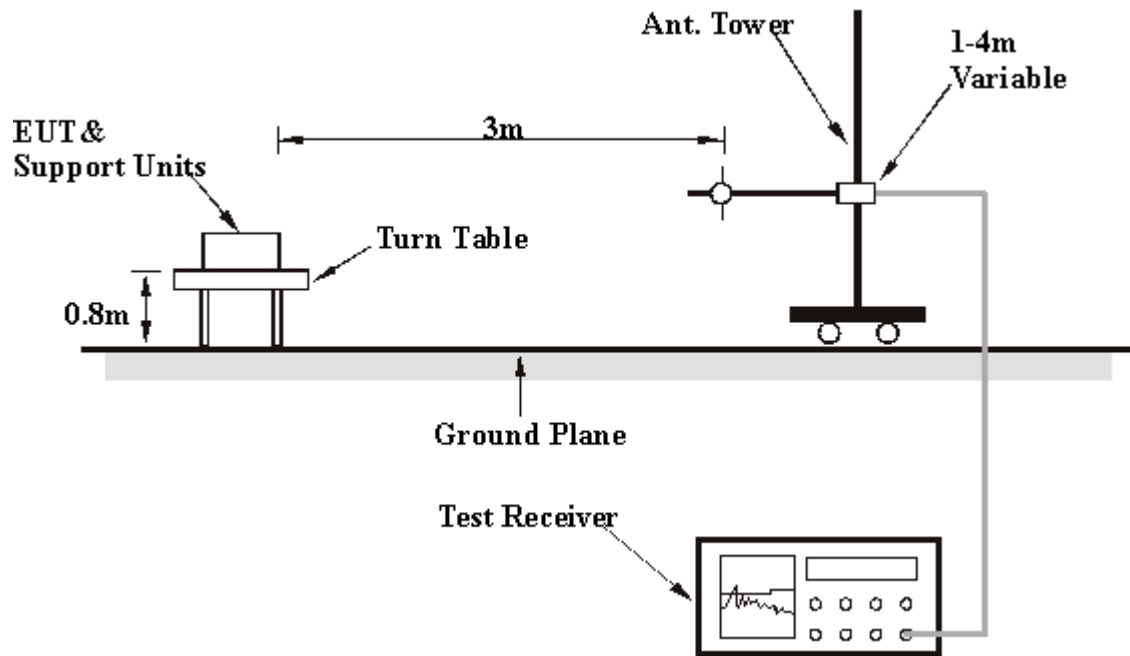

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

## 4.2.6 EUT OPERATING CONDITIONS

- Connected the EUT to the notebook system via the controlled board and placed on a testing table.
- The notebook system ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.





## 4.2.7 TEST RESULTS

### RADIATED WORST CASE DATA: BELOW 1GHz

#### Mode A for Transmission mode (FCC Part 15, Subpart C)

<b>EUT</b>	Bluetooth keyboard	<b>MEASUREMENT DETAIL</b>	
<b>MODEL</b>	MP-0550	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>CHANNEL</b>	Channel 78	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>MODULATION TYPE</b>	GFSK	<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 75%RH, 1001hPa
<b>TEST MODE</b>	A	<b>INPUT POWER</b>	3Vdc
<b>TESTED BY</b>	Jamison Chan		

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	105.81	26.23 QP	43.50	-17.27	3.00 H	331	18.45	7.78
2	168.02	20.01 QP	43.50	-23.49	1.00 H	349	11.95	8.06
3	214.67	20.32 QP	43.50	-23.18	1.00 H	16	12.20	8.12
4	368.24	22.51 QP	46.00	-23.49	1.00 H	301	13.94	8.57
5	422.67	22.62 QP	46.00	-23.38	1.00 H	334	13.98	8.64
6	607.33	29.75 QP	46.00	-16.25	1.25 H	82	20.68	9.07

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	51.38	18.33 QP	40.00	-21.67	1.00 V	58	10.74	7.58
2	82.48	28.84 QP	40.00	-11.16	1.50 V	64	21.23	7.61
3	121.36	27.51 QP	43.50	-15.99	1.00 V	175	19.61	7.90
4	168.02	20.46 QP	43.50	-23.04	1.00 V	298	12.40	8.06
5	214.67	16.87 QP	43.50	-26.63	1.00 V	310	8.75	8.12
6	589.84	20.78 QP	46.00	-25.22	1.50 V	10	11.74	9.04

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  - 3The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



### Mode B for Transmission mode (FCC Part 15, Subpart B)

<b>EUT</b>	Bluetooth keyboard	<b>MEASUREMENT DETAIL</b>	
<b>MODEL</b>	MP-0550	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>CHANNEL</b>	Channel 78	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>MODULATION TYPE</b>	GFSK	<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 75%RH, 1001hPa
<b>INPUT POWER</b>	3Vdc	<b>TESTED BY</b>	Jamison Chan

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	105.81	27.18 QP	43.50	-16.32	3.00 H	352	19.40	7.78
2	152.46	31.46 QP	43.50	-12.04	1.75 H	355	23.46	8.00
3	214.67	19.73 QP	43.50	-23.77	1.00 H	16	11.61	8.12
4	383.79	20.86 QP	46.00	-25.14	1.00 H	304	12.29	8.57
5	422.67	22.47 QP	46.00	-23.53	1.00 H	334	13.83	8.64
6	607.33	23.19 QP	46.00	-22.81	1.25 H	82	14.12	9.07

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	43.61	21.26 QP	40.00	-18.74	1.25 V	97	13.74	7.52
<b>2</b>	<b>82.48</b>	<b>28.38 QP</b>	<b>40.00</b>	<b>-11.62</b>	<b>1.50 V</b>	<b>10</b>	<b>20.76</b>	<b>7.61</b>
3	121.36	27.47 QP	43.50	-16.03	1.00 V	226	19.57	7.90
4	168.02	20.25 QP	43.50	-23.25	1.00 V	283	12.19	8.06
5	199.12	19.74 QP	43.50	-23.76	1.00 V	328	11.67	8.07
6	601.50	21.09 QP	46.00	-24.91	1.50 V	97	12.02	9.07

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



**Mode A for Transmission mode (FCC Part 15, Subpart C)**

<b>EUT</b>	Bluetooth keyboard	<b>MEASUREMENT DETAIL</b>	
<b>MODEL</b>	MP-0550	<b>FREQUENCY RANGE</b>	1 ~ 25GHz
<b>CHANNEL</b>	Channel 0	<b>DETECTOR FUNCTION</b>	Peak (PK) Average (AV)
<b>MODULATION TYPE</b>	GFSK	<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 75%RH, 1001hPa
<b>TEST MODE</b>	A	<b>INPUT POWER</b>	3Vdc
<b>TESTED BY</b>	Jamison Chan		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1602.00	44.03 PK	74.00	-29.97	1.17 H	252	14.76	29.27
1	1602.00	36.32 AV	54.00	-17.68	1.17 H	252	7.05	29.27
2	2390.00	46.53 PK	74.00	-27.47	1.00 H	314	14.77	31.76
2	2390.00	41.44 AV	54.00	-12.56	1.00 H	314	9.68	31.76
3	*2402.00	97.06 PK			1.00 H	314	65.29	31.77
3	*2402.00	62.56 AV			1.00 H	314	30.79	31.77
4	4804.00	50.01 PK	74.00	-23.99	1.00 H	323	12.22	37.79
4	4804.00	15.51 AV	54.00	-38.49	1.00 H	323	-22.28	37.79
5	7206.00	54.45 PK	74.00	-19.55	1.01 H	4	12.43	42.02
5	7206.00	19.95 AV	54.00	-34.05	1.01 H	4	-22.07	42.02

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1602.00	44.43 PK	74.00	-29.57	1.00 V	110	15.16	29.27
1	1602.00	36.47 AV	54.00	-17.53	1.00 V	110	7.20	29.27
2	2390.00	42.89 PK	74.00	-31.11	1.00 V	285	11.13	31.76
2	2390.00	37.80 AV	54.00	-16.20	1.00 V	285	6.04	31.76
3	*2402.00	93.42 PK			1.00 V	285	61.65	31.77
3	*2402.00	58.92 AV			1.00 V	285	27.15	31.77
4	4804.00	55.10 PK	74.00	-18.90	1.00 V	354	17.31	37.79
4	4804.00	20.60 AV	54.00	-33.40	1.00 V	354	-17.19	37.79
5	7206.00	53.07 PK	74.00	-20.93	1.00 V	53	11.05	42.02
5	7206.00	18.57 AV	54.00	-35.43	1.00 V	53	-23.45	42.02

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The DH3 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 3 per 247 ms per channel. Therefore, the duty cycle be equal to:  $20\log(1.875/100) = -34.5$  dB.
  6. Average value = peak reading +  $20\log(\text{duty cycle})$ .

<b>EUT</b>	Bluetooth keyboard	<b>MEASUREMENT DETAIL</b>	
<b>MODEL</b>	MP-0550	<b>FREQUENCY RANGE</b>	1 ~ 25GHz
<b>CHANNEL</b>	Channel 39	<b>DETECTOR FUNCTION</b>	Peak (PK) Average (AV)
<b>MODULATION TYPE</b>	GFSK	<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 75%RH, 1001hPa
<b>TEST MODE</b>	A	<b>INPUT POWER</b>	3Vdc
<b>TESTED BY</b>	Jamison Chan		

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1628.00	42.30 PK	74.00	-31.70	1.00 H	252	12.90	29.39
1	1628.00	34.21 AV	54.00	-19.79	1.00 H	252	4.81	29.39
2	*2441.00	95.87 PK			1.19 H	330	64.04	31.83
2	*2441.00	61.37 AV			1.19 H	330	29.54	31.83
3	4882.00	50.74 PK	74.00	-23.26	1.00 H	321	12.81	37.93
3	4882.00	16.24 AV	54.00	-37.76	1.00 H	321	-21.69	37.93
4	7323.00	52.62 PK	74.00	-21.38	1.08 H	360	10.44	42.18
4	7323.00	18.12 AV	54.00	-35.88	1.08 H	360	-24.06	42.18

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1628.00	43.58 PK	74.00	-30.42	1.34 V	172	14.18	29.39
1	1628.00	37.04 AV	54.00	-16.96	1.34 V	172	7.64	29.39
2	*2441.00	92.89 PK			1.00 V	283	61.06	31.83
2	*2441.00	58.39 AV			1.00 V	283	26.56	31.83
3	4882.00	56.77 PK	74.00	-17.23	1.09 V	9	18.84	37.93
3	4882.00	22.27 AV	54.00	-31.73	1.09 V	9	-15.66	37.93
4	7323.00	53.36 PK	74.00	-20.64	1.09 V	59	11.18	42.18
4	7323.00	18.86 AV	54.00	-35.14	1.09 V	59	-23.32	42.18

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The DH3 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 3 per 247 ms per channel. Therefore, the duty cycle be equal to:  $20\log(1.875/100) = -34.5$  dB.
  6. Average value = peak reading + 20log(duty cycle).



<b>EUT</b>	Bluetooth keyboard	<b>MEASUREMENT DETAIL</b>	
<b>MODEL</b>	MP-0550	<b>FREQUENCY RANGE</b>	1 ~ 25GHz
<b>CHANNEL</b>	Channel 78	<b>DETECTOR FUNCTION</b>	Peak (PK) Average (AV)
<b>MODULATION TYPE</b>	GFSK	<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 75%RH, 1001hPa
<b>TEST MODE</b>	A	<b>INPUT POWER</b>	3Vdc
<b>TESTED BY</b>	Jamison Chan		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1654.00	43.92 PK	74.00	-30.08	1.08 H	42	14.40	29.52
1	1654.00	36.50 AV	54.00	-17.50	1.08 H	42	6.98	29.52
2	*2480.00	97.47 PK			1.18 H	318	65.58	31.89
2	*2480.00	62.97 AV			1.18 H	318	31.08	31.89
3	2483.50	51.99 PK	74.00	-22.01	1.18 H	318	20.09	31.90
<b>3</b>	<b>2483.50</b>	<b>47.85 AV</b>	<b>54.00</b>	<b>-6.15</b>	<b>1.18 H</b>	<b>318</b>	<b>15.95</b>	<b>31.90</b>
4	4960.00	52.42 PK	74.00	-21.58	1.04 H	300	14.35	38.07
4	4960.00	17.92 AV	54.00	-36.08	1.04 H	300	-20.15	38.07
5	7440.00	52.44 PK	74.00	-21.56	1.00 H	4	10.10	42.33
5	7440.00	17.94 AV	54.00	-36.06	1.00 H	4	-24.40	42.33

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1654.00	44.41 PK	74.00	-29.59	1.24 V	213	14.89	29.52
1	1654.00	38.02 AV	54.00	-15.98	1.24 V	213	8.50	29.52
2	*2480.00	92.52 PK			1.00 V	285	60.63	31.89
2	*2480.00	58.02 AV			1.00 V	285	26.13	31.89
3	2483.50	47.04 PK	74.00	-26.96	1.00 V	285	15.14	31.90
3	2483.50	42.90 AV	54.00	-11.10	1.00 V	285	11.00	31.90
4	4960.00	57.36 PK	74.00	-16.64	1.05 V	0	19.29	38.07
4	4960.00	22.86 AV	54.00	-31.14	1.05 V	0	-15.21	38.07
5	7440.00	53.55 PK	74.00	-20.45	1.57 V	61	11.21	42.33
5	7440.00	19.05 AV	54.00	-34.95	1.57 V	61	-23.29	42.33

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The DH3 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 3 per 247 ms per channel. Therefore, the duty cycle be equal to: 20log(1.875/100)=-34.5 dB.
  6. Average value = peak reading +20log(duty cycle).

**Mode B for Transmission mode (FCC Part 15, Subpart B)**

<b>EUT</b>	Bluetooth keyboard	<b>MEASUREMENT DETAIL</b>	
<b>MODEL</b>	MP-0550	<b>FREQUENCY RANGE</b>	1 ~ 25GHz
<b>CHANNEL</b>	Channel 0	<b>DETECTOR FUNCTION</b>	Peak (PK) Average (AV)
<b>MODULATION TYPE</b>	GFSK	<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 75%RH, 1001hPa
<b>INPUT POWER</b>	3Vdc	<b>TESTED BY</b>	Jamison Chan

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1602.00	43.60 PK	74.00	-30.40	1.17 H	318	14.33	29.27
1	1602.00	36.05 AV	54.00	-17.95	1.17 H	318	6.78	29.27
2	3204.00	45.86 PK	74.00	-28.14	1.11 H	301	10.88	34.98
2	3204.00	34.29 AV	54.00	-19.71	1.11 H	301	-0.69	34.98

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1602.00	43.49 PK	74.00	-30.51	1.38 V	303	14.22	29.27
1	1602.00	34.59 AV	54.00	-19.41	1.38 V	303	5.32	29.27
2	3204.00	45.83 PK	74.00	-28.17	1.00 V	53	10.85	34.98
2	3204.00	34.30 AV	54.00	-19.70	1.00 V	53	-0.68	34.98

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  - 3The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



<b>EUT</b>	Bluetooth keyboard	<b>MEASUREMENT DETAIL</b>	
<b>MODEL</b>	MP-0550	<b>FREQUENCY RANGE</b>	1 ~ 25GHz
<b>CHANNEL</b>	Channel 39	<b>DETECTOR FUNCTION</b>	Peak (PK) Average (AV)
<b>MODULATION TYPE</b>	GFSK	<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 75%RH, 1001hPa
<b>INPUT POWER</b>	3Vdc	<b>TESTED BY</b>	Jamison Chan

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1628.00	44.36 PK	74.00	-29.64	1.11 H	315	14.96	29.39
1	1628.00	38.60 AV	54.00	-15.40	1.11 H	315	9.20	29.39
2	3256.00	46.27 PK	74.00	-27.73	1.12 H	291	11.26	35.01
2	3256.00	34.95 AV	54.00	-19.05	1.12 H	291	-0.06	35.01

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1628.00	42.65 PK	74.00	-31.35	1.07 V	259	13.25	29.39
1	1628.00	35.52 AV	54.00	-18.48	1.07 V	259	6.12	29.39
2	3256.00	46.27 PK	74.00	-27.73	1.07 V	20	11.26	35.01
2	3256.00	35.27 AV	54.00	-18.73	1.07 V	20	0.26	35.01

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  - 3The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



<b>EUT</b>	Bluetooth keyboard	<b>MEASUREMENT DETAIL</b>	
<b>MODEL</b>	MP-0550	<b>FREQUENCY RANGE</b>	1 ~ 25GHz
<b>CHANNEL</b>	Channel 78	<b>DETECTOR FUNCTION</b>	Peak (PK) Average (AV)
<b>MODULATION TYPE</b>	GFSK	<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 75%RH, 1001hPa
<b>INPUT POWER</b>	3Vdc	<b>TESTED BY</b>	Jamison Chan

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1654.00	45.85 PK	74.00	-28.15	1.11 H	345	16.33	29.52
1	1654.00	41.07 AV	54.00	-12.93	1.11 H	345	11.55	29.52
2	3308.00	45.74 PK	74.00	-28.26	1.00 H	0	10.70	35.04
2	3308.00	34.23 AV	54.00	-19.77	1.00 H	0	-0.81	35.04

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1654.00	43.59 PK	74.00	-30.41	1.07 V	211	14.07	29.52
1	1654.00	36.40 AV	54.00	-17.60	1.07 V	211	6.88	29.52
2	3308.00	46.25 PK	74.00	-27.75	1.00 V	342	11.21	35.04
2	3308.00	34.39 AV	54.00	-19.61	1.00 V	342	-0.65	35.04

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  - 3The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.





## 4.3 NUMBER OF HOPPING FREQUENCY USED

### 4.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

### 4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100036	Mar. 20. 2006

**NOTE:** The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.


### 4.3.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

#### 4.3.4 DEVIATION FROM TEST STANDARD



No deviation.

#### 4.3.5 TEST SETUP

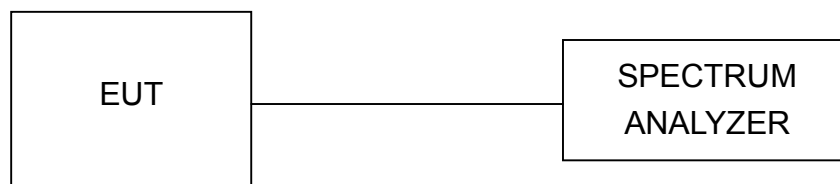

#### 4.3.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

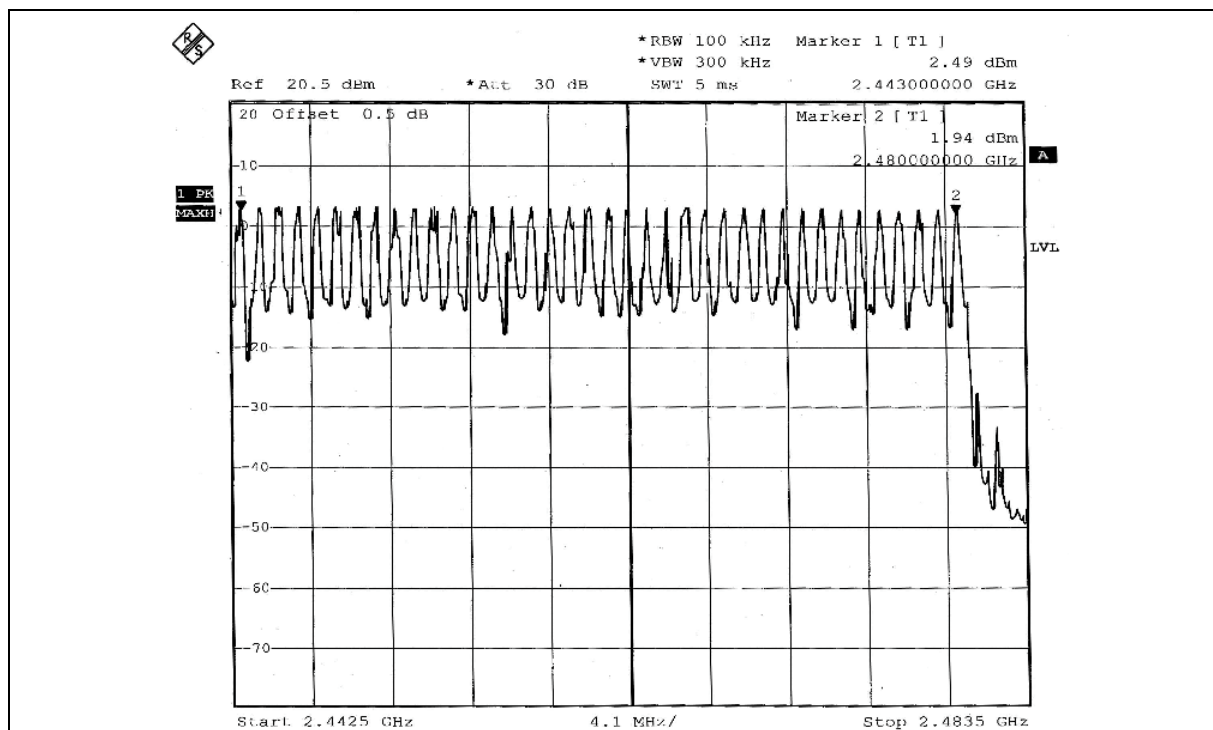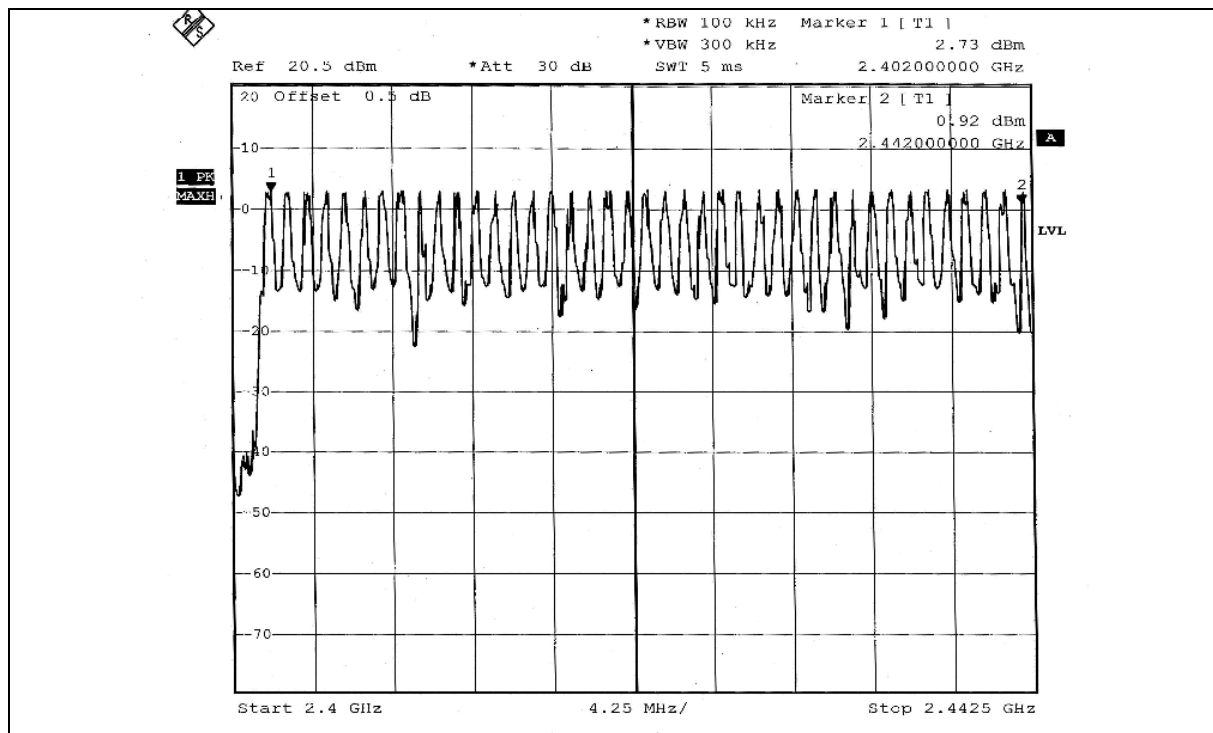



## 4.4 DWELL TIME ON EACH CHANNEL

### 4.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100036	Mar. 20. 2006

**NOTES:** The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

### 4.4.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.

### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation.



### 4.4.5 TEST SETUP





### 4.4.6 TEST RESULTS

Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	50 (times / 5 sec) *6.32=316 times	0.492	155.472	400
DH3	25 (times / 5 sec) *6.32=158 times	1.830	289.140	400

**NOTE:** Test plots of the transmitting time slot are shown on next 2 pages.





DH1

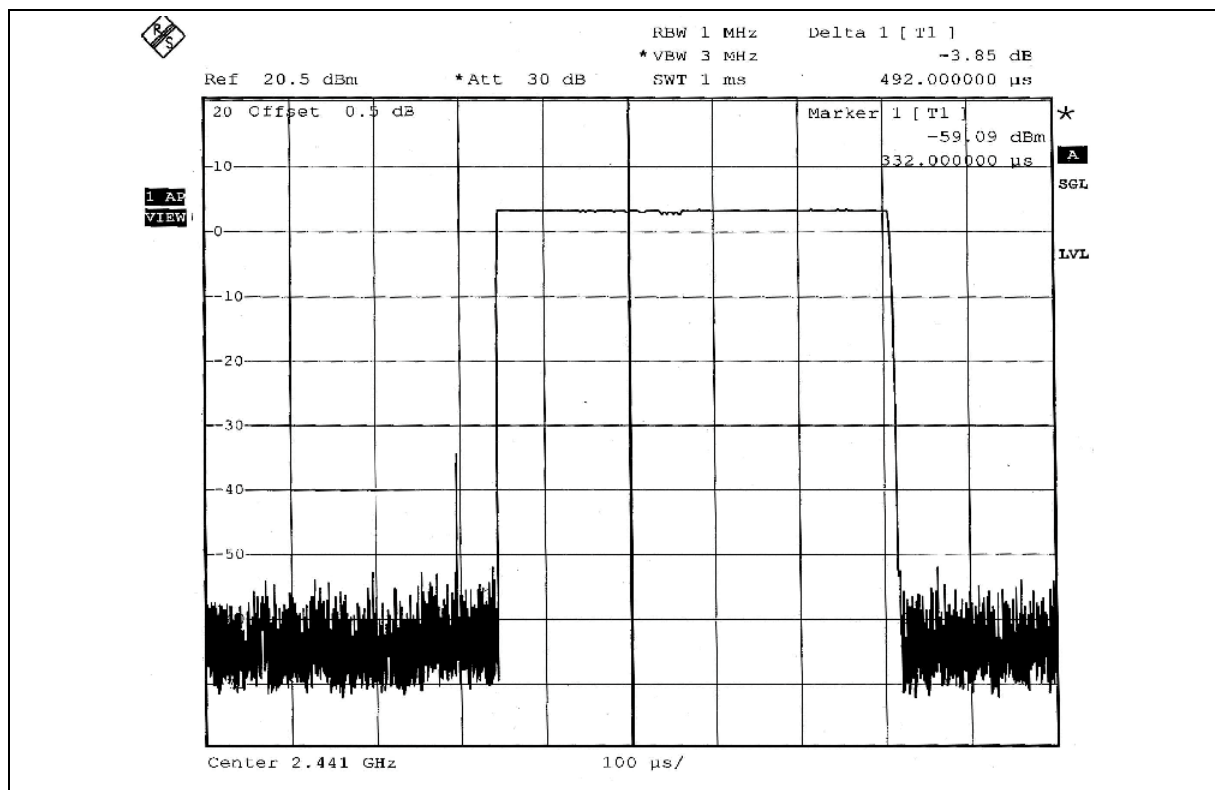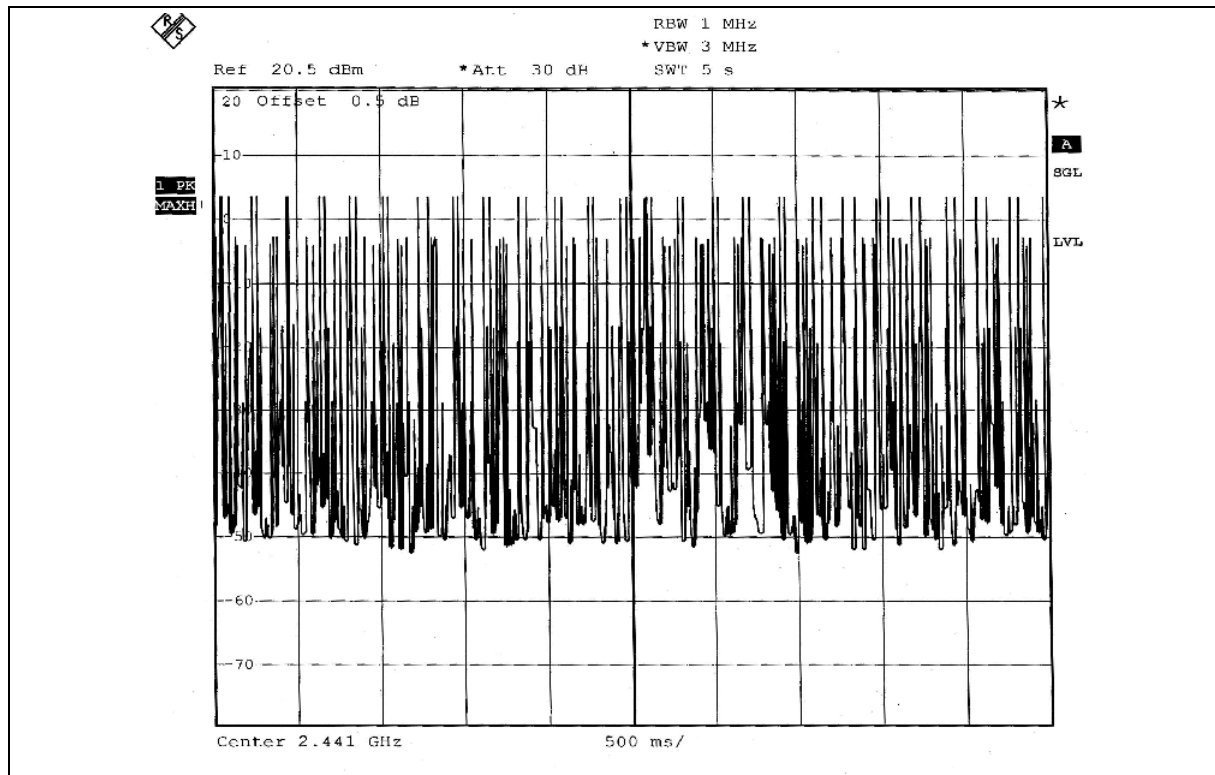



DH3

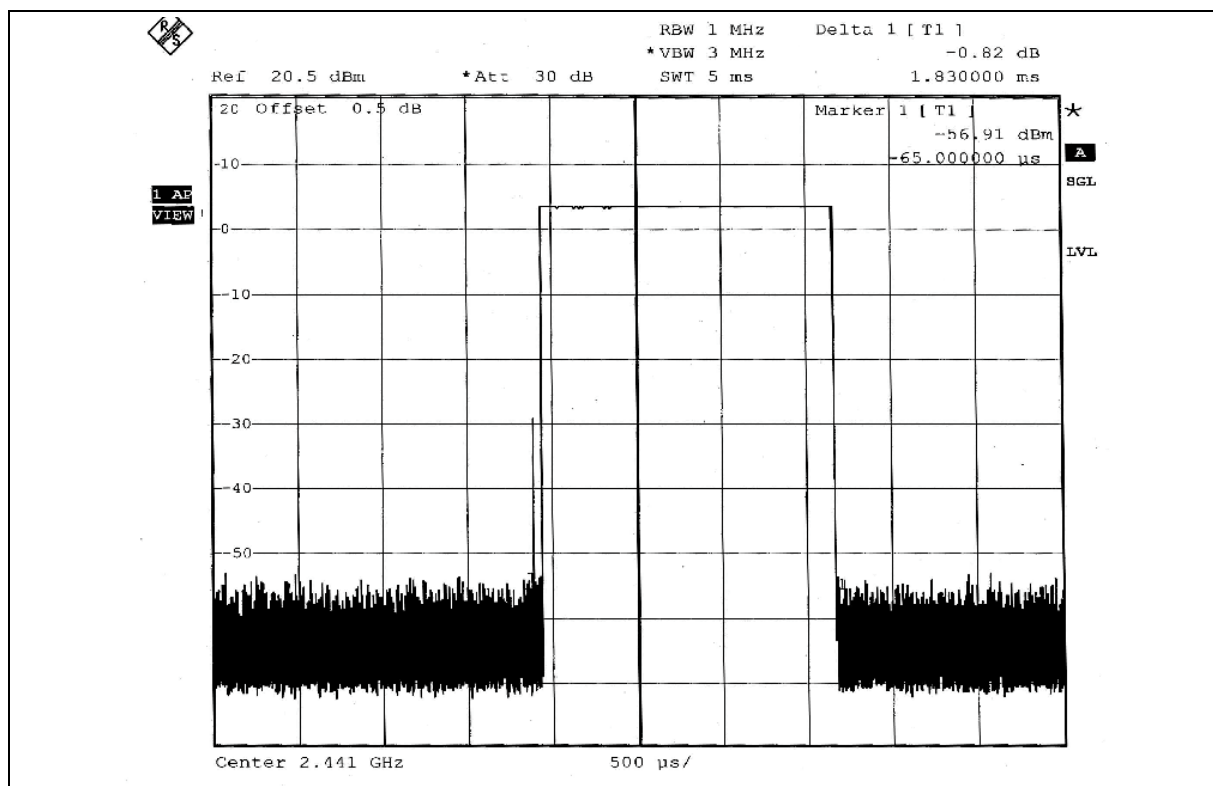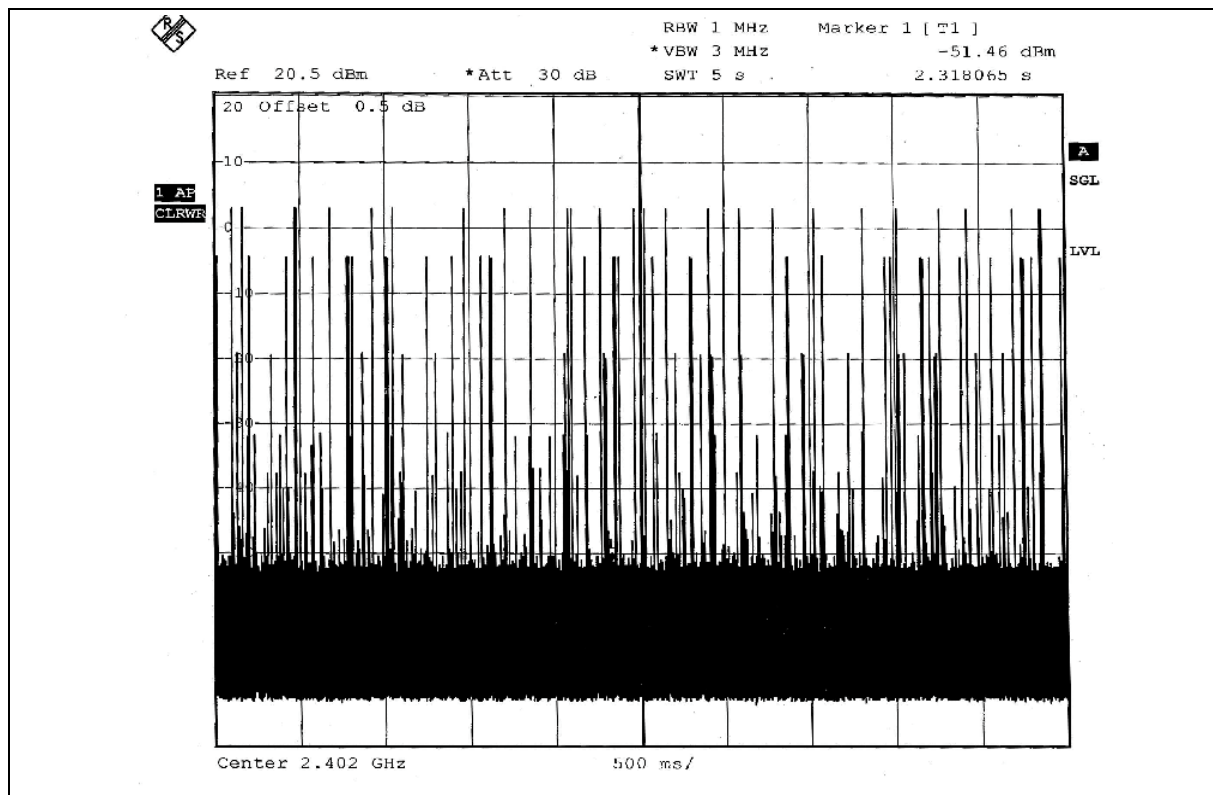



## 4.5 CHANNEL BANDWIDTH

### 4.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

### 4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100036	Mar. 20. 2006

**NOTE:** The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

### 4.5.3 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.



#### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.5.5 TEST SETUP



#### 4.5.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.


#### 4.5.7 TEST RESULTS

<b>EUT</b>	Bluetooth keyboard	<b>MODEL</b>	MP-0550
<b>MODULATION TYPE</b>	GFSK	<b>ENVIRONMENTAL CONDITIONS</b>	28deg. C, 70%RH, 998Hpa
<b>INPUT POWER</b>	3Vdc	<b>TESTED BY</b>	Jamison Chan


<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>20dB BANDWIDTH (MHz)</b>
0	2402	0.966
39	2441	0.969
78	2480	0.966



CH 0

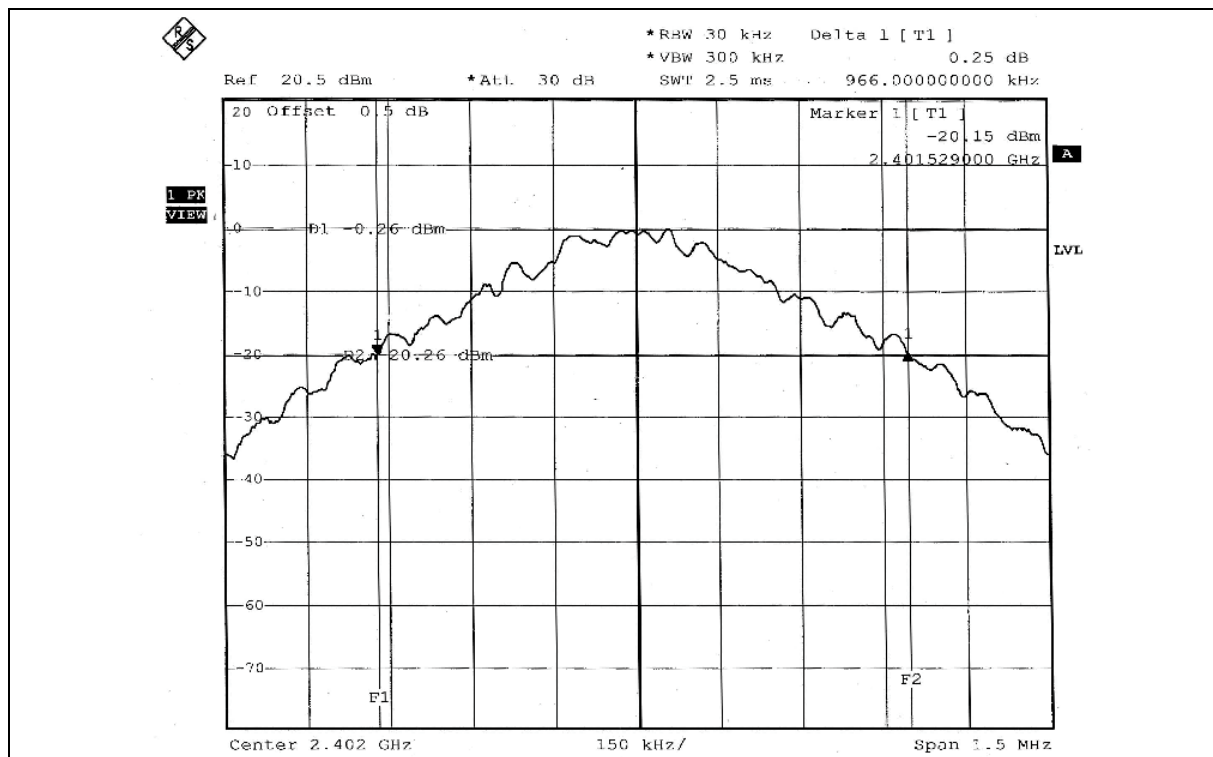


CH 39

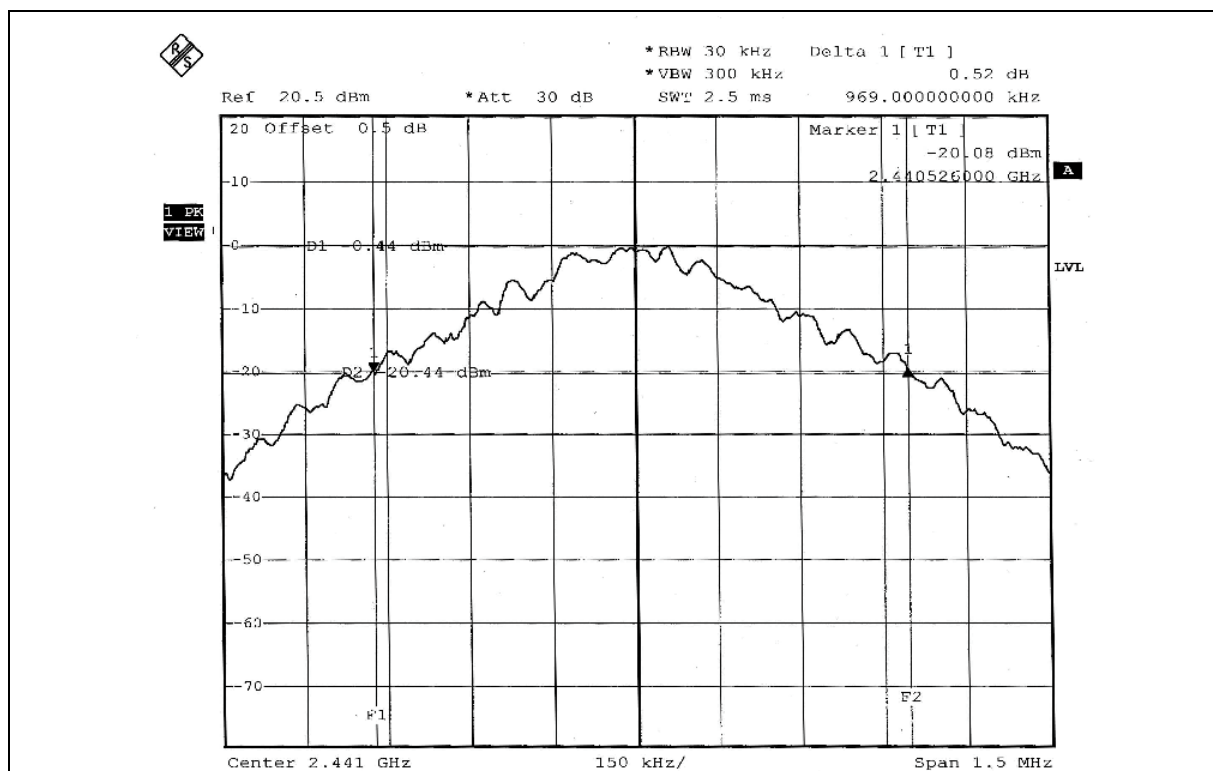



CH 78

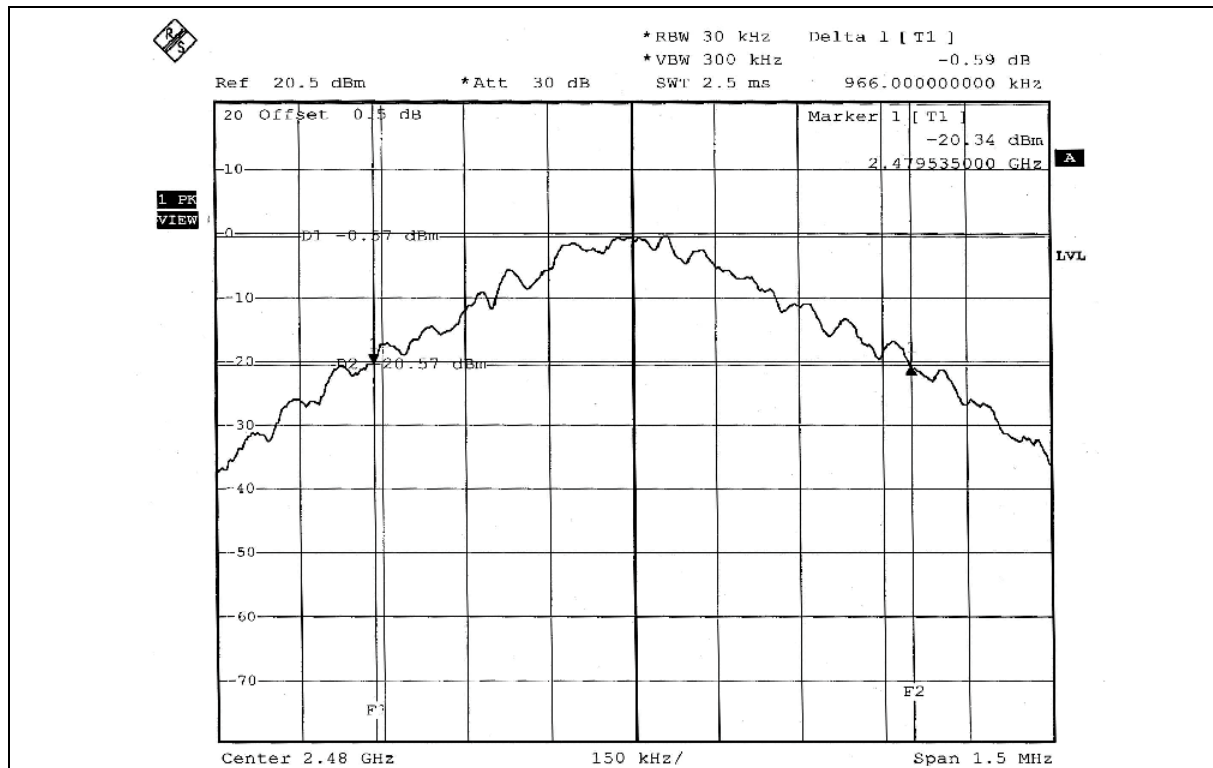



## 4.6 HOPPING CHANNEL SEPARATION

### 4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or 20dB hopping channel bandwidth (whichever is greater).

### 4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100036	Mar. 20. 2006

**NOTES:** The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

### 4.6.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

#### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.6.5 TEST SETUP



#### 4.6.6 TEST RESULTS


<b>EUT</b>	Bluetooth keyboard	<b>MODEL</b>	MP-0550
<b>MODULATION TYPE</b>	GFSK	<b>ENVIRONMENTAL CONDITIONS</b>	28deg. C, 70%RH, 998Hpa
<b>INPUT POWER</b>	3Vdc	<b>TESTED BY</b>	Jamison Chan

<b>CHANNEL</b>	<b>FREQUENCY (MHz)</b>	<b>ADJACENT CHANNEL SEPARATION (MHz)</b>	<b>MINIMUM LIMIT (MHz)</b>	<b>PASS / FAIL</b>
0	2402	1.005	0.966	PASS
39	2441	1.000	0.969	PASS
78	2480	1.005	0.966	PASS


**NOTE:** The minimum limit is 20dB bandwidth. Test results please refer to next two pages.



CH 0

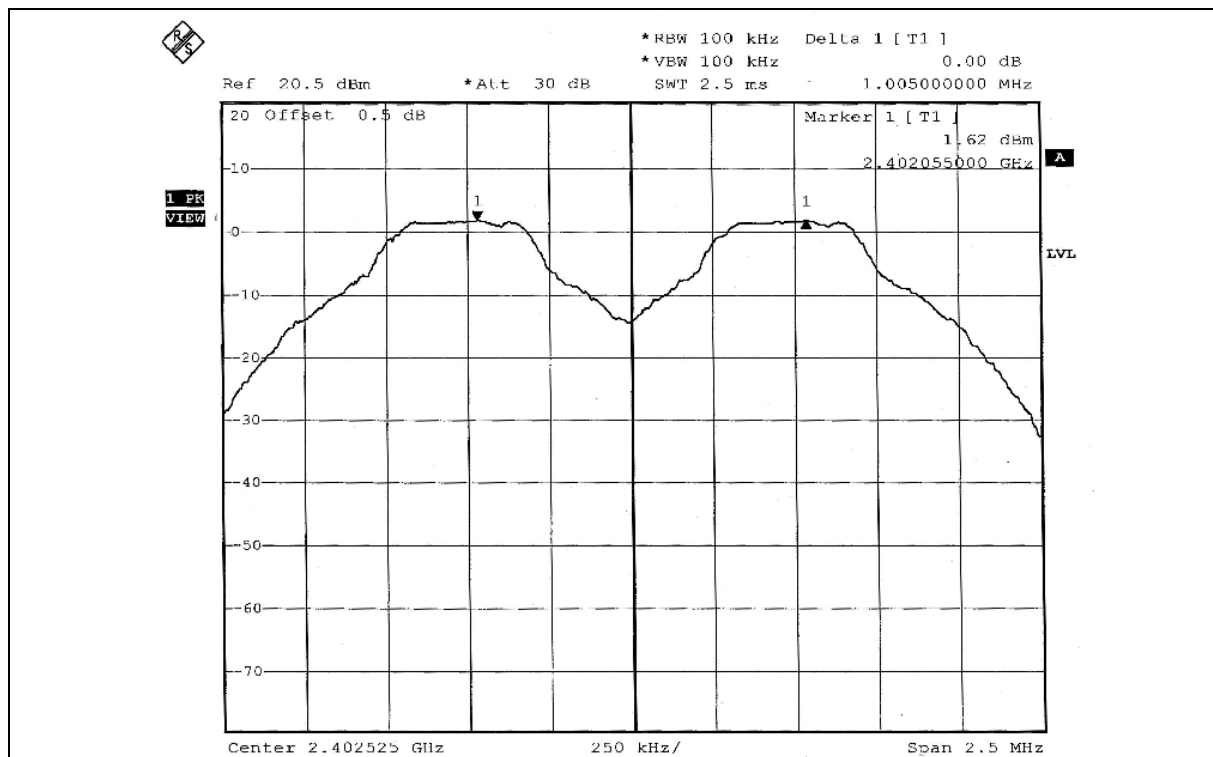


CH 39

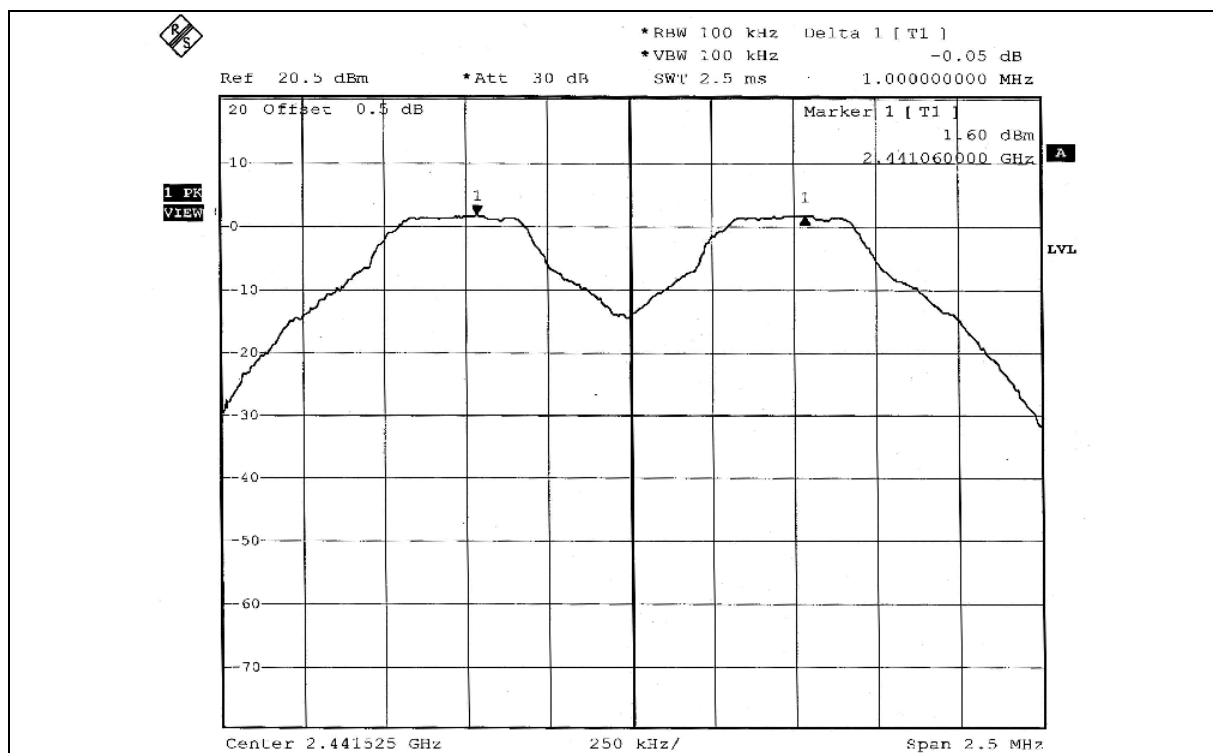



CH 78

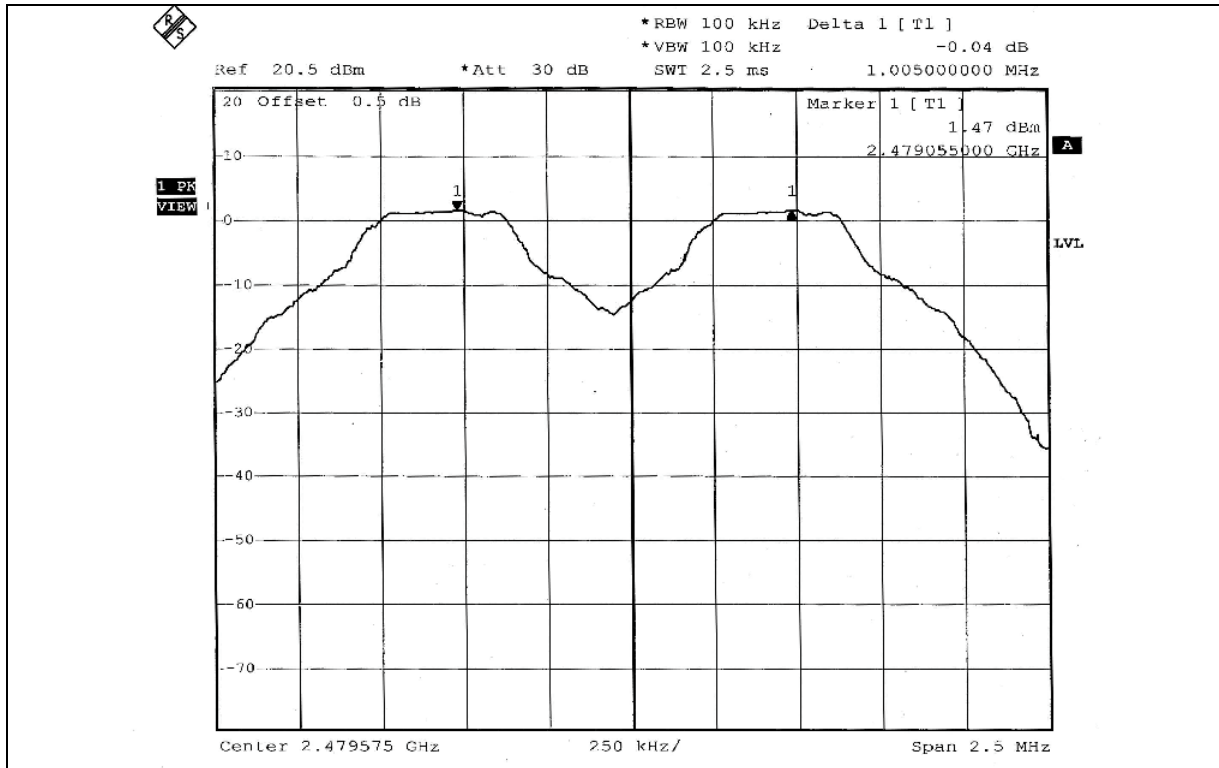



## 4.7 MAXIMUM PEAK OUTPUT POWER

### 4.7.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

### 4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100036	Mar. 20. 2006

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.7.3 TEST PROCEDURES


- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 1 MHz RBW and 3 MHz VBW.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

### 4.7.4 DEVIATION FROM TEST STANDARD

No deviation



#### 4.7.5 TEST SETUP

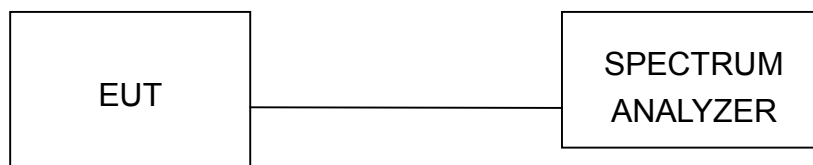

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

#### 4.7.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.


#### 4.7.7 TEST RESULTS

<b>EUT</b>	Bluetooth keyboard	<b>MODEL</b>	MP-0550
<b>MODULATION TYPE</b>	GFSK	<b>ENVIRONMENTAL CONDITIONS</b>	28deg. C, 70%RH, 998Hpa
<b>INPUT POWER</b>	3Vdc	<b>TESTED BY</b>	Jamison Chan


CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
0	2402	1.884	2.75	30	PASS
39	2441	1.778	2.50	30	PASS
78	2480	1.726	2.37	30	PASS



CH 0

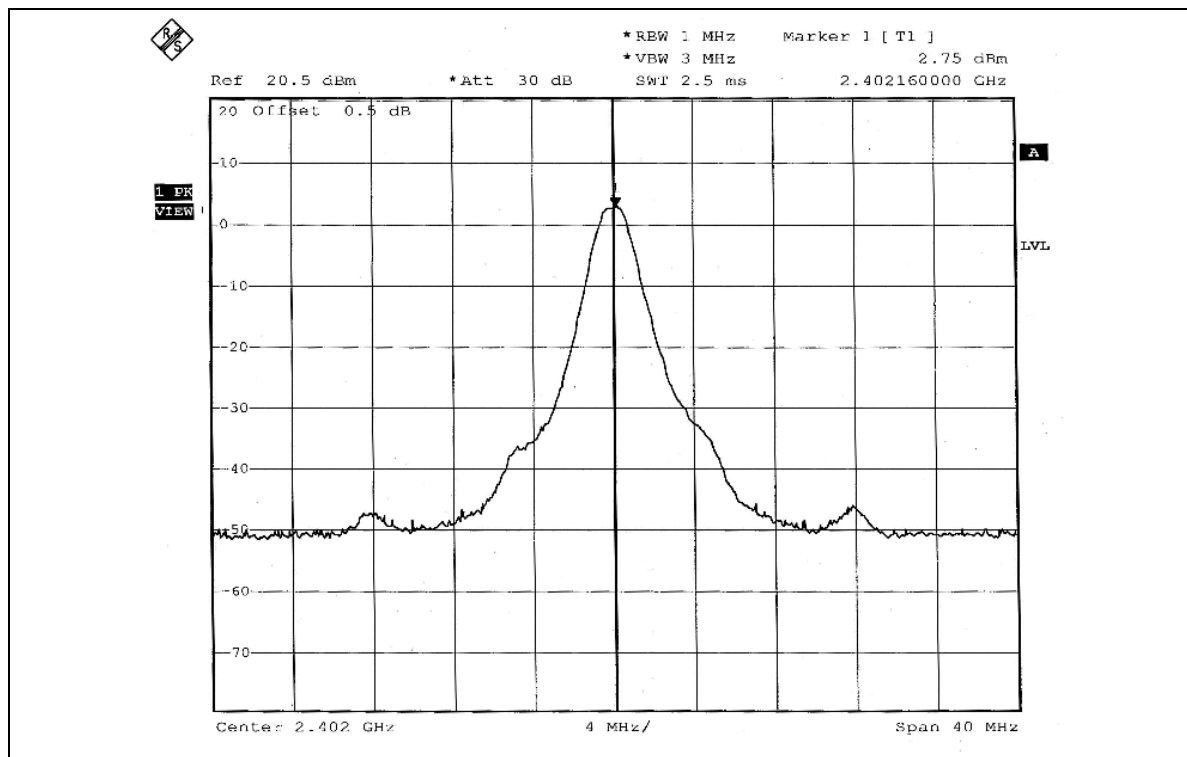


CH 39

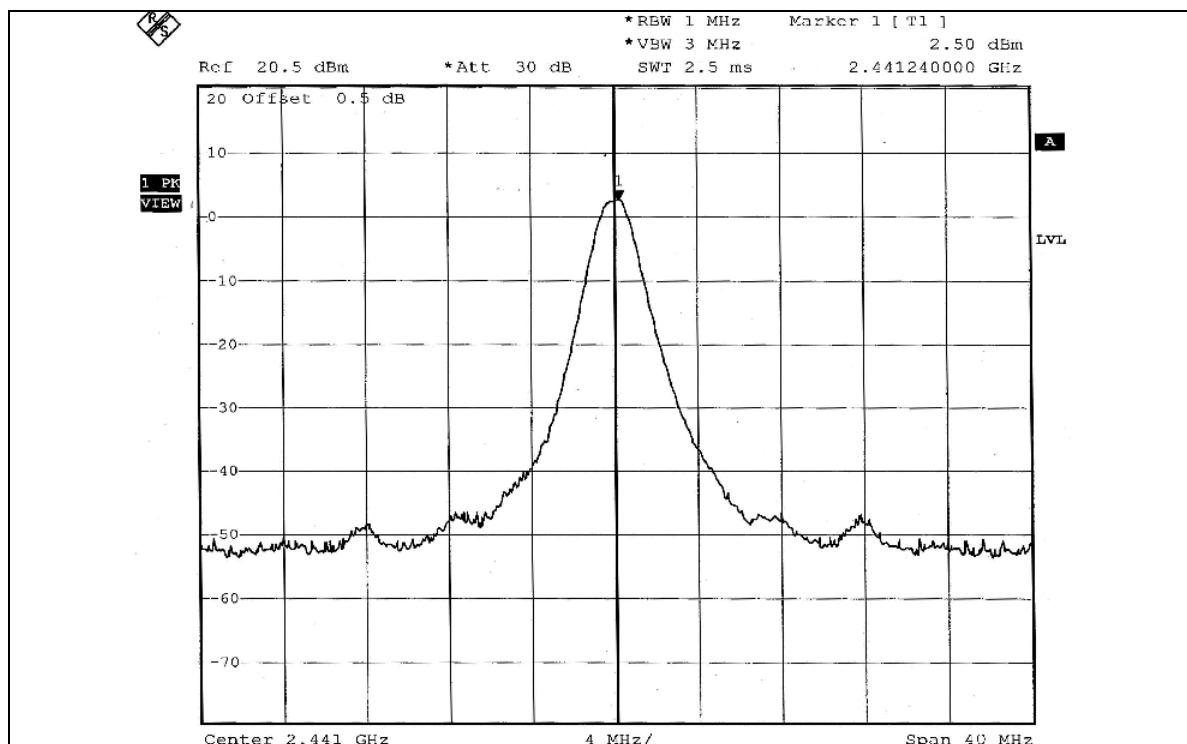



CH 78

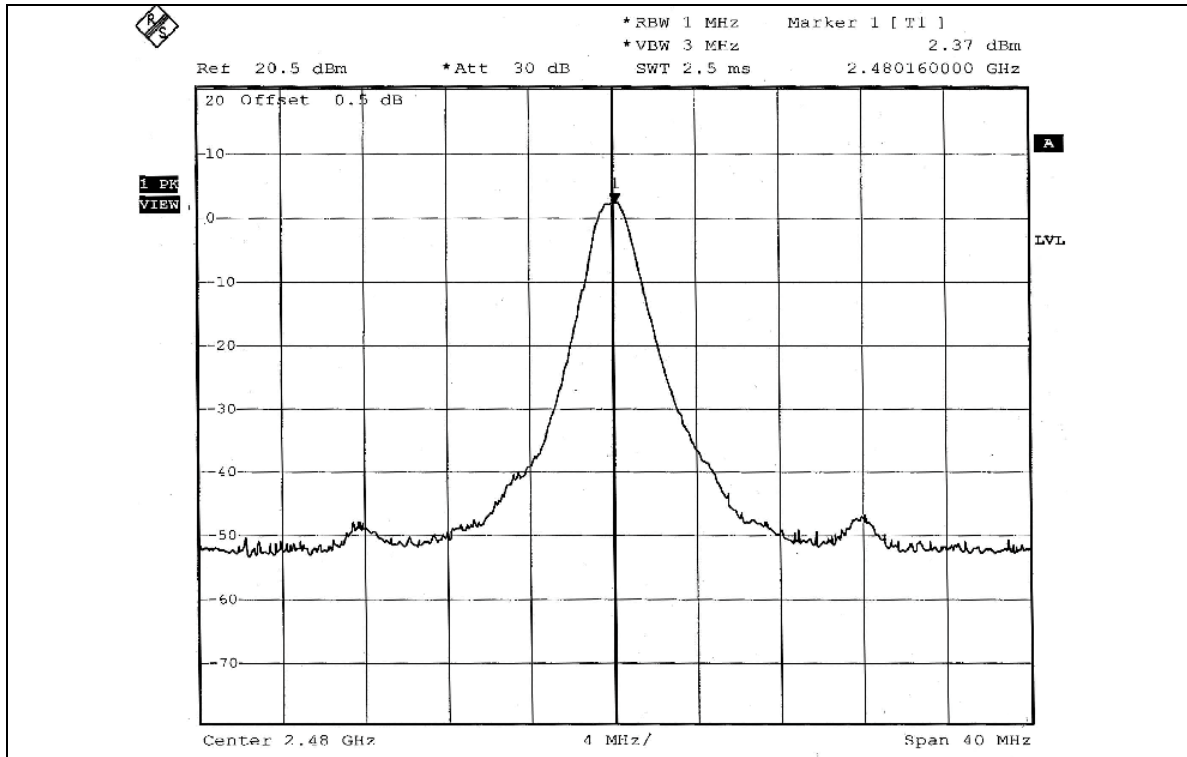



## 4.8 BAND EDGES MEASUREMENT

### 4.8.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

### 4.8.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100036	Mar. 20. 2006

**NOTES:** The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

### 4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

### 4.8.4 DEVIATION FROM TEST STANDARD

No deviation.

### 4.8.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.



## 4.8.6 TEST RESULTS

The spectrum plots are attached on the following 4 images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

### NOTE 1:



The band edge emission plot on page 43 shows 48.62dBc between carrier maximum power and local maximum emission in restrict band (2.378GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.2.7 is 97.06dBuV/m (Peak), so the maximum field strength in restrict band is  $97.06 - 48.62 = 48.44$ dBuV/m, which is under 74 dBuV/m limit.



The band edge emission plot on page 43 shows 48.62dBc between carrier maximum power and local maximum emission in restrict band (2.378GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.2.7 is 62.56dBuV/m (Average), so the maximum field strength in restrict band is  $62.56 - 48.62 = 13.94$ dBuV/m, which is under 54 dBuV/m limit.

### NOTE 2:

The band edge emission plot on page 44 shows 46.95dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.2.7 is 97.47dBuV/m (Peak), so the maximum field strength in restrict band is  $97.47 - 46.95 = 50.52$ dBuV/m, which is under 74 dBuV/m limit.

The band edge emission plot on page 44 shows 46.95dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.2.7 is 62.97dBuV/m (Average), so the maximum field strength in restrict band is  $62.97 - 46.95 = 16.02$ dBuV/m, which is under 54 dBuV/m limit.

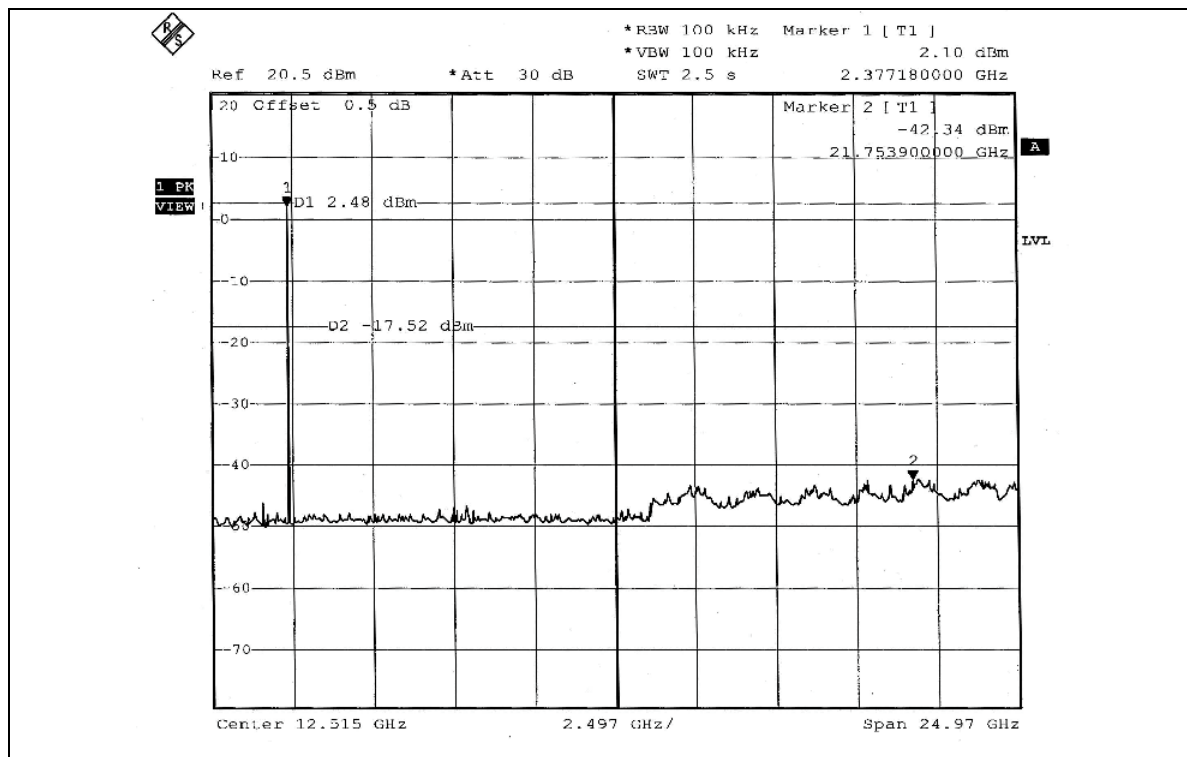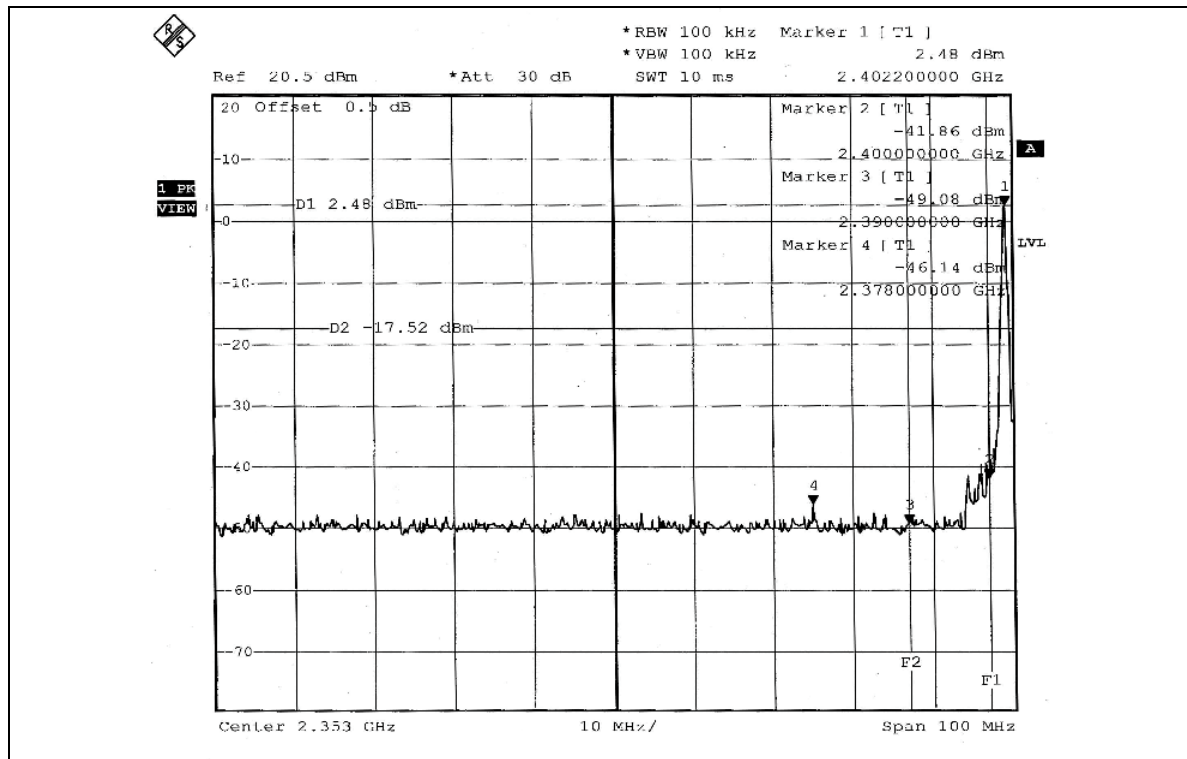

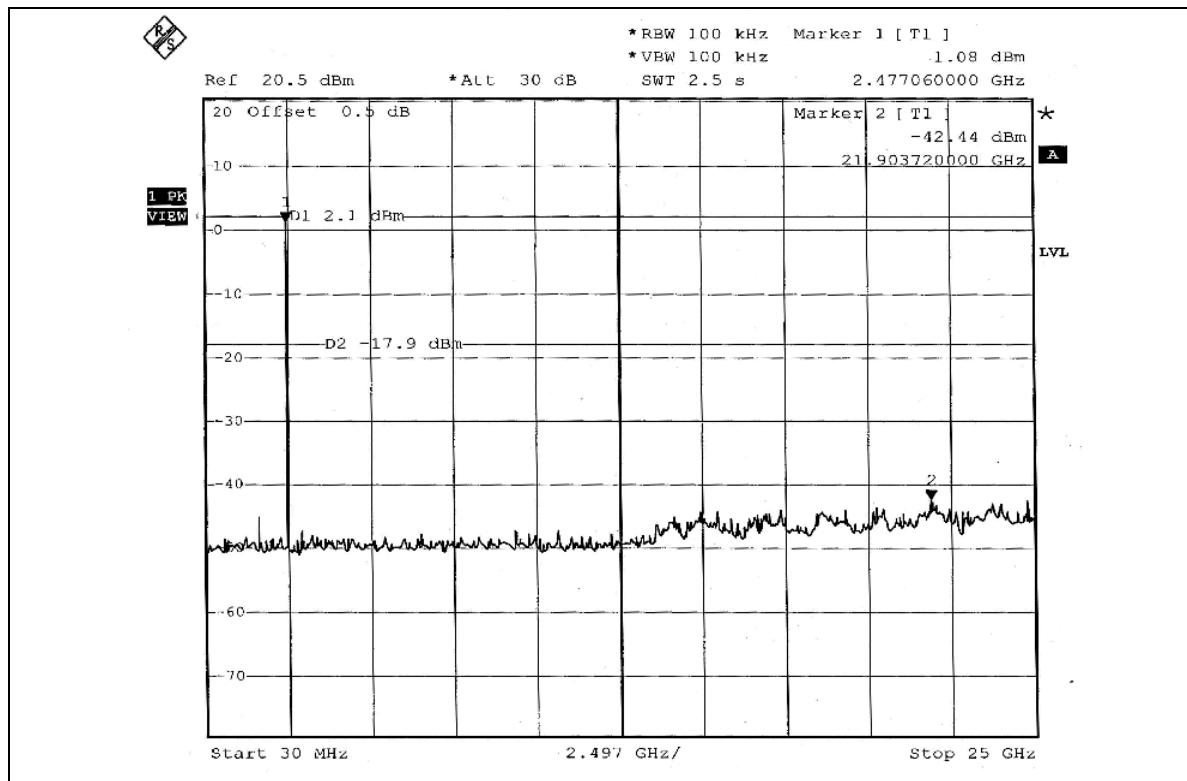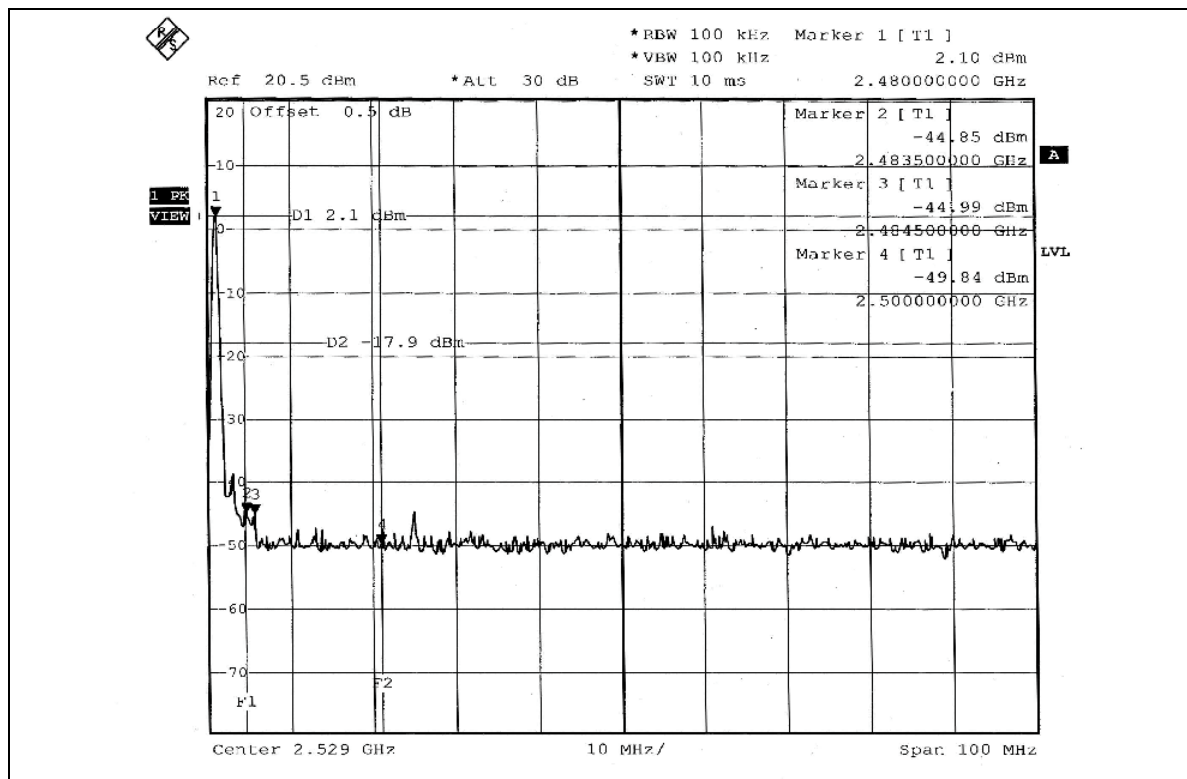



## **4.9 ANTENNA REQUIREMENT**

### **4.9.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **4.9.2 ANTENNA CONNECTED CONSTRUCTION**

The antenna used in this product is Strip antenna without antenna connector. The maximum gain of this antenna is  $-1.9\text{dBi}$ .



## 5. PHOTOGRAPHS OF THE TEST CONFIGURATION

### RADIATED EMISSION TEST





## 6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

<b>USA</b>	FCC, NVLAP, UL, A2LA
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>Norway</b>	NEMKO
<b>Canada</b>	INDUSTRY CANADA , CSA
<b>R.O.C.</b>	CNLA, BSMI, DGT
<b>Netherlands</b>	Telefication
<b>Singapore</b>	PSB , GOST-ASIA(MOU)
<b>Russia</b>	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

[www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml). If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**  
Tel: 886-2-26052180  
Fax: 886-2-26052943

**Hsin Chu EMC/RF Lab:**  
Tel: 886-3-5935343  
Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety Telecom Lab:**  
Tel: 886-3-3183232  
Fax: 886-3-3185050

**Linko RF Lab.**  
Tel: 886-3-3270910  
Fax: 886-3-3270892

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.