



**MOTOROLA**

*Integrated Information Systems Group  
8201 E. McDowell Road  
Scottsdale, AZ 85252-1417*

Report No. 91007-00226-02

**Exhibit 6A - Permissive Change Report, Class II**

**BiStatix™ BDR-1000**

**RFID Tag Reader/Programmer**

FCC ID: E9U05866001T1

Model No. BDR-1000

**Equipment Manufacturer:** Indala Corporation (*subsidiary of Motorola, Inc.*)  
3041 Orchard Parkway  
San Jose, CA 95134

**Tests Conducted By:** Motorola IISG  
EMC Test Facility  
8201 E. McDowell Rd.  
Scottsdale, Arizona 85252

**Tests Period:** July 23<sup>rd</sup> to July 27<sup>th</sup>, 2001

**Test Summary:** Complies with FCC Part 15, Subpart C, Unlicensed Low Power Transmitters

The Motorola IISG EMC/TEMPEST Laboratory is accredited through the



NVLAP Lab Code 100405-0

This document shall not be reproduced, except in full, without the written approval of the laboratory. This document shall not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

## 6.0 Introduction

### 6.0.1 Product Description

The Motorola BiStatix™ BDR-1000 is a Radio Frequency Identification device (RFID). The product is capable of either reading or programming RFID tags. The primary intent is that this product be used as a Development Station for the design of paper BiStatix™ cards and tags. This technology utilizes Electric Fields and Capacitance coupling to complete the RF link between the electronics module and the identification device.

The reader outputs data in Wiegand, ABA Track II, magnetic stripe or RS-232C formats, making it easy to upgrade an existing site to proximity using the wiring already in place.

Product Specifications:

Frequency of Operation

-Excitation	125 kHz Typical
-Data Carrier	62.5 kHz Typical
-Data Rate	7.8125 kbits/second Typical

## **6.0.2 Facility Description**

EMI testing of the BDR-1000 Reader/Programmer was performed at the Motorola Integrated Information Systems Group's (IISG) EMI/TEMPEST Test Laboratory. This test laboratory is located in the southeast wing of the Hayden building at 8201 E. McDowell Road, Scottsdale, AZ.

Motorola IISG Test Facility Address:

Motorola, Inc.  
Integrated Information Systems Group  
Hayden EMC Facility  
8201 E. McDowell Rd. M/D H2550  
Scottsdale, AZ 85252

The facility has been found to be in compliance with the requirements of Section 2.948 of the FCC rules, per FCC letter 31040/SIT, 1300F2, dated October 6, 1998. The facility has also been issued a Certificate of Accreditation through the National Voluntary Laboratory Accreditation Program (NVLAP) by NIST. This is under NVLAP Code: 100405-0 and is effective through September 30, 2001.

## **6.0.3 Quality System**

The EMI/TEMPEST Test Laboratory maintains a Quality Manual that describes the quality assurance program of the EMC/TEMPEST Facility to set forth procedures covering all quality assurance functions. This manual has been constructed to reflect a quality program in compliance with the requirements of the following:

- National Institute of Standards & Technology (NIST) National Voluntary Laboratory Accreditation Program (NVLAP)
- NIST/NVLAP EMC MIL-STD 462 Program Handbook (Apr. 1994)
- NVLAP EMC and Telecommunications FCC Methods Handbook 150-11 (Apr. 1995)
- MIL-Q-9858A, MIL-STD 461, 462, 463, 461D, 462D
- National Security Agency Technical and Security Requirements Document for the Endorsed TEMPEST Test Services Program, NSA TSRD No. 88-8B, 5 Oct. 1993
- System Solution Group of Motorola Quality Six Sigma Program.

## **6.0.4 Standard References**

- |            |  |
|------------|--|
| 47 CFR 2   | Code of Federal Regulations, Title 47, Part 2, "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"   |
| 47 CFR 15  | Code of Federal Regulations, Title 47, Part 15, "Radio Frequency Devices" Subpart C, "Intentional Radiators"   |
| C63.4-1992 | American National Standards Institute (ANSI), "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz" |

## 6.1 Test Procedures

### 6.1.1 Requirements


The BDR-1000 reader/programmer is subject to FCC Part 15, Subpart C and Part 2 for FCC Certification for units marketed within the United States. The following tests, as specified in FCC Part 2, with limits as defined in FCC Part 15, and shown in Table 6.1-1 below were performed on the access control reader.

**Table 6.1-1 Tests Required for Certification of the 125 kHz BDR-1000 Reader/Programmer**

Test Parameter	FCC Part 2	FCC Part 15	FCC Part 15																								
	Paragraph Number	Paragraph Number	Limit																								
Field Strength of Spurious Emissions	2.1053	15.209	<table border="1"> <thead> <tr> <th>Freq (MHz)</th> <th>Limit ( uV/m)</th> <th>d (m)</th> </tr> </thead> <tbody> <tr> <td>.009-0.490 MHz</td> <td>2400/F(kHz)</td> <td>300m</td> </tr> <tr> <td>0.490-1.705 MHz</td> <td>24000/F</td> <td>30 m</td> </tr> <tr> <td>1.705-30 MHz</td> <td>30</td> <td>30 m</td> </tr> <tr> <td>30-88 MHz</td> <td>100</td> <td>3 m</td> </tr> <tr> <td>88-216 MHz</td> <td>150</td> <td>3m</td> </tr> <tr> <td>216-960 MHz</td> <td>200</td> <td>3m</td> </tr> <tr> <td>Above 960 MHz</td> <td>500</td> <td>3m</td> </tr> </tbody> </table>	Freq (MHz)	Limit ( uV/m)	d (m)	.009-0.490 MHz	2400/F(kHz)	300m	0.490-1.705 MHz	24000/F	30 m	1.705-30 MHz	30	30 m	30-88 MHz	100	3 m	88-216 MHz	150	3m	216-960 MHz	200	3m	Above 960 MHz	500	3m
Freq (MHz)	Limit ( uV/m)	d (m)																									
.009-0.490 MHz	2400/F(kHz)	300m																									
0.490-1.705 MHz	24000/F	30 m																									
1.705-30 MHz	30	30 m																									
30-88 MHz	100	3 m																									
88-216 MHz	150	3m																									
216-960 MHz	200	3m																									
Above 960 MHz	500	3m																									
Restricted Bands of Operation		15.205	Does not operate in any restricted bands; Spurious requirements same as 15.209																								
AC Conducted Emissions		15.207	47.95 dBuV																								

### 6.1.2 Operational Configuration

The BDR-1000 RFID Tag Reader/Programmer was tested in its typical operational configuration. The BDR-1000 unit was set up and operated in a continuous transmit mode at the frequency of 125 kHz and at its maximum rated output power for all tests. All testing was done in a radiated test setup since the antenna is an integral part of the unit. The RS-485 interface was looped back into itself using the dual RJ45 interfaces on the back of the unit. The RS-232 was terminated into the connector load provided. A general test setup is shown as Figure 6.1-1.

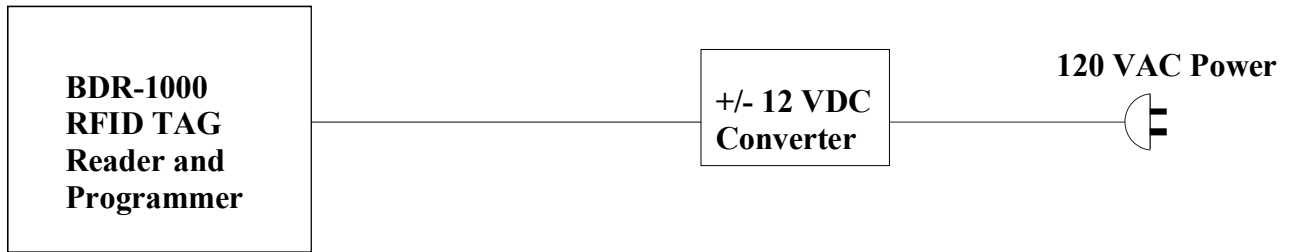

**Figure 6.1-1 General Test Setup for Tests**

**6.1.3 Measurement Equipment**

Test Equipment Nomenclature	Motorola Item Number	Manufacturer	Model Number	Cal. Date	Cal. Due
Biconilog Antenna	T47085	EMCO	3142B	10/31/00	10/31/01
Biconilog Antenna	T47086	EMCO	3142B	10/31/00	10/31/01
H-Field Loop Antenna	T36610	Electro Metrics	ALP-70	NCR	NCR
Antenna Mast	0003-2246	EMCO	2070-2	NCR	NCR
Antenna Controller	G72315	EMCO	2090	NCR	NCR
Spectrum Analyzer/EMI Receiver	G68094	Rhode & Schwarz	ESI40	5/17/01	5/31/02
Transient Limiter 9kHz-200MHz	3107A03138	H.P.	11947A	NCR	NCR
LISN, DUAL 50uH	T52419	Solar	8012-50-R-24	2/07/01	2/28/02
Spectrum Analyzer/EMI Receiver	G71791	Rhode & Schwarz	ESI7	8/29/00	8/31/01

#### **6.1.4 Radiated Spurious Emissions Procedure**

Radiated spurious emissions were measured over the frequency range of 9 kHz to 1 GHz in an anechoic chamber (20ft x 24ft x 16ft) and an open area test site (OATS). Refer to Figure 6.1-2 and 6.1-3 for test setups.

The radiated emissions between 9 kHz and 30 MHz, including the carrier level, were measured in an anechoic chamber using a shielded magnetic loop antenna at a 3-meter distance. The levels were extrapolated to the required test distance defined in 47 CFR Part 15 using the square of an inverse linear distance formula. These emissions were maximized by rotating the equipment on the turntable. When the using the magnetic loop antenna it was also rotated along its vertical axis.


The radiated emissions above 30 MHz were initially measured in a semi-anechoic shield room in order to identify the emissions before proceeding to the open area test site (OATS). This provides the capability of taking accurate measurements in a higher ambient environment such as at the rooftop OATS. The Rohde & Schwarz EMI Receiver System was used for the pre-scans. Typically, signals within approximately 10 dB of the limit are noted for measurements on the OATS.

Final measurements on the OATS were taken with a Rohde & Schwarz EMI Receiver System, ESI7, with preselector at a 3-meter test distance from the receiving antenna. The Smartcard Reader was placed on a .8-meter high non-conductive table on a rotating turntable which is flush with the site ground plane. The receiving antenna was scanned over a height range from 1 to 4 meters in both antenna polarities, and the turntable was rotated 360 degrees. The highest emissions were recorded and the final field strength level determined using the following formula:


$$\text{Field Strength (dBuV/m)} = \text{Measured Level (dBuV)} + \text{Cable Loss (dB)} + \text{Antenna Factor (dB)}$$

#### **6.1.5 AC Powerline Conducted, 450 kHz to 30 MHz**

AC power line conducted emissions were performed using the Rhode & Schwarz EMI receiver and a Line Impedance Stabilization Network (LISN). Both AC high and neutral were tested. The test methods of ANSI 63.4 were used for performing the AC Conducted Emissions tests

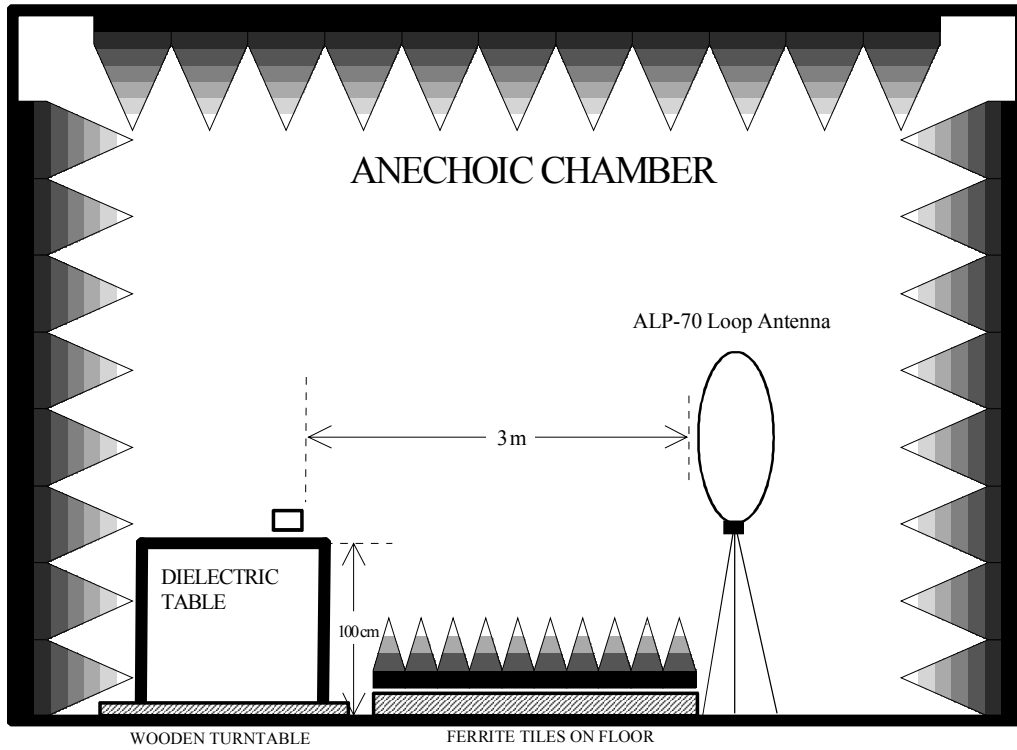

**Figure 6.1-2 Radiated Spurious Emissions Test Setup - Chamber**

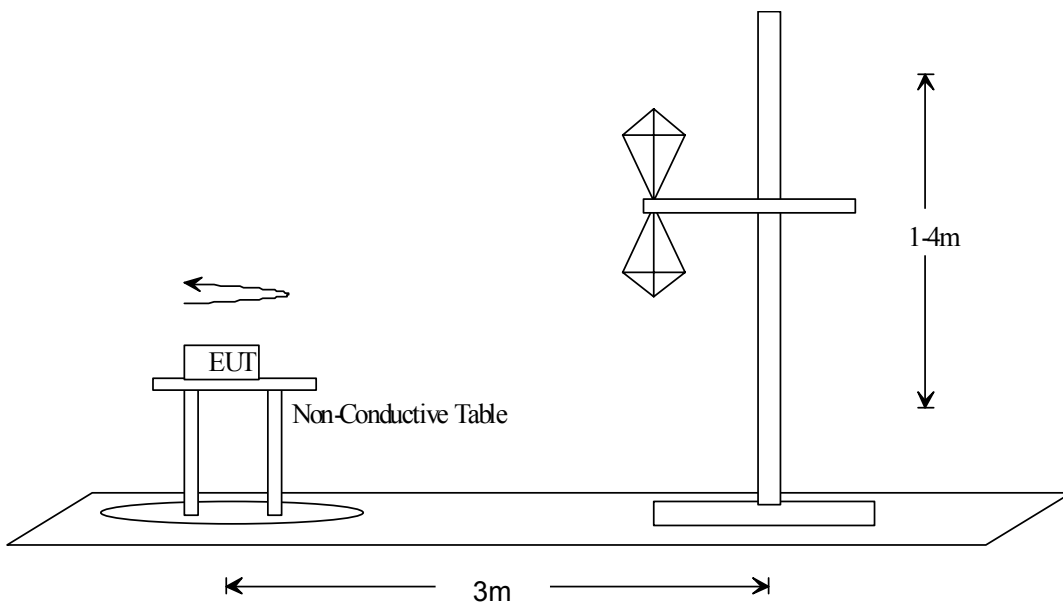

**Figure 6.1-3 Radiated Spurious Emissions Test Setup -OATS**

## 6.2 Test Results

### 6.2.1 Radiated Spurious Emissions Measurement Test Results

All measurements were made with the BDR-1000 transmitting at its maximum rated output power. The antenna is an integral part of the unit and the unit is continuously transmitting at 125 kHz. Most of the pre-scan measurements displayed significant margin, >20 dB, to the limits. For this reason, it was only necessary to re-measure a few of these signals on the OATS and additionally with a Quasi-Peak detector and dipole antennas.

The maximized carrier level at the frequency of operation was 45.5 dBuV/m @ 3 meters (-34.5 dBuV/m @ 300 m) worst case using a shielded magnetic loop antenna. This was well below the 25.7 dBuV/m limit at 300 meters specified in 47 CFR Section 15.209 at the operating frequency of 125 kHz. Measurements were performed in an anechoic chamber at a distance of 3 meters.

The radiated emissions for the frequency range of 9 kHz to 30 MHz were all below the applicable limits of 47 CFR 15.209 including the carrier harmonics. These measurements were also performed in an anechoic chamber at a distance of 3 meters. The limit line shown on the graph of Appendix A-1 is corrected to the 300-meter and 30 meter distances using a 40 dB/decade factor for a  $1/r^2$  roll-off. These scans were taken with an automated EMI Receiver system using scan tables setup specifically for the requirement conditions including bandwidth, transducer factors, and distance correction. The worst-case emissions graph is shown as Figure A-1.

Measurements for 30 MHz to 1 GHz were taken first in the semi-anechoic chamber in order to identify the critical frequencies. Signals, which were within 10 dB of the limit, were recorded and their final measurement was taken on the OATS. The measurements were taken at a test distance of 3 meters per the specification. The final OATS measurements are provided in Figure B-1 and represent a broadband signal peaking at approximately 47.5 MHz. The emissions were the specification limits of 47 CFR Section 15.209. The broadband emission peak at 47.5 MHz was at a level of 27 dBuV/m or -13 dB below the specification limit.

Additionally, this equipment complies with the requirements of 47 CFR Section 15.205 on Restricted Bands of Operation. The BDR-1000 operating frequency of 125 kHz is outside of any of the restricted bands specified in 15.205. Spurious emissions are permitted in these bands with the condition that they comply with the same requirements of 15.209 as tested.


The test setup photos are shown as Figures D-1 and D-2.

### 6.2.2 AC Powerline Conducted, 450 kHz to 30 MHz Test Results

The AC powerline conducted emissions were measured on the BDR-1000 and associated AC/DC Converter. The AC/DC converter is a product of APX Technologies Inc., Model No. EPA-203D-1 and P/N: SP25970. The BDR-1000 is compliant with the AC Conducted Emission requirements, however, some of the emissions have increased from the original filing. No Quasi-Peak measurements were necessary since the max peak measurements were in spec. The conducted emissions scans are shown in Appendix C. A test setup photo is shown as Figure D-2.



**Appendix A**  
**Radiated Spurious Emission Measurements**  
**9kHz to 30 MHz**

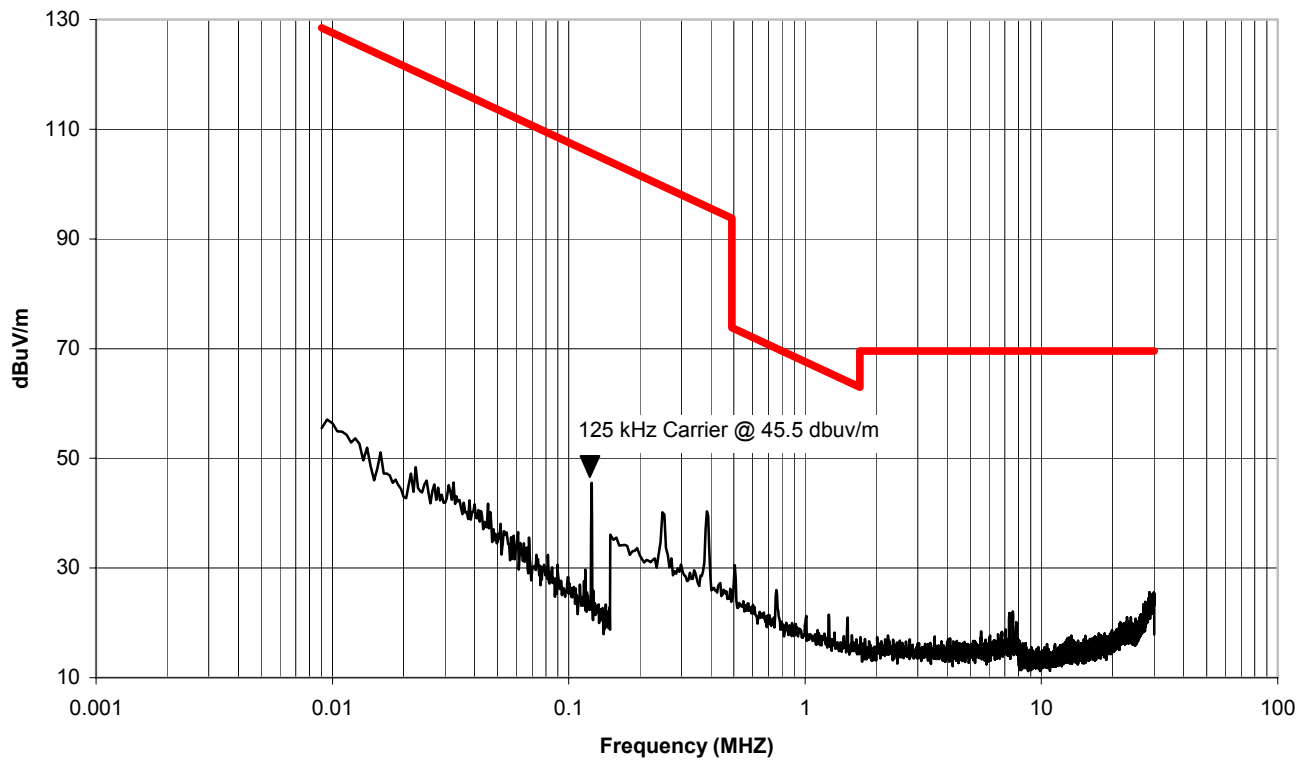

**Figure A – 1 Radiated Spurious Emissions, 9 kHz to 30 MHz, Loop Antenna**

**Appendix B**  
**Radiated Spurious Emission Measurements**  
**30 MHz to 1000 MHz**


## MOTOROLA IISG TEST DATA SHEET

FCC Radiated Test Results											
Equip.		BDR-1000		Test Date:		7/25/2001					
Mode:		Card Reading		Test Technician:		R. Johnston					
Model#:		1000.0		Measurement Distance (m)		3					
Serial #:		EM 0001		Equipment Class		B					
Bold Reading are Quasi Peak											
Frequency MHz	SA Reading (dBuV)	Az	Ht cm	Pol	Antenna Factor	Cable/Attn. Loss	Pre Amp dB	Emission (dBuV/m)	Spec Limit (dBuV/m)	Deviation from Spec. Limit (dB)	
42.560	<b>15.6</b>	b	200	v	1.6	7.1	0.0	24.3	40.0	-15.7	
44.580	<b>16.0</b>	f	190	v	2.0	7.1	0.0	25.1	40.0	-14.9	
47.470	<b>17.6</b>	fl	170	v	2.3	7.2	0.0	27.0	40.0	-13.0	
59.780	<b>10.8</b>	f	140	v	2.6	7.4	0.0	20.8	40.0	-19.2	
53.246	<b>13.2</b>	f	140	v	2.5	7.3	0.0	23.0	40.0	-17.0	

**Figure B – 1 Radiated Spurious Emissions, OATS Data, 30 MHz to 1 GHz**  
 Page 12 of 147      **FCC ID: E9U05866001T1**  
 Revision Basic      7/31/01


**Appendix C**  
**Conducted Emission Measurements**  
**450 kHz to 30 MHz**

Level [dBµV]

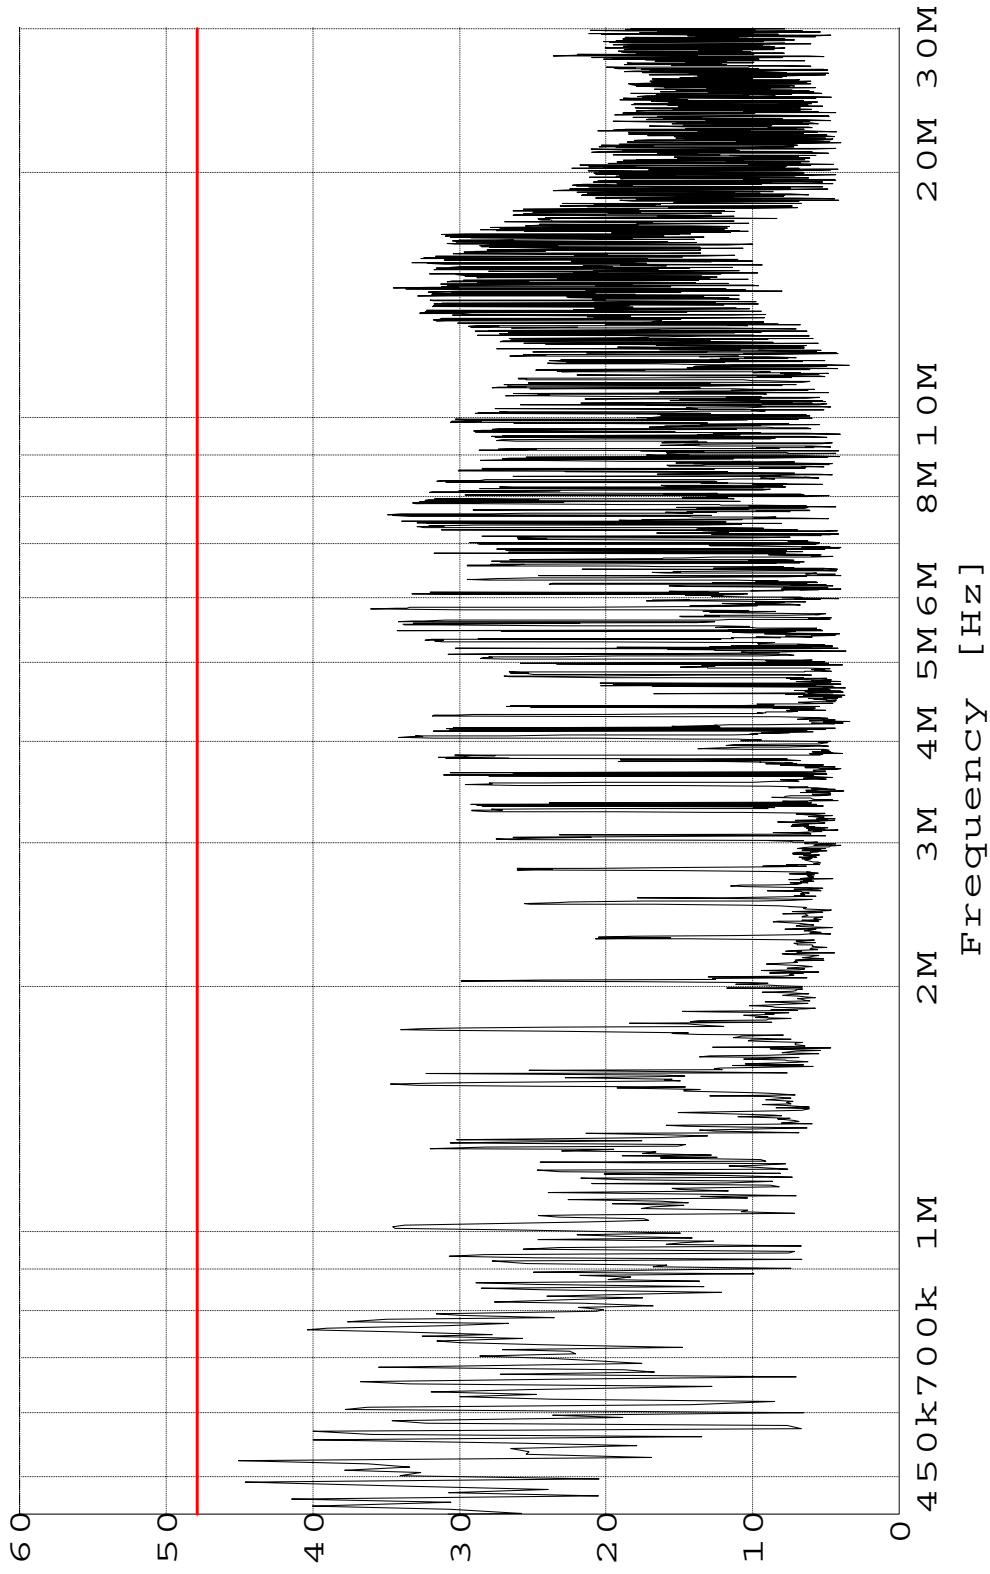

— MES BDR NW 120 MP  
— LIM FCC ClassB V QP

FCC ClassB, voltage

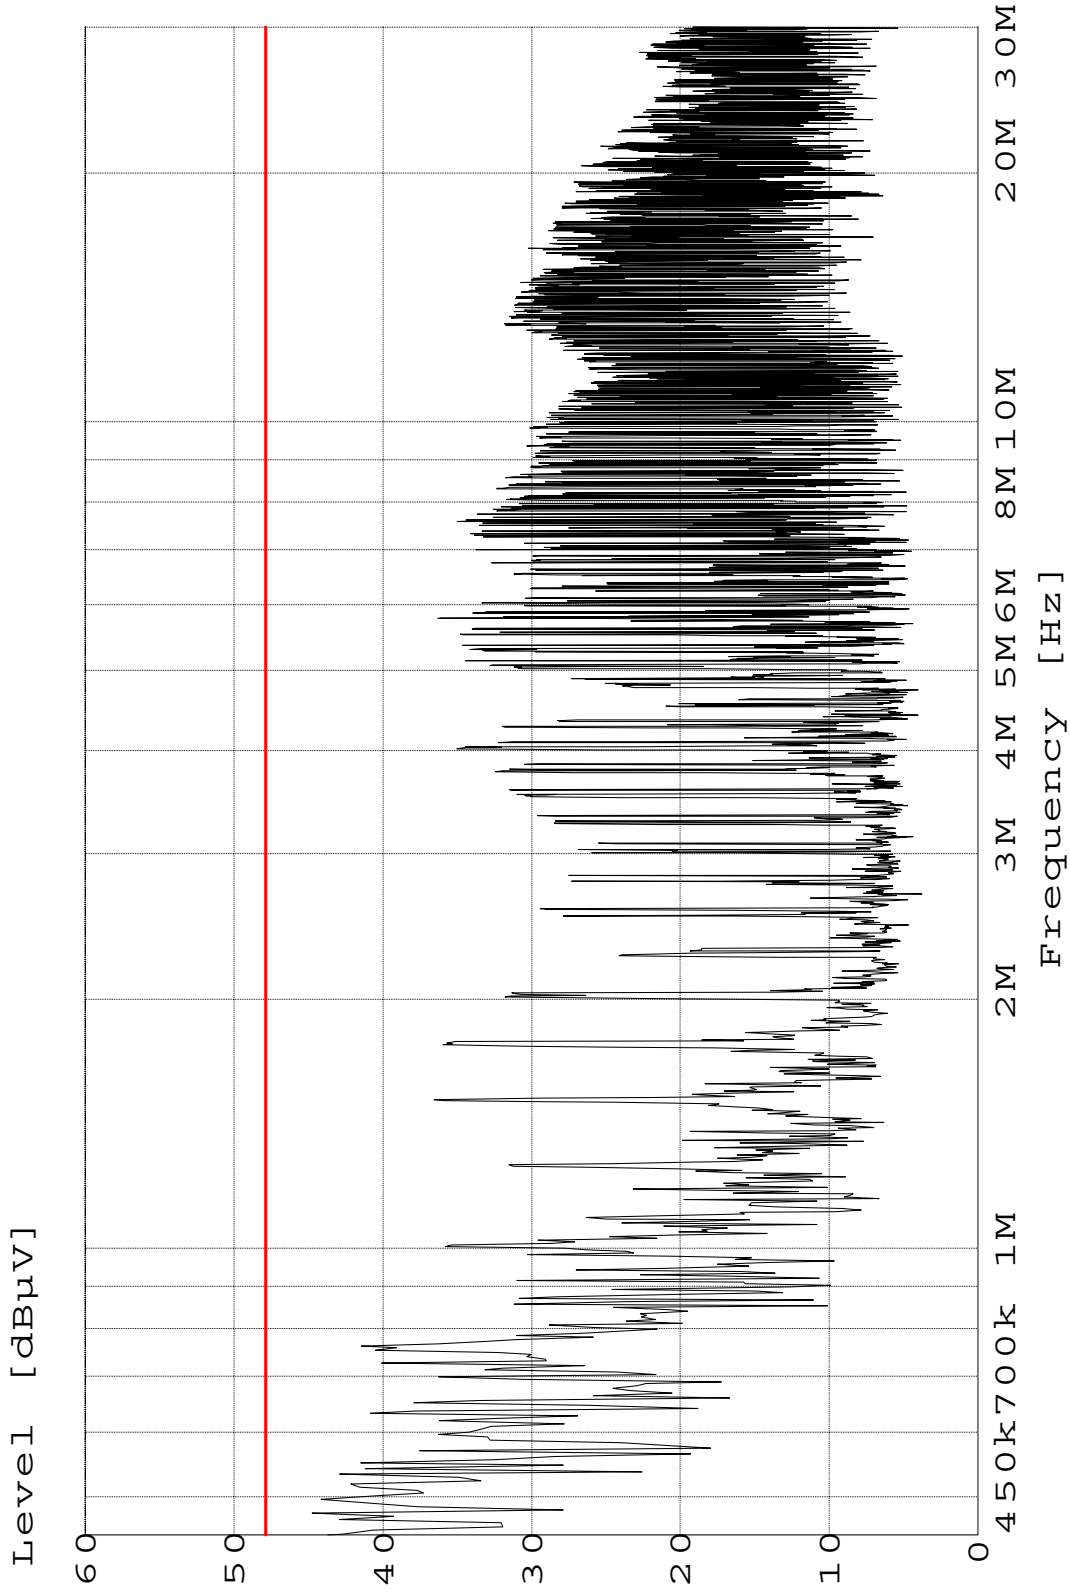

— MES BDR NW 120 MP Ret  
 — LIM FCC ClassB V QP FCC ClassB, voltage

**Appendix D**  
**Test Setup Photos**





**Figure D – 1 Radiated Spurious Emissions Test Setup, OATS**



**Figure D – 2 Conducted Emissions Test Setup**