

Recognized by the
Federal Communications Commission
Anechoic chamber registration no.: 90462 (FCC)
Anechoic chamber registration no.: IC 3462C-1
TCB ID: DE 0001



Accredited by the
German Accreditation Council
DAR-Registration Number
DGA-PL-176/94-D1



Accredited Bluetooth[®] Test Facility (BQTF)

Test report no.	:	1-1872-01-03/09
Applicant	:	Konica Minolta Business Technologies Inc.
Type	:	A1RFH130
Test Standard	:	FCC Part 15.225 RSS210 Issue 7
FCC ID	:	EDUA1RF
Certification No. IC	:	1048B-A1RF

The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Cetecom ICT is under license

Table of contents

1	GENERAL INFORMATION.....	3
1.1.	ADMINISTRATIVE DATA OF THE TEST FACILITY	3
1.1.1	<i>Identification of the testing laboratory</i>	3
1.2.	NOTES	3
1.3	DETAILS OF APPLICANT.....	4
1.4	TEST STANDARDS	5
1.5	DETAILS OF MANUFACTURER	6
1.6	TEST ITEM	6
1.9	TEST SETUP	8
2.	SUMMARY OF MEASUREMENT RESULTS AND LIST OF ALL PERFORMED TEST CASES.....	9
3	RF MEASUREMENT TESTING	10
3.1	DESCRIPTION OF TEST SET-UP	10
3.1.1	<i>Radiated measurements</i>	10
4	FCC PART 15 SUBPART C.....	11
4.1	<i>Timing of the transmitter</i>	11
4.2	<i>Field strength of the fundamental</i>	12
4.3	<i>Field strength of the harmonics and the spurious</i>	13
4.4	<i>Frequency tolerance</i>	17
4.5	<i>Conducted Limits</i>	18
5	TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	20
6	ANNEX B: PHOTOGRAPHS OF TEST SITE	23
7	ANNEX C: PHOTOGRAPHS OF THE EQUIPMENT.....	25

1 General information

1.1 Administrative data of the test facility

1.1.1 Identification of the testing laboratory

CETECOM ICT Services GmbH

Address: Untertürkheimer Straße 6 - 10
66117 Saarbrücken
Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
e-mail: info@ICT.cetecom.de
Internet: http://www.cetecom-ict.de

State of accreditation:	The test laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 DAR registration number: DAT-P-176/94-D1
Accredited by:	Federal Motor Transport Authority (KBA) DAR registration number: KBA-P 00070-97

Testing location, if different from CETECOM ICT Services GmbH:


Name :
Street :
Town :
Country :
Phone :
Fax :

1.2 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.



.....
Responsible for testing laboratory
(Daniel K. Muyunga)



.....
Responsible for test report
(Stefan Bös)

1.3 Details of Applicant

Name:	Konica Minolta Business Technologies Inc.
Address:	2970 Ishikawa-machi, Hachioji-shi
City :	192-8505 Tokyo
Country:	Japan
Phone:	
Fax:	+80-426-60-9242
Contact:	Ryo Nakamura
Phone :	+80-426-60-9241
Fax:	+80-426-60-9242
e-mail:	Ryo.Nakamura@konicaminolta.jp

1.4 Test standards

Title 47 of the Code of Federal Regulations; Chapter I- Federal Communications Commission subchapter A – general, Part 15- Radio frequency devices

47 CFR Part 15

**CFR Part 15– Radio Frequency Devices
CFR Part 15.209 – Radiated emission limits.
CFR Part 15.207 – Conducted limits
CFR Part 15.225**

RSS 210, Issue 7

**Spectrum Management and Telecommunications – Radio Standards Specification
Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment**

1.5 Details of manufacturer

Name:	Konica Minolta Business Technologies Inc.
Address:	2970 Ishikawa-machi, Hachioji-shi
City :	192-8505 Tokyo
Country:	Japan

1.6 Test Item

Type of equipment	:	RFID Module
Model name	:	A1RFH130
Tested to Radio Standards Specification(RSS) No. :		210 Issue 7
Open Area Test Site Industry Canada Number	:	IC 3463A-1
Frequency Range (or fixed frequency)	:	13.56 MHz
Field Strength (at what distance)	:	36.98 dB μ V/m in 10m
Occupied Bandwidth (99% BW)	:	104 kHz
Type of Modulation	:	ASK
Emission Designator	:	104KA1D
Antenna Information	:	Inductive loop antenna
Transmitter Spurious (worst case)	:	28.3 dB μ V/m at 10m
IC Reg. no.	:	1048B-A1RF
FCC ID	:	EDUA1RF
Temperature Range	:	-20 °C to +50 °C

ATTESTATION:

DECLARATION OF COMPLIANCE: I declare that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.


Laboratory Manager :

2010-01-14

Daniel K. Muyunga

Date

Name

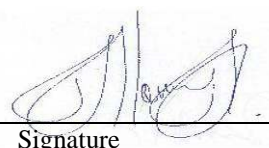

Signature

Test report no.: 1-1872-01-03/09 1-1872-01-03/09

Date: 2009-12-17 2009-12-17

Page 7 of 29

1.7 RF Technical Brief Cover Sheet acc. To RSS-102

All Fields must be completed with the requested information or the following codes: N/A for Not Applicable, N/P for Not Performed or N/V for Not Available. Where applicable, check appropriate box.

- 1. COMPANY NUMBER:** 1048B
- 2. MODEL NUMBER:** A1RFH130
- 3. MANUFACTURER:** Konica Minolta Business Technologies Inc.
- 4. TYPE OF EVALUATION:** N/A

- Evaluated against exposure limits: General Public Use Controlled Use
- Duty cycle used in evaluation: N/A %
- Standard used for evaluation: RSS-102 Issue 2 (2005-11)
- Measurement distance: N/A m
- RF value:


Measured Computed Calculated

Declaration of RF Exposure Compliance

ATTESTATION:

I attest that the information provided in this test report are correct; that a Technical Brief was prepared and the information it contains is correct; that the device evaluation was performed or supervised by me; that applicable measurement methods and evaluation methodologies have been followed and that the device meets the SAR and/or RF exposure limits of RSS-102.

Name: Dipl.-Ing-(FH) Daniel K. Muyunga
Title: Expert
Company: Cetecom ICT Services GmbH
Signature:



Date: 2010-01-14

1.8 Test conditions

Description	Shortcut	Unit	Value
Nominal Temperature / humidity	T _{nom}	°C / %	+23 / 41
Low Temperature	T _{low}	°C	-20
High Temperature	T _{high}	°C	+50
Nominal Power Source	V _{nom}	V	5.00

Type of power source: DC by power supply

1.9 Test Setup

Hardware :	Not specified
Software :	Not specified
Serial number :	Not specified

CETECOM ICT Services GmbH

Untertürkheimer Str. 6-10, 66117 Saarbruecken
RSC-Laboratory

Phone: +49 (0) 681 598-0

Fax: -9075



Test report no.: 1-1872-01-03/09 1-1872-01-03/09
Page 9 of 29

Date: 2009-12-17 2009-12-17

2. Summary of Measurement Results and list of all performed test cases

- No deviations from the technical specifications were ascertained**
 There were deviations from the technical specifications ascertained

TC identifier	Description	verdict	date	Remark
RF-Testing	47 CFR Part 15	passed	2010-01-14	-/-

Section in this Report	Test Name / Section FCC Part 15	Test Name / Section RSS 210	applicable	Verdict
4.1	§ 15.35 (c) Timing of the transmitter (Duty cycle correction factor)	6.5 Pulsed Operation	NO	
4.2	§ 15.225 (a) FIELDSTRENGTH OF FUNDAMENTAL	Annex 2.6	YES	pass
4.3	§ 15.225 (b,c,d) FIELDSTRENGTH OF HARMONICS and SPURIOUS	Annex 2.6	YES	pass
4.4	§ 15.225 (e) Frequency tolerance	Annex 2.6	YES	pass
4.5	§ 15.107 / 15.207 Conducted Limits	Section 6.6 , 7.4	YES	pass

3 RF measurement testing

3.1 Description of test set-up

3.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 1 GHz in semi-anechoic chambers or free field. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber.

The receiving antennas conform with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2003 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test set-ups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received.

The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.4-2003 clause 4.2.

Antennas conform with ANSI C63.2-1996 item 15.

150 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna

>1GHz: Average, RBW 1MHz, VBW 10 Hz, wave guide horn

All measurement settings are according to FCC 15.209 and 15.207

4 FCC Part 15 Subpart C

4.1 Timing of the transmitter

Not applicable

Reference

FCC:	CFR Part SUBCLAUSE § 15.35 (c)
IC:	RSS 210, ISSUE 7 6.5 Pulsed operation

Limits: § 15.35 (c)

(c) Unless otherwise specified, e.g. Section 15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

4.2 Field strength of the fundamental

Reference

FCC:	CFR Part SUBCLAUSE § 15.225 (a)
IC:	RSS 210, Annex 2.6

TEST CONDITIONS		MAXIMUM POWER (dB μ V/m)		
Frequency		13.56 MHz	13.56 MHz	13.56 MHz
		measured at 3m	measured at 10m	extrapolated to 30m*
T nom = +23 °C	V nom = 5.00 V DC	56.98	34.5	16.98
Measurement uncertainty		±3dB		

RBW/VBW : 200 Hz up to 150 kHz, 9 kHz up to 30 MHz, 120 kHz up to 1 GHz

* At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations. The measurements were made at 3m and 10m distance and then extrapolated to 30m using the square of an inverse linear distance extrapolation factor (40 dB/decade) according to FCC part15.31 (f2)

Limits

SUBCLAUSE § 15.225 (a)

Fundamental Frequency (MHz)	Field strength of Fundamental (μ V/m)	Measurement Distance (meters)
13.553 to 13.567	15848 μ V/m (84 dB μ V/m)	30
	158489 μ V/m (104 dB μ V/m)	10
		Recalculated acc. to FCC part15.31 (f2)

4.3 Field strength of the harmonics and the spurious

Reference

FCC:	CFR Part SUBCLAUSE § 15.209 (a)
IC:	RSS 210, Annex 2.6

EMISSION LIMITATIONS				
f (MHz)	amplitude of emission (dB μ V/m)	limit max. allowed field strength	Detector	results
13.56	16.98	29.5	QP	Operating frequency
55.11	28.3	30.0	QP	Complies (Critical)
73.97	15.3	30.0	QP	Complies
91.85	17.6	33.5	QP	Complies
129.48	14.6	33.5	QP	Complies
165.19	10.9	33.5	QP	Complies
Measurement uncertainty			± 3 dB	

RBW/VBW : 200 Hz up to 150 kHz, 9 kHz up to 30 MHz, 120 kHz up to 1 GHz


Limits

SUBCLAUSE § 15.209 (a)

Fundamental Frequency (MHz)	Field strength of Fundamental (μ V/m)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30 (29.5 dB μ V/m)	30
30.0 – 88.0	100 (40 dB μ v/m)	3
88 – 216	150 (43.5 dB μ V/m)	3
216 – 960	200 (46 dB μ V/m)	3

Plots of measurements

Plot 1: Part 15.209 Magnetics

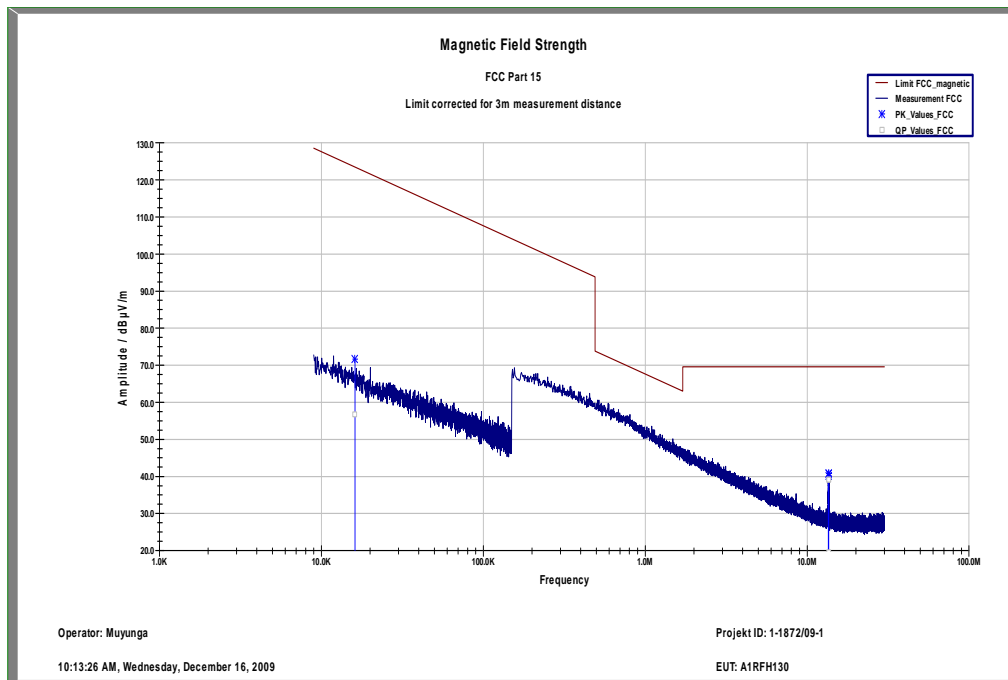

RBW/VBW : 200 Hz up to 150 kHz, 9 kHz up to 30 MHz, 120 kHz up to 1 GHz

The measurements were made at 3m distance and the limits recalculated from 30m to 3m distance using the square of an inverse linear distance extrapolation factor (40 dB/decade) according to FCC part 15.31 (f2).

Limits

SUBCLAUSE § 15.209

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.0009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 - 30	30 (29.5 dBµV/m)	30
30 - 88	100 (40 dBµV/m)	3
88 - 216	150 (43.5 dBµV/m)	3
216 - 960	200 (46 dBµV/m)	3

Plot 2: TX (30 MHz to 1 GHz)


Common Information

EUT:	A1RFH130
Serial Number:	91104
Test Description:	FCC part 15 class B @ 10 m
Operating Conditions:	contin. TX
Operator Name:	Lang
Comment:	- / -


Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup:	Electric Field (NOS)
Level Unit:	dB μ V/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 1,05 GHz	QuasiPeak	120 kHz	15 s	Receiver

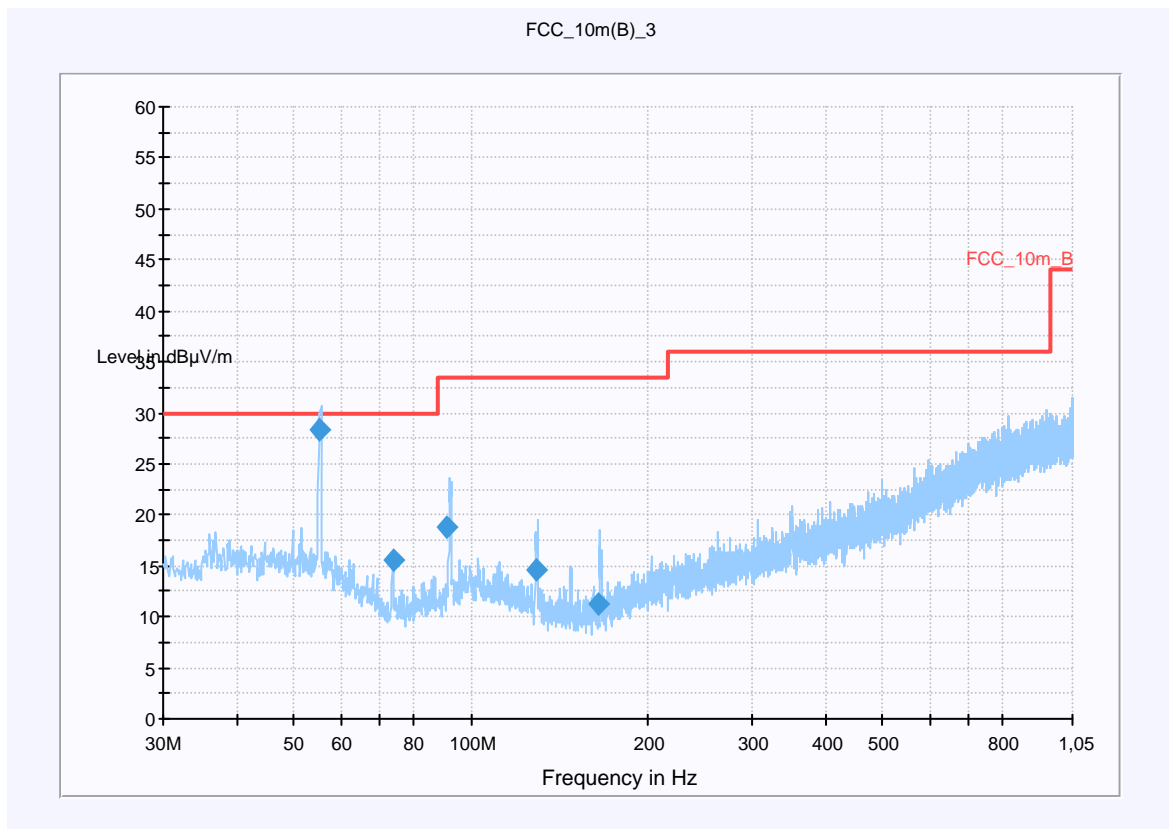

Plot 3 Spectrum mask part15.225 (a,b,c,d)

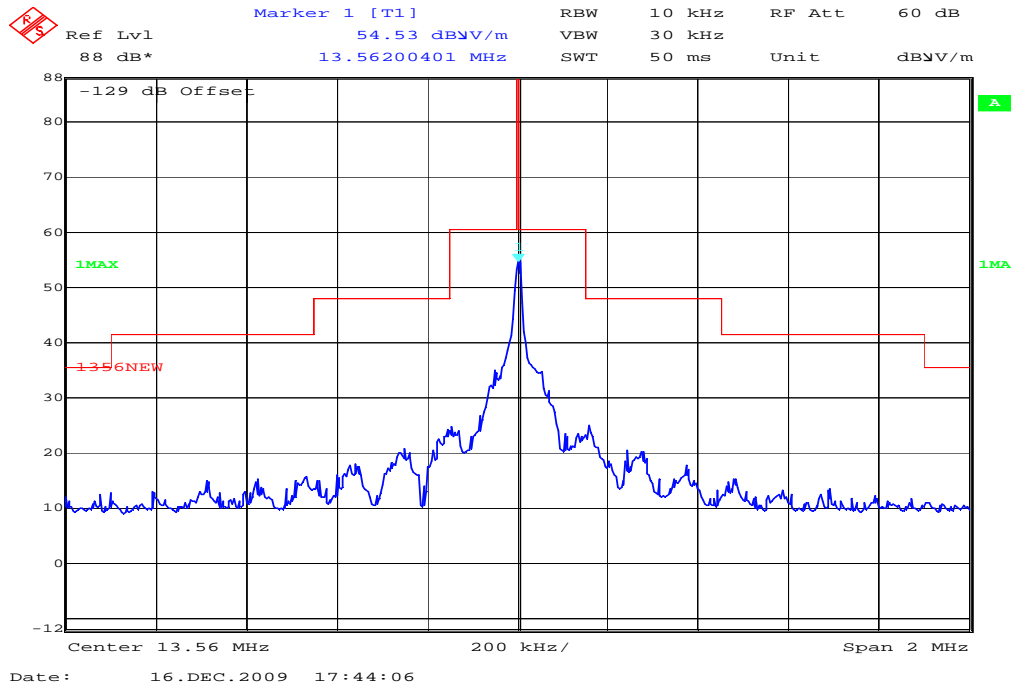

Limits recalculated from 30m to 3m with 40 dB/decade according to FCC 15.31 (f2)

The transmitter complies with FCC 15.225 (a,b,c and d) requirements.

4.4 Frequency tolerance

Reference

FCC:	CFR Part SUBCLAUSE § 15.225 (e)
IC:	RSS 210, Annex 2.6

Frequency tolerance								
Over temperature variation			Over voltage variation			MHz		
Limit is +/- 1.356 kHz			Limit is +/- 1.356 kHz			MHz		
T (°C)	Frequency	result	Power voltage	Frequency	result	F [MHz]	Detector	Level [µV/m]
-20°	13.560 100	Pass	4.50 V	13.560 018	Pass			
-10°	13.560 104	Pass	4.75 V	13.560 032	Pass			
0°	13.560 098	Pass	5.00 V	13.560 050	Pass			
10°	13.560 080	Pass	5.25 V	13.560 064	Pass			
20°	13.560 064	Pass	5.50 V	13.560 070	Pass			
30°	13.560 052	Pass	5.75 V	13.560 068	Pass			
40°	13.560 040	Pass						
50°	13.560 028	Pass						
Measurement uncertainty			±100 Hz					

Limits

SUBCLAUSE § 15.225


The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

4.5 Conducted Limits


Reference

FCC:	CFR Part 15.207, 15.107
IC:	RSS 210, Issue 7, Section 6.6 , 7.4

Plot 1: Neutral line

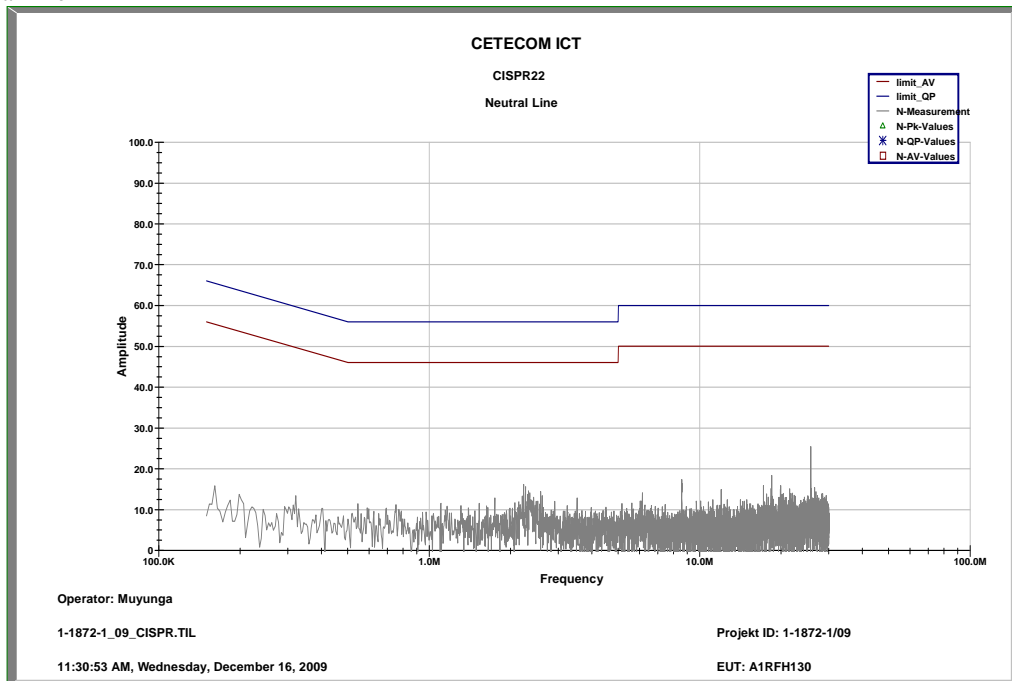

Plot 2: Phase line

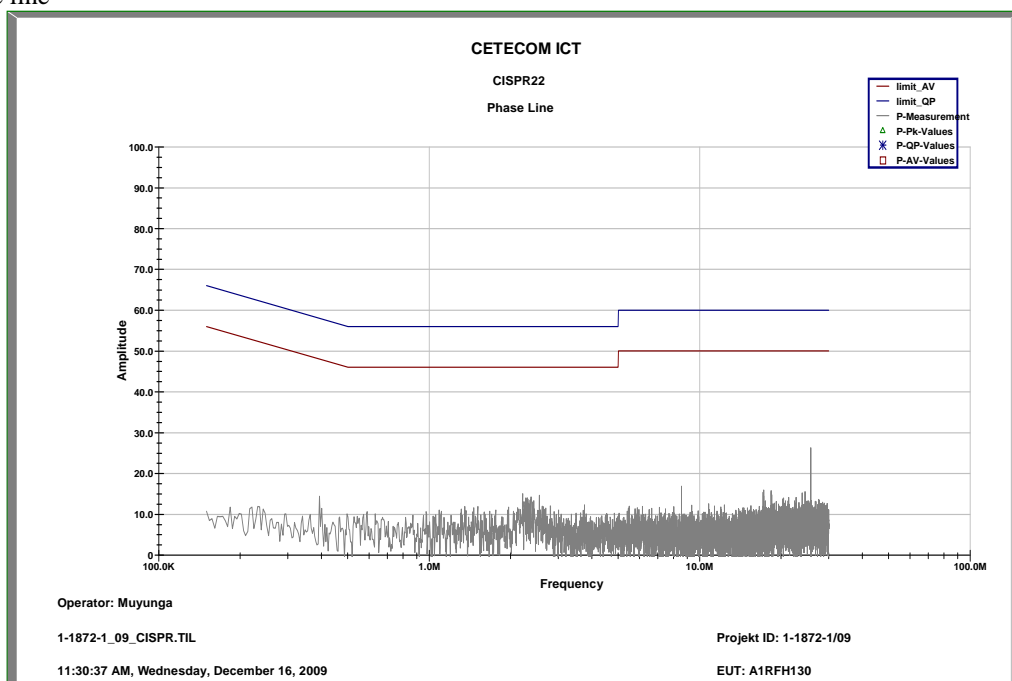

Limits: § 15.107 / 15.207

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency

5 Test equipment and ancillaries used for tests

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

All reported calibration intervals are calibrations according to the EN/ISO/IEC 17025 standard. These calibrations were performed from an accredited external calibration laboratory.

Additional to these calibrations the laboratory performed comparison measurements with other calibrated systems and performed a weekly chamber inspection.

All used devices are connected with a 10 MHz external reference.

According to the manufacturers' instruction is it possible to establish a calibration interval for the FSP unit of 24 month, if the device has an external 10 MHz reference.

Anechoic chamber C:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	Anechoic chamber	MWB	87400/02	300000996	Monthly verification		
2	System-Rack 85900	HP I.V.	*	300000222	n.a.		
3	Measurement System 1						
4	PSA-Spektrumanalysator 3 Hz - 26.5 GHz (E4440A)	Agilent	MY48250080	300003812	05.08.2008	24	05.08.2010
5	EMI Preselector 9 kHz - 1 GHz (N9039A)	Agilent	MY48260003	300003825	19.08.2008	24	19.08.2010
6	Microwave Analog Signal Generator (N5183A)	Agilent	MY47420220	300003813	06.08.2008	24	06.08.2010
7	PC	F+W			n.a.		
8	TILE	TILE			n.a.		
9	TRILOG Super Broadband Antenna (VULB9163)	Schwarzbeck	371	300003854	Monthly verification (System cal.)		
10	Double Ridged Antenna 3115	EMCO	3088	300001032	Monthly verification (System cal.)		
11	Active Loop Antenna 6502	EMCO	2210	300001015	Monthly verification (System cal.)		
12	Switch / Control Unit 3488A	HP	2719A15013	300001156	n.a.		
13	Power Supply 6032A	HP	2818A03450	300001040	08.01.2009	36	08.01.2012
14	Busisolator	Kontron		300001056	n.a.		
15	Leitungsteiler 11850C	HP		300000997	Monthly verification (System cal.)		
16	Power attenuator 8325	Byrd	1530	300001595	Monthly verification (System cal.)		
17	Band reject filter WRCG1855/1910	Wainwright	7	300003350	Monthly verification (System cal.)		
18	Band reject filter WRCG2400/2483	Wainwright	11	300003351	Monthly verification (System cal.)		
19	Hochpassfilter WHK1.1/15G-10SS	Wainwright	3	300003255	Monthly verification (System cal.)		
20	Hochpassfilter WHKX2.9/18G-12SS	Wainwright	1	300003492	Monthly verification (System cal.)		
21	Hochpassfilter WHKX7.0/18G-8SS	Wainwright	18	300003789	Monthly verification (System cal.)		
22	Switch / Control Unit 3488A	HP	2605e08770	300001443	n.a.		
23	Trenntrafo RT5A	Grundig	9242	300001263	n.a.		
24	Relais Matrix PSU	R&S	890167/024	300001168	n.a.		
25	Netznachbildung ESH3-Z5	R&S	828576/020	300001210	n.a.		

Climatic Box:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	Climatic box VT 4002	Heraeus Vötsch	58566046820010	300003019	28.05.2009	24	28.05.2011
2	Climatic box CTS T-40/50	CTS	064023	300003540	04.06.2009	24	04.06.2011

SRD Laboratory Room 002:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	System Controller PSM 12	R&S	835259/007	300002681-00xx	n.a.		
2	Memory Extension PSM-K10	R&S	To 1	300002681	n.a.		
3	Operating Software PSM-B2	R&S	To 1	300002681	n.a.		
4	19" Monitor		22759020-ED	300002681	n.a.		
5	Mouse		LZE 0095/6639	300002681	n.a.		
6	Keyboard		G00013834L461	300002681	n.a.		
7	Spectrum Analyser FSIQ 26	R&S	835540/018	300002681-0005	10.01.2008	24	10.01.2010
8	Tracking Generator FSIQ-B10	R&S	835107/015	300002681	s.No.7		
10	RF-Generator SMIQ03 (B1 Signal)	R&S	835541/056	300002681-0002	26.08.2008	36	26.08.2011
11	Modulation Coder SMIQ-B20	R&S	To 10	300002681	s.No.10		
12	Data Generator SMIQ-B11	R&S	To 10	300002681	s.No.10		
13	RF Rear Connection SMIQ-B19	R&S	To 10	300002681	s.No.10		
14	Broadband horn antenna (1-18 GHz)	EMCO	9107-3696	300001604	16.04.2008	24	16.04.2010
15	Broadband horn antenna (1-18 GHz)	EMCO	9107-3697	300001605	21.08.2008	24	21.08.2010
16	Std gain horn antenna (18- 26.5 GHz)	Narda	Model no. 638	300000486	n.a.		
17	Std gain horn antenna (18- 26.5 GHz)	Narda	Model no. 638	300000487	n.a.		
18	Sleeve dipole antenna Model 3126-880	ETS-Lindgren	00040887	3000000	n.a.		
19	Fast CPU SM-B50	R&S	To 10	300002681	s.No.10		
20	FM Modulator SM-B5	R&S	835676/033	300002681	s.No.10		
21	RF-Generator SMIQ03 (B2 Signal)	R&S	835541/055	300002681-0001	25.08.2008	36	25.08.2011
22	Modulation Coder SMIQ-B20	R&S	To 21	300002681	s.No.21		
23	Data Generator SMIQ-B11	R&S	To 21	300002681	s.No.21		
24	RF Rear Connection SMIQ-B19	R&S	To 21	300002681	s.No.21		
25	Fast CPU SM-B50	R&S	To 21	300002681	s.No.21		
26	FM Modulator SM-B5	R&S	836061/022	300002681	s.No.21		
27	RF-Generator SMP03 (B3 Signal)	R&S	835133/011	300002681-0003	26.08.2008	36	26.08.2011
28	Attenuator SMP-B15	R&S	835136/014	300002681	S.No.27		
29	RF Rear Connection SMP-B19	R&S	834745/007	300002681	S.No.27		
30	Power Meter NRVD	R&S	835430/044	300002681-0004	26.08.2008	24	26.08.2010
31	Power Sensor NRVD-Z1	R&S	833894/012	300002681-0013	26.08.2008	24	26.08.2010
32	Power Sensor NRVD-Z1	R&S	833894/011	300002681-0010	26.08.2008	24	26.08.2010
33	Rubidium Standard RUB	R&S		300002681-0009	27.08.2008	24	27.08.2010
34	Switching and Signal Conditioning Unit SSCU	R&S	338864/003	300002681-0006	Verified with path compensation		
35	Laser Printer HP Deskjet 2100	HP	N/A	300002681-0011	n.a.		
36	19" Rack	R&S	11138363000004	300002681	n.a.		
37	RF-cable set	R&S	N/A	300002681	n.a.		
39	IEEE-cables	R&S	N/A	300002681	n.a.		
40	Sampling System FSIQ-B70	R&S	835355/009	300002681	s.No.7		
41	RSP programmable attenuator	R&S	834500/010	300002681-0007	26.08.2008	24	26.08.2010
42	Signalling Unit	R&S	838312/011	300002681	n.a.		

43	NGPE programmable Power Supply for EUT	R&S	192.033.41	300002681			
44	Power Splitter 6005-3	Inmet Corp.	none	300002841	n.a.		
45	SMA Cables SPS-1151-985-SPS	Insulated Wire	different	different	n.a.		
46	CBT32 with EDR Signaling Unit	R&S					
47	Coupling unit	Narda	N/A	--	n.a.		
48	2xSwitch Matrix PSU	R&S	872584/021	300001329	n.a.		
49	RF-cable set	R&S	N/A	different	n.a.		
50	IEEE-cables	R&S	N/A	--	n.a.		

Note: 3000002681-00xx inventoried as a system

Anechoic chamber F:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	Control Computer	F+W	FW0502032	300003303	-/-	-/-	-/-
2	Trilog Antenna VULB 9163	Schwarzbeck	295	300003787	01.04.2008	24	01.04.2010
3	Amplifier - 0518C-138	Veritech Micro-wave Inc.	-/-	-/-	-/-	-/-	-/-
4	Switch - 3488A	HP		300000368	-/-	-/-	-/-
5	EMI Test receiver - ESCI	R&S	100083	300003312	01.06.2009	24	01.06.2011
6	Turntable Controller - 1061 3M	EMCO	1218	300000661	-/-	-/-	-/-
7	Tower Controller 1051 Controller	EMCO	1262	300000625	-/-	-/-	-/-
8	Tower - 1051	EMCO	1262	300000625	-/-	-/-	-/-
10	Ultra Notch-Filter Rejected band Ch. 62	WRCD	9	-/-	-/-	-/-	-/-