



**Certification Test Report:** 2014 12247317 FCC

**Applicant:** Linear LLC  
1950 Camino Vida Roble  
Carlsbad, CA 92008  
USA

**Equipment Under Test:  
(E.U.T.)** GD00Z-1

**FCC Identifier:** EF400116

**Industry Canada Identifier:** 1078A-00116

**In Accordance With:** **FCC Part 15, Subpart C, 15.249 and Industry  
Canada RSS-210, Issue 8**  
Operation within the bands 902-928 MHz,  
2400-2483.5 MHz, 5725-5875 MHz, and  
24.0-24.25 GHz.

**Tested By:** Nemko USA Inc.  
2210 Faraday Ave.  
Suite 150  
Carlsbad, CA 92008

**TESTED BY:**

David Light, Wireless Engineer

**DATE:**

15 January 2014

**APPROVED BY:**

Alan Laudani  
Senior RF/EMC Engineer

**DATE:**

15 January 2014

**Total Number of Pages: 17**

**Table of Contents**

<b>SECTION 1. SUMMARY OF TEST RESULTS</b>	<b>3</b>
<b>SECTION 2. GENERAL EQUIPMENT SPECIFICATION</b>	<b>5</b>
<b>SECTION 3. POWERLINE CONDUCTED EMISSIONS</b>	<b>6</b>
<b>SECTION 4. RADIATED EMISSIONS</b>	<b>9</b>
<b>SECTION 5. RECEIVER SPURIOUS EMISSIONS</b>	<b>12</b>
<b>SECTION 6. TEST EQUIPMENT LIST</b>	<b>15</b>
<b>ANNEX A TEST DIAGRAMS</b>	<b>16</b>

**Section 1. Summary Of Test Results**

Manufacturer: Linear LLC

Model No.: GD00Z-1

Serial No.: None

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 15.249 and Industry Canada RSS-210, Issue 8. All tests were conducted using measurement procedure ANSI C63.4-2003. Radiated Emissions were made in a semi-anechoic chamber. A description of the test facility is on file with the FCC and Industry Canada.

New Submission

Production Unit

Class II Permissive Change

Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.

See " Summary of Test Data".



NVLAP Lab Code 200116-0

***This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Nemko USA, Inc. is a NVLAP accredited laboratory.***


Nemko USA Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko USA Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

Summary Of Test Data

NAME OF TEST	PARA. NO.	RESULT
Conducted Emissions	FCC 15.207 / RSS-Gen 7.2.4	Complies
Radiated Emissions	FCC 15.249 / RSS-210 A2.9	Complies
Receiver Spurious Emissions	RSS-Gen 6.1	Complies

99% Bandwidth

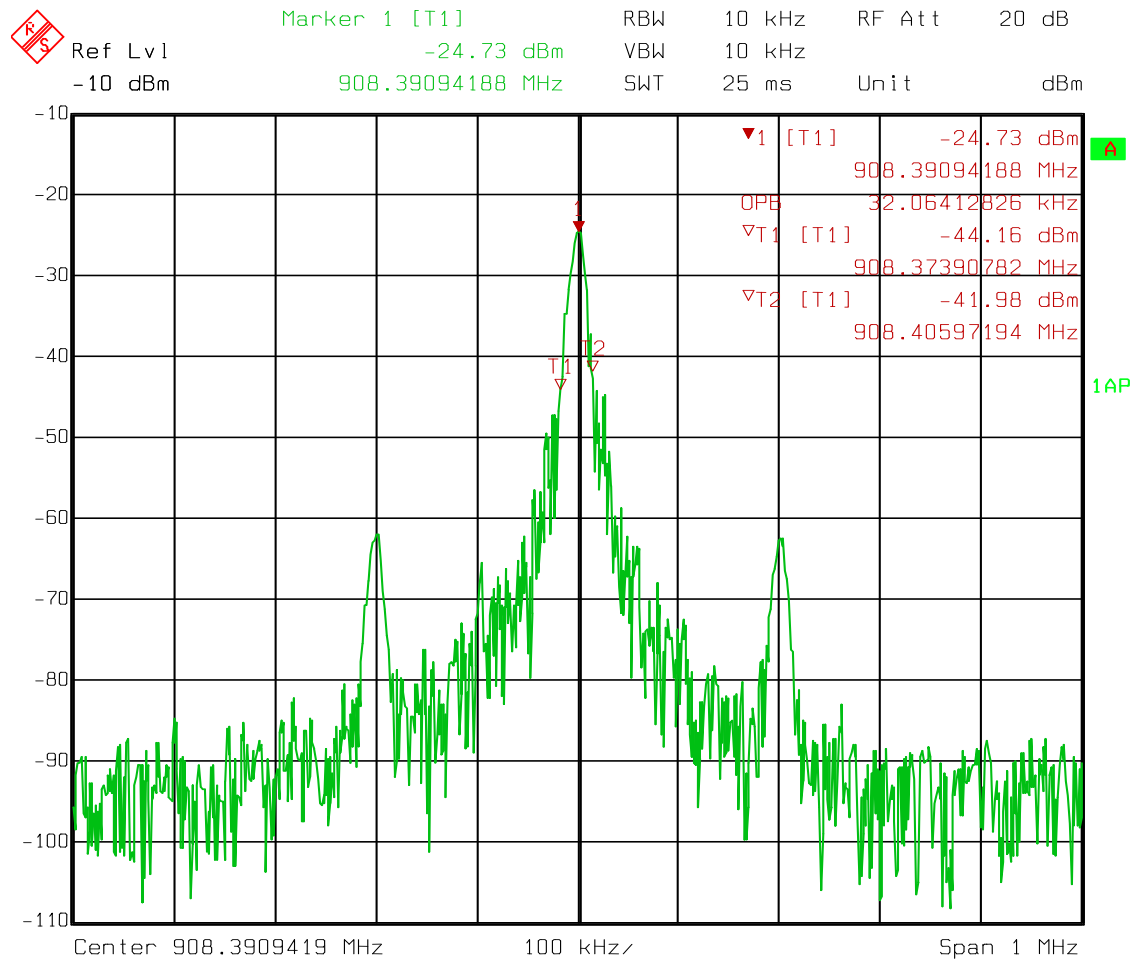

Date: 17.DEC.2013 14:13:34

**Section 2. General Equipment Specification**

<b>Frequency Range:</b>	902 – 928 MHz				
<b>Operating Frequency(ies) of Sample:</b>	908.42 MHz Single channel				
<b>Tunable Bands:</b>	None				
<b>Number of Channels:</b>	1				
<b>Modulation:</b>	GFSK				
<b>Emissions Designator:</b>	32KF1D				
<b>Channel Spacing:</b>	NA				
<b>User Frequency Adjustment:</b>	None				
<b>Integral Antenna</b>	<table><tr><td><b>Yes</b></td><td><b>No</b></td></tr><tr><td><input checked="" type="checkbox"/></td><td><input type="checkbox"/></td></tr></table>	<b>Yes</b>	<b>No</b>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
<b>Yes</b>	<b>No</b>				
<input checked="" type="checkbox"/>	<input type="checkbox"/>				

**Description of EUT**

The GD00Z-1 will allow a Lowes Iris Home control system to monitor the status of the Garage door via an RF tilt sensor and provide this information to the control system for home security monitoring. The Iris system will talk with the GD00Z-1 to allow unattended operation of the Garage door with a relay contact closure to the wall panel input terminals at the GDO, IF the conditions (set by UL standard 325) are met. The GD00Z-1 will provide a flashing bright white lamp and Buzzer sound as a warning signal required by the UL standard. The Contact closure points will also be monitored in the occurrence of someone pressing the button at the garage wall panel during the UL 325 defined warning period. The GD00Z-1 also includes a 345 MHz radio receiver circuit to receive the status of the door sensor position and condition.

**Section 3. Powerline Conducted Emissions**

NAME OF TEST: Powerline Conducted Emissions	PARA. NO.: 15.207 / 7.2.4
TESTED BY: David Light	DATE: 16 December 2013

**Minimum Standard:** Conducted limits.

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 mH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBmV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

**Test Results:** Complies . See attached graph(s).


**Measurement Data:** See attached graph(s).

**Method of Measurement: (Procedure ANSI C63.4-2003)**

Measurements were made using a spectrum analyzer with 10 kHz RBW, Peak Detector. Any emissions that are close to the limit are measured using a test receiver with 10 kHz bandwidth, CISPR Quasi-Peak Detector.


**Measurements conditions:** Temperature 22°C  
Relative Humidity 35%

Test Data – Powerline Conducted Emissions (Line 1)

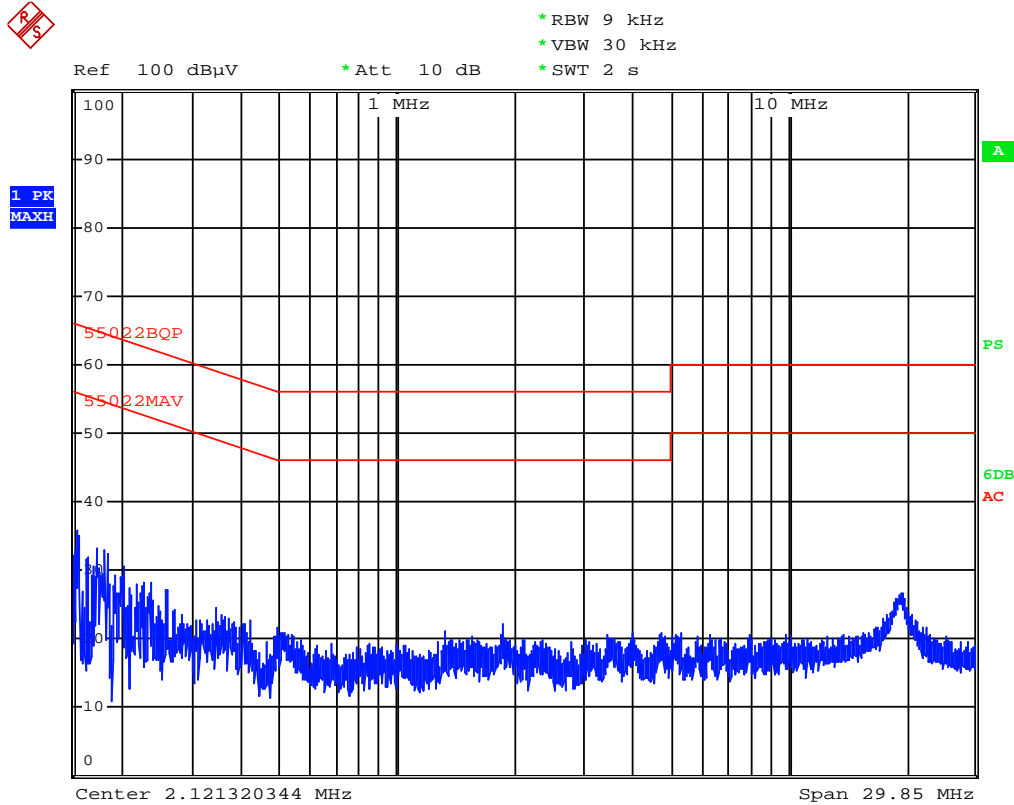

Date: 16.DEC.2013 16:07:39

Test Data – Powerline Conducted Emissions (Neutral)

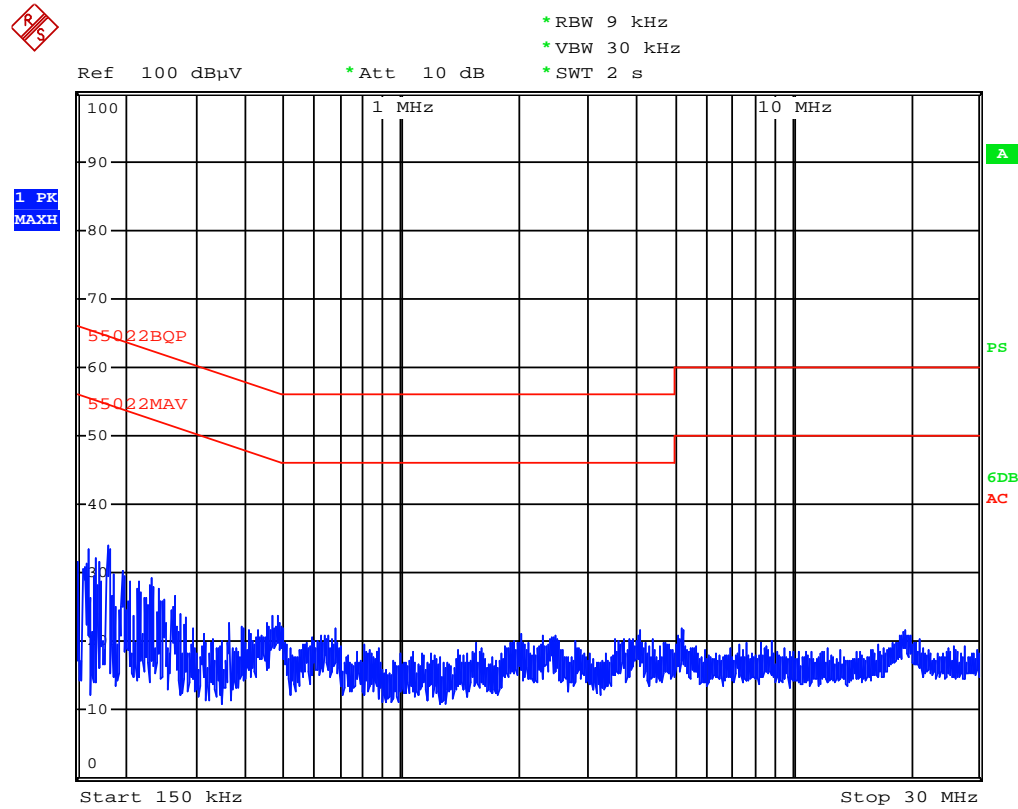

Date: 16.DEC.2013 16:08:41



**Section 4. Radiated Emissions**

NAME OF TEST: Radiated Emissions	PARA. NO.: 15.249 / A2.4
TESTED BY: David Light	DATE: 16 December 2013

**Minimum Standard:** Para no. 15.249 / A2.4

(a) The field strengths shall not exceed the following:

Carrier (MHz)	Field Strength (mV/m)	Field Strength (dBµV)	Harmonic (µV/m)	Harmonic (dBµV)
902-928	50	94	500	54
2400-2483.5	50	94	500	54
5725-5875	50	94	500	54
24000-24250	250	108	2500	68

(b) Field strength limits are specified at a distance of 3 metres.

(c) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated limits of 15.209 whichever is the less attenuation.

(d) ...for frequencies above 1000 MHz, the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

**Test Results:** Complies

**Measurement Data:** See attached table.

**Measurements conditions:** Temperature 22°C  
 Relative Humidity 35%

**Test Data - Radiated Emissions (Peak)**

Meas. Freq. (MHz)	Ant. Pol. (H/V)	Atten. (dB)	Meter Reading (dBuV)	Antenna Factor (dB)	Path Loss (dB)	RF Gain (dB)	Corrected Reading (dBuV/m)	Spec. limit (dBuV/m)	CR/SL Diff. (dB)	Pass Fail Unc.	Comment
908.42	H	0	54.2	23.5	6.1	0.0	83.8	94.0	-10.2	Pass	Peak
1816.84	H	0	44	26.5	7.6	31.5	46.6	74.0	-27.4	Pass	Peak
2725.26	H	0	43.2	28.9	10.2	30.8	51.5	74.0	-22.5	Pass	Peak
3633.68	H	0	38.7	31.5	10.6	31.7	49.1	74.0	-24.9	Pass	Peak
4542.10	H	0	37.1	32.3	11.1	30.7	49.8	74.0	-24.2	Pass	Peak
5450.52	H	0	36	34.3	12.3	30.3	52.3	74.0	-21.7	Pass	Peak
6358.94	H	0	35.3	34.5	12.9	30.0	52.7	74.0	-21.3	Pass	Peak
7267.36	H	0	35.3	35.9	13.3	30.8	53.7	74.0	-20.3	Pass	Peak
8175.78	H	0	34	36.9	14.0	31.7	53.2	74.0	-20.8	Pass	Peak
9084.20	H	0	34.3	37.6	15.0	33.8	53.1	74.0	-20.9	Pass	Peak
908.42	V	0	64	23.5	6.1	0.0	93.6	94.0	-0.4	Pass	Peak
1816.84	V	0	44	26.5	7.6	31.5	46.6	74.0	-27.4	Pass	Peak
2725.26	V	0	43.9	28.9	10.2	30.8	52.2	74.0	-21.8	Pass	Peak
3633.68	V	0	38.7	31.5	10.6	31.7	49.1	74.0	-24.9	Pass	Peak
4542.10	V	0	37.1	32.3	11.1	30.7	49.8	74.0	-24.2	Pass	Peak
5450.52	V	0	36	34.3	12.3	30.3	52.3	74.0	-21.7	Pass	Peak
6358.94	V	0	35.3	34.5	12.9	30.0	52.7	74.0	-21.3	Pass	Peak
7267.36	V	0	35.3	35.9	13.3	30.8	53.7	74.0	-20.3	Pass	Peak
8175.78	V	0	34	36.9	14.0	31.7	53.2	74.0	-20.8	Pass	Peak
9084.20	V	0	34.3	37.6	15.0	33.8	53.1	74.0	-20.9	Pass	Peak

**Analyzer Settings:** <1000 MHz RBW = 100 kHz VBW = 300 kHz Peak Detector  
 >1000 MHz RBW = 1 MHz VBW = 3 MHz Peak Detector

**Test Data - Radiated Emissions (Average)**

Meas. Freq. (MHz)	Ant. Pol. (H/V)	Atten. (dB)	Meter Reading (dBuV)	Antenna Factor (dB)	Path Loss (dB)	RF Gain (dB)	Corrected Reading (dBuV/m)	Spec. limit (dBuV/m)	CR/SL Diff. (dB)	Pass Fail Unc.	Comment
908.42	H	0	53.9	23.5	6.1	0.0	83.5	94.0	-10.5	Pass	Average
1816.84	H	0	32	26.5	7.6	31.5	34.6	54.0	-19.4	Pass	Average
2725.26	H	0	43.2	28.9	10.2	30.8	51.5	54.0	-2.5	Pass	Average
3633.68	H	0	28	31.5	10.6	31.7	38.4	54.0	-15.6	Pass	Average
4542.10	H	0	27	32.3	11.1	30.7	39.7	54.0	-14.3	Pass	Average
5450.52	H	0	26	34.3	12.3	30.3	42.3	54.0	-11.7	Pass	Average
6358.94	H	0	25	34.5	12.9	30.0	42.4	54.0	-11.6	Pass	Average
7267.36	H	0	25	35.9	13.3	30.8	43.4	54.0	-10.6	Pass	Average
8175.78	H	0	24.3	36.9	14.0	31.7	43.5	54.0	-10.5	Pass	Average
9084.20	H	0	24.7	37.6	15.0	33.8	43.5	54.0	-10.5	Pass	Average
908.42	V	0	63	23.5	6.1	0.0	92.6	94.0	-1.4	Unc.	Average
1816.84	V	0	32	26.5	7.6	31.5	34.6	54.0	-19.4	Pass	Average
2725.26	V	0	43.5	28.9	10.2	30.8	51.8	54.0	-2.2	Pass	Average
3633.68	V	0	28	31.5	10.6	31.7	38.4	54.0	-15.6	Pass	Average
4542.10	V	0	27	32.3	11.1	30.7	39.7	54.0	-14.3	Pass	Average
5450.52	V	0	26	34.3	12.3	30.3	42.3	54.0	-11.7	Pass	Average
6358.94	V	0	25	34.5	12.9	30.0	42.4	54.0	-11.6	Pass	Average
7267.36	V	0	25	35.9	13.3	30.8	43.4	54.0	-10.6	Pass	Average
8175.78	V	0	24.3	36.9	14.0	31.7	43.5	54.0	-10.5	Pass	Average
9084.20	V	0	24.7	37.6	15.0	33.8	43.5	54.0	-10.5	Pass	Average

**Analyzer Settings:** <1000 MHz RBW = 100 kHz VBW = 100 kHz Peak Detector  
 >1000 MHz RBW = 1 MHz VBW = 10 MHz RMS Detector

**Section 5. Receiver Spurious Emissions**

NAME OF TEST: Receiver Spurious Emissions	PARA. NO.: RSS-Gen 6.1
TESTED BY: David Light	DATE: 27 December 2013

**Minimum Standard:** Para no. RSS-Gen 6.1

Radiated spurious emission measurements shall be performed with the receiver antenna connected to the receiver antenna terminals. Spurious emissions from receivers shall not exceed the radiated limits shown in the table below.



Frequency (MHz)	Field Strength (microvolts/m at 3 meters)	Field Strength (dB $\mu$ V/m at 3 meters)
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

**Test Results:** Complies



**Measurement Data:** See attached graph(s)

**Measurements conditions:** Temperature 22°C  
Relative Humidity 35%

Test Data – Receiver Spurious Emissions

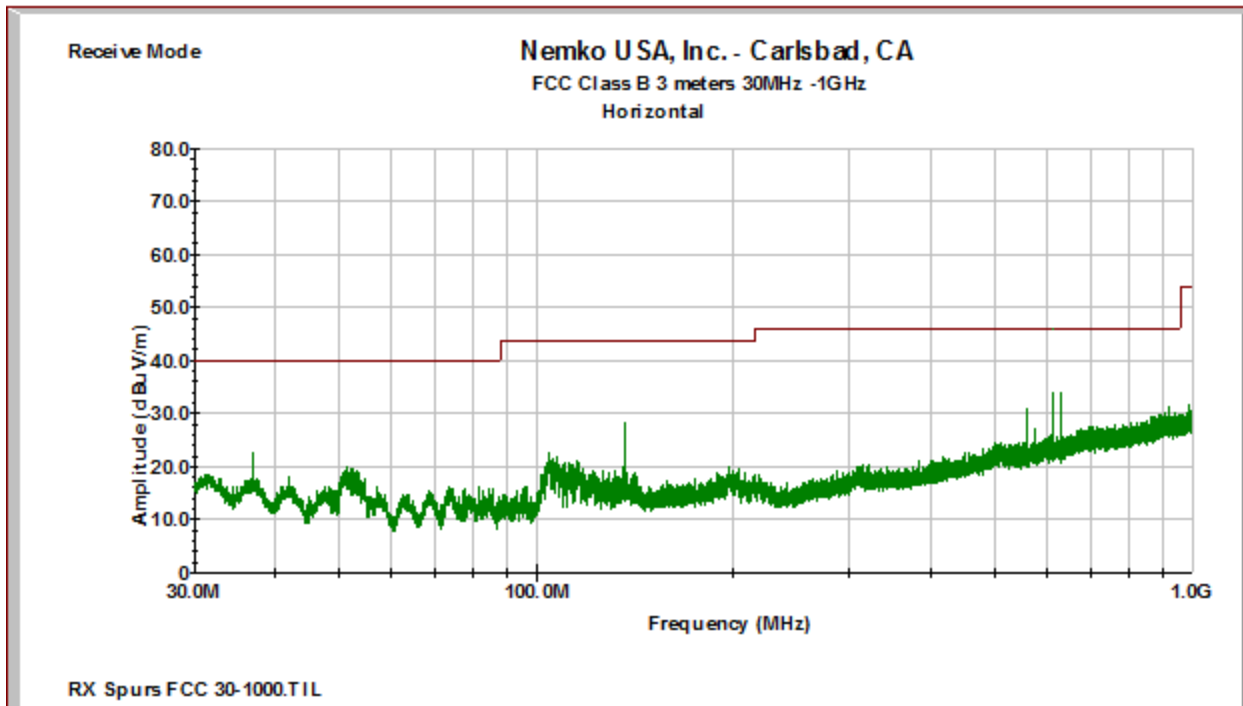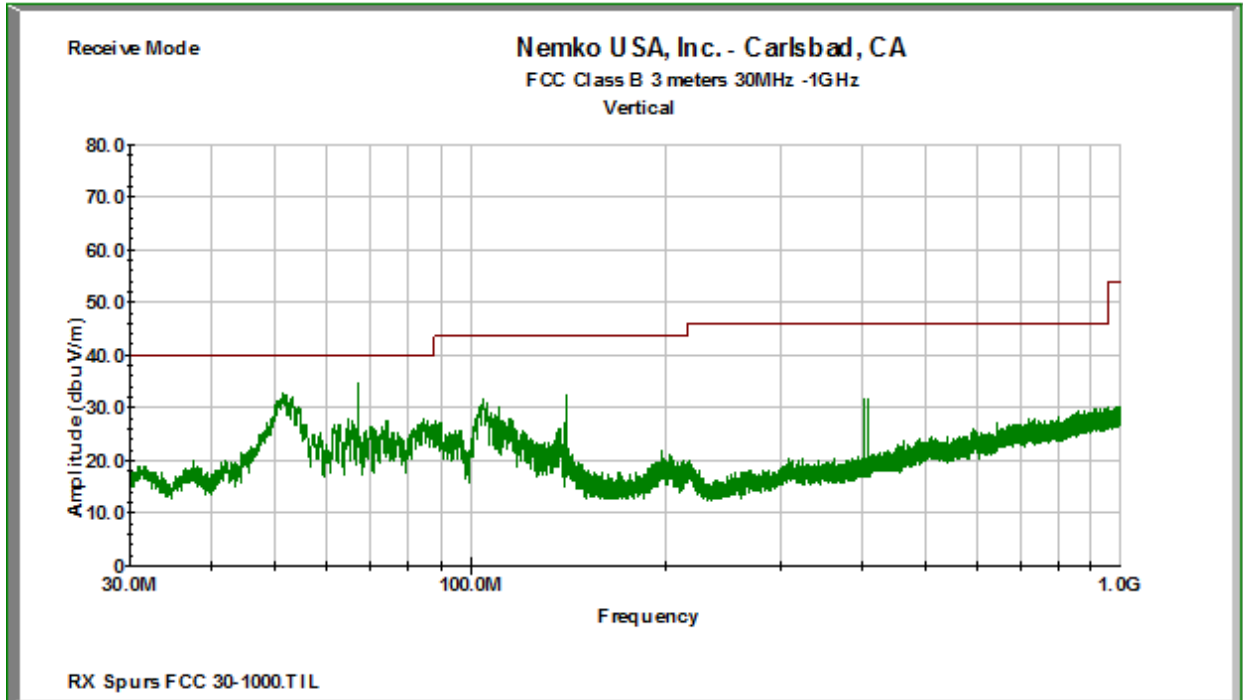

Test Data – Receiver Spurious Emissions

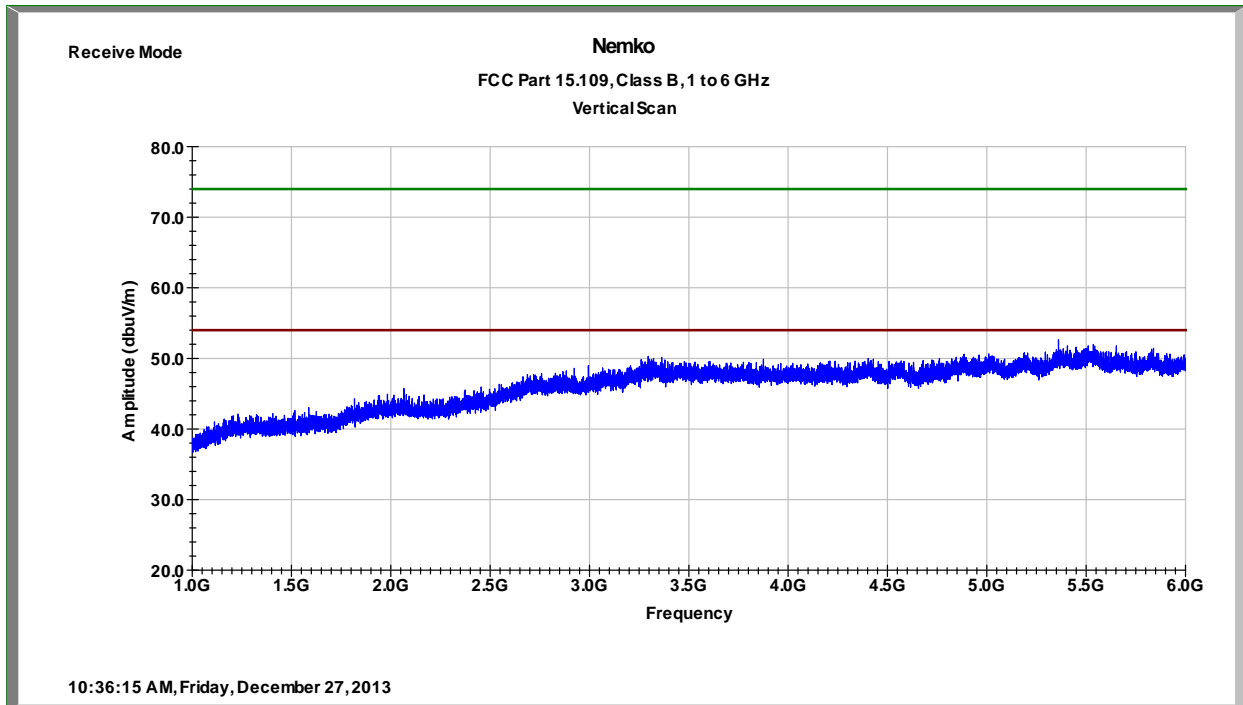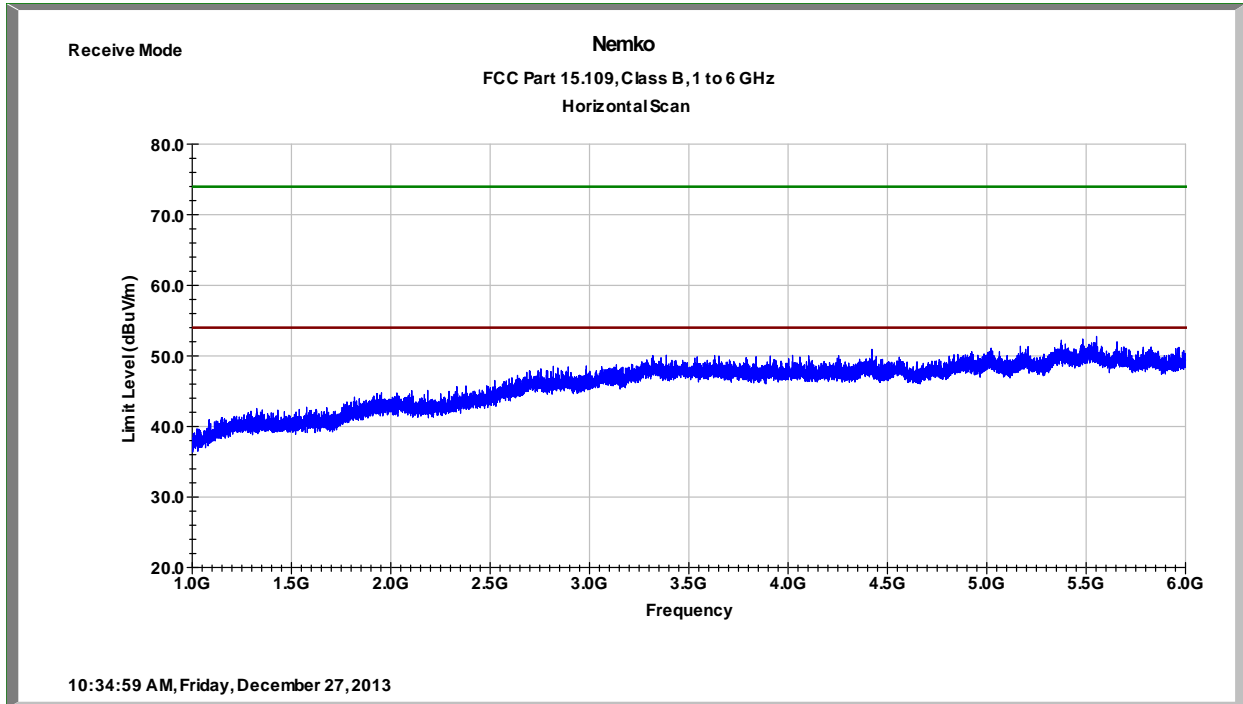

**Section 6. Test Equipment List**

Asset Tag	Description	Manufacturer	Model	Serial #	Last Cal	Next Cal
752	Antenna, DRWG	EMCO	3115	4943	03-Jan-2013	03-Jan-2014
827	Preamplifier	Com-Power	PA-103	161032	14-Jul-2013	14-Jul-2014
E1030	10 Meter Low Loss Cable	A.H. Systems, Inc.	SAC-18G-10	1096	23-Dec-2012	23-Dec-2013
1763	Antenna, Bilog	Schaffner	CBL 6111D	22926	07-Mar-2013	07-Mar-2014
1016	Preamplifier	Hewlett Packard	8449A	2749A00159	20-Aug-2013	20-Aug-2014
1036	Spectrum Analyzer	Rohde & Schwarz	FSEK30	830844/006	15-Jul-2013	15-Jul-2015
E1019	Two Line V- Network	Rohde & Schwarz	ENV216	101045	13-Apr-2013	13-Apr-2014
E1026	EMI Test Receiver 9kHz to 7GHz	Rohde & Schwarz	ESCI 7	100800	15-Jul-2013	15-Jul-2014

**Nemko USA, Inc.**

CFR 47, PART 15, SUBPART C, Paragraph 15.249  
and Industry Canada RSS-210, Issue 8  
Operation within the bands 902-928 MHz,  
2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz.

FCC ID: EF400116

IC: 1078A-00116

REPORT NO.: 2014 12247317 FCC


---

## **ANNEX A**

### **TEST DIAGRAMS**



### Conducted Emissions

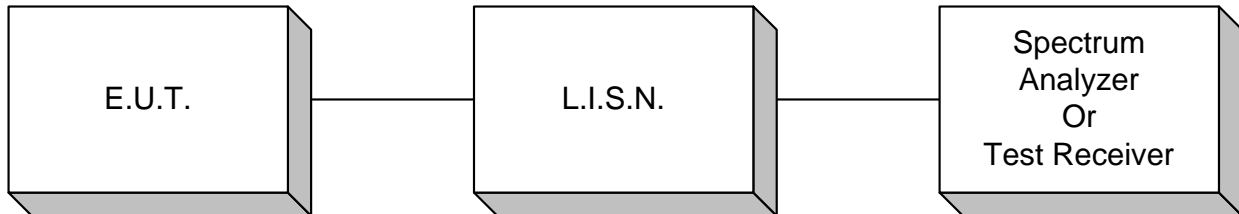

### Test Site For Radiated Emissions

