

**FCC PART 15 SUBPART B & SUBPART C SECTION 15.249
TEST REPORT**

for

**GARAGE DOOR OPENER REMOTE COMMAND TRANSCEIVER
Model: GD00Z-4**

Prepared for

NORTEK SECURITY & CONTROL
1950 CAMINO VIDA ROBLE, SUITE 150
CARLSBAD, CA 92008

Prepared by: _____

MATT HARRISON

Approved by: _____

JEFF KLINGER

COMPATIBLE ELECTRONICS INC.
20621 PASCAL WAY
LAKE FOREST, CALIFORNIA 92630
(949) 587-0400

DATE: FEBRUARY 20, 2015

	REPORT BODY	APPENDICES					TOTAL
		A	B	C	D	E	
PAGES	18	2	2	2	15	23	62

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS	5
1. PURPOSE	6
2. ADMINISTRATIVE DATA	7
2.1 Location of Testing	7
2.2 Traceability Statement	7
2.3 Cognizant Personnel	7
2.4 Date Test Sample was Received	7
2.5 Disposition of the Test Sample	7
2.6 Abbreviations and Acronyms	7
3. APPLICABLE DOCUMENTS	8
4. DESCRIPTION OF TEST CONFIGURATION	9
4.1 Description of Test Configuration	9
4.1.1 Photograph Test Configuration	9
4.1.2 Cable Construction and Termination	10
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	11
5.1 EUT and Accessory List	11
5.2 EMI Test Equipment	12
6. TEST SITE DESCRIPTION	13
6.1 Test Facility Description	13
6.2 EUT Mounting, Bonding and Grounding	13
6.3 Facility Environmental Characteristics	13
7. CHARACTERISTICS OF THE TRANSMITTER	14
7.1 Channel Number and Frequencies	14
7.2 Antenna	14
8. TEST PROCEDURES	15
8.1 RF Emissions	15
8.1.1 Conducted Emissions Test	15
8.1.2 Radiated Emissions (Spurious and Harmonics) Test	16
8.1.3 Fundamental Field Strength	17
8.1.4 Emissions Radiated Outside of the Fundamental Frequency Band	17
9. TEST PROCEDURE DEVIATIONS	18
10. CONCLUSIONS	18



LIST OF APPENDICES

APPENDIX	TITLE
A	Laboratory Accreditations and Recognitions
B	Modifications to the EUT
C	Additional Models Covered Under This Report
D	Diagrams, Charts, and Photos • Test Setup Diagrams • Antenna and Amplifier Factors • Radiated and Conducted Emissions Photos
E	Radiated and Conducted Emissions Data Sheets

LIST OF FIGURES

FIGURE	TITLE
1	Plot Map And Layout of Test Site Below 1GHz
2	Plot Map And Layout of Test Site Above 1GHz
3	Conducted Emissions Test Setup



GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced in any form unless done so in full with the written permission of Compatible Electronics.

This report must not be used to claim product certification, approval or endorsement by NVLAP, NIST, or any agency of the federal government.

Device Tested: Garage Door Opener Remote Command Transceiver
Model: GD00Z-4
S/N: None

Product Description: The EUT connects to the garage door openers pushbutton wall console terminals. A wireless tilt sensor mounts on the garage door and reports the door's position to the GD00Z-4. GD00Z-4 responds to Z-Wave commands from Z-Wave controllers to open or close the garage door. A warning indicator light flashes and a beeper sounds for 5 seconds before the door begins to move. If the door does not completely open or close, a second open or close command can be sent after 30 seconds.

Modifications: The EUT was modified in order to comply with specifications. Please see the list of modifications in Appendix B.

Manufacturer: Nortek Security & Control
1950 Camino Vida Roble, Suite 150
Carlsbad, CA 92008

Test Date: February 19 & 20, 2015

Test Specifications: EMI requirements

CFR Title 47, Part 15 Subpart B Sections 15.107, 15.109, Subpart C Sections 15.205, 15.207, 15.209 and 15.249

Test Procedure: ANSI C63.4 & C63.10



SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz - 30 MHz.	Complies with the limits of CFR Title 47 Part 15 Subpart B, Section 15.107 and Subpart C Sections 15.207
2	Radiated RF Emissions & Harmonics, 9 kHz – 10,000 MHz.	Complies with the limits of CFR Title 47 Part 15 Subpart B Section 15.109 & Subpart C Section 15.205, 15.209, & 15.249

TABLE 1:
SIX HIGHEST CONDUCTED EMISSIONS READINGS

	Reading Type (PK / QP / AV)	Line (Line / Neutral)	Mode (Rx / Tx)	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Delta (dB)
1	AV	L	Tx	0.60	21.57	46.00	-24.43
2	AV	N	Rx	0.60	20.75	46.00	-25.25
3	AV	N	Rx	0.51	19.83	46.00	-26.17
4	AV	N	Tx	0.52	17.16	46.00	-28.84
5	AV	L	Rx	0.60	16.80	46.00	-29.20
6	AV	L	Tx	0.17	23.24	54.96	-31.72

TABLE 2
SIX HIGHEST RADIATED EMISSIONS READINGS

	Reading Type (PK / QP / AV)	Polarization (Vert / Horz)	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Delta (dB)	Test Distance
1	QP	V	131.40	32.23	43.52	-17.57	3-Meter
2	QP	V	126.50	31.43	43.52	-18.80	3-Meter
3	QP	V	125.90	31.09	43.52	-18.98	3-Meter
4	QP	V	130.20	30.79	43.52	-19.34	3-Meter
5	QP	V	123.80	30.49	43.52	-20.39	3-Meter
6	QP	V	125.20	28.31	43.52	-20.96	3-Meter



1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the Garage Door Opener Remote Command Transceiver Model: GD00Z-4. The EMI measurements were performed according to the measurement procedure described in ANSI C63.10. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT (equipment under test) hereafter, are within the specification limits defined by the Code of Federal Regulations Title 47, Part 15 Subpart B section 15.107, 15.109, & Part 15 Subpart C sections 15.205, 15.207, 15.209 and 15.249.



2. ADMINISTRATIVE DATA

2.1 Location of Testing

The tests described herein were performed at the test facility of Compatible Electronics, 20621 Pascal Way Lake Forest, California 92630.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Nortek

Josh Hansen Regulatory Engineer

Compatible Electronics, Inc.

Matt Harrison Test Technician

Jeff Klinger Director of Engineering

2.4 Date Test Sample was Received

The test sample was received on February 19, 2015.

2.5 Disposition of the Test Sample

The test sample remains at Compatible Electronics, Inc. as of the date of this test report.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network
NVLAP	National Voluntary Laboratory Accreditation Program
CFR	Code of Federal Regulations
PCB	Printed Circuit Board
TX	Transmit
RX	Receive



3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this Test Report.

SPEC	TITLE
CFR Title 47, Part 15	FCC Rules – Radio frequency devices (including digital devices)
ANSI C63.4 2009	Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz.
ANSI C63.10: 2009	American National Standard for Testing Unlicensed Wireless Devices



4. DESCRIPTION OF TEST CONFIGURATION


4.1 Description of Test Configuration

The Garage Door Opener Model: GD00Z-4 (EUT) was setup in a tabletop configuration. The EUT was connected to the Power Supply and a normally open cable via hardwired cables and direct power port respectively. The EUT was checked all 3 axis. The worst case was found to be the X-Axis. The EUT was continuously transmitting a data stream during transmit tests and constantly receiving during receive tests.

The voltage was varied $\pm 15\%$; the transmitting signal amplitude and frequency did not vary.

It was determined that the emissions were at their highest level when the EUT was transmitting in the configuration described above for Radiated Emissions. The final radiated data was taken in the above configuration. Please see Appendix E for the test data.

4.1.1 Photograph Test Configuration

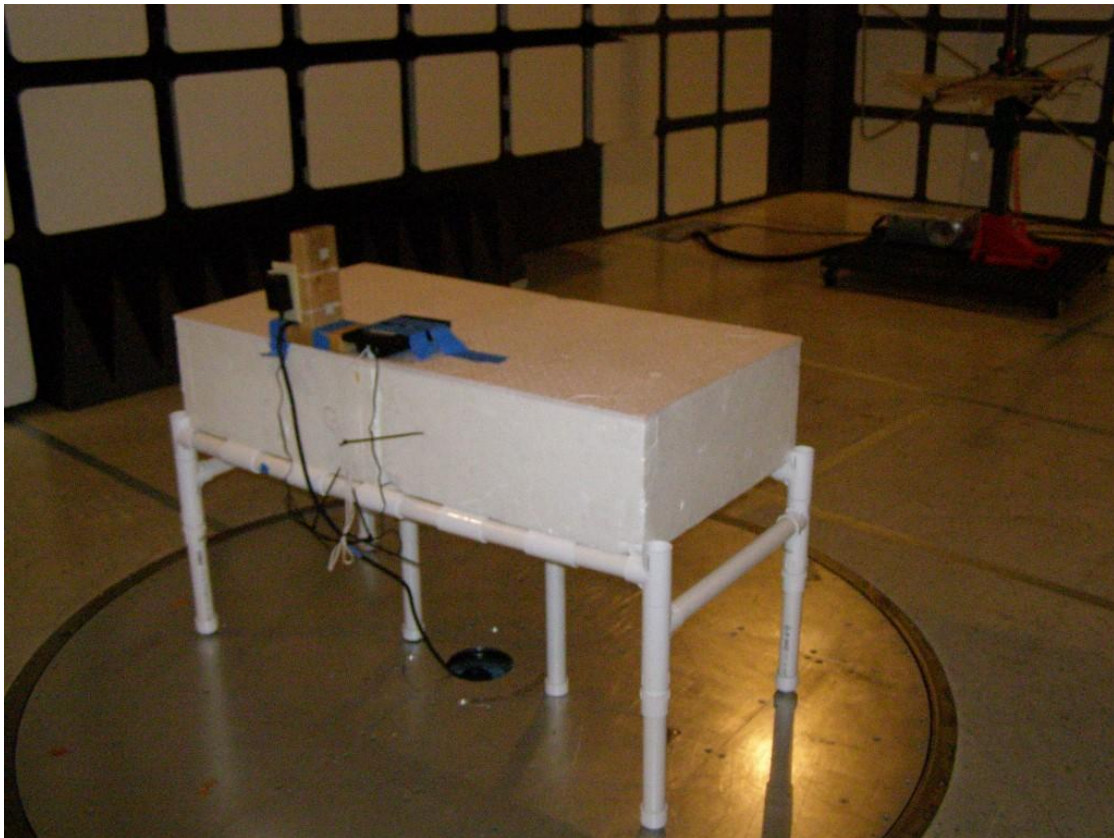

4.1.2 Cable Construction and Termination

Cable 1

This is a 2-meter, unshielded cable. It is connecting the EUT to the Power Supply. It is hardwired at the Power Supply end and hardwired into the EUT end of the cable. The cable was bundled to a length of 1 meter.

Cable 2

This is a 2-meter, unshielded cable. It is connected to the EUT and left not terminated. It is hardwired at the EUT end. The cable was bundled to a length of 40 centimeters.



5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT**5.1 EUT and Accessory List**

#	EQUIPMENT TYPE	MANU-FACTURER	MODEL	SERIAL NUMBER
1	GARAGE DOOR OPENER(EUT)	NORTEK	GD00Z-4	NONE
2	POWER SUPPLY	HDP	HK-AJ-120A200-US	NONE



5.2 EMI Test Equipment

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DUE DATE
Computer	Compatible Electronics	NONE	NONE	N/A	N/A
EMI Receiver	Rohde & Schwarz	ESIB40	100219	09/05/2014	09/05/2015
Antenna, Loop	Com Power	AL-130	121049	12/06/2013	12/06/2015
Antenna, CombiLog	Com Power	AC-220	25857	05/21/2014	05/21/2015
Antenna, Horn 1- 18GHz	Com Power	AH-118	071250	07/01/2014	07/01/2016
Pre-Amp, 1-18GHz	Com Power	PAM-118	443013	04/08/2014	04/08/2015
Pre-Amp, 1-18GHz	Com Power	PAM-118	443011	04/24/2014	04/24/2015
High Pass Filter	AMTI Microwave Circuits	N03019-01	3709-01 DC0415	01/06/2015	01/06/2016
Mast, Antenna Positioner	Sunol Science Corporation	TWR 95-4	020808-3	N/A	N/A
Antenna Mast	Sunol Science Corporation	TWR 95-4	020808-3	N/A	N/A
Turntable	Sunol Science Corporation	FM 2001	N/A	N/A	N/A
Mast and Turntable Controller	Sunol Science Corporation	SC104V	020808-1	N/A	N/A
LISN	Com-Power	LI-150	191935	3/17/2014	3/17/2015



6. TEST SITE DESCRIPTION**6.1 Test Facility Description**

Please refer to section 2.1 and the figures in Appendix D of this report for test location.

6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 1.0 by 1.5 by 0.8 meter high non-conductive table, which was placed on the ground plane.

The EUT was not grounded.

6.3 Facility Environmental Characteristics

When applicable refer to the data sheets in Appendix E for the relative humidity, air temperature, and barometric pressure.



7. CHARACTERISTICS OF THE TRANSMITTER

7.1 Channel Number and Frequencies

There 2 operating channels and the EUT has GFSK modulation

1 == 908.4 MHz

2 == 916.0 MHz

7.2 Antenna

The antenna is made up of a wire antenna soldered onto the PCB.



8. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

8.1 RF Emissions

8.1.1 Conducted Emissions Test


The EMI receiver was used as a measuring meter. A quasi-peak and/or average reading was taken only where indicated in the data sheets. The LISN output was measured using the EMI receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding, and grounding of the EUT. The EUT received its power through the LISN, which was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI 63.4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by the computer software. The final qualification data is located in Appendix E.

Test Results:

The EUT complies with the limits of CFR Title 47 Part 15 Subpart B section 15.107, & Subpart C section 15.207. The six highest emissions are listed in table 1.

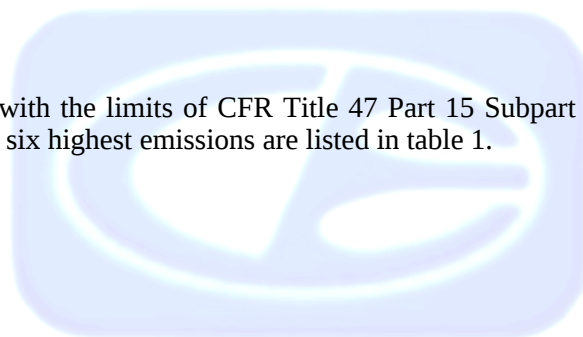

8.1.2 Radiated Emissions (Spurious and Harmonics) Test

The EMI receiver was used as a measuring meter. The receiver was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the receiver records the highest measured reading over all the sweeps. Amplifiers were used to increase the sensitivity of the instrument. There was one Microwave Preamplifier used for frequencies above 1 GHz.

For spurious emissions the quasi-peak detector was used for frequencies below 1GHz and the average detector was used for frequencies above 1 GHz.

For the Harmonic emissions a linear average detector was used.

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE (MHz)	TRANSDUCER	EFFECTIVE MEASUREMENT BANDWIDTH
.009 to .150	Active Loop Antenna	200 Hz
.150 to 30	Active Loop Antenna	9 kHz
30 to 1000	Combilog Antenna	100 kHz
1000 to 10000	Horn Antenna	1 MHz

The TDK FAC-3 shielded test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is in full compliance with ANSI C63.4 & ANSI C63.10. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters in both vertical and horizontal polarizations (for E field radiated field strength).

Test Results:

The EUT complies with the limits of CFR Title 47 Part 15 Subpart B section 15.109, & Part 15 Subpart C sections 15.205, 15.209 and 15.249. The six highest emissions are listed in table 2.



8.1.3 Fundamental Field Strength

The Peak Transmit Radiated Field Strength was measured at a 3-meter test distance. The EMI Receiver was used to obtain the final test data. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15 Subpart C, Section 15.249.

8.1.4 Emissions Radiated Outside of the Fundamental Frequency Band

The Band Edge measurement was measured using the EMI Receiver at a 3-meter test distance to obtain the final test data. The lower and upper channels were tuned during the low and high band edge tests. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15 Subpart C, Section 15.205 & 15.249.



9. TEST PROCEDURE DEVIATIONS

The test procedures were not deviated from throughout all tests.

10. CONCLUSIONS

The Garage Door Opener Remote Command Transceiver Model: GD00Z-4 meets all of the relevant specification requirements defined in the Code of Federal Regulations Title 47, Part 15 Subpart B section 15.107, 15.109, & Subpart C sections 15.205, 15.207, 15.209 and 15.249.



APPENDIX A***LABORATORY ACCREDITATIONS AND
RECOGNITIONS***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

LABORATORY ACCREDITATIONS AND RECOGNITIONS



NVLAP LAB CODES 200063-0,
200528-0, 200527-0

For US, Canada, Australia/New Zealand, Taiwan and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025 an ISO 9002 equivalent. Please follow the link to the NIST site for each of our facilities NVLAP certificate and scope of accreditation.

NVLAP listing links

Agoura Division - <http://ts.nist.gov/Standards/scopes/2000630.htm>

Brea Division - <http://ts.nist.gov/Standards/scopes/2005280.htm>

Silverado/Lake Forest Division - <http://ts.nist.gov/Standards/scopes/2005270.htm>



ANSI listing

[CETCB](http://www.ansica.org/wwwversion2/outside/ALLdirectoryDetails.asp?menuID=1&prgID=3&orgID=123&status=4)

<https://www.ansica.org/wwwversion2/outside/ALLdirectoryDetails.asp?menuID=1&prgID=3&orgID=123&status=4>



Compatible Electronics has been nominated as a Conformity Assessment Body (CAB) for EMC under the US/EU Mutual Recognition Agreement (MRA).



Compatible Electronics has been nominated as a Conformity Assessment Body (CAB) for Taiwan/BSMI under the US/APEC (Asia-Pacific Economic Cooperation) Mutual Recognition Agreement (MRA).

We are also certified/listed for IT products by the following country/agency:



VCCI Listing, from VCCI site

[Enter "Compatible" in search form](http://www.vcci.or.jp/vcci_e/activity/registration/setsubi.html) http://www.vcci.or.jp/vcci_e/activity/registration/setsubi.html



FCC Listing, from FCC OET site

[FCC test lab search](https://fjallfoss.fcc.gov/oetcf/eas/reports/TestFirmSearch.cfm) <https://fjallfoss.fcc.gov/oetcf/eas/reports/TestFirmSearch.cfm>



Compatible Electronics IC listing can be found at:

<http://www.ic.gc.ca/eic/site/ic1.nsf/eng/home>



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

APPENDIX B

MODIFICATIONS TO THE EUT



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

MODIFICATIONS TO THE EUT

The modifications listed below were made to the EUT to pass FCC 15.249 specifications. All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

1. 908.40 MHz Channel Power was set to 0X0E.
2. 916.00 MHz Channel Power was set to 0X16.



APPENDIX C***ADDITIONAL MODELS COVERED
UNDER THIS REPORT***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

ADDITIONAL MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

GARAGE DOOR OPENER

Model: GD00Z-4

S/N: None

No additional models were tested.



APPENDIX D

DIAGRAMS, CHARTS, AND PHOTOS



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

FIGURE 1: PLOT MAP AND LAYOUT OF TEST SITE BELOW 1GHZ

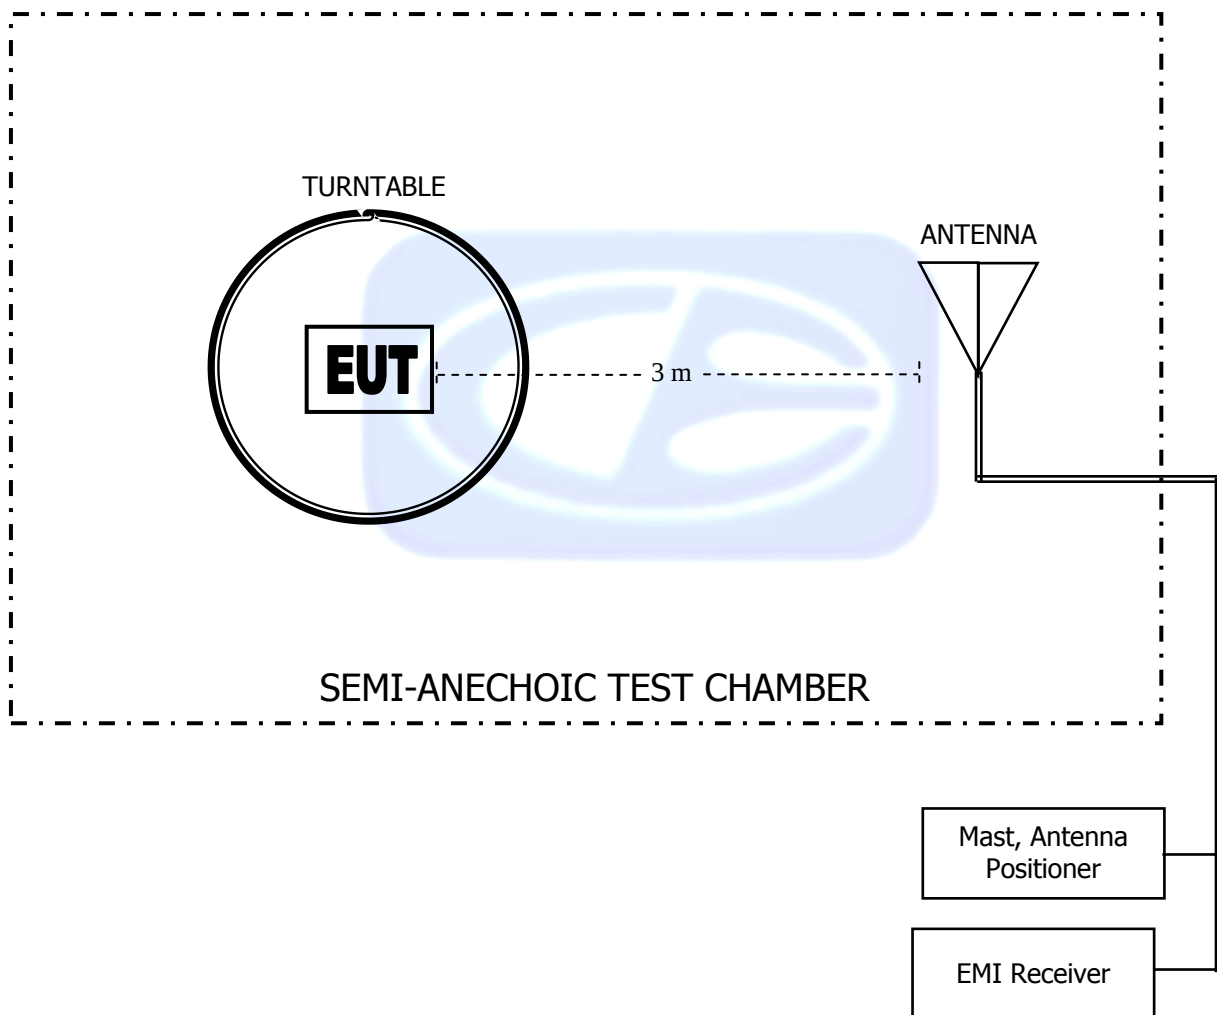


FIGURE 2: PLOT MAP AND LAYOUT OF TEST SITE ABOVE 1GHZ


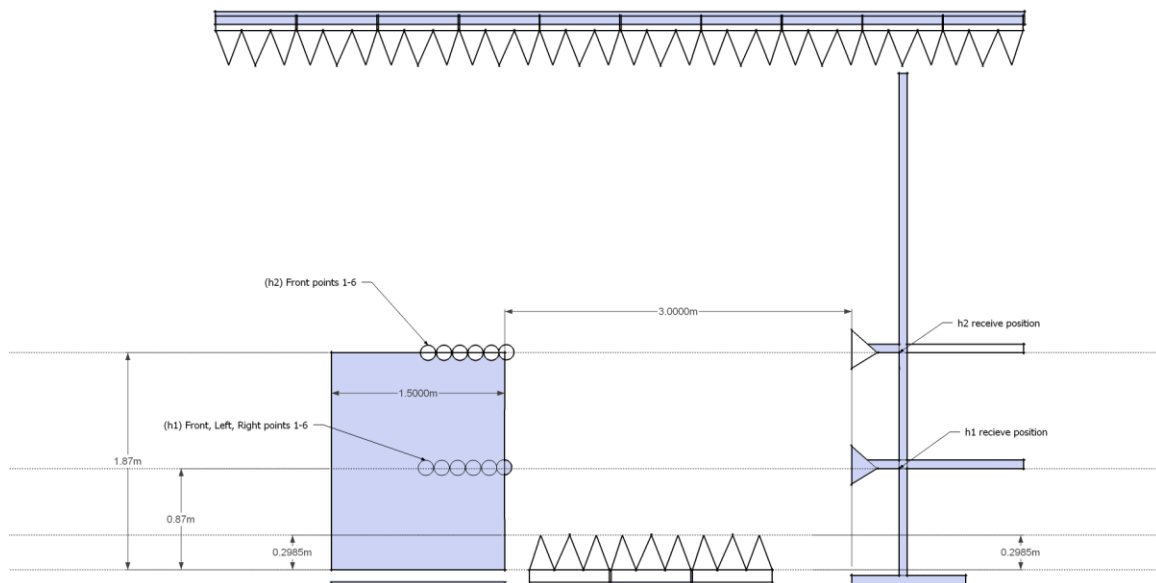


FIGURE 3: CONDUCTED EMISSIONS TEST SETUP

COM-POWER AL-130**LOOP ANTENNA****S/N: 121049****CALIBRATION DUE: DECEMBER 6, 2015**

FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)	FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)
0.009	-34.64	16.86	0.8	-36.32	15.18
0.01	-34.78	16.72	0.9	-36.22	15.28
0.02	-35.91	15.59	1.0	-36.22	15.28
0.03	-35.48	16.02	2.0	-35.91	15.59
0.04	-35.82	15.68	3.0	-35.91	15.59
0.05	-36.49	15.01	4.0	-36.01	15.49
0.06	-36.30	15.20	5.0	-35.80	15.70
0.07	-36.43	15.07	6.0	-36.00	15.50
0.08	-36.30	15.20	7.0	-35.90	15.60
0.09	-36.39	15.11	8.0	-35.70	15.80
0.1	-36.41	15.09	9.0	-35.70	15.80
0.2	-36.61	14.89	10.0	-35.60	15.90
0.3	-36.63	14.87	15.0	-36.52	14.98
0.4	-36.52	14.99	20.0	-35.75	15.75
0.5	-36.63	14.87	25.0	-37.78	13.72
0.6	-36.62	14.88	30.0	-38.62	12.88
0.7	-36.53	14.97			

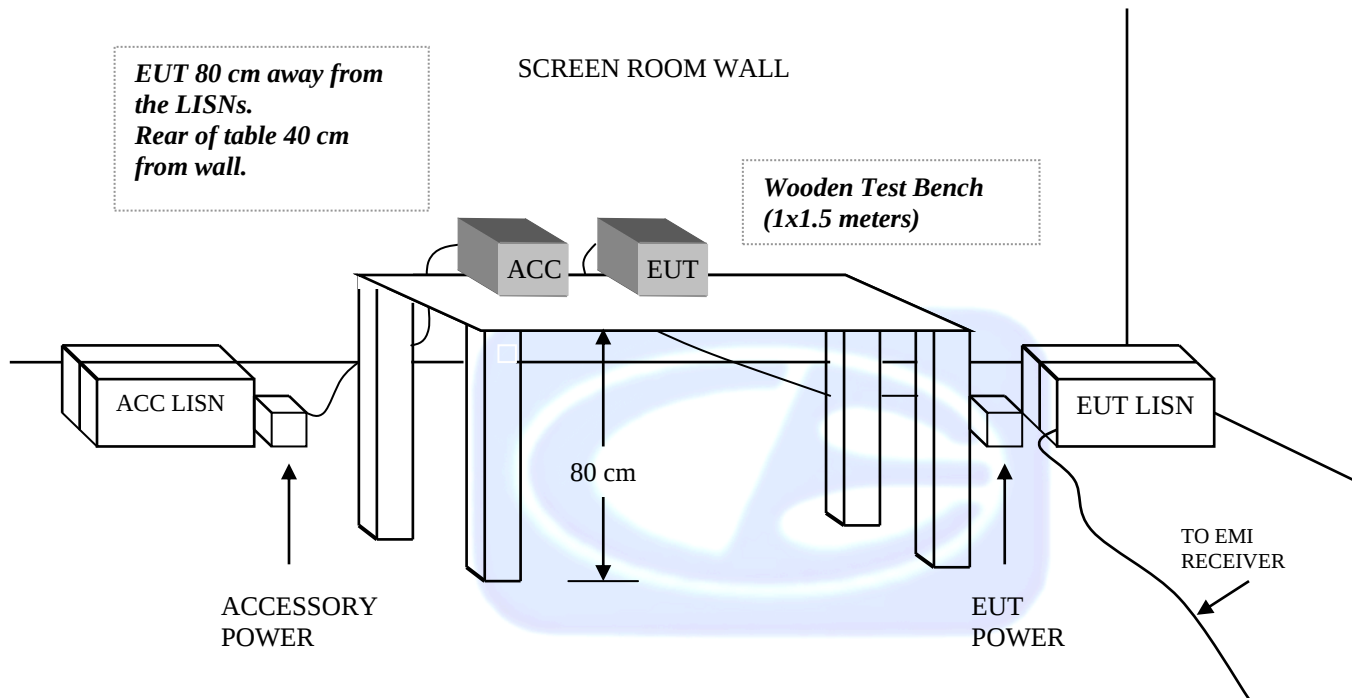

COM-POWER AC-220**LAB R - COMBILOG ANTENNA****S/N: 25857****CALIBRATION DUE: MAY 21, 2015**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	22.5	160	13.3
35	22.5	180	15.0
40	23.0	200	14.6
45	21.5	250	16.5
50	21.3	300	18.1
60	18.2	400	19.4
70	13.2	500	21.4
80	11.6	600	21.6
90	11.9	700	23.7
100	12.6	800	26.0
120	15.1	900	26.6
140	13.6	1000	28.5



COM-POWER AH-118**HORN ANTENNA****S/N: 071250****CALIBRATION DUE: JULY 1, 2016**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
1000	30.1	9500	44.2
1500	29.2	10000	43.4
2000	31.6	10500	44.6
2500	35.5	11000	45.1
3000	33.7	11500	45.7
3500	36.0	12000	46.2
4000	35.4	12500	45.4
4500	35.5	13000	44.8
5000	40.1	13500	46.7
5500	37.8	14000	47.8
6000	39.0	14500	46.4
6500	39.9	15000	47.2
7000	40.4	15500	45.5
7500	44.4	16000	45.0
8000	44.1	16500	44.5
8500	43.1	17000	47.0
9000	43.0	17500	47.8
		18000	44.2



COM-POWER PAM-118**1-18GHz - PREAMPLIFIER****S/N: 443013****CALIBRATION DUE: APRIL 8, 2015**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
500	26.32	5500	25.55
1000	24.72	6000	25.54
1100	25.89	6500	24.57
1200	25.41	7000	23.51
1300	26.28	7500	23.59
1400	25.94	8000	23.32
1500	25.59	8500	22.76
1600	26.95	9000	23.15
1700	25.52	9500	24.41
1800	25.75	10000	25.71
1900	26.00	11000	26.07
2000	25.38	12000	26.17
2500	26.06	13000	24.72
3000	26.24	14000	23.19
3500	25.82	15000	25.42
4000	26.04	16000	25.07
4500	25.96	17000	24.24
5000	26.02	18000	24.92



COM-POWER PAM-118**1-18GHz - PREAMPLIFIER****S/N: 443011****CALIBRATION DUE: April 24, 2015**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
0.500	27.2	7.000	23.8
1.000	26.6	7.500	23.9
1.500	27.0	8.000	24.4
2.000	27.0	8.500	25.2
2.500	27.4	9.500	26.2
3.000	27.6	10.000	25.8
3.500	27.5	11.000	25.5
4.000	27.3	12.000	25.4
4.500	27.3	13.000	25.1
5.000	27.5	14.000	24.6
5.500	26.3	15.000	24.1
6.000	26.1	16.000	25.1
6.500	25.4	17.000	25.2
		18.000	24.4





FRONT VIEW

NORTEK
GARAGE DOOR OPENER

Model: GD00Z-4

FCC SUBPART B & C - RADIATED EMISSIONS < 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**




Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

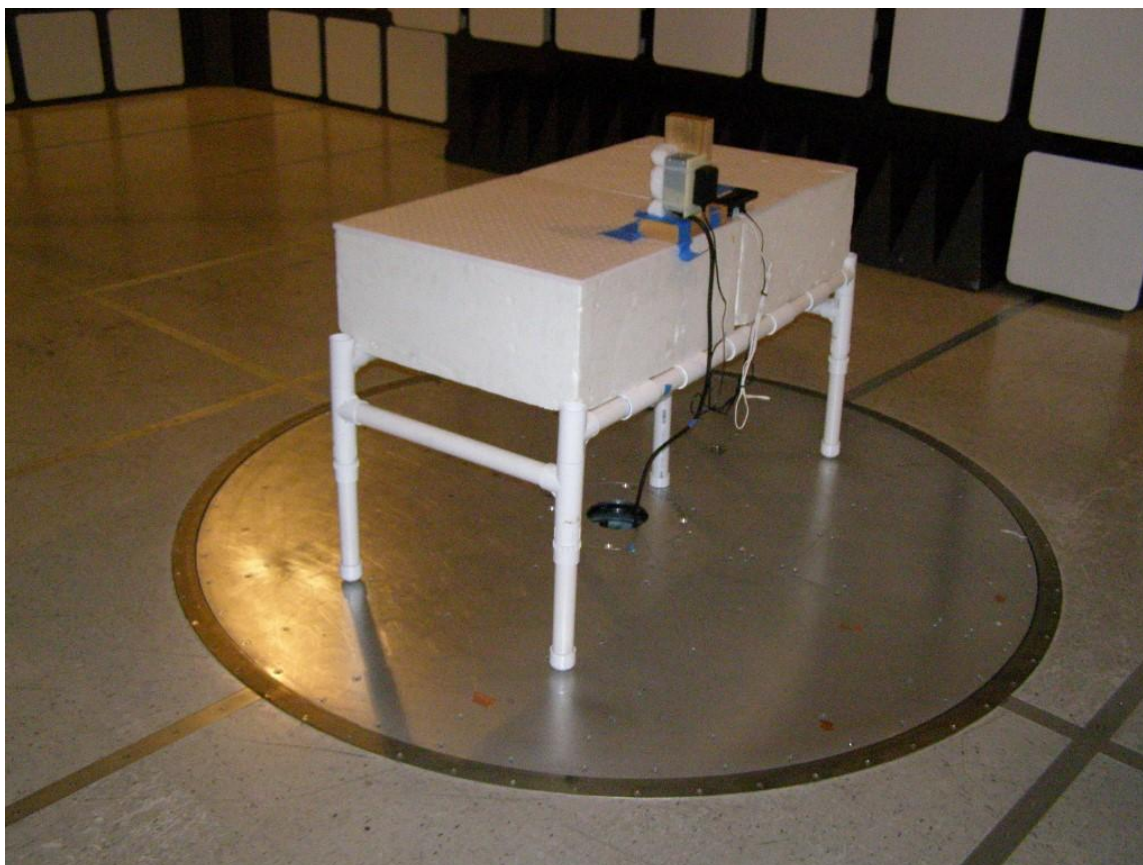

REAR VIEW

NORTEK
GARAGE DOOR OPENER
Model: GD00Z-4

FCC SUBPART B & C - RADIATED EMISSIONS < 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**





FRONT VIEW

NORTEK
GARAGE DOOR OPENER
Model: GD00Z-4

FCC SUBPART B & C - RADIATED EMISSIONS > 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**




Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

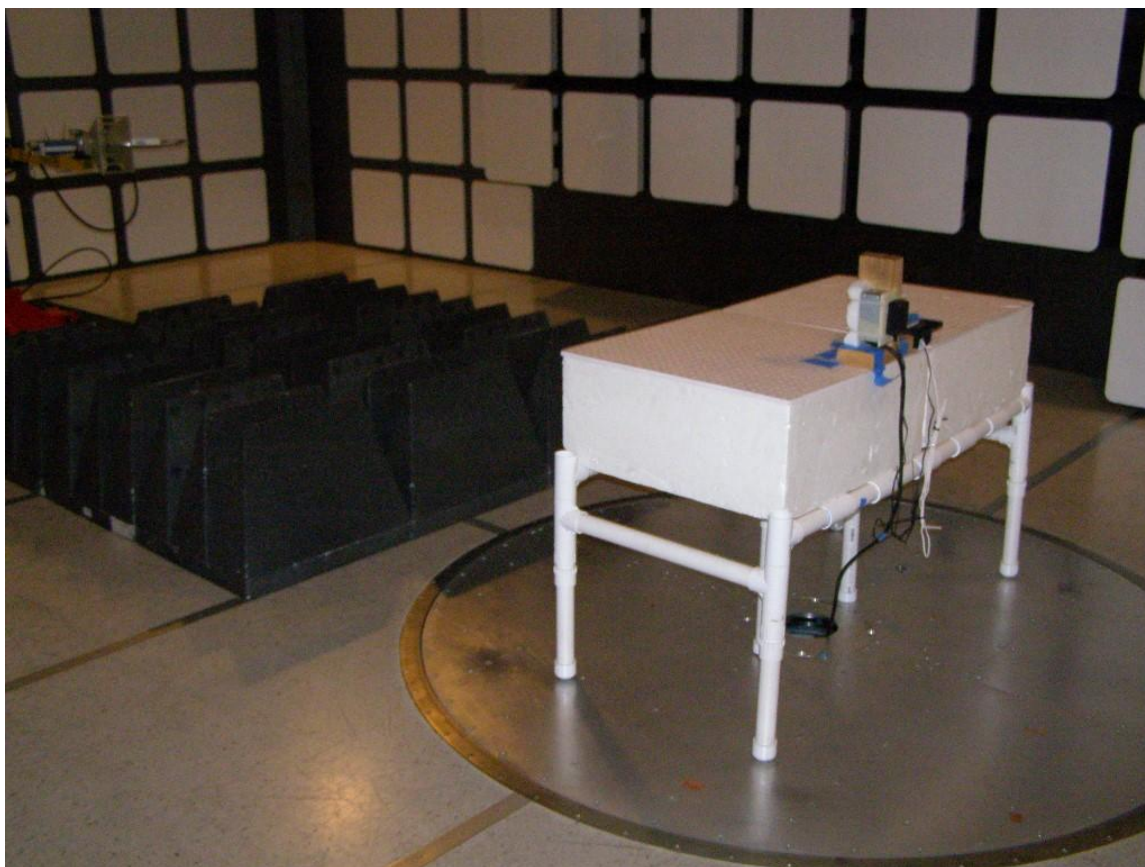

REAR VIEW

NORTEK

GARAGE DOOR OPENER

Model: GD00Z-4

FCC SUBPART B & C - RADIATED EMISSIONS > 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**





FRONT VIEW

NORTEK
GARAGE DOOR OPENER
Model: GD00Z-4

FCC SUBPART B & C - CONDUCTED EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



REAR VIEW

NORTEK
GARAGE DOOR OPENER
Model: GD00Z-4
FCC SUBPART B & C - CONDUCTED EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



APPENDIX E***RADIATED EMISSIONS DATA SHEETS***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700


Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.209
File: Radiated Pre-Scan 30-1000Mhz_916.0.set
Operator: Matt Harrison
EUT Type: GD00Z-4.
EUT Condition: Transmitting 916.0 MHz.
Comments: Connected to PSU
Temp: 68f
Hum: 43%
120V 60Hz

2/19/2015 2:50:50 PM
Sequence: Preliminary Scan

Compatible Electronics, Inc. FAC-3 (Lab R)

Electric Field Strength (dBuV/m)

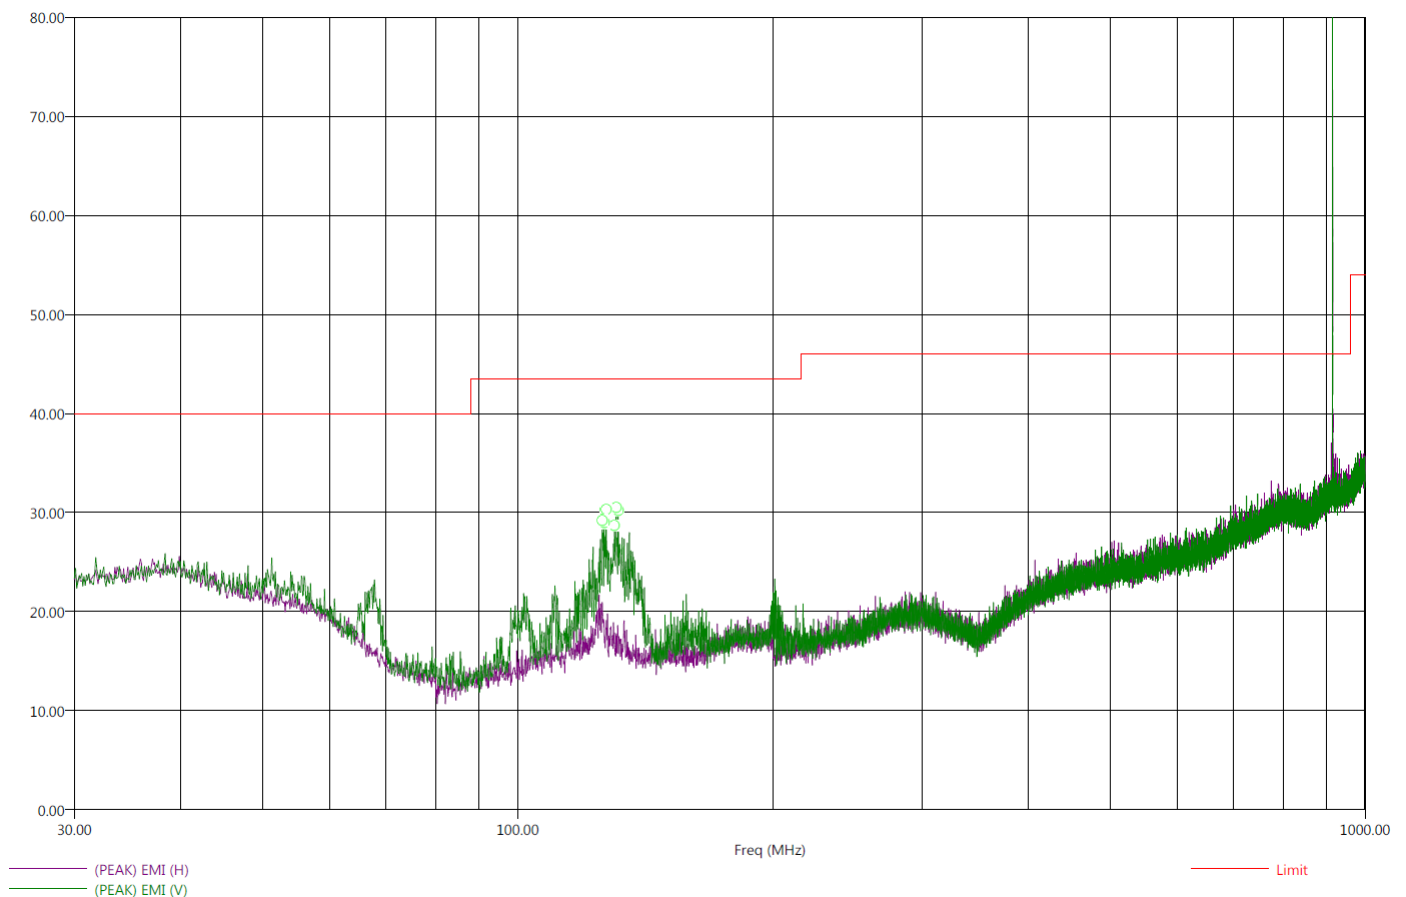

***There were no radiated emissions other than harmonics found below 30 MHz or above 1000MHz
This is worst case channel.***



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400


Title: FCC 15.209
File: Radiated Final 30-1000Mhz_916.0.set
Operator: Matt Harrison
EUT Type: GD00Z-4.
EUT Condition: Transmitting 916.0 MHz.
Comments: Connected to PSU
Temp: 68f
Hum: 43%
120V 60Hz

2/19/2015 3:12:15 PM
Sequence: Final Measurements

Compatible Electronics, Inc. FAC-3 (Lab R)


Freq (MHz)	(QP) Margin (dB)	(QP) EMI (dB μ V/m)	(PEAK) EMI (dB μ V/m)	Limit (dB μ V/m)	Pol	Ttbl Agl (deg)	Twr Ht (cm)	Transducer (dB)	Cable(dB)
125.90	-18.98	24.54	31.09	43.52	V	115.25	118.92	15.11	0.89
126.50	-18.80	24.72	31.43	43.52	V	144.75	130.14	15.03	0.89
127.20	-23.68	19.84	26.32	43.52	V	0.00	119.40	14.95	0.88
130.20	-19.34	24.18	30.79	43.52	V	192.75	117.25	14.63	0.86
130.70	-24.48	19.04	25.21	43.52	V	360.00	161.01	14.56	0.85
131.40	-17.57	25.95	32.23	43.52	V	185.25	108.00	14.49	0.85

*There were no radiated emissions other than harmonics found below 30 MHz or above 1000MHz
This is worst case channel.*

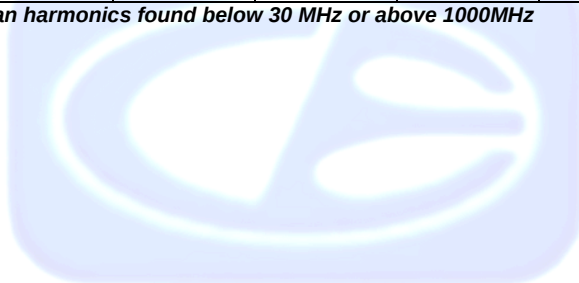

Title: FCC 15.109
File: Radiated Pre-Scan 30-1000Mhz_Rx.set
Operator: Matt Harrison
EUT Type: GD00Z-4.
EUT Condition: Constantly Receiving.
Comments: Connected to PSU
Temp: 68f
Hum: 43%
120V 60Hz

2/19/2015 12:00:13 PM
Sequence: Preliminary Scan

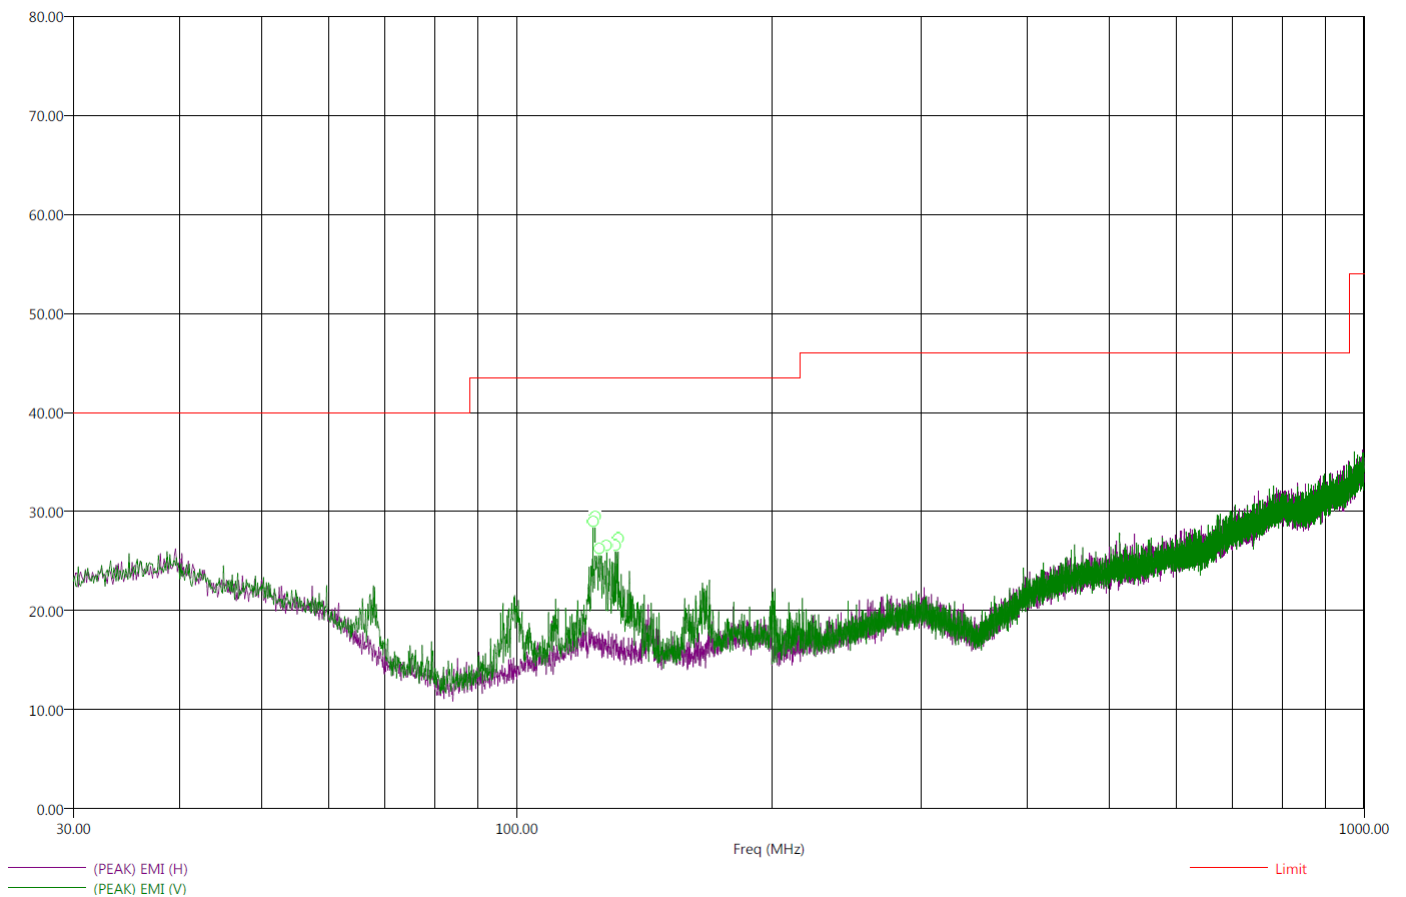Compatible Electronics, Inc. FAC-3 (Lab R)Electric Field Strength (dB μ V/m)

There were no radiated emissions other than harmonics found below 30 MHz or above 1000MHz



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400


Title: FCC 15.109
File: Radiated Final 30-1000Mhz_Rx.set
Operator: Matt Harrison
EUT Type: GD00Z-4.
EUT Condition: Constantly Receiving.
Comments: Connected to PSU
Temp: 68f
Hum: 43%
120V 60Hz

2/19/2015 1:16:47 PM
Sequence: Final Measurements

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq (MHz)	(QP) Margin (dB)	(QP) EMI (dBμV/m)	(PEAK) EMI (dBμV/m)	Limit (dBμV/m)	Pol	Ttbl Agl (deg)	Twr Ht (cm)	Transducer (dB)	Cable(dB)
123.10	-20.98	22.54	29.97	43.52	V	160.00	125.55	15.16	0.88
123.80	-20.39	23.13	30.49	43.52	V	145.25	120.77	15.18	0.89
125.20	-20.96	22.56	28.31	43.52	V	155.75	110.80	15.18	0.90
127.80	-26.27	17.25	23.80	43.52	V	-0.25	106.68	14.90	0.88
130.80	-21.20	22.32	28.73	43.52	V	179.75	102.02	14.55	0.85
131.80	-22.08	21.44	28.65	43.52	V	200.00	110.32	14.46	0.84

There were no radiated emissions other than harmonics found below 30 MHz or above 1000MHz

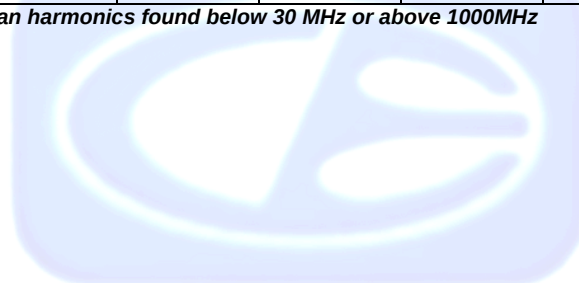

***CONDUCTED EMISSIONS
DATA SHEETS***



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500


Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.207
File: Conducted Pre-Line.set
Operator: Matt Harrison
EUT Type: GD00Z-4.
EUT Condition: Transmitting @ 916.00MHz
Comments: Connected to PSU.
Temp: 70f
Hum: 38%
120V 60Hz

2/20/2015 9:25:39 AM
Sequence: Preliminary Scan

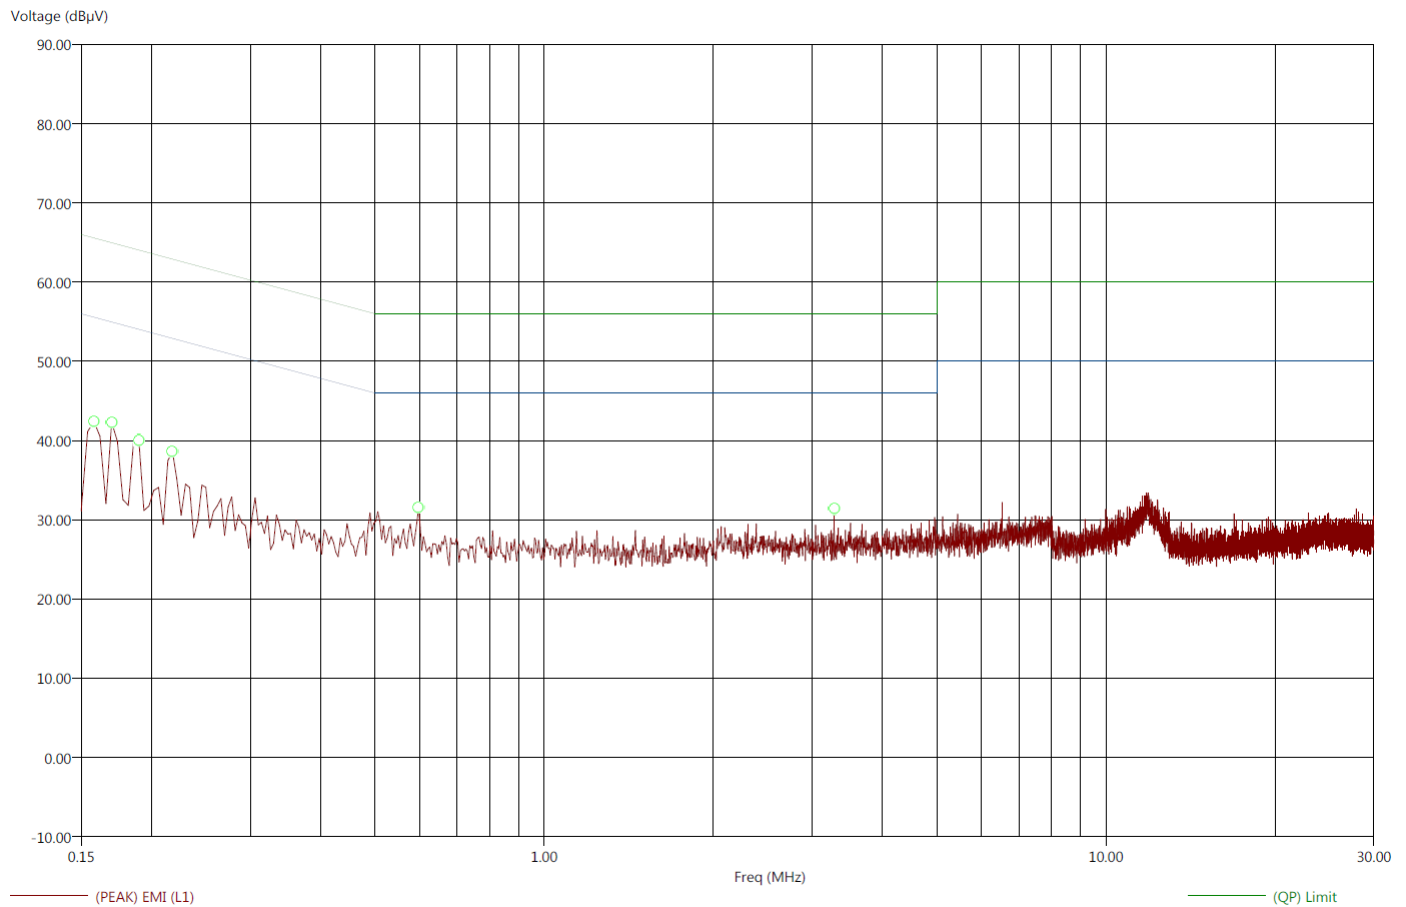Compatible Electronics, Inc. FAC-3 (LAB R)

This is worst case channel.



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.207
File: Conducted Final-Line.set
Operator: Matt Harrison
EUT Type: GD00Z-4.
EUT Condition: Transmitting @ 916.00MHz
Comments: Connected to PSU.
Temp: 70f
Hum: 38%
120V 60Hz

2/20/2015 9:35:32 AM
Sequence: Final Measurements

Compatible Electronics, Inc. FAC-3 (LAB R)


Freq (MHz)	(AVG) Margin AVL (dB)	(QP) Margin QPL (dB)	(AVG) EMI (dB V)	(QP) EMI (dB V)	(PEAK) EMI (dB V)	(AVG) Limit (dB V)	(QP) Limit (dB V)	Transducer (dB)	Cable (dB)
0.16	-33.97	-27.10	21.60	38.47	45.83	55.57	65.57	0.59	0.20
0.17	-31.72	-26.89	23.24	38.07	44.88	54.96	64.96	0.56	0.23
0.19	-32.43	-28.28	21.60	35.76	41.76	54.04	64.04	0.51	0.28
0.22	-34.25	-30.44	18.64	32.46	39.64	52.89	62.89	0.45	0.27
0.60	-24.43	-28.22	21.57	27.78	30.80	46.00	56.00	0.24	0.00
3.28	-40.47	-44.44	5.53	11.56	16.48	46.00	56.00	0.23	0.25

This is worst case channel.



Title: FCC 15.207
File: Conducted Pre-Neutral.set
Operator: Matt Harrison
EUT Type: GD00Z-4.
EUT Condition: Transmitting @ 916.00MHz
Comments: Connected to PSU.
Temp: 70f
Hum: 38%
120V 60Hz

2/20/2015 9:42:16 AM
Sequence: Preliminary Scan

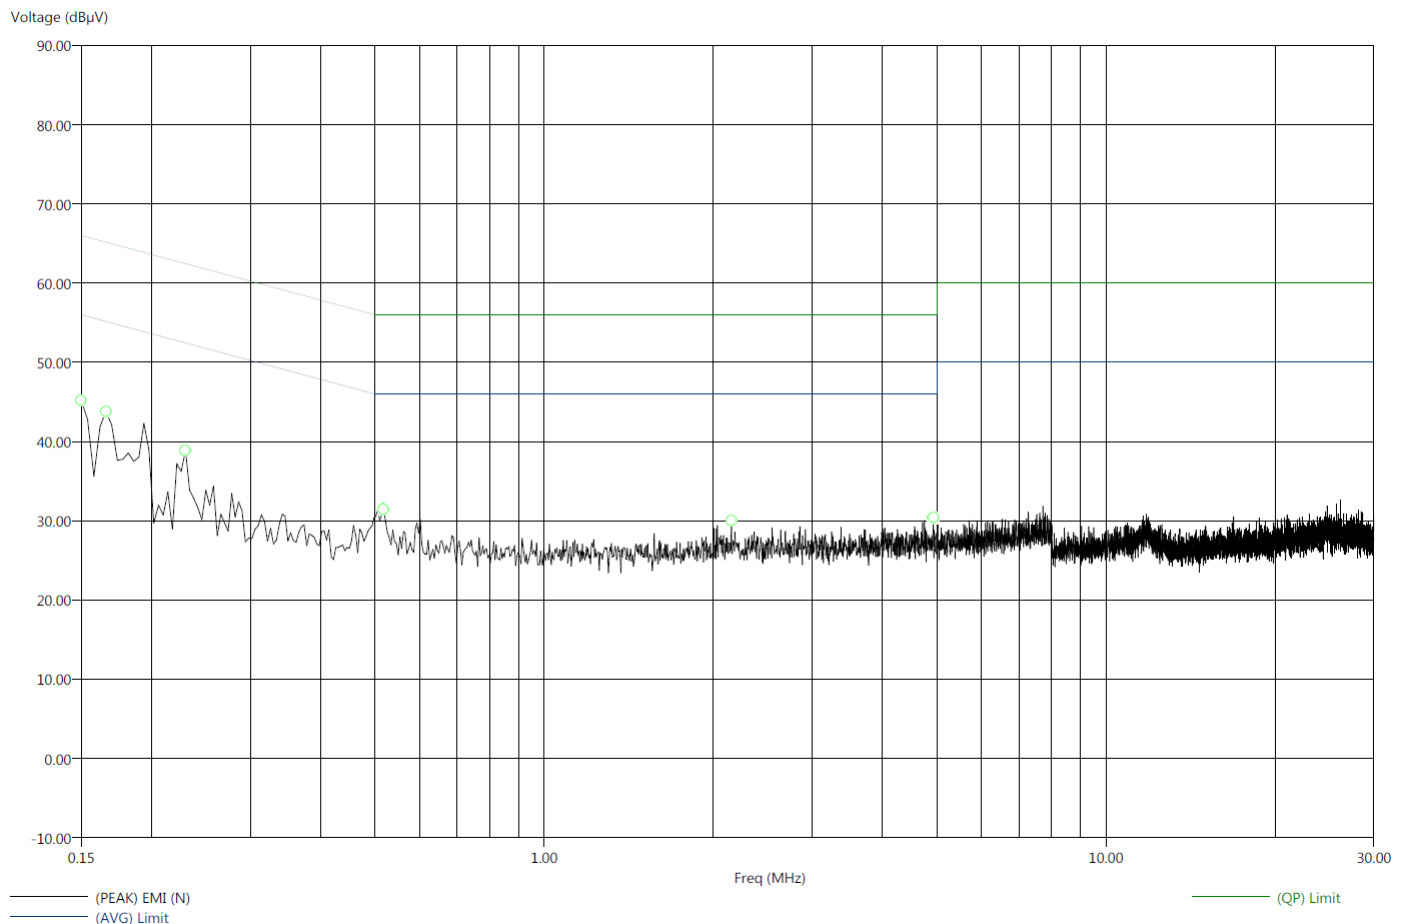Compatible Electronics, Inc. FAC-3 (LAB R)

This is worst case channel.



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.207
File: Conducted Final-Neutral.set
Operator: Matt Harrison
EUT Type: GD00Z-4.
EUT Condition: Transmitting @ 916.00MHz
Comments: Connected to PSU.
Temp: 70f
Hum: 38%
120V 60Hz

2/20/2015 9:45:06 AM
Sequence: Final Measurements

Compatible Electronics, Inc. FAC-3 (LAB R)


Freq (MHz)	(AVG) Margin AVL (dB)	(QP) Margin QPL (dB)	(AVG) EMI (dB V)	(QP) EMI (dB V)	(PEAK) EMI (dB V)	(AVG) Limit (dB V)	(QP) Limit (dB V)	Transducer (dB)	Cable (dB)
0.15	-36.69	-28.40	19.31	37.60	43.36	56.00	66.00	0.40	0.18
0.17	-35.57	-28.51	19.58	36.65	41.87	55.16	65.16	0.36	0.22
0.23	-34.88	-32.26	17.57	30.19	37.81	52.45	62.45	0.21	0.25
0.52	-28.84	-31.54	17.16	24.46	28.34	46.00	56.00	0.03	0.00
2.15	-40.97	-46.14	5.03	9.86	16.32	46.00	56.00	0.03	0.29
4.93	-36.74	-38.48	9.26	17.52	24.76	46.00	56.00	0.01	0.20

This is worst case channel.



Title: FCC 15.107
File: Conducted Pre-Line_RX.set
Operator: Matt Harrison
EUT Type: GD00Z-4.
EUT Condition: Constantly Receiving.
Comments: Connected to PSU.
Temp: 70f
Hum: 38%
120V 60Hz

2/20/2015 9:54:00 AM
Sequence: Preliminary Scan

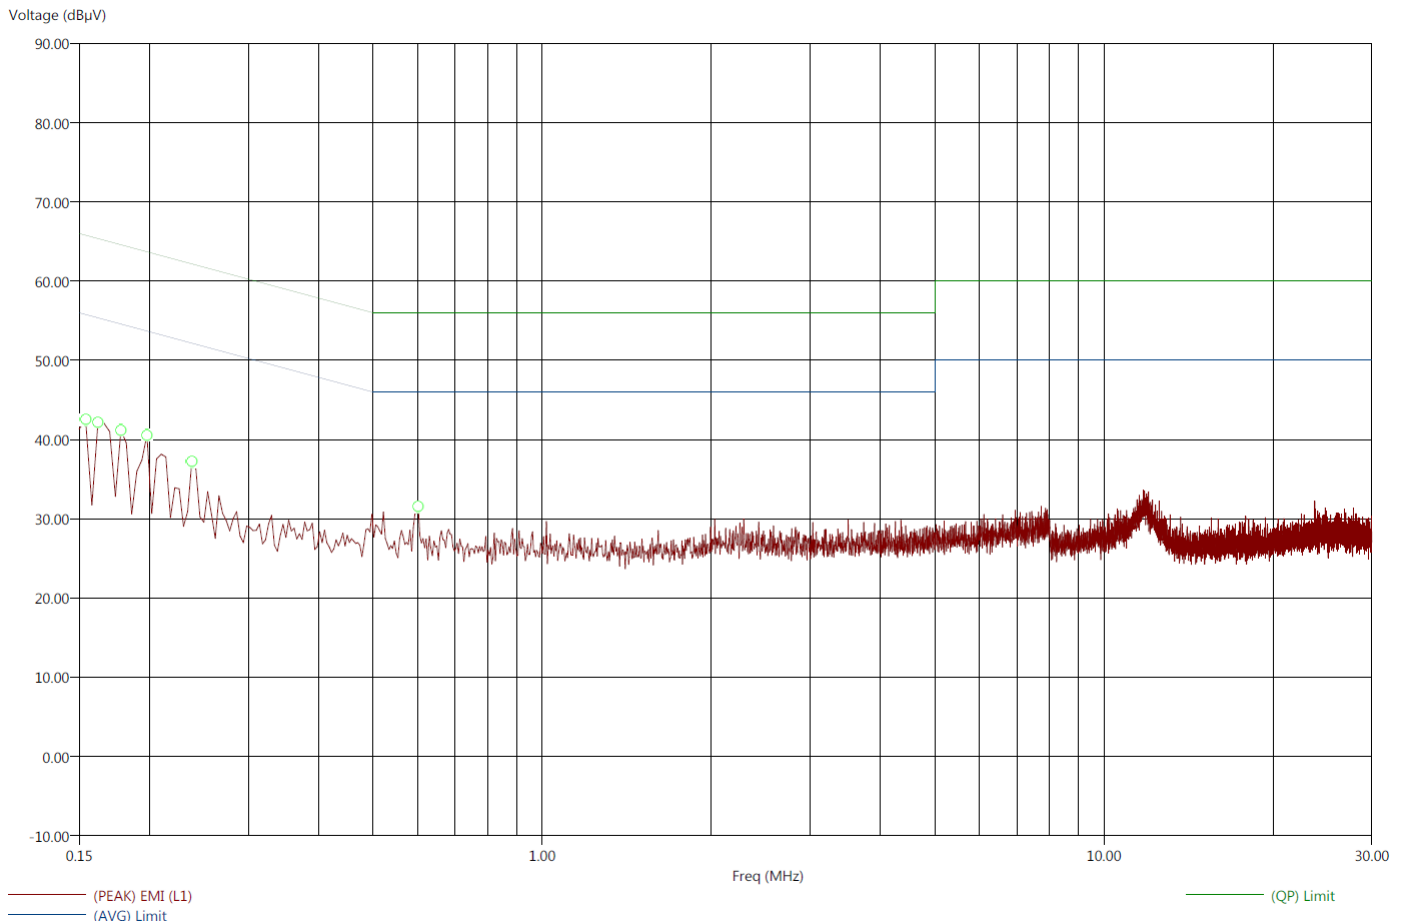Compatible Electronics, Inc. FAC-3 (LAB R)

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.107
File: Conducted Final-Line_Rx.set
Operator: Matt Harrison
EUT Type: GD00Z-4.
EUT Condition: Constantly Receiving
Comments: Connected to PSU.
Temp: 70f
Hum: 38%
120V 60Hz

2/20/2015 9:57:14 AM
Sequence: Final Measurements


Compatible Electronics, Inc. FAC-3 (LAB R)

Freq (MHz)	(AVG) Margin AVL (dB)	(QP) Margin QPL (dB)	(AVG) EMI (dB V)	(QP) EMI (dB V)	(PEAK) EMI (dB V)	(AVG) Limit (dB V)	(QP) Limit (dB V)	Transducer (dB)	Cable (dB)
0.15	-33.39	-26.67	22.40	39.11	45.31	55.78	65.78	0.61	0.19
0.16	-33.15	-26.62	22.21	38.74	45.20	55.36	65.36	0.58	0.21
0.18	-33.22	-28.32	21.36	36.25	43.78	54.58	64.58	0.54	0.25
0.20	-33.70	-29.19	20.00	34.51	41.34	53.69	63.69	0.49	0.30
0.24	-34.30	-31.93	17.87	30.23	37.15	52.17	62.17	0.41	0.24
0.60	-29.20	-31.67	16.80	24.33	28.05	46.00	56.00	0.24	0.00



Title: FCC 15.107
File: Conducted Pre-Neutral_Rx.set
Operator: Matt Harrison
EUT Type: GD00Z-4.
EUT Condition: Constantly Receiving
Comments: Connected to PSU.
Temp: 70f
Hum: 38%
120V 60Hz

2/20/2015 10:02:47 AM
Sequence: Preliminary Scan

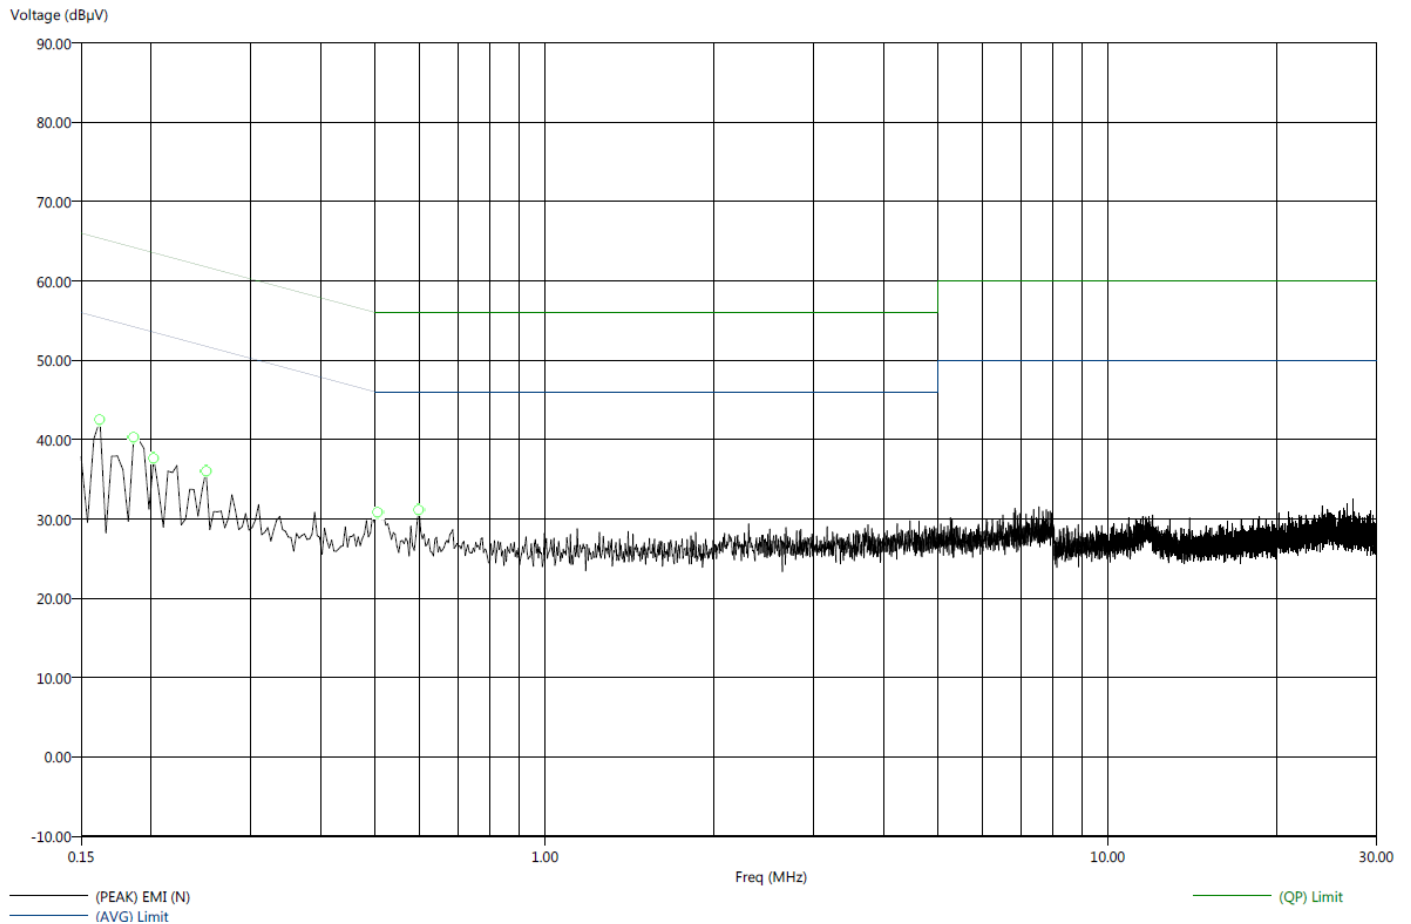Compatible Electronics, Inc. FAC-3 (LAB R)

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.107
File: Conducted Final-Neutral_Rx.set
Operator: Matt Harrison
EUT Type: GD00Z-4.
EUT Condition: Constantly Receiving
Comments: Connected to PSU.
Temp: 70f
Hum: 38%
120V 60Hz

2/20/2015 10:05:14 AM
Sequence: Final Measurements

Compatible Electronics, Inc. FAC-3 (LAB R)

Freq (MHz)	(AVG) Margin AVL (dB)	(QP) Margin QPL (dB)	(AVG) EMI (dB V)	(QP) EMI (dB V)	(PEAK) EMI (dB V)	(AVG) Limit (dB V)	(QP) Limit (dB V)	Transducer (dB)	Cable (dB)
0.16	-36.01	-28.53	19.35	36.83	43.69	55.36	65.36	0.37	0.21
0.19	-35.27	-29.69	18.94	34.52	41.50	54.21	64.21	0.31	0.27
0.20	-35.77	-31.00	17.76	32.53	39.09	53.53	63.53	0.27	0.30
0.25	-34.49	-34.51	17.27	27.24	34.76	51.76	61.76	0.17	0.23
0.51	-26.17	-29.32	19.83	26.68	30.90	46.00	56.00	0.03	0.00
0.60	-25.25	-29.19	20.75	26.81	29.47	46.00	56.00	0.03	0.00



***FUNDAMENTAL & HARMONICS
DATA SHEETS***



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

FUNDAMENTAL FIELD STRENGTH

FCC 15.249Company: Nortek
EUT: GDO
Model: GD00Z-4Date: 2/19/2015
Lab: R
Tested By: Matt Harrison**Compatible Electronics, Inc. FAC-3**

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table	Tower	Comments
908.40	95.17	H	113.97	-18.80	Peak	105.00	1.62	Default PWR -10dB
908.40	92.56	H	93.97	-1.41	QP	105.00	1.62	Default PWR -10dB
908.40	93.41	V	113.97	-20.56	Peak	201.00	1.15	Default PWR -10dB
908.40	90.12	V	93.97	-3.85	QP	201.00	1.15	Default PWR -10dB
916.00	95.83	H	113.97	-18.14	Peak	1.65	110.00	Default PWR -6dB
916.00	92.50	H	93.97	-1.47	QP	1.65	110.00	Default PWR -6dB
916.00	92.60	V	113.97	-21.37	Peak	1.12	205.00	Default PWR -6dB
916.00	88.26	V	93.97	-5.71	QP	1.12	205.00	Default PWR -6dB

Test
distance
3 meter

HARMONIC EMISSIONS LOW CHANNEL HORIZONTAL

FCC 15.249

Company: Nortek
EUT: Garage Door Opener
Model: GD00Z-4

Date: 2/19/2015
Lab: R
Tested By: Matt Harrison

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
1816.80		H	73.98		Peak			No Emissions Found
1816.80		H	53.98		Avg			No Emissions Found
2725.20	58.82	H	73.98	-15.16	Peak	1.02	88.00	
2725.20	41.19	H	53.98	-12.79	Avg	1.02	88.00	
3633.60	43.98	H	53.98	-10.00	Peak	1.18	59.00	
4542.00		H	73.98		Peak			No Emissions Found
4542.00		H	53.98		Avg			No Emissions Found
5450.40		H	73.98		Peak			No Emissions Found
5450.40		H	53.98		Avg			No Emissions Found
6358.80		H	73.98		Peak			No Emissions Found
6358.80		H	53.98		Avg			No Emissions Found
7267.20		H	73.98		Peak			No Emissions Found
7267.20		H	53.98		Avg			No Emissions Found
8175.60	54.09	H	73.98	-19.89	Peak	1.07	73.00	
8175.60	40.69	H	53.98	-13.29	Avg	1.07	73.00	
9084.00		H	73.98		Peak			No Emissions Found
9084.00		H	53.98		Avg			No Emissions Found

Test distance
3 meter



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

HARMONIC EMISSIONS LOW CHANNEL VERTICAL

FCC 15.249

Company: Nortek
EUT: Garage Door Opener
Model: GD00Z-4

Date: 2/19/2015
Lab: R
Tested By: Matt Harrison

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
1816.8		V	73.98		Peak			
1816.8		V	53.98		Avg			
2725.2	54.67	V	73.98	-19.31	Peak	1.10	282	
2725.2	37.12	V	53.98	-16.86	Avg	1.10	282	
3633.6	48.86	V	53.98	-5.12	Peak	1.05	115	
4542.0		V	73.98		Peak			No Emissions Found
4542.0		V	53.98		Avg			No Emissions Found
5450.4		V	73.98		Peak			No Emissions Found
5450.4		V	53.98		Avg			No Emissions Found
6358.8		V	73.98		Peak			No Emissions Found
6358.8		V	53.98		Avg			No Emissions Found
7267.2		V	73.98		Peak			No Emissions Found
7267.2		V	53.98		Avg			No Emissions Found
8175.6	53.21	V	73.98	-20.77	Peak	1.53	129	
8175.6	40.69	V	53.98	-13.29	Avg	1.53	129	
9084.0		V	73.98		Peak			No Emissions Found
9084.0		V	53.98		Avg			No Emissions Found

Test
distance
3 meter



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

HARMONIC EMISSIONS HIGH CHANNEL HORIZONTAL

FCC 15.249

Company: Nortek
EUT: Garage Door Opener
Model: GD00Z-4

Date: 2/19/2015
Lab: R
Tested By: Matt Harrison

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
1832.00		H	73.98		Peak			No Emissions Found
1832.00		H	53.98		Avg			No Emissions Found
2748.00	58.11	H	73.98	-15.87	Peak	1.41	97	
2748.00	41.08	H	53.98	-12.90	Avg	1.41	97	
3664.00		H	73.98		Peak			No Emissions Found
3664.00		H	53.98		Avg			No Emissions Found
4580.00	49.55	H	53.98	-4.43	Peak	1.05	35	
5496.00		H	73.98		Peak			No Emissions Found
5496.00		H	53.98		Avg			No Emissions Found
6412.00		H	73.98		Peak			No Emissions Found
6412.00		H	53.98		Avg			No Emissions Found
7328.00		H	73.98		Peak			No Emissions Found
7328.00		H	53.98		Avg			No Emissions Found
8244.00	53.73	H	73.98	-20.25	Peak	1.07	74	
8244.00	41.02	H	53.98	-12.96	Avg	1.07	74	
9160.00		H	73.98		Peak			No Emissions Found
9160.00		H	53.98		Avg			No Emissions Found

Test
distance
3 meter



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

HARMONIC EMISSIONS HIGH CHANNEL VERTICAL

FCC 15.249

Company: Nortek
EUT: Garage Door Opener
Model: GD00Z-4

Date: 2/19/2015
Lab: R
Tested By: Matt Harrison

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
1832.00		V	73.98		Peak			No Emissions Found
1832.00		V	53.98		Avg			No Emissions Found
2748.00	54.20	V	73.98	-19.78	Peak	1.13	287	
2748.00	37.67	V	53.98	-16.31	Avg	1.13	287	
3664.00		V	73.98		Peak			No Emissions Found
3664.00		V	53.98		Avg			No Emissions Found
4580.00	47.65	V	53.98	-6.33	Peak	1.00	102	
5496.00		V	73.98		Peak			No Emissions Found
5496.00		V	53.98		Avg			No Emissions Found
6412.00		V	73.98		Peak			No Emissions Found
6412.00		V	53.98		Avg			No Emissions Found
7328.00		V	73.98		Peak			No Emissions Found
7328.00		V	53.98		Avg			No Emissions Found
8244.00	53.48	V	73.98	-20.50	Peak	1.34	0	
8244.00	41.01	V	53.98	-12.97	Avg	1.34	0	
9160.00		V	73.98		Peak			No Emissions Found
9160.00		V	53.98		Avg			No Emissions Found

Test
distance
3 meter



***EMISSIONS RADIATED OUTSIDE OF THE FUNDAMENTAL
FREQUENCY BAND***

DATA SHEETS



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

BAND EDGES LOW CHANNEL

FCC 15.249

Nortek

GARAGE DOOR OPENER

Model: GD00Z-4

Date: 2/19/2015

Lab: R


Tested By: Matt Harrison

Band Edge


Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit (dBuV)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
900.14	33.55	H	46.00	-12.45	Peak	1.62	105	No Marker Delta Method Used
938.76	34.35	H	46.00	-11.65	Peak	1.62	105	No Marker Delta Method Used
901.22	33.76	V	46.00	-12.24	Peak	1.09	201	No Marker Delta Method Used
932.08	33.95	V	46.00	-12.05	Peak	1.09	201	No Marker Delta Method Used

Test Distance

3 meters

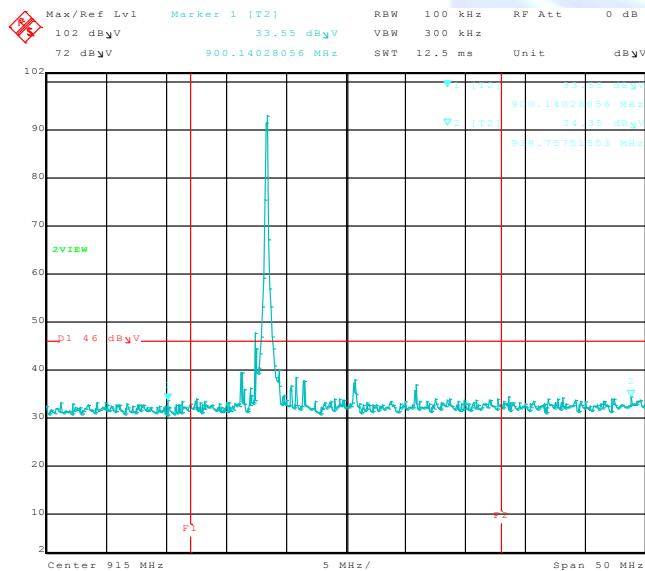

Title: GD00Z-4.
Comment A: Band Edges, Horizontal.
Date: 19.FEB.2015 10:19:06

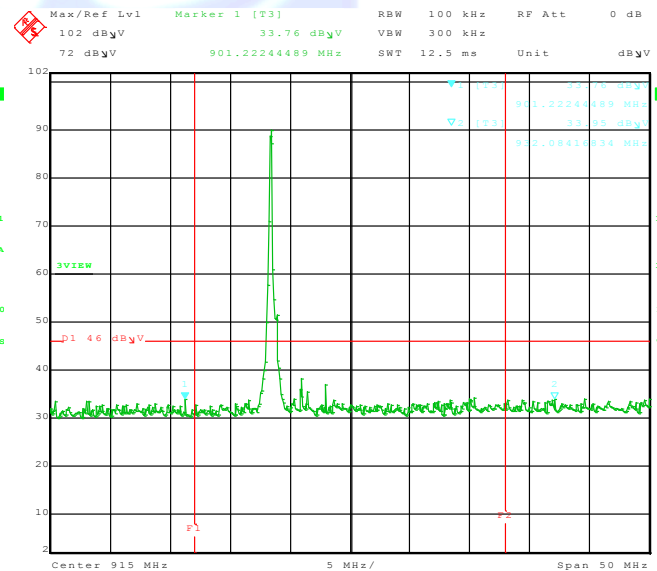

Title: GD00Z-4.
Comment A: Band Edges, Vertical.
Date: 19.FEB.2015 10:26:34



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

BAND EDGES HIGH CHANNEL

FCC 15.249

Nortek

GARAGE DOOR OPENER

Model: GD00Z-4

Date: 2/19/2015

Lab: R


Tested By: Matt Harrison

Band Edge


Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit (dBuV)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
899.42	33.79	H	46.00	-12.21	Peak	1.65	110.00	No Marker Delta Method Used
928.10	36.73	H	46.00	-9.27	Peak	1.65	110.00	No Marker Delta Method Used
900.42	33.03	V	46.00	-12.97	Peak	1.12	205.00	No Marker Delta Method Used
929.08	34.42	V	46.00	-11.58	Peak	1.12	205.00	No Marker Delta Method Used

Test Distance

3 meters

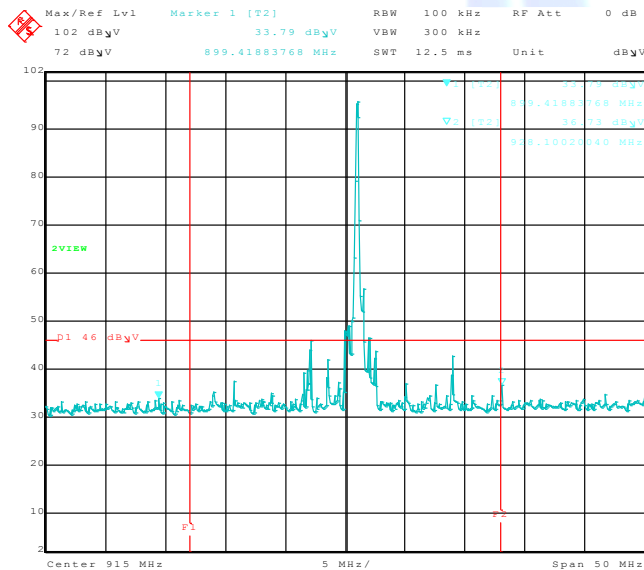

Title: GD002-1.
Comment A: Band Edges, 916.0MHz, Horizontal.
Date: 19.FEB.2015 14:11:53

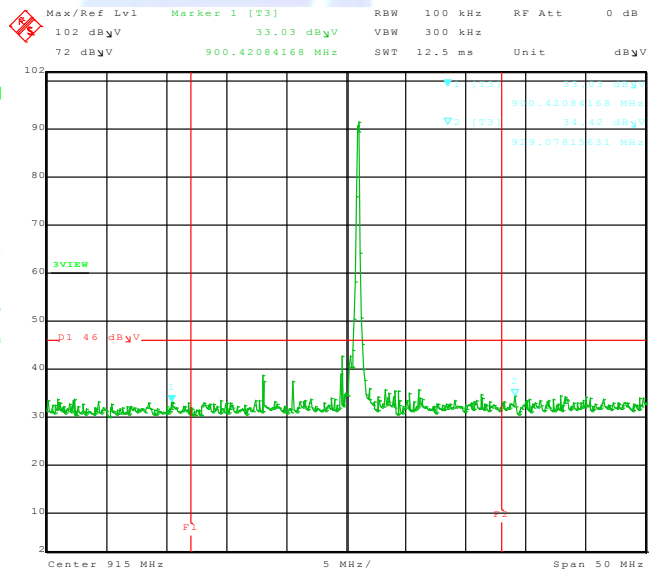

Title: GD002-1.
Comment A: Band Edges, 916.0MHz, Vertical.
Date: 19.FEB.2015 14:10:36



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400