

**FCC PART 15 SUBPART C SECTION 15.247**

&amp;

**RSS 247, RSS GEN TEST REPORT***for***SMOKE ALARM****Model: F-ADT-SMK-1**

Prepared for

NORTEK SECURITY & CONTROL, LLC.  
1950 CAMINO VIDA ROBLE, SUITE 150  
CARLSBAD, CA 92008

Prepared by: \_\_\_\_\_

TOREY OLIVER

Reviewed by: \_\_\_\_\_

MATT HARRISON

COMPATIBLE ELECTRONICS INC.  
20621 PASCAL WAY  
LAKE FOREST, CALIFORNIA 92630  
(949) 587-0400

DATE: MAY 27, 2017

	REPORT BODY	APPENDICES					TOTAL
		A	B	C	D	E	
PAGES	20	2	2	2	13	48	87

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

**TABLE OF CONTENTS**

<b>Section / Title</b>	<b>PAGE</b>
<b>GENERAL REPORT SUMMARY</b>	<b>4</b>
<b>1. PURPOSE</b>	<b>6</b>
<b>2. ADMINISTRATIVE DATA</b>	<b>7</b>
2.1 Location of Testing	7
2.2 Traceability Statement	7
2.3 Cognizant Personnel	7
2.4 Date Test Sample was Received	7
2.5 Disposition of the Test Sample	7
2.6 Abbreviations and Acronyms	7
<b>3. APPLICABLE DOCUMENTS</b>	<b>8</b>
<b>4. DESCRIPTION OF TEST CONFIGURATION</b>	<b>9</b>
4.1 Description of Test Configuration	9
<b>5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT</b>	<b>12</b>
5.1 EUT and Accessory List	12
5.2 EMI Test Equipment	13
<b>6. TEST SITE DESCRIPTION</b>	<b>14</b>
6.1 Test Facility Description	14
6.2 EUT Mounting, Bonding and Grounding	14
6.3 Facility Environmental Characteristics	14
6.4 Measurement Uncertainty	14
<b>7. CHARACTERISTICS OF THE TRANSMITTER</b>	<b>15</b>
7.1 Channel Number and Frequencies	15
7.2 Antenna	15
7.3 Software	15
<b>8. TEST PROCEDURES</b>	<b>16</b>
8.1 RF Emissions	16
<b>9. TEST PROCEDURE DEVIATIONS</b>	<b>20</b>
<b>10. CONCLUSIONS</b>	<b>20</b>



**LIST OF APPENDICES**

<b>APPENDIX</b>	<b>TITLE</b>
A	Laboratory Accreditations and Recognitions
B	Modifications to the EUT
C	Additional Models Covered Under This Report
D	Diagrams, Factors, Charts, and Photos <ul style="list-style-type: none"><li>• Test Setup Diagrams</li><li>• Antenna and Amplifier Factors</li><li>• Radiated Emissions Photos</li></ul>
E	Radiated Emissions Data Sheets

**LIST OF FIGURES**

<b>FIGURE</b>	<b>TITLE</b>
1	Plot Map and Layout of Test Site Below 1GHz
2	Plot Map and Layout of Test Site Above 1GHz



## GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced in any form unless done so in full with the written permission of Compatible Electronics.

This report must not be used to claim product certification, approval or endorsement by NVLAP, NIST, or any agency of the federal government.

Device Tested: Smoke Alarm  
Model: F-ADT-SMK-1  
S/N: None

Product Description: The EUT is a Smoke Alarm that monitors for smoke and extreme temperatures in your home (heat above 135°F, or freeze below 40°F).

Modifications: The EUT was not modified in order to comply with specifications.

Manufacturer: Nortek Security & Control, LLC.  
1950 Camino Vida Roble, Suite 150  
Carlsbad, CA 92008

Test Dates: May 10, 15, 16, 22, 27, & 29, 2017

Test Specifications Covered by Accreditation:



EMI requirements

CFR Title 47, Part 15 Subpart C Sections 15.205, 15.207, 15.209, & 15.247.  
RSS 247 & RSS GEN

Test Procedure: ANSI C63.4 & C63.10, and KDB 558074 D01 v04.



## SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz - 30 MHz	The EUT is battery powered. Therefore, this test was deemed unnecessary and not performed.
2	Radiated RF Emissions & Harmonics, 9 kHz – 10,000 MHz	Complies with the limits of CFR Title 47 Part 15 Subpart C Sections 15.205, 15.209, and RSS GEN
3	DTS Bandwidth	Complies with CFR Title 47 Part 15 Subpart C Section 15.247 and RSS 247
4	Maximum Peak Conducted Output Power	Complies with CFR Title 47 Part 15 Subpart C Section 15.247 and RSS 247
5	Maximum Peak Power Spectral Density Level In The Fundamental Emission	Complies with CFR Title 47 Part 15 Subpart C Section 15.247 and RSS 247
6	Emissions in Non-Restricted Frequency Bands (in 100kHz Bandwidth)	Complies with CFR Title 47 Part 15 Subpart C Section 15.247 and RSS 247
7	Emissions in the Restricted Bands	Complies with CFR Title 47 Part 15 Subpart C Section 15.205, 15.247 and RSS 247



## 1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the Smoke Alarm Model: F-ADT-SMK-1. The EMI measurements were performed according to the measurement procedure described in ANSI C63.10 & C63.4. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT (equipment under test) hereafter, are within the specification limits defined by the Code of Federal Regulations Title 47, Part 15 Subpart C sections 15.205, 15.209, 15.247, RSS GEN, and RSS 247.



## 2. ADMINISTRATIVE DATA

### 2.1 Location of Testing

The tests described herein were performed at the test facility of Compatible Electronics, 20621 Pascal Way Lake Forest, California 92630.

### 2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

### 2.3 Cognizant Personnel

Nortek Security & Control, LLC.

Josh Hansen

Compatible Electronics Inc.

Torey Oliver                      Test Engineer  
Shayan Aminmadani            Test Technician

Matt Harrison                    Lab Manager

### 2.4 Date Test Sample was Received

The test sample was received on May 10, 2017.

### 2.5 Disposition of the Test Sample

The test sample remains at Compatible Electronics as of the date of this test report.

### 2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network
NVLAP	National Voluntary Laboratory Accreditation Program
CFR	Code of Federal Regulations
PCB	Printed Circuit Board
TX	Transmit
RX	Receive



### 3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this Test Report.

SPEC	TITLE
CFR Title 47, Part 15	FCC Rules – Radio frequency devices (including digital devices)
ANSI C63.4 2014	Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz.
ANSI C63.10: 2013	American National Standard for Testing Unlicensed Wireless Devices
KDB 558074 D01 v04	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247
RSS 247	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
RSS GEN	General Requirements for Compliance of Radio Apparatus





## 4. DESCRIPTION OF TEST CONFIGURATION

### 4.1 Description of Test Configuration

The Smoke Alarm Model: F-ADT-SMK-1 (EUT) was setup in a tabletop configuration. For spurious emissions in the range of 30-1000 MHz the EUT was placed on the table with multiple accessories. The EUT was continuously transmitting a data stream at the low, middle, and high channels during transmit tests and continuously receiving at the low, middle, and high channels during receiver tests. The EUT was checked in all axes.

A new battery was used for testing.

It was determined that the emissions were at their highest level when the EUT was transmitting in the configuration described above for Radiated Emissions. The final radiated data was taken in the above configuration. Please see Appendix E for the test data.

#### 4.1.1 *Photograph Test Configuration (Z-Axis Shown)*



4.1.2 *Axis Determination*

Y Axis



Z Axis



X Axis



### 4.1.3 *Cable Construction and Termination*

#### Cable 1

This is a 2 meter, foil shielded, USB cable that connect the EUT to the Laptop (for programming only). The cable has a USB Type-A connector at the Laptop end and has an 8-pin plastic ribbon cable connector at the EUT end of the cable. The cable was not bundled. The shield of the cable was terminated at the Laptop end of the cable only.



**5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT****5.1 EUT and Accessory List**

#	EQUIPMENT TYPE	MANU-FACTURER	MODEL	SERIAL NUMBER
1	SMOKE ALARM(EUT)	NORTEK	F-ADT-SMK-1	NONE
2	LAPTOP (PROGRAMMING ONLY)	LENOVO	THINKPAD T430	101-2037
3	LAPTOP POWER SUPPLY	LENOVO	92P1156	11S92P1156Z1ZDXN01LIND
4	BATTERY	ENERGIZER	CR123	NONE
5	MOTION DETECTOR	NORTEK	F-ADT-PIR-1	NONE
6	CARBON MONOXIDE ALARM	NORTEK	F-ADT-CO-1	NONE
7	GO CONTROL PANEL	2GIG TECHNOLOGIES	2GIG-GC3-SP1	NONE
8	KEYCHAIN REMOTE	NORTEK	F-ADT-FOB-1	NONE



## 5.2 EMI Test Equipment

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DUE DATE
Computer	Compatible Electronics	NONE	NONE	N/A	N/A
EMI Receiver	Rohde & Schwarz	ESIB40	100172	3/15/2017	3/15/2018
EMI Receiver	Rohde & Schwarz	ESIB40	100218	3/14/2017	3/14/2018
Antenna, Loop	Com Power	AL-130	121049	2/9/2017	2/9/2018
Antenna, CombiLog	Com Power	AC-220	003	5/19/2016	5/19/2018
Antenna, Horn 1-18GHz	Com Power	AH-118	071225	5/16/2016	5/16/2018
Pre-Amp, 1-18GHz	Com Power	PAM-118A	551033	5/16/2016	5/16/2018
Notch Filter	Microwave Circuits	N0309153	3709-01 DC0415	5/9/2017	5/9/2018
Mast, Antenna Positioner	Sunol Science Corporation	TWR 95-4	020808-3	N/A	N/A
Antenna Mast	Sunol Science Corporation	TWR 95-4	020808-3	N/A	N/A
Turntable	Sunol Science Corporation	FM 2001	N/A	N/A	N/A
Mast and Turntable Controller	Sunol Science Corporation	SC104V	020808-1	N/A	N/A



**6. TEST SITE DESCRIPTION**

**6.1 Test Facility Description**

Please refer to section 2.1 and the figures in Appendix D of this report for test location.

**6.2 EUT Mounting, Bonding and Grounding**

For testing below 1 GHz the EUT was mounted on a 1.0 by 1.5 by 0.8 meters high non-conductive table, which was placed on the ground plane.

For testing above 1 GHz the EUT was mounted 1.5 meter above the ground plane.

The EUT was not grounded.

**6.3 Facility Environmental Characteristics**

When applicable refer to the data sheets in Appendix E for the relative humidity, air temperature, and barometric pressure.

**6.4 Measurement Uncertainty**

“Compatible Electronics’  $U_{lab}$  value is less than  $U_{cispr}$ , thus based on this – compliance is deemed to occur if no measured disturbance exceeds the disturbance limit.

$$u_c(y) = \sqrt{\sum_i c_i^2 u^2(x_i)}$$

Measurement		$U_{cispr}$	$U_{lab} = 2 u_c (y)$
Conducted disturbance (mains port)	(150 kHz – 30 MHz)	4,0 dB	2.88
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(30 MHz – 1 000 MHz)	5,2 dB	4.04





## 7. CHARACTERISTICS OF THE TRANSMITTER

### 7.1 Channel Number and Frequencies

There is a total of 10 channels. The low channel is at 904.0 MHz, mid channel is at 912.0 MHz, and the high channel is at 922.0 MHz. There is approximately 2 MHz separation between channels and the EUT uses OQPSK modulation.

Channel 1	904 MHz
Channel 2	906 MHz
Channel 3	908 MHz
Channel 4	910 MHz
Channel 5	912 MHz
Channel 6	914 MHz
Channel 7	916 MHz
Channel 8	918 MHz
Channel 9	920 MHz
Channel 10	922 MHz

### 7.2 Antenna

The antenna is an etched trace on the PCB in combination with a wire antenna.

### 7.3 Software

10016717 Ver. F013 Stored on a local Server, located at NSC headquarters.



## 8. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

### 8.1 RF Emissions


#### 8.1.1 *Conducted Emissions Test*

*Test Results: The EUT is battery powered, therefore; this test was deemed unnecessary and not performed.*

The EMI receiver was used as a measuring meter. A quasi-peak and/or average reading was taken only where indicated in the data sheets. The LISN output was measured using the EMI receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding, and grounding of the EUT. The EUT received its power through the LISN, which was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI 63.4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by the computer software. The final qualification data is located in Appendix E.

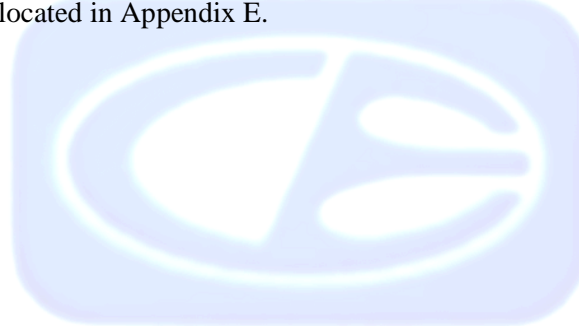



### 8.1.2 Radiated Emissions (Spurious and Harmonics) Test

The R&S receiver was used as a measuring meter. The receiver was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the receiver records the highest measured reading over all the sweeps. An Amplifier was used to increase the sensitivity of the instrument. A Preamplifier was used for frequencies above 1 GHz.

For spurious emissions, the quasi-peak detector was used for frequencies below 1GHz and the average detector was used for frequencies above 1 GHz.

For the radiated Harmonic emissions, a linear average detector was used.

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE (MHz)	TRANSDUCER	EFFECTIVE MEASUREMENT BANDWIDTH
.009 to .150	Active Loop Antenna	200 Hz
.150 to 30	Active Loop Antenna	9 kHz
30 to 1000	Combilog Antenna	100 kHz (120kHz for QP Measurements)
1000 to 10000	Horn Antenna	1 MHz

The TDK FAC-3 shielded test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is in full compliance with ANSI, EN 50147-2, and CISPR 22. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters in both vertical and horizontal polarizations (for E field radiated field strength).

#### Test Results:

The EUT complies with the limits of CFR Title 47 Part 15 Subpart C sections 15.205, 15.209, 15.247, RSS 247, and RSS GEN.



### 8.1.3 *DTS Bandwidth*

The DTS Bandwidth was measured directly connected to the EMI Receiver using a RBW of 100 kHz and a VBW of 300 kHz. A peak detector and a max hold trace were used with auto sweep time. The trace was allowed to fully maximize. We measured the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. The automatic bandwidth measurement capability of the EMI Receiver was employed using the n dB bandwidth mode with n set to 6 dB. The final qualification data sheets are located in Appendix E.

#### **Test Results:**

The EUT complies with Part 15, Subpart C, Section 15.247 and RSS 247.

### 8.1.4 *Maximum Peak Conducted Output Power*

The maximum peak conducted output power was measured using a EMI Receiver. The EMI Receiver used a 1 MHz resolution bandwidth which is greater than the DTS bandwidth and a 3 MHz video bandwidth. The final qualification data sheets are located in Appendix E.

#### **Test Results:**

The EUT complies with Part 15, Subpart C, Section 15.247 and RSS 247.

### 8.1.5 *Maximum Peak Power Spectral Density Level in The Fundamental Emission*

The Maximum Peak Power Spectral Density Level in the Fundamental Emission was measured directly connected to the EMI Receiver. Tuned to the center frequency of the DTS channel and set the span to 1.5 times the DTS bandwidth. RBW was set to minimum of 3 kHz but not greater than 100kHz and VBW 3 \* RBW. A peak detector was used with the sweep time set to auto. A max hold trace was used and allowed to fully stabilize. The peak marker function was used to determine the maximum amplitude level within the RBW. The final qualification data sheets are located in Appendix E.

#### **Test Results:**

The EUT complies with Part 15, Subpart C, Section 15.247 and RSS 247.



### 8.1.6 *Emissions in Non-Restricted Frequency Bands (in 100kHz Bandwidth)*

The Emissions in Non-Restricted Frequency Bands (in 100kHz Bandwidth) measurements were performed using the EMI Receiver directly connected to the EUT. A reference level was established by setting the instrument center frequency to DTS channel center frequency. The span was set to  $\geq 1.5$  times the DTS bandwidth. The RBW was 100 kHz and VBW 300 kHz. A peak detector was used with a sweep time set to auto. A max hold trace was used and allowed to fully stabilize. The peak marker function was used to determine the level and 20dB below that was the reference level. For Emission Level Measurement, the center frequency and span were set to encompass the frequency range to be measured. RBW was set to 100 kHz and VBW to 300 kHz. A peak detector was used with a sweep time set to auto. The number of measurement points were greater than span/RBW. A max hold trace was used and allowed to fully stabilize. The peak marker function was used to determine the maximum amplitude level. The final qualification data sheets are located in Appendix E.

#### **Test Results:**

The EUT complies with Part 15, Subpart C, Section 15.247 and RSS 247.

### 8.1.7 *Emissions in the Restricted Bands (Radiated)*

The Emissions in the Restricted Bands measurement was performed using the EMI Receiver at a 3-meter test distance to obtain the final test data. The final qualification data sheets are located in Appendix E.

#### **Test Results:**

The EUT complies with Part 15 Subpart C, Section 15.205 and RSS GEN.

### 8.1.8 *Emissions Radiated Outside of the Fundamental Frequency Band*

The Band Edge measurement was performed using the EMI Receiver at a 3-meter test distance to obtain the final test data. The low and high channels were tuned to during the low and high band edge tests. The final qualification data sheets are located in Appendix E.

#### **Test Results:**

The EUT complies with Part 15, Subpart C, Section 15.247 and RSS 247.



**9. TEST PROCEDURE DEVIATIONS**

For conducted measurements a connector was matched and connected to the PCB before the antenna.

**10. CONCLUSIONS**

The SMOKE ALARM Model: F-ADT-SMK-1 meets all of the relevant specification requirements defined in the Code of Federal Regulations Title 47, Part 15 Subpart C sections 15.205, 15.207, 15.209, 15.247, RSS GEN & RSS 247.



**APPENDIX A**

***LABORATORY ACCREDITATIONS AND  
RECOGNITIONS***



---

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

## LABORATORY ACCREDITATIONS AND RECOGNITIONS



For US, Canada, Australia/New Zealand, Japan, Taiwan, Korea, and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025.

**For the most up-to-date version of our scopes and certificates please visit**

**<http://celectronics.com/quality/scope/>**

Quote from ISO-ILAC-IAF Communiqué on 17025:

"A laboratory's fulfilment of the requirements of ISO/IEC 17025:2005 means the laboratory meets both the technical competence requirements and management system requirements that are necessary for it to consistently deliver technically valid test results and calibrations. The management system requirements in ISO/IEC 17025:2005 (Section 4) are written in language relevant to laboratory operations and meet the principles of ISO 9001:2008 Quality Management Systems — Requirements."

IC OAT's Test Site Registration Number: 2154C-1



**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

**APPENDIX B**

***MODIFICATIONS TO THE EUT***



---

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

---

## MODIFICATIONS TO THE EUT

There were no modifications made during testing.





**APPENDIX C**

***ADDITIONAL MODELS COVERED  
UNDER THIS REPORT***



---

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

## ADDITIONAL MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

SMOKE ALARM  
Model: F-ADT-SMK-1  
S/N: None

No additional models were tested.



**APPENDIX D**

***DIAGRAMS, FACTORS, CHARTS, AND PHOTOS***



---


**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

## FIGURE 1: PLOT MAP AND LAYOUT OF TEST SITE BELOW 1GHZ

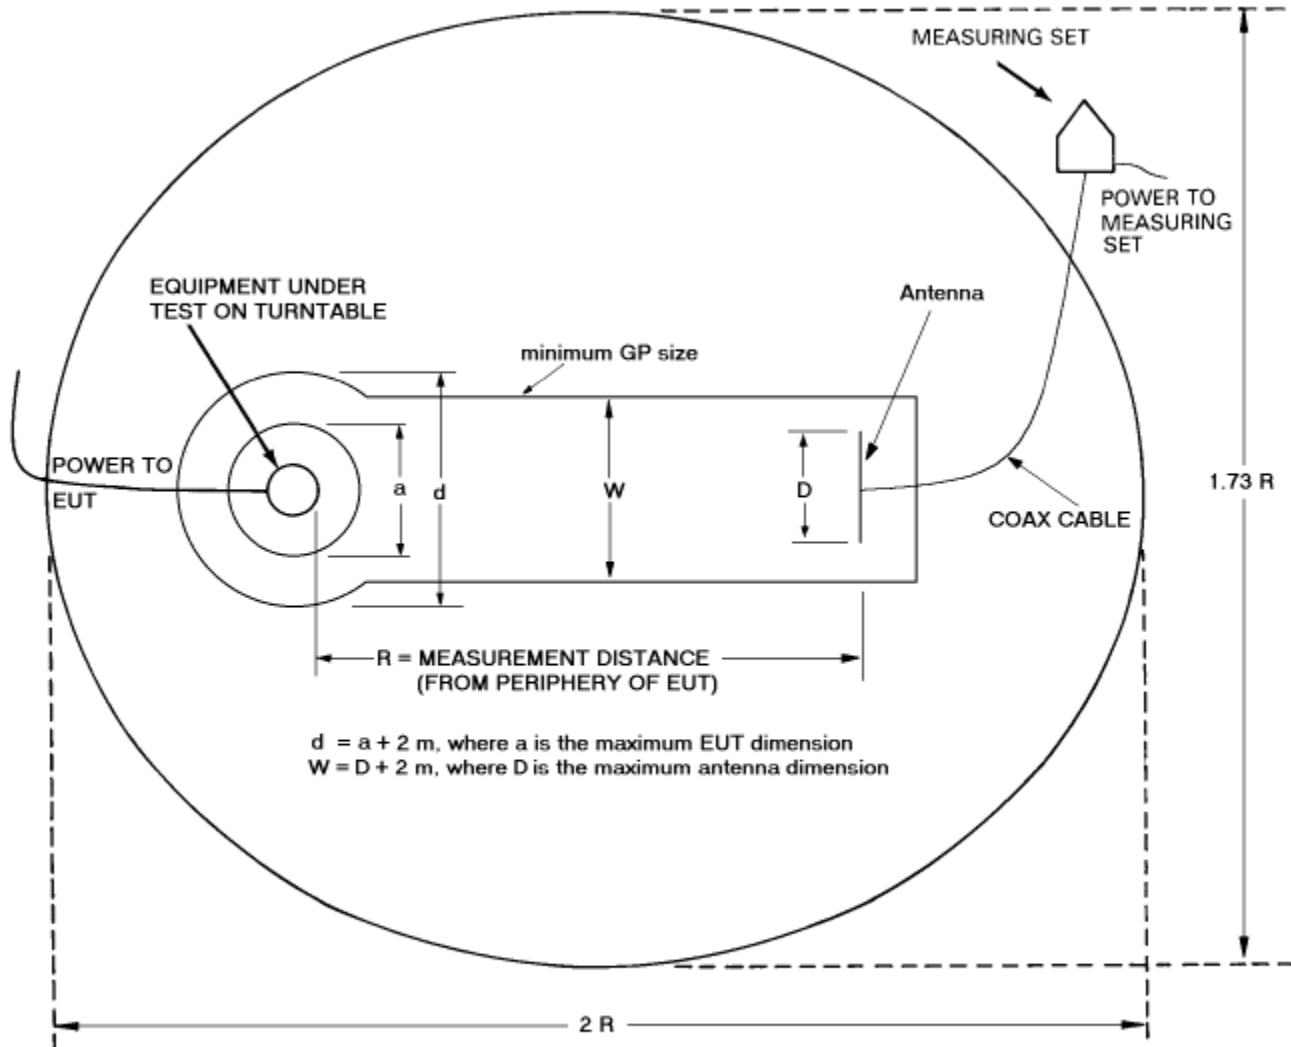


AREA DIMENSIONS =

R = 3m	R = 10 m	R = 30 m
6 m x 5.2 m	20 m x 17.3 m	60 m x 52 m



**FIGURE 2: PLOT MAP AND LAYOUT OF TEST SITE ABOVE 1GHZ**

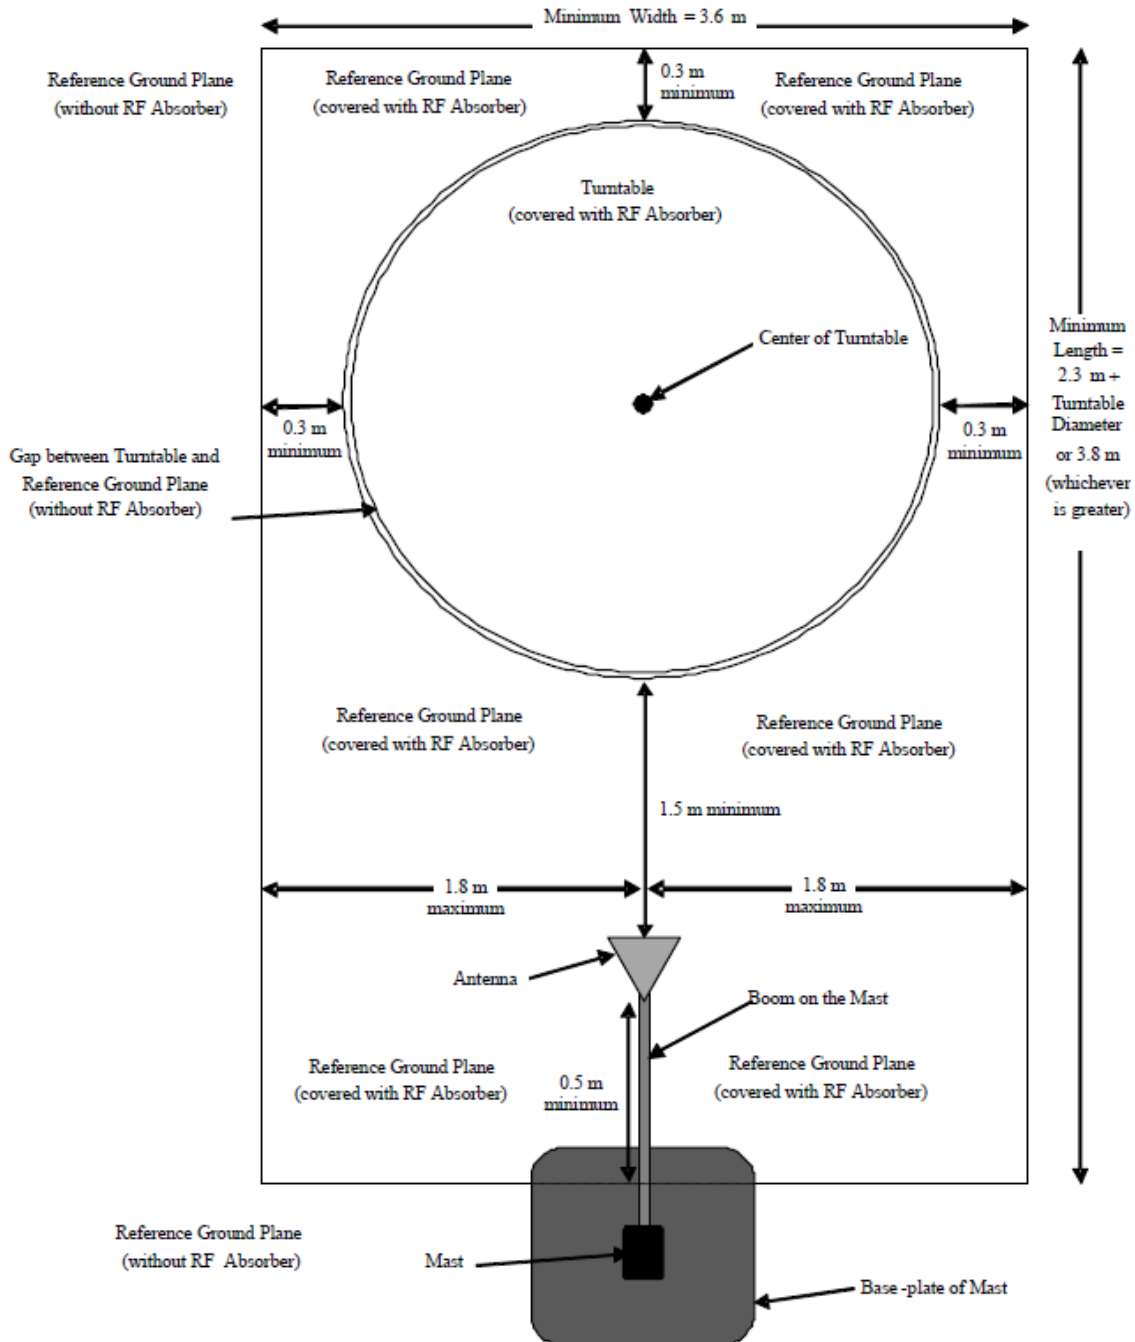

**COM-POWER AL-130****LOOP ANTENNA**

S/N: 121049

CALIBRATION DUE: FEBRUARY 9, 2018

<b>FREQUENCY (MHz)</b>	<b>MAGNETIC (dB/m)</b>	<b>ELECTRIC (dB/m)</b>	<b>FREQUENCY (MHz)</b>	<b>MAGNETIC (dB/m)</b>	<b>ELECTRIC (dB/m)</b>
<b>0.009</b>	-34.68	16.82	<b>0.8</b>	-37.44	14.06
<b>0.01</b>	-35.54	15.96	<b>0.9</b>	-37.34	14.16
<b>0.02</b>	-37.22	14.28	<b>1.0</b>	-37.34	14.16
<b>0.03</b>	-36.44	15.06	<b>2.0</b>	-37.03	14.47
<b>0.04</b>	-36.90	14.60	<b>3.0</b>	-37.02	14.48
<b>0.05</b>	-37.56	13.94	<b>4.0</b>	-37.12	14.38
<b>0.06</b>	-37.45	14.05	<b>5.0</b>	-36.92	14.58
<b>0.07</b>	-37.55	13.95	<b>6.0</b>	-37.12	14.38
<b>0.08</b>	-37.46	14.04	<b>7.0</b>	-37.02	14.48
<b>0.09</b>	-37.56	13.94	<b>8.0</b>	-36.81	14.69
<b>0.1</b>	-37.56	13.94	<b>9.0</b>	-36.81	14.69
<b>0.2</b>	-37.75	13.75	<b>10.0</b>	-36.70	14.80
<b>0.3</b>	-37.75	13.75	<b>15.0</b>	-37.08	14.42
<b>0.4</b>	-37.65	13.85	<b>20.0</b>	-36.60	14.90
<b>0.5</b>	-37.75	13.75	<b>25.0</b>	-38.62	12.88
<b>0.6</b>	-37.75	13.75	<b>30.0</b>	-38.92	12.58
<b>0.7</b>	-37.64	13.86			



**COM-POWER AC-220****LAB P - COMBILOG ANTENNA**

S/N: 003

CALIBRATION DUE: MAY 19, 2018

<b>FREQUENCY (MHz)</b>	<b>FACTOR (dB)</b>	<b>FREQUENCY (MHz)</b>	<b>FACTOR (dB)</b>
<b>30</b>	23.6	<b>160</b>	13.5
<b>35</b>	23.6	<b>180</b>	14.4
<b>40</b>	23.7	<b>200</b>	14.5
<b>45</b>	23.9	<b>250</b>	15.7
<b>50</b>	24.2	<b>300</b>	18.1
<b>60</b>	22.6	<b>400</b>	19.9
<b>70</b>	19.1	<b>500</b>	22.3
<b>80</b>	13.8	<b>600</b>	24.4
<b>90</b>	12.9	<b>700</b>	26.6
<b>100</b>	14.6	<b>800</b>	26.2
<b>120</b>	14.4	<b>900</b>	27.5
<b>140</b>	16.2	<b>1000</b>	28.9



**COM-POWER AH-118****HORN ANTENNA**

S/N: 071225

CALIBRATION DUE: MAY 16, 2018

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
1000	24.40	9500	39.11
1500	25.61	10000	39.38
2000	28.71	10500	39.55
2500	29.09	11000	39.66
3000	30.24	11500	40.28
3500	30.94	12000	40.26
4000	31.77	12500	40.64
4500	32.29	13000	41.33
5000	33.70	13500	41.74
5500	34.28	14000	41.52
6000	34.83	14500	41.80
6500	35.07	15000	43.51
7000	36.79	15500	41.03
7500	37.45	16000	40.88
8000	37.67	16500	40.18
8500	37.75	17000	42.59
9000	38.15	17500	44.49
		18000	45.27






**COM-POWER PAM-118A****1-18GHz - PREAMPLIFIER**

S/N: 551033

CALIBRATION DUE: MAY 16, 2018

<b>FREQUENCY (MHz)</b>	<b>FACTOR (dB)</b>	<b>FREQUENCY (MHz)</b>	<b>FACTOR (dB)</b>
500	41.06	5500	40.63
1000	41.06	6000	40.18
1100	41.12	6500	40.33
1200	41.09	7000	39.97
1300	41.20	7500	40.45
1400	41.28	8000	39.83
1500	41.34	8500	39.79
1600	41.37	9000	39.71
1700	41.43	9500	39.80
1800	41.47	10000	41.07
1900	41.53	11000	40.05
2000	41.59	12000	40.21
2500	41.87	13000	40.61
3000	42.13	14000	39.09
3500	42.21	15000	39.36
4000	42.22	16000	38.32
4500	41.53	17000	38.32
5000	41.16	18000	36.85



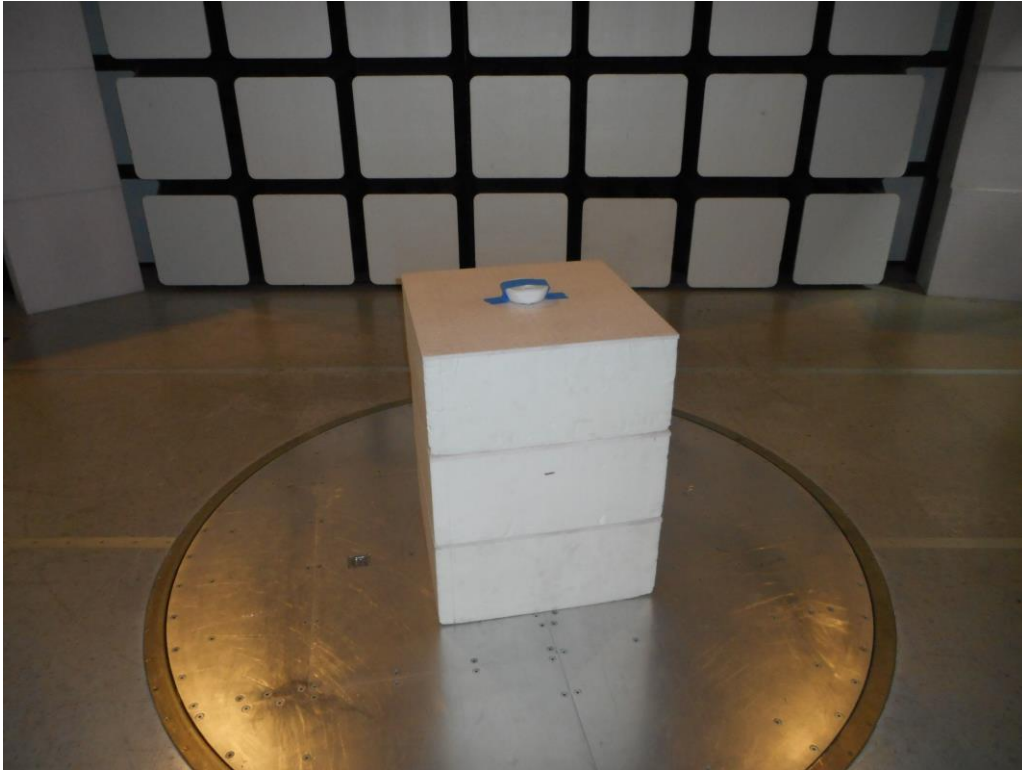

**FRONT VIEW**


NORTEK  
SMOKE ALARM

Model: F-ADT-SMK-1

FCC SUBPART C - RADIATED EMISSIONS < 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**



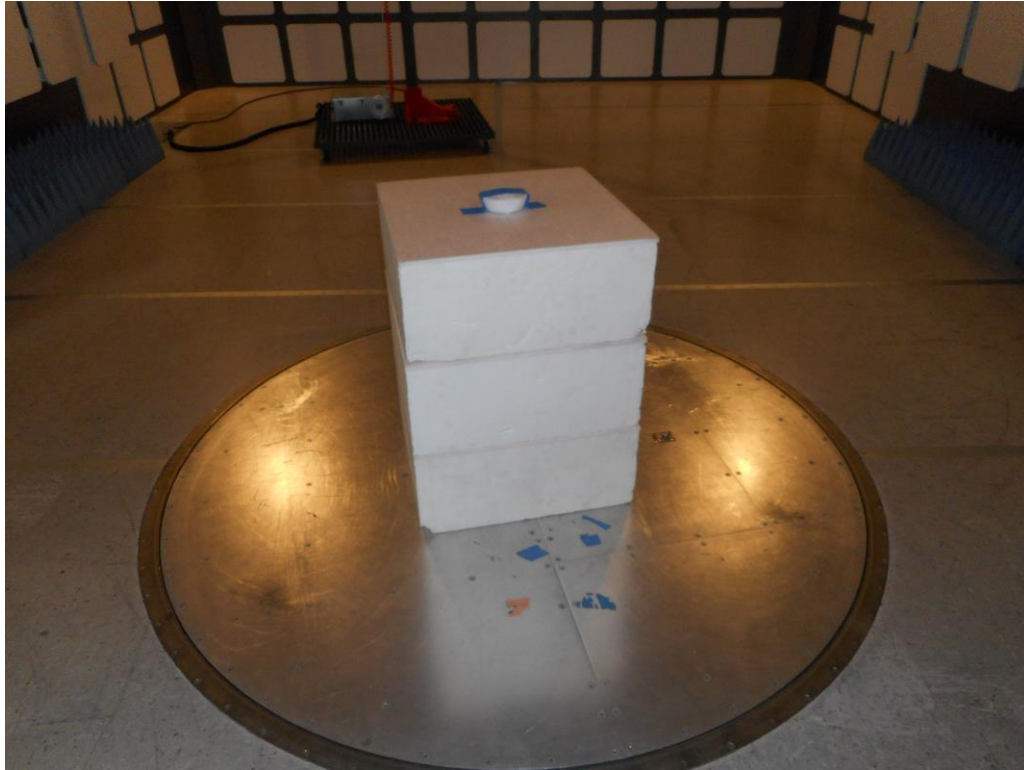

**REAR VIEW**

NORTEK  
SMOKE ALARM

Model: F-ADT-SMK-1

FCC SUBPART C - RADIATED EMISSIONS < 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**



**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



**FRONT VIEW**


NORTEK  
SMOKE ALARM

Model: F-ADT-SMK-1

FCC SUBPART C - UNINTENTIONAL RADIATED EMISSIONS < 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**



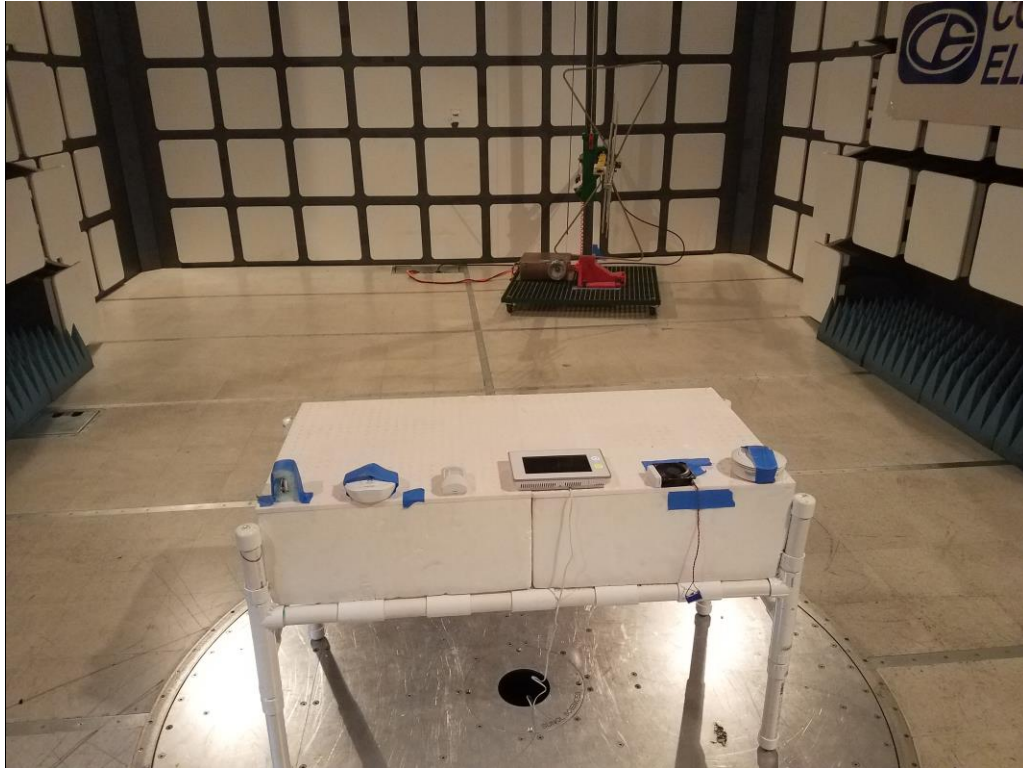

**REAR VIEW**

NORTEK  
SMOKE ALARM

Model: F-ADT-SMK-1

FCC SUBPART C - UNINTENTIONAL RADIATED EMISSIONS < 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**







**FRONT VIEW**


NORTEK  
SMOKE ALARM

Model: F-ADT-SMK-1

FCC SUBPART C - RADIATED EMISSIONS > 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**



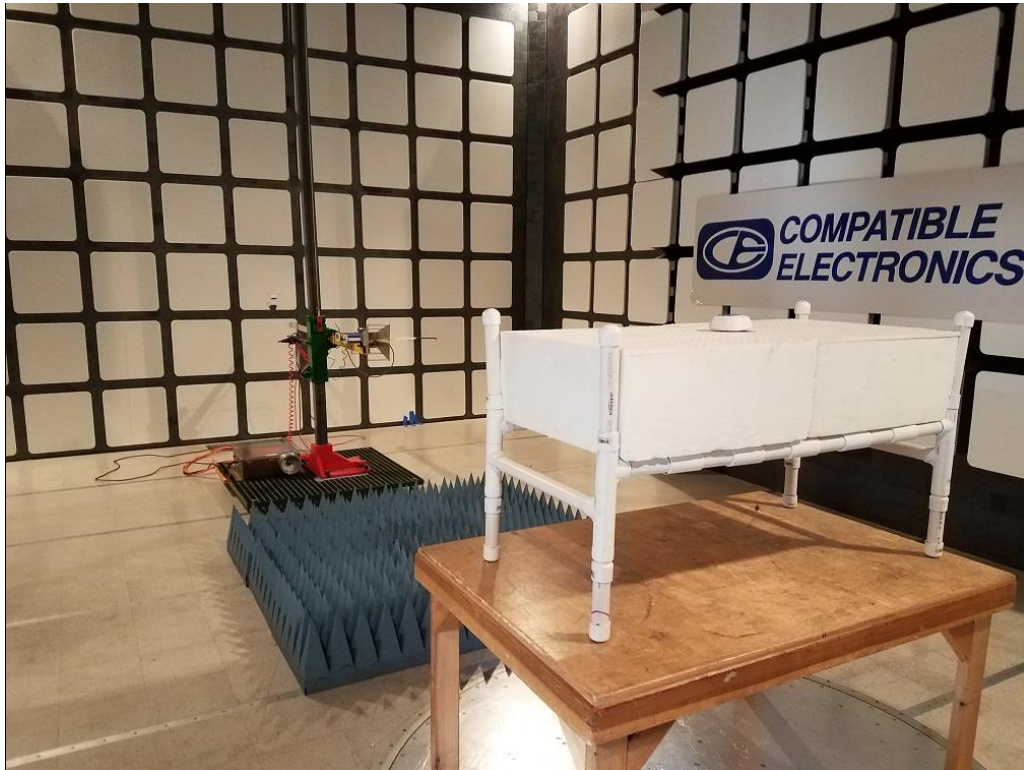

**REAR VIEW**

NORTEK  
SMOKE ALARM

Model: F-ADT-SMK-1

FCC SUBPART C - RADIATED EMISSIONS > 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**



**APPENDIX E**

***RADIATED EMISSIONS DATA SHEETS***



---

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700


**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



Title: FCC 15.209  
 File: Radiated Pre-Scan 30-1000Mhz  
 Operator: Torey Oliver  
 EUT Type: NOVA CO, Nova FOB, Nova PIR, Nova DW, ADT Smoke, Nova Hub  
 EUT Condition: Normal Operation  
 Comments: Temp: 72f  
 Hum: 36%  
 Battery powered

5/25/2017 4:46:30 PM  
 Sequence: Preliminary Scan

Compatible Electronics, Inc. FAC-3 (Lab P)

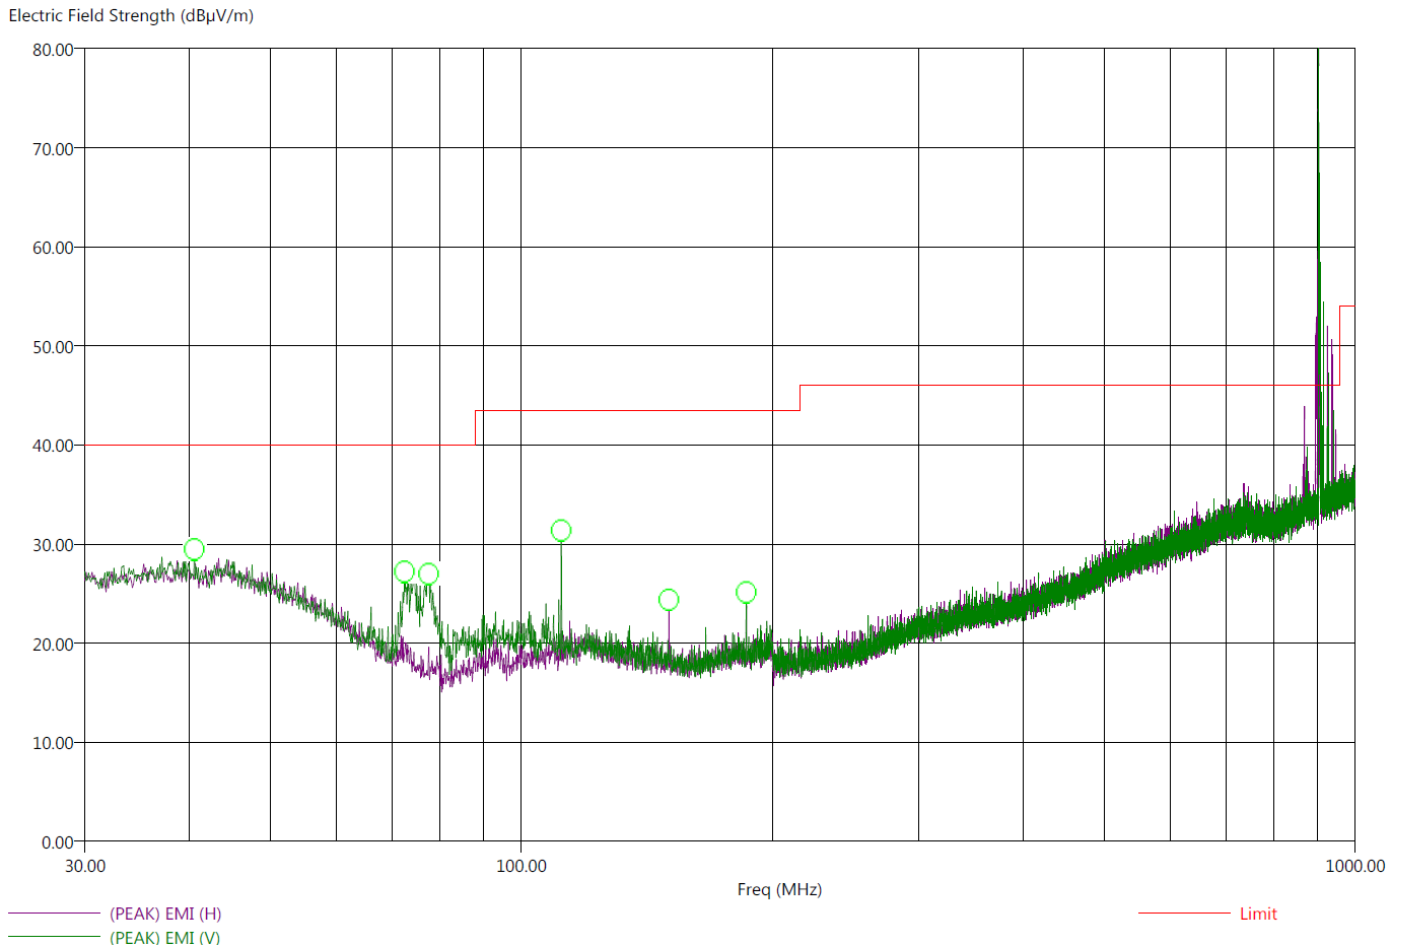

*This was worst case for all modes and channels*  
*There were no radiated emissions besides harmonics found between 9 kHz-30 MHz or 1GHz-10GHz.*  
*The frequencies near 904 & 916 MHz were all checked during the band edge testing and were all found to be related to the intentional radiators.*



Title: FCC 15.209  
File: Radiated Final 30-1000Mhz  
Operator: Torey Oliver  
EUT Type: NOVA CO, Nova FOB, Nova PIR, Nova DW, ADT Smoke, Nova Hub  
EUT Condition: Normal Operation  
Comments: Temp: 72f  
Hum: 36%  
Battery Powered

5/25/2017 5:26:51 PM  
Sequence: Final Measurements

## Compatible Electronics, Inc. FAC-3 (Lab P)

Freq (MHz)	(QP) Margin (dB)	(QP) EMI (dB $\mu$ V/m)	(PEAK) EMI (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Pol	Ttbl Agl (deg)	Twr Ht (cm)	Transducer(dB)	Cable(dB)
40.60	-16.99	23.01	28.09	40.00	V	0.00	123.29	23.94	0.51
72.50	-19.41	20.59	26.91	40.00	V	265.00	260.94	13.55	0.69
77.50	-20.06	19.94	26.20	40.00	V	120.50	162.52	13.11	0.73
111.80	-12.55	30.97	32.78	43.52	V	213.00	100.17	15.50	0.86
150.40	-21.59	21.93	26.47	43.52	H	257.50	215.23	13.92	0.99
186.30	-20.29	23.23	26.59	43.52	V	154.50	100.00	14.43	1.14

*This was worst case for all modes and channels*

*There were no radiated emissions besides harmonics found between 9 kHz-30 MHz or 1GHz-10GHz.*

*The frequencies near 904 & 916 MHz were all checked during the band edge testing and were all found to be related to the intentional radiators.*



**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

***DTS BANDWIDTH***



***DATA SHEETS***



## DTS BANDWIDTH

**FCC 15.247**Company: Nortek  
EUT: Smoke Alarm  
Model: F-ADT-SMK-1Date: 5/10/2017  
Lab: R  
Test Eng.: Shayan Aminmadani**Compatible Electronics, Inc. FAC-3 (Lab R)**

## DTS Bandwidth

Freq. (MHz)	Measured BW (kHz)	Limit (Min) (kHz)	Margin (kHz)	Peak / QP / Avg	Comments
904	661.32	500.00	161.32	Peak	
912	661.32	500.00	161.32	Peak	
922	661.32	500.00	161.32	Peak	










Ref Lvl	Marker 1 [T2 ndB]	RBW	100 kHz	RF Att	50 dB
127 dB $\mu$ V	ndB 6.00 dB	VBW	300 kHz		
	BW 661.32264529 kHz	SWT	5 ms	Unit	dB $\mu$ V

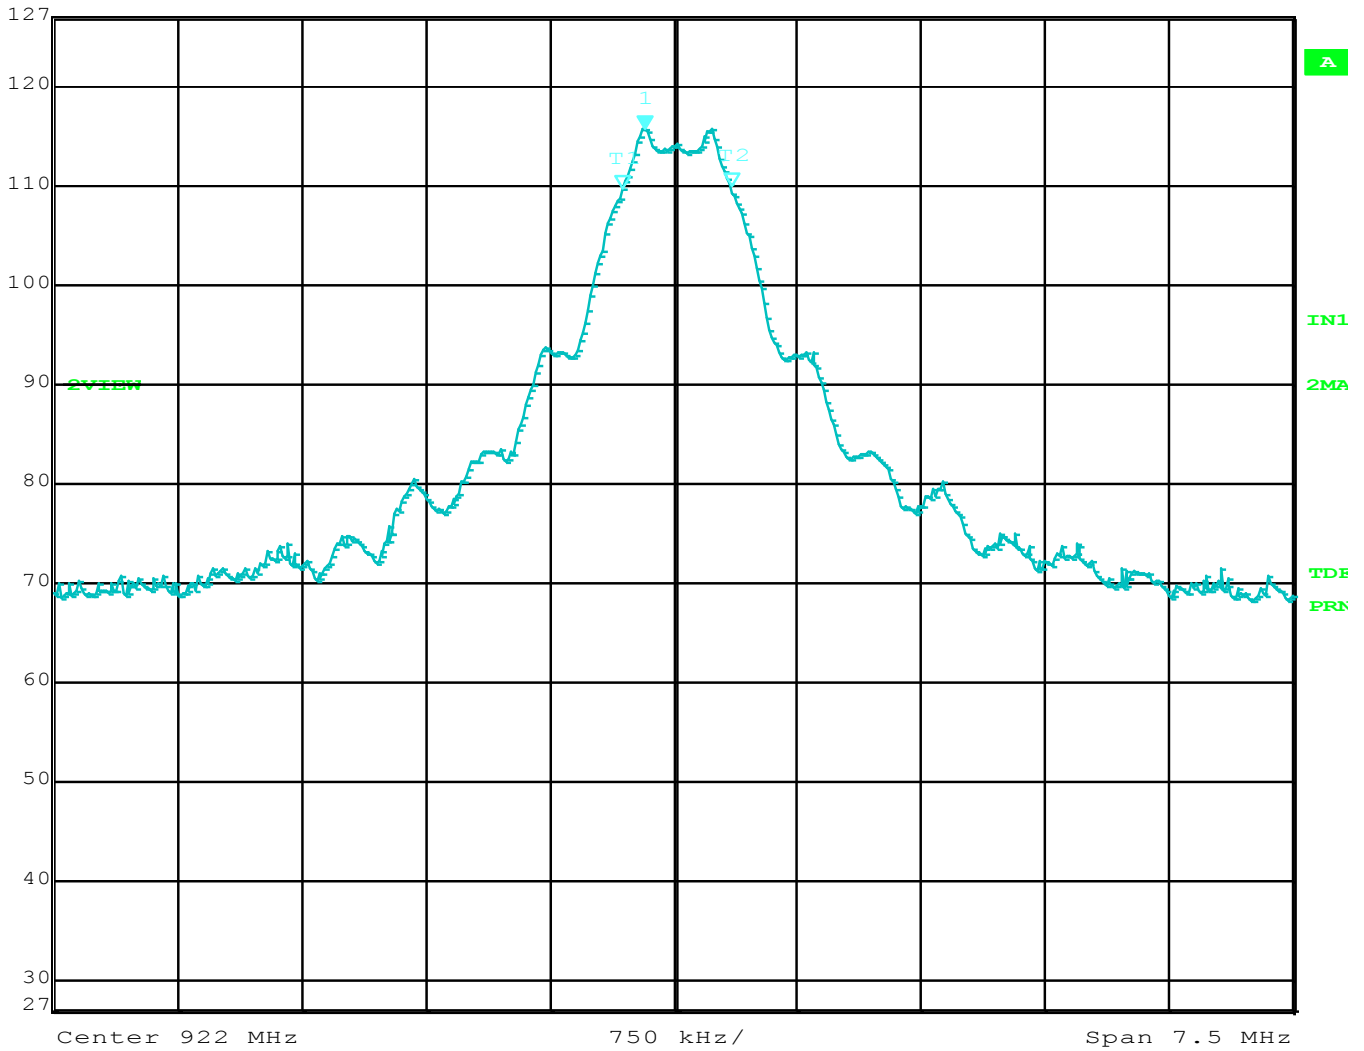

Comment A: DTS BW HI



**Brea Division**  
 114 Olinda Drive  
 Brea, CA 92823  
 (714) 579-0500

**Agoura Division**  
 2337 Troutdale Drive  
 Agoura, CA 91301  
 (818) 597-0600

**Silverado Division**  
 19121 El Toro Road  
 Silverado, CA 92676  
 (949) 589-0700

**Lake Forest Division**  
 20621 Pascal Way  
 Lake Forest, CA 92630  
 (949) 587-0400

***MAXIMUM PEAK CONDUCTED OUTPUT POWER***

***DATA SHEETS***



---

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



## MAXIMUM PEAK CONDUCTED OUTPUT POWER

**FCC 15.247**

Company: Nortek  
EUT: Smoke Alarm  
Model: F-ADT-SMK-1

Date: 5/10/2017  
Lab: R  
Test ENG: Shayan Aminmadani

**Compatible Electronics, Inc. FAC-3 ( Lab R )**

Freq. (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Peak / QP / Avg	Comments
904	8.56	30.00	-21.44	Peak	
912	8.58	30.00	-21.42	Peak	
922	8.58	30.00	-21.42	Peak	



***MAXIMUM PEAK POWER SPECTRAL DENSITY LEVEL IN THE  
FUNDAMENTAL EMISSION***



***DATA SHEETS***



---

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

## CONDUCTED POWER SPECTRAL DENSITY


**FCC 15.247**Company: Nortek  
EUT: Smoke Alarm  
Model: F-ADT-SMK-1Date: 5/10/2017  
Lab: R  
Test ENG: Shayan Aminmadani**Compatible Electronics, Inc. FAC-3 ( Lab R )**

Freq. (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Peak / QP / Avg	Comments
904	6.63	8.00	-1.37	Peak	
912	6.61	8.00	-1.39	Peak	
922	6.62	8.00	-1.38	Peak	





Marker 1 [T2] RBW 50 kHz RF Att 50 dB  
 Ref Lvl 6.63 dBm VBW 200 kHz  
 20 dBm 904.19581168 MHz SWT 5 ms Unit dBm

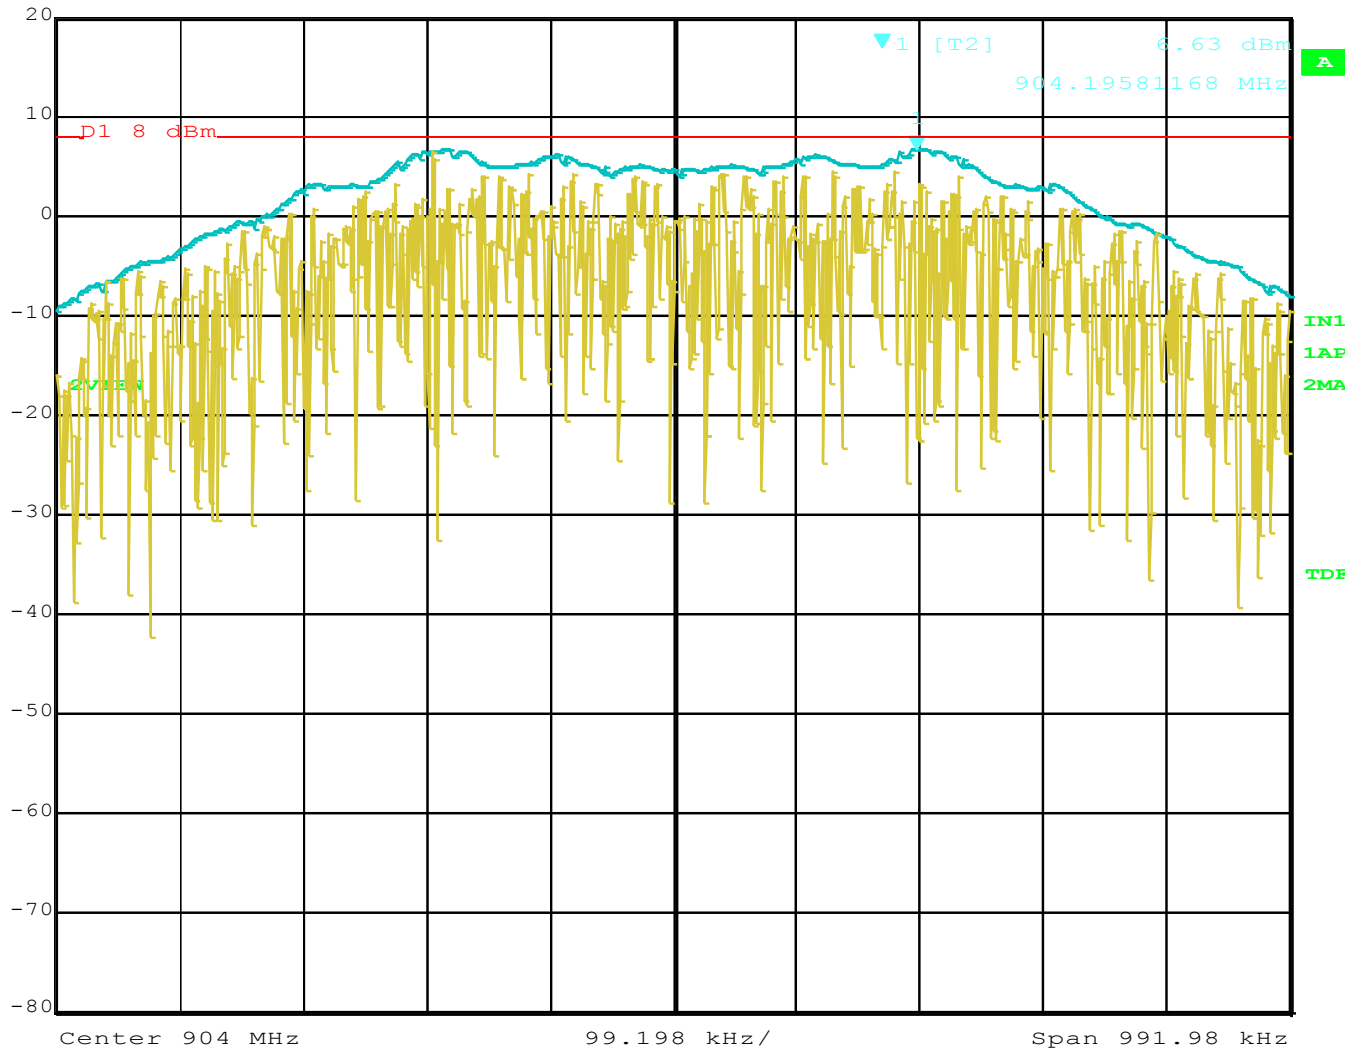

Comment A: PSD LO



**Brea Division**  
 114 Olinda Drive  
 Brea, CA 92823  
 (714) 579-0500

**Agoura Division**  
 2337 Troutdale Drive  
 Agoura, CA 91301  
 (818) 597-0600

**Silverado Division**  
 19121 El Toro Road  
 Silverado, CA 92676  
 (949) 589-0700

**Lake Forest Division**  
 20621 Pascal Way  
 Lake Forest, CA 92630  
 (949) 587-0400



Marker 1 [T2]


RBW 50 kHz RF Att 50 dB

Ref Lvl 6.61 dBm

VBW 200 kHz

20 dBm 912.19382375 MHz

SWT 5 ms Unit dBm

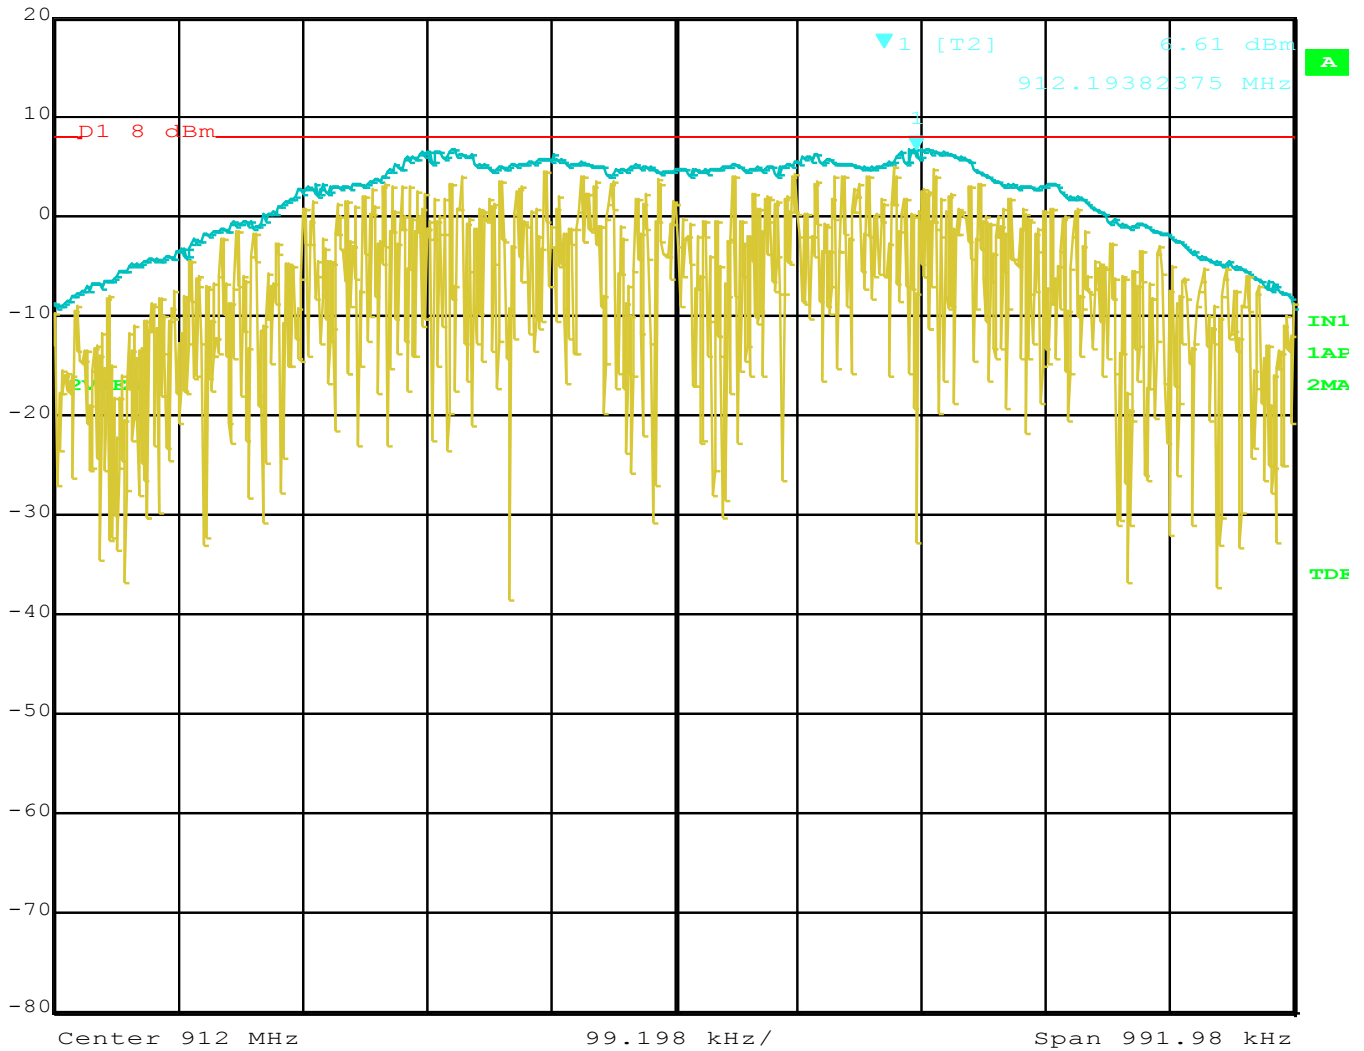

Comment A: PSD MID



**Brea Division**  
 114 Olinda Drive  
 Brea, CA 92823  
 (714) 579-0500


**Agoura Division**  
 2337 Troutdale Drive  
 Agoura, CA 91301  
 (818) 597-0600

**Silverado Division**  
 19121 El Toro Road  
 Silverado, CA 92676  
 (949) 589-0700

**Lake Forest Division**  
 20621 Pascal Way  
 Lake Forest, CA 92630  
 (949) 587-0400



Marker 1 [T2] RBW 50 kHz RF Att 50 dB  
 Ref Lvl 6.62 dBm VBW 200 kHz  
 20 dBm 922.19183581 MHz SWT 5 ms Unit dBm

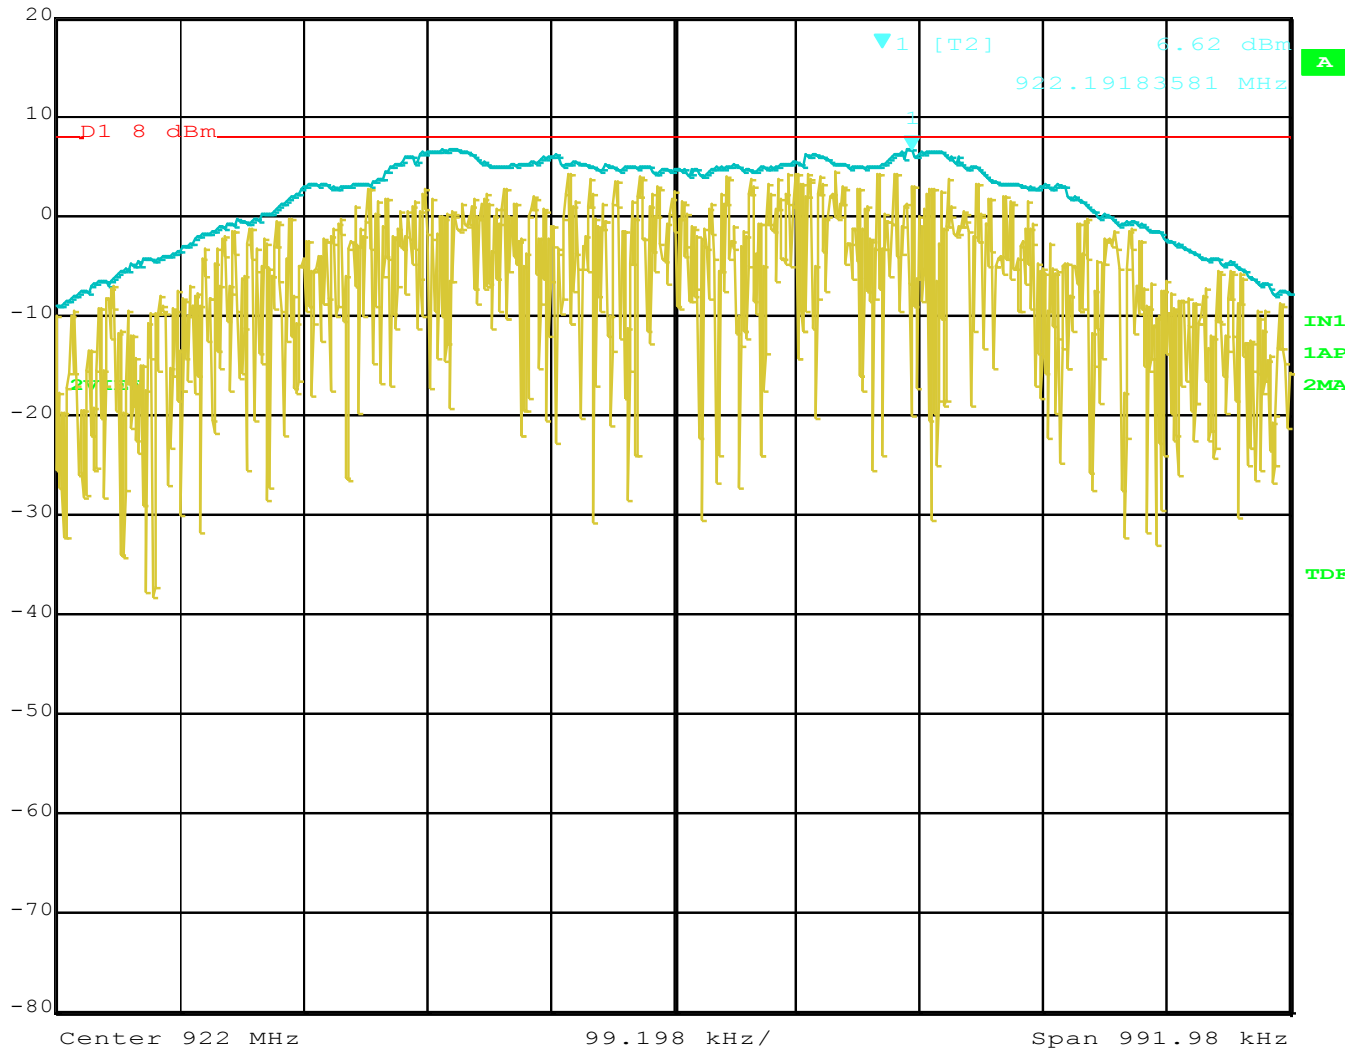

Comment A: PSD HI



**Brea Division**  
 114 Olinda Drive  
 Brea, CA 92823  
 (714) 579-0500

**Agoura Division**  
 2337 Troutdale Drive  
 Agoura, CA 91301  
 (818) 597-0600

**Silverado Division**  
 19121 El Toro Road  
 Silverado, CA 92676  
 (949) 589-0700

**Lake Forest Division**  
 20621 Pascal Way  
 Lake Forest, CA 92630  
 (949) 587-0400

***HARMONIC EMISSIONS IN NON-RESTRICTED FREQUENCY  
BANDS (IN 100KHZ BANDWIDTH) / CONDUCTED***

***DATA SHEETS***



---

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

## ***HARMONIC EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS***


**FCC 15.247**Company: Nortek  
EUT: Smoke Alarm  
Model: F-ADT-SMK-1Date: 5/10/2017  
Lab: R  
Test ENG: Shayan Aminmadani**Compatible Electronics, Inc. FAC-3 (Lab R)**

<b>Freq. (MHz)</b>	<b>Corrected Level (dBuV)</b>	<b>Limit (dBuV)</b>	<b>Margin (dB)</b>	<b>Cable Loss (dB)</b>	<b>Peak / QP / Avg</b>	<b>Comments</b>
1808.00	56.47	95.68	-39.05	0.352	Peak	Low Channel
1824.00	56.38	95.68	-39.40	0.352	Peak	Mid Channel
1844.00	56.09	95.73	-40.68	0.352	Peak	High Channel


**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400




# HARMONIC EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS LOW CHANNEL

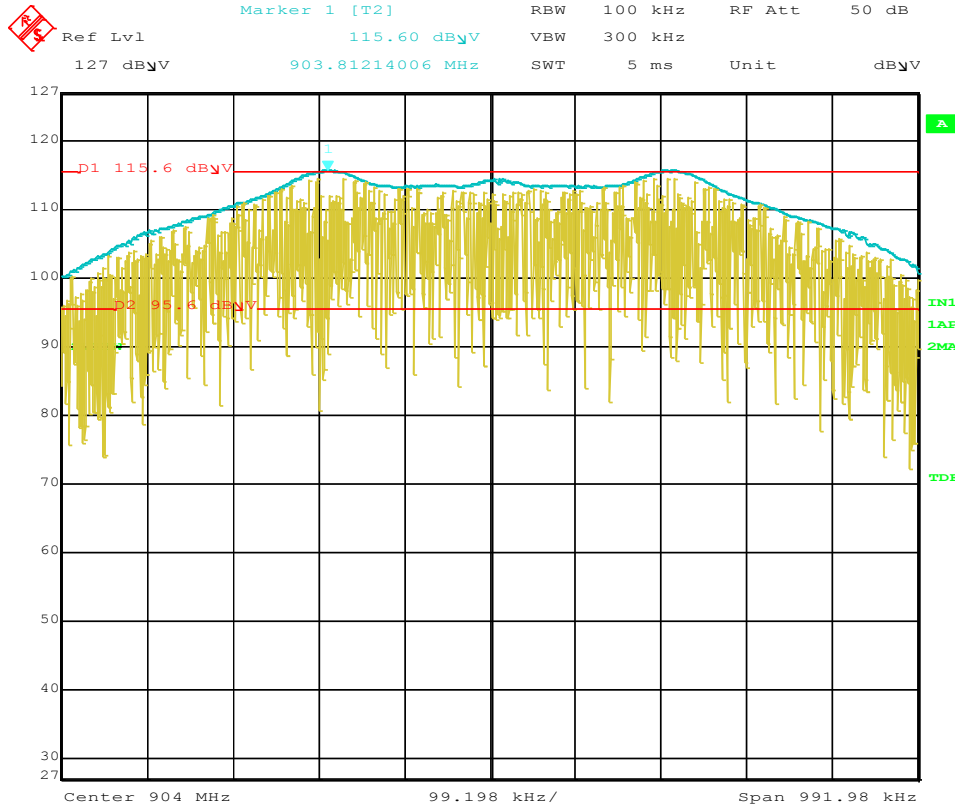

Comment A: AC LO REF

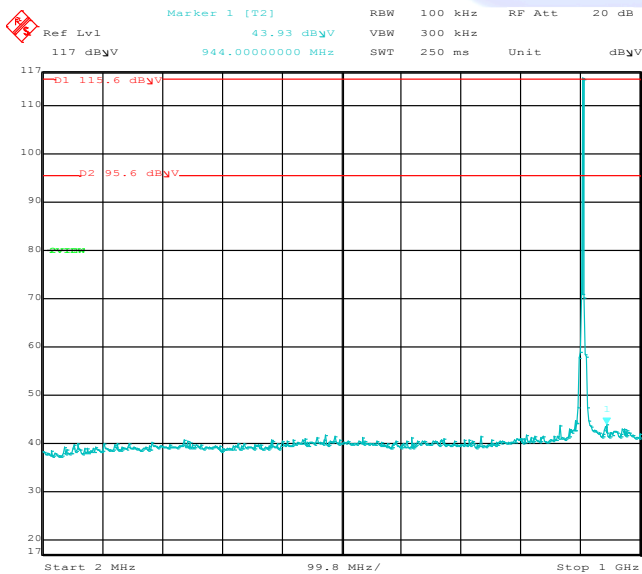


Comment A: AC LO

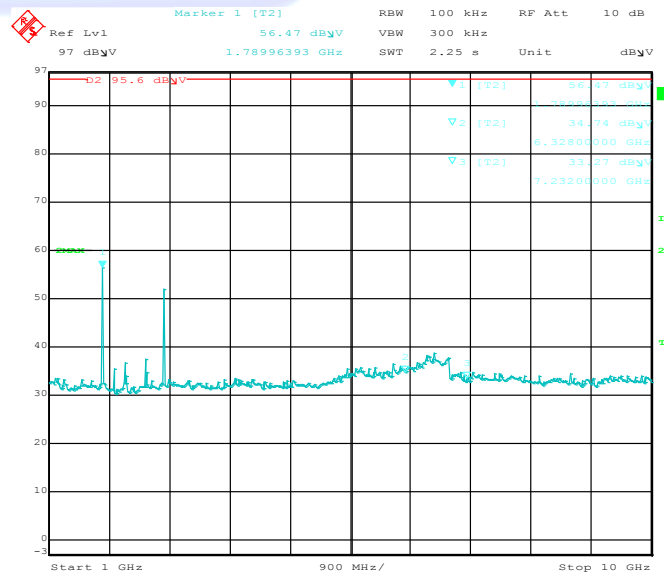


Comment A: AC LO




# HARMONIC EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS MID CHANNEL

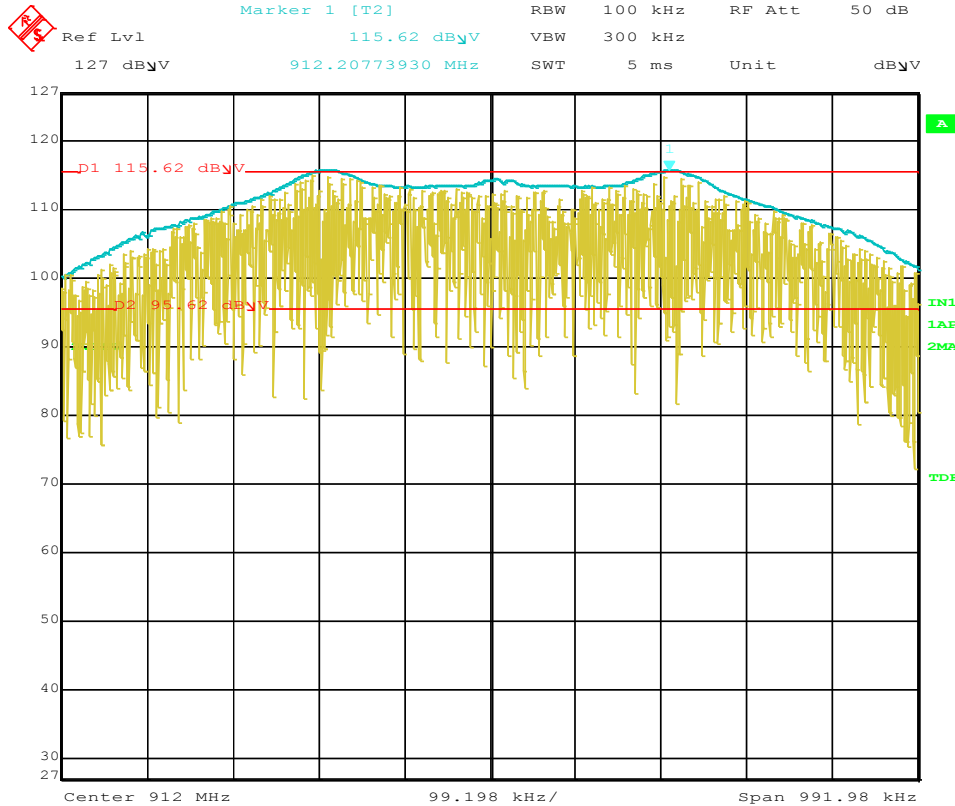

Comment A: AC MID REF

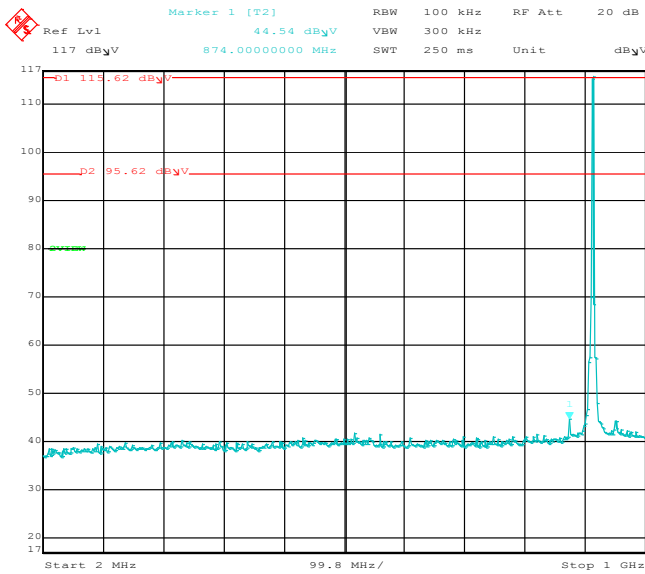


Comment A: AC MID

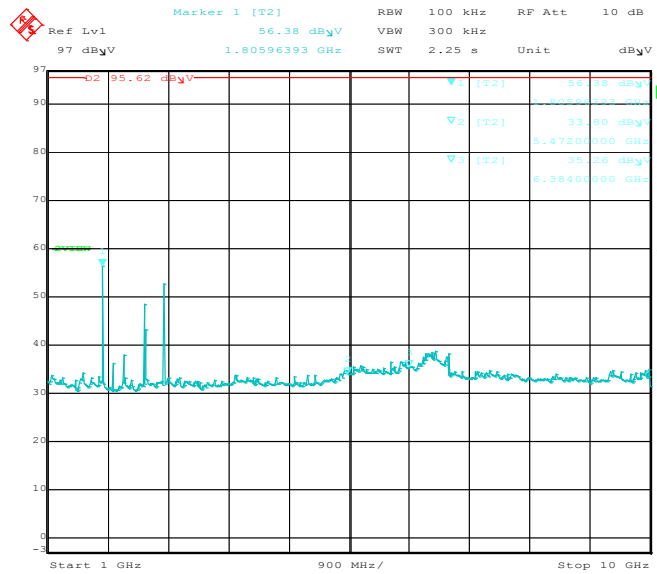


Comment A: AC MID




# HARMONIC EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS HIGH CHANNEL

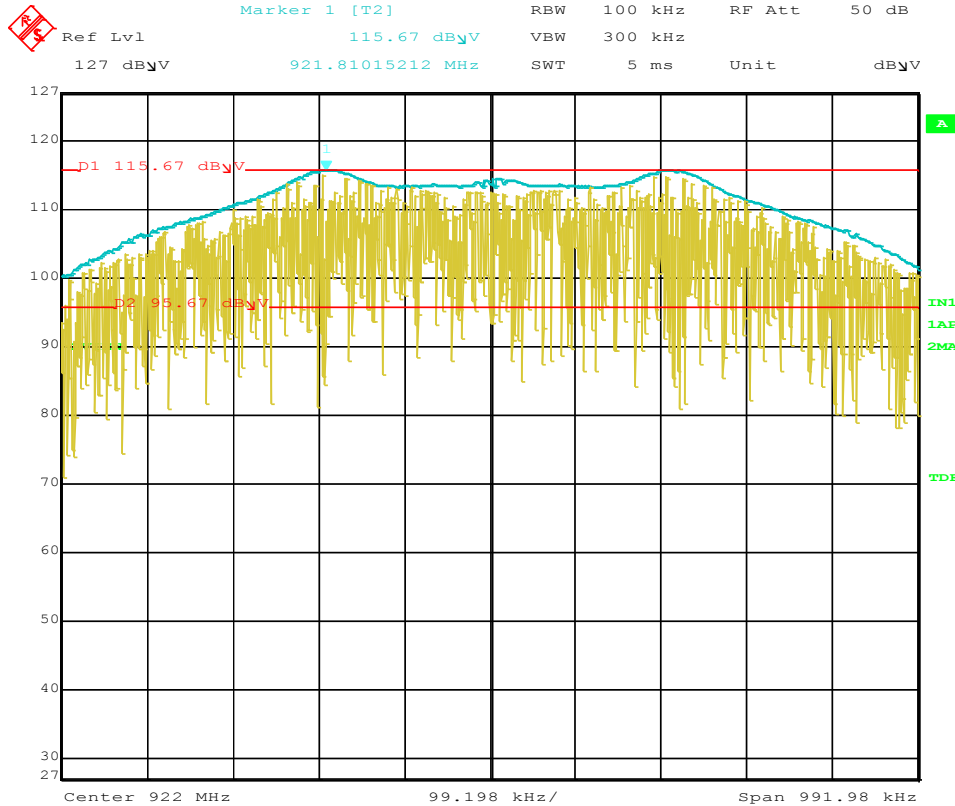

Comment A: AC HI REF

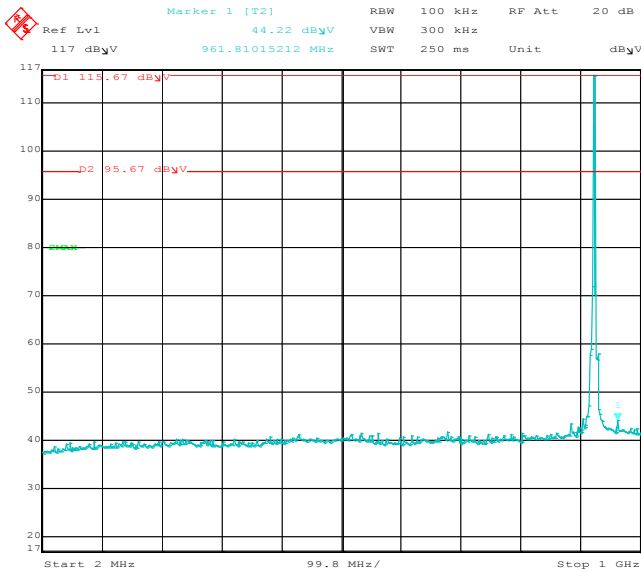

Comment A: AC HI

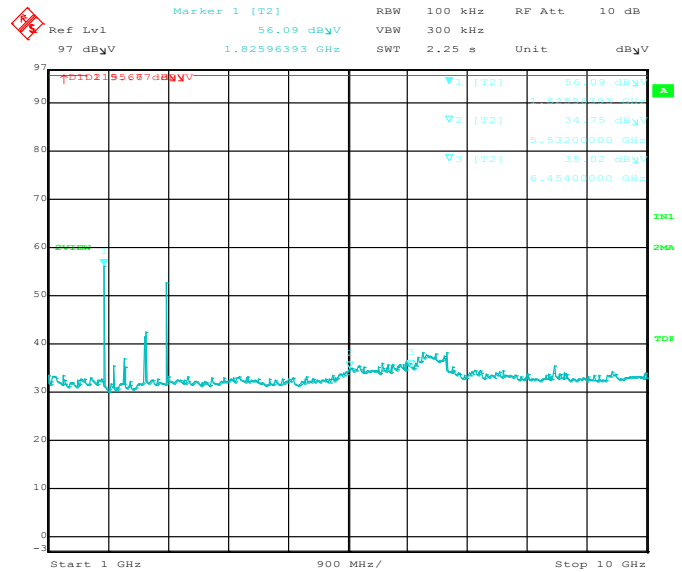

Comment A: AC HI



***EMISSIONS IN RESTRICTED FREQUENCY BANDS (RADIATED  
FIELD STRENGTH)***

***DATA SHEETS***



---

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

## HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

### Low Channel, Horizontal, X-Axis

**FCC 15.247**

Company: Nortek  
 EUT: Smoke Alarm  
 Model: F-ADT-SMK-1

Date: 5/11/2017  
 Lab: P  
 Test ENG: T. Oliver

**Compatible Electronics, Inc. FAC-3 ( Lab P )**

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2712.00	44.49	H	73.98	-29.49	Peak	1.06	296	In Restricted Band
2712.00	36.06	H	53.98	-17.92	Avg	1.06	296	
3616.00	46.91	H	73.98	-27.07	Peak	1.00	109	In Restricted Band
3616.00	37.58	H	53.98	-16.40	Avg	1.00	109	
4520.00	--	H	73.98	--	Peak	--	--	In Restricted Band
4520.00	--	H	53.98	--	Avg	--	--	No Emission Found
5424.00	45.06	H	73.98	-28.92	Peak	1.01	95	In Restricted Band
5424.00	33.45	H	53.98	-20.53	Avg	1.01	95	
8136.00	--	H	73.98	--	Peak	--	--	In Restricted Band
8136.00	--	H	53.98	--	Avg	--	--	No Emission Found
9040.00	--	H	73.98	--	Peak	--	--	In Restricted Band
9040.00	--	H	53.98	--	Avg	--	--	No Emission Found

Test distance  
 3 meter

=



## HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

### Low Channel, Vertical, X-Axis

**FCC 15.247**

Company: Nortek  
 EUT: Smoke Alarm  
 Model: F-ADT-SMK-1

Date: 5/10/2017  
 Lab: P  
 Test ENG: T. Oliver

**Compatible Electronics, Inc. FAC-3 ( Lab P )**

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2712.00	46.36	V	73.98	-27.62	Peak	1.23	39	In Restricted Band
2712.00	38.56	V	53.98	-15.42	Avg	1.23	39	
3616.00	49.65	V	73.98	-24.33	Peak	1.01	68	In Restricted Band
3616.00	41.47	V	53.98	-12.51	Avg	1.01	68	
4520.00	--	V	73.98	--	Peak	--	--	In Restricted Band
4520.00	--	V	53.98	--	Avg	--	--	No emission found
5424.00	45.32	V	73.98	-28.66	Peak	1.88	268	In Restricted Band
5424.00	33.48	V	53.98	-20.50	Avg	1.88	268	
8136.00	--	V	73.98	--	Peak	--	--	In Restricted Band
8136.00	--	V	53.98	--	Avg	--	--	No emission found
9040.00	--	V	73.98	--	Peak	--	--	In Restricted Band
9040.00	--	V	53.98	--	Avg	--	--	No emission found

Test distance  
 3 meter



## HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

### Low Channel, Horizontal, Y-Axis

**FCC 15.247**

Company: Nortek  
 EUT: Smoke Alarm  
 Model: F-ADT-SMK-1

Date: 5/11/2017  
 Lab: P  
 Test ENG: T. Oliver

**Compatible Electronics, Inc. FAC-3 ( Lab P )**

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2712.00	45.13	H	73.98	-28.85	Peak	1.23	102	In Restricted Band
2712.00	37.10	H	53.98	-16.88	Avg	1.23	102	
3616.00	46.14	H	73.98	-27.84	Peak	1.31	251	In Restricted Band
3616.00	35.89	H	53.98	-18.09	Avg	1.31	251	
4520.00	--	H	73.98	--	Peak	--	--	In Restricted Band
4520.00	--	H	53.98	--	Avg	--	--	No Emission Found
5424.00	46.88	H	73.98	-27.10	Peak	1.73	178	In Restricted Band
5424.00	36.15	H	53.98	-17.83	Avg	1.73	178	
8136.00	--	H	73.98	--	Peak	--	--	In Restricted Band
8136.00	--	H	53.98	--	Avg	--	--	No Emission Found
9040.00	--	H	73.98	--	Peak	--	--	In Restricted Band
9040.00	--	H	53.98	--	Avg	--	--	No Emission Found

Test distance  
 3 meter



## HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

### Low Channel, Vertical, Y-Axis

**FCC 15.247**

Company: Nortek  
 EUT: Smoke Alarm  
 Model: F-ADT-SMK-1

Date: 5/11/2017  
 Lab: P  
 Test ENG: T. Oliver

**Compatible Electronics, Inc. FAC-3 ( Lab P )**

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2712.00	43.31	V	73.98	-30.67	Peak	1.64	175	In Restricted Band
2712.00	34.88	V	53.98	-19.10	Avg	1.64	175	
3616.00	46.14	V	73.98	-27.84	Peak	1.41	299	In Restricted Band
3616.00	35.89	V	53.98	-18.09	Avg	1.41	299	
4520.00	--	V	73.98	--	Peak	--	--	In Restricted Band
4520.00	--	V	53.98	--	Avg	--	--	No Emission found
5424.00	45.55	V	73.98	-28.43	Peak	1.01	245	In Restricted Band
5424.00	33.31	V	53.98	-20.67	Avg	1.01	245	
8136.00	--	V	73.98	--	Peak	--	--	In Restricted Band
8136.00	--	V	53.98	--	Avg	--	--	No Emission found
9040.00	--	V	73.98	--	Peak	--	--	In Restricted Band
9040.00	--	V	53.98	--	Avg	--	--	No Emission found

Test distance  
 3 meter

**C**





## HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

### Low Channel, Horizontal, Z-Axis

**FCC 15.247**

Company: Nortek  
 EUT: Smoke Alarm  
 Model: F-ADT-SMK-1

Date: 5/11/2017  
 Lab: P  
 Test ENG: T. Oliver

**Compatible Electronics, Inc. FAC-3 ( Lab P )**

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2712.00	41.10	H	73.98	-32.88	Peak	1.24	55	In Restricted Band
2712.00	32.17	H	53.98	-21.81	Avg	1.24	55	
3616.00	46.65	H	73.98	-27.33	Peak	1.37	245	In Restricted Band
3616.00	37.51	H	53.98	-16.47	Avg	1.37	245	
4520.00	--	H	73.98	--	Peak	--	--	In Restricted Band
4520.00	--	H	53.98	--	Avg	--	--	No Emission Found
5424.00	44.68	H	73.98	-29.30	Peak	1.49	161	In Restricted Band
5424.00	33.15	H	53.98	-20.83	Avg	1.49	161	
8136.00	--	H	73.98	--	Peak	--	--	In Restricted Band
8136.00	--	H	53.98	--	Avg	--	--	No Emission Found
9040.00	--	H	73.98	--	Peak	--	--	In Restricted Band
9040.00	--	H	53.98	--	Avg	--	--	No Emission Found

Test distance  
 3 meter



## HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

### Low Channel, Vertical, Z-Axis

**FCC 15.247**

Company: Nortek  
 EUT: Smoke Alarm  
 Model: F-ADT-SMK-1

Date: 5/11/2017  
 Lab: P  
 Test ENG: T. Oliver

**Compatible Electronics, Inc. FAC-3 ( Lab P )**

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2712.00	44.74	V	73.98	-29.24	Peak	1.69	139	In Restricted Band
2712.00	36.46	V	53.98	-17.52	Avg	1.69	139	
3616.00	48.24	V	73.98	-25.74	Peak	1.25	300	In Restricted Band
3616.00	39.65	V	53.98	-14.33	Avg	1.25	300	
4520.00	--	V	73.98	--	Peak	--	--	In Restricted Band
4520.00	--	V	53.98	--	Avg	--	--	No Emission found
5424.00	42.79	V	73.98	-31.19	Peak	3.45	291	In Restricted Band
5424.00	29.63	V	53.98	-24.35	Avg	3.45	291	
8136.00	--	V	73.98	--	Peak	--	--	In Restricted Band
8136.00	--	V	53.98	--	Avg	--	--	No Emission found
9040.00	--	V	73.98	--	Peak	--	--	In Restricted Band
9040.00	--	V	53.98	--	Avg	--	--	No Emission found

Test distance  
 3 meter



## HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

### Mid Channel, Horizontal, X-Axis

**FCC 15.247**

Company: Nortek  
 EUT: Smoke Alarm  
 Model: F-ADT-SMK-1

Date: 5/12/2017  
 Lab: P  
 Test ENG: T. Oliver

**Compatible Electronics, Inc. FAC-3 ( Lab P )**

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2736.00	46.02	H	73.98	-27.96	Peak	1.06	94	In Restricted Band
2736.00	37.88	H	53.98	-16.10	Avg	1.06	94	
3648.00	47.49	H	73.98	-26.49	Peak	1.06	109	In Restricted Band
3648.00	38.36	H	53.98	-15.62	Avg	1.06	109	
4560.00	41.15	H	73.98	-32.83	Peak	1.00	312	In Restricted Band
4560.00	28.71	H	53.98	-25.27	Avg	1.00	312	
7296.00	--	H	73.98	--	Peak	--	--	In Restricted Band
7296.00	--	H	53.98	--	Avg	--	--	No emission found
8208.00	--	H	73.98	--	Peak	--	--	In Restricted Band
8208.00	--	H	53.98	--	Avg	--	--	No emission found
9120.00	--	H	73.98	--	Peak	--	--	In Restricted Band
9120.00	--	H	53.98	--	Avg	--	--	No emission found

Test distance  
 3 meter



## HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

### Mid Channel, Vertical, X-Axis

**FCC 15.247**

Company: Nortek  
 EUT: Smoke Alarm  
 Model: F-ADT-SMK-1

Date: 5/12/2017  
 Lab: P  
 Test ENG: T. Oliver

**Compatible Electronics, Inc. FAC-3 ( Lab P )**

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2736.00	46.30	V	73.98	-27.68	Peak	1.39	246	In Restricted Band
2736.00	38.52	V	53.98	-15.46	Avg	1.39	246	
3648.00	50.25	V	73.98	-23.73	Peak	1.17	116	In Restricted Band
3648.00	42.19	V	53.98	-11.79	Avg	1.17	116	
4560.00	47.78	V	73.98	-26.20	Peak	1.08	293	In Restricted Band
4560.00	38.32	V	53.98	-15.66	Avg	1.08	293	
7296.00	--	V	73.98	--	Peak	--	--	In Restricted Band
7296.00	--	V	53.98	--	Avg	--	--	No emission found
8208.00	--	V	73.98	--	Peak	--	--	In Restricted Band
8208.00	--	V	53.98	--	Avg	--	--	No emission found
9120.00	--	V	73.98	--	Peak	--	--	In Restricted Band
9120.00	--	V	53.98	--	Avg	--	--	No emission found

Test distance  
 3 meter



## HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS Mid Channel, Horizontal, Y-Axis

**FCC 15.247**

Company: Nortek  
 EUT: Smoke Alarm  
 Model: F-ADT-SMK-1

Date: 5/12/2017  
 Lab: P  
 Test ENG: T. Oliver

**Compatible Electronics, Inc. FAC-3 ( Lab P )**

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2736.00	45.08	H	73.98	-28.90	Peak	1.63	70	In Restricted Band
2736.00	37.29	H	53.98	-16.69	Avg	1.63	70	
3648.00	49.71	H	73.98	-24.27	Peak	1.75	217	In Restricted Band
3648.00	41.21	H	53.98	-12.77	Avg	1.75	217	
4560.00	47.14	H	73.98	-26.84	Peak	1.14	225	In Restricted Band
4560.00	36.95	H	53.98	-17.03	Avg	1.14	225	
7296.00	--	H	73.98	--	Peak	--	--	In Restricted Band
7296.00	--	H	53.98	--	Avg	--	--	No emission found
8208.00	--	H	73.98	--	Peak	--	--	In Restricted Band
8208.00	--	H	53.98	--	Avg	--	--	No emission found
9120.00	--	H	73.98	--	Peak	--	--	In Restricted Band
9120.00	--	H	53.98	--	Avg	--	--	No emission found

Test distance  
 3 meter



## HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

### Mid Channel, Vertical, Y-Axis

**FCC 15.247**

Company: Nortek  
 EUT: Smoke Alarm  
 Model: F-ADT-SMK-1

Date: 5/12/2017  
 Lab: P  
 Test ENG: T. Oliver

**Compatible Electronics, Inc. FAC-3 ( Lab P )**

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2736.00	46.58	V	73.98	-27.40	Peak	1.45	208	In Restricted Band
2736.00	38.88	V	53.98	-15.10	Avg	1.45	208	
3648.00	47.36	V	73.98	-26.62	Peak	1.07	302	In Restricted Band
3648.00	37.83	V	53.98	-16.15	Avg	1.07	302	
4560.00	43.78	V	73.98	-30.20	Peak	1.81	216	In Restricted Band
4560.00	32.44	V	53.98	-21.54	Avg	1.81	216	
7296.00	--	V	73.98	--	Peak	--	--	In Restricted Band
7296.00	--	V	53.98	--	Avg	--	--	No emission found
8208.00	--	V	73.98	--	Peak	--	--	In Restricted Band
8208.00	--	V	53.98	--	Avg	--	--	No emission found
9120.00	--	V	73.98	--	Peak	--	--	In Restricted Band
9120.00	--	V	53.98	--	Avg	--	--	No emission found

Test distance  
 3 meter



## HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS Mid Channel, Horizontal, Z-Axis

**FCC 15.247**

Company: Nortek  
 EUT: Smoke Alarm  
 Model: F-ADT-SMK-1

Date: 5/12/2017  
 Lab: P  
 Test ENG: T. Oliver

**Compatible Electronics, Inc. FAC-3 ( Lab P )**

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2736.00	44.06	H	73.98	-29.92	Peak	1.01	288	In Restricted Band
2736.00	35.51	H	53.98	-18.47	Avg	1.01	288	
3648.00	44.02	H	73.98	-29.96	Peak	1.39	245	In Restricted Band
3648.00	31.95	H	53.98	-22.03	Avg	1.39	245	
4560.00	--	H	73.98	--	Peak	--	--	In Restricted Band
4560.00	--	H	53.98	--	Avg	--	--	No emission found
7296.00	--	H	73.98	--	Peak	--	--	In Restricted Band
7296.00	--	H	53.98	--	Avg	--	--	No emission found
8208.00	--	H	73.98	--	Peak	--	--	In Restricted Band
8208.00	--	H	53.98	--	Avg	--	--	No emission found
9120.00	--	H	73.98	--	Peak	--	--	In Restricted Band
9120.00	--	H	53.98	--	Avg	--	--	No emission found

Test distance  
 3 meter



## HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

### Mid Channel, Vertical, Z-Axis

**FCC 15.247**

Company: Nortek  
 EUT: Smoke Alarm  
 Model: F-ADT-SMK-1

Date: 5/12/2017  
 Lab: P  
 Test ENG: T. Oliver

**Compatible Electronics, Inc. FAC-3 ( Lab P )**

Freq. (MHz)	Level (dBUV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2736.00	46.02	V	73.98	-27.96	Peak	1.24	119	In Restricted Band
2736.00	38.47	V	53.98	-15.51	Avg	1.24	119	
3648.00	48.56	V	73.98	-25.42	Peak	1.01	299	In Restricted Band
3648.00	39.89	V	53.98	-14.09	Avg	1.01	299	
4560.00	--	V	73.98	--	Peak	--	--	In Restricted Band
4560.00	--	V	53.98	--	Avg	--	--	No emission found
7296.00	--	V	73.98	--	Peak	--	--	In Restricted Band
7296.00	--	V	53.98	--	Avg	--	--	No emission found
8208.00	--	V	73.98	--	Peak	--	--	In Restricted Band
8208.00	--	V	53.98	--	Avg	--	--	No emission found
9120.00	--	V	73.98	--	Peak	--	--	In Restricted Band
9120.00	--	V	53.98	--	Avg	--	--	No emission found

Test distance  
 3 meter





## HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

### High Channel, Horizontal, X-Axis

**FCC 15.247**

Company: Nortek  
 EUT: Smoke Alarm  
 Model: F-ADT-SMK-1

Date: 5/12/2017  
 Lab: P  
 Test ENG: T. Oliver

**Compatible Electronics, Inc. FAC-3 ( Lab P )**

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2766.00	46.95	H	73.98	-27.03	Peak	1.41	299	In Restricted Band
2766.00	39.15	H	53.98	-14.83	Avg	1.41	299	
3688.00	45.21	H	73.98	-28.77	Peak	1.14	130	In Restricted Band
3688.00	35.52	H	53.98	-18.46	Avg	1.14	130	
4610.00	46.69	H	73.98	-27.29	Peak	1.06	179	In Restricted Band
4610.00	37.80	H	53.98	-16.18	Avg	1.06	179	
7376.00	--	H	73.98	--	Peak	--	--	In Restricted Band
7376.00	--	H	53.98	--	Avg	--	--	No emission found
8298.00	--	H	73.98	--	Peak	--	--	In Restricted Band
8298.00	--	H	53.98	--	Avg	--	--	No emission found

Test distance  
 3 meter



## HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

### High Channel, Vertical, X-Axis

**FCC 15.247**

Company: Nortek  
 EUT: Smoke Alarm  
 Model: F-ADT-SMK-1

Date: 5/12/2017  
 Lab: P  
 Test ENG: T. Oliver

**Compatible Electronics, Inc. FAC-3 ( Lab P )**

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2766.00	48.72	V	73.98	-25.26	Peak	1.04	37	In Restricted Band
2766.00	41.09	V	53.98	-12.89	Avg	1.04	37	
3688.00	47.80	V	73.98	-26.18	Peak	1.07	117	In Restricted Band
3688.00	39.71	V	53.98	-14.27	Avg	1.07	117	
4610.00	48.87	V	73.98	-25.11	Peak	1.68	291	In Restricted Band
4610.00	40.67	V	53.98	-13.31	Avg	1.68	291	
7376.00	--	V	73.98	--	Peak	--	--	In Restricted Band
7376.00	--	V	53.98	--	Avg	--	--	No emission found
8298.00	--	V	73.98	--	Peak	--	--	In Restricted Band
8298.00	--	V	53.98	--	Avg	--	--	No emission found

Test distance  
 3 meter



## *HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS*

### *High Channel, Horizontal, Y-Axis*

**FCC 15.247**

Company: Nortek  
 EUT: Smoke Alarm  
 Model: F-ADT-SMK-1

Date: 5/12/2017  
 Lab: P  
 Test ENG: T. Oliver

**Compatible Electronics, Inc. FAC-3 ( Lab P )**

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2766.00	48.47	H	73.98	-25.51	Peak	1.45	223	In Restricted Band
2766.00	40.72	H	53.98	-13.26	Avg	1.45	223	
3688.00	44.95	H	73.98	-29.03	Peak	1.06	164	In Restricted Band
3688.00	35.72	H	53.98	-18.26	Avg	1.06	164	
4610.00	49.64	H	73.98	-24.34	Peak	1.14	132	In Restricted Band
4610.00	41.70	H	53.98	-12.28	Avg	1.14	132	
7376.00	--	H	73.98	--	Peak	--	--	In Restricted Band
7376.00	--	H	53.98	--	Avg	--	--	No emission found
8298.00	--	H	73.98	--	Peak	--	--	In Restricted Band
8298.00	--	H	53.98	--	Avg	--	--	No emission found

Test distance  
 3 meter



## HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

### High Channel, Vertical, Y-Axis

**FCC 15.247**

Company: Nortek  
 EUT: Smoke Alarm  
 Model: F-ADT-SMK-1

Date: 5/12/2017  
 Lab: P  
 Test ENG: T. Oliver

**Compatible Electronics, Inc. FAC-3 ( Lab P )**

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2766.00	46.40	V	73.98	-27.58	Peak	1.08	248	In Restricted Band
2766.00	38.37	V	53.98	-15.61	Avg	1.08	248	
3688.00	45.21	V	73.98	-28.77	Peak	1.15	332	In Restricted Band
3688.00	34.71	V	53.98	-19.27	Avg	1.15	332	
4610.00	45.93	V	73.98	-28.05	Peak	1.14	170	In Restricted Band
4610.00	36.37	V	53.98	-17.61	Avg	1.14	170	
7376.00	--	V	73.98	--	Peak	--	--	In Restricted Band
7376.00	--	V	53.98	--	Avg	--	--	No emission found
8298.00	--	V	73.98	--	Peak	--	--	In Restricted Band
8298.00	--	V	53.98	--	Avg	--	--	No emission found

Test distance  
 3 meter



## HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

### High Channel, Horizontal, Z-Axis

**FCC 15.247**

Company: Nortek  
 EUT: Smoke Alarm  
 Model: F-ADT-SMK-1

Date: 5/12/2017  
 Lab: P  
 Test ENG: T. Oliver

**Compatible Electronics, Inc. FAC-3 ( Lab P )**

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2766.00	46.96	H	73.98	-27.02	Peak	1.95	59	In Restricted Band
2766.00	38.77	H	53.98	-15.21	Avg	1.95	59	
3688.00	46.49	H	73.98	-27.49	Peak	1.56	175	In Restricted Band
3688.00	37.35	H	53.98	-16.63	Avg	1.56	175	
4610.00	45.28	H	73.98	-28.70	Peak	1.01	140	In Restricted Band
4610.00	35.38	H	53.98	-18.60	Avg	1.01	140	
7376.00	--	H	73.98	--	Peak	--	--	In Restricted Band
7376.00	--	H	53.98	--	Avg	--	--	No emission found
8298.00	--	H	73.98	--	Peak	--	--	In Restricted Band
8298.00	--	H	53.98	--	Avg	--	--	No emission found

Test distance  
 3 meter



## HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

### High Channel, Vertical, Z-Axis

**FCC 15.247**

Company: Nortek  
 EUT: Smoke Alarm  
 Model: F-ADT-SMK-1

Date: 5/12/2017  
 Lab: P  
 Test ENG: T. Oliver

**Compatible Electronics, Inc. FAC-3 ( Lab P )**

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2766.00	47.38	V	73.98	-26.60	Peak	1.16	107	In Restricted Band
2766.00	39.45	V	53.98	-14.53	Avg	1.16	107	
3688.00	44.95	V	73.98	-29.03	Peak	1.00	299	In Restricted Band
3688.00	35.75	V	53.98	-18.23	Avg	1.00	299	
4610.00	47.98	V	73.98	-26.00	Peak	1.35	84	In Restricted Band
4610.00	38.99	V	53.98	-14.99	Avg	1.35	84	
7376.00	--	V	73.98	--	Peak	--	--	In Restricted Band
7376.00	--	V	53.98	--	Avg	--	--	No emission found
8298.00	--	V	73.98	--	Peak	--	--	In Restricted Band
8298.00	--	V	53.98	--	Avg	--	--	No emission found

Test distance  
 3 meter



***EMISSIONS RADIATED OUTSIDE OF THE FUNDAMENTAL  
FREQUENCY BAND AT BAND EDGES***

***DATA SHEETS***



---

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

## BAND EDGES- HORIZONTAL

**FCC 15.247**Company: Nortek  
EUT: Smoke Alarm  
Model: F-ADT-SMK-1Date: 5/25/2017  
Lab: P  
Test ENG: Torey Oliver**Compatible Electronics, Inc. FAC-3 ( Lab P )**

Freq. (MHz)	Level (dB $\mu$ V)	Pol	Limit (dB $\mu$ V)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
904.00	107.79	H	--	--	Peak	1.00	360	Fundamental of Low Channel
902.00	61.24	H	87.79	-26.55	Delta	1.00	360	From Peak
922.00	107.91	H	--	--	Peak	1.00	360	Fundamental of High Channel
928.62	47.26	H	87.91	-40.65	Delta	1.00	360	From Peak

Test Distance  
3 Meters



## BAND EDGES- VERTICAL


**FCC 15.247**Company: Nortek  
EUT: Smoke Alarm  
Model: F-ADT-SMK-1Date: 5/25/2017  
Lab: P  
Test ENG: Torey Oliver**Compatible Electronics, Inc. FAC-3 ( Lab P )**

Freq. (MHz)	Level (dB $\mu$ V)	Pol	Limit (dB $\mu$ V)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
904.00	97.54	V	--	--	Peak	1.18	103	Fundamental of Low Channel
902.00	52.71	V	77.54	-24.83	Delta	1.18	103	From Peak
922.00	98.23	V	--	--	Peak	1.18	103	Fundamental of High Channel
928.18	40.84	V	78.23	-37.39	Delta	1.18	103	From Peak

Test Distance  
3 Meters

## LOWER BAND EDGE (Horizontal)

Max/Ref Lvl	Marker 1 [T2]	RBW	100 kHz	RF Att	0 dB
112 dB $\mu$ V	107.79 dB $\mu$ V	VBW	300 kHz		
72 dB $\mu$ V	904.23567134 MHz	SWT	5 ms	Unit	dB $\mu$ V

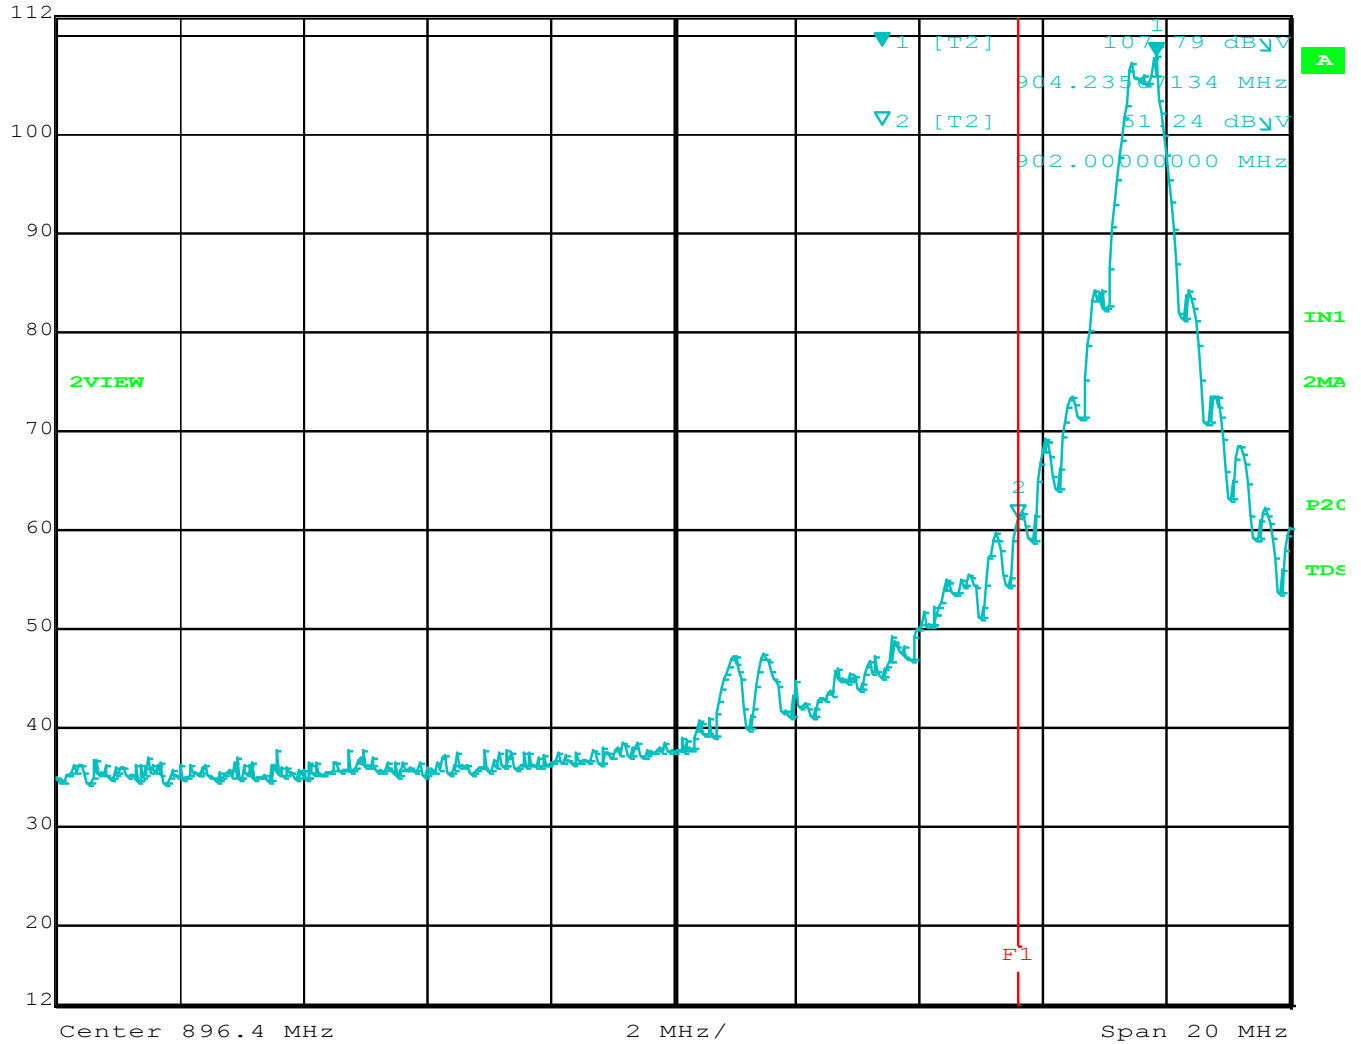


Comment A: Lower Band Edge Horizontal



## LOWER BAND EDGE (Vertical)


Max/Ref Lvl	Marker 1 [T3]	RBW	100 kHz	RF Att	0 dB
112 dB $\mu$ V	97.54 dB $\mu$ V	VBW	300 kHz		
72 dB $\mu$ V	904.23567134 MHz	SWT	5 ms	Unit	dB $\mu$ V

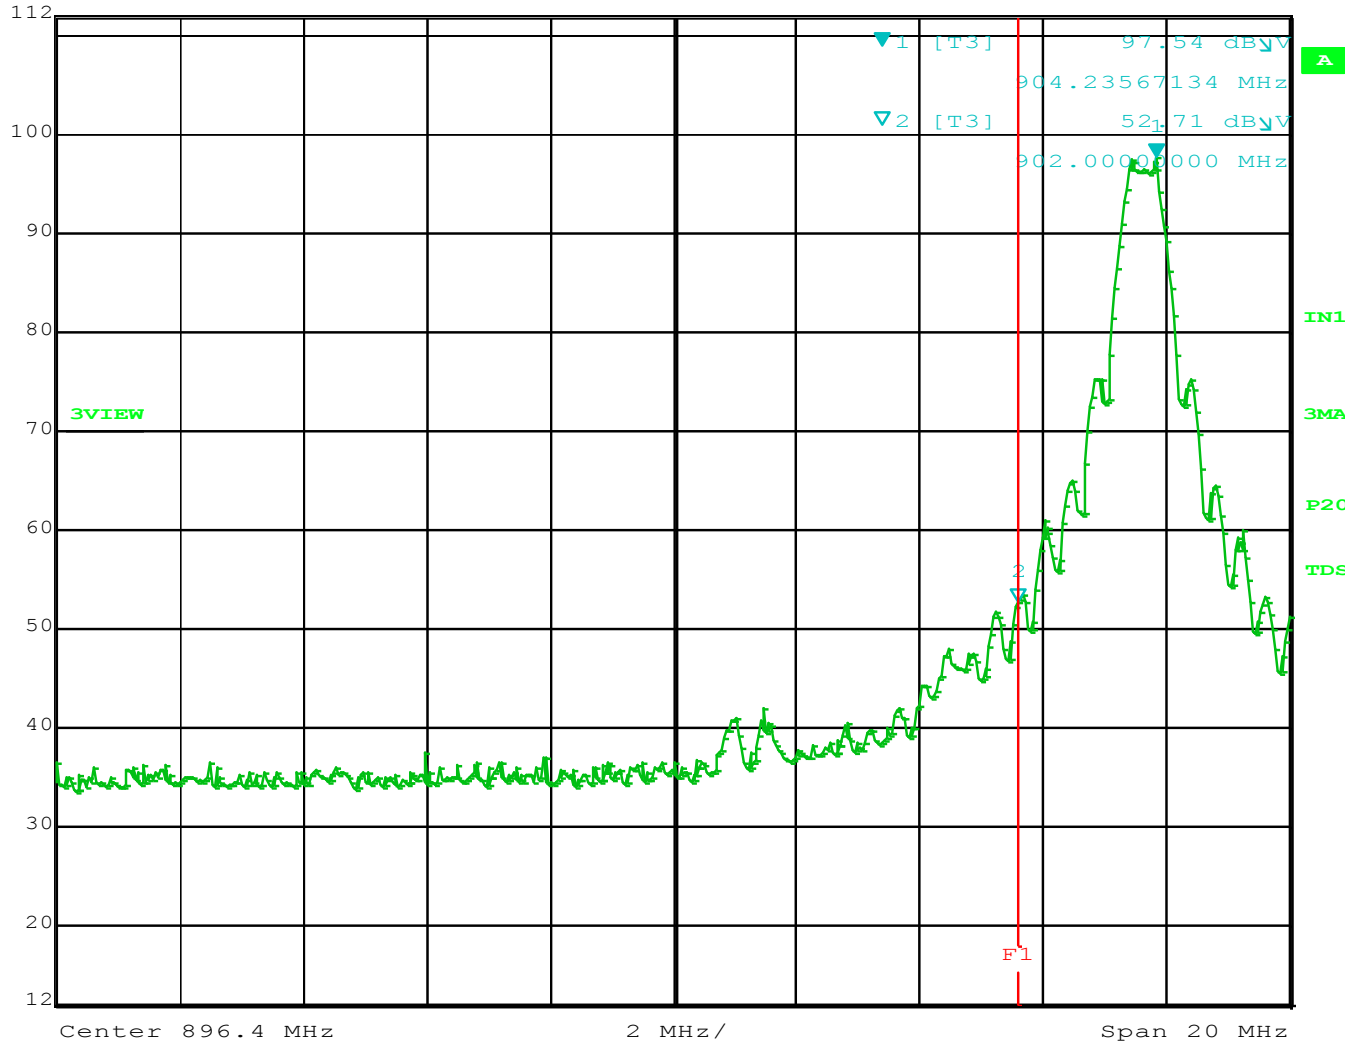

Comment A: Lower Band Edge Vertical



## UPPER BAND EDGE (Horizontal)

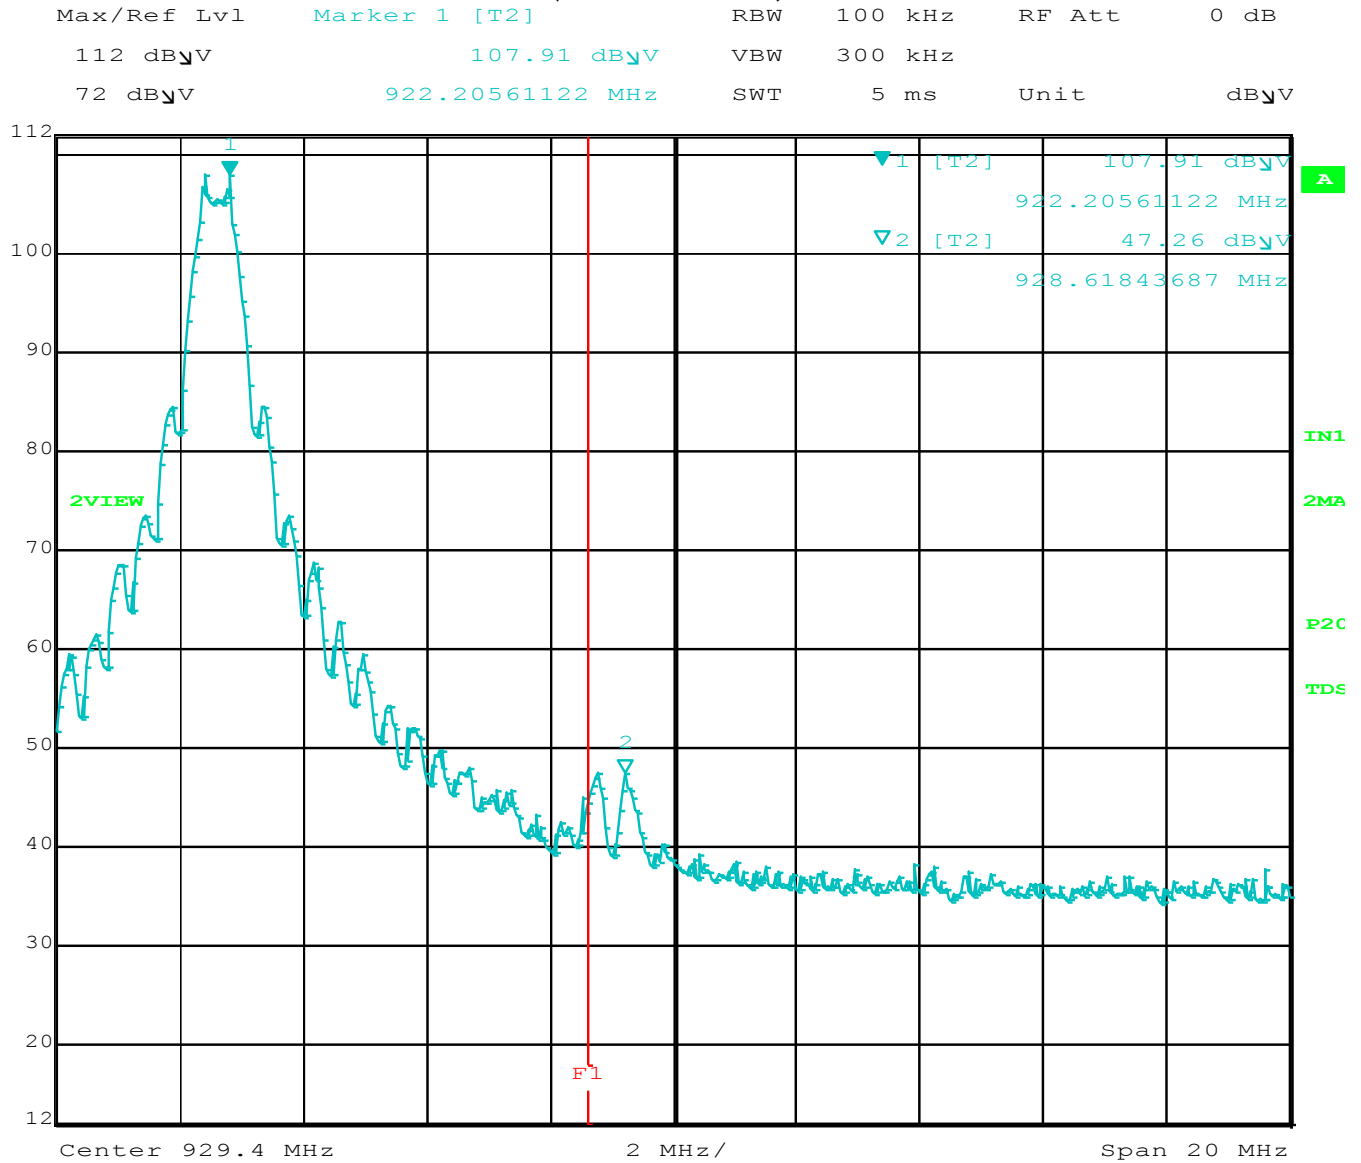


Comment A: Upper Band Edge Horizontal



## UPPER BAND EDGE (Vertical)

Max/Ref Lvl	Marker 1 [T3]	RBW	100 kHz	RF Att	0 dB
112 dB $\mu$ V	98.23 dB $\mu$ V	VBW	300 kHz		
72 dB $\mu$ V	921.80480962 MHz	SWT	5 ms	Unit	dB $\mu$ V

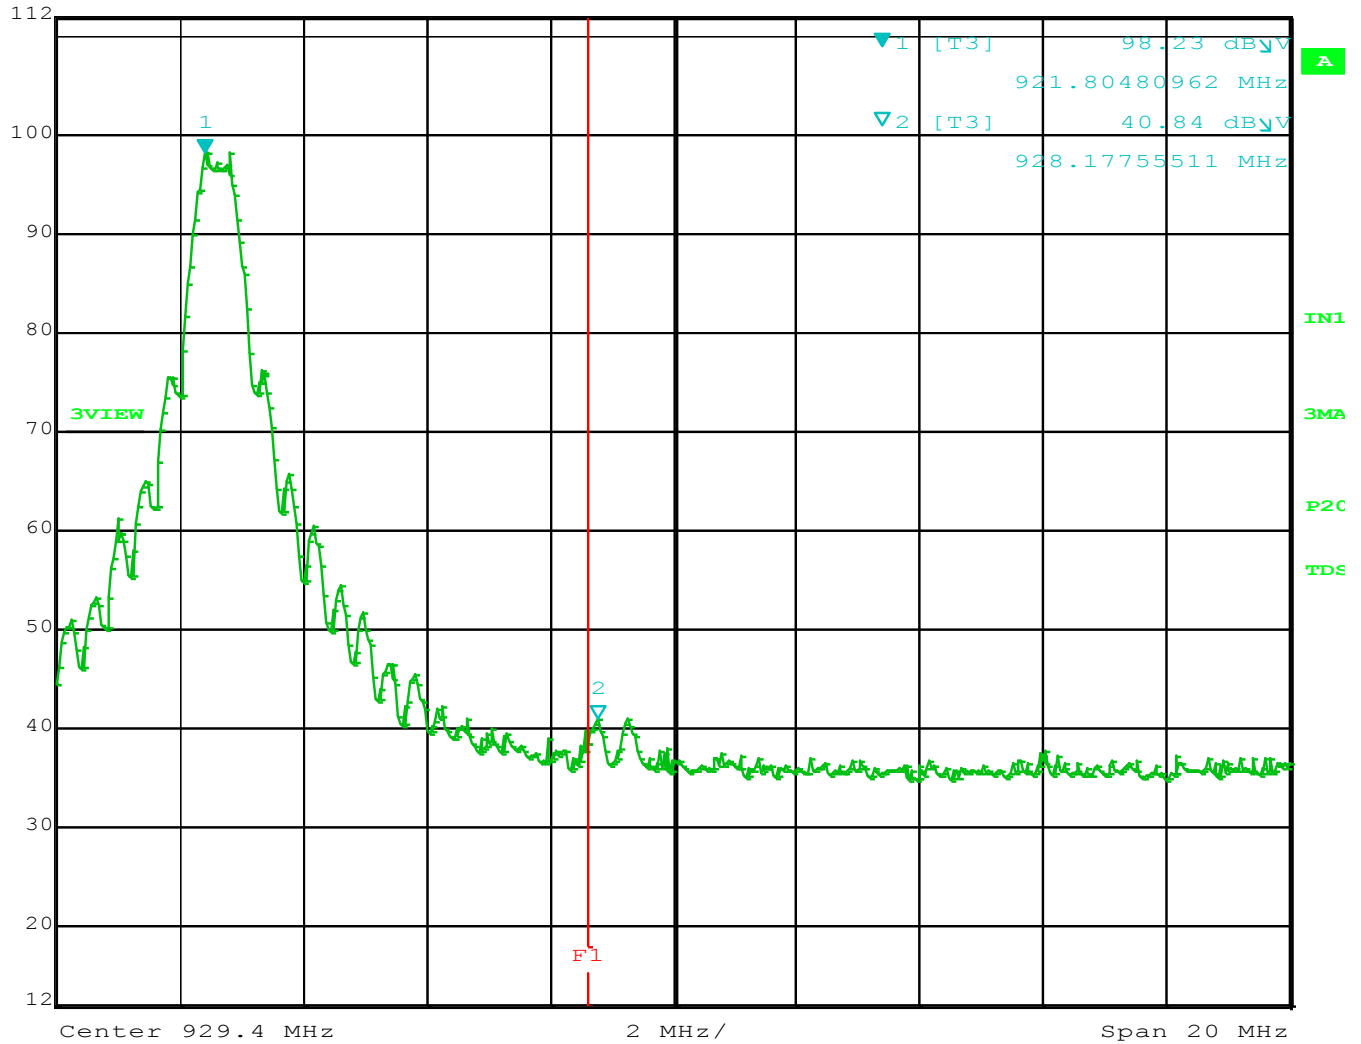

Comment A: Upper Band Edge Vertical



## ***OCCUPIED BANDWIDTH***




## IC BANDWIDTH

**RSS GEN**


Company:	Nortek	Date:	5/22/2017
EUT:	Smoke Alarm	Lab:	R
Model:	F-ADT-SMK-1	Test ENG:	Torey Oliver

**Compatible Electronics, Inc. FAC-3 (Lab R)**


Freq. (MHz)	Measured BW (kHz)	Comments
904	889.78	
912	889.78	
922	893.79	

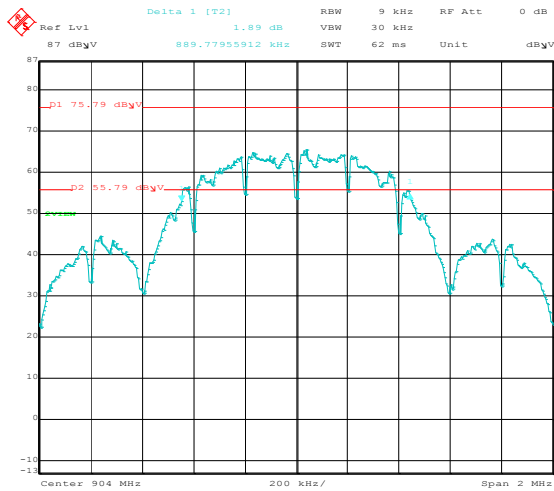

Comment A: Low Channel ICBW

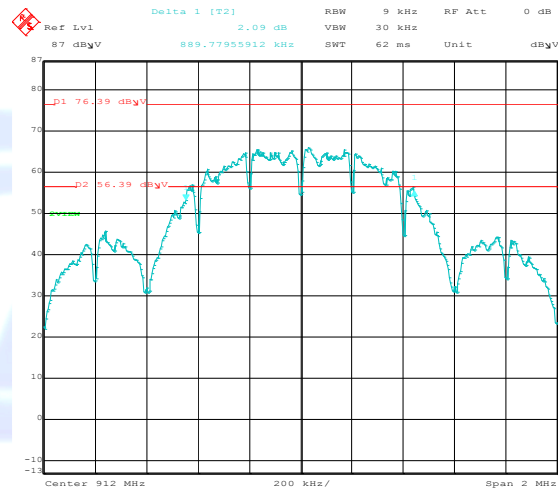

Comment A: Middle Channel ICBW

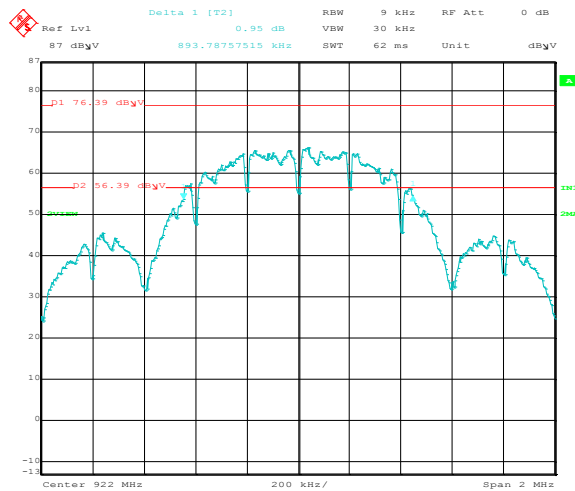

Comment A: High Channel ICBW

