



FCC TEST REPORT

FCC ID: EF400212

IC: 1078A-00212

Product	:	Wireless Transmitter
Model Name	:	SC-WIR-TX
Additional model	:	SC-WIR-RX, PAS-WIR-RX, PAS-WIR-TX
Brand	:	N/A
Report No.	:	PTC20110303604E-FC01
Prepared for		
Nortek Security & Control LLC		
5919 Sea Otter Place, STE 100, Carlsbad CA 92010, United States		
Prepared by		
Precise Testing & Certification Co., Ltd.		
Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China		



1 Test Result Certification

Applicant's name : Nortek Security & Control LLC

Address : 5919 Sea Otter Place, STE 100, Carlsbad CA 92010, United States

Manufacture's name : Nortek Security & Control LLC

Address : 5919 Sea Otter Place, STE 100, Carlsbad CA 92010, United States

Product name : Wireless Transmitter

Model name : SC-WIR-TX

Additional model : SC-WIR-RX, PAS-WIR-RX, PAS-WIR-TX

Standards : FCC CFR47 Part 15 Section 15.407
RSS-247 Issue 2: February 2017
RSS-Gen Issue 5 April 2018

Test procedure : ANSI C63.10:2013

Test Date : Oct. 21, 2020 ~ Feb. 05, 2021

Date of Issue : Feb. 05, 2021

Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

A handwritten signature in black ink that reads "Leo Yang".

Leo Yang / Engineer

Technical Manager:

A handwritten signature in black ink that reads "Chris Du".

Chris Du / Manager



Contents

	Page
1 TEST RESULT CERTIFICATION.....	2
2 TEST SUMMARY	5
2.1 TEST SITE.....	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF E.U.T.	6
3.2 CHANNEL LIST.....	6
4 EQUIPMENT DURING TEST.....	7
4.1 EQUIPMENTS LIST	7
4.2 DESCRIPTION OF SUPPORT UNITS	8
4.3 MEASUREMENT UNCERTAINTY	8
5 CONDUCTED EMISSION	9
5.1 CONDUCTED POWER LINE EMISSION LIMIT.....	9
5.2 EUT OPERATION	9
5.3 TEST SETUP	9
5.4 TEST PROCEDURE	9
5.5 SUMMARY OF TEST RESULTS	10
6 RADIATED SPURIOUS EMISSIONS	13
6.1 EUT OPERATION	13
6.2 TEST SETUP	14
6.3 SPECTRUM ANALYZER SETUP	15
6.4 TEST PROCEDURE	16
6.5 SUMMARY OF TEST RESULTS	17
7 OCCUPIED BANDWIDTH	22
7.1 TEST LIMIT.....	22
7.2 TEST PROCEDURE	22
7.3 MEASUREMENT EQUIPMENT USED.....	22
7.4 TEST RESULT	22
8 PEAK OUTPUT POWER	30
8.1 TEST LIMIT.....	30
8.2 TEST PROCEDURE	30
8.3 MEASUREMENT EQUIPMENT USED.....	30
8.4 TEST RESULT	30
9 POWER SPECTRAL DENSITY.....	33
9.1 TEST LIMIT.....	33
9.2 TEST PROCEDURE	33
9.3 MEASUREMENT EQUIPMENT USED.....	33
9.4 TEST RESULT	33
10 CONDUCTED BAND EDGE.....	38



10.1	TEST SETUP	38
10.2	TEST PROCEDURE	38
10.3	LIMIT	38
10.4	TEST RESULT	38
11	FREQUENCY STABILITY	41
11.1	TEST LIMIT.....	41
11.2	TEST PROCEDURE	41
11.3	TEST SETUP	41
11.4	TEST RESULT.....	41
12	ANTENNA REQUIREMENT	42
12.1	STANDARD APPLICABLE.....	42
12.2	ANTENNA CONNECTED CONSTRUCTION	42
13	TEST SETUP	43



2 Test Summary

Test Items	Test Requirement	Result
Conducted Emissions	15.207 RSS-Gen Section 8.8	PASS
Radiated Spurious Emissions	15.407(b), 15.209 RSS-247 Section 3.3 RSS-Gen 8.9	PASS
6dB&99% Bandwidth	15.407(e) RSS-247 Section 6.2	PASS
Peak Output Power	15.407 (a) RSS-247 Section 6.2.1.1	PASS
Power Spectral Density	15.407 (a) RSS-247 Section 6.2.1.1	PASS
Conducted Bandedge	15.407 (b) RSS-247 Section 6.2.1.2 RSS-Gen 8.10	PASS
Frequency Stability	15.407 (g) RSS-Gen Section 8.11	PASS
Antenna Requirement	15.203	PASS

Remark: N/A

2.1 Test Site

Precise Testing & Certification Co., Ltd.

Address: Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A-1



3 General Information

3.1 General Description of E.U.T.

Product Name	:	Wireless Transmitter
Model Name	:	SC-WIR-TX
Additional model	:	SC-WIR-RX, PAS-WIR-RX, PAS-WIR-TX (All models have same circuits diagram of Bluetooth module PCB, RF Chip construction!; All models have same circuits diagram of Power; Only the model name is different)
PMN	:	Wireless Transmitter
HVIN	:	SC-WIR-TX, PAS-WIR-TX
Sample ID	:	PTC20110303604E-1#
Operating frequency	:	5736 ~ 5814MHz
Numbers of Channel	:	3
Antenna Type	:	PCB Antenna
Antenna Gain	:	ANT A: 2.4dBi; ANT B: 2.4 dBi
Directional Gain	:	$2.4+10*\log(2)=5.41\text{dBi}$
Type of Modulation	:	QPSK(DSSS)
Power supply	:	DC 5V/0.55A
Adpapter	:	Model: GQ07-050055-DX Input: 100-240V~ 50/60Hz 0.3A Output: DC 5V/0.55A

3.2 Channel List

Channel List	
Channel	Frequency
1	5736MHz
2	5762MHz
3	5814MHz

Note: 1. Test of channel was included the lowest 5736MHz, middle 5726MHz and highest frequency 5814MHz in highest data rate and to perform the test, then record on this report.
2. Switch the high, medium and low emission signals by touching the switch.



4 Equipment During Test

4.1 Equipments List

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
MXG Signal Analyzer	Agilent	N9020A	SER MY5111038	10Hz-30GHz	Aug. 21, 2021
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	Aug. 21, 2021
Power Meter	Anritsu	ML2495A	0949003	300MHz-40GHz	Aug. 21, 2021
Power Sensor	Anritsu	MA2411B	0917017	300MHz-40GHz	Aug. 21, 2021

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 21, 2021
Loop Antenna	Schwarzbeck	FMZB 1519	012	9 KHz -30MHz	Aug. 21, 2021
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	25MHz-2GHz	Aug. 21, 2021
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	1MHz-1GHz	Aug. 21, 2021
Cable	Schwarzbeck	PLF-100	549489	9KHz-3GHz	Aug. 21, 2021
Spectrum Analyzer	Agilent	E4407B	MY45109572	9KHz-40GHz	Aug. 21, 2021
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	1GHz-18GHz	Aug. 21, 2021
Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	Aug. 21, 2021
Horn Antenna	SCHWARZBECK	BBHA 9170	9170-181	14GHz-40GHz	Aug. 21, 2021
Amplifier	SCHWARZBECK	BBV 9721	9721-205	18GHz-40GHz	Aug. 21, 2021
Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	Aug. 21, 2021
RF Cable	R&S	R204	R21X	1GHz-40GHz	Aug. 21, 2021

Conducted Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 21, 2021
Artificial Mains Network	Rohde&Schwarz	ENV216	102453	9KHz-300MHz	Aug. 21, 2021
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	9KHz-300MHz	Aug. 21, 2021
Test software					
E3	Audix	6.101223a	N/A	N/A	E3



4.2 Description of Support Units

Equipment	Model No.	Series No.
/	/	/

4.3 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%	

5 Conducted Emission

5.1 Conducted Power Line Emission Limit

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following

Frequency MHz	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50


NOTE: 1.The lower limit shall apply at the transition frequencies.
2.The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

5.2 EUT Operation

Operating Environment :

Temperature	:	23.5 °C
Humidity	:	51.1 % RH
Atmospheric Pressure	:	101.2kPa

5.3 Test Setup

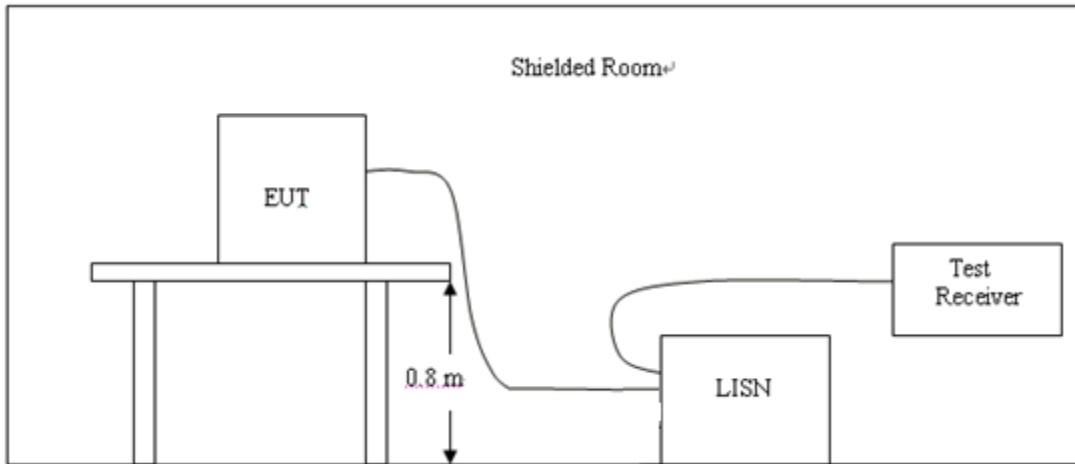

5.4 Test Procedure

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.



5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.

5.5 Summary of Test Results


Pass

Remark:

1. We tested at Low, Middle, and High channel at the antenna single and antenna combination. and recorded the worst data at Low channel of Antenna A in the report.



Phase: Line (Low Channel for ANT A)

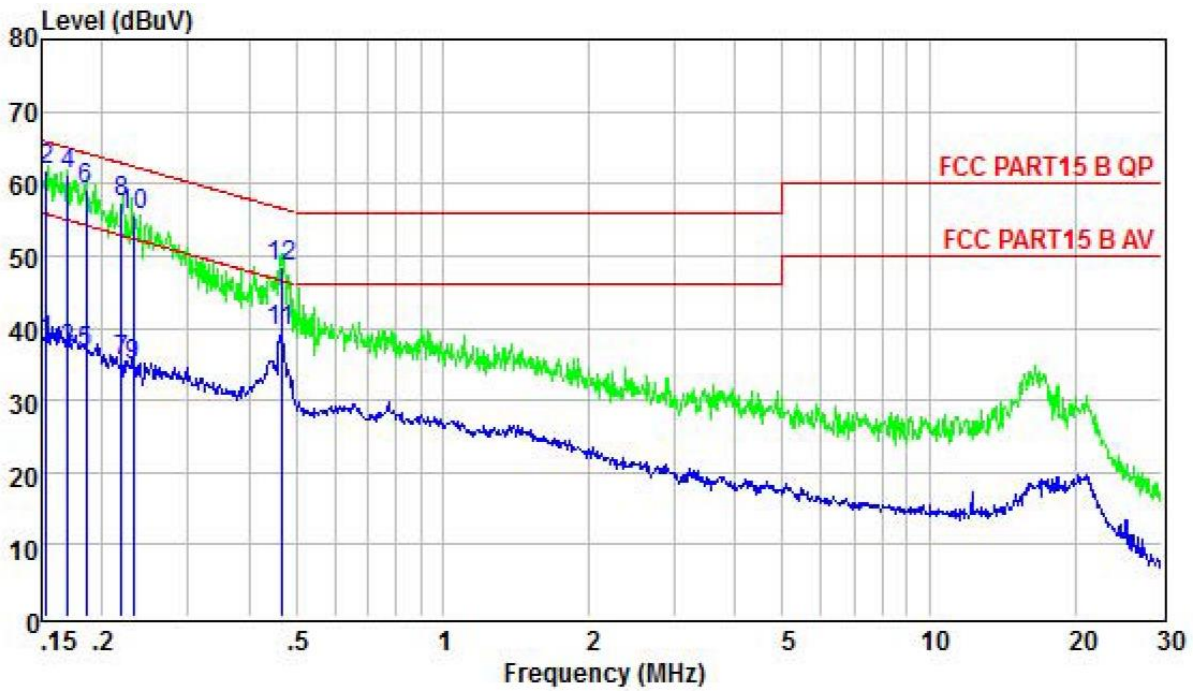


	Freq	Level	LISN	Cable	Limit	Over	Remark
	MHz	dBuV	Factor	Loss	Line	Limit	
			dB	dB	dBuV	dB	
1	0.15	38.06	9.44	0.01	55.82	-17.76	Average
2	0.15	62.00	9.44	0.01	65.82	-3.82	QP
3	0.17	36.91	9.45	0.01	54.99	-18.08	Average
4	0.17	61.21	9.45	0.01	64.99	-3.78	QP
5	0.19	36.72	9.45	0.01	54.24	-17.52	Average
6	0.19	59.21	9.45	0.01	64.24	-5.03	QP
7	0.22	35.32	9.46	0.01	52.88	-17.56	Average
8	0.22	57.48	9.46	0.01	62.88	-5.40	QP
9	0.23	34.67	9.47	0.01	52.39	-17.72	Average
10	0.23	55.66	9.47	0.01	62.39	-6.73	QP
11	0.47	39.63	9.49	0.01	46.58	-6.95	Average
12	0.47	48.54	9.49	0.01	56.58	-8.04	QP

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.



Phase: Neutral (Low Channel for ANT A)

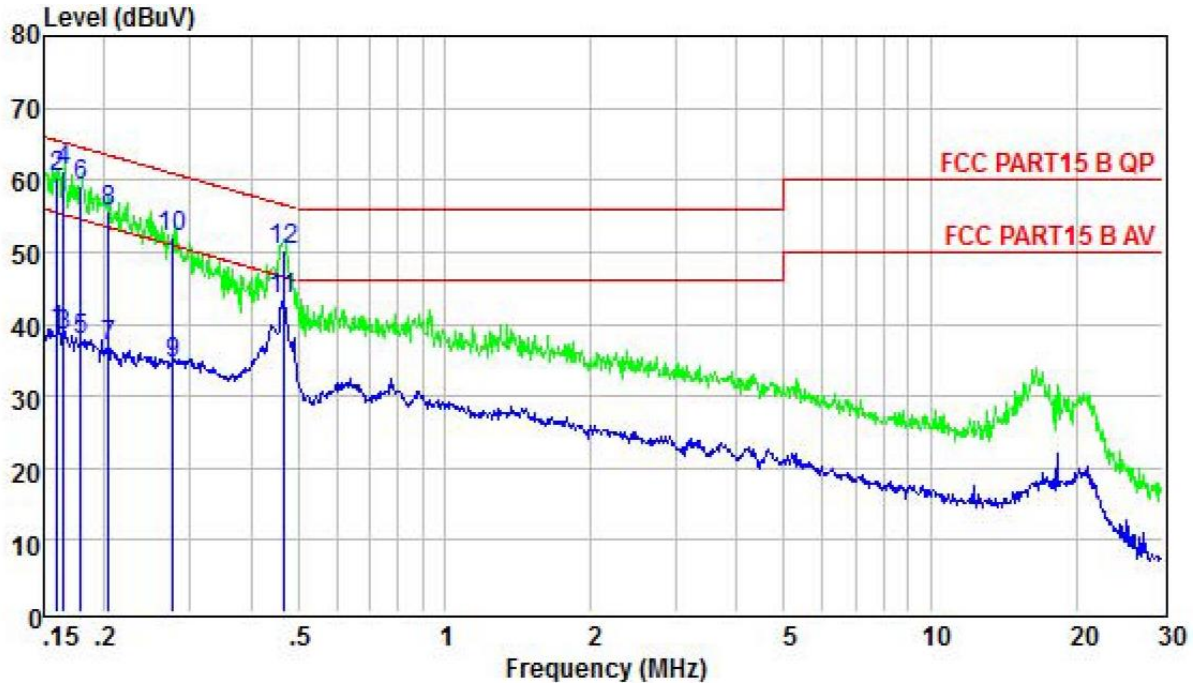

	Freq	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dB	
1	0.16	38.94	9.36	0.01	55.47	-16.53	Average
2	0.16	60.41	9.36	0.01	65.47	-5.06	QP
3	0.17	38.27	9.37	0.01	55.21	-16.94	Average
4	0.17	61.23	9.37	0.01	65.21	-3.98	QP
5	0.18	37.92	9.37	0.01	54.55	-16.63	Average
6	0.18	59.15	9.37	0.01	64.55	-5.40	QP
7	0.20	36.77	9.38	0.01	53.45	-16.68	Average
8	0.20	55.59	9.38	0.01	63.45	-7.86	QP
9	0.28	34.60	9.40	0.01	50.94	-16.34	Average
10	0.28	52.14	9.40	0.01	60.94	-8.80	QP
11	0.47	43.50	9.41	0.01	46.58	-3.08	Average
12	0.47	50.12	9.41	0.01	56.58	-6.46	QP

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.



6 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247
 Test Method : ANSI C63.10:2013
 Test Result : PASS
 Measurement Distance : 3m
 Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log ^{(2400/F(kHz))} + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log ^{(24000/F(kHz))} + 40
1.705 ~ 30	30	30	100 * 30	20log ⁽³⁰⁾ + 40
30 ~ 88	100	3	100	20log ⁽¹⁰⁰⁾
88 ~ 216	150	3	150	20log ⁽¹⁵⁰⁾
216 ~ 960	200	3	200	20log ⁽²⁰⁰⁾
Above 960	500	3	500	20log ⁽⁵⁰⁰⁾

6.1 EUT Operation


Operating Environment :

Temperature : 23.5 °C
 Humidity : 51.1 % RH
 Atmospheric Pressure : 101.2kPa


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

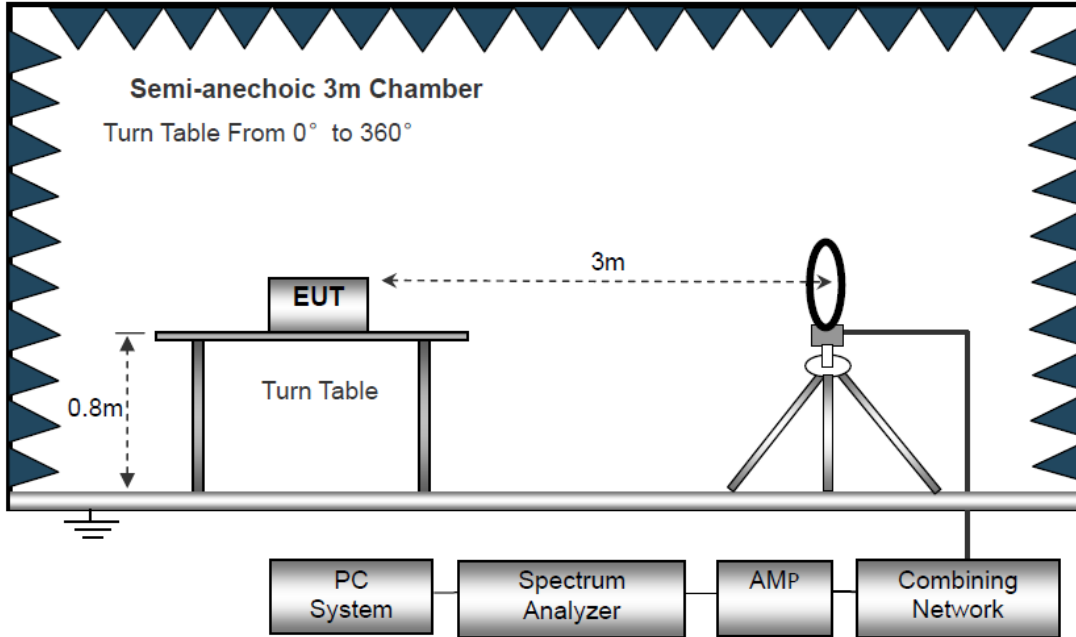

The test setup for emission measurement from 30 MHz to 1 GHz.

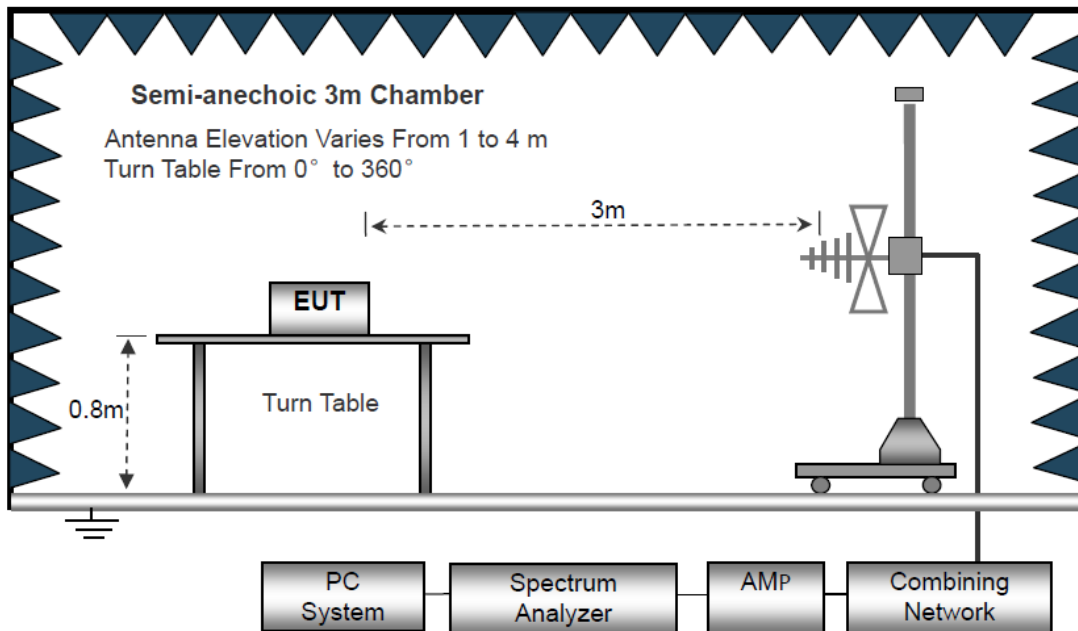

The test setup for emission measurement above 1 GHz

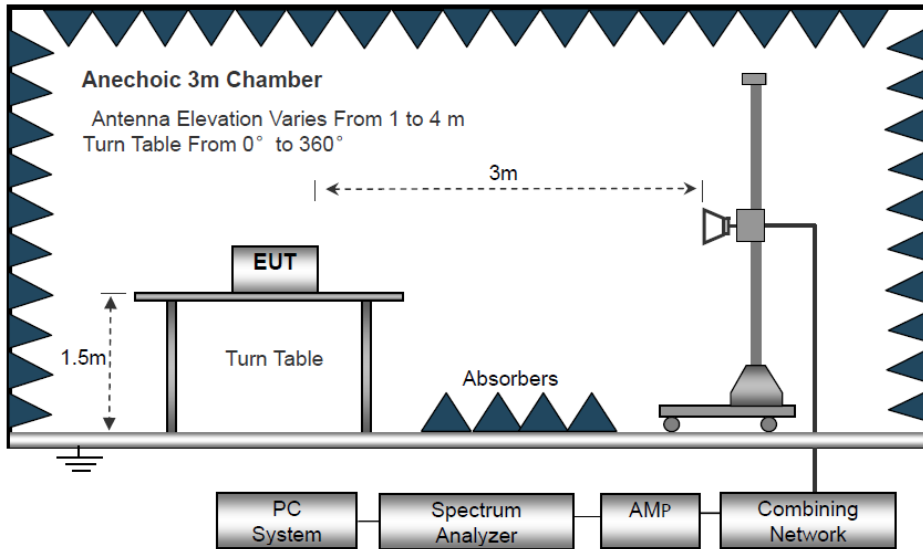

6.3 Spectrum Analyzer Setup

	Frequency	Detector	RBW	VBW	Remark
Receiver Setup	Below 30MHz	--	10kHz	10kHz	--
	30MHz ~ 1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value



6.4 Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
8. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.



6.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance/ test distance})$ (dB);
Limit line = Specific limits (dBuV) + distance extrapolation factor.

Test Frequency: 30MHz ~ 1GHz


Pass

Remark:

We tested at Low, Middle, and High channel at the antenna single and antenna combination. and recored the worst data at Low channel of Antenna A in the report.



Polarization: Horizontal (Low Channel for ANT A)

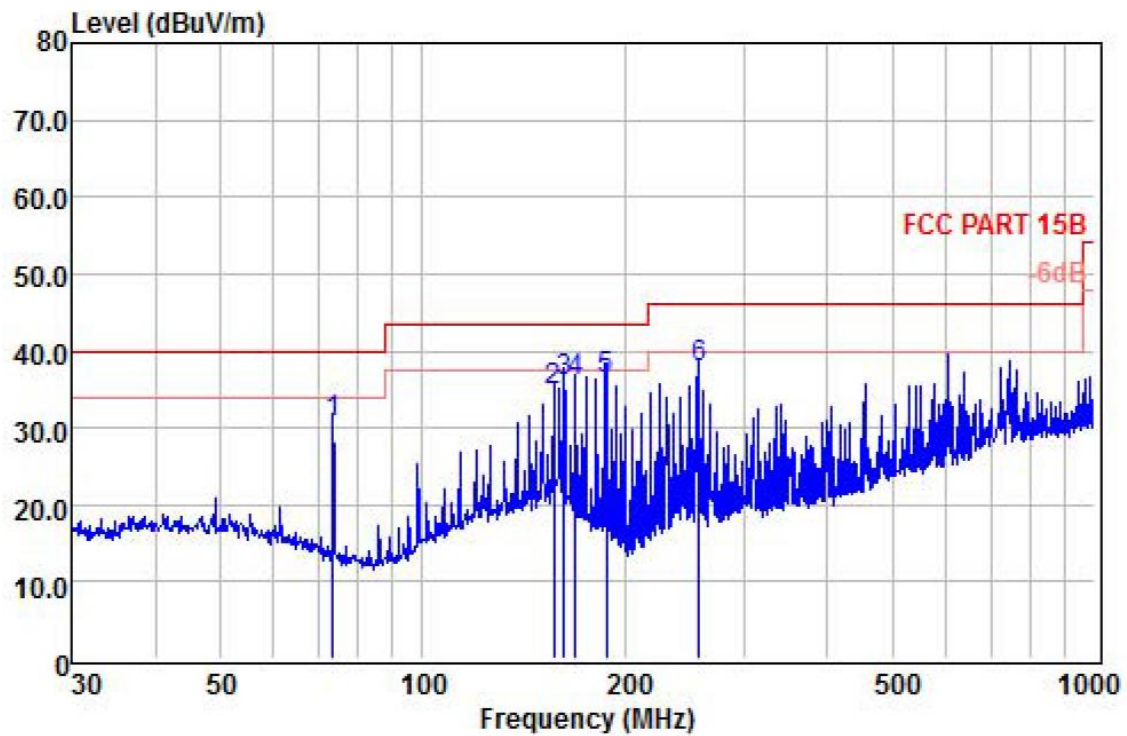


	ReadAntenna	Cable		Limit	Over		
Freq	Level	Factor	Loss	Level	Line	Limit	
MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB	
1	73.62	20.54	9.36	0.84	30.74	40.00	-9.26 QP
2	156.46	18.43	15.43	0.86	34.72	43.50	-8.78 QP
3	162.61	19.81	15.19	0.86	35.86	43.50	-7.64 QP
4	169.01	20.87	14.28	0.87	36.02	43.50	-7.48 QP
5	187.75	23.98	11.52	0.87	36.37	43.50	-7.13 QP
6	258.33	24.74	12.04	0.86	37.64	46.00	-8.36 QP

Remark: Absolute Level = Reading Level + Factor, Margin = Absolute Level – Limit
 Factor = Ant. Factor + Cable Loss – Pre-amplifier



Polarization: Vertical (Low Channel for ANT A)

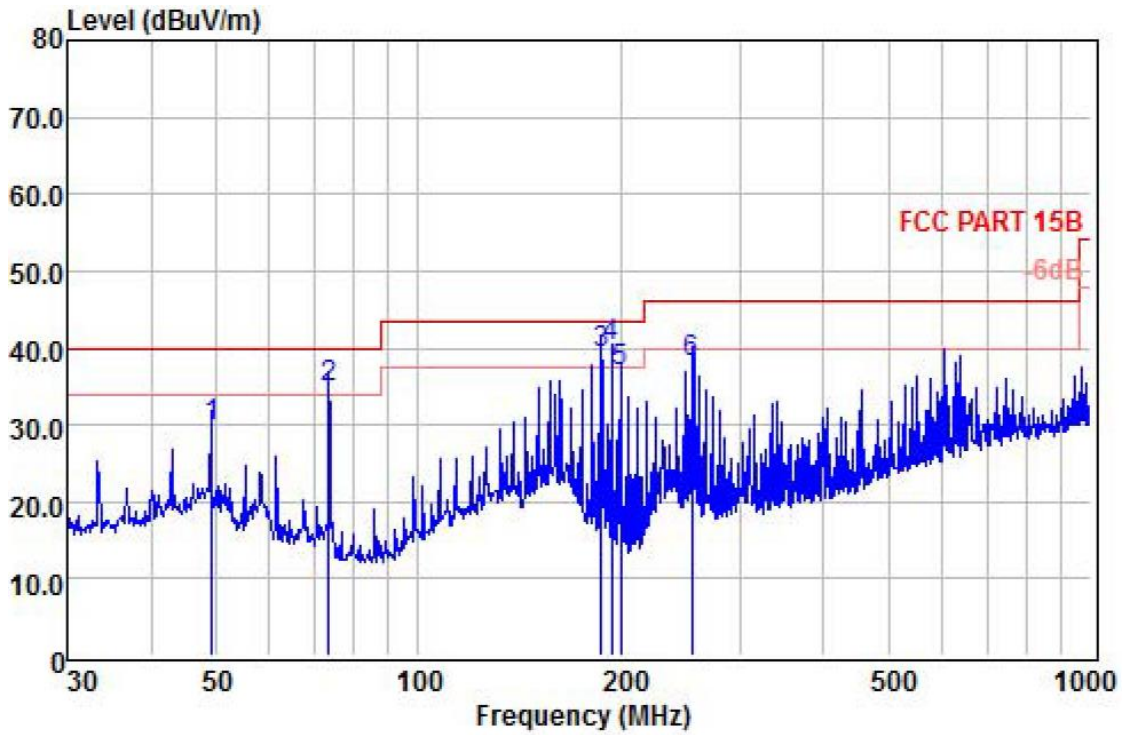

	ReadAntenna	Cable	Limit	Over			
Freq	Level	Factor	Loss	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB	
1	49.19	15.89	13.53	0.26	29.68	40.00	-10.32 QP
2 !	73.62	24.74	9.36	0.84	34.94	40.00	-5.06 QP
3 !	187.10	26.89	11.63	0.87	39.39	43.50	-4.11 QP
4 !	193.77	28.70	10.56	0.88	40.14	43.50	-3.36 QP
5	199.99	26.25	9.60	0.88	36.73	43.50	-6.77 QP
6	254.73	25.50	11.80	0.86	38.16	46.00	-7.84 QP

Remark: Absolute Level = Reading Level + Factor, Margin = Absolute Level – Limit
 Factor = Ant. Factor + Cable Loss – Pre-amplifier



Test Frequency 1GHz-25GHz: Record the worst test data for Antenna B in report

GFSK Low Channel (5736MHz)								
Detector: Peak Value								
Frequency (MHz)	Reading Level (dBuV)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarity (H/V)
11472.00	30.62	37.11	7.73	34.50	40.96	74.00	-33.04	V
17208.00	30.44	39.31	9.23	34.79	44.19	74.00	-29.81	V
11472.00	32.26	37.11	7.73	34.50	42.60	74.00	-31.40	H
17208.00	29.77	39.31	9.23	34.79	43.52	74.00	-30.48	H
Detector: Average Value								
11472.00	19.57	37.11	7.73	34.50	29.91	54.00	-24.09	V
17208.00	18.72	39.31	9.23	34.79	32.47	54.00	-21.53	V
11472.00	21.65	37.11	7.73	34.50	31.99	54.00	-22.01	H
17208.00	18.39	39.31	9.23	34.79	32.14	54.00	-21.86	H
GFSK Middle Channel (5762MHz)								
Detector: Peak Value								
Frequency (MHz)	Reading Level (dBuV)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarity (H/V)
11524.00	30.69	37.12	7.74	34.53	41.02	74.00	-32.98	V
17286.00	30.47	39.34	9.24	34.80	44.25	74.00	-29.75	V
11524.00	32.25	37.12	7.73	34.51	42.59	74.00	-31.41	H
17286.00	29.78	39.33	9.23	34.78	43.56	74.00	-30.44	H
Detector: Average Value								
11524.00	19.76	37.12	7.74	34.53	30.09	54.00	-23.91	V
17286.00	18.87	39.34	9.24	34.80	32.65	54.00	-21.35	V
11524.00	21.69	37.12	7.73	34.51	32.03	54.00	-21.97	H
17286.00	18.32	39.33	9.23	34.78	32.10	54.00	-21.90	H



GFSK High Channel (5814MHz)								
Detector: Peak Value								
Frequency (MHz)	Reading Level (dBuV)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarity (H/V)
11628.00	30.76	37.13	7.75	34.51	41.13	74.00	-32.87	V
17442.00	30.49	39.34	9.25	34.81	44.27	74.00	-29.73	V
11628.00	32.45	37.13	7.75	34.51	42.82	74.00	-31.18	H
17442.00	29.59	39.34	9.25	34.81	43.37	74.00	-30.63	H
Detector: Average Value								
11628.00	19.59	37.13	7.75	34.51	29.96	54.00	-24.04	V
17442.00	18.71	39.34	9.25	34.81	32.49	54.00	-21.51	V
11628.00	21.68	37.13	7.75	34.51	32.05	54.00	-21.95	H
17442.00	18.39	39.34	9.25	34.81	32.17	54.00	-21.83	H

Note: 1. Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission Level = Reading + Factor

Margin=Emission Level-Limit



7 Occupied Bandwidth

7.1 Test Limit

The bandwidth at 6 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum power control level, as defined in KDB 789033, at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26 dB bandwidth. The 26 dB bandwidth is used to determine the conducted power limits. The minimum of 6dB Bandwidth measurement is 0.5 MHz for U-NII-3

7.2 Test Procedure

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3 Measurement Equipment Used

Same as Radiated Emission Measurement.

7.4 Test Result

PASS



ANT A			
Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
5736	9.823	13.941	PASS
5762	9.821	13.845	PASS
5814	9.821	13.842	PASS

ANT B			
Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
5736	9.820	13.88	PASS
5762	9.820	13.921	PASS
5814	9.821	13.85	PASS




6dB Bandwidth for ANT A

5736MHz



5762MHz

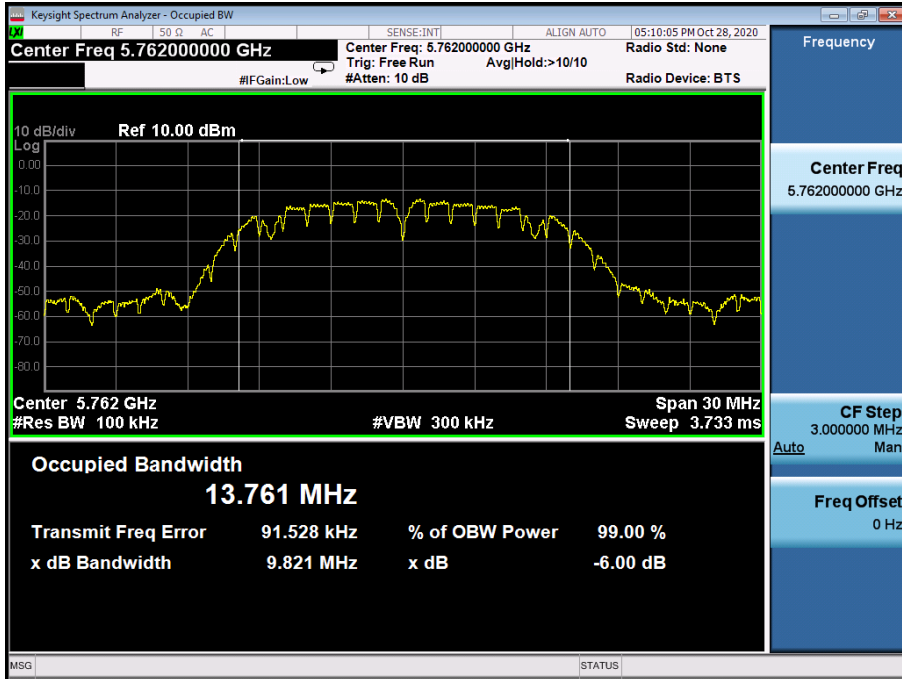




5814MHz




99% Bandwidth for ANT A

5736MHz

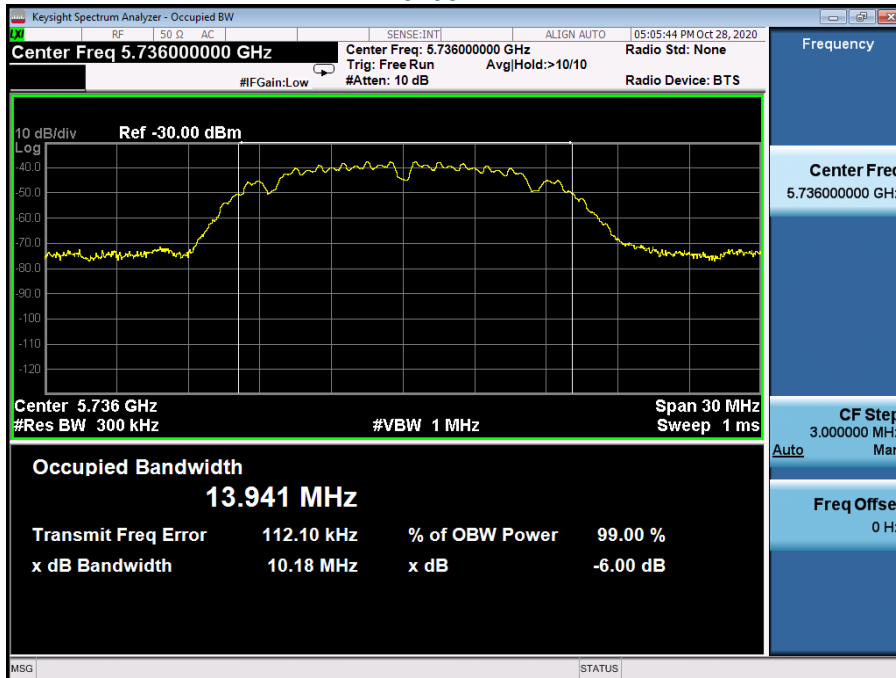




5762MHz

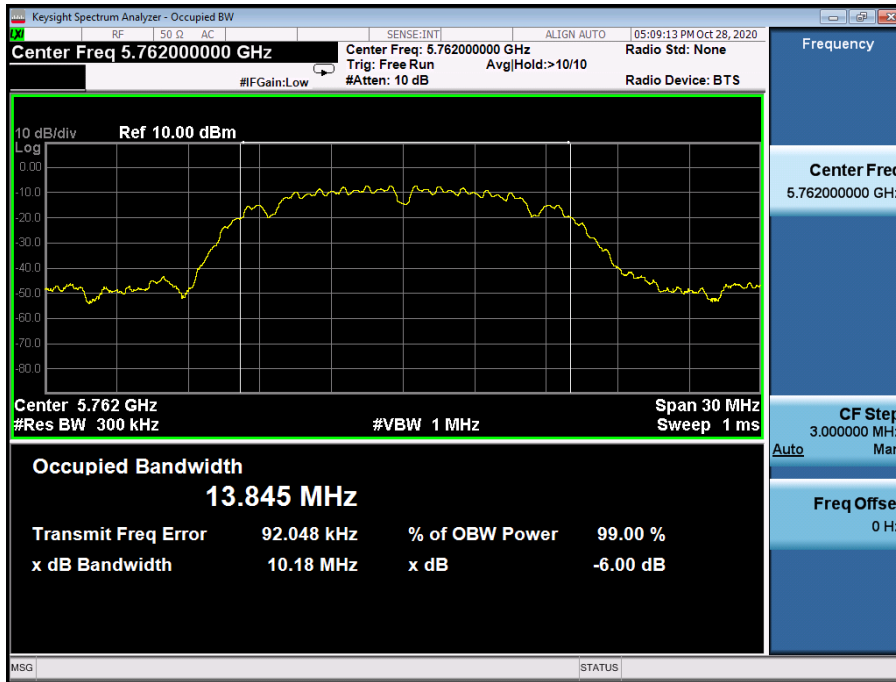


5814MHz

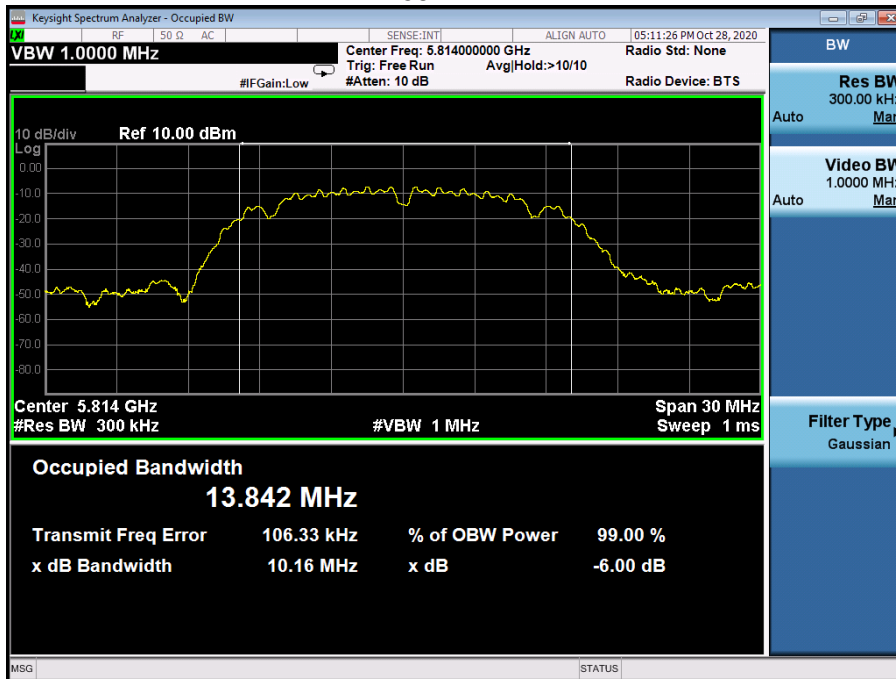




6dB Bandwidth for ANT B

5736MHz

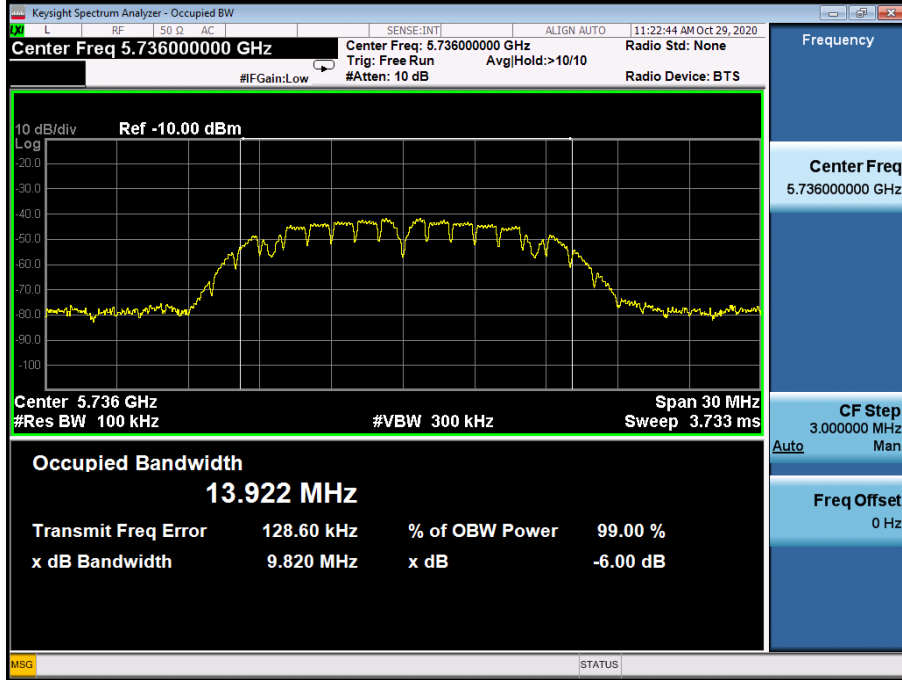


5762MHz

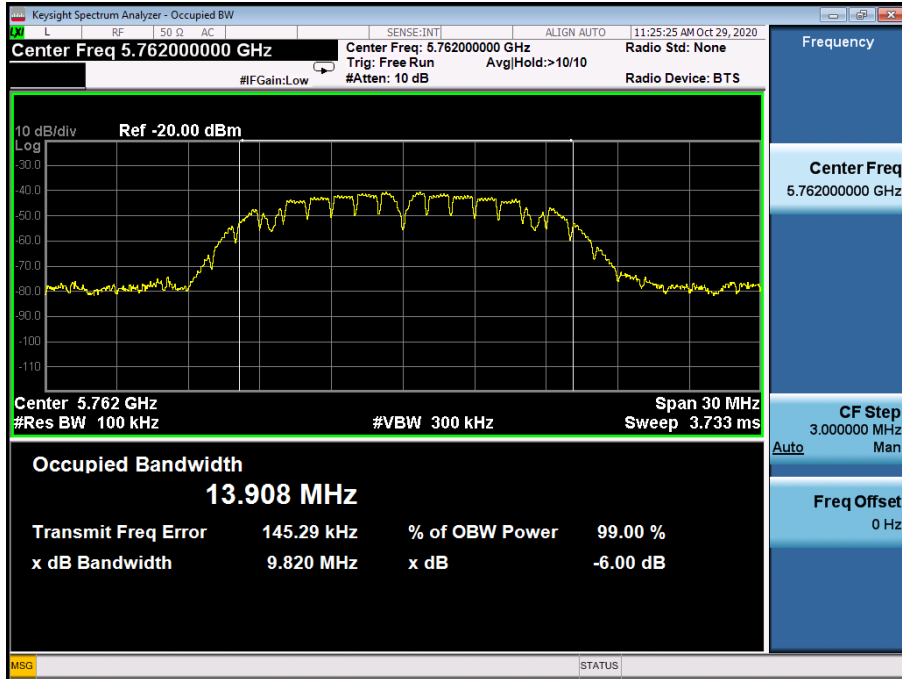



5814MHz

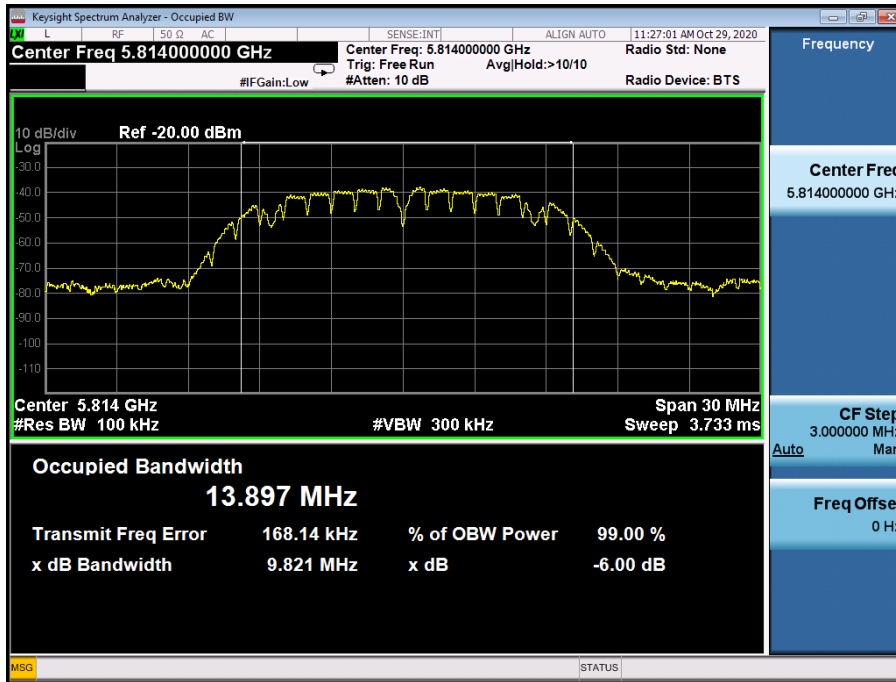


99% Bandwidth for ANT B

5736MHz





5762MHz

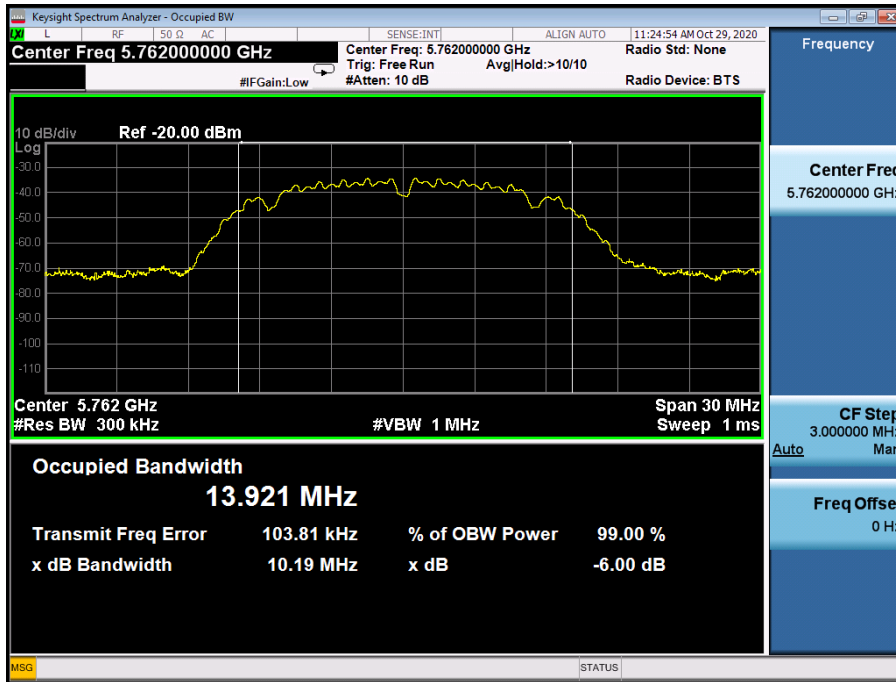

5814MHz





8 Peak Output Power

8.1 Test Limit

RSS-247 [5.4]			
Test Item	Limit	Frequency Range (MHz)	Result
Peak Output Power	1 watt or 30dBm	5725-5850	PASS

FCC: For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

8.2 Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. The EUT was directly connected to the Power meter.

8.3 Measurement Equipment Used

Same as Radiated Emission Measurement.

8.4 Test Result

PASS



ANT A				
Type	Channel	Peak Output power (dBm)	Limit (dBm)	Result
QPSK	1	3.145	30	Pass
	2	3.136		
	3	4.091		


ANT B				
Type	Channel	Peak Output power (dBm)	Limit (dBm)	Result
QPSK	1	3.159	30	Pass
	2	3.176		
	3	3.952		

MIMO

Type	Channel	Peak Output power (dBm)		Total Peak Output power (dBm)	Limit (dBm)	Result
		ANT A	ANT B	ANT A+ ANT B		
QPSK	1	3.145	3.159	6.16	30	Pass
	2	3.136	3.176	6.17		
	3	4.091	3.952	7.03		

NOTE: During the test the EUT is in 100% duty cycle transmitting.

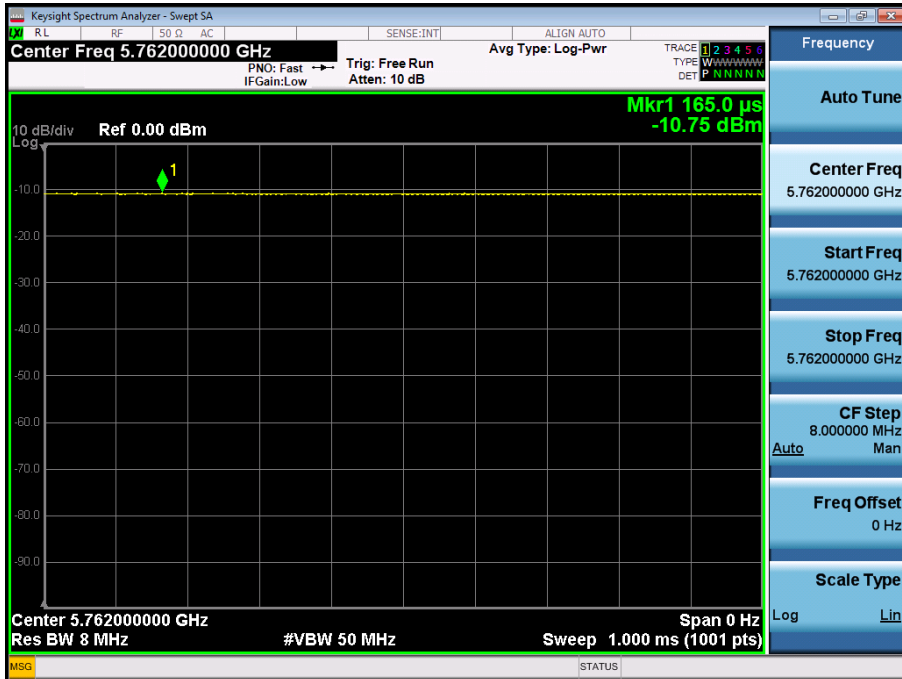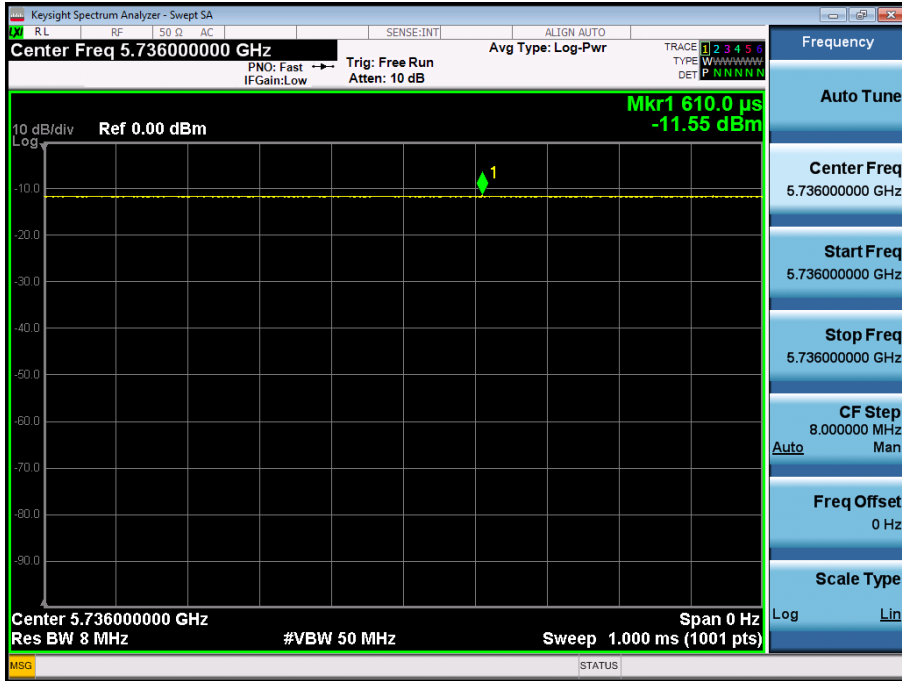

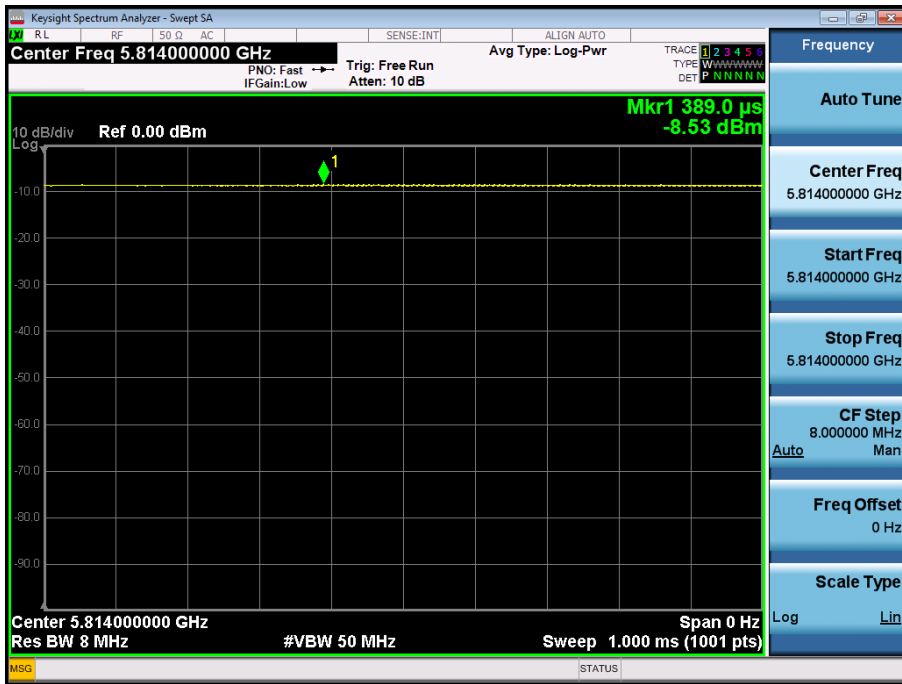



9 Power Spectral Density

9.1 Test Limit

RSS-247 [5.2(2)]			
Test Item	Limit	Frequency Range (MHz)	Result
Power Spectral Density	8 dBm (in any 3KHz)	5725-5850	PASS

FCC: In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

9.2 Test Procedure

Methods refer to FCC KDB 789033

- 1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E)2) for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...".
- 2) Use the peak search function on the instrument to find the peak of the spectrum.
- 3) The result is the PPSD.
- 4) The above procedures make use of 1 MHz resolution bandwidth to satisfy the 1 MHz measurement bandwidth specified in the 15.407(a)(5). That rule section also permits use of resolution bandwidths less than 1 MHz "provided that the measured power is integrated to show the total power over the measurement bandwidth" (i.e., 1 MHz). If measurements are performed using a reduced resolution bandwidth and integrated over 1 MHz bandwidth

9.3 Measurement Equipment Used

Same as Radiated Emission Measurement

9.4 Test Result

PASS




ANT A					
Type	Channel	Power Spectral Density(dBm/1000 KHz)	Power Spectral Density(dBm/500KHz)	Limit (dBm/500KHz)	Result
QPSK	1	-11.89	-14.9	30.00	Pass
	2	-11.68	-14.69		
	3	-12.64	-15.65		

ANT B					
Type	Channel	Power Spectral Density(dBm/1000 KHz)	Power Spectral Density(dBm/500KHz)	Limit (dBm/500KHz)	Result
QPSK	1	-9.54	-12.55	30.00	Pass
	2	-9.26	-12.27		
	3	-10.39	-13.4		

Type	Channel	Power Spectral Density		Total Power Spectral Density	Limit (dBm/500KHz)
		ANT A	ANT B	ANT A+ANT B	
QPSK	1	-14.9	-12.55	-10.56	30.00
	2	-14.69	-12.27	-10.30	30.00
	3	-15.65	-13.4	-11.37	30.00

$RBW\ factor = 10\ log\ (500\ KHz / 1000\ KHz) = -3.01dB$

ANT A
5736MHz

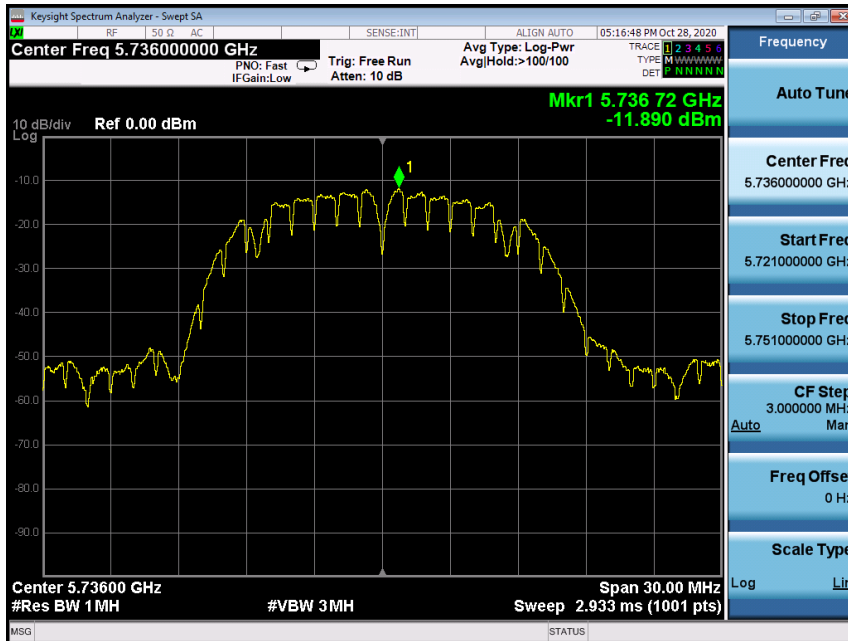




5762MHz




5814MHz

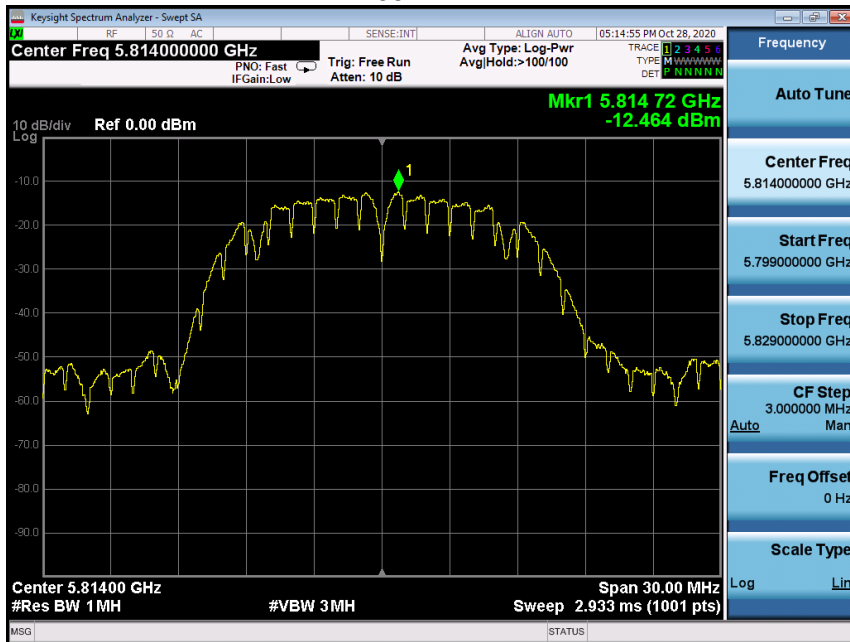


ANT B



5736MHz

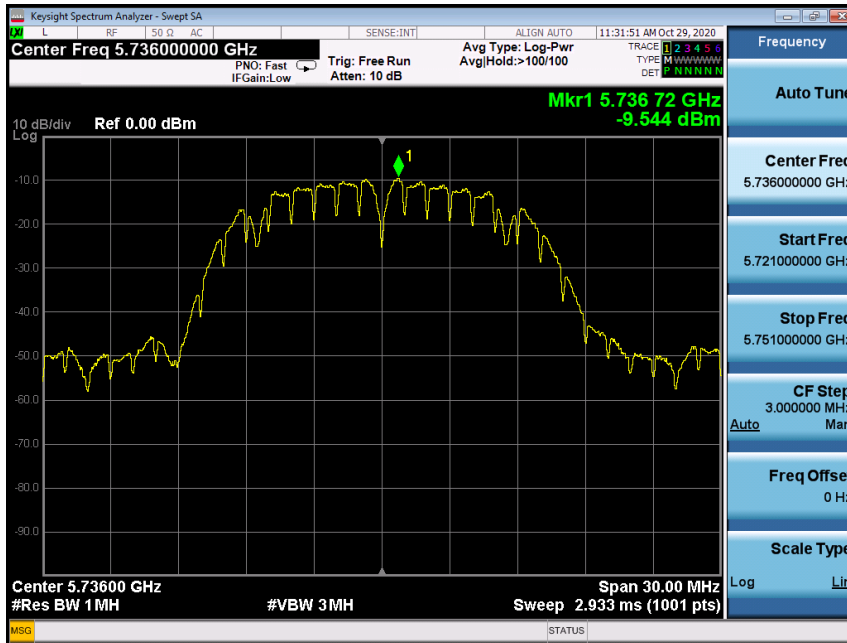

5762MHz

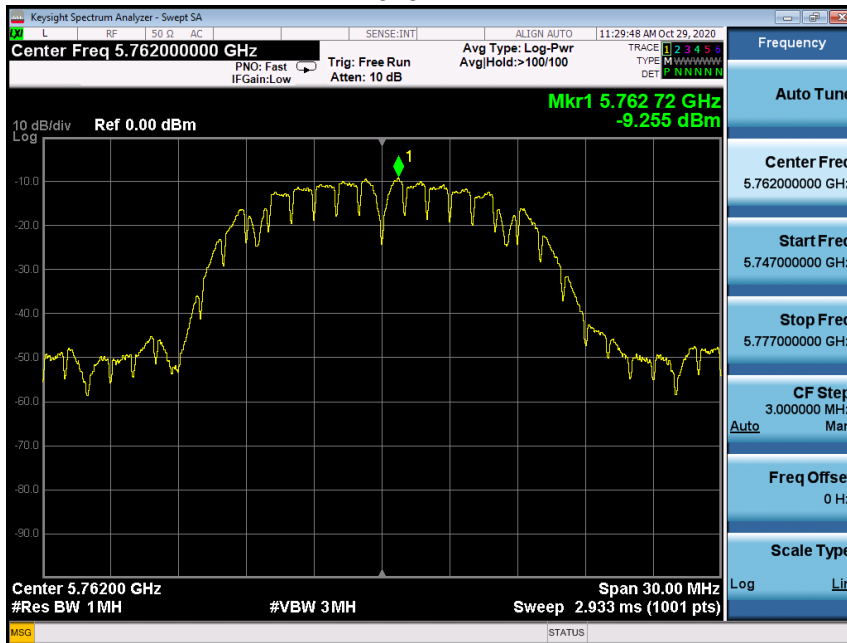


5814MHz





10 Conducted Band Edge

10.1 Test Setup



10.2 Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as TX operation and connect directly to the spectrum analyzer.
3. Based on FCC Part15 C Section 15.247: RBW=100KHz, VBW=300KHz.
4. Set detected by the spectrum analyzer with peak detector.

10.3 Limit

ISED: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.


FCC: For the band 5725-5825 MHz, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

10.4 Test Result


PASS



ANT A
5736MHz

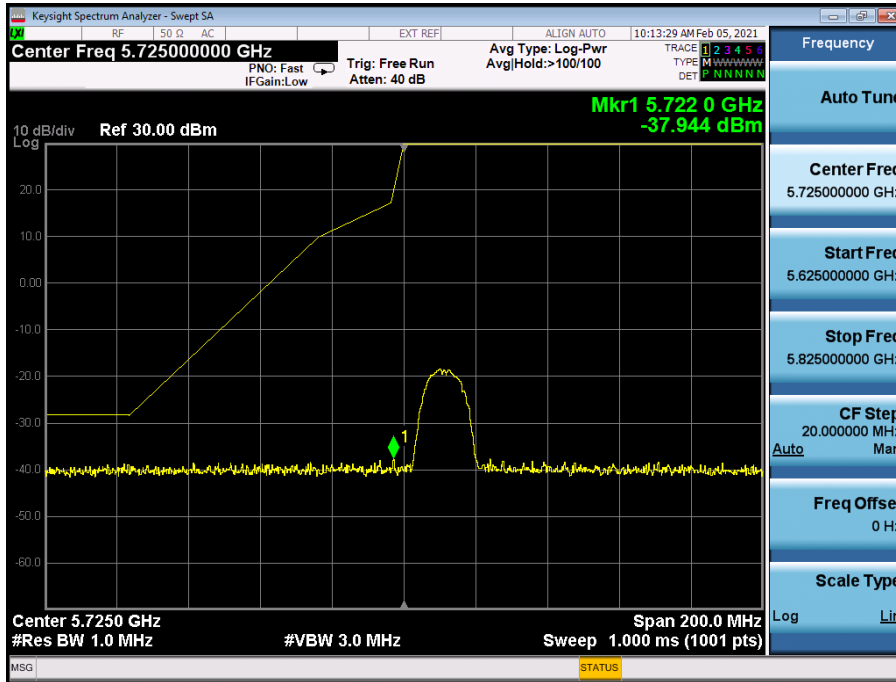


5814MHz

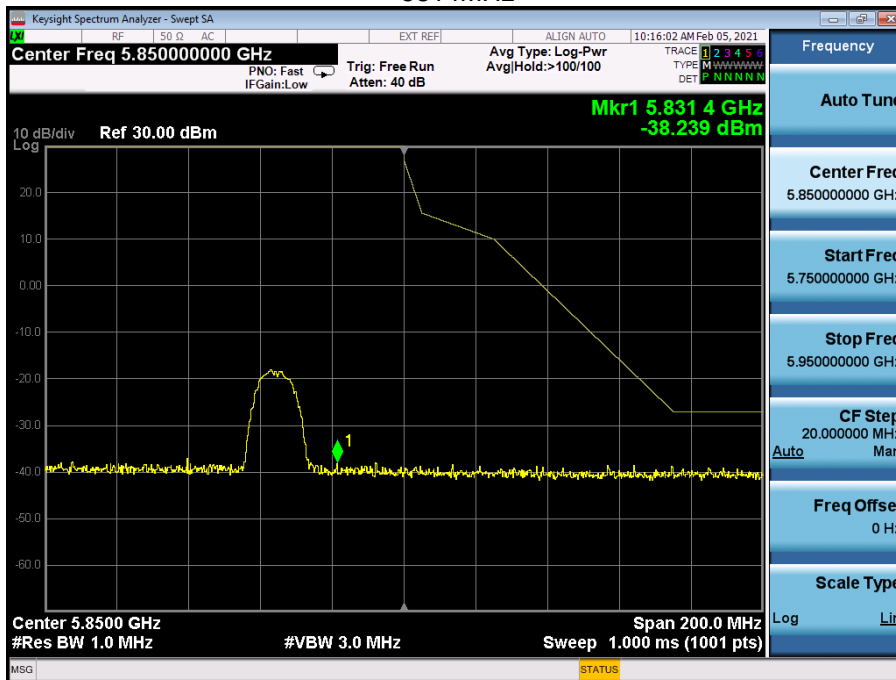




ANT B
5736MHz

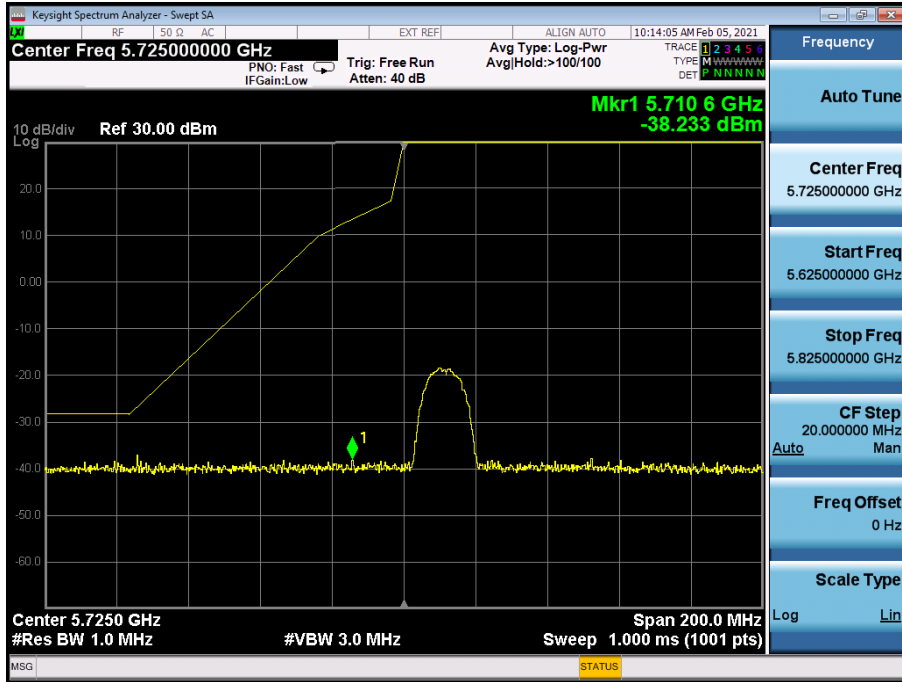

5814MHz

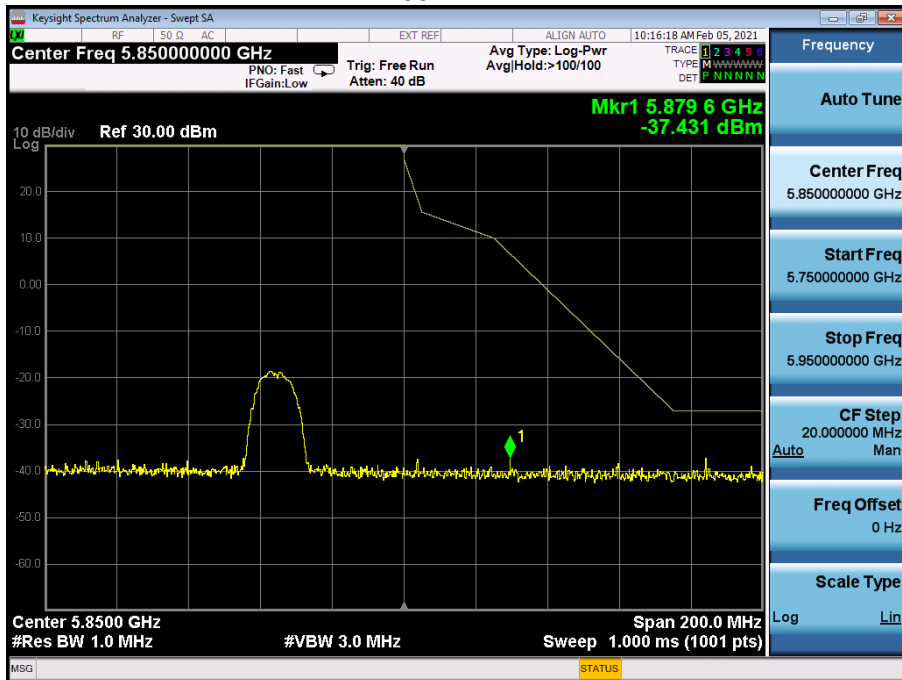

11 Frequency Stability

11.1 Test Limit


For 15.407(g): Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

For RSS-Gen Section 8.11: If the frequency stability of the licence-exempt radio apparatus is not specified in the applicable RSS, the fundamental emissions of the radio apparatus should be kept within at least the central 80% of its permitted operating frequency band in order to minimize the possibility of out-of-band operation. In addition, its occupied bandwidth shall be entirely outside the restricted bands and the prohibited TV bands of 54-72 MHz, 76-88 MHz, 174-216 MHz, and 470-602 MHz, unless otherwise indicated.

11.2 Test Procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11 specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is $-30^\circ\text{C} \sim 50^\circ\text{C}$.

11.3 Test Setup

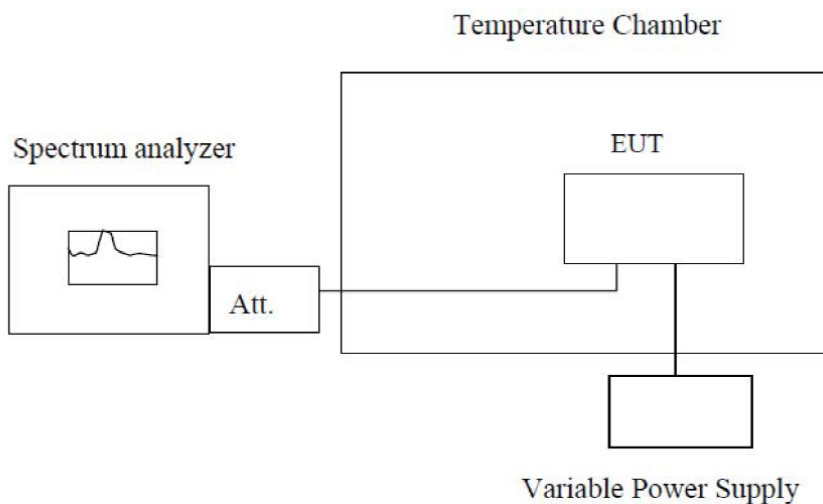

11.4 Test Result

PASS

12 Antenna Requirement


12.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

For RSS-Gen Section 8.3: A transmitter can only be sold or operated with antennas with which it was approved. When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. For transmitters of RF output power of 10 milliwatts or less, only the portion of the antenna gain that is in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power to demonstrate compliance with the radiated power limits specified in the applicable standard. For transmitters of output power greater than 10 milliwatts, the total antenna gain shall be added to the measured RF output power to demonstrate compliance to the specified radiated power


12.2 Antenna Connected Construction

The antenna used in this product is an PCB Antenna, The directional gains of antenna used for transmitting is 2.4 dBi

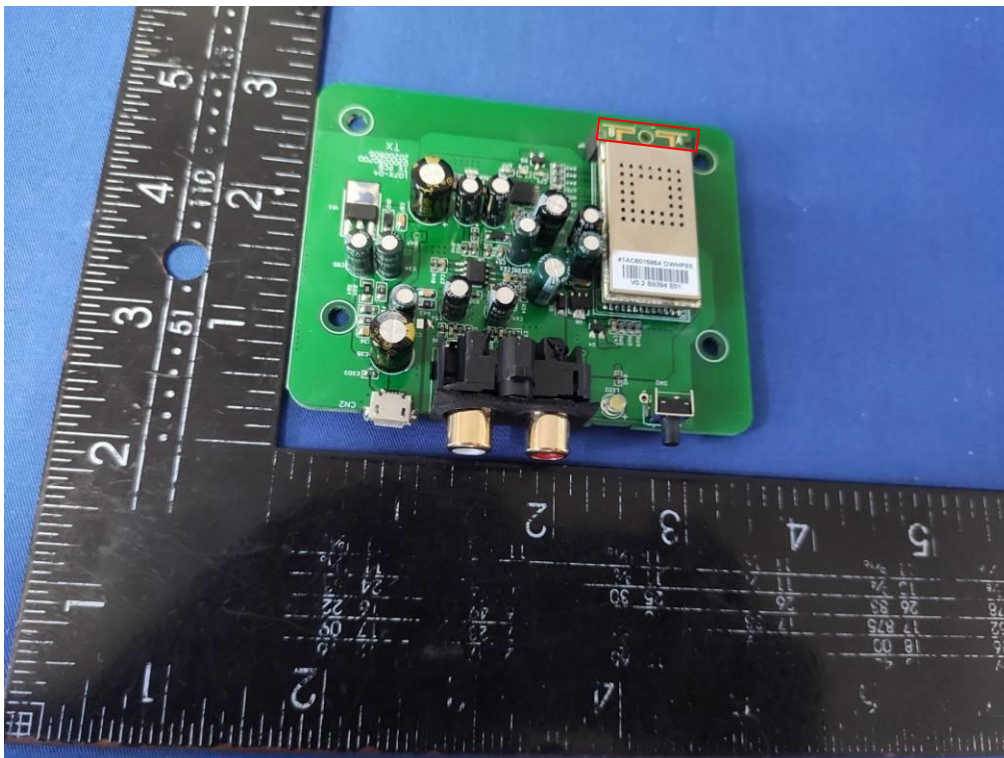


13 Test Setup

Radiated Spurious Emissions
Below 1000MHz

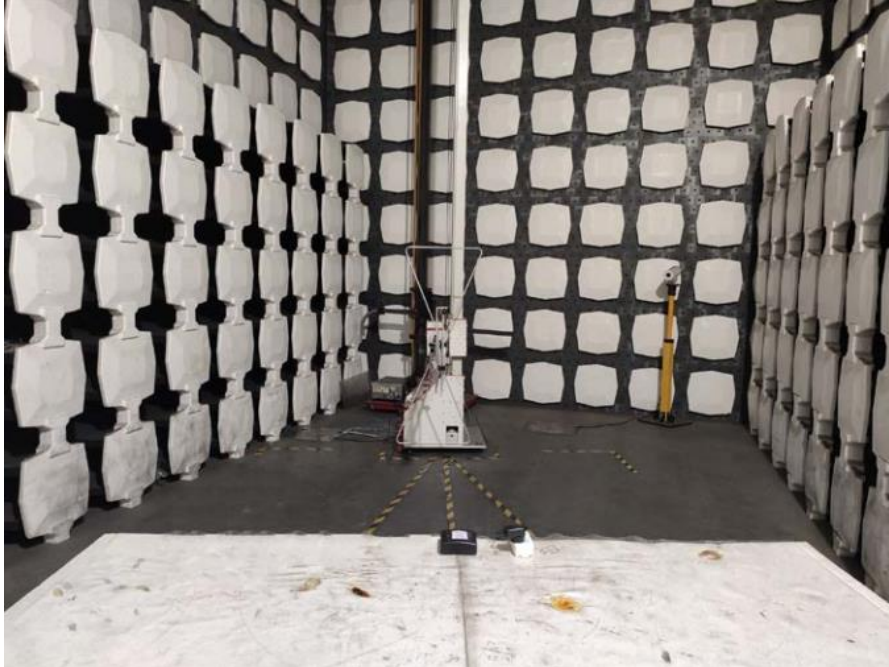

Above 1GHz

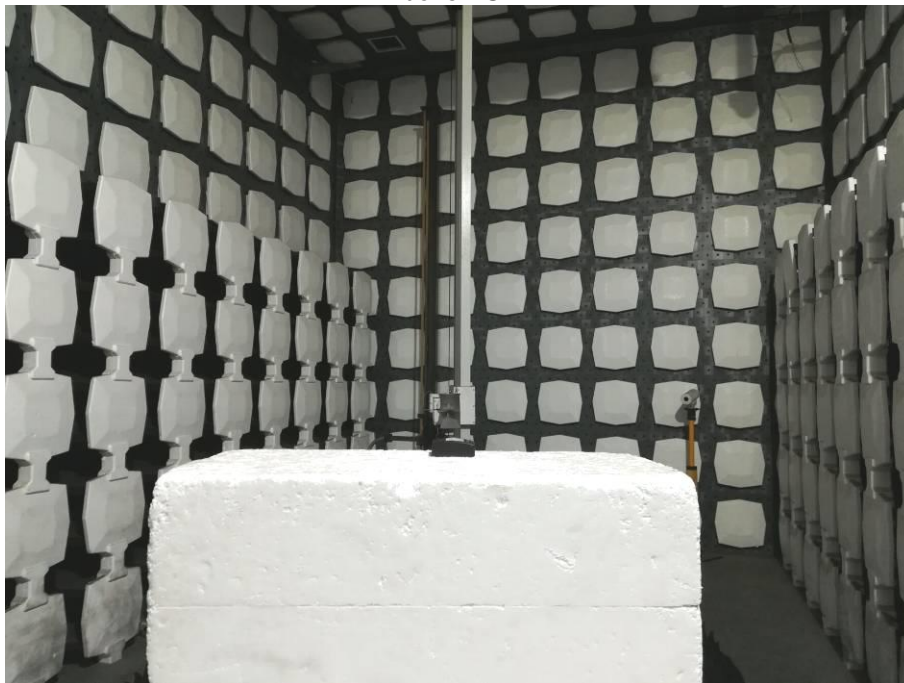

Conducted Emissions



----- End of Report -----