


**Summary of Test Results  
in accord with FCC Rules Part 15 and C63.4-1992**

Equipment Model: ACP00878  
Transmitter Tested to C63.4-1992 Section: FCC Rules 15.231  
Field Strength at a distance of 3 meters: 5630 uV/Mtr (- 0.7 dB below limit) @ 318 MHz  
Peak to Average Ratio: 15.6 dB - Fixed Duty Cycle  
Test Conditions: Radiated (Sections 11 & 13)  
Transmitter:  
Transmitter Frequency: 318 MHz Nominal (Factory Tuned Only)  
Bandwidth (20 dB down) < 0.010% of Center Freq.  
Frequency Tolerance: N/A (Nominal +/- 0.125 MHz)  
Frequency Stability: N/A (Nominal +/- 0.250 MHz)  
Transmitter Spurious at 3 meters: 68 uV/Mtr (- 19 dB below limit)  
(Worst Harmonic)  
Frequency: 636 MHz  
Momentary Operation (Yes/No) Yes  
Holdover time after manual release: 0.150 seconds  
Duration of transmission after activation: 3 seconds maximum on any single manual activation  
Attestation:

The radio apparatus identified in the application has been subject to all the applicable test conditions specified in FCC Rules Part 15 and all of the requirements of the Standard have been met.

Regulatory Compliance Engineer

John W. Kuivinen, P.E.

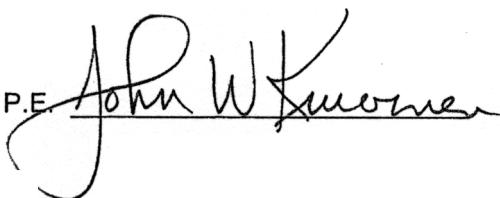

Date: 5/15/00

LINEAR CORPORATION  
FCC ID: EF4 ACP00878