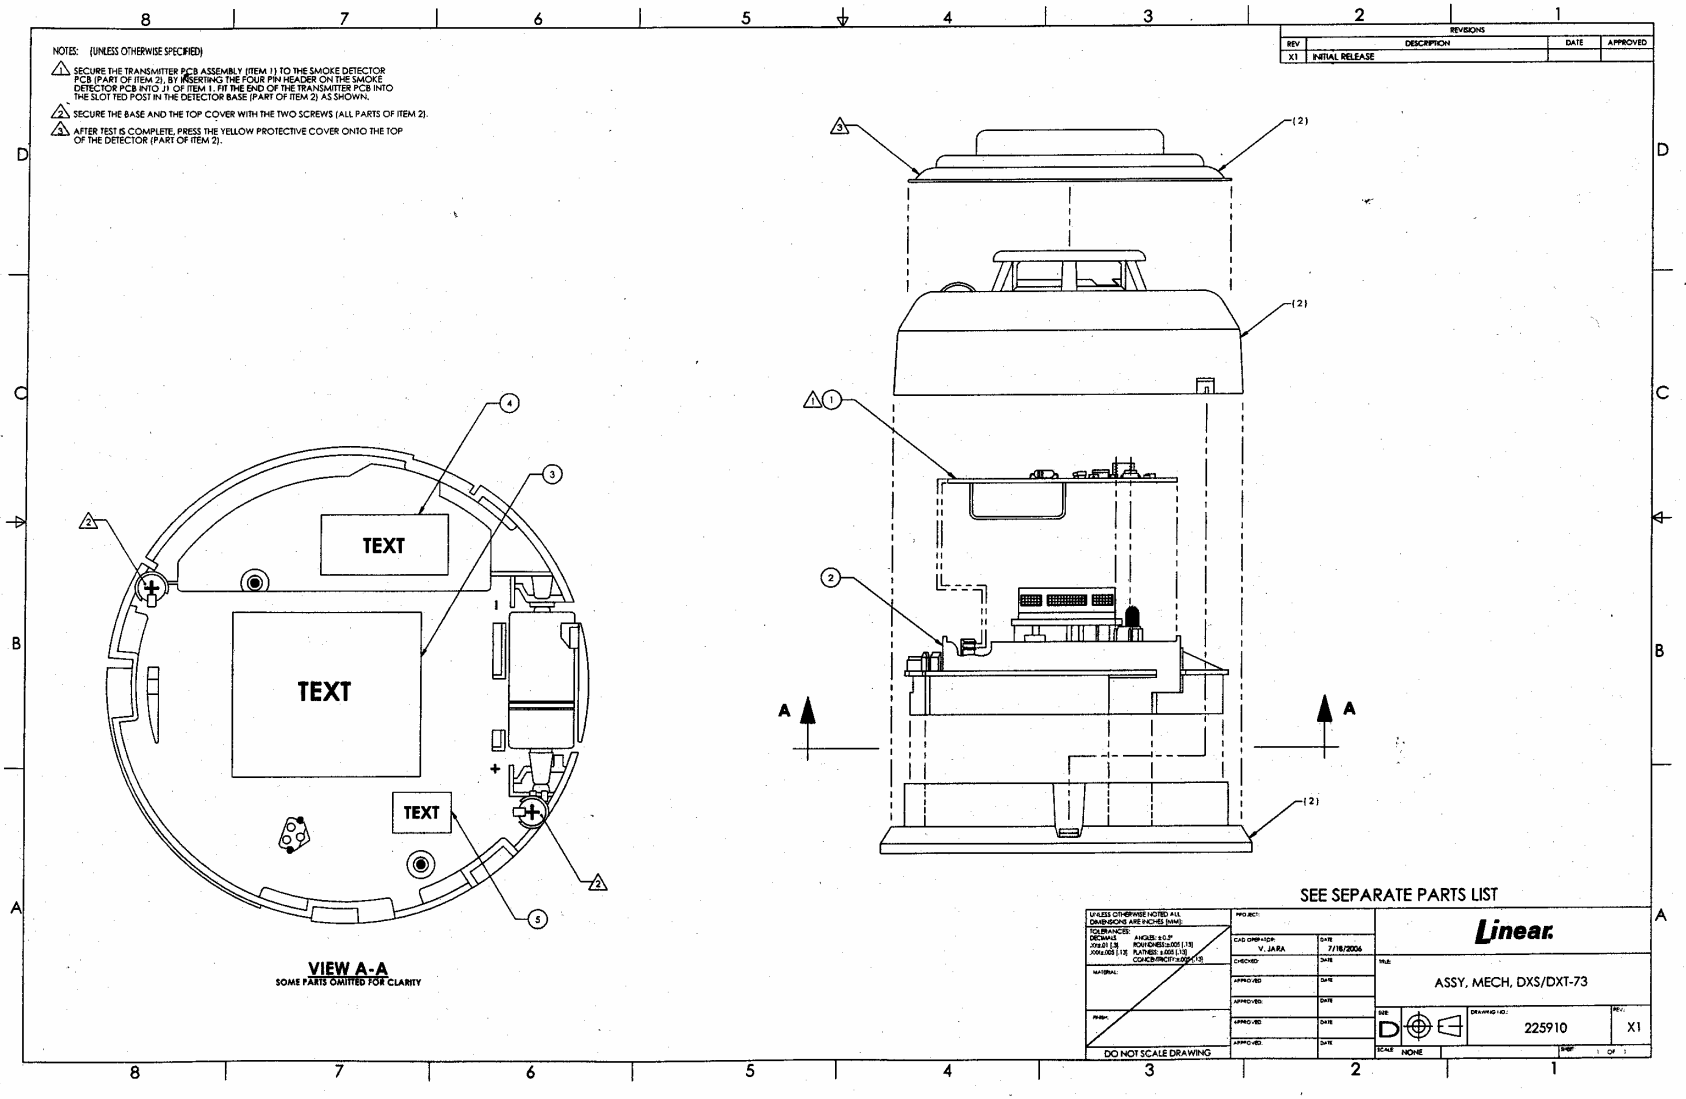
NOTES: (UNLESS OTHERWISE SPECIFIED)
1 SECURE THE TRANSMITTER PCB ASSEMBLY (ITEM 1) TO THE SMOKE DETECTOR PCB (PART OF ITEM 2), BY INSERTING THE FOUR PIN HEADER ON THE SMOKE DETECTOR PCB INTO J1 OF ITEM 1. FIT THE END OF THE TRANSMITTER PCB INTO THE SLOT TED POST IN THE DETECTOR BASE (PART OF ITEM 2) AS SHOWN.
2 SECURE THE BASE AND THE TOP COVER WITH THE TWO SCREWS (ALL PARTS OF ITEM 2).
3 AFTER TEST IS COMPLETE, PRESS THE YELLOW PROTECTIVE COVER ONTO THE TOP OF THE DETECTOR (PART OF ITEM 2).
REVISIONS
REV DESCRIPTION DATE APPROVED
X1 INITIAL RELEASE
TEXT
TEXT
TEXT
VIEW A-A
SOME PARTS OMITTED FOR CLARITY
SEE SEPARATE PARTS LIST
UNLESS OTHERWISE NOTED ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES:
DECIMALS
ANGLES: ±0.5°
ROUNDNESS: ±.005 [.13]
FLATNESS: ±.005 [.13]
CONCENTRICITY: ±.005 [.13]
MATERIAL:
FINISH:
DO NOT SCALE DRAWING
PROJECT:
CAD OPERATOR: V. JARA
DATE 7/18/2006
CHECKED:
APPROVED:
Linear.
TITLE: ASSY, MECH, DXS/DXT-73
SIZE D
DRAWING NO.: 225910
REV: X1
SCALE NONE
SHEET 1 OF 1