

# Intermec Technologies Corporation

**Bluetooth (8520-00080) in  
6820 with GSM, CDMA,  
802.11b in 700C and 730**

May 17, 2004

Report No. ITRM0026

Report Prepared By:



1-888-EMI-CERT

**Test Report**



22975 NW Evergreen Parkway  
Suite 400  
Hillsboro, Oregon 97124

### Certificate of Test

Issue Date: May 17, 2004

Intermec Technologies Corporation

Model: Bluetooth (8520-00080) in 6820 with GSM, CDMA, 802.11b in 700C and 730

Emissions		
Description	Pass	Fail
FCC 15.247(c) Spurious Radiated Emissions:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>

**Modifications made to the product**  
 See the Modifications section of this report

#### Test Facility

- The measurement facility used to collect the data is located at:  
 Northwest EMC, Inc.; 22975 NW Evergreen Parkway, Suite 400; Hillsboro, OR 97124  
 Phone: (503) 844-4066 Fax: 844-3826  
 This site has been fully described in a report filed with and accepted by the FCC (Federal Communications Commission) and Industry Canada.

**Approved By:**

Greg Kiemel, Director of Engineering

*This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.*

*Product compliance is the responsibility of the client, therefore the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. This Report may only be duplicated in its entirety. The results of this test pertain only to the sample(s) tested, the specific description is noted in each of the individual sections of the test report supporting this certificate of test.*

Revision Number	Description	Date	Page Number
00	None		

**FCC:** Accredited by NVLAP for performance of FCC radio, digital, and ISM device testing. Our Open Area Test Sites, certification chambers, and conducted measurement facilities, have been fully described in reports filed with the FCC and accepted by the FCC in letters maintained in our files. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by the FCC as a Telecommunications Certification Body (TCB). This allows Northwest EMC to certify transmitters to FCC specifications in accordance with 47 CFR 2.960 and 2.962.



**NVLAP:** Northwest EMC, Inc. is recognized under the United States Department of Commerce, National Institute of Standards and Technology, National Voluntary Laboratory Accreditation Program for satisfactory compliance with the requirements of ISO/IEC 17025 for Testing Laboratories. The NVLAP accreditation encompasses Electromagnetic Compatibility Testing in accordance with the European Union EMC Directive 89/336/EEC, ANSI C63.4, MIL-STD 461E, DO-160D and SAE J1113. Additionally, Northwest EMC is accredited by NVLAP to perform radio testing in accordance with the European Union R&TTE Directive 1999/5/EEC, the requirements of FCC, and the RSS radio standards for Industry Canada. Accreditation has been granted to Northwest EMC, Inc. under Certificate Numbers: 200629-0 and 200630-0.



**Industry Canada:** Accredited by NVLAP for performance of Industry Canada RSS and ICES testing. Our Open Area Test Sites and certification chambers comply with RSS 212, Issue 1 (Provisional) and have been filed with Industry Canada and accepted. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by NIST and recognized by Industry Canada as a Certification Body (CB) per the APEC Mutual Recognition Arrangement (MRA). This allows Northwest EMC to certify transmitters to Industry Canada technical requirements.



**CAB:** Designated by NIST and validated by the European Commission as a Conformity Assessment Body (CAB) to conduct tests and approve products to the EMC directive and transmitters to the R&TTE directive, as described in the U.S. - EU Mutual Recognition Agreement



**TÜV Product Service:** Included in TÜV Product Service Group's Listing of Recognized Laboratories. It qualifies in connection with the TÜV Certification after Recognition of Agent's Testing Program for the product categories and/or standards shown in TÜV's current Listing of CARAT Laboratories available from TÜV. A certificate was issued to represent that this laboratory continues to meet TÜV's CARAT Program requirements. Certificate No. USA0401C



**TÜV Rheinland:** Authorized to carryout EMC tests by order and under supervision of TÜV Rheinland. This authorization is based on "Conditions for EMC-Subcontractors" of November 1992.



**NEMKO:** Assessed and accredited by NEMKO (Norwegian testing and certification body) for European emissions and immunity testing. As a result of NEMKO's laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification (Authorization No. ELA 119).



**Technology International:** Assessed in accordance with ISO Guide 25 defining the general international requirements for the competence of calibration and testing laboratories and with ITI assessment criteria LACO196. Based upon that assessment Interference Technology International, Ltd., has granted approval for specifications implementing the EU Directive on EMC (89/336/EEC and amendments). The scope of the approval was provided on a Schedule of Assessment supplied with the certificate and is available upon request.



**Australia/New Zealand:** The National Association of Testing Authorities (NATA), Australia has been appointed by the ACA as an accreditation body to accredit test laboratories and competent bodies for EMC standards. Accredited test reports or assessments by competent bodies must carry the NATA logo. Test reports made by an overseas laboratory that has been accredited for the relevant standards by an overseas accreditation body that has a Mutual Recognition Agreement (MRA) with NATA are also accepted as technical grounds for product conformity. The report should be endorsed with the respective logo of the accreditation body. (NVLAP)



**VCCI:** Accepted as an Associate Member to the VCCI, Acceptance No. 564. Conducted and radiated measurement facilities have been registered in accordance with Regulations for Voluntary Control Measures, Article 8. (*Registration Nos. - Evergreen: C-1071 and R-1025, Trails End: C-1877 and R-1760, Sultan: C-905, R-871, C-1784 and R-1761, North Sioux City C-1246 and R-1217*)



**BSMI:** Northwest EMC has been designated by NIST and validated by C-Taipei (BSMI) as a CAB to conduct tests as described in the APEC Mutual Recognition Agreement. License No.SL2-IN-E-1017.



**GOST:** Northwest EMC, Inc. has been assessed and accredited by the Russian Certification bodies Certinform VNIINMASH, CERTINFO, SAMTES, and Federal CHEC, to perform EMC and Hygienic testing for Information Technology Products. As a result of their laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification



## SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/scope.asp>

### What is measurement uncertainty?


When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. The following statement of measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" value. In the case of transient tests (ESD, EFT, Surge, Voltage Dips and Interruptions), the test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements.

The following documents were the basis for determining the uncertainty levels of our measurements:

- "ISO Guide to the Expression of Uncertainty in Measurements", October 1993
- "NIS81: The Treatment of Uncertainty in EMC Measurements", May 1994
- "IEC CISPR 16-3 A1 f1 Ed.1: Radio-interference measurements and statistical techniques", December 2000

### How might measurement uncertainty be applied to test results?

If the diamond marks the measured value for the test and the vertical bars bracket the range of + and - measurement uncertainty, then test results can be interpreted from the diagram below.

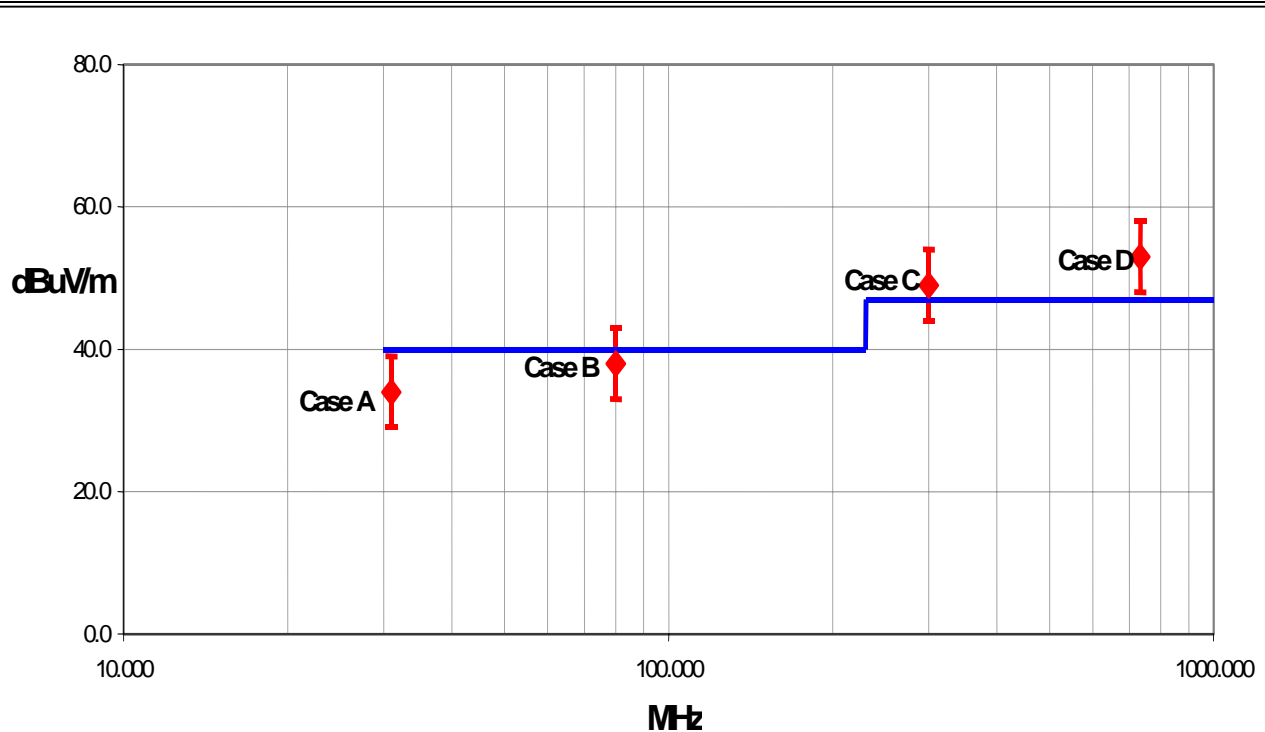

#### Test Result Scenarios:

**Case A:** Product complies.

**Case B:** Product conditionally complies. It is not possible to say with 95% confidence that the product complies.

**Case C:** Product conditionally does not comply. It is not possible to say with 95% confidence that the product does not comply.

**Case D:** Product does not comply.

**Radiated Emissions ≤ 1 GHz**

Value (dB)

Test Distance	Probability Distribution	Biconical Antenna		Log Periodic Antenna		Dipole Antenna	
		3m	10m	3m	10m	3m	10m
Combined standard uncertainty $u_c(y)$	normal	+ 1.86	+ 1.82	+ 2.23	+ 1.29	+ 1.31	+ 1.25
		- 1.88	- 1.87	- 1.41	- 1.26	- 1.27	- 1.25
Expanded uncertainty $U$ (level of confidence ≈ 95%)	normal (k=2)	+ 3.72	+ 3.64	+ 4.46	+ 2.59	+ 2.61	+ 2.49
		- 3.77	- 3.73	- 2.81	- 2.52	- 2.55	- 2.49

**Radiated Emissions > 1 GHz**

Value (dB)

Test Distance	Probability Distribution	Without High Pass Filter		With High Pass Filter	
		3m	10m	3m	10m
Combined standard uncertainty $u_c(y)$	normal	+ 1.29	+ 1.29	+ 1.38	+ 1.38
		- 1.25	- 1.25	- 1.35	- 1.35
Expanded uncertainty $U$ (level of confidence ≈ 95%)	normal (k=2)	+ 2.57	+ 2.57	+ 2.76	+ 2.76
		- 2.51	- 2.51	- 2.70	- 2.70

**Conducted Emissions**

	Probability Distribution	Value (+/- dB)
Combined standard uncertainty $u_c(y)$	normal	1.48
Expanded uncertainty $U$ (level of confidence ≈ 95 %)	normal (k = 2)	2.97

**Radiated Immunity**

	Probability Distribution	Value (+/- dB)
Combined standard uncertainty $u_c(y)$	normal	1.05
Expanded uncertainty $U$ (level of confidence ≈ 95 %)	normal (k = 2)	2.11

**Conducted Immunity**

	Probability Distribution	Value (+/- dB)
Combined standard uncertainty $u_c(y)$	normal	1.05
Expanded uncertainty $U$ (level of confidence ≈ 95 %)	normal (k = 2)	2.10

**Legend**

$u_c(y)$  = square root of the sum of squares of the individual standard uncertainties

$U$  = combined standard uncertainty multiplied by the coverage factor:  $k$ . This defines an interval about the measured result that will encompass the true value with a confidence level of approximately 95%. If a higher level of confidence is required, then  $k=3$  (CL of 99.7%) can be used. Please note that with a coverage factor of one,  $u_c(y)$  yields a confidence level of only 68%.

**California****Orange County Facility**

41 Tesla Ave.  
Irvine, CA 92618  
(888) 364-2378  
FAX (503) 844-3826

**Oregon****Evergreen Facility**

22975 NW Evergreen Pkwy.,  
Suite 400  
Hillsboro, OR 97124  
(503) 844-4066  
FAX (503) 844-3826

**Oregon****Trails End Facility**

30475 NE Trails End Lane  
Newberg, OR 97132  
(503) 844-4066  
FAX (503) 537-0735

**South Dakota****North Sioux City Facility**

745 N. Derby Lane  
P.O. Box 217  
North Sioux City, SD 57049  
(605) 232-5267  
FAX (605) 232-3873

**Washington****Sultan Facility**

14128 339<sup>th</sup> Ave. SE  
Sultan, WA 98294  
(888) 364-2378  
FAX (360) 793-2536



**Party Requesting the Test**

<b>Company Name:</b>	Intermec Technologies Corporation
<b>Address:</b>	550 Second St. SE
<b>City, State, Zip:</b>	Cedar Rapids, IA 52401-2023
<b>Test Requested By:</b>	Scott Holub
<b>Equipment Under Test:</b>	Bluetooth in 6820 printer with CDMA, GSM, 802.11b in 700C and 730
<b>Model:</b>	8520-00080
<b>First Date of Test:</b>	05-13-2004
<b>Last Date of Test:</b>	05-17-2004
<b>Receipt Date of Samples:</b>	05-13-2004
<b>Equipment Design Stage:</b>	Production
<b>Equipment Condition:</b>	No visual damage.

**Information Provided by the Party Requesting the Test**

<b>Clocks/Oscillators:</b>	Not provided at the time of test.
<b>I/O Ports:</b>	Serial on printer.

**Functional Description of the EUT (Equipment Under Test):**

Bluetooth radio installed in a 6820 Printer. Printer includes a docking station for 700C or 730.

**Client Justification for EUT Selection:**

The EUT is a representative production sample.

**Client Justification for Test Selection:**

These tests satisfy the requirements FCC 15.247 (c) for co-located transmitters.

**EUT Photo**

**Equipment modifications**

Item	Test	Date	Modification	Note	Disposition of EUT
1	Spurious Radiated Emissions	05/17/2004	No EMI suppression devices were added or modified during this test.	Same configuration as delivered.	EUT was returned to client following testing.

**Justification**

The EUT is a Bluetooth radio module installed inside Intermec's mobile printer, Model 6820 (FCC ID: EHABTS080-1). The 6820 includes a docking station for Intermec's handheld computers, Models 700C and 730. With the hand-held scanners, the EUT contains co-located radio modules (CDMA, GSM, 802.11(b), and Bluetooth). This test demonstrates compliance with FCC 15.247(c) emissions limits while the EUT is co-located with the previously certified radios in the 700C (FCC ID: HN2SB555-2, HN22011B-2, EHA700C-SMC45-1, EHABTS080 for the CDMA, 802.11(b), GSM, and Bluetooth radios, respectively) and 730 hand-held computers (FCC ID: EHABTM210, EHA802CF13 for the Bluetooth and 802.11(b) radios, respectively). Each radio transmits through its own antenna.

All possible combinations of harmonic emissions from the CDMA, 802.11(b), GSM, and Bluetooth radios were compared numerically. It was determined that there were no possible coincidental harmonics below 1 GHz. All the radios were configured for simultaneous transmission at the channels specified below:

**Channels in Specified Band Investigated:**

<b>802.11(b):</b>	1,11
<b>CDMA (Cellular):</b>	54, 55, 395, 467
<b>CDMA (PCS):</b>	1, 35, 1153
<b>Bluetooth:</b>	5, 11, 62, 68, 79, 80 High (2480MHz), Mid (2442MHz), Low (2402MHz)
<b>GSM:</b>	516, 606

**Operating Modes Investigated:****Bluetooth Radio in 6820 with 700C in docking station:**

Simultaneous transmission of Bluetooth Channel 11, 802.11(b) Channel 1, & CDMA PCS Channel 1
Simultaneous transmission of Bluetooth Channel 11, 802.11(b) Channel 1, & CDMA PCS Channel 1153
Simultaneous transmission of Bluetooth Channel 68, 802.11(b) Channel 11, & CDMA PCS Channel 35
Simultaneous transmission of Bluetooth Channel 62, 802.11(b) Channel 11, & CDMA PCS Channel 1153
Simultaneous transmission of Bluetooth Channel 11, 802.11(b) Channel 1, & CDMA Cellular Channel 467
Simultaneous transmission of Bluetooth Channel 5, 802.11(b) Channel 1, & CDMA Cellular Channel 395
Simultaneous transmission of Bluetooth Channel 79, 802.11(b) Channel 11, & CDMA Cellular Channel 55
Simultaneous transmission of Bluetooth Channel 79, 802.11(b) Channel 11, & CDMA Cellular Channel 54
Simultaneous transmission of Bluetooth Channel 11, 802.11(b) Channel 1, & GSM Channel 516
Simultaneous transmission of Bluetooth Channel 67, 802.11(b) Channel 11, & GSM Channel 516
Simultaneous transmission of Bluetooth Channel 2, 802.11(b) Channel 1, & GSM Channel 606
Simultaneous transmission of Bluetooth Channel 80, 802.11(b) Channel 11, & GSM Channel 606

**Bluetooth Radio in 6820:**

Bluetooth Low Channel only
Bluetooth Mid Channel only
Bluetooth High Channel only

**Bluetooth Radio in 6820 with 730 in docking station:**

Simultaneous transmission of Bluetooth Channel 80 and 802.11(b) Channel 11.
---

**Data Rates Investigated:**

Maximum
---------

**Antennas Investigated:**

<b>802.11(b):</b>	2011B integral antenna (internal to 700C and 730)
<b>CDMA (Cellular):</b>	805-606-102 Dual Band CDMA 900/1900MHz Antenna (SB555) (external to 700C)
<b>CDMA (PCS):</b>	805-666-204 Single Band CDMA 1900MHz Antenna (SB555) (external to 700C)
<b>Bluetooth:</b>	Integral PCB trace (internal to 6820, 700C, and 730)
<b>GSM:</b>	SMC45

**Output Power Setting(s) Investigated:**

Maximum

**Power Input Settings Investigated:**

120 VAC, 60 Hz.

**Frequency Range Investigated**

<b>Start Frequency</b>	30 MHz	<b>Stop Frequency</b>	26 GHz
------------------------	--------	-----------------------	--------

**Software\Firmware Applied During Test**

<b>Exercise software</b>	Blue Test FCC_Smart 802.11 Agency Test PhoneUtility	<b>Version</b>	Unknown
<b>Description</b>			
The system was tested using special test software to exercise the functions of the device during the testing such as channels, power, and modulation during simultaneous transmission.			

**EUT and Peripherals**

<b>Description</b>	<b>Manufacturer</b>	<b>Model/Part Number</b>	<b>Serial Number</b>
Bluetooth Radio in Printer	Intermec Technologies Corporation	8520-00080	Unknown
Printer	Intermec Technologies Corporation	6820	N/A
AC Adapter	Intermec Technologies Corporation	851-064-001	0001771
Handheld Computer with CDMA option	Intermec Technologies Corporation	700C	05400400868
Handheld Computer with GSM option	Intermec Technologies Corporation	700C	05400400636
Handheld Computer with Bluetooth and 802.11(b) only	Intermec Technologies Corporation	730	28010300022
Bluetooth Radio	Intermec Technologies Corporation	8520-00080	N/A
802.11(b) Radio	Intermec Technologies Corporation	2011B	N/A
CDMA Radio	Intermec Technologies Corporation	SB555	N/A
GSM Radio	Intermec Technologies Corporation	SMC45	N/A

## Remote Equipment Outside of Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
Remote laptop	Dell	TS30G	7247346BYK0204A
Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary			

## Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Power	No	2.0	No	AC Adapter	AC Mains
DC Leads	PA	1.8	PA	Printer	AC Adapter
Serial	Yes	4.0	No	Printer	Remote laptop
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

## Measurement Equipment

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Antenna, Horn	EMCO	3160-09	AHG	NCR	NA
Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	10/08/2003	12 mo
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APC	10/08/2003	12 mo
Antenna, Horn	EMCO	3160-08	AHK	NCR	NA
Antenna, Horn	EMCO	3115	AHC	09/18/2003	12 mo
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APJ	01/05/2004	13 mo
Pre-Amplifier	Amplifier Research	LN1000A	APS	02/05/2004	13 mo
Antenna, Biconilog	EMCO	3141	AXE	12/03/2003	24 mo
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	12/23/2003	13 mo
Spectrum Analyzer Display	Hewlett Packard	85662A	AALD	12/23/2003	13 mo
Quasi-Peak Adapter	Hewlett-Packard	85650A	AQF	12/23/2003	13 mo
Spectrum Analyzer	Tektronix	2784	AAO	02/26/2003	24 mo
High Pass Filter	Micro-Tronics	HPM50111	HFO	04/13/2004	13 mo
GSM/DCS/PCS MS Test Set	Hewlett-Packard	8922M	N/A	NCR	NA
GSM/DCS/PCS RF Interface	Hewlett-Packard	83220E	N/A	NCR	NA

## Test Description

**Requirement:** Per 15.247(c), the field strength of any spurious emissions or modulation products that fall in a restricted band, as defined in 15.205, is measured. The peak level must comply with the limits specified in 15.35(b). The average level (taken with a 10Hz VBW) must comply with the limits specified in 15.209.

**Configuration for Simultaneous Transmission:** The EUT is an Bluetooth radio module installed inside Intermec's mobile printer, Model 6820 (FCC ID: EHABTS080-1). The printer can have co-located radio modules when an Intermec Handheld Computer, 700C or 730, is installed in the docking station. The 700C (FCC ID: HN2SB555-2, HN22011B-2, EHA700C-SMC45-1, EHABTS080 for the CDMA, 802.11(b), GSM, and Bluetooth radios, respectively) and 730 (FCC ID: EHABTM210, EHA802CF13 for the Bluetooth and 802.11(b) radios, respectively) have been previously certified. With a handheld computer installed in the printer, the Bluetooth radio module can simultaneously transmit with four other co-located radios (CDMA, GSM, Bluetooth, and 802.11(b)). This test demonstrates compliance with FCC 15.247(c) emissions limits while the EUT is co-located with another previously certified mobile radio. The EUT can transmit simultaneously with CDMA, 802.11(b), and Bluetooth or with GSM, 802.11(b), and Bluetooth in the 700C, and it can transmit simultaneously with 802.11(b) and Bluetooth in the 730. Each radio transmits through its own antenna.

The following is an excerpt from the FCC / TCB Training Q & A, October 2002, Day 2, Question 7:

**Assuming that the radios do not share an antenna, only radiated tests for simultaneous transmission is required. If the radios share an antenna, antenna conducted measurements would also be required. Only one set of worst case simultaneous transmission data is going to be requested to be submitted at this time. The test engineer should indicate the worst case condition and provide justification as to why the worst case condition was chosen. The grantee should be reminded that even if the FCC requests one set of data, they are responsible for compliance for all modes of simultaneous transmission.**


All possible combinations of harmonic emissions from the CDMA, 802.11(b), GSM, and Bluetooth radios were compared numerically. It was determined that there were no possible coincidental harmonics below 1 GHz. The frequency range from 1 GHz to 26 GHz was investigated for channel combinations that would produce coincidental harmonics. Compliance with the restricted band at 2483.5 – 2500 MHz was also measured.

All the radios were configured for simultaneous transmission at the channels specified in the previous pages. The highest gain antennas to be used with the radios were tested. The spectrum was scanned throughout the specified range. While scanning, emissions from the radios were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antennas in three orthogonal axes, and adjusting the measurement antenna height and polarization (per ANSI C63.4:2001). A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

Bandwidths Used for Measurements			
Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 – 0.15	1.0	0.2	0.2
0.15 – 30.0	10.0	9.0	9.0
30.0 – 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

*Measurements were made using the bandwidths and detectors specified. No video filter was used.*

Completed by:



# RADIATED EMISSIONS DATA SHEET

EUT:	8520-00080	Work Order:	ITRM0026
Serial Number:		Date:	05/17/04
Customer:	Intermec Technologies Corporation	Temperature:	75
Attendees:	None	Humidity:	37%
Cust. Ref. No.:		Barometric Pressure:	29.91
Tested by:	Holly Ashkannejhad	Power:	120 V, 60 Hz
		Job Site:	EV01

<b>TEST SPECIFICATIONS</b>	
Specification:	FCC 15.247(c) Spurious Radiated Emissions
Method:	ANSI C63.4
Year:	2003
Year:	2001

**SAMPLE CALCULATIONS**  
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation  
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

**COMMENTS**  
 EUT installed in Intermec Model 6820 printer. Intermec handheld computer 730 in docking station.


**EUT OPERATING MODES**  
 Bluetooth 80 and 802.11b 11, in 730. Bluetooth 80 in 6820

**DEVIATIONS FROM TEST STANDARD**  
 No deviations.

<b>RESULTS</b>	<b>Run #</b>
Pass	27

Other

  
 Tested By: \_\_\_\_\_

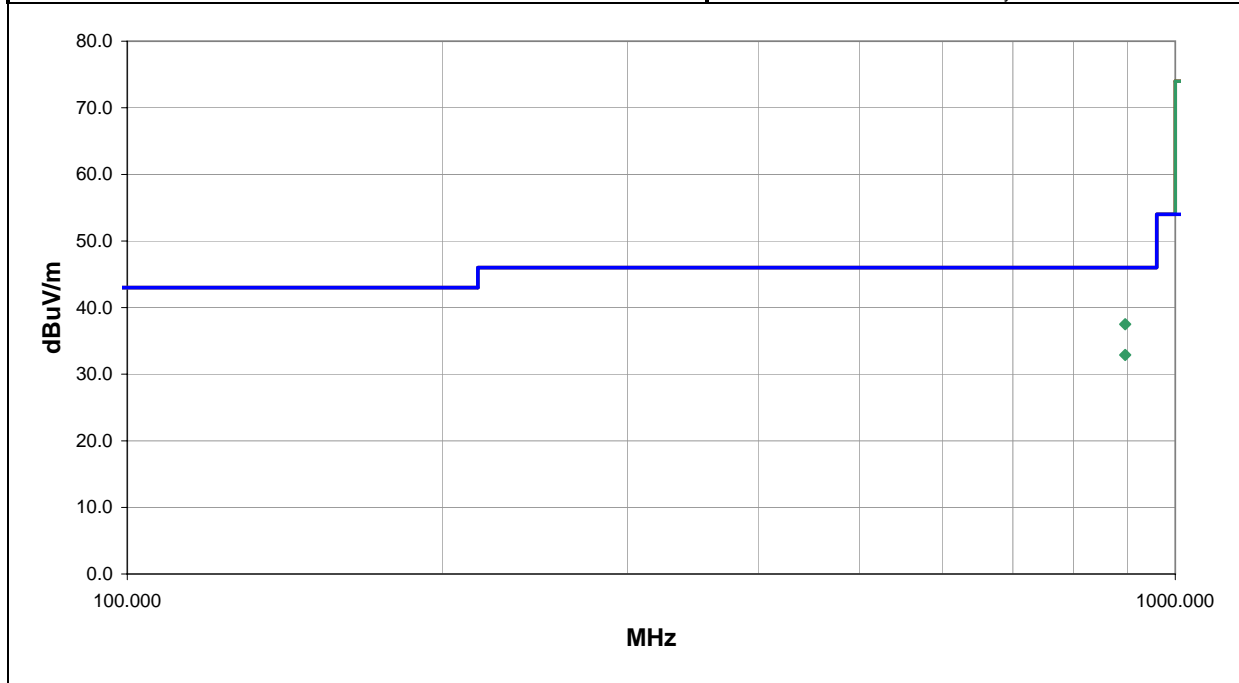

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
895.768	35.0	2.5	187.0	1.2	3.0	0.0	V-Bilog	QP	0.0	37.5	46.0	-8.5
895.768	30.4	2.5	264.0	1.5	3.0	0.0	H-Bilog	QP	0.0	32.9	46.0	-13.1

EUT:	8520-00080	Work Order:	ITRM0026
Serial Number:		Date:	05/17/04
Customer:	Intermec Technologies Corporation	Temperature:	75
Attendees:	None	Humidity:	37%
Cust. Ref. No.:		Barometric Pressure:	29.91
Tested by:	Holly Ashkannejhad	Power:	120 V, 60 Hz
		Job Site:	EV01

<b>TEST SPECIFICATIONS</b>	
Specification:	FCC 15.247(c) Spurious Radiated Emissions
Method:	ANSI C63.4
Year:	2003
Year:	2001

**SAMPLE CALCULATIONS**  
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation  
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

**COMMENTS**  
 EUT installed in Intermec Model 6820 printer. Intermec handheld computer 730 in docking station.


**EUT OPERATING MODES**  
 Bluetooth 80 and 802.11b 11, in 730. Bluetooth 80 in 6820

**DEVIATIONS FROM TEST STANDARD**  
 No deviations.

<b>RESULTS</b>	<b>Run #</b>
Pass	28

Other

  
 Tested By:

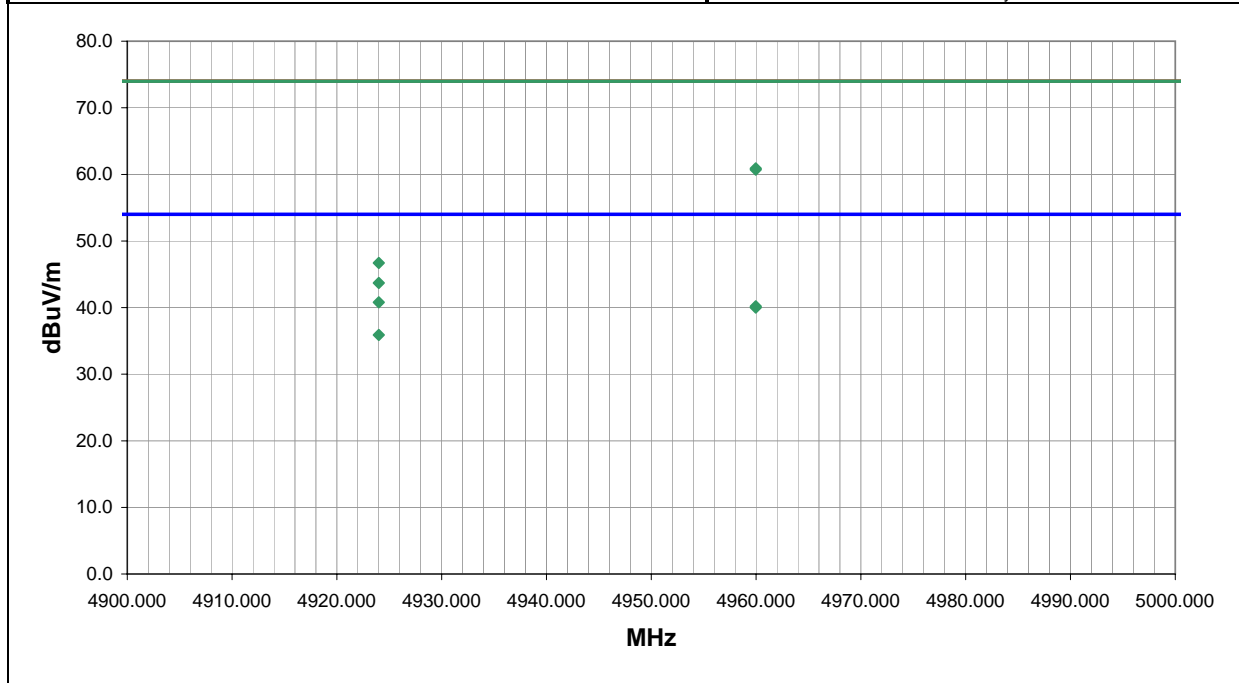

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
4959.976	57.1	3.8	130.0	1.2	3.0	0.0	V-Horn	PK	0.0	60.9	74.0	-13.1
4924.003	37.1	3.7	103.0	1.1	3.0	0.0	H-Horn	AV	0.0	40.8	54.0	-13.2
4959.976	56.9	3.8	208.0	1.1	3.0	0.0	H-Horn	PK	0.0	60.7	74.0	-13.3
4959.976	36.4	3.8	208.0	1.1	3.0	0.0	H-Horn	AV	0.0	40.2	54.0	-13.8
4959.976	36.2	3.8	130.0	1.2	3.0	0.0	V-Horn	AV	0.0	40.0	54.0	-14.0
4924.003	32.2	3.7	79.0	1.2	3.0	0.0	V-Horn	AV	0.0	35.9	54.0	-18.1
4924.003	43.0	3.7	103.0	1.1	3.0	0.0	H-Horn	PK	0.0	46.7	74.0	-27.3
4924.003	40.0	3.7	79.0	1.2	3.0	0.0	V-Horn	PK	0.0	43.7	74.0	-30.3



EUT:	8520-00080	Work Order:	ITRM0026
Serial Number:		Date:	05/17/04
Customer:	Intermec Technologies Corporation	Temperature:	75
Attendees:	None	Humidity:	37%
Cust. Ref. No.:		Barometric Pressure:	29.91
Tested by:	Holly Ashkannejhad	Power:	120 V, 60 Hz
		Job Site:	EV01

<b>TEST SPECIFICATIONS</b>	
Specification:	FCC 15.247(c) Spurious Radiated Emissions
Method:	ANSI C63.4
Year:	2003
Year:	2001

**SAMPLE CALCULATIONS**  
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation  
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

**COMMENTS**  
 EUT installed in Intermec Model 6820 printer. Intermec handheld computer 730 in docking station.


**EUT OPERATING MODES**  
 Bluetooth 80 and 802.11b 11, in 730. Bluetooth 80 in 6820

**DEVIATIONS FROM TEST STANDARD**  
 No deviations.

<b>RESULTS</b>	<b>Run #</b>
Pass	30

Other

  
 Tested By: \_\_\_\_\_

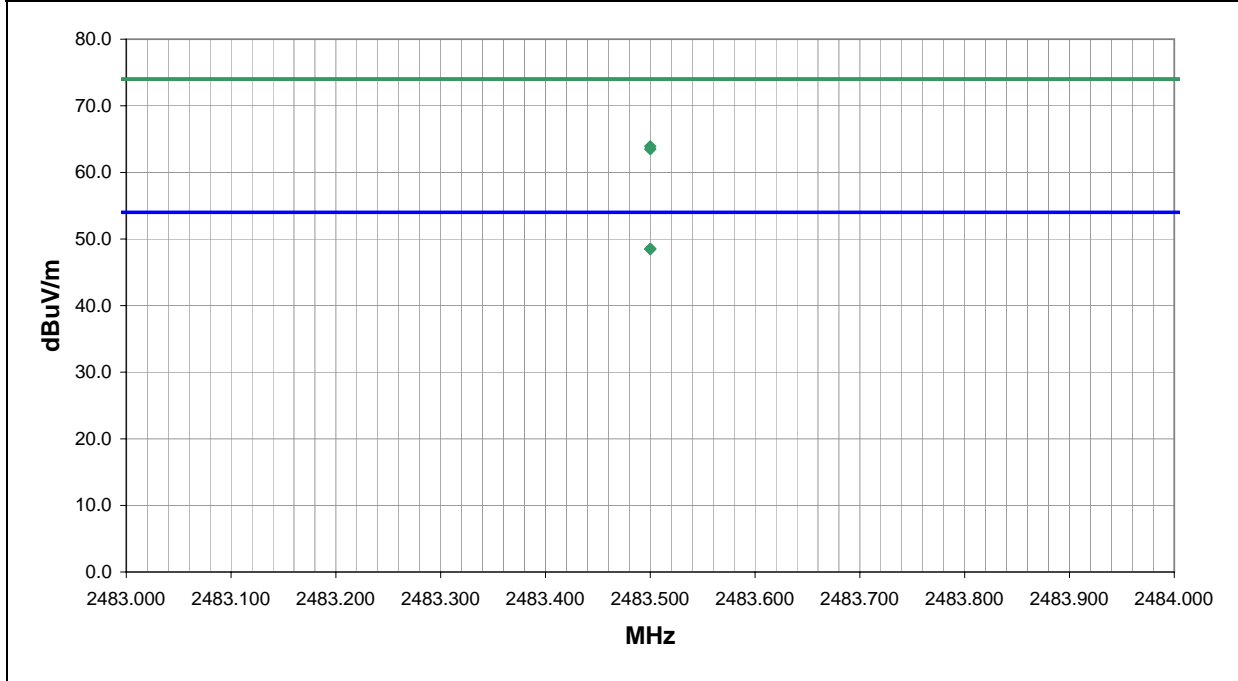

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
2483.500	31.0	-2.5	261.0	1.1	3.0	20.0	V-Horn	AV	0.0	48.5	54.0	-5.5
2483.500	31.0	-2.5	206.0	1.2	3.0	20.0	H-Horn	AV	0.0	48.5	54.0	-5.5
2483.500	46.4	-2.5	261.0	1.1	3.0	20.0	V-Horn	PK	0.0	63.9	74.0	-10.1
2483.500	46.0	-2.5	206.0	1.2	3.0	20.0	H-Horn	PK	0.0	63.5	74.0	-10.5

# RADIATED EMISSIONS DATA SHEET

EUT:	8520-00080	Work Order:	ITRM0026
Serial Number:		Date:	05/14/04
Customer:	Intermec Technologies Corporation	Temperature:	77
Attendees:	None	Humidity:	37%
Cust. Ref. No.:		Barometric Pressure:	30.03
Tested by:	Holly Ashkannejhad	Power:	120 V, 60 Hz
		Job Site:	EV01

**TEST SPECIFICATIONS**

Specification:	FCC 15.247(c) Spurious Radiated Emissions	Year:	2003
Method:	ANSI C63.4	Year:	2001

**SAMPLE CALCULATIONS**

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation  
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

**COMMENTS**

EUT installed in Intermec Model 6820 printer. Intermec Handheld Computer 700C in docking station.

**EUT OPERATING MODES**

Bluetooth 11, 802.11b 1, CDMA 467 (cellular) in 700C. Bluetooth 11 in 6820

**DEVIATIONS FROM TEST STANDARD**

No deviations.


**RESULTS**

Pass	Run #	5
------	-------	---

Other

*Holly Ashkannejhad*

Tested By:

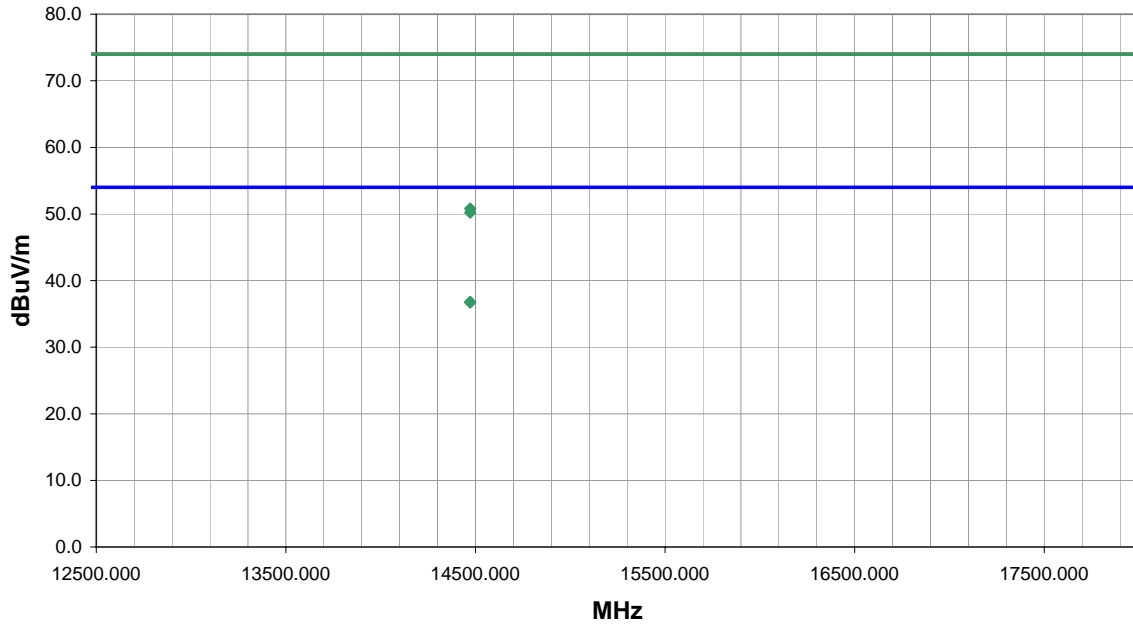

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
14472.000	26.9	9.9	72.0	1.2	3.0	0.0	V-Horn	AV	0.0	36.8	54.0	-17.2
14472.000	26.8	9.9	168.0	3.2	3.0	0.0	H-Horn	AV	0.0	36.7	54.0	-17.3
14472.000	40.9	9.9	72.0	1.2	3.0	0.0	V-Horn	PK	0.0	50.8	74.0	-23.2
14472.000	40.3	9.9	168.0	3.2	3.0	0.0	H-Horn	PK	0.0	50.2	74.0	-23.8

EUT:	8520-00080	Work Order:	ITRM0026
Serial Number:		Date:	05/14/04
Customer:	Intermec Technologies Corporation	Temperature:	77
Attendees:	None	Humidity:	37%
Cust. Ref. No.:		Barometric Pressure:	30.03
Tested by:	Holly Ashkannejhad	Power:	120 V, 60 Hz
		Job Site:	EV01

<b>TEST SPECIFICATIONS</b>	
Specification:	FCC 15.247(c) Spurious Radiated Emissions
Method:	ANSI C63.4
Year:	2003
Year:	2001

**SAMPLE CALCULATIONS**  
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation  
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

**COMMENTS**  
 EUT installed in Intermec Model 6820 printer. Intermec Handheld Computer 700C in docking station.


**EUT OPERATING MODES**  
 Bluetooth 11, 802.11b 1, CDMA 1 (PCS) in 700C. Bluetooth 11 in 6820

**DEVIATIONS FROM TEST STANDARD**  
 No deviations.

<b>RESULTS</b>	<b>Run #</b>
Pass	6

Other

  
 Tested By:

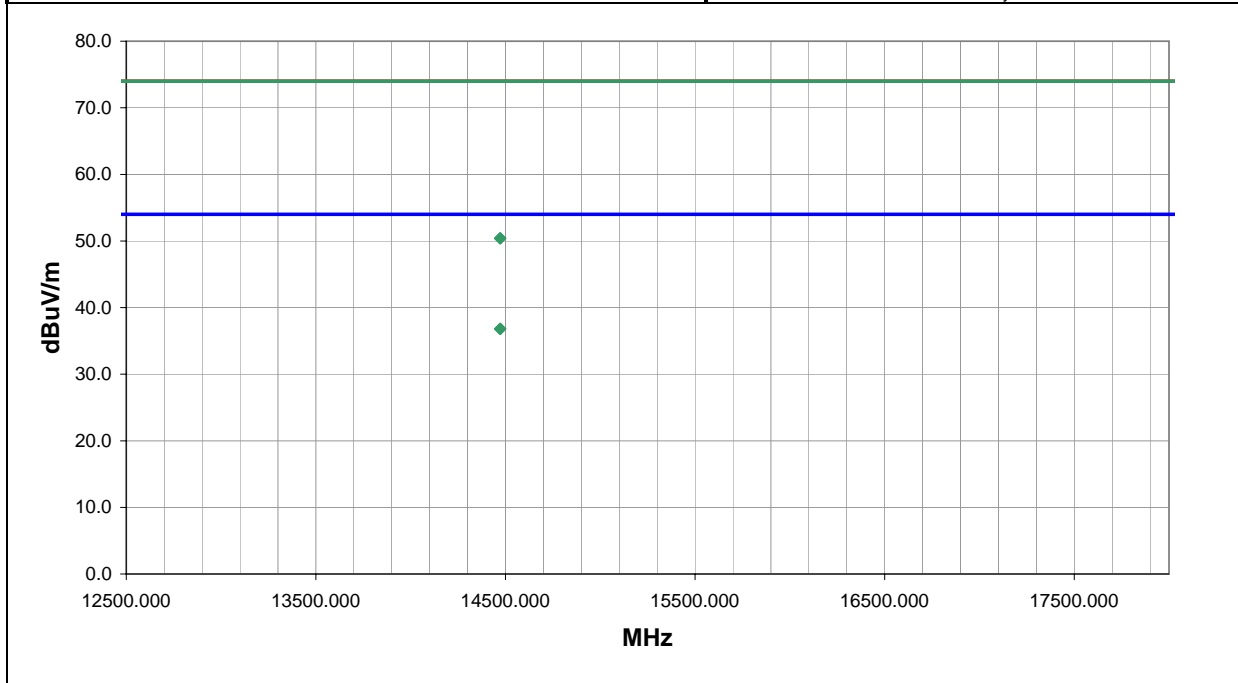

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
14472.000	26.9	9.9	81.0	2.2	3.0	0.0	H-Horn	AV	0.0	36.8	54.0	-17.2
14472.000	26.9	9.9	18.0	2.4	3.0	0.0	V-Horn	AV	0.0	36.8	54.0	-17.2
14472.000	40.5	9.9	81.0	2.2	3.0	0.0	H-Horn	PK	0.0	50.4	74.0	-23.6
14472.000	40.5	9.9	18.0	2.4	3.0	0.0	V-Horn	PK	0.0	50.4	74.0	-23.6

EUT:	8520-00080	Work Order:	ITRM0026
Serial Number:		Date:	05/14/04
Customer:	Intermec Technologies Corporation	Temperature:	77
Attendees:	None	Humidity:	37%
Cust. Ref. No.:		Barometric Pressure:	30.03
Tested by:	Holly Ashkannejhad	Power:	120 V, 60 Hz
		Job Site:	EV01

<b>TEST SPECIFICATIONS</b>	
Specification:	FCC 15.247(c) Spurious Radiated Emissions
Method:	ANSI C63.4
Year:	2003
Year:	2001

**SAMPLE CALCULATIONS**  
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation  
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

**COMMENTS**  
 EUT installed in Intermec Model 6820 printer. Intermec Handheld Computer 700C in docking station.


**EUT OPERATING MODES**  
 Bluetooth 11, 802.11b 1, CDMA 1 (PCS) in 700C. Bluetooth 11 in 6820

**DEVIATIONS FROM TEST STANDARD**  
 No deviations.

<b>RESULTS</b>	<b>Run #</b>
Pass	7

Other

  
 Tested By:

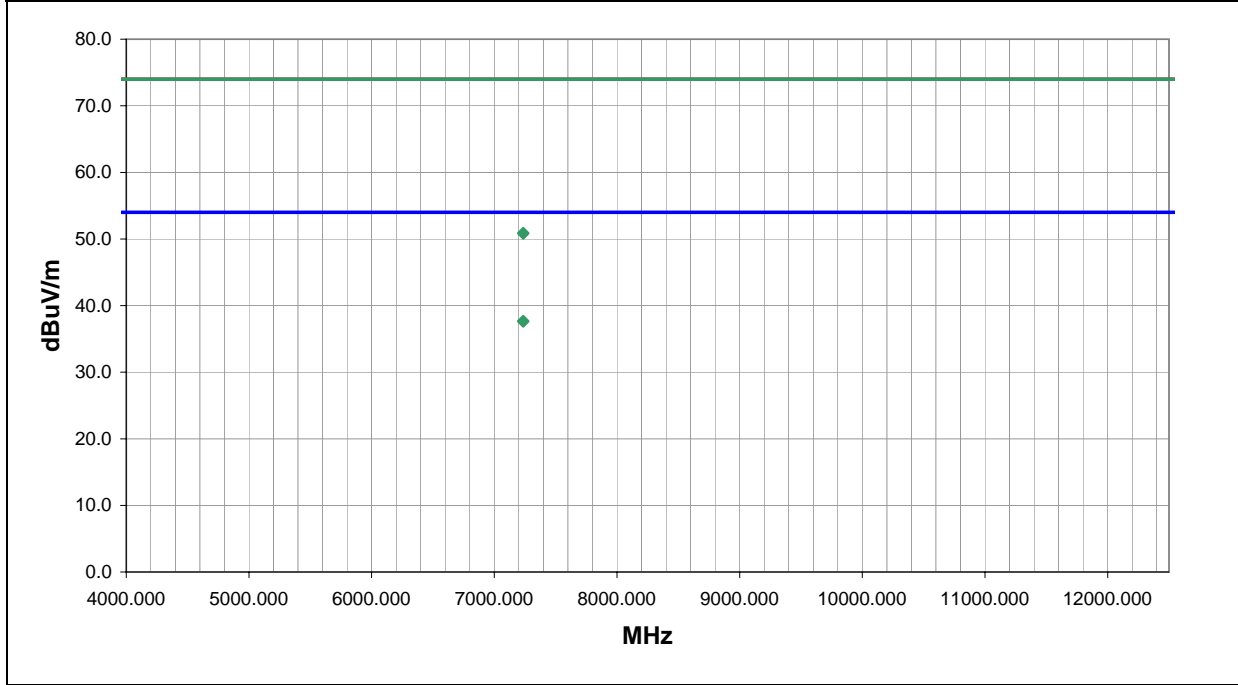

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
7236.000	27.3	10.4	63.0	1.2	3.0	0.0	H-Horn	AV	0.0	37.7	54.0	-16.3
7236.000	27.2	10.4	199.0	1.3	3.0	0.0	V-Horn	AV	0.0	37.6	54.0	-16.4
7236.000	40.5	10.4	63.0	1.2	3.0	0.0	H-Horn	PK	0.0	50.9	74.0	-23.1
7236.000	40.4	10.4	199.0	1.3	3.0	0.0	V-Horn	PK	0.0	50.8	74.0	-23.2

# RADIATED EMISSIONS DATA SHEET

EUT:	8520-00080	Work Order:	ITRM0026
Serial Number:		Date:	05/14/04
Customer:	Intermec Technologies Corporation	Temperature:	77
Attendees:	None	Humidity:	37%
Cust. Ref. No.:		Barometric Pressure:	30.03
Tested by:	Holly Ashkannejhad	Power:	120 V, 60 Hz
		Job Site:	EV01

**TEST SPECIFICATIONS**

Specification:	FCC 15.247(c) Spurious Radiated Emissions	Year:	2003
Method:	ANSI C63.4	Year:	2001

**SAMPLE CALCULATIONS**

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation  
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

**COMMENTS**

EUT installed in Intermec Model 6820 printer. Intermec Handheld Computer 700C in docking station.

**EUT OPERATING MODES**

Bluetooth 11, 802.11b 1, CDMA 1153 (PCS) in 700C. Bluetooth 11 in 6820

**DEVIATIONS FROM TEST STANDARD**

No deviations.


**RESULTS**

Pass	Run #	8
------	-------	---

Other

*Holly Ashkannejhad*

Tested By:

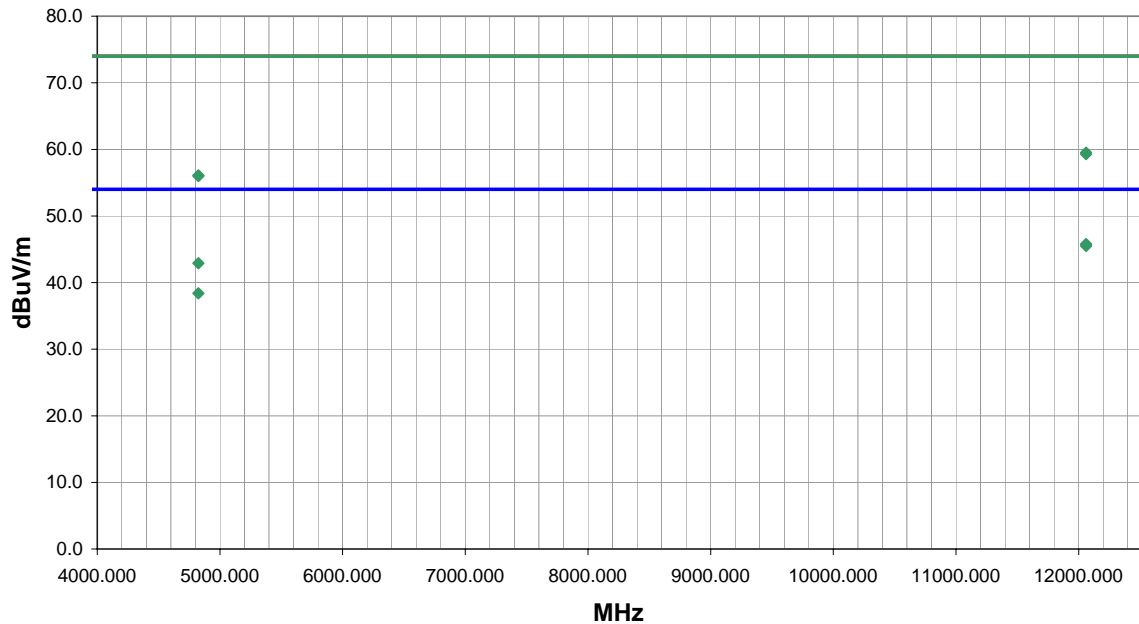

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
12060.000	25.2	20.6	97.0	3.3	3.0	0.0	V-Horn	AV	0.0	45.8	54.0	-8.2
12060.000	24.9	20.6	160.0	4.0	3.0	0.0	H-Horn	AV	0.0	45.5	54.0	-8.5
4824.000	39.5	3.4	126.0	1.2	3.0	0.0	V-Horn	AV	0.0	42.9	54.0	-11.1
12060.000	38.9	20.6	97.0	3.3	3.0	0.0	V-Horn	PK	0.0	59.5	74.0	-14.5
12060.000	38.7	20.6	160.0	4.0	3.0	0.0	H-Horn	PK	0.0	59.3	74.0	-14.7
4824.000	35.0	3.4	81.0	1.3	3.0	0.0	H-Horn	AV	0.0	38.4	54.0	-15.6
4824.000	52.7	3.4	81.0	1.3	3.0	0.0	H-Horn	PK	0.0	56.1	74.0	-17.9
4824.000	52.6	3.4	126.0	1.2	3.0	0.0	V-Horn	PK	0.0	56.0	74.0	-18.0

EUT:	8520-00080	Work Order:	ITRM0026
Serial Number:		Date:	05/14/04
Customer:	Intermec Technologies Corporation	Temperature:	77
Attendees:	None	Humidity:	37%
Cust. Ref. No.:		Barometric Pressure:	30.03
Tested by:	Holly Ashkannejhad	Power:	120 V, 60 Hz
		Job Site:	EV01

<b>TEST SPECIFICATIONS</b>	
Specification:	FCC 15.247(c) Spurious Radiated Emissions
Method:	ANSI C63.4
Year:	2003
Year:	2001

**SAMPLE CALCULATIONS**  
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation  
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

**COMMENTS**  
 EUT installed in Intermec Model 6820 printer. Intermec Handheld Computer 700C in docking station.


**EUT OPERATING MODES**  
 Bluetooth 68, 802.11b 11, CDMA 35 (PCS) in 700C. Bluetooth 68 in 6820

**DEVIATIONS FROM TEST STANDARD**  
 No deviations.

<b>RESULTS</b>	<b>Run #</b>
Pass	9

Other

  
 Tested By:

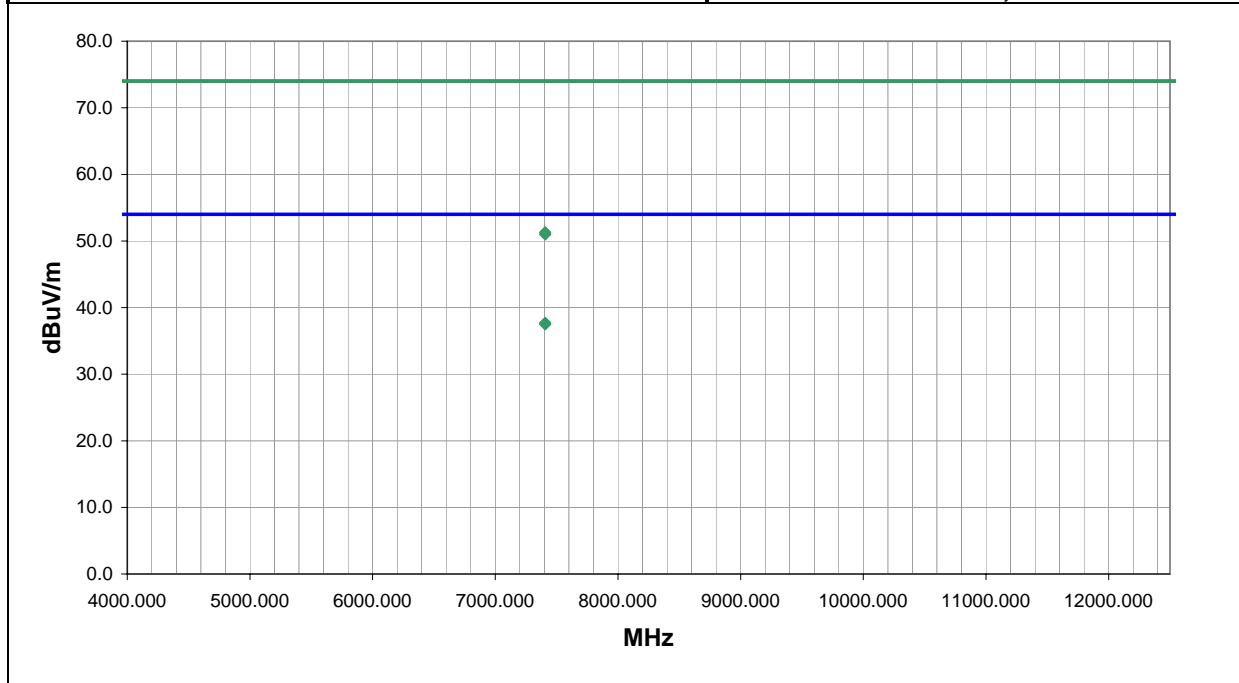

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
7407.000	26.7	11.0	47.0	2.9	3.0	0.0	V-Horn	AV	0.0	37.7	54.0	-16.3
7407.000	26.5	11.0	163.0	1.3	3.0	0.0	H-Horn	AV	0.0	37.5	54.0	-16.5
7407.000	40.3	11.0	163.0	1.3	3.0	0.0	H-Horn	PK	0.0	51.3	74.0	-22.7
7407.000	40.0	11.0	47.0	2.9	3.0	0.0	V-Horn	PK	0.0	51.0	74.0	-23.0

EUT:	8520-00080	Work Order:	ITRM0026
Serial Number:		Date:	05/14/04
Customer:	Intermec Technologies Corporation	Temperature:	77
Attendees:	None	Humidity:	37%
Cust. Ref. No.:		Barometric Pressure:	30.03
Tested by:	Holly Ashkannejhad	Power:	120 V, 60 Hz
		Job Site:	EV01

<b>TEST SPECIFICATIONS</b>	
Specification:	FCC 15.247(c) Spurious Radiated Emissions
Method:	ANSI C63.4
Year:	2003
Year:	2001

**SAMPLE CALCULATIONS**  
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation  
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator


**COMMENTS**  
 EUT installed in Intermec Model 6820 printer. Intermec Handheld Computer 700C in docking station.


**EUT OPERATING MODES**  
 Bluetooth 11, 802.11b 1, CDMA 467 (cellular) in 700C. Bluetooth 11 in 6820

**DEVIATIONS FROM TEST STANDARD**  
 No deviations.

<b>RESULTS</b>	<b>Run #</b>
Pass	10

Other

  
 Tested By:

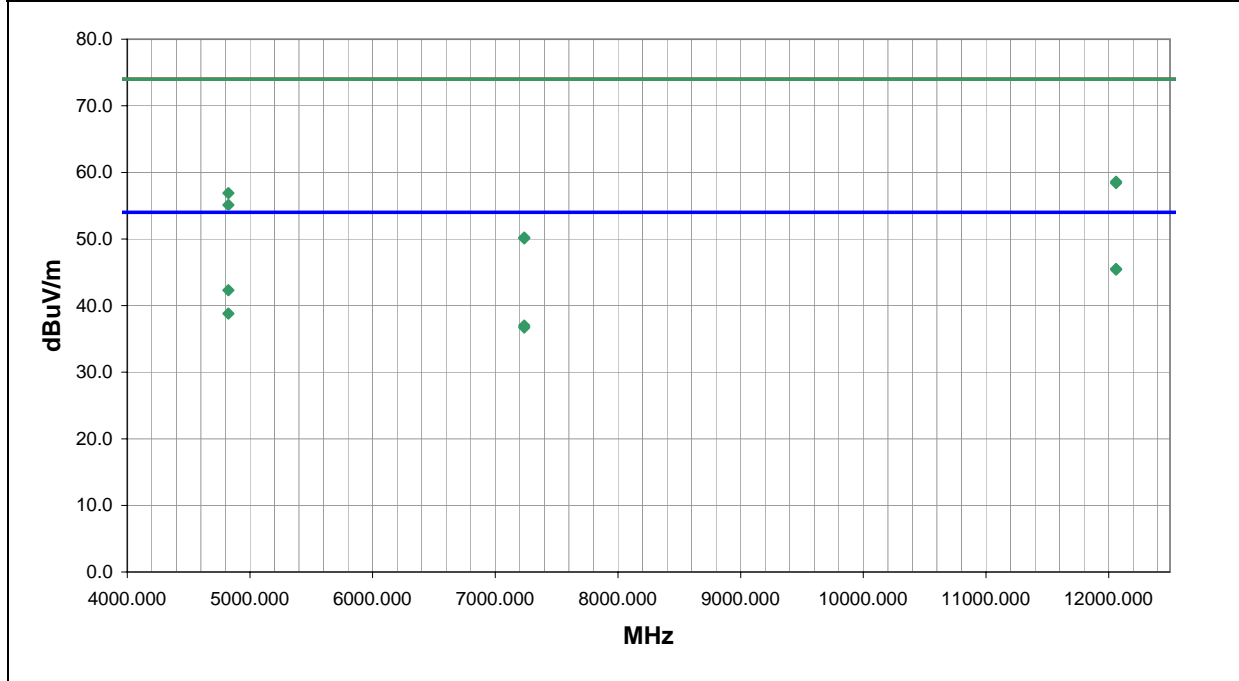

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
12060.000	24.9	20.6	250.0	1.2	3.0	0.0	V-Horn	AV	0.0	45.5	54.0	-8.5
12060.000	24.8	20.6	91.0	2.5	3.0	0.0	H-Horn	AV	0.0	45.4	54.0	-8.6
4824.000	38.9	3.4	59.0	1.3	3.0	0.0	H-Horn	AV	0.0	42.3	54.0	-11.7
4824.000	35.4	3.4	255.0	1.2	3.0	0.0	V-Horn	AV	0.0	38.8	54.0	-15.2
12060.000	38.0	20.6	91.0	2.5	3.0	0.0	H-Horn	PK	0.0	58.6	74.0	-15.4
12060.000	37.8	20.6	250.0	1.2	3.0	0.0	V-Horn	PK	0.0	58.4	74.0	-15.6
7236.000	26.6	10.4	180.0	1.2	3.0	0.0	V-Horn	AV	0.0	37.0	54.0	-17.0
4824.000	53.5	3.4	59.0	1.3	3.0	0.0	H-Horn	PK	0.0	56.9	74.0	-17.1
7236.000	26.3	10.4	7.0	1.3	3.0	0.0	H-Horn	AV	0.0	36.7	54.0	-17.3
4824.000	51.7	3.4	255.0	1.2	3.0	0.0	V-Horn	PK	0.0	55.1	74.0	-18.9
7236.000	39.8	10.4	7.0	1.3	3.0	0.0	H-Horn	PK	0.0	50.2	74.0	-23.8
7236.000	39.7	10.4	180.0	1.2	3.0	0.0	V-Horn	PK	0.0	50.1	74.0	-23.9

# RADIATED EMISSIONS DATA SHEET

EUT:	8520-00080	Work Order:	ITRM0026
Serial Number:		Date:	05/14/04
Customer:	Intermec Technologies Corporation	Temperature:	77
Attendees:	None	Humidity:	37%
Cust. Ref. No.:		Barometric Pressure:	30.03
Tested by:	Holly Ashkannejhad	Power:	120 V, 60 Hz
		Job Site:	EV01

**TEST SPECIFICATIONS**

Specification:	FCC 15.247(c) Spurious Radiated Emissions	Year:	2003
Method:	ANSI C63.4	Year:	2001

**SAMPLE CALCULATIONS**

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation  
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

**COMMENTS**

EUT installed in Intermec Model 6820 printer. Intermec Handheld Computer 700C in docking station.

**EUT OPERATING MODES**

Bluetooth 79, 802.11b 11, CDMA 55 (cellular) in 700C. Bluetooth 79 in 6820

**DEVIATIONS FROM TEST STANDARD**

No deviations.


**RESULTS**

Pass	Run #	11
------	-------	----

Other



Tested By:

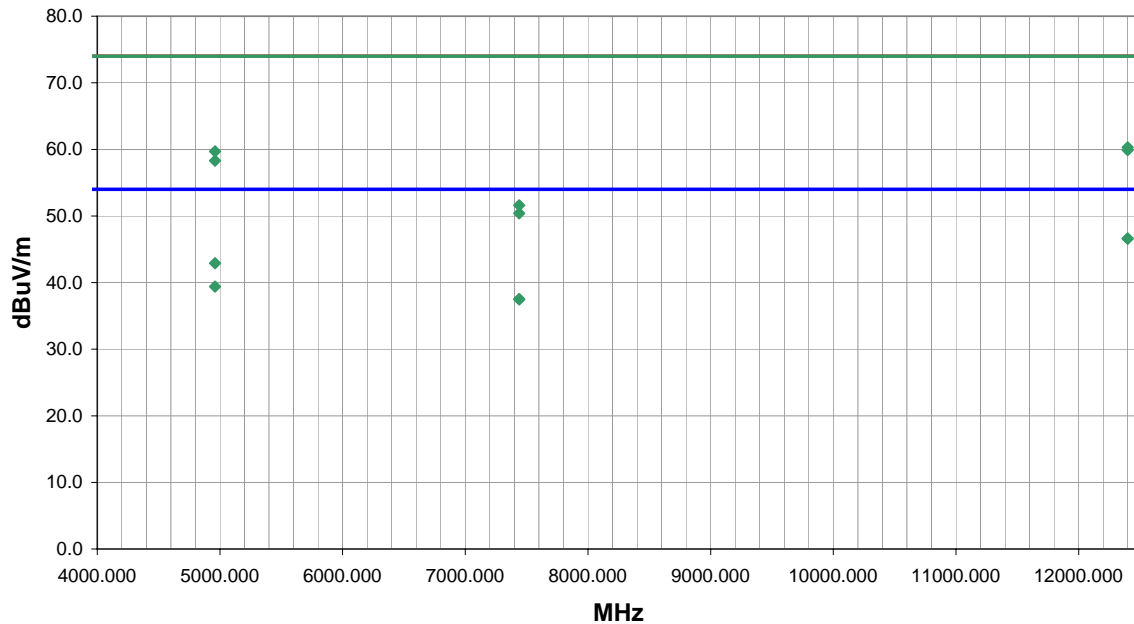

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
12400.000	25.0	21.6	66.0	1.9	3.0	0.0	H-Horn	AV	0.0	46.6	54.0	-7.4
12400.000	25.0	21.6	221.0	1.2	3.0	0.0	V-Horn	AV	0.0	46.6	54.0	-7.4
4960.000	39.1	3.8	21.0	1.3	3.0	0.0	H-Horn	AV	0.0	42.9	54.0	-11.1
12400.000	38.7	21.6	221.0	1.2	3.0	0.0	V-Horn	PK	0.0	60.3	74.0	-13.7
12400.000	38.3	21.6	66.0	1.9	3.0	0.0	H-Horn	PK	0.0	59.9	74.0	-14.1
4960.000	55.9	3.8	117.0	1.2	3.0	0.0	V-Horn	PK	0.0	59.7	74.0	-14.3
4960.000	35.6	3.8	117.0	1.2	3.0	0.0	V-Horn	AV	0.0	39.4	54.0	-14.6
4960.000	54.5	3.8	21.0	1.3	3.0	0.0	H-Horn	PK	0.0	58.3	74.0	-15.7
7440.000	26.5	11.0	233.0	1.3	3.0	0.0	H-Horn	AV	0.0	37.5	54.0	-16.5
7440.000	26.5	11.0	125.0	1.2	3.0	0.0	V-Horn	AV	0.0	37.5	54.0	-16.5
7440.000	40.6	11.0	125.0	1.2	3.0	0.0	V-Horn	PK	0.0	51.6	74.0	-22.4
7440.000	39.4	11.0	233.0	1.3	3.0	0.0	H-Horn	PK	0.0	50.4	74.0	-23.6



# RADIATED EMISSIONS DATA SHEET

EUT:	8520-00080	Work Order:	ITRM0026
Serial Number:		Date:	05/15/04
Customer:	Intermec Technologies Corporation	Temperature:	72
Attendees:	None	Humidity:	42%
Cust. Ref. No.:		Barometric Pressure:	30.05
Tested by:	Dan Haas	Power:	120 V, 60 Hz
		Job Site:	EV01

<b>TEST SPECIFICATIONS</b>	
Specification:	FCC 15.247(c) Spurious Radiated Emissions
Method:	ANSI C63.4
Year:	2003
Year:	2001

**SAMPLE CALCULATIONS**  
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation  
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

**COMMENTS**  
 EUT installed in Intermec Model 6820 printer. Intermec Handheld Computer 700C in docking station.


**EUT OPERATING MODES**  
 Bluetooth 79, 802.11b 11, CDMA 54 (cellular) in 700C. Bluetooth 79 in 6820

**DEVIATIONS FROM TEST STANDARD**  
 No deviations.

<b>RESULTS</b>	<b>Run #</b>
Pass	13

Other

  
 Tested By: \_\_\_\_\_

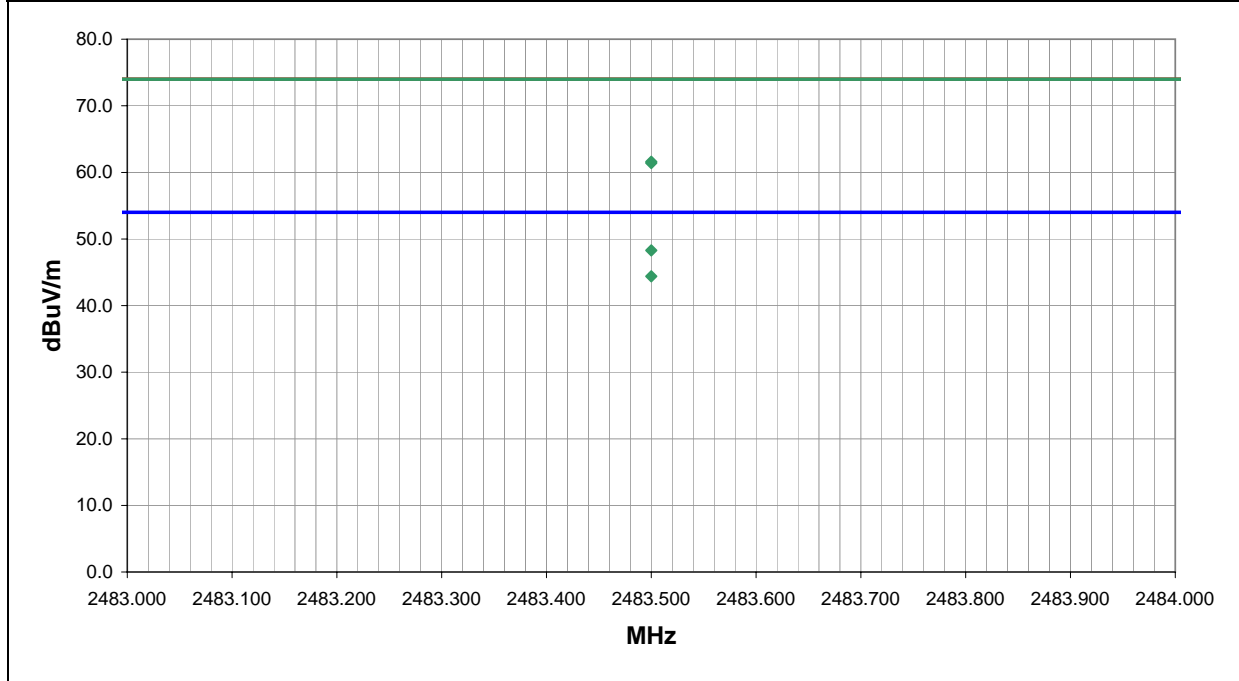

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
2483.500	30.8	-2.5	300.0	1.2	3.0	20.0	H-Horn	AV	0.0	48.3	54.0	-5.7
2483.500	26.9	-2.5	179.0	1.2	3.0	20.0	V-Horn	AV	0.0	44.4	54.0	-9.6
2483.500	44.1	-2.5	179.0	1.2	3.0	20.0	V-Horn	PK	0.0	61.6	74.0	-12.4
2483.500	43.9	-2.5	300.0	1.2	3.0	20.0	H-Horn	PK	0.0	61.4	74.0	-12.6

# RADIATED EMISSIONS DATA SHEET

EUT:	8520-00080	Work Order:	ITRM0026
Serial Number:		Date:	05/15/04
Customer:	Intermec Technologies Corporation	Temperature:	72
Attendees:	None	Humidity:	42%
Cust. Ref. No.:		Barometric Pressure:	30.05
Tested by:	Dan Haas	Power:	120 V, 60 Hz
		Job Site:	EV01

**TEST SPECIFICATIONS**

Specification:	FCC Part 15.247(c)	Year:	2003
Method:	ANSI C63.4	Year:	2001

**SAMPLE CALCULATIONS**

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation  
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

**COMMENTS**

EUT installed in Intermec Model 6820 printer. Intermec Handheld Computer 700C in docking station.

**EUT OPERATING MODES**

Bluetooth 79, 802.11b 11, CDMA 55 (cellular) in 700C. Bluetooth 79 in 6820

**DEVIATIONS FROM TEST STANDARD**

No deviations.


**RESULTS**

Pass	Run #	14
------	-------	----

Other



Tested By:

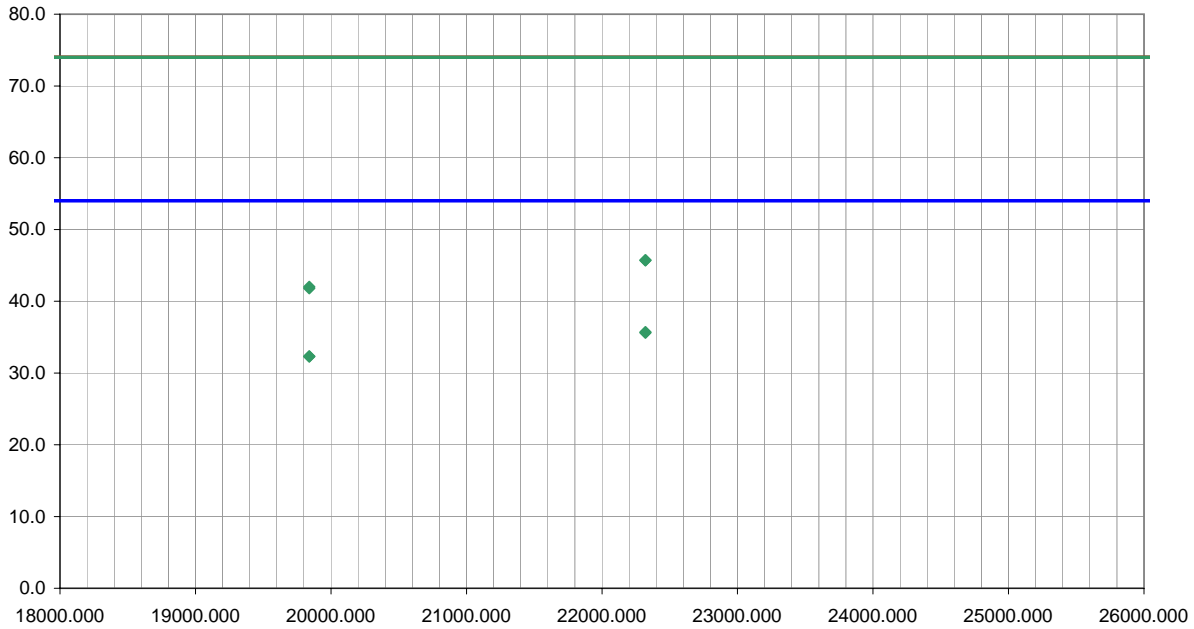

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
22320.000	26.5	9.2	0.0	1.0	3.0	0.0	I-High Horr	AV	0.0	35.7	54.0	-18.3
22320.000	26.4	9.2	0.0	1.0	3.0	0.0	V-High Horr	AV	0.0	35.6	54.0	-18.4
19840.000	23.4	8.9	0.0	1.0	3.0	0.0	V-High Horr	AV	0.0	32.3	54.0	-21.7
19840.000	23.4	8.9	0.0	1.0	3.0	0.0	I-High Horr	AV	0.0	32.3	54.0	-21.7
22320.000	36.5	9.2	0.0	1.0	3.0	0.0	I-High Horr	PK	0.0	45.7	74.0	-28.3
22320.000	36.5	9.2	0.0	1.0	3.0	0.0	V-High Horr	PK	0.0	45.7	74.0	-28.3
19840.000	33.1	8.9	0.0	1.0	3.0	0.0	I-High Horr	PK	0.0	42.0	74.0	-32.0
19840.000	32.9	8.9	0.0	1.0	3.0	0.0	V-High Horr	PK	0.0	41.8	74.0	-32.2

# RADIATED EMISSIONS DATA SHEET

EUT:	8520-00080	Work Order:	ITRM0026
Serial Number:		Date:	05/15/04
Customer:	Intermec Technologies Corporation	Temperature:	72
Attendees:	None	Humidity:	42%
Cust. Ref. No.:		Barometric Pressure:	30.05
Tested by:	Dan Haas	Power:	120 V, 60 Hz
		Job Site:	EV01

**TEST SPECIFICATIONS**

Specification:	FCC Part 15.247(c)	Year:	2003
Method:	ANSI C63.4	Year:	2001

**SAMPLE CALCULATIONS**

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation  
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

**COMMENTS**

EUT installed in Intermec Model 6820 printer. Intermec Handheld Computer 700C in docking station.

**EUT OPERATING MODES**

Bluetooth 11, 802.11b 1, CDMA 467 (cellular) in 700C. Bluetooth 11 in 6820

**DEVIATIONS FROM TEST STANDARD**

No deviations.


**RESULTS**

Pass	Run #	15
------	-------	----

Other



Tested By:

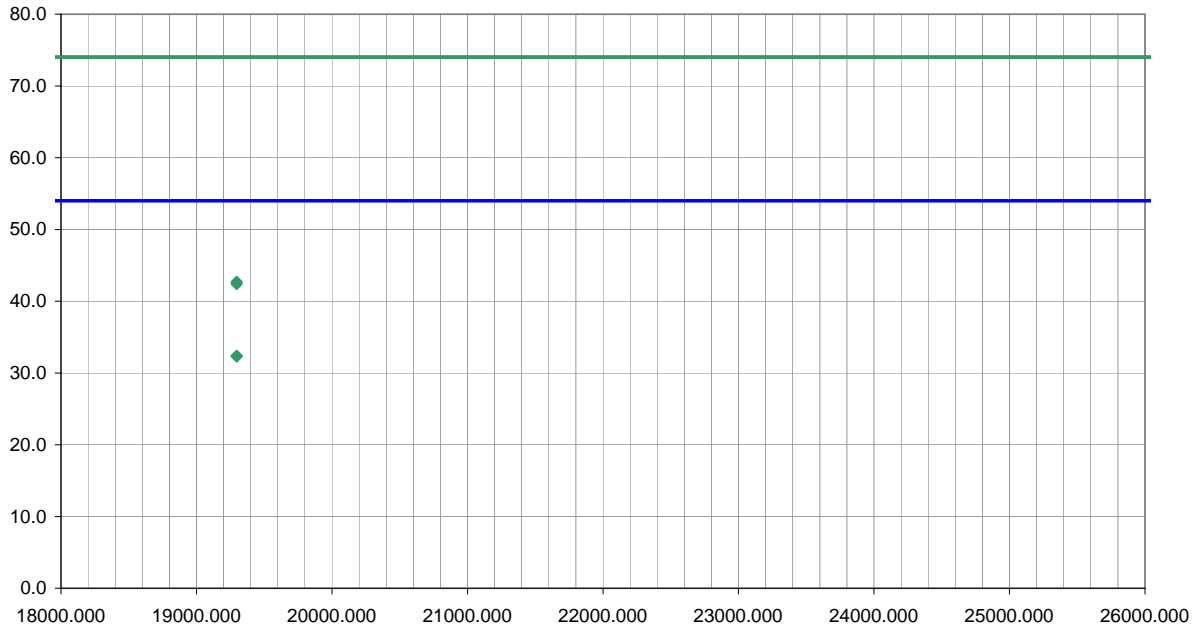

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
19296.000	24.4	8.0	0.0	1.0	3.0	0.0	I-High Horr	AV	0.0	32.4	54.0	-21.6
19296.000	24.3	8.0	0.0	1.0	3.0	0.0	V-High Horr	AV	0.0	32.3	54.0	-21.7
19296.000	34.7	8.0	0.0	1.0	3.0	0.0	V-High Horr	PK	0.0	42.7	74.0	-31.3
19296.000	34.4	8.0	0.0	1.0	3.0	0.0	I-High Horr	PK	0.0	42.4	74.0	-31.6

# RADIATED EMISSIONS DATA SHEET

EUT:	8520-00080	Work Order:	ITRM0026
Serial Number:		Date:	05/15/04
Customer:	Intermec Technologies Corporation	Temperature:	72
Attendees:	None	Humidity:	42%
Cust. Ref. No.:		Barometric Pressure:	30.05
Tested by:	Dan Haas	Power:	120 V, 60 Hz
		Job Site:	EV01

**TEST SPECIFICATIONS**

Specification:	FCC Part 15.247(c)	Year:	2003
Method:	ANSI C63.4	Year:	2001

**SAMPLE CALCULATIONS**

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

**COMMENTS**

EUT installed in Intermec Model 6820 printer. Intermec Handheld Computer 700C in docking station.

**EUT OPERATING MODES**

Bluetooth 68, 802.11b 11, CDMA 35 (PCS) in 700C. Bluetooth 68 in 6820

**DEVIATIONS FROM TEST STANDARD**

No deviations.


**RESULTS**

Pass	Run #	16
------	-------	----

Other



Tested By:

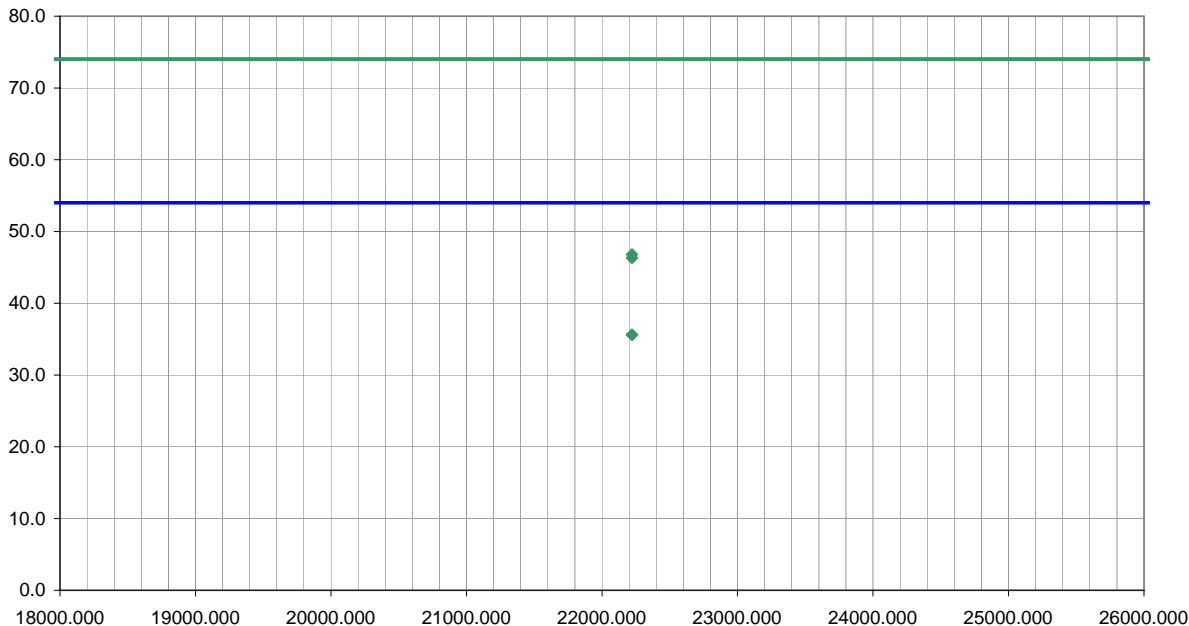

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
22221.000	26.6	9.0	0.0	1.0	3.0	0.0	V-High Horr	AV	0.0	35.6	54.0	-18.4
22221.000	26.6	9.0	0.0	1.0	3.0	0.0	I-High Horr	AV	0.0	35.6	54.0	-18.4
22221.000	37.8	9.0	0.0	1.0	3.0	0.0	V-High Horr	PK	0.0	46.8	74.0	-27.2
22221.000	37.3	9.0	0.0	1.0	3.0	0.0	I-High Horr	PK	0.0	46.3	74.0	-27.7

# RADIATED EMISSIONS DATA SHEET

EUT:	8520-00080	Work Order:	ITRM0026
Serial Number:		Date:	05/15/04
Customer:	Intermec Technologies Corporation	Temperature:	72
Attendees:	None	Humidity:	42%
Cust. Ref. No.:		Barometric Pressure:	30.05
Tested by:	Dan Haas	Power:	120 V, 60 Hz
		Job Site:	EV01

**TEST SPECIFICATIONS**

Specification:	FCC Part 15.247(c)	Year:	2003
Method:	ANSI C63.4	Year:	2001

**SAMPLE CALCULATIONS**

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation  
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

**COMMENTS**

EUT installed in Intermec Model 6820 printer. Intermec Handheld Computer 700C in docking station.

**EUT OPERATING MODES**

Bluetooth 11, 802.11b 1, CDMA 1153 (PCS) in 700C. Bluetooth 11 in 6820

**DEVIATIONS FROM TEST STANDARD**

No deviations.


**RESULTS**

Pass	Run #	17
------	-------	----

Other



Tested By:

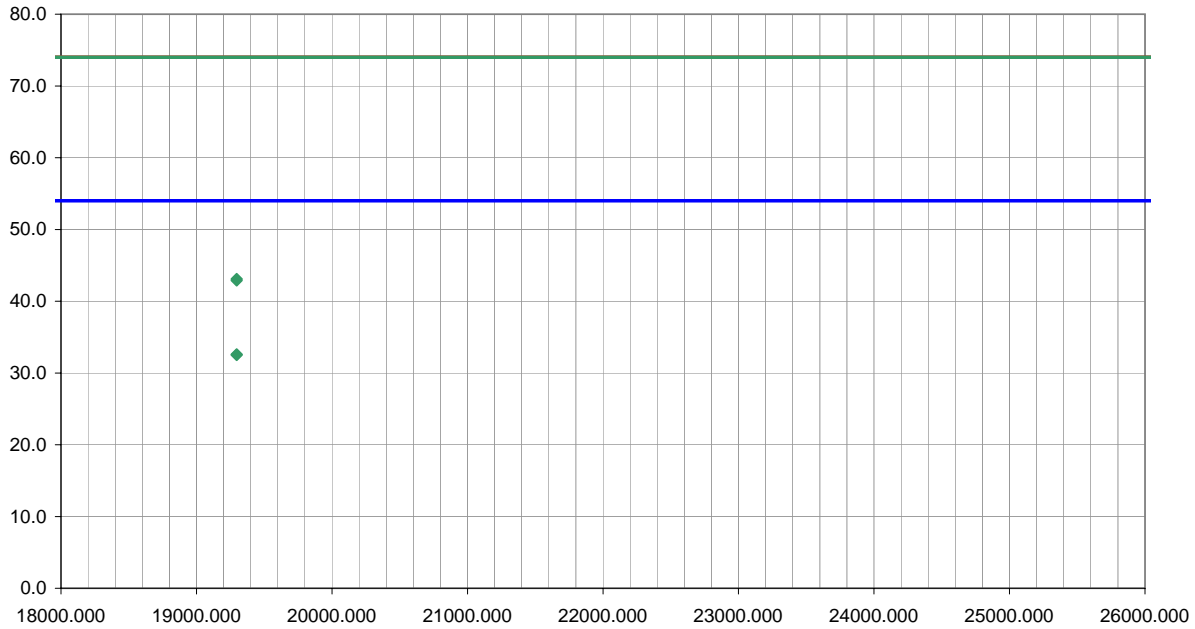

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
19296.000	24.6	8.0	0.0	1.0	3.0	0.0	I-High Horr	AV	0.0	32.6	54.0	-21.4
19296.000	24.5	8.0	0.0	1.0	3.0	0.0	V-High Horr	AV	0.0	32.5	54.0	-21.5
19296.000	35.1	8.0	0.0	1.0	3.0	0.0	V-High Horr	PK	0.0	43.1	74.0	-30.9
19296.000	34.9	8.0	0.0	1.0	3.0	0.0	I-High Horr	PK	0.0	42.9	74.0	-31.1

EUT:	8520-00080	Work Order:	ITRM0026
Serial Number:		Date:	05/15/04
Customer:	Intermec Technologies Corporation	Temperature:	72
Attendees:	None	Humidity:	42%
Cust. Ref. No.:		Barometric Pressure:	30.05
Tested by:	Holly Ashkannejhad	Power:	120 V, 60 Hz
		Job Site:	EV01

<b>TEST SPECIFICATIONS</b>	
Specification:	FCC 15.247(c) Spurious Radiated Emissions
Method:	ANSI C63.4
Year:	2003
Year:	2001

**SAMPLE CALCULATIONS**  
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation  
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator


**COMMENTS**  
 EUT installed in Intermec Model 6820 printer. Intermec Handheld Computer 700C in docking station.


**EUT OPERATING MODES**  
 Bluetooth 62, 802.11b 11, CDMA 1153 (PCS) in 700C. Bluetooth 62 in 6820

**DEVIATIONS FROM TEST STANDARD**  
 No deviations.

<b>RESULTS</b>	<b>Run #</b>
Pass	18

Other

  
 Tested By:

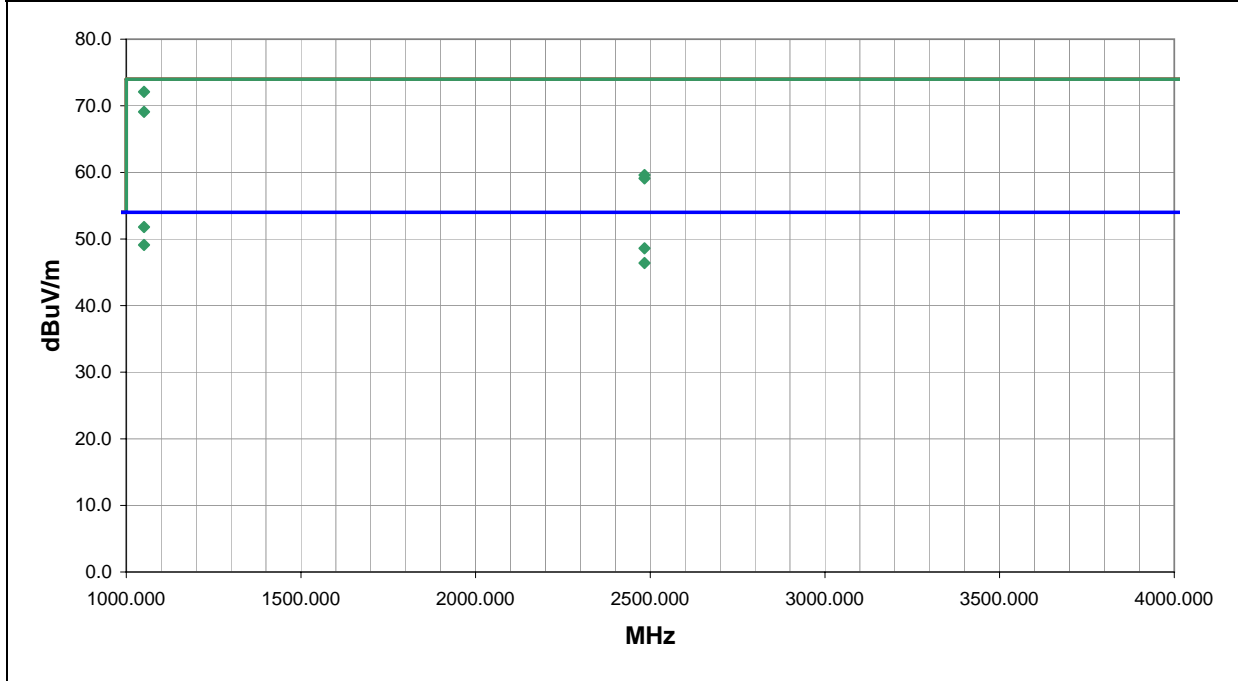

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
1050.766	61.4	-9.3	97.0	1.6	3.0	20.0	H-Horn	PK	0.0	72.1	74.0	-1.9
1050.766	41.1	-9.3	97.0	1.6	3.0	20.0	H-Horn	AV	0.0	51.8	54.0	-2.2
1050.766	58.4	-9.3	136.0	1.1	3.0	20.0	V-Horn	PK	0.0	69.1	74.0	-4.9
1050.766	38.4	-9.3	136.0	1.1	3.0	20.0	V-Horn	AV	0.0	49.1	54.0	-4.9
2483.500	31.1	-2.5	335.0	2.6	3.0	20.0	H-Horn	AV	0.0	48.6	54.0	-5.4
2483.500	28.9	-2.5	-1.0	1.0	3.0	20.0	V-Horn	AV	0.0	46.4	54.0	-7.6
2483.500	42.1	-2.5	335.0	2.6	3.0	20.0	H-Horn	PK	0.0	59.6	74.0	-14.4
2483.500	41.6	-2.5	-1.0	1.0	3.0	20.0	V-Horn	PK	0.0	59.1	74.0	-14.9

EUT:	8520-00080	Work Order:	ITRM0026
Serial Number:		Date:	05/15/04
Customer:	Intermec Technologies Corporation	Temperature:	72
Attendees:	None	Humidity:	42%
Cust. Ref. No.:		Barometric Pressure:	30.05
Tested by:	Holly Ashkannejhad	Power:	120 V, 60 Hz
		Job Site:	EV01

**TEST SPECIFICATIONS**

Specification:	FCC 15.247(c) Spurious Radiated Emissions	Year:	2003
Method:	ANSI C63.4	Year:	2001

**SAMPLE CALCULATIONS**

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation  
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

**COMMENTS**

EUT installed in Intermec Model 6820 printer. Intermec Handheld Computer 700C in docking station.

**EUT OPERATING MODES**

Bluetooth 11, 802.11b 1, GSM 516 in 700C. Bluetooth 11 in 6820

**DEVIATIONS FROM TEST STANDARD**

No deviations.


**RESULTS**

Pass	Run #	20
------	-------	----

Other



Tested By:

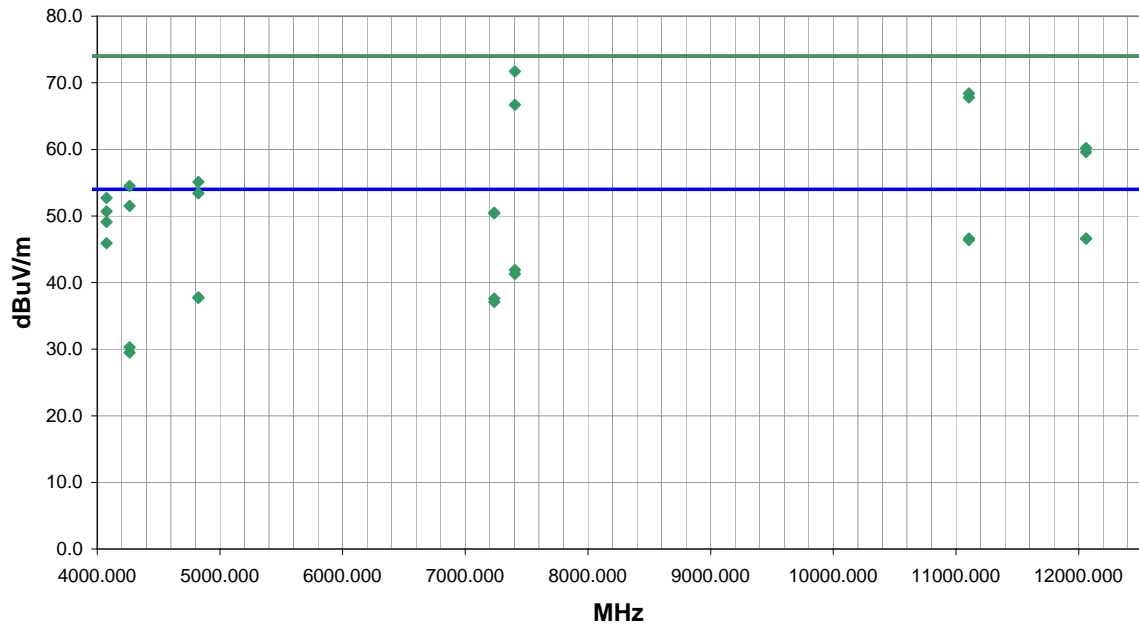

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
7403.982	60.7	11.0	41.0	1.6	3.0	0.0	V-Horn	PK	0.0	71.7	74.0	-2.3
4075.979	48.2	2.5	30.0	1.2	3.0	0.0	V-Horn	AV	0.0	50.7	54.0	-3.3
11106.000	49.5	18.9	314.0	1.4	3.0	0.0	H-Horn	PK	0.0	68.4	74.0	-5.6
11106.000	48.9	18.9	174.0	1.2	3.0	0.0	V-Horn	PK	0.0	67.8	74.0	-6.2
7403.982	55.7	11.0	316.0	1.2	3.0	0.0	H-Horn	PK	0.0	66.7	74.0	-7.3
11106.000	27.7	18.9	174.0	1.2	3.0	0.0	V-Horn	AV	0.0	46.6	54.0	-7.4
12060.000	26.0	20.6	237.0	1.2	3.0	0.0	V-Horn	AV	0.0	46.6	54.0	-7.4
12060.000	26.0	20.6	191.0	2.0	3.0	0.0	H-Horn	AV	0.0	46.6	54.0	-7.4
11106.000	27.5	18.9	314.0	1.4	3.0	0.0	H-Horn	AV	0.0	46.4	54.0	-7.6
4075.979	43.4	2.5	250.0	1.3	3.0	0.0	H-Horn	AV	0.0	45.9	54.0	-8.1
7403.982	30.9	11.0	41.0	1.6	3.0	0.0	V-Horn	AV	0.0	41.9	54.0	-12.1
7403.982	30.3	11.0	316.0	1.2	3.0	0.0	H-Horn	AV	0.0	41.3	54.0	-12.7
12060.000	39.6	20.6	191.0	2.0	3.0	0.0	H-Horn	PK	0.0	60.2	74.0	-13.8
12060.000	39.0	20.6	237.0	1.2	3.0	0.0	V-Horn	PK	0.0	59.6	74.0	-14.4
4823.935	34.4	3.4	186.0	1.2	3.0	0.0	V-Horn	AV	0.0	37.8	54.0	-16.2
4823.935	34.3	3.4	345.0	1.3	3.0	0.0	H-Horn	AV	0.0	37.7	54.0	-16.3
7236.000	27.2	10.4	337.0	1.3	3.0	0.0	H-Horn	AV	0.0	37.6	54.0	-16.4
7236.000	26.7	10.4	46.0	1.4	3.0	0.0	V-Horn	AV	0.0	37.1	54.0	-16.9
4823.935	51.7	3.4	345.0	1.3	3.0	0.0	H-Horn	PK	0.0	55.1	74.0	-18.9
4262.958	52.0	2.5	248.0	1.6	3.0	0.0	H-Horn	PK	0.0	54.5	74.0	-19.5
4823.935	50.0	3.4	186.0	1.2	3.0	0.0	V-Horn	PK	0.0	53.4	74.0	-20.6

<b>Freq (MHz)</b>	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
4075.979	50.2	2.5	30.0	1.2	3.0	0.0	V-Horn	PK	0.0	52.7	74.0	-21.3
4262.958	49.0	2.5	65.0	1.5	3.0	0.0	V-Horn	PK	0.0	51.5	74.0	-22.5
7236.000	40.1	10.4	46.0	1.4	3.0	0.0	V-Horn	PK	0.0	50.5	74.0	-23.5
7236.000	40.0	10.4	337.0	1.3	3.0	0.0	H-Horn	PK	0.0	50.4	74.0	-23.6
4262.958	27.8	2.5	248.0	1.6	3.0	0.0	H-Horn	AV	0.0	30.3	54.0	-23.7
4262.958	27.0	2.5	65.0	1.5	3.0	0.0	V-Horn	AV	0.0	29.5	54.0	-24.5
4075.979	46.6	2.5	250.0	1.3	3.0	0.0	H-Horn	PK	0.0	49.1	74.0	-24.9



EUT:	8520-00080	Work Order:	ITRM0026
Serial Number:		Date:	05/15/04
Customer:	Intermec Technologies Corporation	Temperature:	72
Attendees:	None	Humidity:	42%
Cust. Ref. No.:		Barometric Pressure:	30.05
Tested by:	Holly Ashkannejhad	Power:	120 V, 60 Hz
		Job Site:	EV01

<b>TEST SPECIFICATIONS</b>	
Specification:	FCC 15.247(c) Spurious Radiated Emissions
Method:	ANSI C63.4
Year:	2003
Year:	2001

<b>SAMPLE CALCULATIONS</b>	
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation	
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator	

**COMMENTS**  
EUT installed in Intermec Model 6820 printer. Intermec Handheld Computer 700C in docking station.


**EUT OPERATING MODES**  
Bluetooth 67, 802.11b 11, GSM 516 in 700C. Bluetooth 67 in 6820

**DEVIATIONS FROM TEST STANDARD**  
No deviations.

<b>RESULTS</b>	<b>Run #</b>
Pass	21

Other

*Holly Ashkannejhad*  
Tested By:

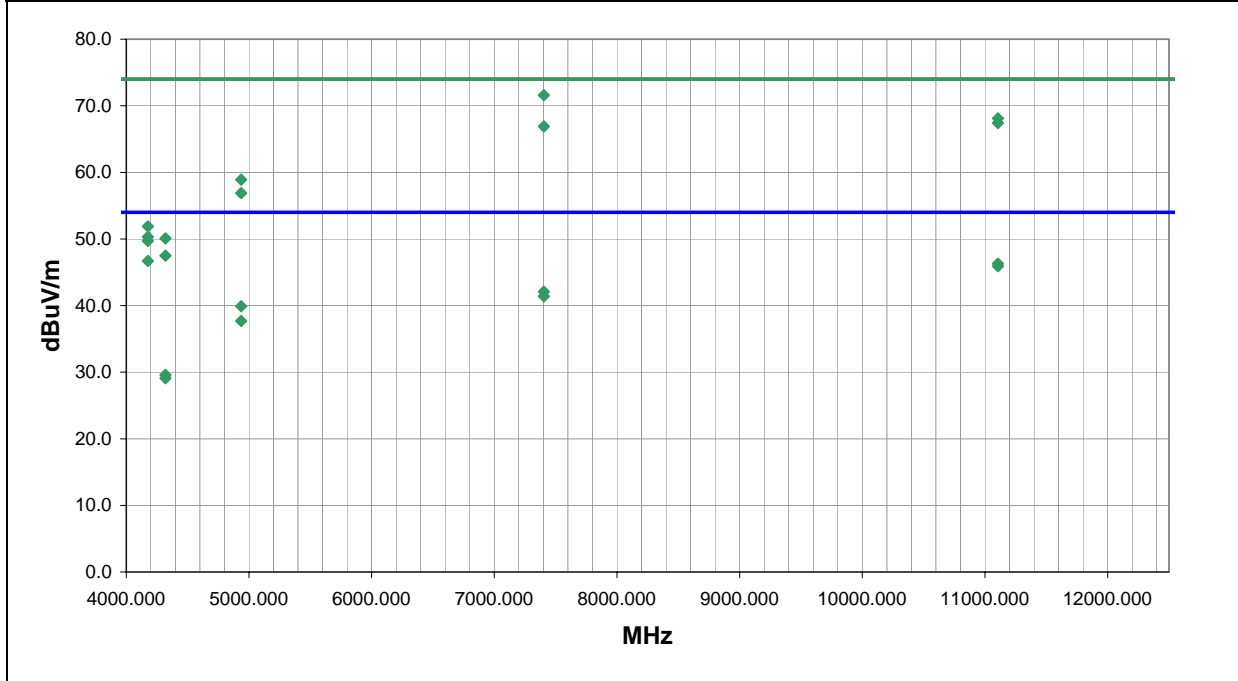

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
7404.005	60.6	11.0	40.0	1.2	3.0	0.0	V-Horn	PK	0.0	71.6	74.0	-2.4
4176.030	47.3	2.4	17.0	1.2	3.0	0.0	V-Horn	AV	0.0	49.7	54.0	-4.3
11106.000	49.2	18.9	238.0	1.2	3.0	0.0	V-Horn	PK	0.0	68.1	74.0	-5.9
11106.000	48.5	18.9	318.0	1.5	3.0	0.0	H-Horn	PK	0.0	67.4	74.0	-6.6
7404.005	55.9	11.0	314.0	1.3	3.0	0.0	H-Horn	PK	0.0	66.9	74.0	-7.1
4176.030	44.3	2.4	57.0	1.6	3.0	0.0	H-Horn	AV	0.0	46.7	54.0	-7.3
11106.000	27.4	18.9	318.0	1.5	3.0	0.0	H-Horn	AV	0.0	46.3	54.0	-7.7
11106.000	27.0	18.9	238.0	1.2	3.0	0.0	V-Horn	AV	0.0	45.9	54.0	-8.1
7404.005	31.1	11.0	40.0	1.2	3.0	0.0	V-Horn	AV	0.0	42.1	54.0	-11.9
7404.005	30.4	11.0	314.0	1.3	3.0	0.0	H-Horn	AV	0.0	41.4	54.0	-12.6
4935.961	36.2	3.7	35.0	1.1	3.0	0.0	V-Horn	AV	0.0	39.9	54.0	-14.1
4935.961	55.2	3.7	35.0	1.1	3.0	0.0	V-Horn	PK	0.0	58.9	74.0	-15.1
4935.961	34.0	3.7	327.0	1.3	3.0	0.0	H-Horn	AV	0.0	37.7	54.0	-16.3
4935.961	53.2	3.7	327.0	1.3	3.0	0.0	H-Horn	PK	0.0	56.9	74.0	-17.1
4176.030	49.5	2.4	17.0	1.2	3.0	0.0	V-Horn	PK	0.0	51.9	74.0	-22.1
4176.030	47.9	2.4	57.0	1.6	3.0	0.0	H-Horn	PK	0.0	50.3	74.0	-23.7
4318.977	47.7	2.4	311.0	1.3	3.0	0.0	H-Horn	PK	0.0	50.1	74.0	-23.9
4318.977	27.2	2.4	311.0	1.3	3.0	0.0	H-Horn	AV	0.0	29.6	54.0	-24.4
4318.977	26.7	2.4	189.0	1.2	3.0	0.0	V-Horn	AV	0.0	29.1	54.0	-24.9
4318.977	45.1	2.4	189.0	1.2	3.0	0.0	V-Horn	PK	0.0	47.5	74.0	-26.5

EUT:	8520-00080	Work Order:	ITRM0026
Serial Number:		Date:	05/15/04
Customer:	Intermec Technologies Corporation	Temperature:	72
Attendees:	None	Humidity:	42%
Cust. Ref. No.:		Barometric Pressure:	30.05
Tested by:	Holly Ashkannejhad	Power:	120 V, 60 Hz
		Job Site:	EV01

<b>TEST SPECIFICATIONS</b>	
Specification:	FCC 15.247(c) Spurious Radiated Emissions
Method:	ANSI C63.4
Year:	2003
Year:	2001

**SAMPLE CALCULATIONS**

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation  
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

**COMMENTS**

EUT installed in Intermec Model 6820 printer. Intermec Handheld Computer 700C in docking station.

**EUT OPERATING MODES**

Bluetooth 11, 802.11b 1, GSM 516 in 700C. Bluetooth 11 in 6820

**DEVIATIONS FROM TEST STANDARD**


No deviations.

<b>RESULTS</b>	Run #
Pass	24

Other



Tested By: \_\_\_\_\_

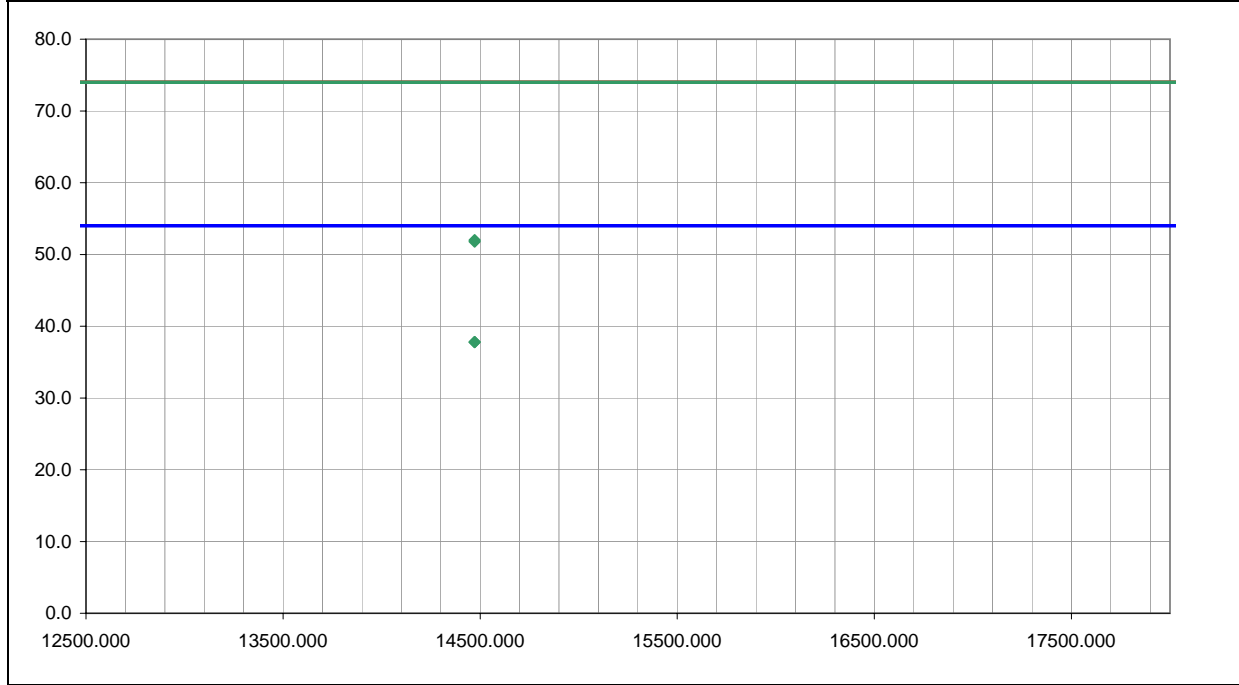

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
14472.000	27.7	10.1	325.0	1.3	3.0	0.0	H-Horn	AV	0.0	37.8	54.0	-16.2
14472.000	27.7	10.1	341.0	1.2	3.0	0.0	V-Horn	AV	0.0	37.8	54.0	-16.2
14472.000	41.9	10.1	341.0	1.2	3.0	0.0	V-Horn	PK	0.0	52.0	74.0	-22.0
14472.000	41.7	10.1	325.0	1.3	3.0	0.0	H-Horn	PK	0.0	51.8	74.0	-22.2

# RADIATED EMISSIONS DATA SHEET

EUT:	8520-00080	Work Order:	ITRM0026
Serial Number:		Date:	05/15/04
Customer:	Intermec Technologies Corporation	Temperature:	72
Attendees:	None	Humidity:	42%
Cust. Ref. No.:		Barometric Pressure:	30.05
Tested by:	Holly Ashkannejhad	Power:	120 V, 60 Hz
		Job Site:	EV01

**TEST SPECIFICATIONS**

Specification:	FCC Part 15.247(c)	Year:	2003
Method:	ANSI C63.4	Year:	2001

**SAMPLE CALCULATIONS**

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation  
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

**COMMENTS**

EUT installed in Intermec Model 6820 printer. Intermec Handheld Computer 700C in docking station.

**EUT OPERATING MODES**

Bluetooth 11, 802.11b 1, GSM 516 in 700C. Bluetooth 11 in 6820

**DEVIATIONS FROM TEST STANDARD**

No deviations.


**RESULTS**

Pass	Run #	25
------	-------	----

Other

*Holly Ashkannejhad*

Tested By:

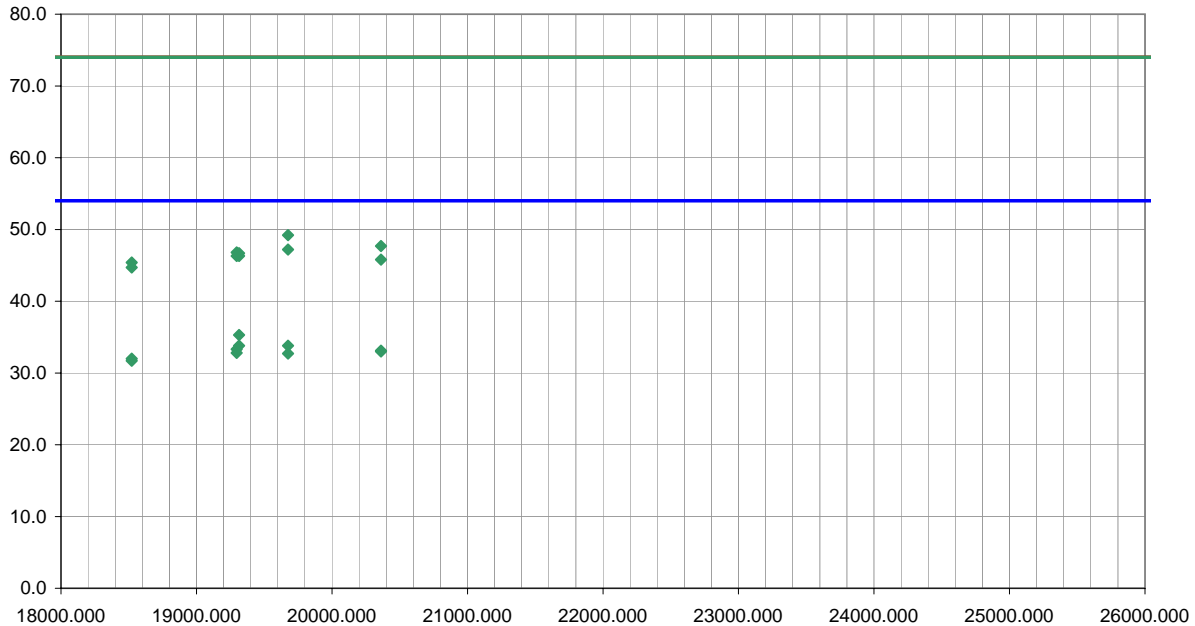

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	
19314.200	27.3	8.0	28.0	1.0	3.0	0.0	-High	Horr	AV	0.0	35.3	54.0	-18.7
19314.200	25.8	8.0	31.0	1.1	3.0	0.0	-High	Horr	AV	0.0	33.8	54.0	-20.2
19675.130	25.2	8.6	15.0	1.1	3.0	0.0	-High	Horr	AV	0.0	33.8	54.0	-20.2
19296.000	25.3	8.0	361.0	1.0	3.0	0.0	-High	Horr	AV	0.0	33.3	54.0	-20.7
20361.140	24.2	8.9	-1.0	1.0	3.0	0.0	-High	Horr	AV	0.0	33.1	54.0	-20.9
20361.140	24.1	8.9	18.0	1.0	3.0	0.0	-High	Horr	AV	0.0	33.0	54.0	-21.0
19296.000	24.8	8.0	95.0	1.1	3.0	0.0	-High	Horr	AV	0.0	32.8	54.0	-21.2
19675.130	24.1	8.6	-1.0	1.0	3.0	0.0	-High	Horr	AV	0.0	32.7	54.0	-21.3
18522.350	25.0	7.0	-1.0	1.0	3.0	0.0	-High	Horr	AV	0.0	32.0	54.0	-22.0
18522.350	24.7	7.0	-1.0	1.0	3.0	0.0	-High	Horr	AV	0.0	31.7	54.0	-22.3
19675.130	40.6	8.6	15.0	1.1	3.0	0.0	-High	Horr	PK	0.0	49.2	74.0	-24.8
20361.140	38.8	8.9	-1.0	1.0	3.0	0.0	-High	Horr	PK	0.0	47.7	74.0	-26.3
19675.130	38.6	8.6	-1.0	1.0	3.0	0.0	-High	Horr	PK	0.0	47.2	74.0	-26.8
19296.000	38.8	8.0	95.0	1.1	3.0	0.0	-High	Horr	PK	0.0	46.8	74.0	-27.2
19314.200	38.7	8.0	31.0	1.1	3.0	0.0	-High	Horr	PK	0.0	46.7	74.0	-27.3
19296.000	38.3	8.0	361.0	1.0	3.0	0.0	-High	Horr	PK	0.0	46.3	74.0	-27.7
19314.200	38.3	8.0	28.0	1.0	3.0	0.0	-High	Horr	PK	0.0	46.3	74.0	-27.7
20361.140	36.9	8.9	18.0	1.0	3.0	0.0	-High	Horr	PK	0.0	45.8	74.0	-28.2
18522.350	38.4	7.0	-1.0	1.0	3.0	0.0	-High	Horr	PK	0.0	45.4	74.0	-28.6
18522.350	37.7	7.0	-1.0	1.0	3.0	0.0	-High	Horr	PK	0.0	44.7	74.0	-29.3

EUT:	8520-00080	Work Order:	ITRM0026
Serial Number:		Date:	05/16/04
Customer:	Intermec Technologies Corporation	Temperature:	72
Attendees:	None	Humidity:	42%
Cust. Ref. No.:		Barometric Pressure:	30.05
Tested by:	Holly Ashkannejhad	Power:	120 V, 60 Hz
		Job Site:	EV01

**TEST SPECIFICATIONS**

Specification:	FCC Part 15.247(c)	Year:	2003
Method:	ANSI C63.4	Year:	2001

**SAMPLE CALCULATIONS**

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation  
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

**COMMENTS**

EUT installed in Intermec Model 6820 printer. Intermec Handheld Computer 700C in docking station.

**EUT OPERATING MODES**

Bluetooth 80, 802.11b 11, GSM 606 in 700C. Bluetooth 80 in 6820

**DEVIATIONS FROM TEST STANDARD**

No deviations.


**RESULTS**

Pass	Run #	26
------	-------	----

Other

*Holly Ashkannejhad*

Tested By:

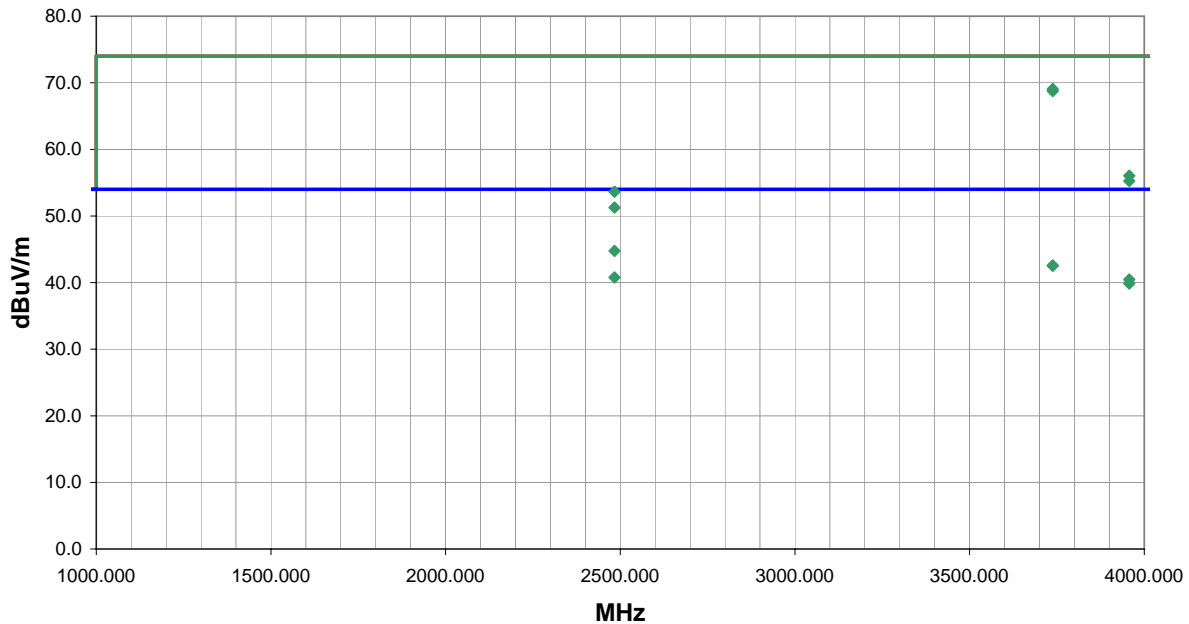

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
3738.060	44.6	34.0	94.0	1.1	1.0	0.0	H-Horn	PK	-9.5	69.1	74.0	-4.9
3738.060	44.3	34.0	309.0	1.0	1.0	0.0	V-Horn	PK	-9.5	68.8	74.0	-5.2
2483.500	24.6	29.7	15.0	1.0	1.0	0.0	H-Horn	AV	-9.5	44.8	54.0	-9.2
3738.060	18.1	34.0	309.0	1.0	1.0	0.0	V-Horn	AV	-9.5	42.6	54.0	-11.4
3738.060	18.1	34.0	94.0	1.1	1.0	0.0	H-Horn	AV	-9.5	42.6	54.0	-11.4
2483.500	20.6	29.7	336.0	1.1	1.0	0.0	V-Horn	AV	-9.5	40.8	54.0	-13.2
3957.060	15.1	34.9	-2.0	1.0	1.0	0.0	V-Horn	AV	-9.5	40.5	54.0	-13.5
3957.060	14.5	34.9	321.0	1.0	1.0	0.0	H-Horn	AV	-9.5	39.9	54.0	-14.1
3957.060	30.7	34.9	-2.0	1.0	1.0	0.0	V-Horn	PK	-9.5	56.1	74.0	-17.9
3957.060	29.9	34.9	321.0	1.0	1.0	0.0	H-Horn	PK	-9.5	55.3	74.0	-18.7
2483.500	33.5	29.7	15.0	1.0	1.0	0.0	H-Horn	PK	-9.5	53.7	74.0	-20.3
2483.500	31.1	29.7	336.0	1.1	1.0	0.0	V-Horn	PK	-9.5	51.3	74.0	-22.7

EUT:	8520-00080	Work Order:	ITRM0026
Serial Number:		Date:	05/13/04
Customer:	Intermec Technologies Corporation	Temperature:	77
Attendees:	none	Humidity:	34%
Cust. Ref. No.:		Barometric Pressure:	30.03
Tested by:	Holly Ashkannejhad	Power:	120VAC, 60Hz
		Job Site:	EV01

<b>TEST SPECIFICATIONS</b>	
Specification:	FCC 15.247(c) Spurious Radiated Emissions
Method:	ANSI C63.4
Year:	2003
Year:	2001

**SAMPLE CALCULATIONS**  
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation  
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator


**COMMENTS**  
 Bluetooth radio installed in 6820 Printer.


**EUT OPERATING MODES**  
 Bluetooth High channel

**DEVIATIONS FROM TEST STANDARD**  
 No deviations.

<b>RESULTS</b>	Run #
Pass	2

Other

  
 Tested By:

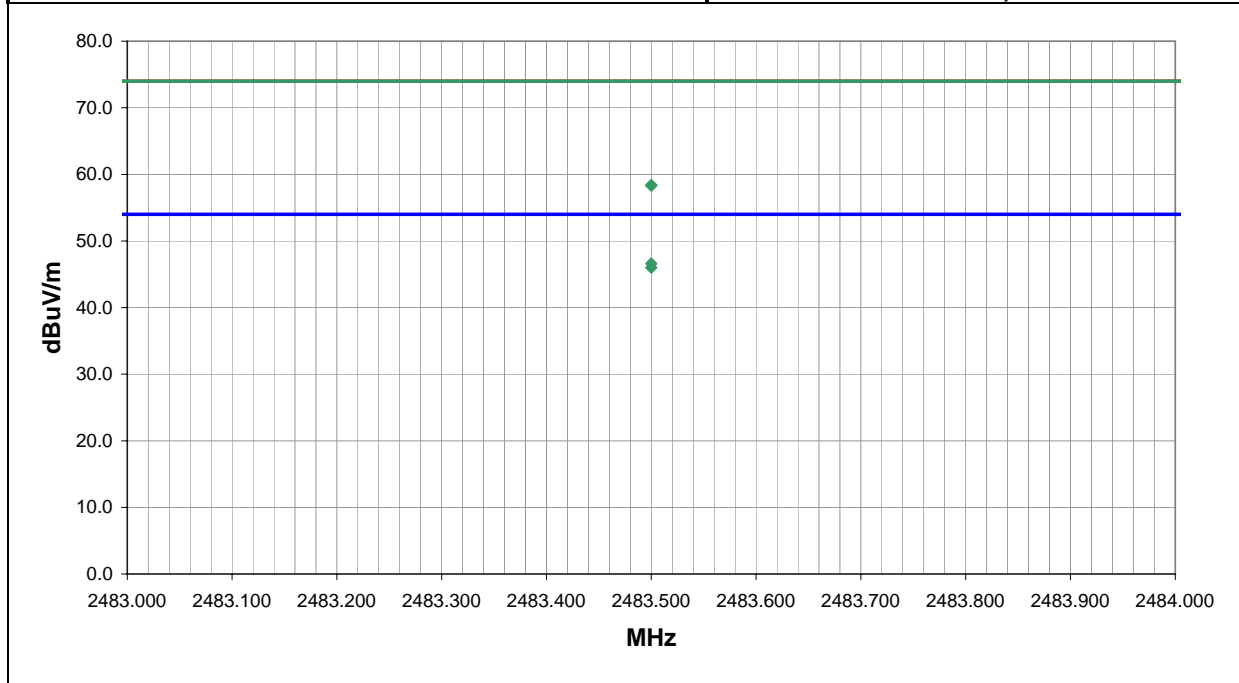

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
2483.500	29.1	-2.5	110.0	3.5	3.0	20.0	H-Horn	AV	0.0	46.6	54.0	-7.4
2483.500	28.5	-2.5	250.0	1.2	3.0	20.0	V-Horn	AV	0.0	46.0	54.0	-8.0
2483.500	40.9	-2.5	110.0	3.5	3.0	20.0	H-Horn	PK	0.0	58.4	74.0	-15.6
2483.500	40.8	-2.5	250.0	1.2	3.0	20.0	V-Horn	PK	0.0	58.3	74.0	-15.7

# RADIATED EMISSIONS DATA SHEET

EUT: 8520-00080	Work Order: ITRM0026
Serial Number:	Date: 05/14/04
Customer: Intermec Technologies Corporation	Temperature: 73
Attendees: none	Humidity: 38%
Cust. Ref. No.:	Barometric Pressure: 30.17
Tested by: Greg Kiemel	Power: 120VAC, 60Hz
	Job Site: EV01

<b>TEST SPECIFICATIONS</b>	
Specification: FCC 15.247(c) Spurious Radiated Emissions	Year: 2003
Method: ANSI C63.4	Year: 2001

**SAMPLE CALCULATIONS**

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation  
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

**COMMENTS**

Bluetooth radio installed in 6820 Printer.

**EUT OPERATING MODES**


Bluetooth Low channel


**DEVIATIONS FROM TEST STANDARD**

No deviations.

<b>RESULTS</b>	Run #
Pass	4

**Other**


  
 Tested By: \_\_\_\_\_

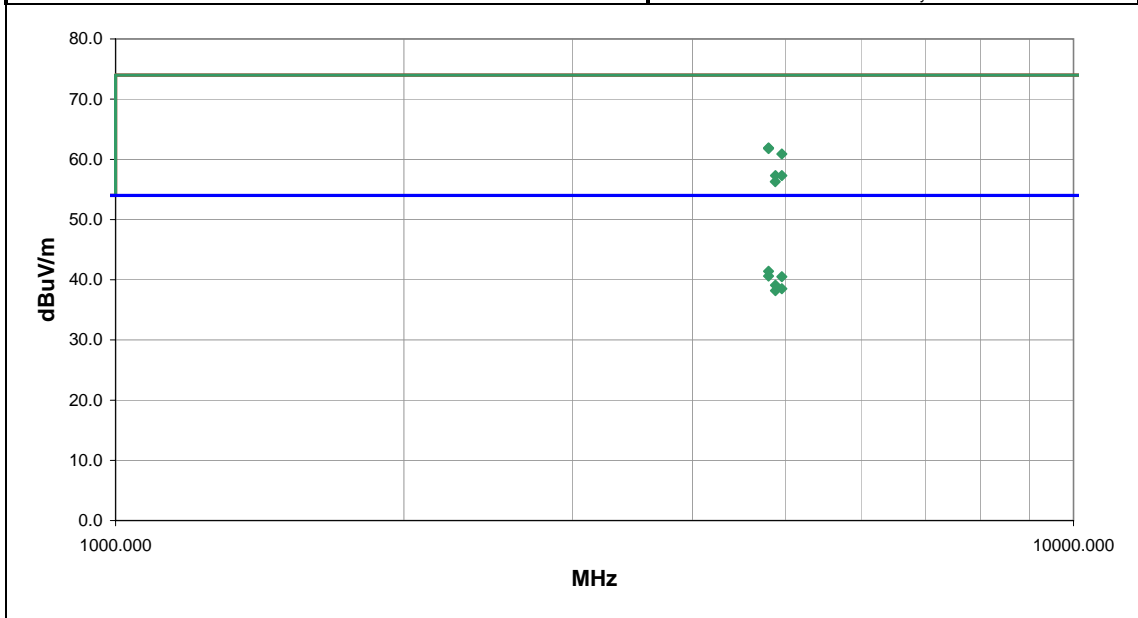

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
4803.971	58.6	3.3	262.0	1.3	3.0	0.0	H-Horn	PK	0.0	61.9	74.0	-12.1	Low channel
4803.971	58.5	3.3	197.0	1.1	3.0	0.0	V-Horn	PK	0.0	61.8	74.0	-12.2	Low channel
4803.971	38.1	3.3	197.0	1.1	3.0	0.0	V-Horn	AV	0.0	41.4	54.0	-12.6	Low channel
4959.990	57.1	3.8	205.0	1.2	3.0	0.0	V-Horn	PK	0.0	60.9	74.0	-13.1	High channel
4803.971	37.3	3.3	262.0	1.3	3.0	0.0	H-Horn	AV	0.0	40.6	54.0	-13.4	Low channel
4959.990	36.7	3.8	205.0	1.2	3.0	0.0	V-Horn	AV	0.0	40.5	54.0	-13.5	High channel
4883.925	35.4	3.7	208.0	1.2	3.0	0.0	V-Horn	AV	0.0	39.1	54.0	-14.9	Mid channel
4959.990	34.7	3.8	275.0	1.3	3.0	0.0	H-Horn	AV	0.0	38.5	54.0	-15.5	High channel
4883.970	34.5	3.7	165.0	1.5	3.0	0.0	H-Horn	AV	0.0	38.2	54.0	-15.8	Mid channel
4959.990	53.5	3.8	275.0	1.3	3.0	0.0	H-Horn	PK	0.0	57.3	74.0	-16.7	High channel
4884.010	53.6	3.7	208.0	1.2	3.0	0.0	V-Horn	PK	0.0	57.3	74.0	-16.7	Mid channel
4883.490	52.6	3.7	165.0	1.5	3.0	0.0	H-Horn	PK	0.0	56.3	74.0	-17.7	Mid channel

Intermec 6820 Printer Photos



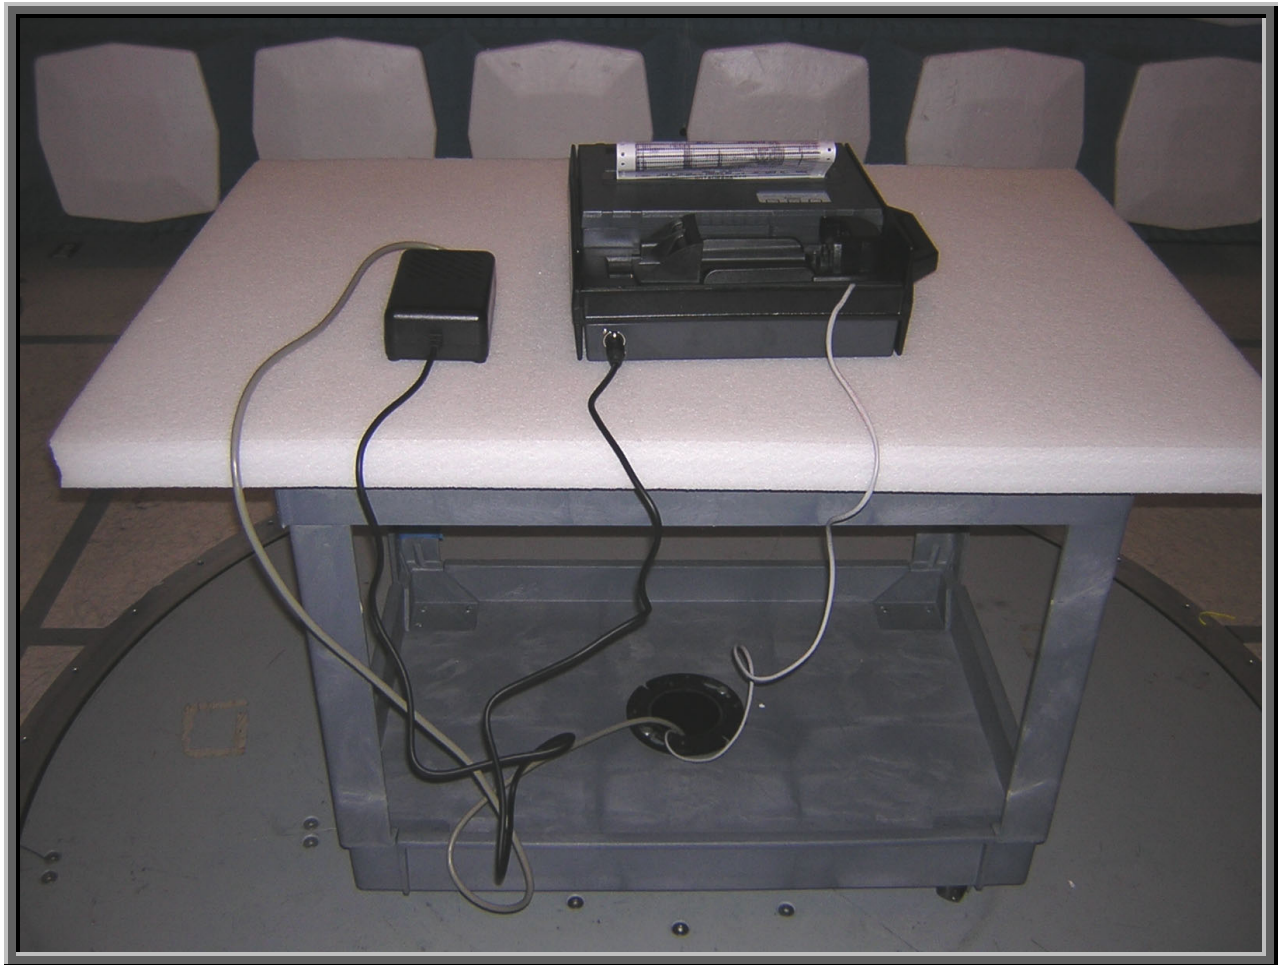





# Intermec 6820 with 730 Photos



