



849 NW STATE ROAD 45
 NEWBERRY, FL 32669 USA
 PH: 888.472.2424 OR 352.472.5500
 FAX: 352.472.2030
 EMAIL: INFO@TIMCOENGR.COM
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

FCC PART 15.231 TEST REPORT

LOW POWER UNLICENSED TRANSMITTER

Applicant	PBM INDUSTRIES, INC.
Address	1150 WEST JFG DRIVE NORTH VERNON IN 47265 USA
FCC ID	EILPGRM-2
Product Description	ABOVE GROUND POOL ALARM
Date Sample Received	12/19/2007
Date Tested	12/28/2007
Tested By	NAM NGUYEN
Approved By	MARIO DE ARANZETA
Timco Report No.	3874UT7TestReport.doc
Test Results	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



Certificate # 0955-01

APPLICANT: PBM INDUSTRIES, INC.
 FCC ID: EILPGRM-2
 REPORT: P\PBM_EIL\3874UT7\3874UT7TestReport.doc

TABLE OF CONTENTS

GENERAL REMARKS4
REPORT SUMMARY5
TEST ENVIRONMENT.....5
TEST SETUP5
DUT SPECIFICATION6
MANUFACTURE DECLARATION OF COMPLIANCE WITH PART 15.231(A).....7
TEST EQUIPMENT LIST8
TEST PROCEDURES9
RADIATION INTERFERENCE..... 10
CALCULATION OF DUTY CYCLE 12
OCCUPIED BANDWIDTH..... 17
POWER LINE CONDUCTED INTERFERENCE 18

APPLICANT: PBM INDUSTRIES, INC.
FCC ID: EILPGRM-2
REPORT: P\PBM_EIL\3874UT7\3874UT7TestReport.doc

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

The test results only relate to the item tested.

Summary

The device under test does:

- fulfill the general approval requirements as identified in this test report
 not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.



Testing Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, Fl 32669



Authorized Signatory Name:

Mario de Aranzeta C.E.T.
Compliance Engineer/ Lab. Supervisor

Date: 1/8/08

APPLICANT: PBM INDUSTRIES, INC.
FCC ID: EILPGRM-2
REPORT: P\PBM_EIL\3874UT7\3874UT7TestReport.doc

REPORT SUMMARY

Applicable Rule(s)	FCC Pt 15.231, Pt 15.209, Pt 15.207, ANSI C63.4: 2003
--------------------	---

TEST ENVIRONMENT

Test Facility	The test sites are located at 849 NW State Road 45 Newberry, FL 32669 USA.
Test Condition:	Temperature: 26°C Relative humidity: 50%

TEST SETUP

Test Exercise (e.g software description, test signal, etc.):	The DUT was placed in continuous transmit mode of operation.
Deviation from the standard(s)	No deviation from the standard(s)
Modification to the DUT:	No modification was made to the DUT.
Supporting Peripheral Equipment	Not applicable. The device is a stand-alone remote control radio.

APPLICANT: PBM INDUSTRIES, INC.
FCC ID: EILPGRM-2
REPORT: P\PBM_EIL\3874UT7\3874UT7TestReport.doc

DUT SPECIFICATION

Applicant	PBM INDUSTRIES, INC.		
Description	ABOVE GROUD POOL ALARM		
FCC ID	EILPGRM-2		
Model Number	PGRM-2		
Frequency Range	433.92 MHz		
DUT Power Source	<input type="checkbox"/> 110-120Vac/50- 60Hz		
	<input type="checkbox"/> DC Power		
	<input checked="" type="checkbox"/> Battery Operated Exclusively		
Test Item	<input type="checkbox"/> Prototype	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Production
Type of Equipment	<input checked="" type="checkbox"/> Fixed	<input type="checkbox"/> Mobile	<input type="checkbox"/> Portable

APPLICANT: PBM INDUSTRIES, INC.
 FCC ID: EILPGRM-2
 REPORT: P\PBM_EIL\3874UT7\3874UT7TestReport.doc

MANUFACTURE DECLARATION OF COMPLIANCE WITH PART 15.231(A)

Item	Description	Yes	No
1	Does this device transmit a signal that is only used to control another device?	X	
2	Does this device send data with this control signal?		X
3	Does this device send data? Data is, things like: temperature, wind direction, fluid amount, rate of flow, etc.		X
4	Does this device transmit continuously or automatically?		X
5	If manually operated does this device stop transmitting within 5 seconds of releasing the button?	X	
6	If automatically operated does it deactivate 5 seconds after activation?	N/A	N/A
7	Does it transmit at regular predetermined intervals?		X
8	Does it poll or send supervisory information?		X
	If yes does it do a system integrity check? How often?		X
9	Is this a fire, security or safety of life device?	X	
	If YES does the device stop transmitting after the alarm condition is satisfied?	X	
10	Duty cycle: Maximum on-time?	10ms	
	If YES, on-time in 100 ms? If Other, please specify here	X	
	On time in		
11	Modulation technique: Please specify the modulation of the test sample, FM, or AFSK, or FSK, or on-off keying, or others?	OOK	

APPLICANT: PBM INDUSTRIES, INC.
 FCC ID: EILPGRM-2
 REPORT: P\PBM_EIL\3874UT7\3874UT7TestReport.doc

TEST EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 5/11/07	5/11/10
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 11/30/07	11/30/09
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 11/30/07	11/30/09
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 11/30/07	11/30/09
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 11/30/07	11/30/09
Analyzer Blue Tower Spectrum Analyzer	HP	8568B	2928A04729 2848A18049	CAL 5/17/07	5/17/09
Analyzer Blue Tower RF Preselector	HP	85685A	2926A00983	CAL 5/17/07	5/17/09
Analyzer Blue Tower Quasi-Peak Adapter	HP	85650A	2811A01279	CAL 5/17/07	5/17/09
Analyzer Silver Tower Spectrum Analyzer	HP	8566B Opt 462	3552A22064 3638A08608	CAL 10/30/06	10/30/08
Analyzer Silver Tower RF Preselector	HP	85685A	2620A00294	CAL 3/6/07	3/6/09
Analyzer Silver Tower Quasi-Peak Adapter	HP	85650A	3303A01844	CAL 10/30/06	10/30/08
Analyzer Open-Frame Tower Preamplifier	HP	8449B	3008A01075	CAL 6/20/07	6/20/09
Antenna: Biconnical	Electro-Metrics	BIA-25	1171	CAL 7/18/07	7/18/09
Antenna: Biconnical	Eaton	94455-1	1096	CAL 10/11/06	10/11/08
Antenna: Log-Periodic	Electro-Metrics	LPA-25	1122	CAL 12/1/06	12/1/08

APPLICANT: PBM INDUSTRIES, INC.
 FCC ID: EILPGRM-2
 REPORT: P\PBM_EIL\3874UT7\3874UT7TestReport.doc

TEST PROCEDURES

Power line conducted Emissions: The test procedure used was ANSI C63.4-2003.

Spurious Emissions: The test procedure used was ANSI C63.4-2003 using a spectrum analyzer with a preselector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was always greater than the RBW.

Occupied Bandwidth: A small sample of the transmitter output was fed into the spectrum analyzer and a was generated. The vertical scale is set to 10 dB per division.

Formula Of Conversion Factors: The field strength at 3m was established by adding the meter reading of the spectrum analyzer to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB/m. The gain of the preselector was accounted for in the spectrum analyzer reading.

Example:

Freq MHz	Meter Reading dBuV	ACF dB/m	Cable Loss dB	Field Strength dBuV/m @ 3 m
33	20	+10.36	+1.2	= 31.56

ANSI C63.4-2003 Measurement: The DUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The DUT was placed in the center of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the 10th harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes when necessary and the highest readings were converted to average readings based on the duty cycle.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

APPLICANT: PBM INDUSTRIES, INC.
FCC ID: EILPGRM-2
REPORT: P\PBM_EIL\3874UT7\3874UT7TestReport.doc

RADIATION INTERFERENCE

Rules Part No.: 15.231

Requirements:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dB μ V/m)	Field Strength of Harmonics and Spurious Emissions (dB μ V/m @ 3m)
40.66 to 40.70	67.04	47.04
70 to 130	61.94	41.94
130 to 174	61.94 to 71.48	41.94 to 51.48
174 to 260	71.48	51.48
260 to 470	71.48 to 81.94	51.48 to 61.94
470 and above	81.94	61.94

No fundamental frequency is allowed in the restricted bands.

Spurious emissions in the restricted bands must be less than 54 dB μ V/m or to the limits of 15.209.

Emissions that are 20 dB below the limit are not required to be reported.

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows:

- 1) for the band 130-174 MHz, uV/m at 3 meters = $56.81818(F)-6136.3636$;
- 2) for the band 260-470 MHz, uV/m at 3 meters = $41.6667(F)-7083.3333$.

Sample calculation of limit @ 315 MHz:

$$41.6667 (315)-7083.3333 = 6041.68 \text{ uV/m}$$
$$20\log(6041.68) = 75.62\text{dBuV/m limit @ 315 MHz}$$

Sample calculation of limit @ 433.92 MHz:

$$41.6667 (433.9)-7083.3333 = 10,995.85 \text{ uV/m}$$
$$20\log(10,995.85) = 80.82 \text{ dBuV/m limit @ 433.9 MHz}$$

FOR THIS DUT:

The limit for average field strength in dBuV/m for the fundamental frequency is 80.82 dB μ V/m.

The limit for average field strength in dBuV/m for the harmonics and other spurious frequencies is 60.82 dB μ V/m unless it is in a restricted band.

APPLICANT: PBM INDUSTRIES, INC.
FCC ID: EILPGRM-2
REPORT: P\PBM_EIL\3874UT7\3874UT7TestReport.doc

Test Data: X axis, Y axis, and Z axis data follows:

Tuned Frequency MHz	Emission Frequency MHz	*	Meter Reading dBuV	Ant Pol	Coax Loss dB	Correction Factor dB	Duty Cycle Factor dB	Field Strength dBuV/m	Margin dB
433.92	433.92		68.8	V	1.23	16.18	20.00	66.21	14.61
433.92	433.92		72.0	H	1.23	16.62	20.00	69.85	10.97
433.92	867.88		23.9	V	1.93	22.40	20.00	28.23	32.59
433.92	867.88		27.1	H	1.93	22.96	20.00	31.99	28.83
433.92	1,301.82	**	15.7	H	2.34	27.84	20.00	25.88	28.12
433.92	1,301.82	**	17.5	V	2.34	27.84	20.00	27.68	26.32
433.92	1,735.76		18.6	V	2.69	29.51	20.00	30.80	30.03
433.92	1,735.76		19.7	H	2.69	29.51	20.00	31.90	28.93
433.92	2,169.70		8.2	V	3.02	31.64	20.00	22.86	37.97
433.92	2,169.70		8.7	H	3.02	31.64	20.00	23.36	37.47
433.92	2,603.64		11.5	V	3.32	32.52	20.00	27.34	33.48
433.92	2,603.64		13.0	H	3.32	32.52	20.00	28.84	31.98
433.92	3,037.58		16.0	H	3.63	32.62	20.00	32.25	28.57
433.92	3,037.58		16.5	V	3.63	32.62	20.00	32.75	28.07
433.92	433.92		66.4	V	1.23	16.18	20.00	63.81	17.01
433.92	433.92		73.3	H	1.23	16.62	20.00	71.15	9.67
433.92	867.88		23.5	V	1.93	22.40	20.00	27.83	32.99
433.92	867.88		27.9	H	1.93	22.96	20.00	32.79	28.03
433.92	1,301.82	**	20.0	V	2.34	27.84	20.00	30.18	23.82
433.92	1,301.82	**	20.8	H	2.34	27.84	20.00	30.98	23.02
433.92	1,735.76		19.0	V	2.69	29.51	20.00	31.20	29.63
433.92	1,735.76		19.1	H	2.69	29.51	20.00	31.30	29.53
433.92	2,169.70		6.9	V	3.02	31.64	20.00	21.56	39.27
433.92	2,169.70		10.4	H	3.02	31.64	20.00	25.06	35.77
433.92	2,603.64		11.9	H	3.32	32.52	20.00	27.74	33.08
433.92	2,603.64		12.5	V	3.32	32.52	20.00	28.34	32.48
433.92	3,037.58		14.7	H	3.63	32.62	20.00	30.95	29.87
433.92	3,037.58		15.0	V	3.63	32.62	20.00	31.25	29.57
433.92	433.92		67.4	V	1.23	16.18	20.00	64.81	16.01
433.92	433.92		78.0	H	1.23	16.62	20.00	75.85	4.97
433.92	867.88		23.8	V	1.93	22.40	20.00	28.13	32.69
433.92	867.88		30.2	H	1.93	22.96	20.00	35.09	25.73
433.92	1,301.82	**	17.4	H	2.34	27.84	20.00	27.58	26.42
433.92	1,301.82	**	17.6	V	2.34	27.84	20.00	27.78	26.22
433.92	1,735.76		19.4	V	2.69	29.51	20.00	31.60	29.23
433.92	1,735.76		21.5	H	2.69	29.51	20.00	33.70	27.13
433.92	2,169.70		9.2	H	3.02	31.64	20.00	23.86	36.97
433.92	2,169.70		9.8	V	3.02	31.64	20.00	24.46	36.37
433.92	2,603.64		9.9	V	3.32	32.52	20.00	25.74	35.08
433.92	2,603.64		10.7	H	3.32	32.52	20.00	26.54	34.28
433.92	3,037.58		14.0	H	3.63	32.62	20.00	30.25	30.57
433.92	3,037.58		15.1	V	3.63	32.62	20.00	31.35	29.47

** -Denotes restricted bands

APPLICANT: PBM INDUSTRIES, INC.
 FCC ID: EILPGRM-2
 REPORT: P\PBM_EIL\3874UT7\3874UT7TestReport.doc

CALCULATION OF DUTY CYCLE

The period of the pulse train is determined by observing it on an oscilloscope or a spectrum analyzer with zero (0) frequency span. A plot is then made of the pulse train with a sweep time of 100 milliseconds. This sweep determines the duration of the pulse train. This sweep allows the determination of the number of and type of pulses, i.e. long & short. Plots are then made showing the duration of each type of pulse and its duration. From the 100-millisecond plot, the number of a given type of pulse is then multiplied by the duration of that type pulse. This allows the calculation of the amount of time the DUT is on within 100 ms.

Long Pulse	1.75 ms
Medium Pulse	0.64 ms
Short Pulse	3.60 ms
On Time	6.00 ms
Length of Pulse Train	11.5 ms
Total	0.06ms

$$\text{dB} = 20 \cdot \log(\text{ON TIME}) / \text{PERIOD}$$


$$\text{dB} = 20 \cdot \log(6.00 / 100)$$

$$\text{dB} = 20 \cdot \log(0.06)$$


$$\text{dB} = -24$$

See the following plots.

APPLICANT: PBM INDUSTRIES, INC.
FCC ID: EILPGRM-2
REPORT: P\PBM_EIL\3874UT7\3874UT7TestReport.doc

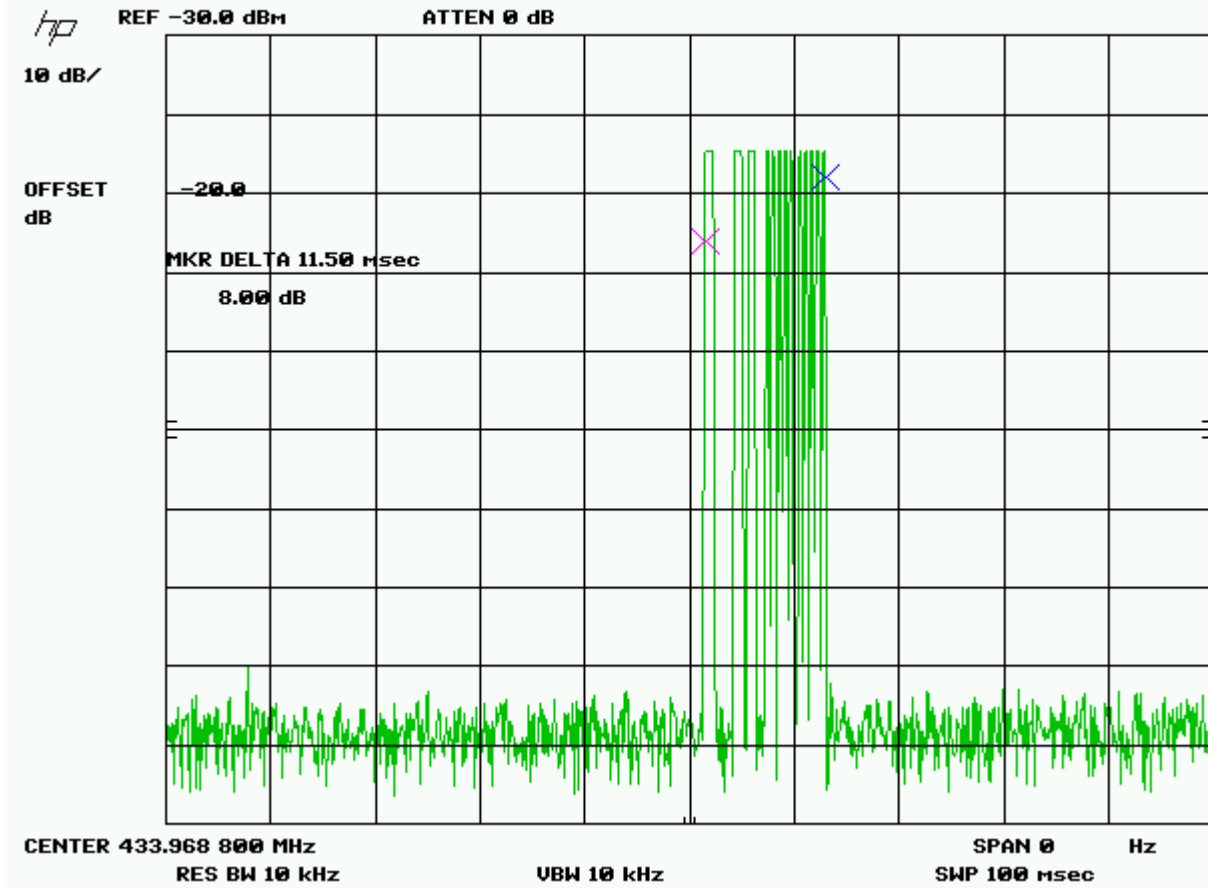


APPLICANT: PBM INDUSTRIES, INC.
 FCC ID: EILPGRM-2
 REPORT: P\PBM_EIL\3874UT7\3874UT7TestReport.doc

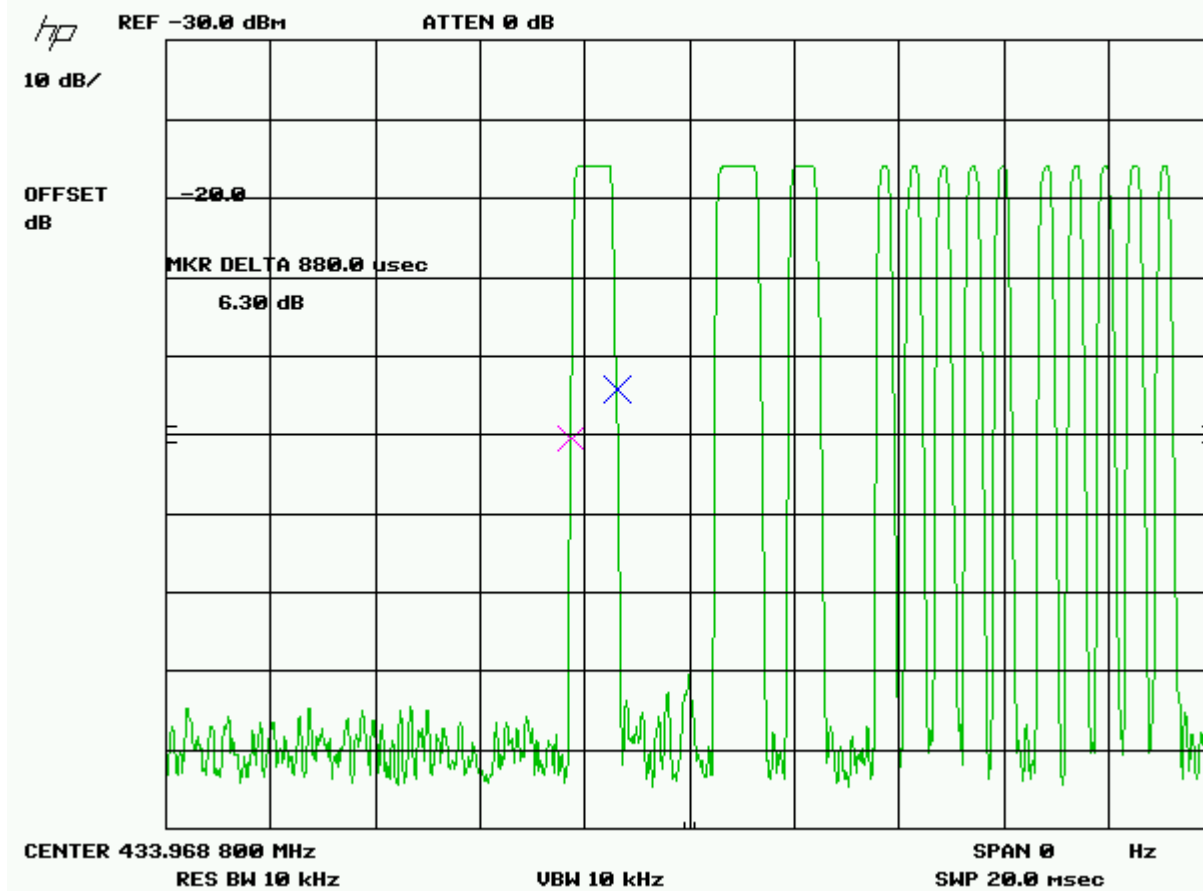


DUTY CYCLE PLOT - LONG PULSES

APPLICANT: PBM INDUSTRIES, INC.
 FCC ID: EILPGRM-2
 REPORT: P\PBM_EIL\3874UT7\3874UT7TestReport.doc

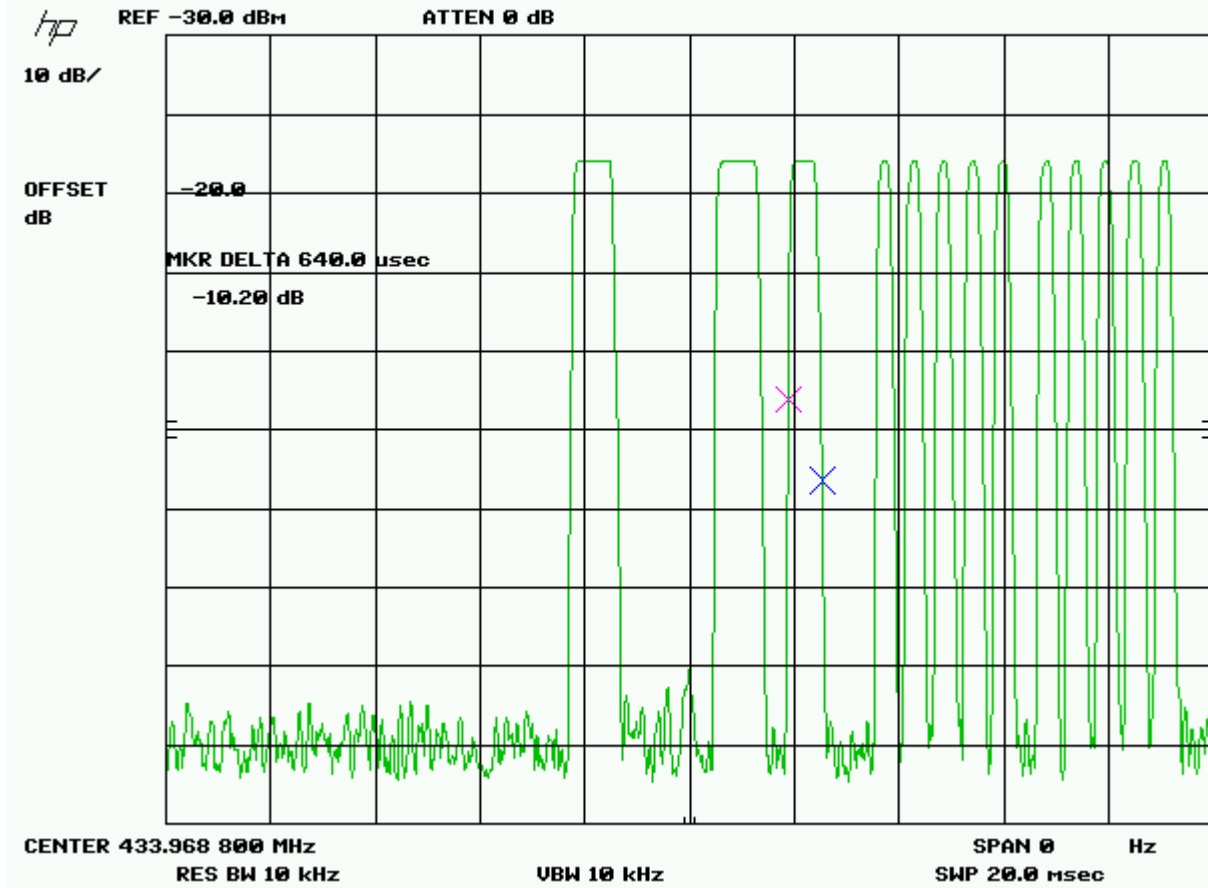

DUTY CYCLE PLOT - MEDIUM PULSES

APPLICANT: PBM INDUSTRIES, INC.
 FCC ID: EILPGRM-2
 REPORT: P\PBM_EIL\3874UT7\3874UT7TestReport.doc

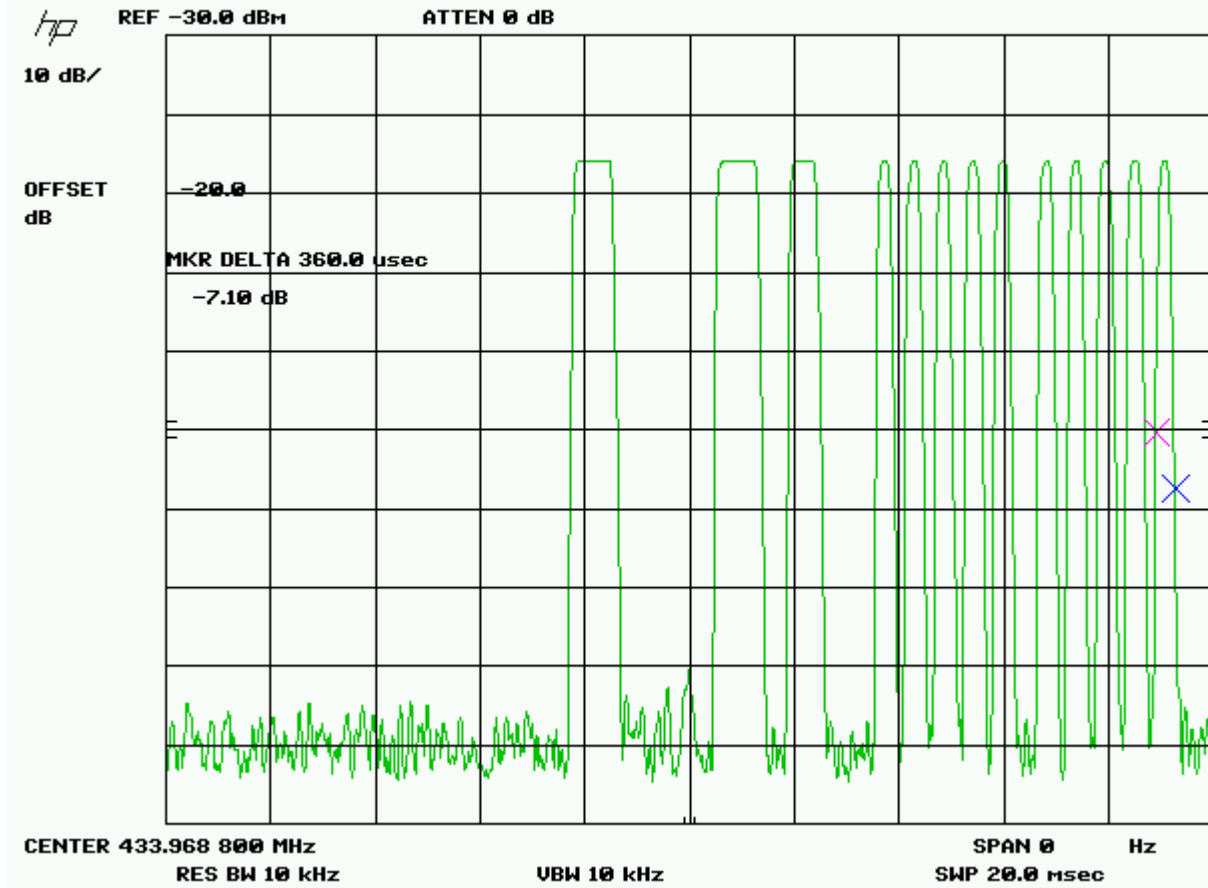

DUTY CYCLE PLOT – SHORT PULSES

APPLICANT: PBM INDUSTRIES, INC.
 FCC ID: EILPGRM-2
 REPORT: P\PBM_EIL\3874UT7\3874UT7TestReport.doc

OCCUPIED BANDWIDTH


Rules Part No.: 15.231(C)

Requirements: The bandwidth of the emission shall be no wider than .25% of the center frequency for devices operating between 70 and 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Test Data: Please refer to the following plot.

NOTES:

PBM INDUSTRIES, INC. - FCC ID: EILPGRM-2
OCCUPIED BANDWIDTH PLOT

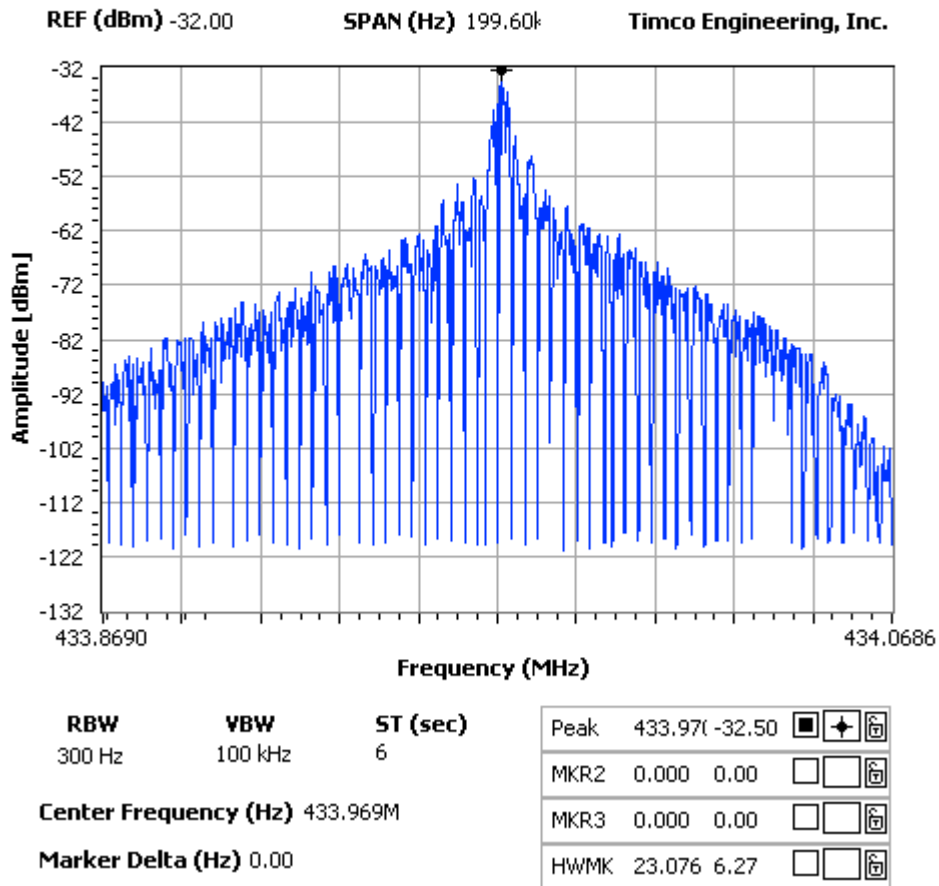

APPLICANT: PBM INDUSTRIES, INC.
FCC ID: EILPGRM-2
REPORT: P\PBM_EIL\3874UT7\3874UT7TestReport.doc

POWER LINE CONDUCTED INTERFERENCE

Rules Part No.: Pt 15.207

Requirements:

Frequency (MHz)	Quasi Peak Limits (dBuV)	Average Limits (dBuV)
0.15 – 0.5	66 – 56	56 – 46
0.5 – 5.0	56	46
5.0 – 30	60	50

Test Data: Not applicable because the DUT is battery operated exclusively.

APPLICANT: PBM INDUSTRIES, INC.
FCC ID: EILPGRM-2
REPORT: P\PBM_EIL\3874UT7\3874UT7TestReport.doc