

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz EVDO FCC.da52:3

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 25-11-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 1 (1880 MHz); Frequency: 1880 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1880$ MHz; $\sigma = 1.56$ S/m; $\epsilon_r = 51.7$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 25-11-14/Channel 0600 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.438 W/kg

Lap Held Antenna OUT 25-11-14/Channel 0600 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 13.767 V/m; **Power Drift = -0.16 dB**

Averaged SAR: SAR(1g) = 0.425 W/kg; SAR(10g) = 0.252 W/kg

Maximum value of SAR (interpolated) = 0.670 W/kg

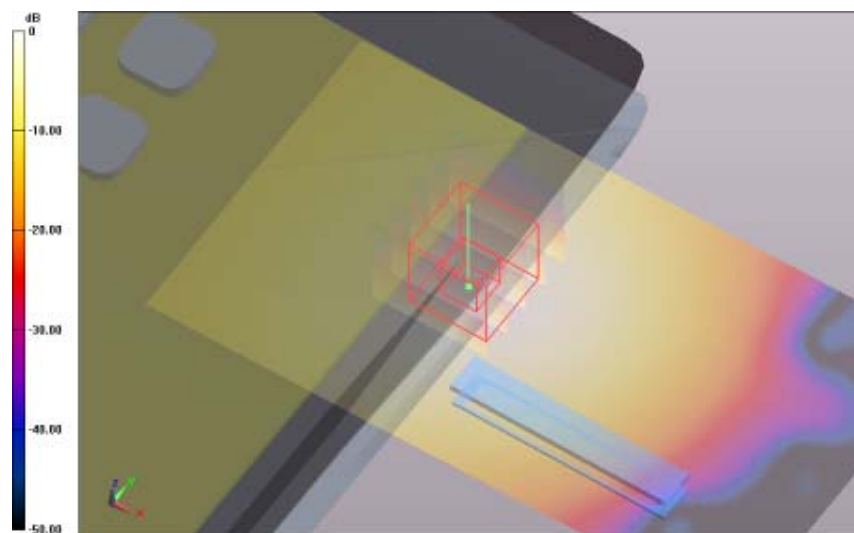


0 dB = 0.438 W/kg = -3.59 dBW/kg

SAR Measurement Plot 92



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

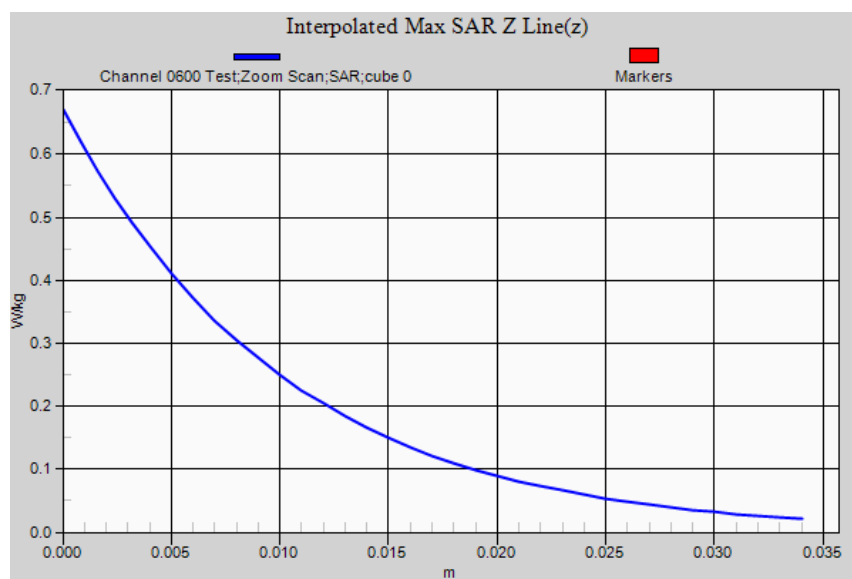

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz EVDO FCC.da52:3

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 25-11-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 1 (1880 MHz); Frequency: 1909 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1908.5$ MHz; $\sigma = 1.58$ S/m; $\epsilon_r = 51.6$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 25-11-14/Channel 1175 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.514 W/kg

Lap Held Antenna OUT 25-11-14/Channel 1175 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 15.114 V/m; **Power Drift = 0.03 dB**

Averaged SAR: SAR(1g) = 0.501 W/kg; SAR(10g) = 0.298 W/kg

Maximum value of SAR (interpolated) = 0.799 W/kg

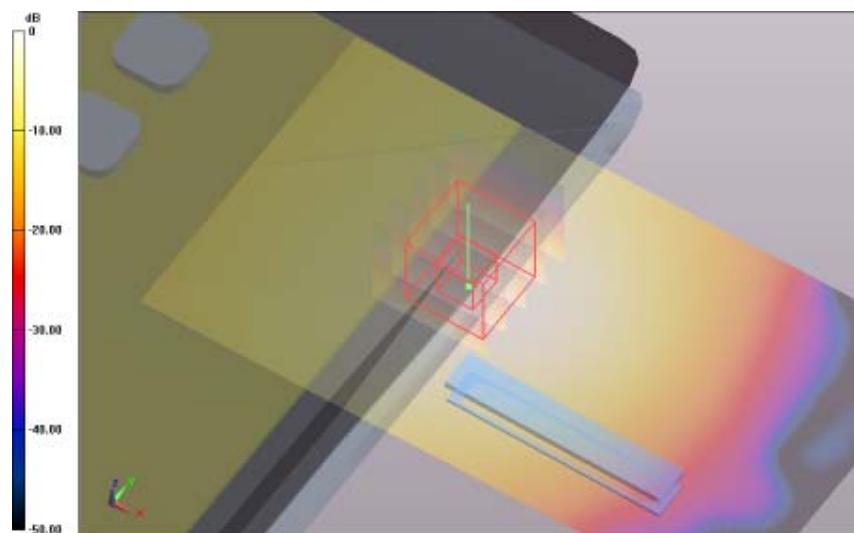


0 dB = 0.514 W/kg = -2.89 dBW/kg

SAR Measurement Plot 93



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

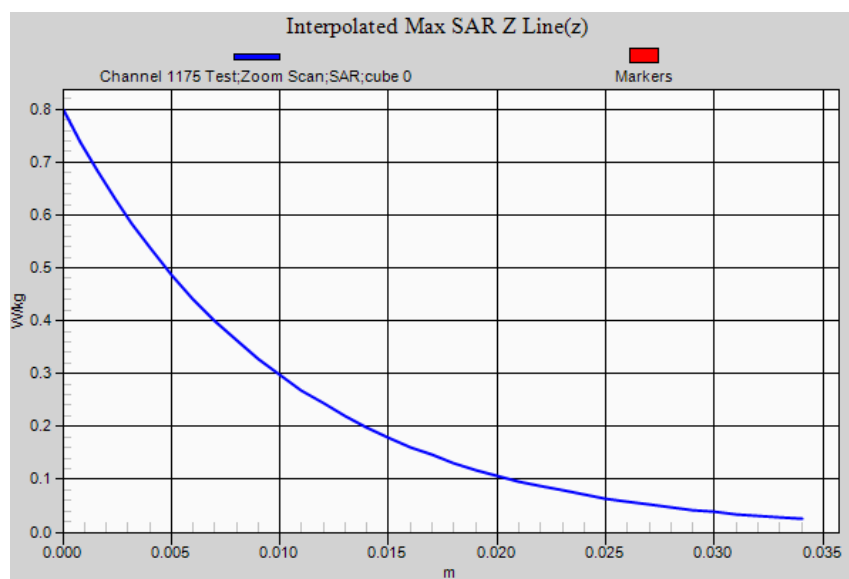

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz EVDO FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 25-11-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 1 (1880 MHz); Frequency: 1851 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1851$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 51.8$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 25-11-14/Channel 0025 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.654 W/kg

Edge 2 Antenna IN 25-11-14/Channel 0025 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 15.349 V/m; **Power Drift = -0.18 dB**

Averaged SAR: SAR(1g) = 0.705 W/kg; SAR(10g) = 0.266 W/kg

Maximum value of SAR (interpolated) = 1.580 W/kg

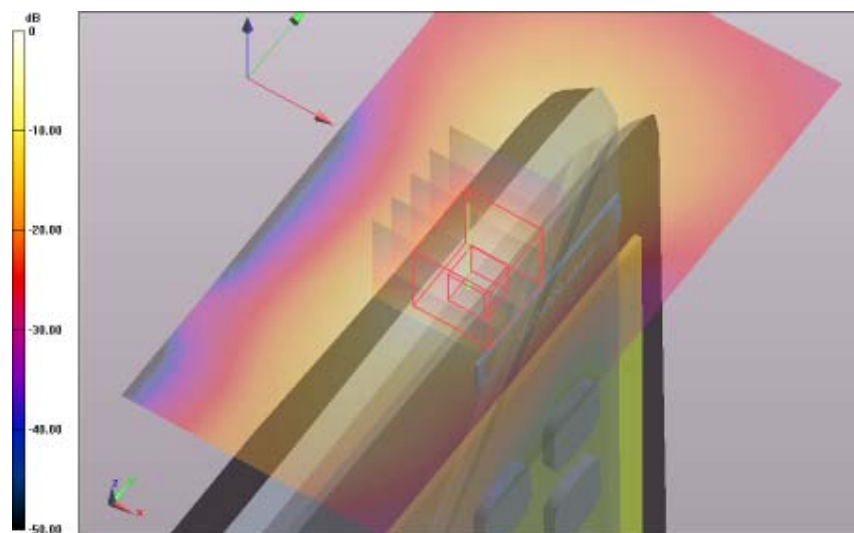


0 dB = 0.654 W/kg = -1.84 dBW/kg

SAR Measurement Plot 94



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

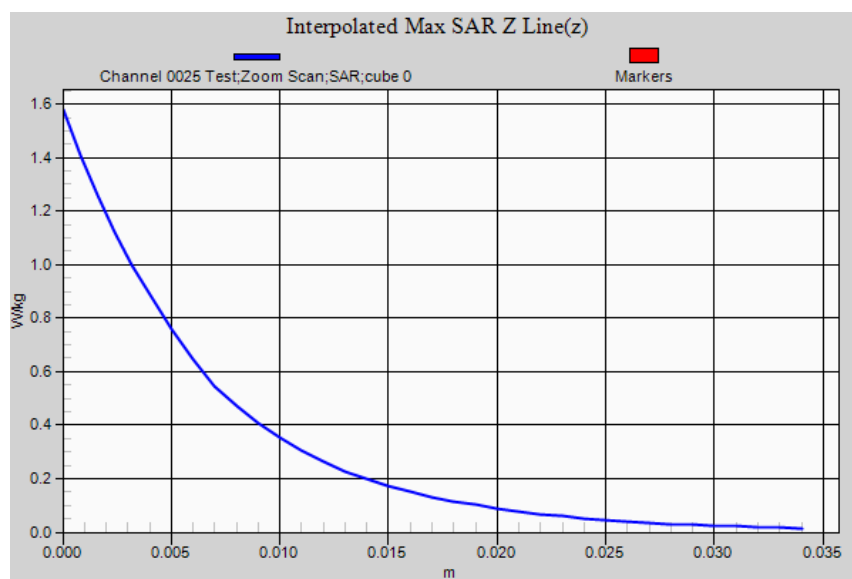

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz EVDO FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 25-11-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 1 (1880 MHz); Frequency: 1880 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1880$ MHz; $\sigma = 1.56$ S/m; $\epsilon_r = 51.7$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 25-11-14/Channel 0600 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.405 W/kg

Edge 2 Antenna IN 25-11-14/Channel 0600 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 11.680 V/m; **Power Drift = 0.02 dB**

Averaged SAR: SAR(1g) = 0.419 W/kg; SAR(10g) = 0.160 W/kg

Maximum value of SAR (interpolated) = 0.944 W/kg

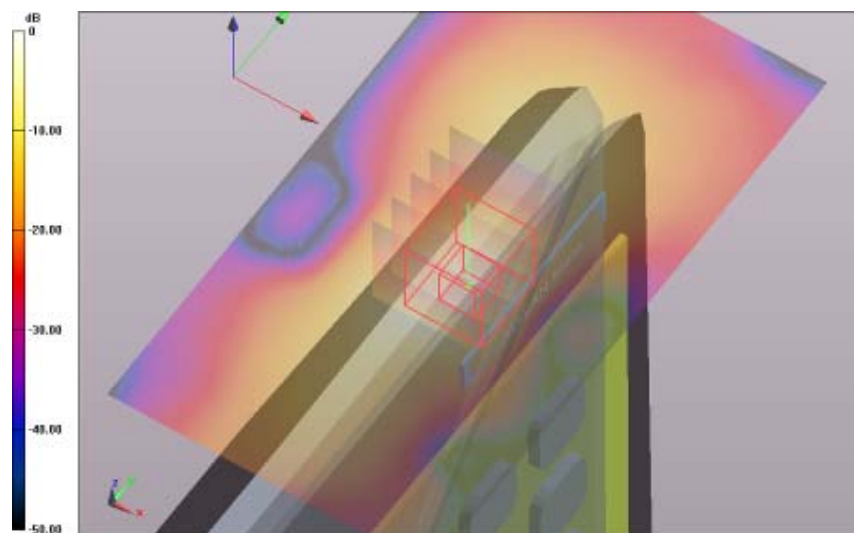


0 dB = 0.405 W/kg = -3.93 dBW/kg

SAR Measurement Plot 95



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

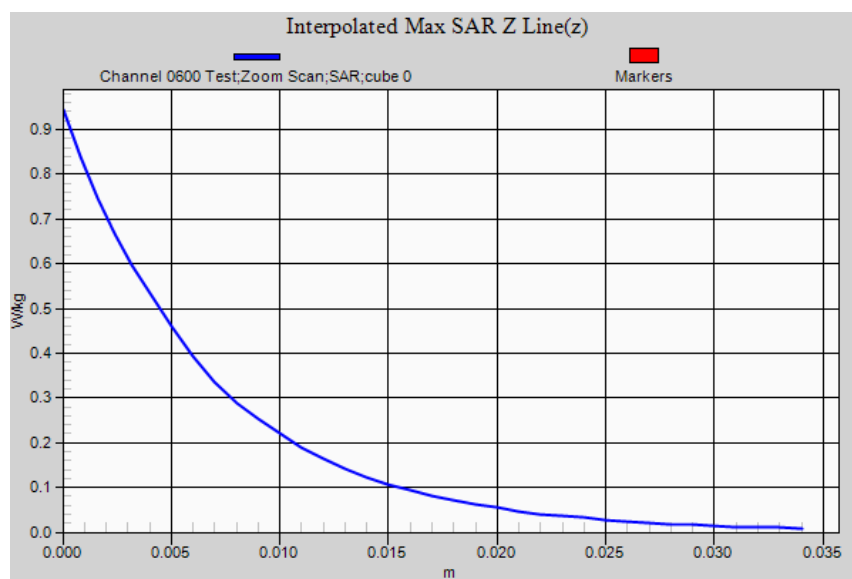

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz EVDO FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 25-11-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 1 (1880 MHz); Frequency: 1909 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1908.5$ MHz; $\sigma = 1.58$ S/m; $\epsilon_r = 51.6$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 25-11-14/Channel 1175 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.651 W/kg

Edge 2 Antenna IN 25-11-14/Channel 1175 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 14.894 V/m; **Power Drift = -0.02 dB**

Averaged SAR: SAR(1g) = 0.709 W/kg; SAR(10g) = 0.269 W/kg

Maximum value of SAR (interpolated) = 1.620 W/kg

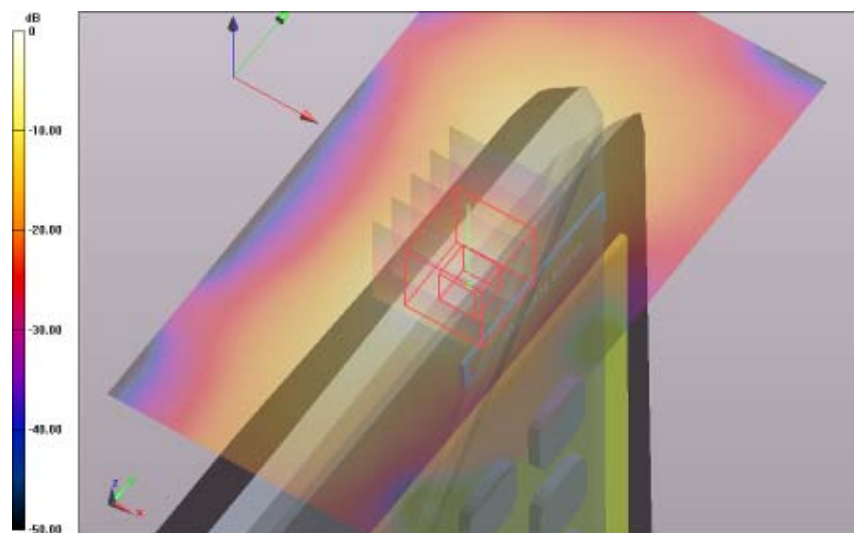


0 dB = 0.651 W/kg = -1.86 dBW/kg

SAR Measurement Plot 96



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

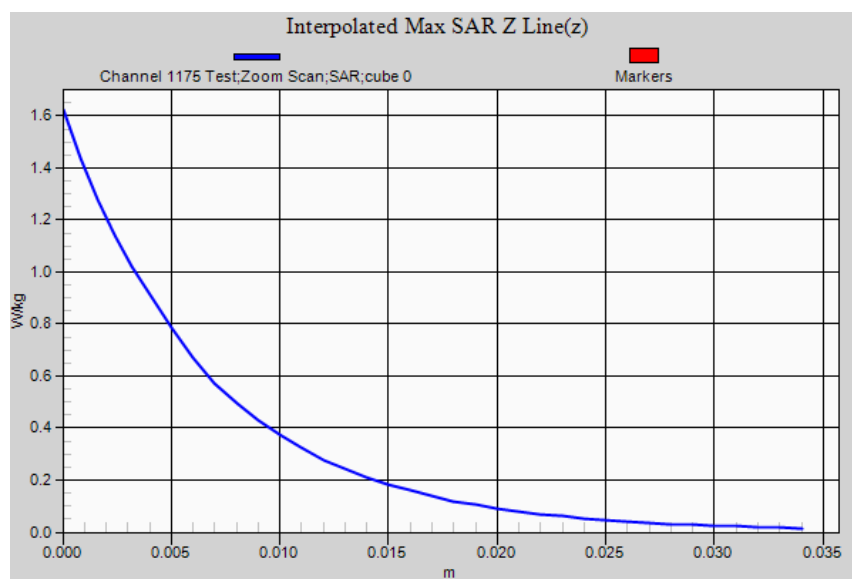

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz EVDO FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 25-11-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 1 (1880 MHz); Frequency: 1851 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1851$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 51.8$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 25-11-14/Channel 0025 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.463 W/kg

Edge 3 Antenna OUT 25-11-14/Channel 0025 Test/Zoom Scan (21x26x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 8.162 V/m; **Power Drift = -0.01 dB**

Averaged SAR: SAR(1g) = 0.416 W/kg; SAR(10g) = 0.253 W/kg

Maximum value of SAR (interpolated) = 0.692 W/kg

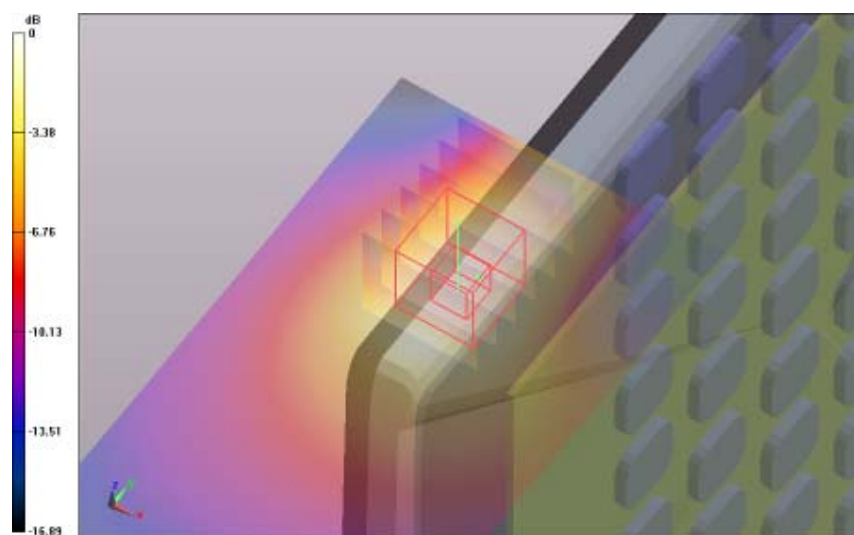


0 dB = 0.463 W/kg = -3.34 dBW/kg

SAR Measurement Plot 97



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

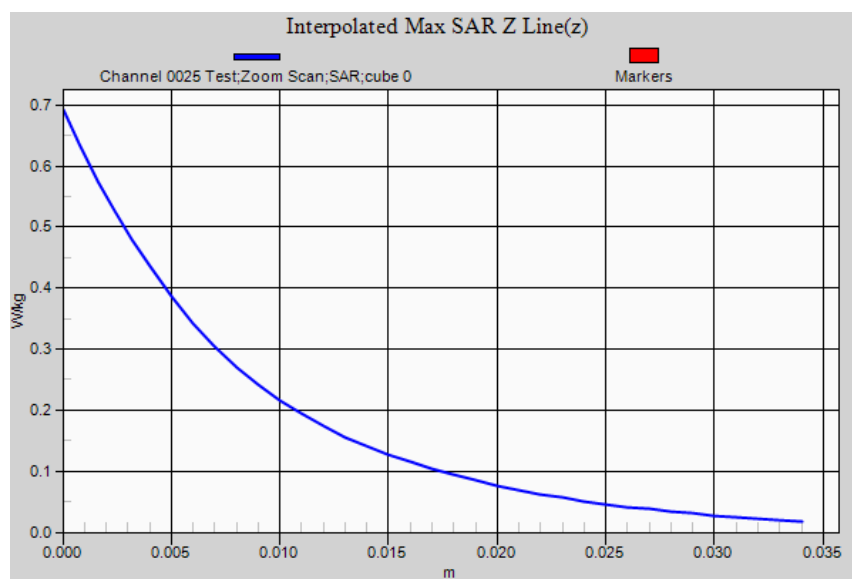

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz EVDO FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 25-11-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 1 (1880 MHz); Frequency: 1880 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1880$ MHz; $\sigma = 1.56$ S/m; $\epsilon_r = 51.7$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 25-11-14/Channel 0600 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.375 W/kg

Edge 3 Antenna OUT 25-11-14/Channel 0600 Test/Zoom Scan (21x26x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 7.340 V/m; **Power Drift = -0.16 dB**

Averaged SAR: SAR(1g) = 0.343 W/kg; SAR(10g) = 0.204 W/kg

Maximum value of SAR (interpolated) = 0.574 W/kg

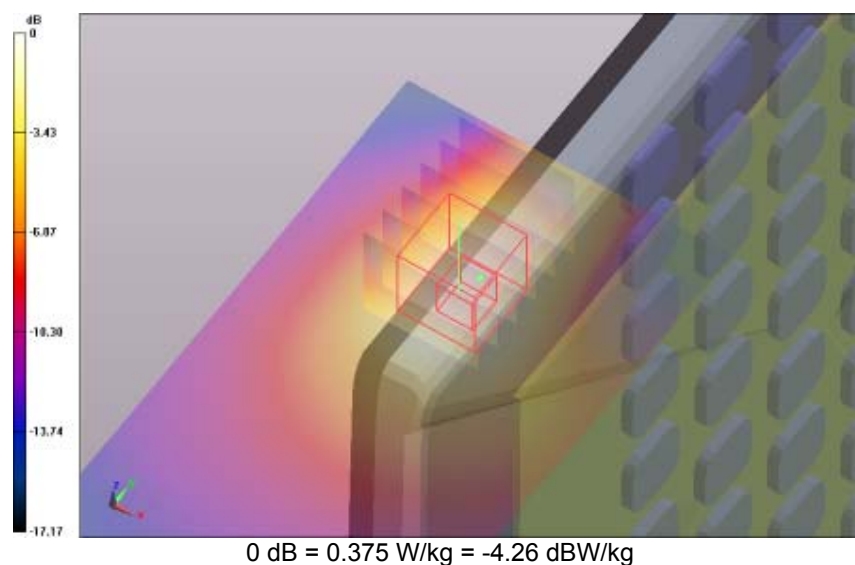


SAR Measurement Plot 98



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

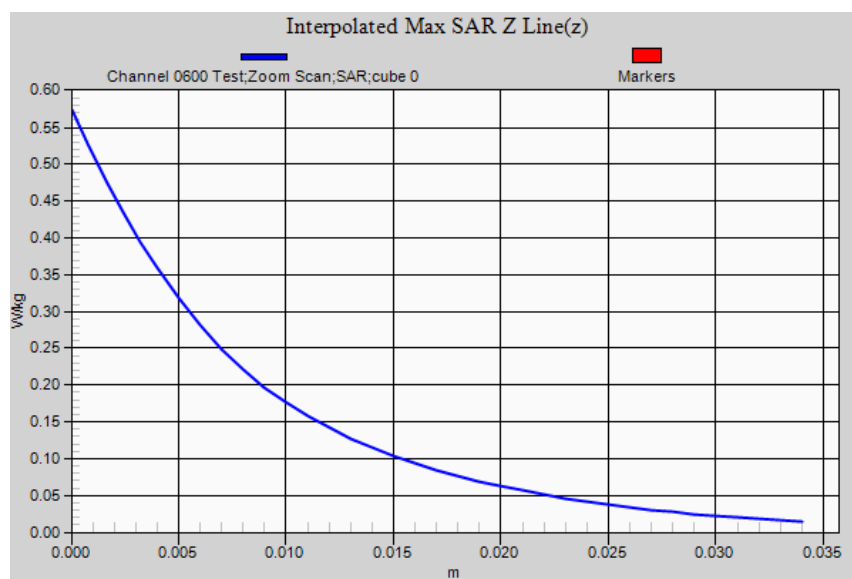

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz EVDO FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 25-11-14**

Communication System: 0 - CDMA2000 (1xEv-Do 153.6 kbps) (0); Communication System Band: Band Class 1 (1880 MHz); Frequency: 1909 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1908.5$ MHz; $\sigma = 1.58$ S/m; $\epsilon_r = 51.6$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 25-11-14/Channel 1175 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.425 W/kg

Edge 3 Antenna OUT 25-11-14/Channel 1175 Test/Zoom Scan (26x26x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 7.642 V/m; **Power Drift = -0.07 dB**


Averaged SAR: SAR(1g) = 0.387 W/kg; SAR(10g) = 0.228 W/kg

Maximum value of SAR (interpolated) = 0.662 W/kg

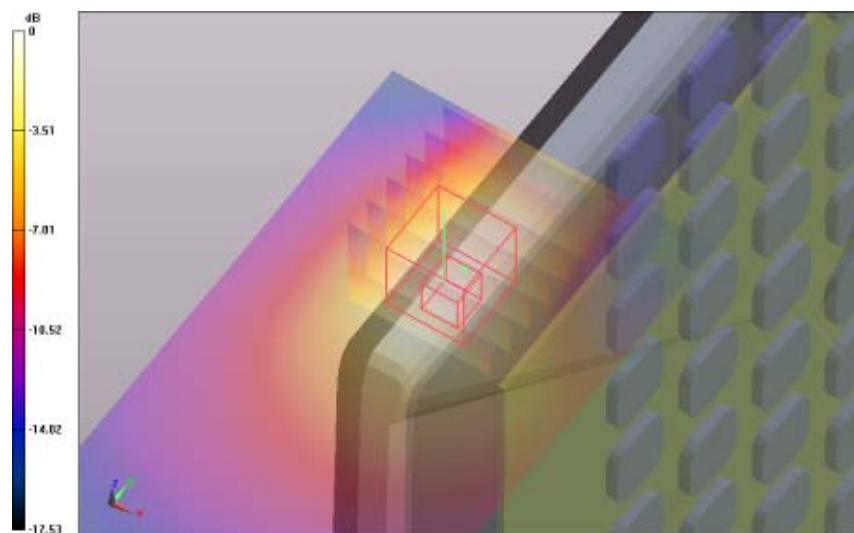

0 dB = 0.425 W/kg = -3.72 dBW/kg

SAR Measurement Plot 99

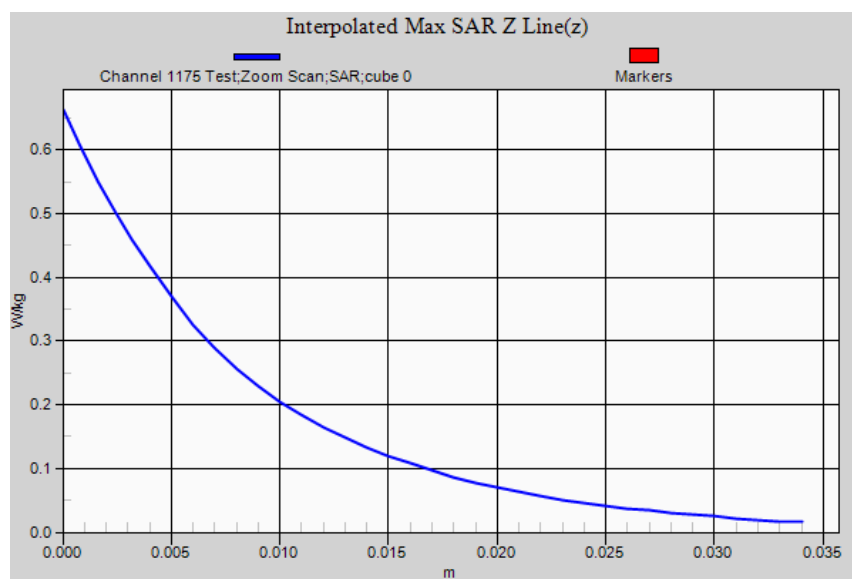

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1900 MHz EVDO FCC.da52:7

DUT Name: Dipole 1950 MHz, Type: DV1950V3, Serial: 1113**Configuration: System Check 25-11-14**

Communication System: 0 - CW (0); Communication System Band: 1950 MHz; Frequency: 1950 MHz,

Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=1950$ MHz; $\sigma = 1.60$ S/m; $\epsilon_r = 51.4$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (4.67,4.67,4.67); Calibrated: 13/12/2013;

Sensor-Surface: 4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 10/12/2013

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

System Check 25-11-14/Channel 1 Test/Area Scan (51x51x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm;

Maximum value of SAR (interpolated) = 13.000 W/kg

System Check 25-11-14/Channel 1 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 91.116 V/m; **Power Drift = 0.03 dB****Averaged SAR: SAR(1g) = 10.300 W/kg; SAR(10g) = 5.340 W/kg**

Maximum value of SAR (interpolated) = 17.800 W/kg

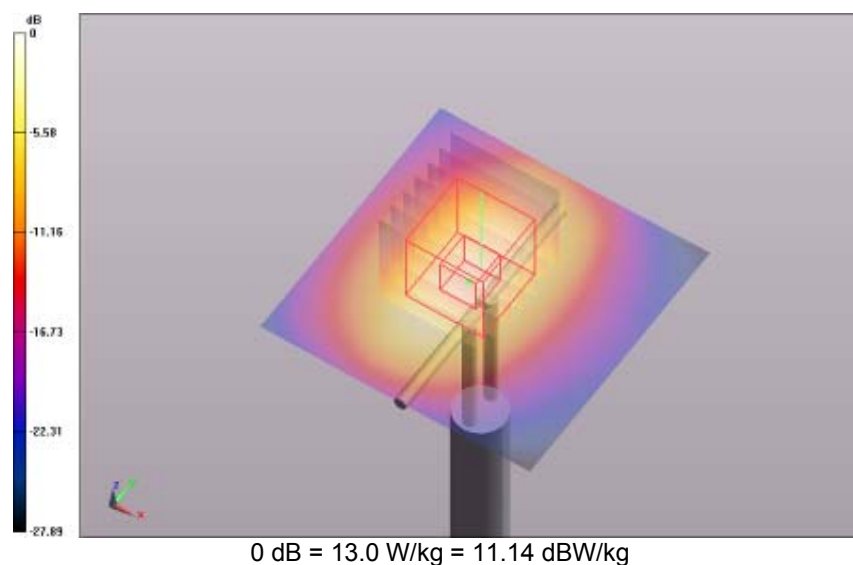


SAR Measurement Plot 100



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

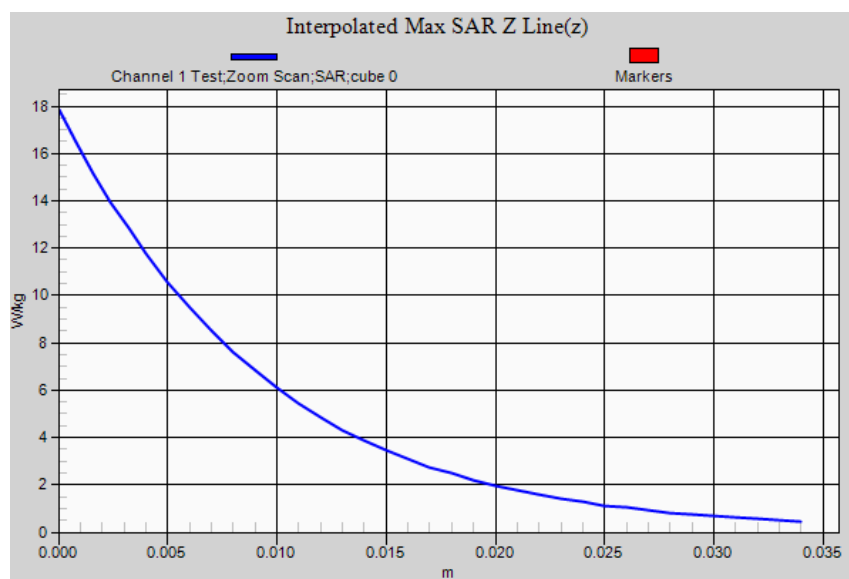

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 700 MHz LTE FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 1RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (1RB Mid) (0); Communication System Band: Band 17 E-

UTRA 710; Frequency: 709.0 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=708.75$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 56.4$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 10/12/2013

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 1RB 31-10-14/Channel 23780 Test/Area Scan (61x111x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.124 W/kg**Bystander 25mm Spacing Antenna OUT 1RB 31-10-14/Channel 23780 Test/Zoom Scan (21x21x36)/Cube 0:**Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 8.394 V/m; **Power Drift = -0.06 dB****Averaged SAR: SAR(1g) = 0.125 W/kg; SAR(10g) = 0.087 W/kg**

Maximum value of SAR (interpolated) = 0.151 W/kg

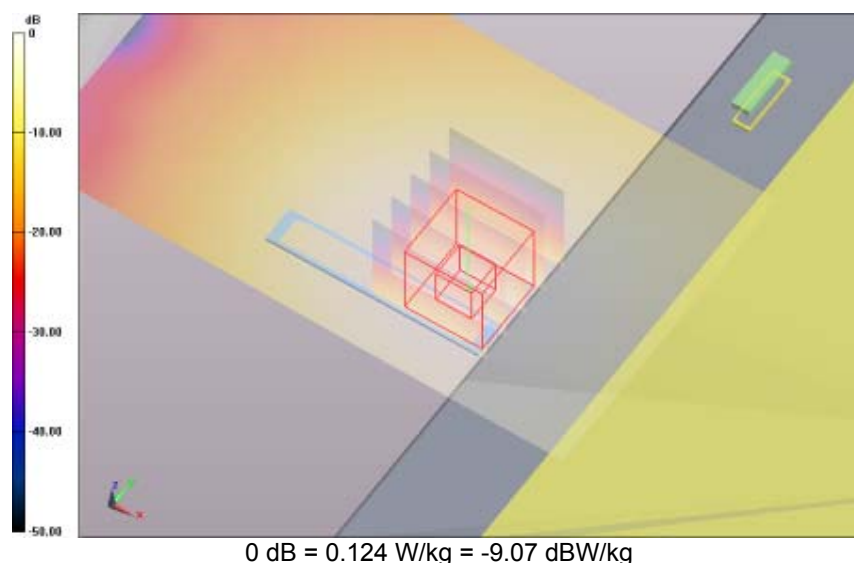


SAR Measurement Plot 101



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

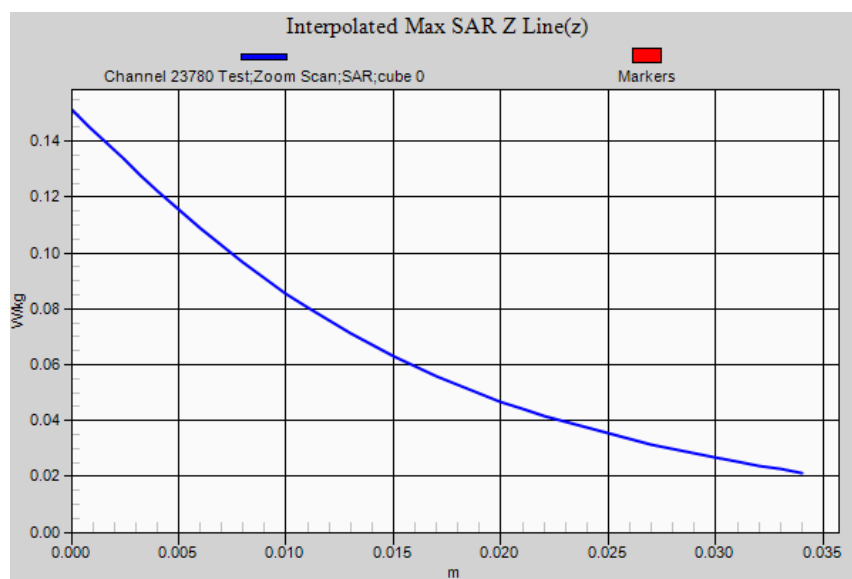

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 700 MHz LTE FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 1RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (1RB Low) (0); Communication System Band: Band 17 E-UTRA 710; Frequency: 710.0 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=710$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 56.3$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)


Bystander 25mm Spacing Antenna OUT 1RB 31-10-14/Channel 23790 Test/Area Scan (61x111x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.127 W/kg

Bystander 25mm Spacing Antenna OUT 1RB 31-10-14/Channel 23790 Test/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 8.462 V/m; Power Drift = -0.02 dB

Averaged SAR: SAR(1g) = 0.129 W/kg; SAR(10g) = 0.090 W/kg

Maximum value of SAR (interpolated) = 0.156 W/kg

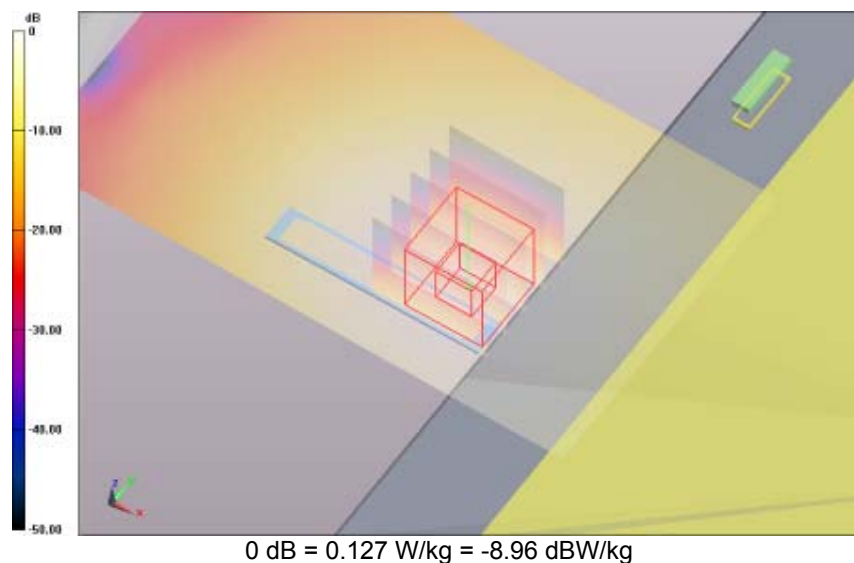


SAR Measurement Plot 102



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

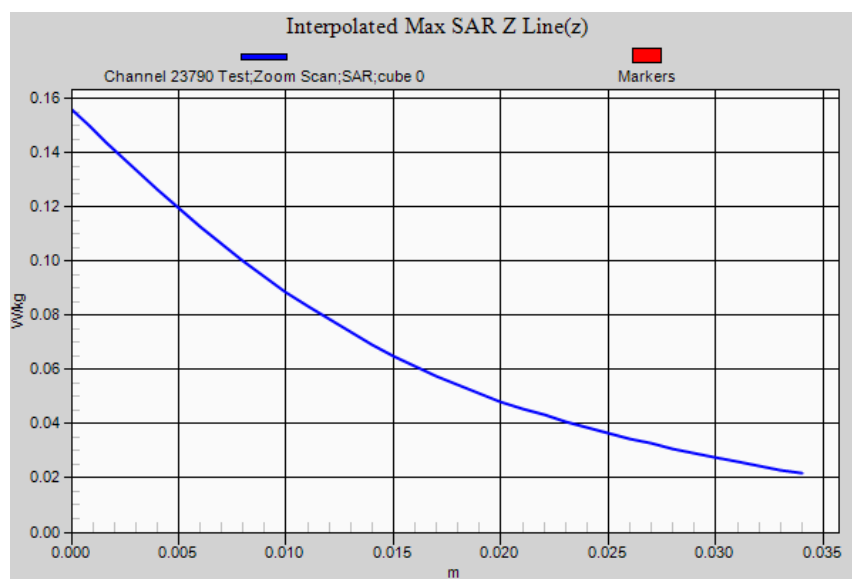

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 700 MHz LTE FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 1RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (1RB Low) (0); Communication System Band: Band 17 E-UTRA 710; Frequency: 711.0 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=711.25$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 56.3$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)


Bystander 25mm Spacing Antenna OUT 1RB 31-10-14/Channel 23800 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.124 W/kg

Bystander 25mm Spacing Antenna OUT 1RB 31-10-14/Channel 23800 Test/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 7.449 V/m; **Power Drift = -0.07 dB**

Averaged SAR: SAR(1g) = 0.126 W/kg; SAR(10g) = 0.089 W/kg

Maximum value of SAR (interpolated) = 0.154 W/kg

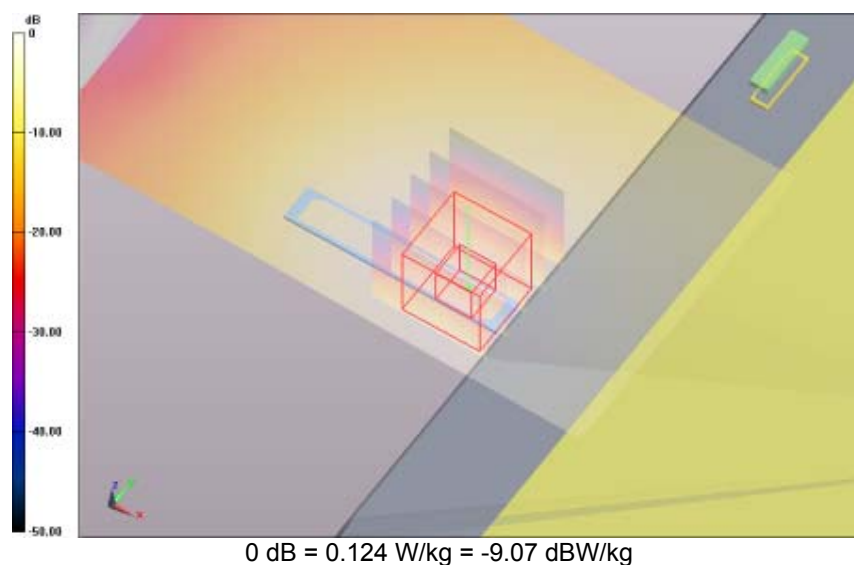


SAR Measurement Plot 103



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

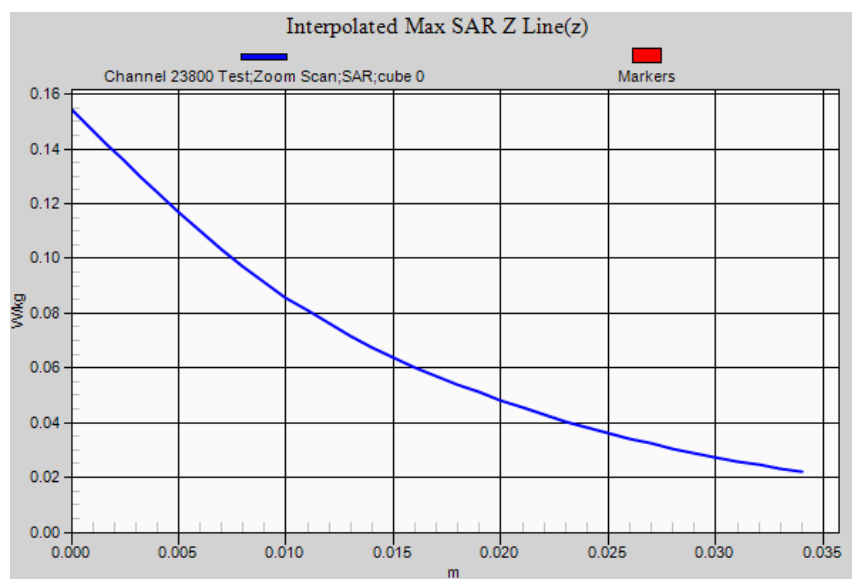

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 700 MHz LTE FCC.da52:2

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 25RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (25RB Mid) (0); Communication System Band: Band 17 E-UTRA 710; Frequency: 709.0 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=708.75$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 56.4$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 25RB 31-10-14/Channel 23780 Test/Area Scan (61x111x1):


Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.106 W/kg

Bystander 25mm Spacing Antenna OUT 25RB 31-10-14/Channel 23780 Test/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 7.683 V/m; Power Drift = -0.00 dB

Averaged SAR: SAR(1g) = 0.107 W/kg; SAR(10g) = 0.075 W/kg

Maximum value of SAR (interpolated) = 0.129 W/kg

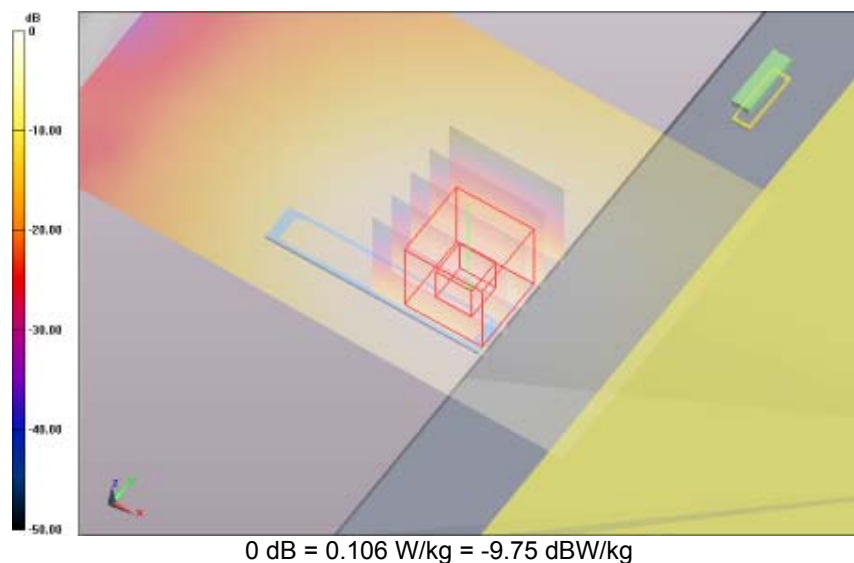


SAR Measurement Plot 104



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

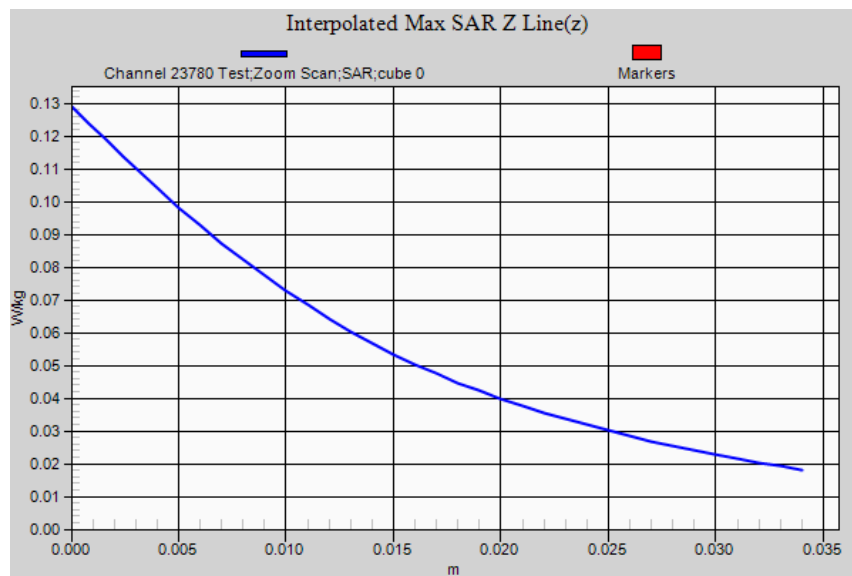

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 700 MHz LTE FCC.da52:2

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 25RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (25RB Low) (0); Communication System Band: Band 17 E-UTRA 710; Frequency: 710.0 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=710$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 56.3$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 25RB 31-10-14/Channel 23790 Test/Area Scan (61x111x1):


Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.106 W/kg

Bystander 25mm Spacing Antenna OUT 25RB 31-10-14/Channel 23790 Test/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 7.798 V/m; Power Drift = -0.11 dB

Averaged SAR: SAR(1g) = 0.106 W/kg; SAR(10g) = 0.075 W/kg

Maximum value of SAR (interpolated) = 0.125 W/kg

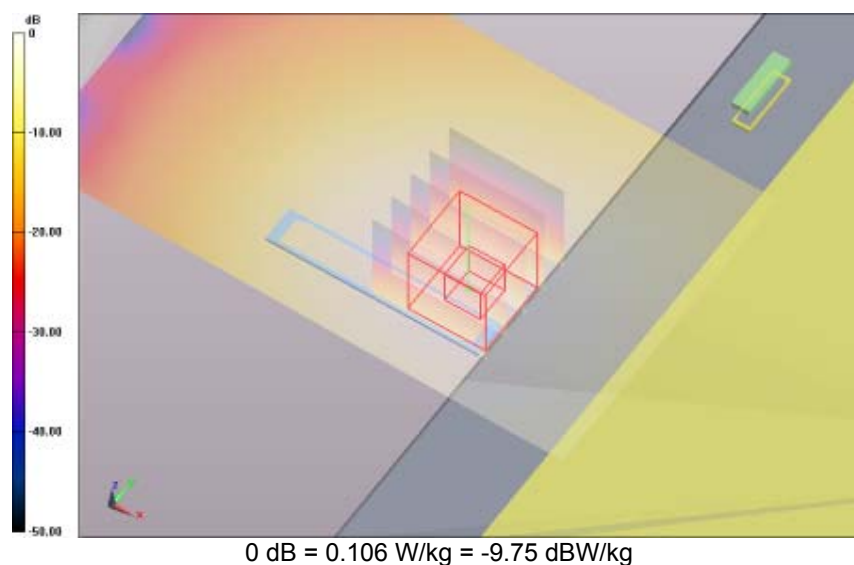


SAR Measurement Plot 105



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

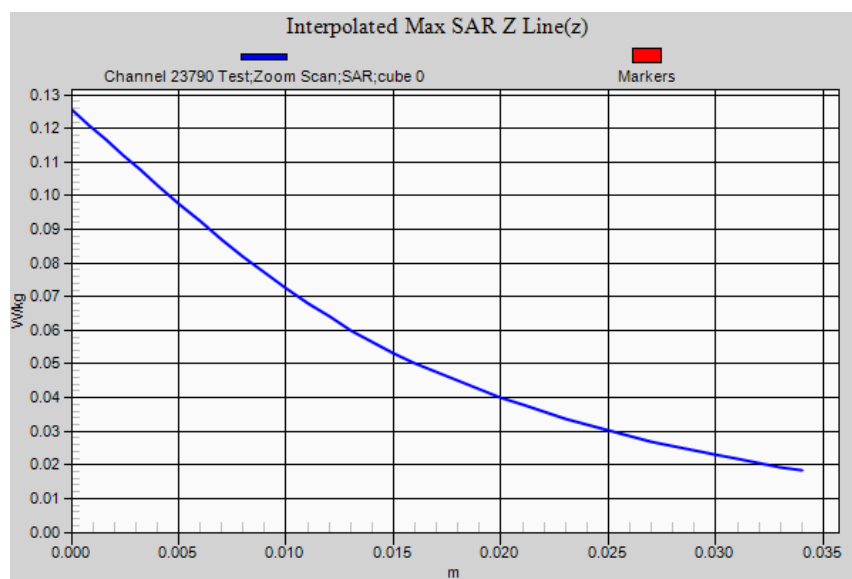

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 700 MHz LTE FCC.da52:2

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 25RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (25RB Low) (0); Communication System Band: Band 17 E-UTRA 710; Frequency: 711.0 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=711.25$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 56.3$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 25RB 31-10-14/Channel 23800 Test/Area Scan (61x111x1):


Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.108 W/kg

Bystander 25mm Spacing Antenna OUT 25RB 31-10-14/Channel 23800 Test/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 6.540 V/m; Power Drift = -0.01 dB

Averaged SAR: SAR(1g) = 0.109 W/kg; SAR(10g) = 0.076 W/kg

Maximum value of SAR (interpolated) = 0.134 W/kg

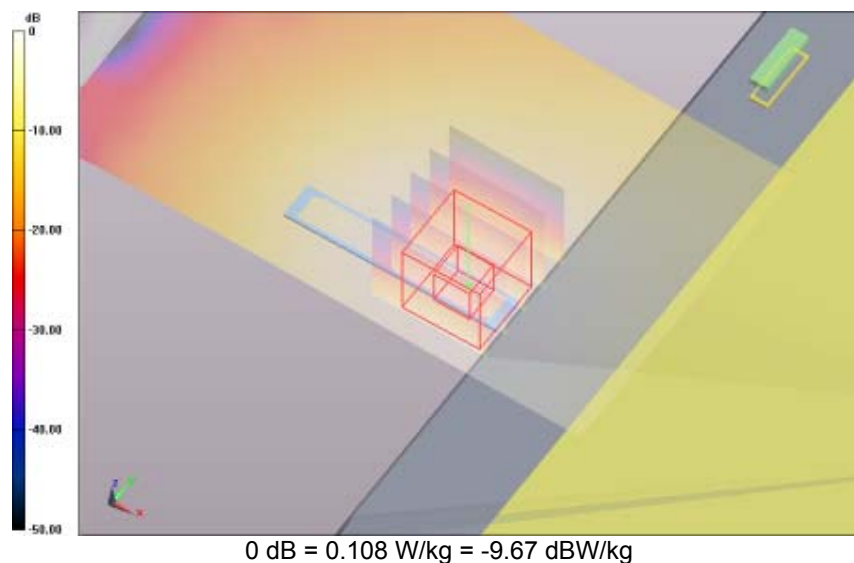


SAR Measurement Plot 106



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

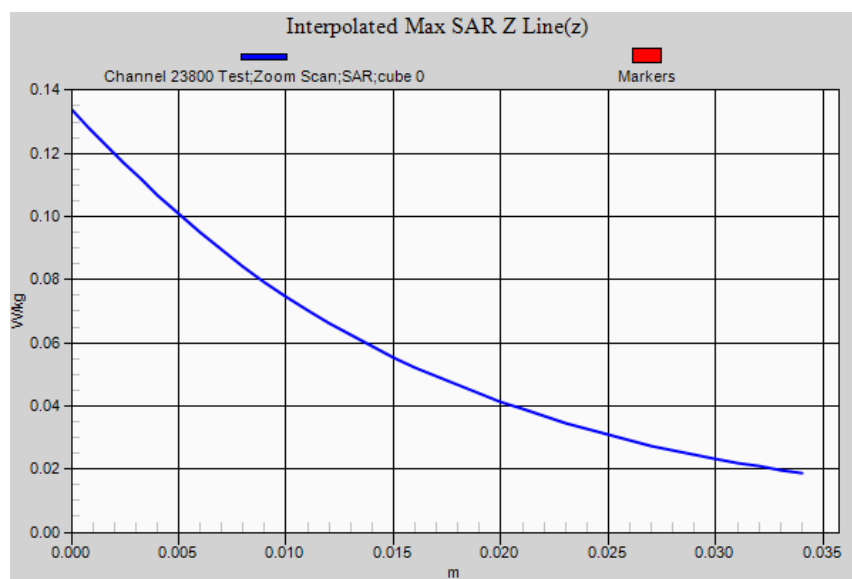

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M141025 Tablet 700 MHz LTE FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429

Configuration: Lap Held Antenna OUT 1RB 31-10-14

Communication System: 0 - LTE FDD 10MHz QPSK (1RB Mid) (0); Communication System Band: Band 17 E-UTRA 710; Frequency: 709.0 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=708.75$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 56.4$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 1RB 31-10-14/Channel 23780 Test/Area Scan (61x111x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.355 W/kg

Lap Held Antenna OUT 1RB 31-10-14/Channel 23780 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 16.820 V/m; **Power Drift = 0.08 dB**

Averaged SAR: SAR(1g) = 0.359 W/kg; SAR(10g) = 0.242 W/kg

Maximum value of SAR (interpolated) = 0.464 W/kg

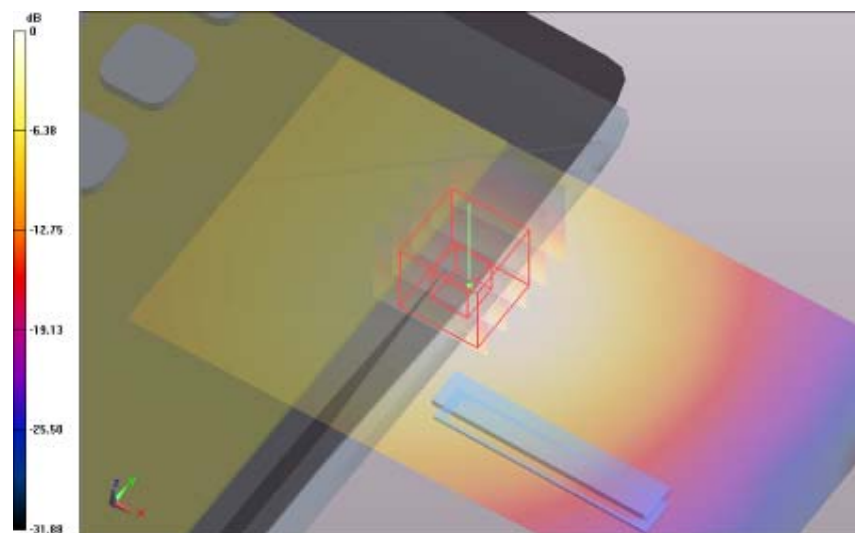


0 dB = 0.355 W/kg = -4.50 dBW/kg

SAR Measurement Plot 107



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

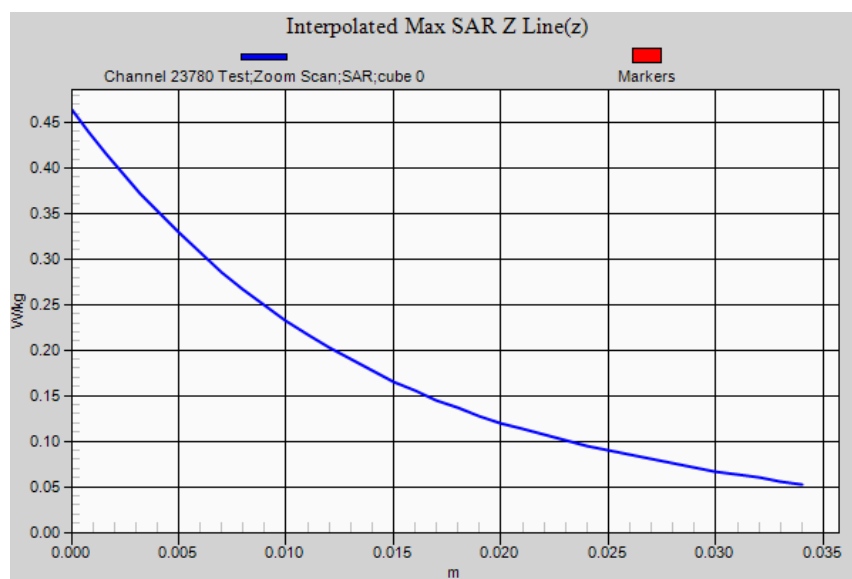

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 700 MHz LTE FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 1RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (1RB Low) (0); Communication System Band: Band 17 E-UTRA 710; Frequency: 710.0 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=710$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 56.3$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 1RB 31-10-14/Channel 23790 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.457 W/kg

Lap Held Antenna OUT 1RB 31-10-14/Channel 23790 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 17.457 V/m; **Power Drift = -0.02 dB**

Averaged SAR: SAR(1g) = 0.466 W/kg; SAR(10g) = 0.315 W/kg

Maximum value of SAR (interpolated) = 0.595 W/kg

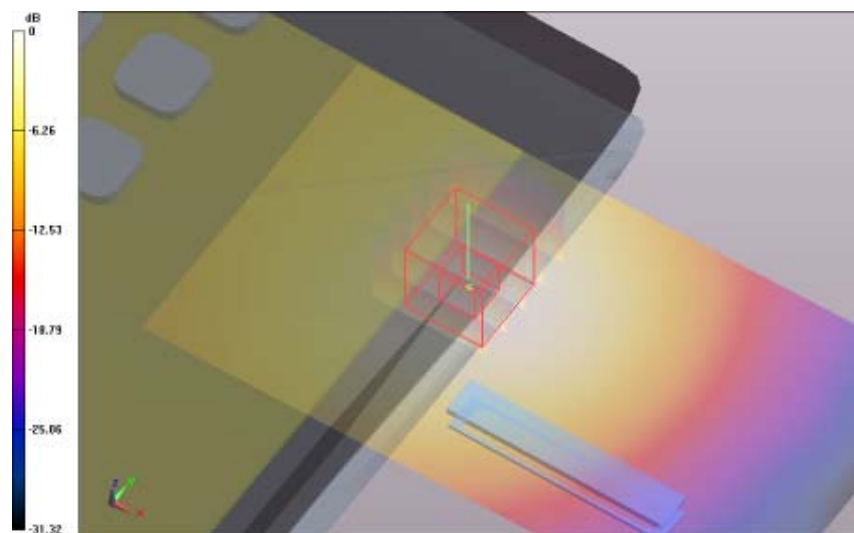


0 dB = 0.457 W/kg = -3.40 dBW/kg

SAR Measurement Plot 108



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

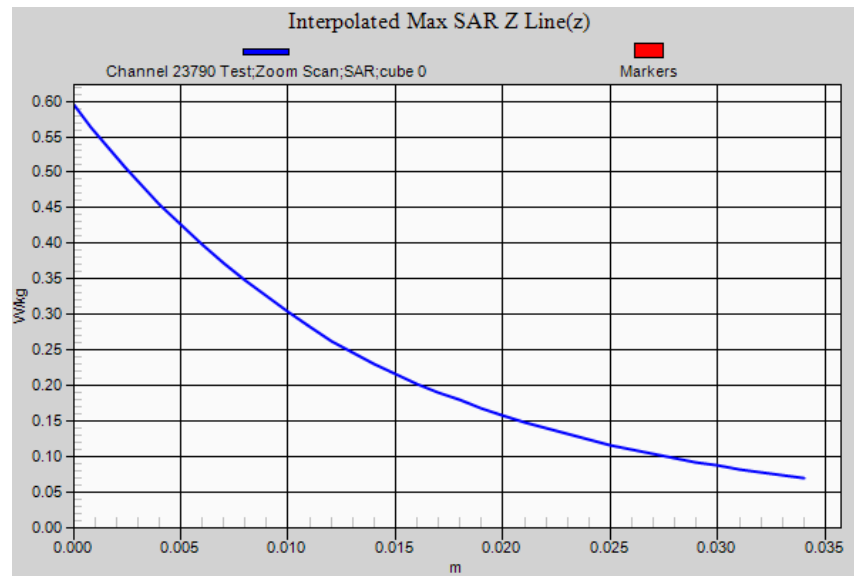

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 700 MHz LTE FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 1RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (1RB Low) (0); Communication System Band: Band 17 E-UTRA 710; Frequency: 711.0 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=711.25$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 56.3$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 1RB 31-10-14/Channel 23800 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.369 W/kg

Lap Held Antenna OUT 1RB 31-10-14/Channel 23800 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 16.735 V/m; **Power Drift = -0.11 dB**

Averaged SAR: SAR(1g) = 0.375 W/kg; SAR(10g) = 0.253 W/kg

Maximum value of SAR (interpolated) = 0.487 W/kg

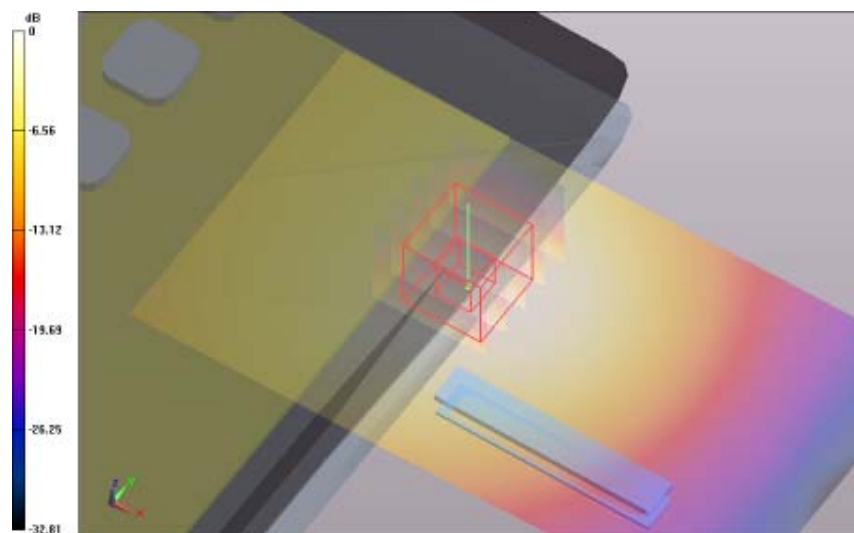


0 dB = 0.369 W/kg = -4.33 dBW/kg

SAR Measurement Plot 109



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

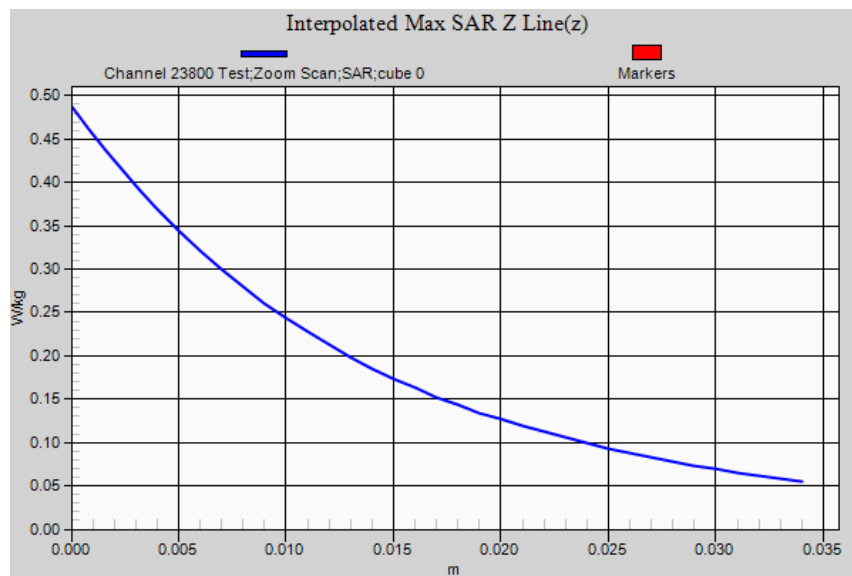

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 700 MHz LTE FCC.da52:5

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 25RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (25RB Mid) (0); Communication System Band: Band 17 E-UTRA 710; Frequency: 709.0 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=708.75$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 56.4$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 25RB 31-10-14/Channel 23780 Test/Area Scan (61x111x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.320 W/kg

Lap Held Antenna OUT 25RB 31-10-14/Channel 23780 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 15.474 V/m; **Power Drift = 0.03 dB**

Averaged SAR: SAR(1g) = 0.330 W/kg; SAR(10g) = 0.221 W/kg

Maximum value of SAR (interpolated) = 0.433 W/kg

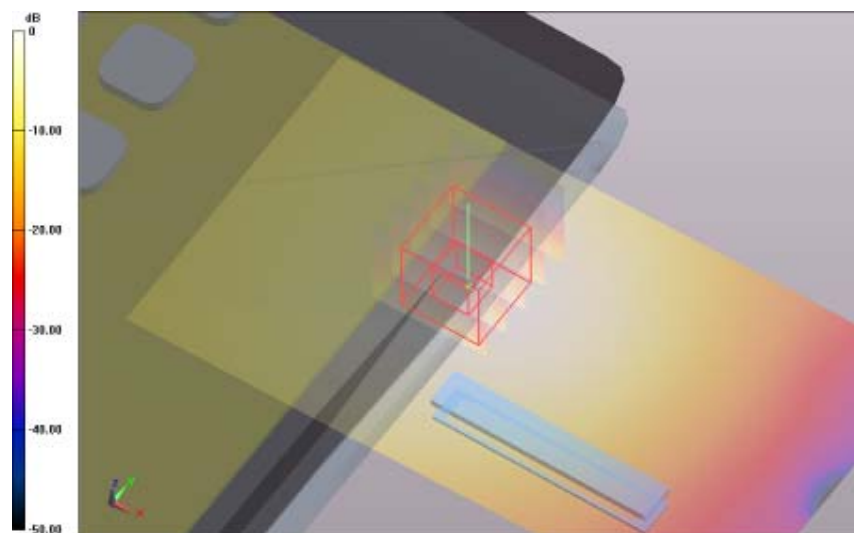


0 dB = 0.320 W/kg = -4.95 dBW/kg

SAR Measurement Plot 110



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

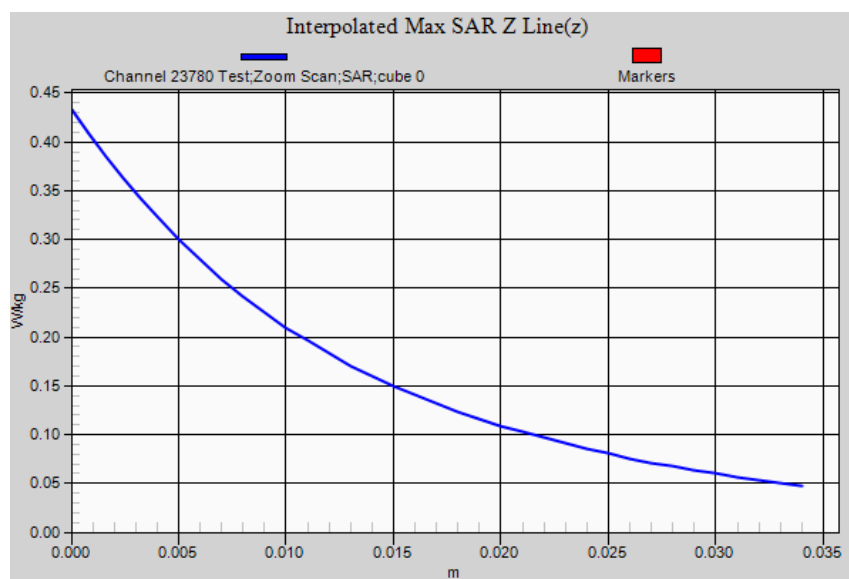

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 700 MHz LTE FCC.da52:5

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 25RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (25RB Low) (0); Communication System Band: Band 17 E-UTRA 710; Frequency: 710.0 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=710$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 56.3$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 25RB 31-10-14/Channel 23790 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.375 W/kg

Lap Held Antenna OUT 25RB 31-10-14/Channel 23790 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 15.726 V/m; **Power Drift = -0.07 dB**

Averaged SAR: SAR(1g) = 0.380 W/kg; SAR(10g) = 0.256 W/kg

Maximum value of SAR (interpolated) = 0.492 W/kg

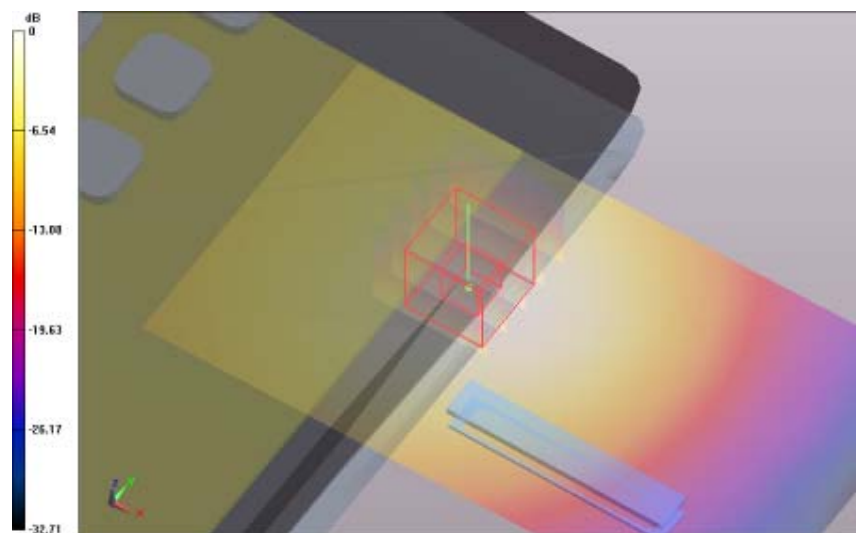


0 dB = 0.375 W/kg = -4.26 dBW/kg

SAR Measurement Plot 111



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

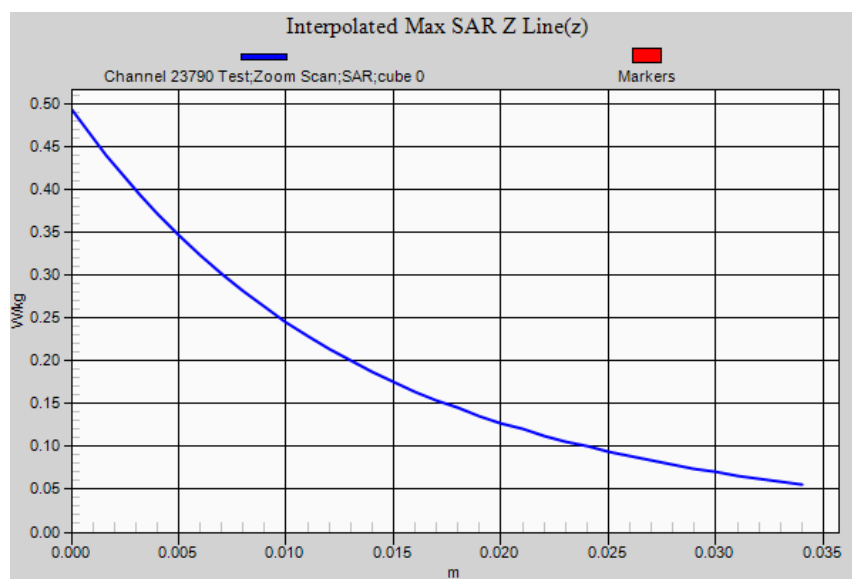

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 700 MHz LTE FCC.da52:5

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 25RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (25RB Low) (0); Communication System Band: Band 17 E-UTRA 710; Frequency: 711.0 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=711.25$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 56.3$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 25RB 31-10-14/Channel 23800 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.290 W/kg

Lap Held Antenna OUT 25RB 31-10-14/Channel 23800 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 14.921 V/m; **Power Drift = -0.07 dB**

Averaged SAR: SAR(1g) = 0.298 W/kg; SAR(10g) = 0.201 W/kg

Maximum value of SAR (interpolated) = 0.386 W/kg

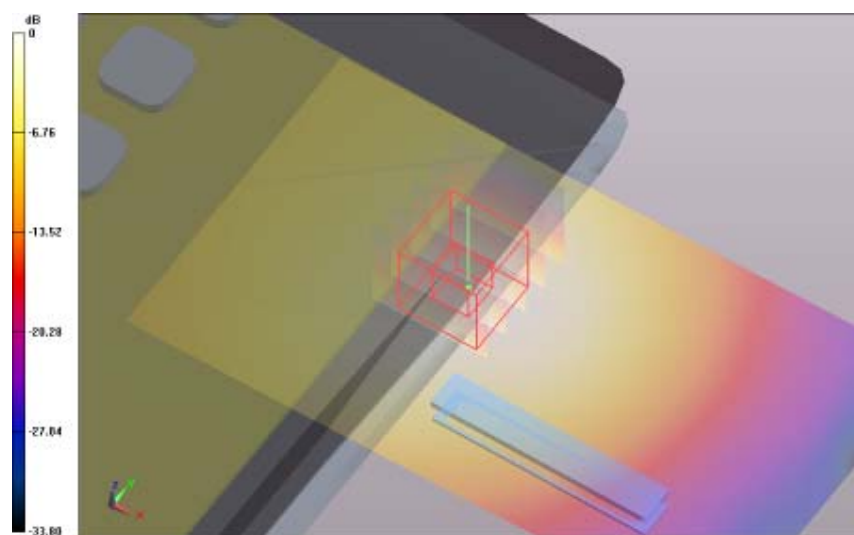


0 dB = 0.290 W/kg = -5.38 dBW/kg

SAR Measurement Plot 112



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

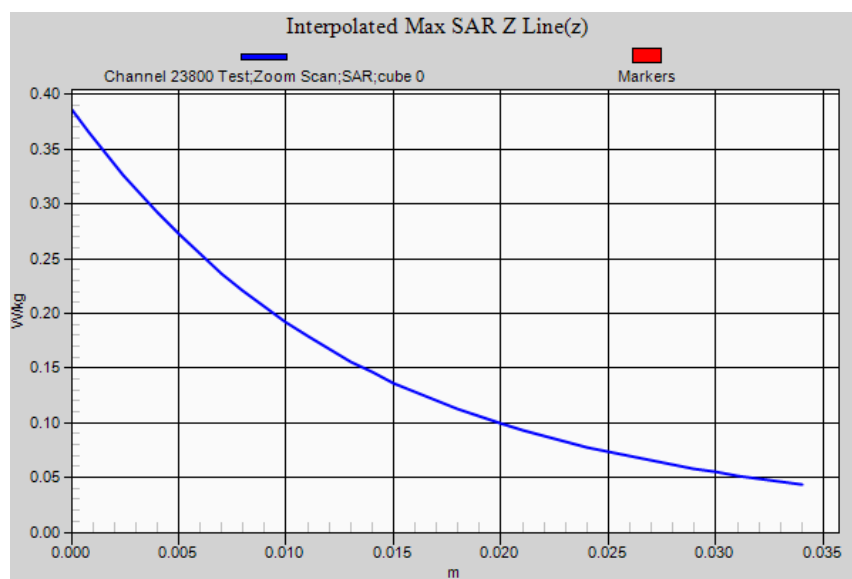

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M141025 Tablet 700 MHz LTE FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429

Configuration: Edge 2 Antenna IN 1RB 31-10-14

Communication System: 0 - LTE FDD 10MHz QPSK (1RB Mid) (0); Communication System Band: Band 17 E-UTRA 710; Frequency: 709.0 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=708.75$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 56.4$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 1RB 31-10-14/Channel 23780 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.282 W/kg

Edge 2 Antenna IN 1RB 31-10-14/Channel 23780 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 10.301 V/m; **Power Drift = 0.03 dB**

Averaged SAR: SAR(1g) = 0.279 W/kg; SAR(10g) = 0.095 W/kg

Maximum value of SAR (interpolated) = 1.180 W/kg

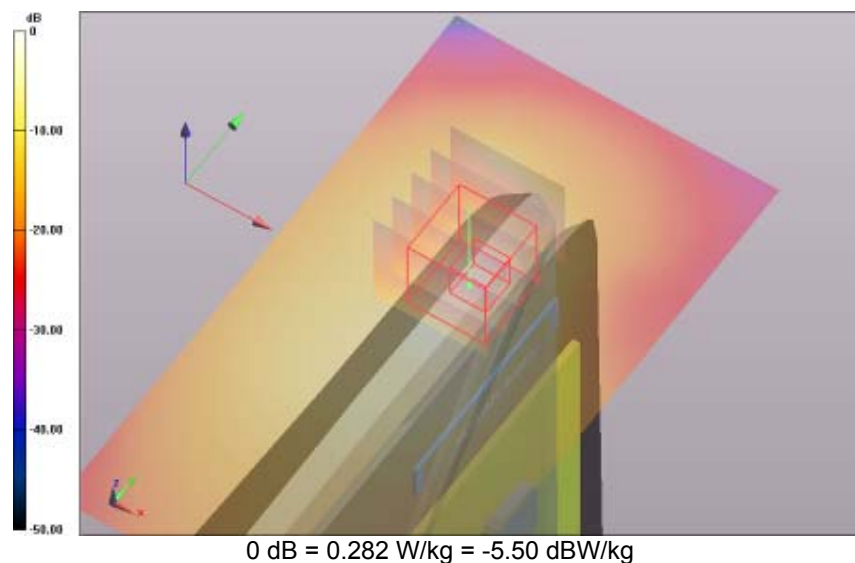


SAR Measurement Plot 113



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

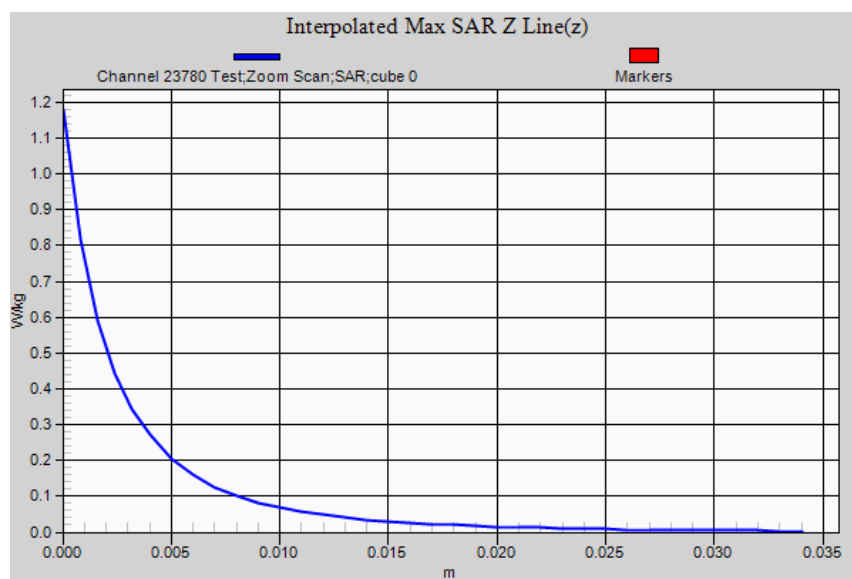

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 700 MHz LTE FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 1RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (1RB Low) (0); Communication System Band: Band 17 E-UTRA 710; Frequency: 710.0 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=710$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 56.3$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 1RB 31-10-14/Channel 23790 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.270 W/kg

Edge 2 Antenna IN 1RB 31-10-14/Channel 23790 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 10.316 V/m; **Power Drift = 0.00 dB**

Averaged SAR: SAR(1g) = 0.276 W/kg; SAR(10g) = 0.095 W/kg

Maximum value of SAR (interpolated) = 1.160 W/kg

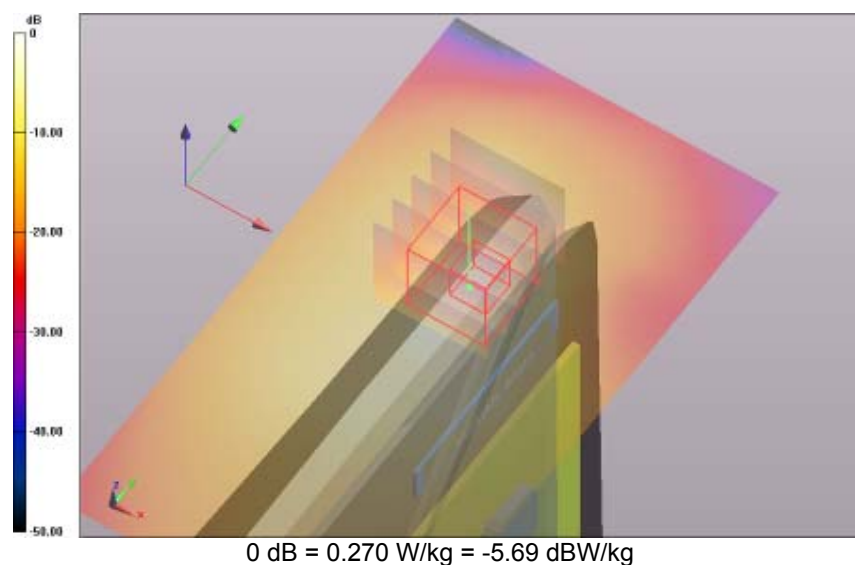


SAR Measurement Plot 114



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

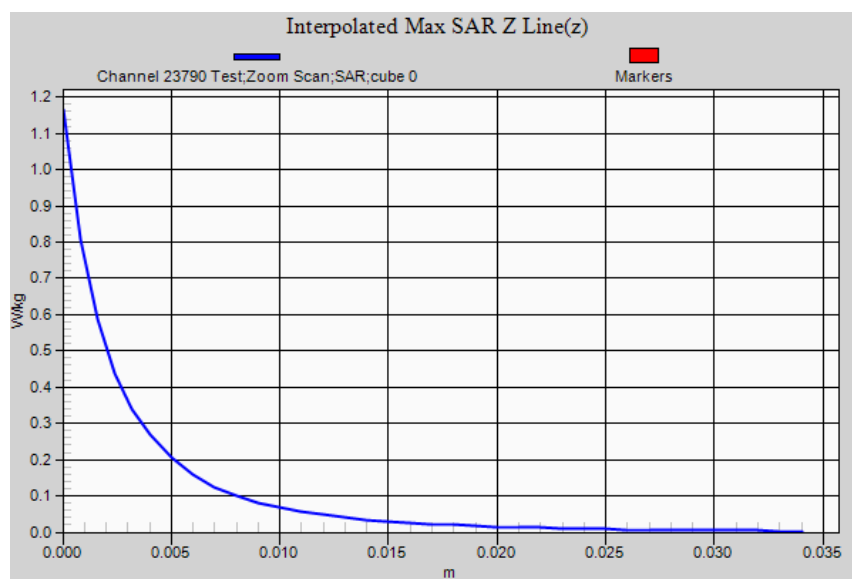

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 700 MHz LTE FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 1RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (1RB Low) (0); Communication System Band: Band 17 E-UTRA 710; Frequency: 711.0 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=711.25$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 56.3$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 1RB 31-10-14/Channel 23800 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.214 W/kg

Edge 2 Antenna IN 1RB 31-10-14/Channel 23800 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 9.165 V/m; **Power Drift = 0.10 dB**

Averaged SAR: SAR(1g) = 0.223 W/kg; SAR(10g) = 0.079 W/kg

Maximum value of SAR (interpolated) = 0.899 W/kg

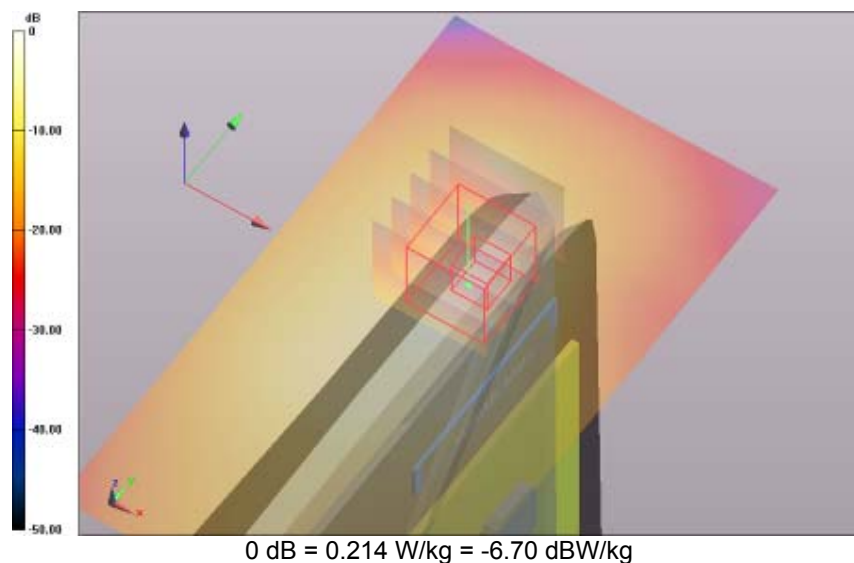


SAR Measurement Plot 115



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

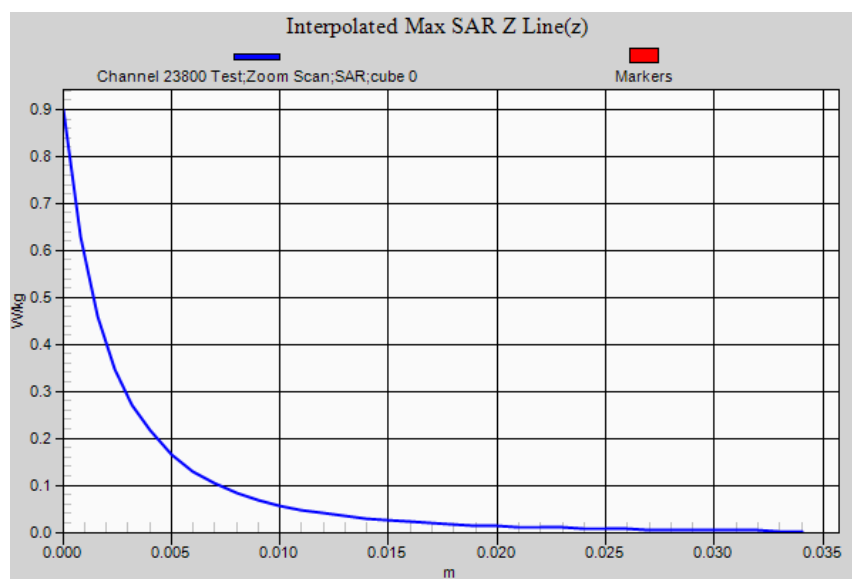

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 700 MHz LTE FCC.da52:7

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 25RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (25RB Mid) (0); Communication System Band: Band 17 E-UTRA 710; Frequency: 709.0 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=708.75$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 56.4$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 25RB 31-10-14/Channel 23780 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.221 W/kg

Edge 2 Antenna IN 25RB 31-10-14/Channel 23780 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 9.213 V/m; **Power Drift = -0.05 dB**

Averaged SAR: SAR(1g) = 0.217 W/kg; SAR(10g) = 0.074 W/kg

Maximum value of SAR (interpolated) = 0.885 W/kg

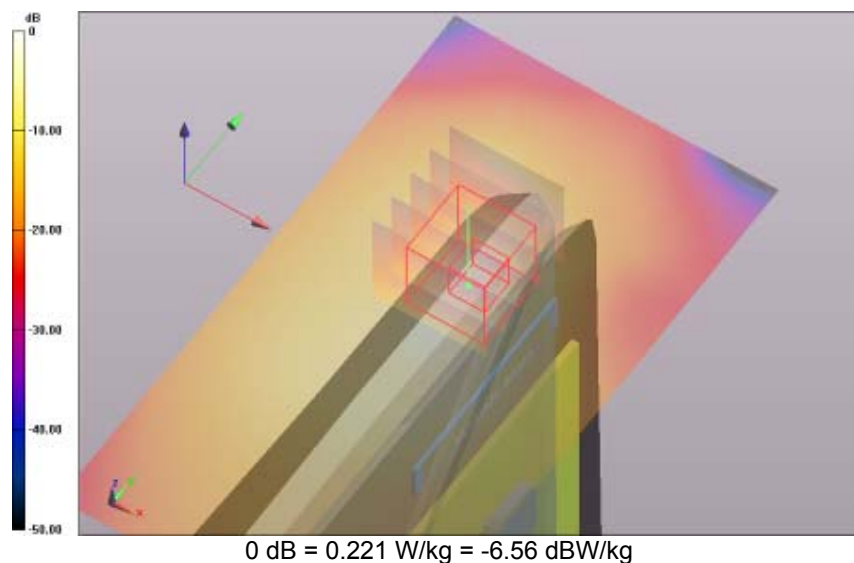


SAR Measurement Plot 116



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

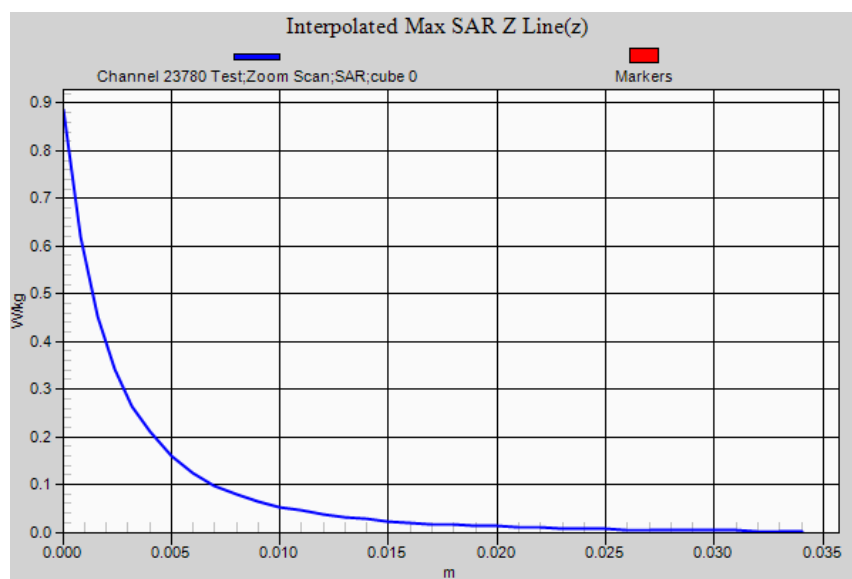

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 700 MHz LTE FCC.da52:7

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 25RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (25RB Low) (0); Communication System Band: Band 17 E-UTRA 710; Frequency: 710.0 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=710$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 56.3$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 25RB 31-10-14/Channel 23790 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.214 W/kg

Edge 2 Antenna IN 25RB 31-10-14/Channel 23790 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 9.212 V/m; **Power Drift = 0.06 dB**

Averaged SAR: SAR(1g) = 0.216 W/kg; SAR(10g) = 0.075 W/kg

Maximum value of SAR (interpolated) = 0.896 W/kg

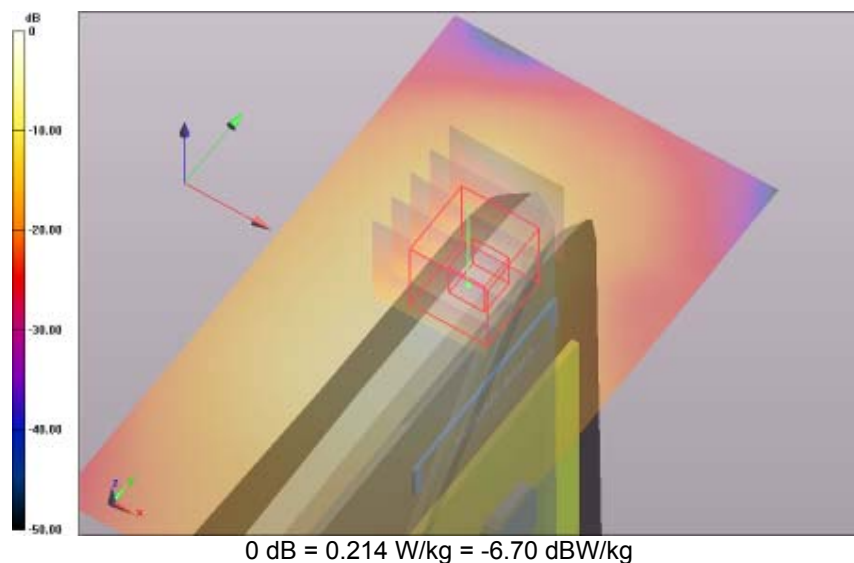


SAR Measurement Plot 117



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

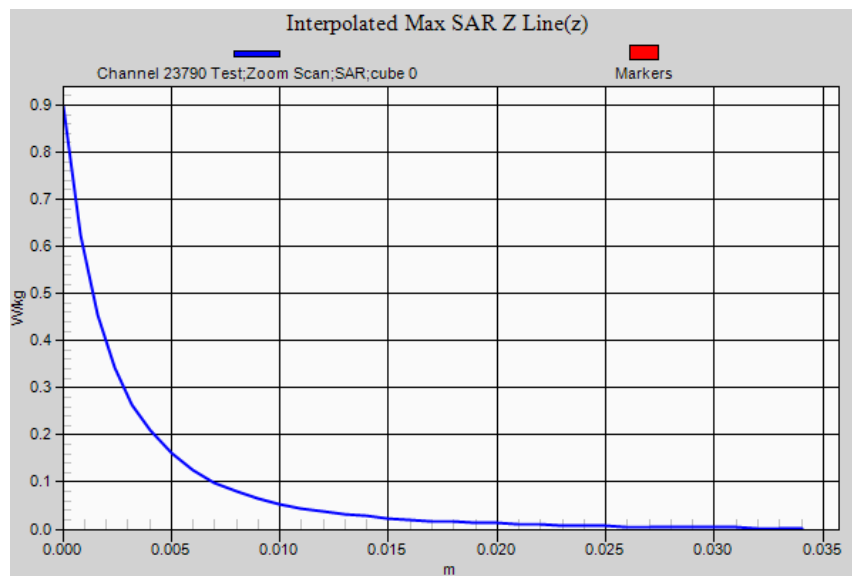

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 700 MHz LTE FCC.da52:7

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 25RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (25RB Low) (0); Communication System Band: Band 17 E-UTRA 710; Frequency: 711.0 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=711.25$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 56.3$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 25RB 31-10-14/Channel 23800 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.168 W/kg

Edge 2 Antenna IN 25RB 31-10-14/Channel 23800 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 8.146 V/m; **Power Drift = -0.07 dB**

Averaged SAR: SAR(1g) = 0.171 W/kg; SAR(10g) = 0.061 W/kg

Maximum value of SAR (interpolated) = 0.665 W/kg

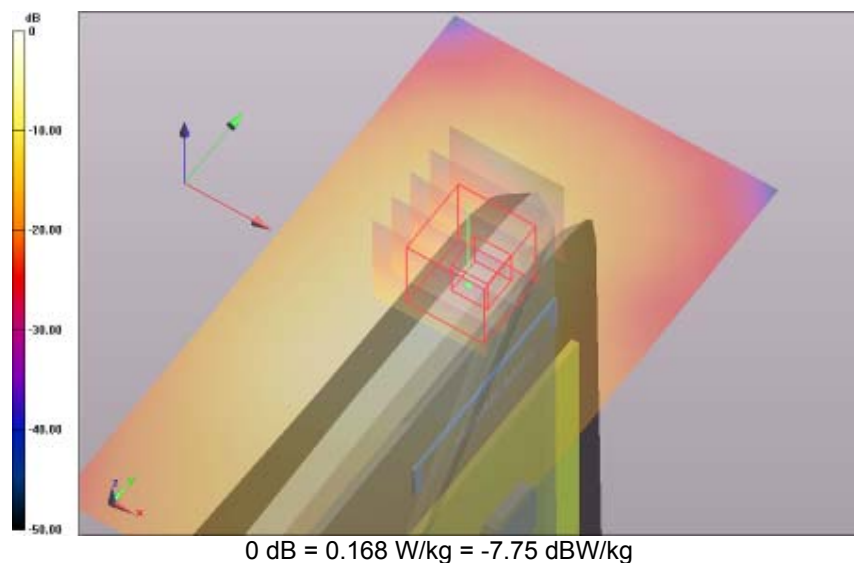


SAR Measurement Plot 118



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

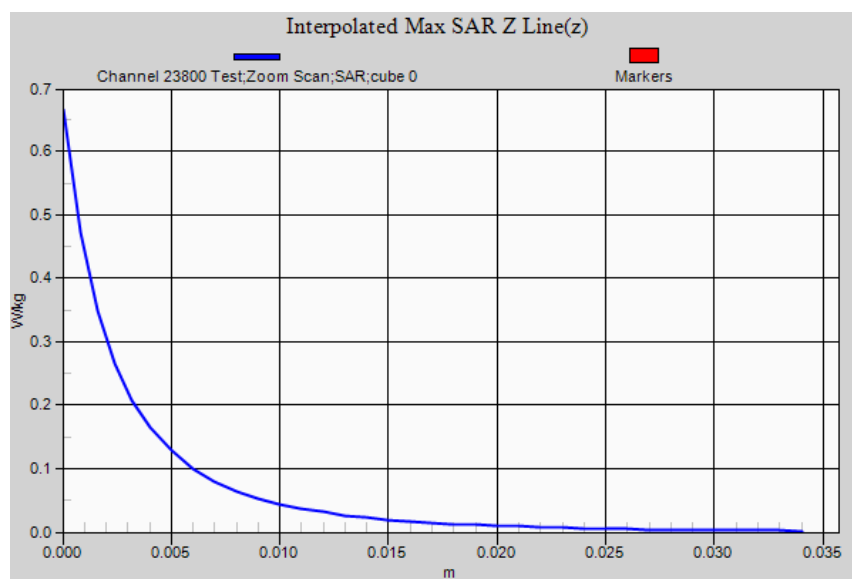

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 700 MHz LTE FCC.da52:9

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 1RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (1RB Mid) (0); Communication System Band: Band 17 E-UTRA 710; Frequency: 709.0 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=708.75$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 56.4$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 1RB 31-10-14/Channel 23780 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.107 W/kg


Edge 3 Antenna OUT 1RB 31-10-14/Channel 23780 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 6.412 V/m; **Power Drift = 0.04 dB**

Averaged SAR: SAR(1g) = 0.119 W/kg; SAR(10g) = 0.075 W/kg

Maximum value of SAR (interpolated) = 0.176 W/kg

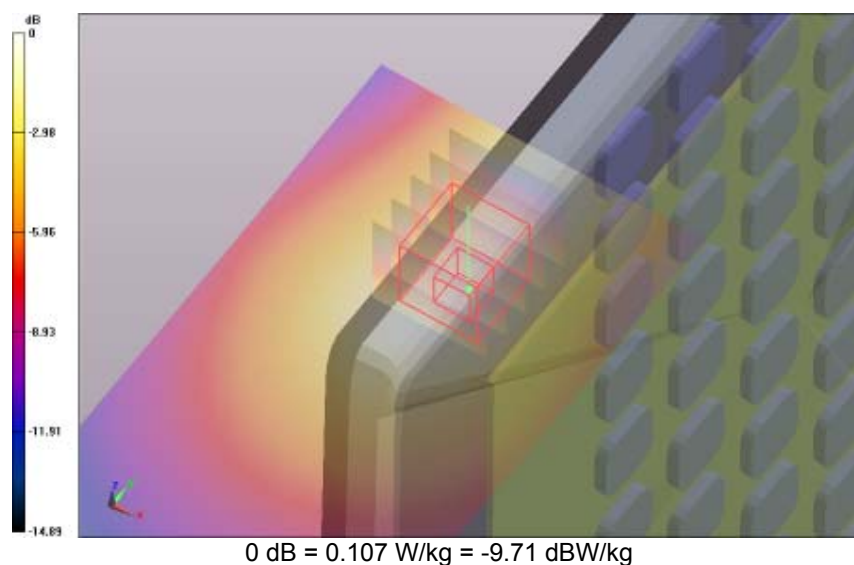

SAR Measurement Plot 119

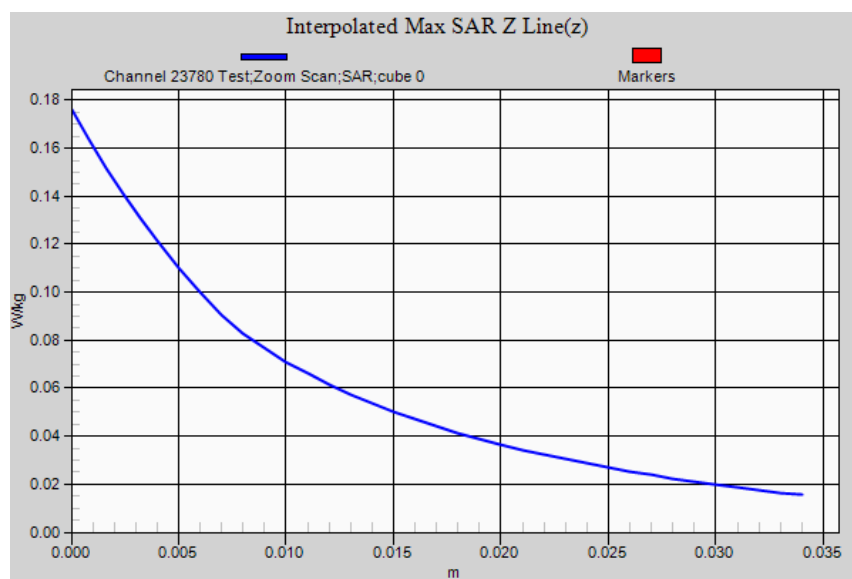

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 700 MHz LTE FCC.da52:9

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 1RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (1RB Low) (0); Communication System Band: Band 17 E-UTRA 710; Frequency: 710.0 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=710$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 56.3$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 1RB 31-10-14/Channel 23790 Test/Area Scan (111x61x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.109 W/kg

Edge 3 Antenna OUT 1RB 31-10-14/Channel 23790 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 6.527 V/m; **Power Drift = 0.03 dB**

Averaged SAR: SAR(1g) = 0.123 W/kg; SAR(10g) = 0.078 W/kg

Maximum value of SAR (interpolated) = 0.182 W/kg

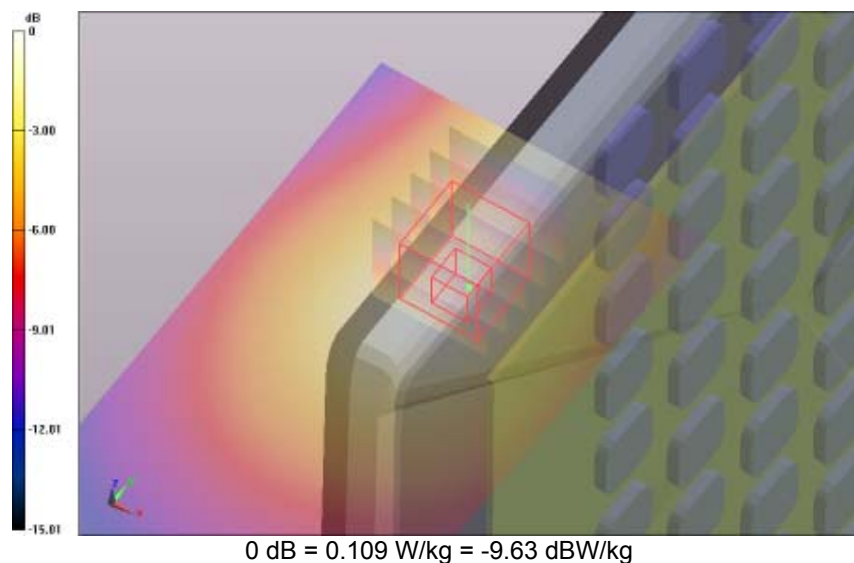


SAR Measurement Plot 120



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

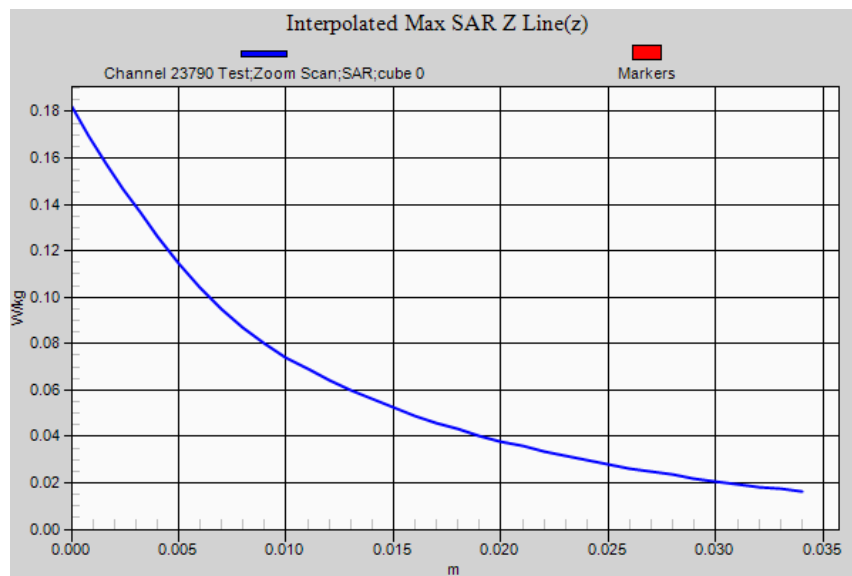

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 700 MHz LTE FCC.da52:9

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 1RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (1RB Low) (0); Communication System Band: Band 17 E-UTRA 710; Frequency: 711.0 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=711.25$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 56.3$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 1RB 31-10-14/Channel 23800 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.114 W/kg

Edge 3 Antenna OUT 1RB 31-10-14/Channel 23800 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 6.655 V/m; **Power Drift = 0.05 dB**

Averaged SAR: SAR(1g) = 0.131 W/kg; SAR(10g) = 0.082 W/kg

Maximum value of SAR (interpolated) = 0.195 W/kg

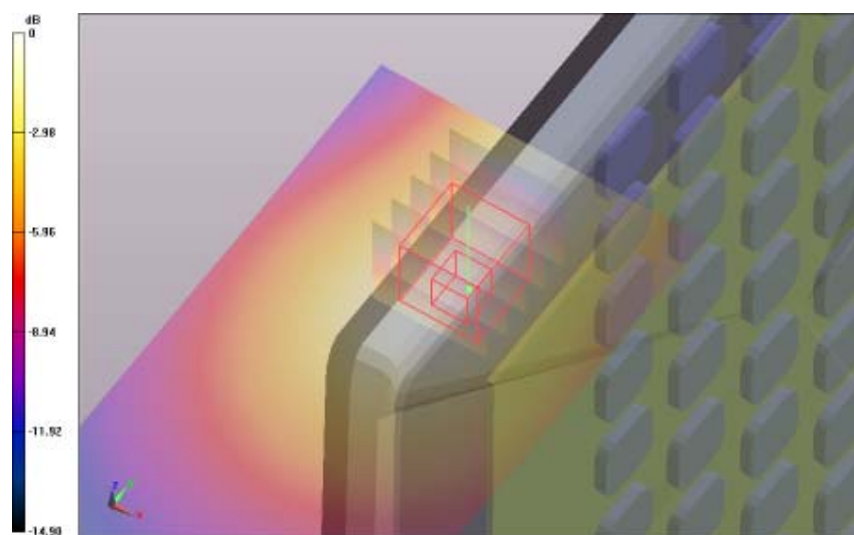


0 dB = 0.114 W/kg = -9.43 dBW/kg

SAR Measurement Plot 121



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

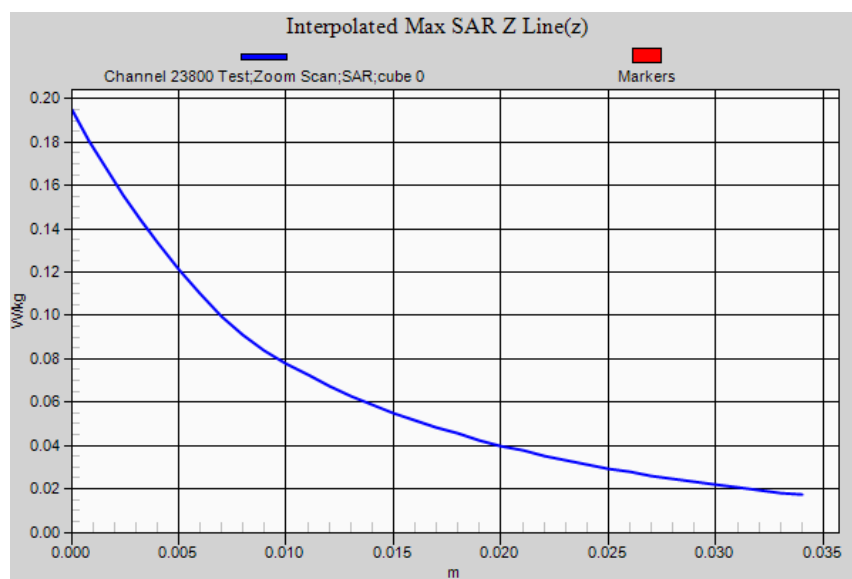

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 700 MHz LTE FCC.da52:10

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 25RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (25RB Mid) (0); Communication System Band: Band 17 E-UTRA 710; Frequency: 709.0 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=708.75$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 56.4$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 25RB 31-10-14/Channel 23780 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.094 W/kg

Edge 3 Antenna OUT 25RB 31-10-14/Channel 23780 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 6.028 V/m; **Power Drift = 0.05 dB**

Averaged SAR: SAR(1g) = 0.106 W/kg; SAR(10g) = 0.067 W/kg

Maximum value of SAR (interpolated) = 0.157 W/kg

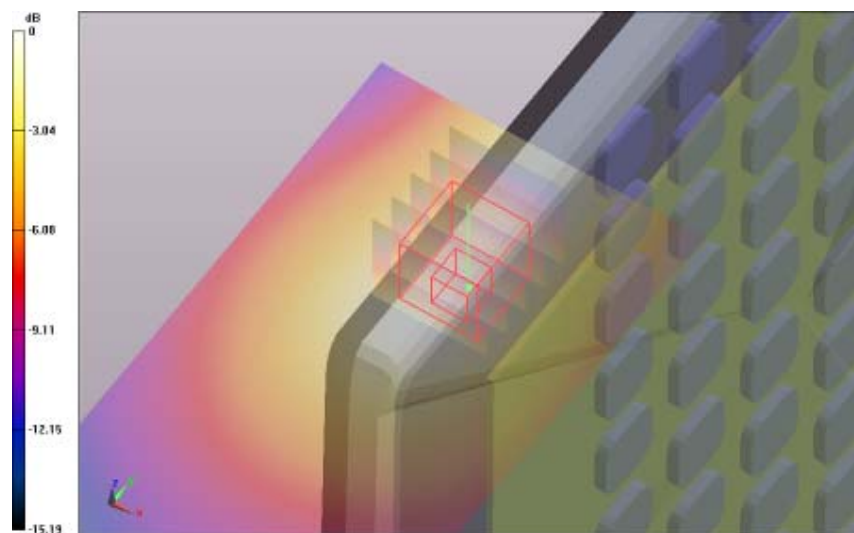


0 dB = 0.0937 W/kg = -10.28 dBW/kg

SAR Measurement Plot 122



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

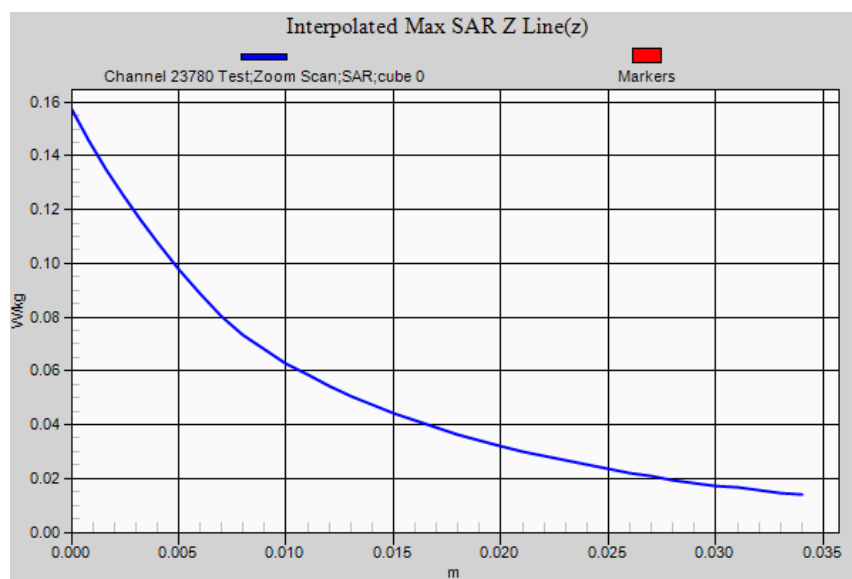

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 700 MHz LTE FCC.da52:10

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 25RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (25RB Low) (0); Communication System Band: Band 17 E-UTRA 710; Frequency: 710.0 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=710$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 56.3$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 25RB 31-10-14/Channel 23790 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.090 W/kg

Edge 3 Antenna OUT 25RB 31-10-14/Channel 23790 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 5.963 V/m; **Power Drift = -0.02 dB**

Averaged SAR: SAR(1g) = 0.103 W/kg; SAR(10g) = 0.065 W/kg

Maximum value of SAR (interpolated) = 0.154 W/kg

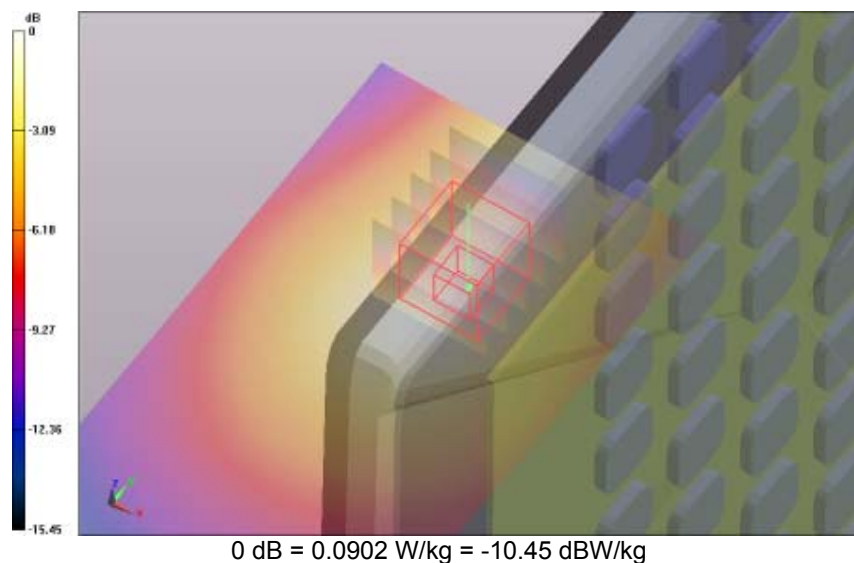


SAR Measurement Plot 123



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

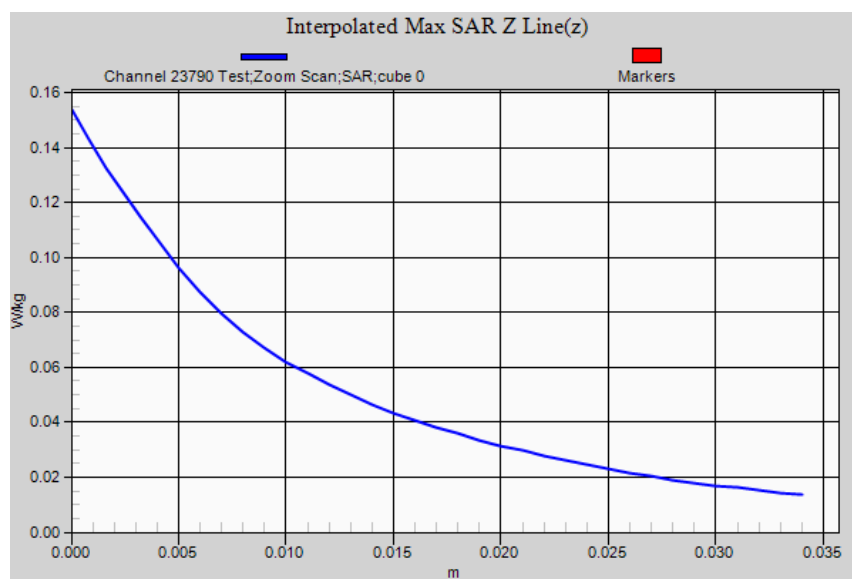

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 700 MHz LTE FCC.da52:10

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 25RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (25RB Low) (0); Communication System Band: Band 17 E-UTRA 710; Frequency: 711.0 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=711.25$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 56.3$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 25RB 31-10-14/Channel 23800 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.094 W/kg

Edge 3 Antenna OUT 25RB 31-10-14/Channel 23800 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 6.010 V/m; **Power Drift = 0.07 dB**

Averaged SAR: SAR(1g) = 0.107 W/kg; SAR(10g) = 0.067 W/kg

Maximum value of SAR (interpolated) = 0.160 W/kg

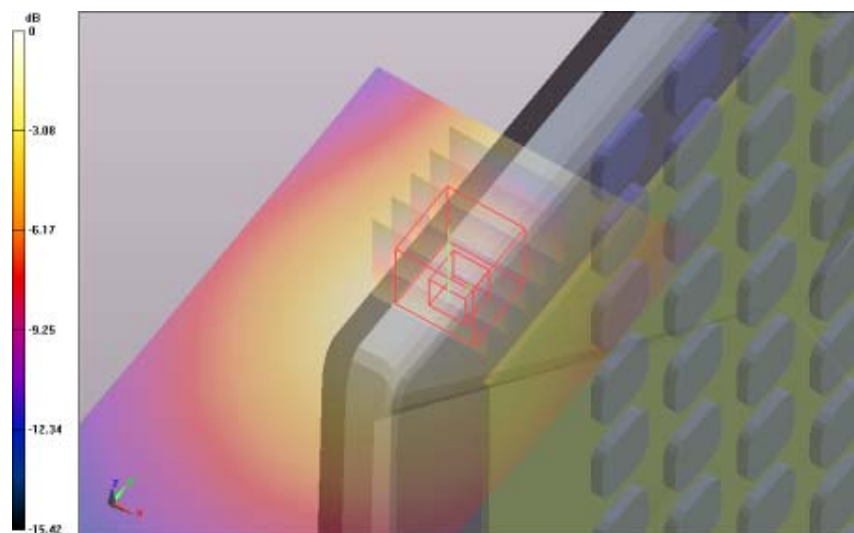


0 dB = 0.0937 W/kg = -10.28 dBW/kg

SAR Measurement Plot 124



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

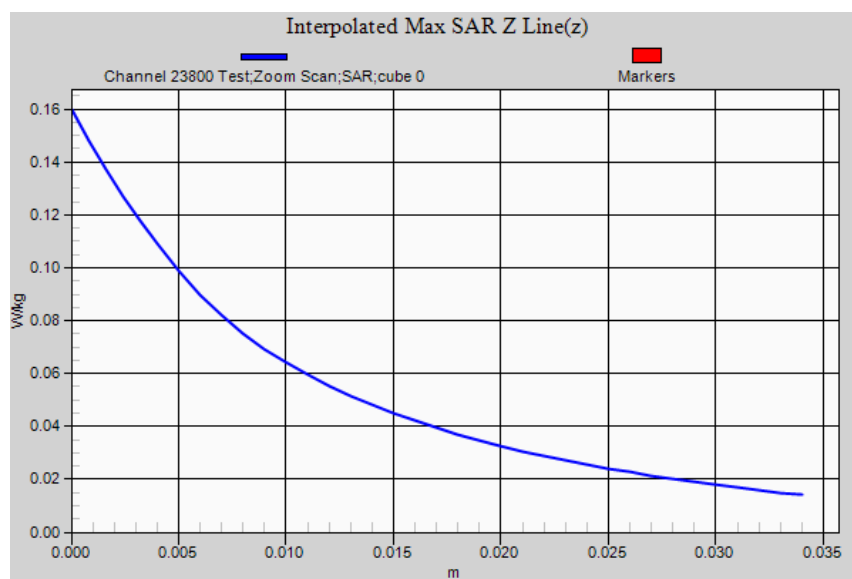

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 750 MHz LTE FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 1RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (1RB Mid) (0); Communication System Band: Band 13 E-UTRA 780; Frequency: 782.0 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=781.875$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 55.5$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 10/12/2013

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 1RB 31-10-14/Channel 23230 Test/Area Scan (61x111x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.293 W/kg**Bystander 25mm Spacing Antenna OUT 1RB 31-10-14/Channel 23230 Test/Zoom Scan (21x21x36)/Cube 0:**Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 16.417 V/m; Power Drift = -0.06 dB**Averaged SAR: SAR(1g) = 0.282 W/kg; SAR(10g) = 0.199 W/kg**

Maximum value of SAR (interpolated) = 0.362 W/kg

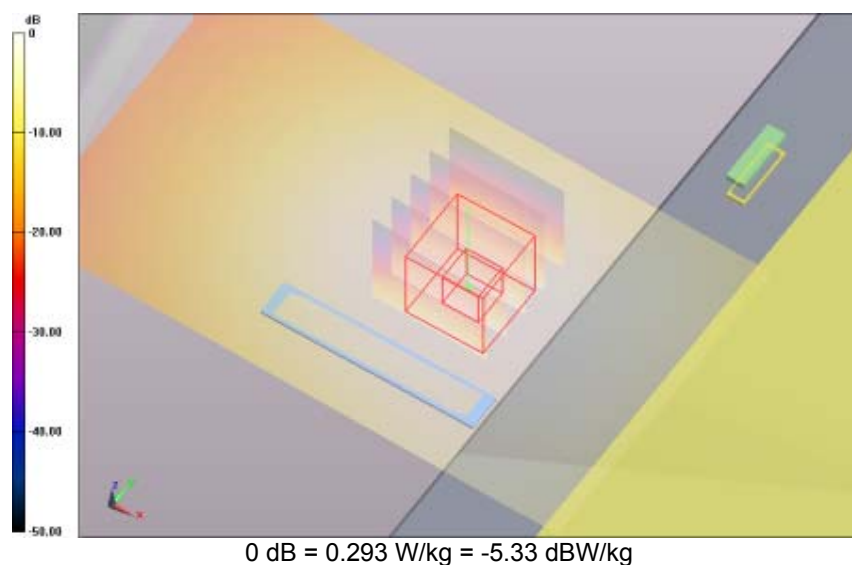


SAR Measurement Plot 125



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

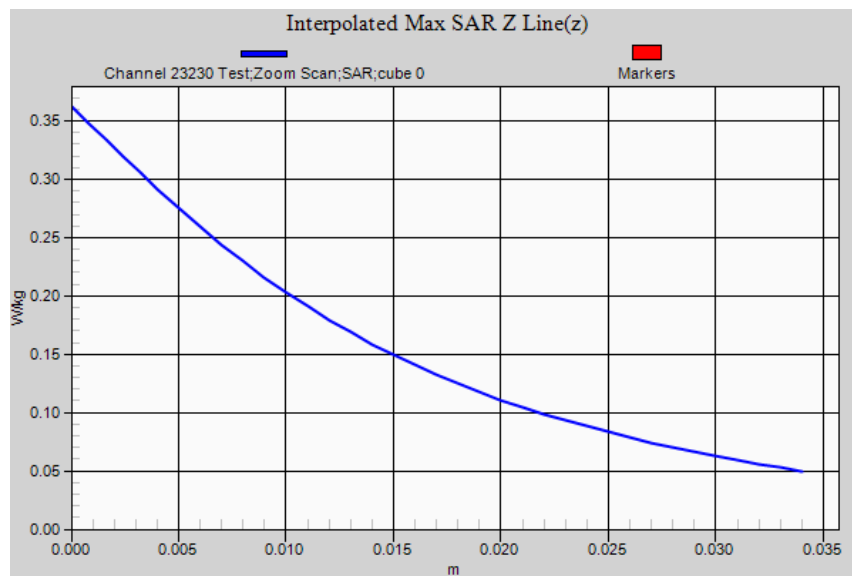

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 750 MHz LTE FCC.da52:2

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 25RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (25RB Mid) (0); Communication System Band: Band 13 E-UTRA 780; Frequency: 782.0 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=781.875$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 55.5$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 25RB 31-10-14/Channel 23230 Test/Area Scan (61x111x1):


Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.222 W/kg

Bystander 25mm Spacing Antenna OUT 25RB 31-10-14/Channel 23230 Test/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 14.175 V/m; Power Drift = -0.01 dB

Averaged SAR: SAR(1g) = 0.214 W/kg; SAR(10g) = 0.151 W/kg

Maximum value of SAR (interpolated) = 0.273 W/kg

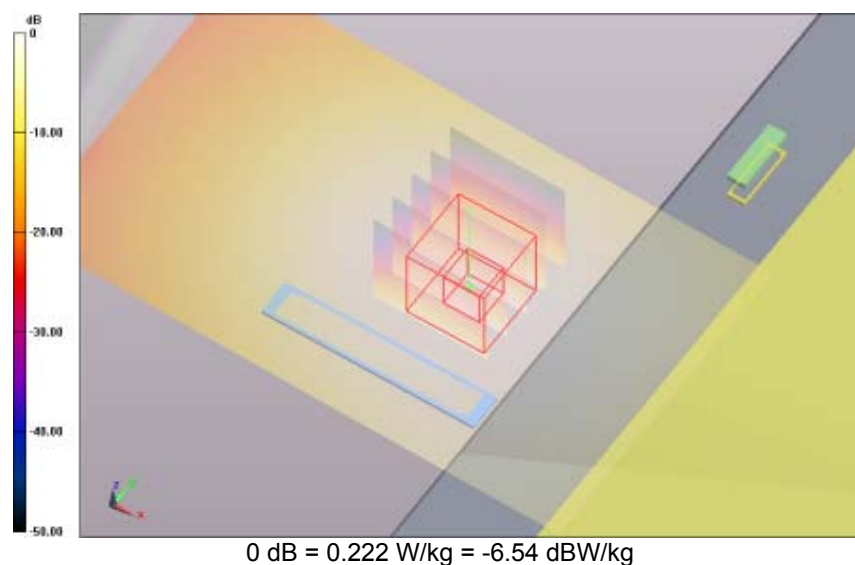


SAR Measurement Plot 126



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

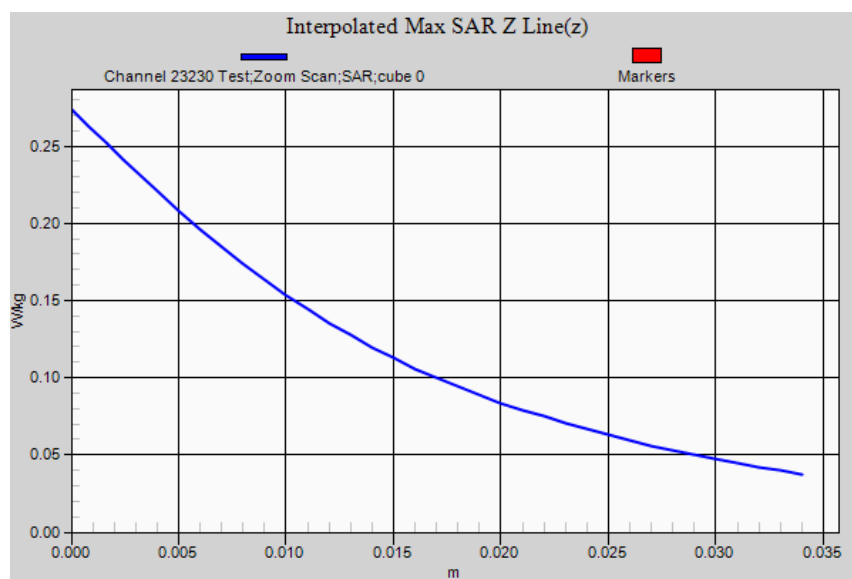

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 750 MHz LTE FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 1RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (1RB Mid) (0); Communication System Band: Band 13 E-UTRA 780; Frequency: 782.0 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=781.875$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 55.5$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 1RB 31-10-14/Channel 23230 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.589 W/kg

Lap Held Antenna OUT 1RB 31-10-14/Channel 23230 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 25.351 V/m; **Power Drift = -0.16 dB**

Averaged SAR: SAR(1g) = 0.555 W/kg; SAR(10g) = 0.372 W/kg

Maximum value of SAR (interpolated) = 0.763 W/kg

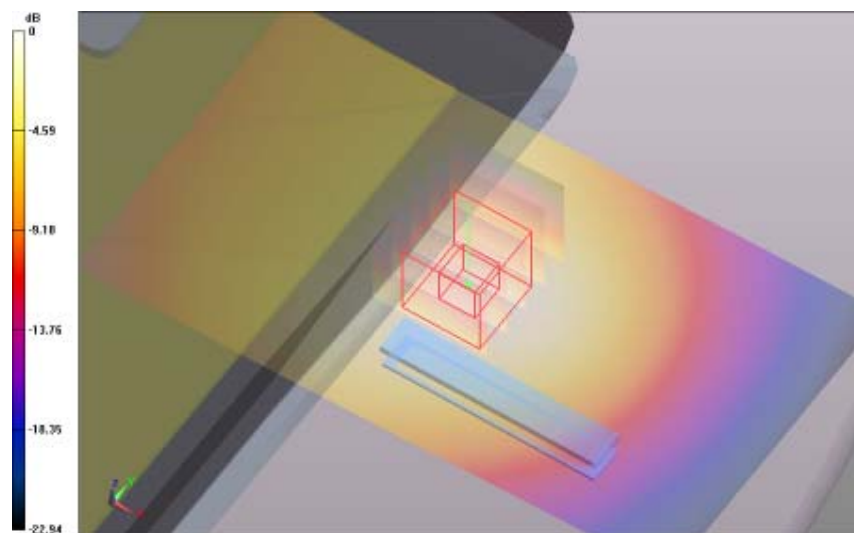


0 dB = 0.589 W/kg = -2.30 dBW/kg

SAR Measurement Plot 127



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

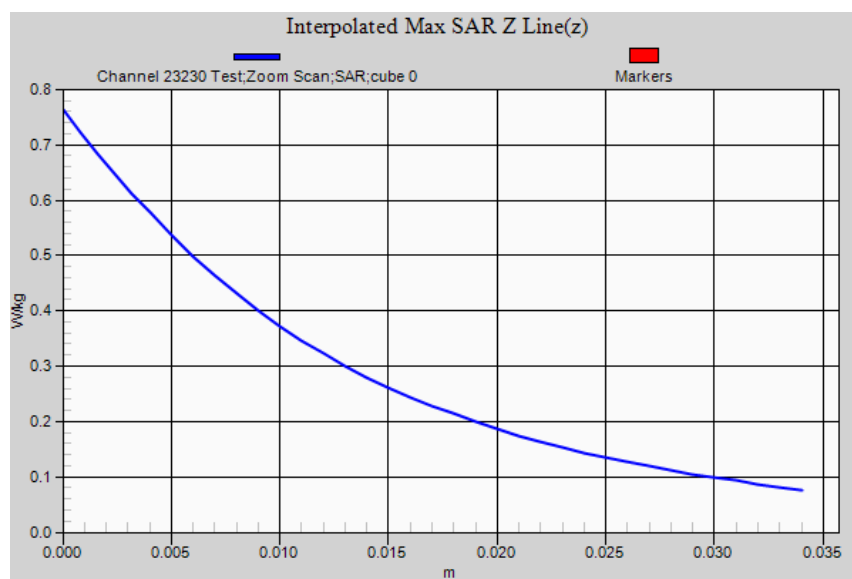

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 750 MHz LTE FCC.da52:5

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 25RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (25RB Mid) (0); Communication System Band: Band 13 E-UTRA 780; Frequency: 782.0 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=781.875$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 55.5$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 25RB 31-10-14/Channel 23230 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.443 W/kg

Lap Held Antenna OUT 25RB 31-10-14/Channel 23230 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 21.913 V/m; **Power Drift = -0.03 dB**

Averaged SAR: SAR(1g) = 0.425 W/kg; SAR(10g) = 0.285 W/kg

Maximum value of SAR (interpolated) = 0.586 W/kg

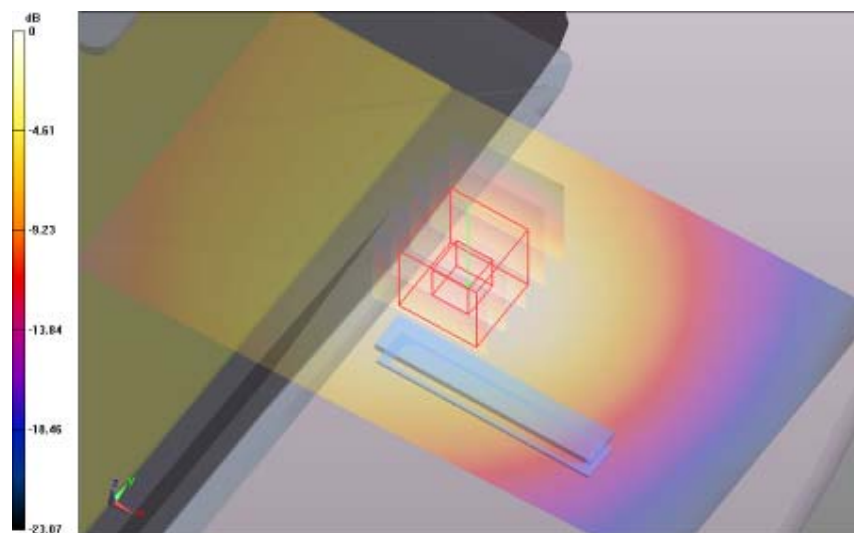


0 dB = 0.443 W/kg = -3.54 dBW/kg

SAR Measurement Plot 128



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

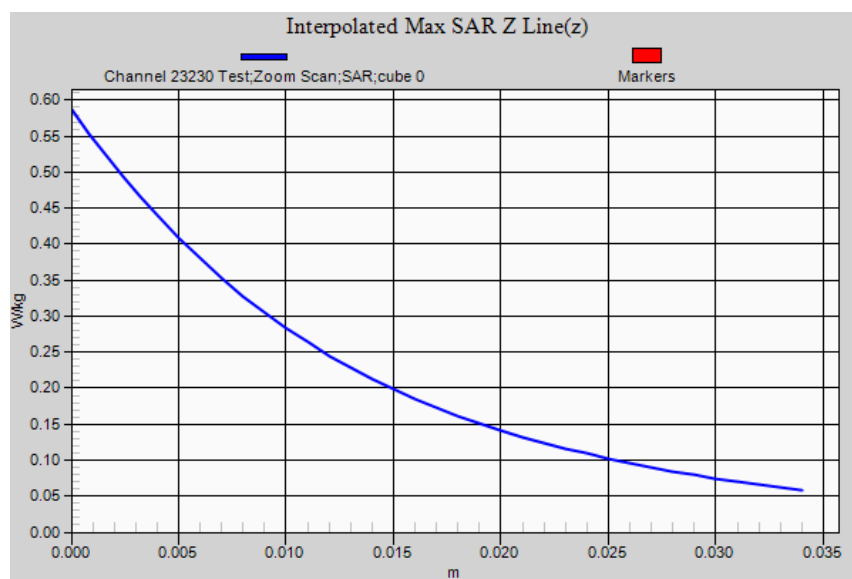

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 750 MHz LTE FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 1RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (1RB Mid) (0); Communication System Band: Band 13 E-UTRA 780; Frequency: 782.0 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=781.875$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 55.5$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 1RB 31-10-14/Channel 23230 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.326 W/kg

Edge 2 Antenna IN 1RB 31-10-14/Channel 23230 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 13.889 V/m; **Power Drift = -0.08 dB**

Averaged SAR: SAR(1g) = 0.295 W/kg; SAR(10g) = 0.102 W/kg

Maximum value of SAR (interpolated) = 1.250 W/kg

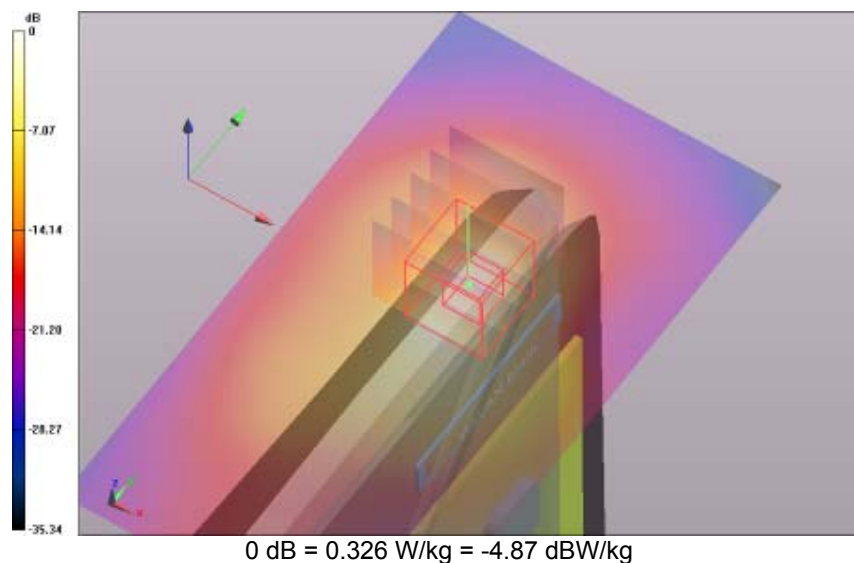


SAR Measurement Plot 129



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

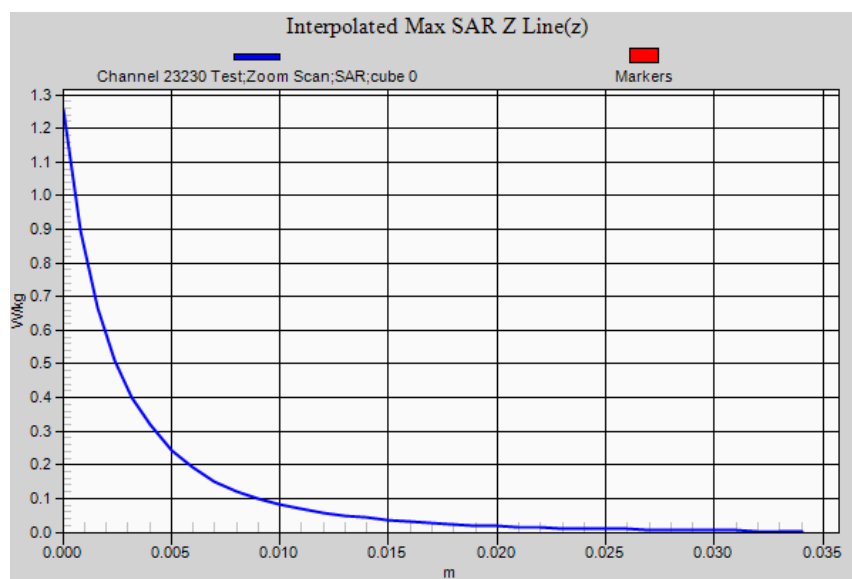

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 750 MHz LTE FCC.da52:7

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 25RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (25RB Mid) (0); Communication System Band: Band 13 E-UTRA 780; Frequency: 782.0 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=781.875$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 55.5$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 25RB 31-10-14/Channel 23230 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.238 W/kg

Edge 2 Antenna IN 25RB 31-10-14/Channel 23230 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 11.979 V/m; **Power Drift = -0.03 dB**

Averaged SAR: SAR(1g) = 0.221 W/kg; SAR(10g) = 0.077 W/kg

Maximum value of SAR (interpolated) = 0.928 W/kg

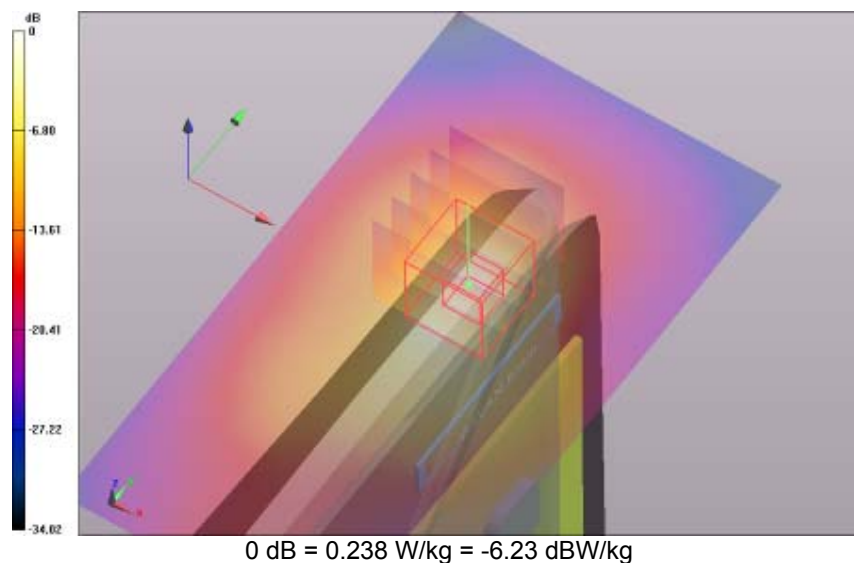


0 dB = 0.238 W/kg = -6.23 dBW/kg

SAR Measurement Plot 130



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

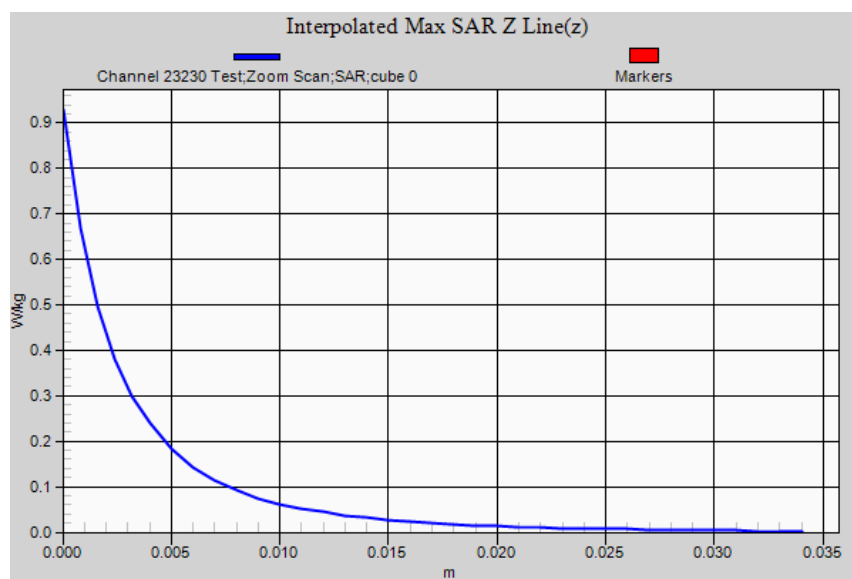

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 750 MHz LTE FCC.da52:9

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 1RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (1RB Mid) (0); Communication System Band: Band 13 E-UTRA 780; Frequency: 782.0 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=781.875$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 55.5$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 1RB 31-10-14/Channel 23230 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.079 W/kg

Edge 3 Antenna OUT 1RB 31-10-14/Channel 23230 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 5.667 V/m; **Power Drift = -0.05 dB**


Averaged SAR: SAR(1g) = 0.079 W/kg; SAR(10g) = 0.053 W/kg

Maximum value of SAR (interpolated) = 0.118 W/kg

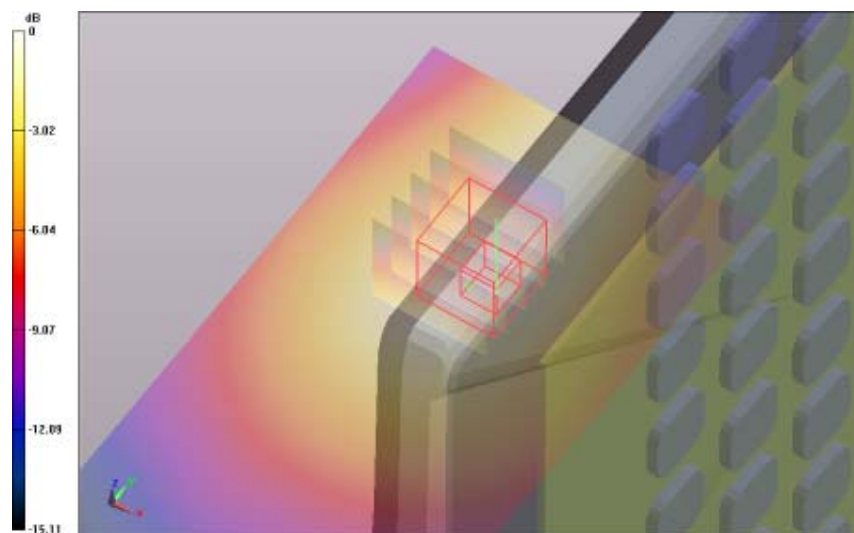

0 dB = 0.0790 W/kg = -11.02 dBW/kg

SAR Measurement Plot 131

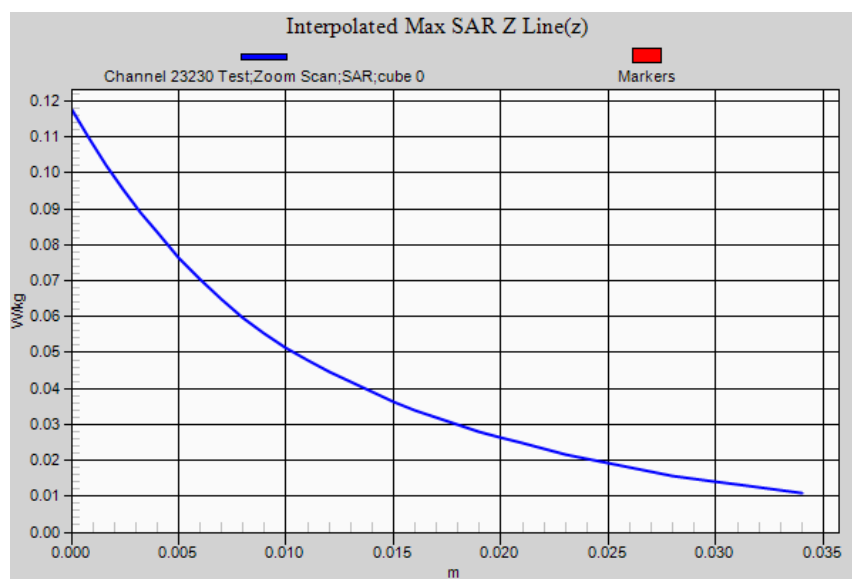

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 750 MHz LTE FCC.da52:10

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 25RB 31-10-14**

Communication System: 0 - LTE FDD 10MHz QPSK (25RB Mid) (0); Communication System Band: Band 13 E-UTRA 780; Frequency: 782.0 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=781.875$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 55.5$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 25RB 31-10-14/Channel 23230 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.060 W/kg

Edge 3 Antenna OUT 25RB 31-10-14/Channel 23230 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 4.963 V/m; **Power Drift = -0.14 dB**

Averaged SAR: SAR(1g) = 0.061 W/kg; SAR(10g) = 0.040 W/kg

Maximum value of SAR (interpolated) = 0.089 W/kg

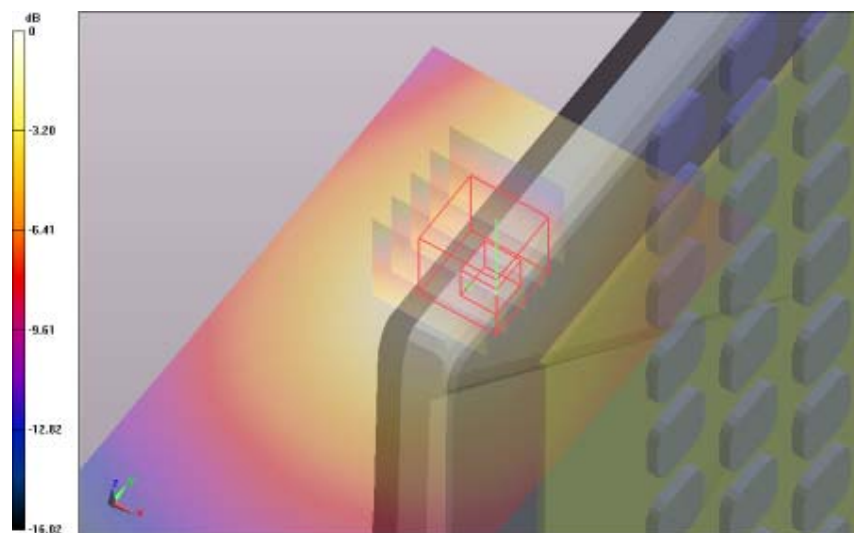


0 dB = 0.0603 W/kg = -12.20 dBW/kg

SAR Measurement Plot 132



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

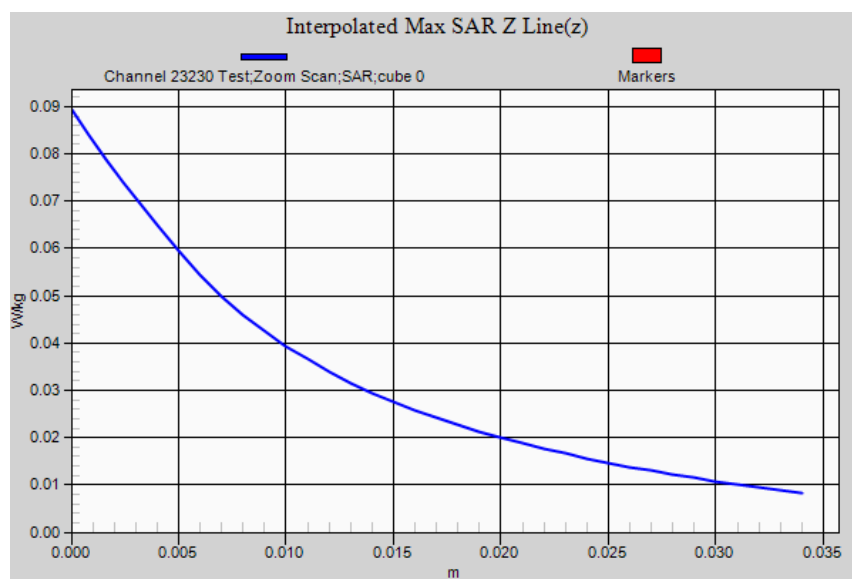

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 750 MHz LTE FCC.da52:11

DUT Name: Dipole 750 MHz, Type: D750V3, Serial: D750V3 - SN:1051**Configuration: System Check 31-10--14**

Communication System: 0 - CW (0); Communication System Band: 750 MHz; Frequency: 750.0 MHz;

Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=750$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.8$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.01,6.01,6.01); Calibrated: 13/12/2013;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 10/12/2013

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

System Check 31-10--14/Channel 1 Test/Area Scan (51x51x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm;
Maximum value of SAR (interpolated) = 2.160 W/kg**System Check 31-10--14/Channel 1 Test/Zoom Scan (31x31x36)/Cube 0:** Interpolated grid: dx=1.0 mm, dy=1.0 mm, dz=1.0 mm; Reference Value = 49.112 V/m; **Power Drift = -0.03 dB****Averaged SAR: SAR(1g) = 2.010 W/kg; SAR(10g) = 1.340 W/kg**

Maximum value of SAR (interpolated) = 2.890 W/kg

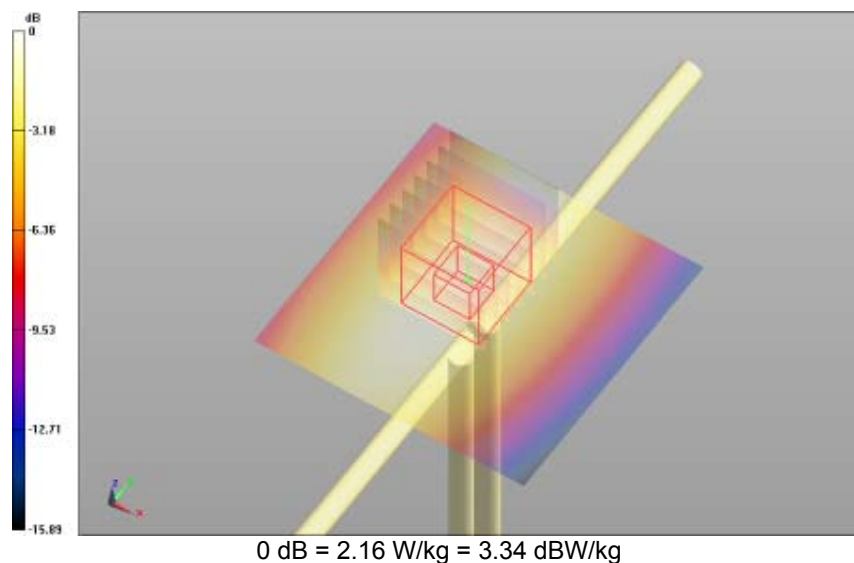


SAR Measurement Plot 133



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

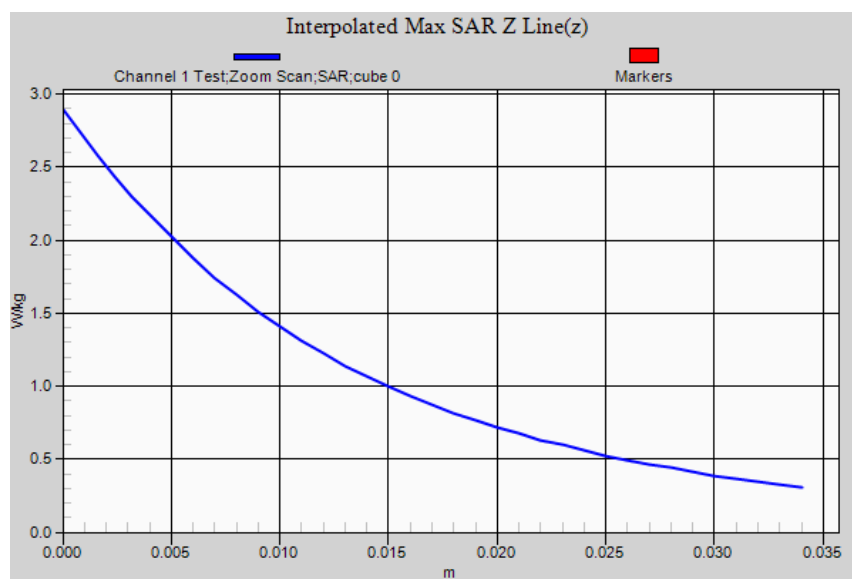

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz LTE FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 1RB 21-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (1RB High) (0); Communication System Band: Band 4 E-

UTRA 1700; Frequency: 1720 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=1720$ MHz; $\sigma = 1.50$ S/m; $\epsilon_r = 51.1$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 10/12/2013

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 1RB 21-11-14/Channel 20050 Test/Area Scan (81x101x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.171 W/kg**Bystander 25mm Spacing Antenna OUT 1RB 21-11-14/Channel 20050 Test/Zoom Scan (21x21x36)/Cube 0:**Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 7.589 V/m; Power Drift = -0.13 dB**Averaged SAR: SAR(1g) = 0.161 W/kg; SAR(10g) = 0.107 W/kg**

Maximum value of SAR (interpolated) = 0.214 W/kg

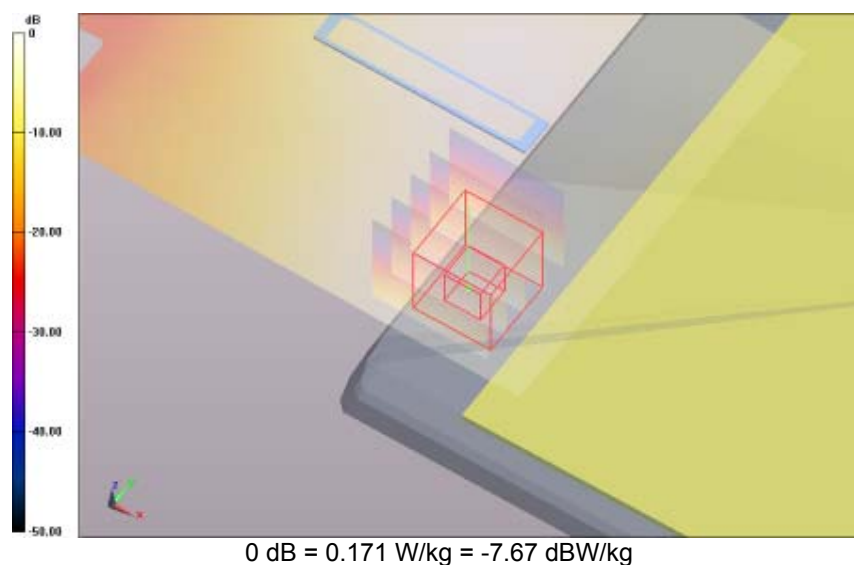


SAR Measurement Plot 134



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

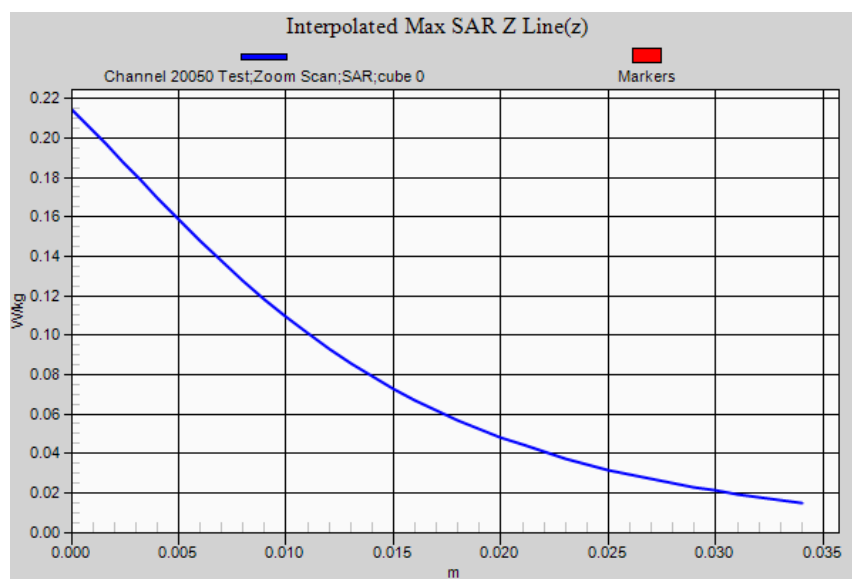

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz LTE FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 1RB 21-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (1RB High) (0); Communication System Band: Band 4 E-UTRA 1700; Frequency: 1733 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1732.5$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 51.1$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)


Bystander 25mm Spacing Antenna OUT 1RB 21-11-14/Channel 20175 Test/Area Scan (81x101x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.180 W/kg

Bystander 25mm Spacing Antenna OUT 1RB 21-11-14/Channel 20175 Test/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 8.911 V/m; **Power Drift = -0.03 dB**

Averaged SAR: SAR(1g) = 0.170 W/kg; SAR(10g) = 0.114 W/kg

Maximum value of SAR (interpolated) = 0.228 W/kg

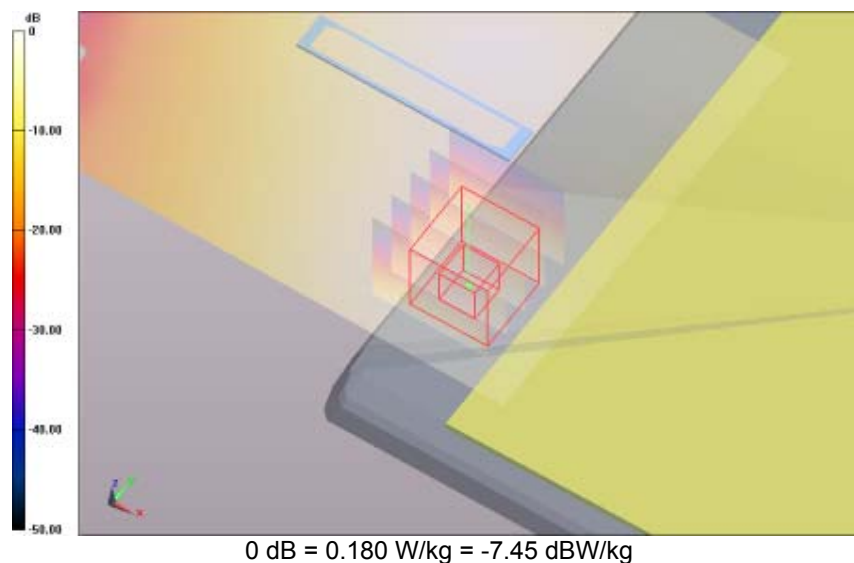


SAR Measurement Plot 135



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

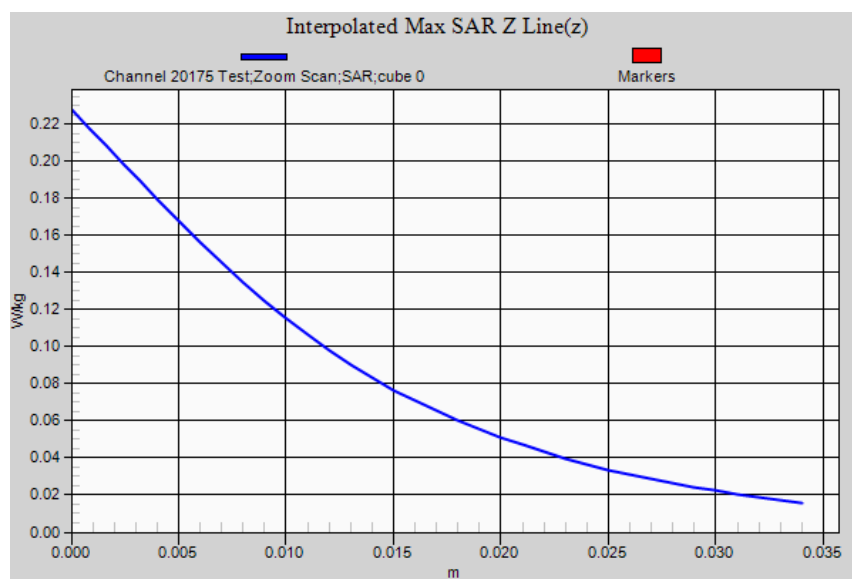

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz LTE FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 1RB 21-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (1RB High) (0); Communication System Band: Band 4 E-UTRA 1700; Frequency: 1745 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1745$ MHz; $\sigma = 1.52$ S/m; $\epsilon_r = 51.0$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)


Bystander 25mm Spacing Antenna OUT 1RB 21-11-14/Channel 20300 Test/Area Scan (81x101x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.178 W/kg

Bystander 25mm Spacing Antenna OUT 1RB 21-11-14/Channel 20300 Test/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 9.815 V/m; **Power Drift = -0.04 dB**

Averaged SAR: SAR(1g) = 0.168 W/kg; SAR(10g) = 0.112 W/kg

Maximum value of SAR (interpolated) = 0.225 W/kg

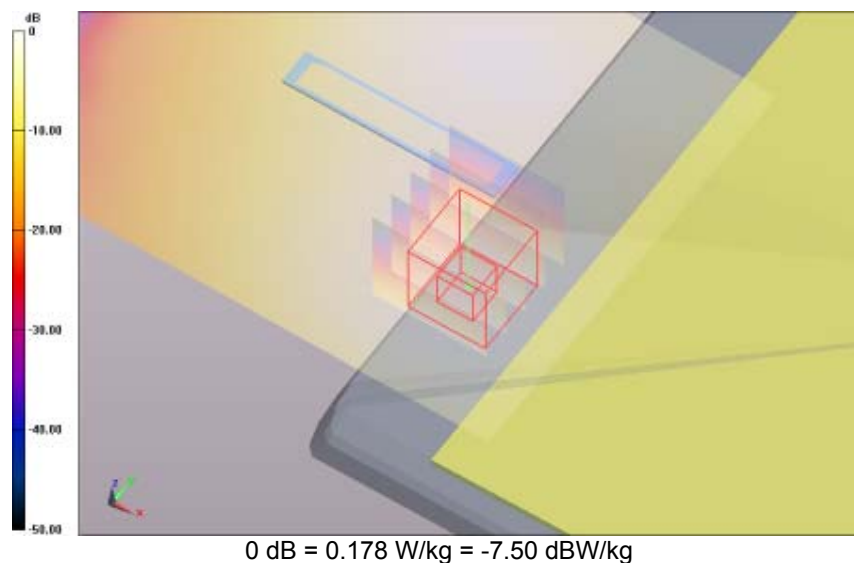


SAR Measurement Plot 136



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

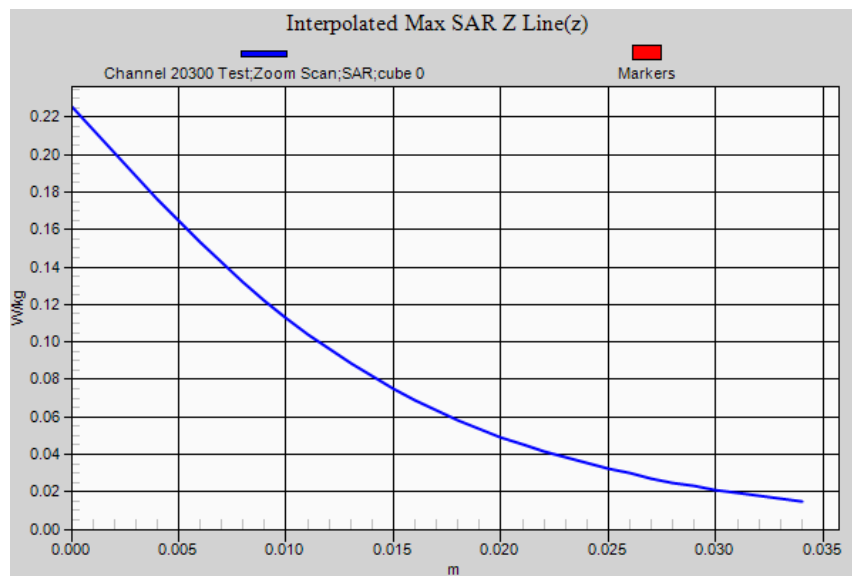

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz LTE FCC.da52:2

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 50RB 21-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (50RB Mid) (0); Communication System Band: Band 4 E-UTRA 1700; Frequency: 1720 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1720$ MHz; $\sigma = 1.50$ S/m; $\epsilon_r = 51.1$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 50RB 21-11-14/Channel 20050 Test/Area Scan (81x101x1):


Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.130 W/kg

Bystander 25mm Spacing Antenna OUT 50RB 21-11-14/Channel 20050 Test/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 7.659 V/m; Power Drift = -0.02 dB

Averaged SAR: SAR(1g) = 0.121 W/kg; SAR(10g) = 0.081 W/kg

Maximum value of SAR (interpolated) = 0.161 W/kg

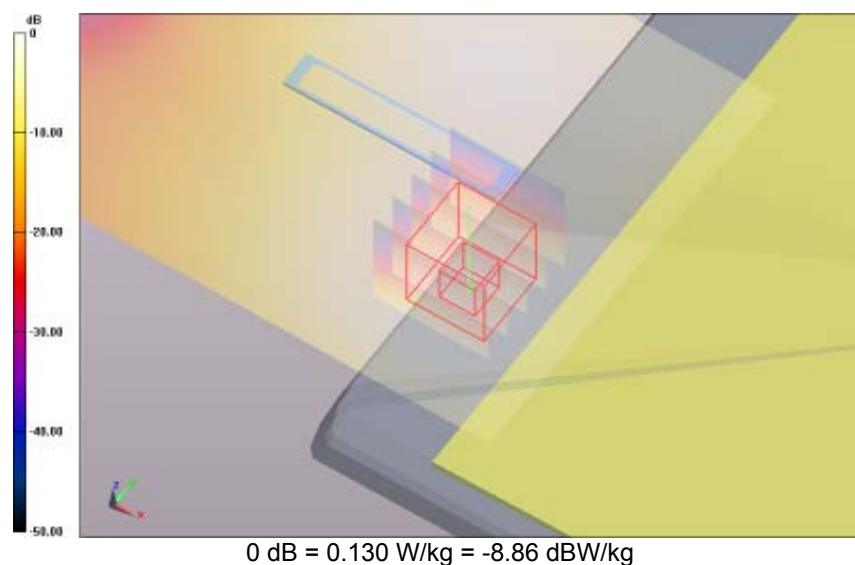


SAR Measurement Plot 137



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

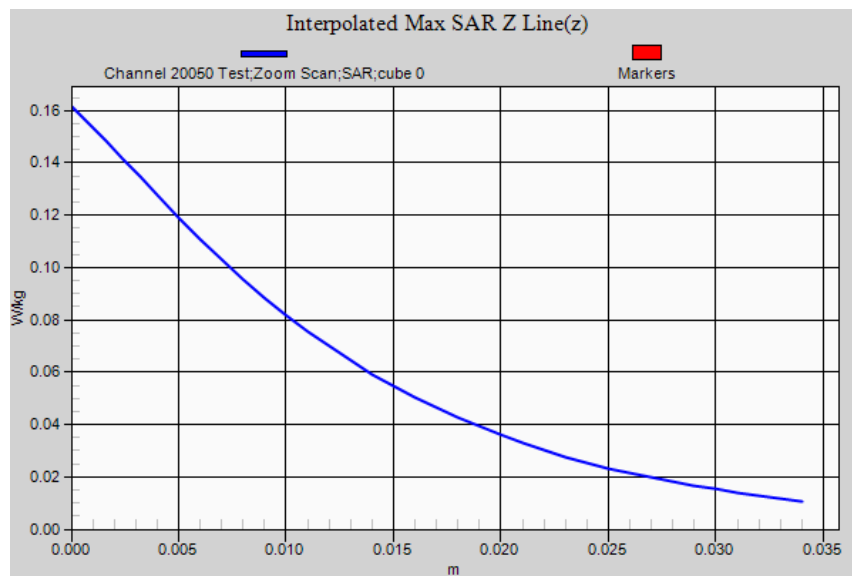

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz LTE FCC.da52:2

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 50RB 21-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (50RB Mid) (0); Communication System Band: Band 4 E-UTRA 1700; Frequency: 1733 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1732.5$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 51.1$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 50RB 21-11-14/Channel 20175 Test/Area Scan (81x101x1):


Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.137 W/kg

Bystander 25mm Spacing Antenna OUT 50RB 21-11-14/Channel 20175 Test/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 8.100 V/m; Power Drift = -0.06 dB

Averaged SAR: SAR(1g) = 0.127 W/kg; SAR(10g) = 0.085 W/kg

Maximum value of SAR (interpolated) = 0.172 W/kg

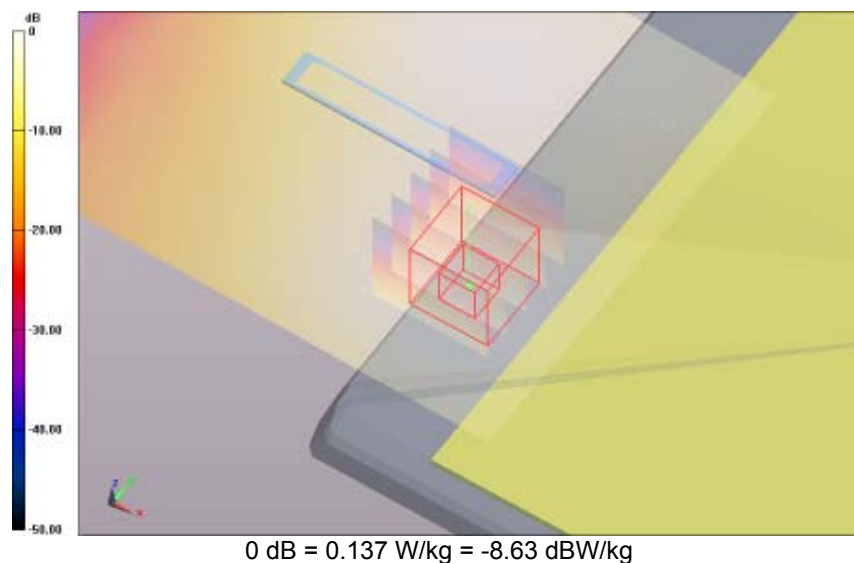


SAR Measurement Plot 138



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

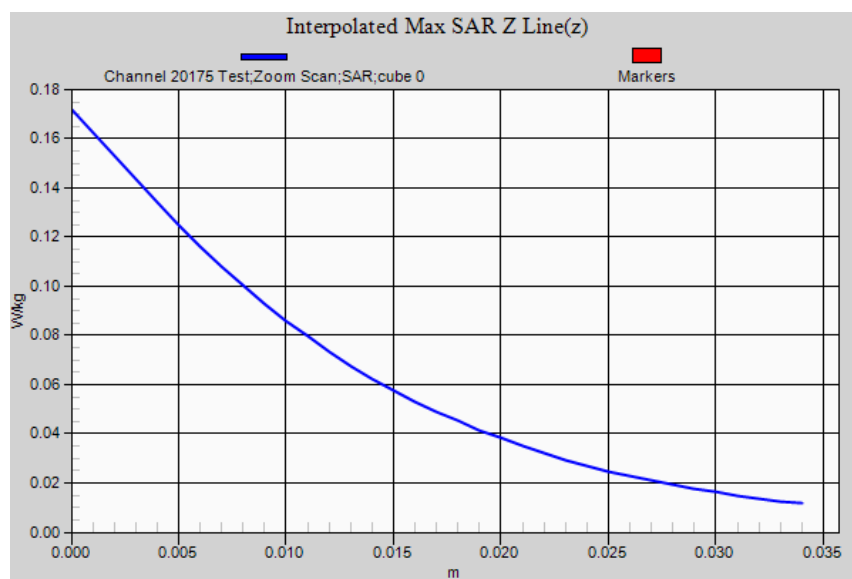

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz LTE FCC.da52:2

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 50RB 21-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (50RB Low) (0); Communication System Band: Band 4 E-UTRA 1700; Frequency: 1745 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1745$ MHz; $\sigma = 1.52$ S/m; $\epsilon_r = 51.0$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 50RB 21-11-14/Channel 20300 Test/Area Scan (81x101x1):


Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.141 W/kg

Bystander 25mm Spacing Antenna OUT 50RB 21-11-14/Channel 20300 Test/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 8.511 V/m; Power Drift = -0.06 dB

Averaged SAR: SAR(1g) = 0.130 W/kg; SAR(10g) = 0.087 W/kg

Maximum value of SAR (interpolated) = 0.175 W/kg

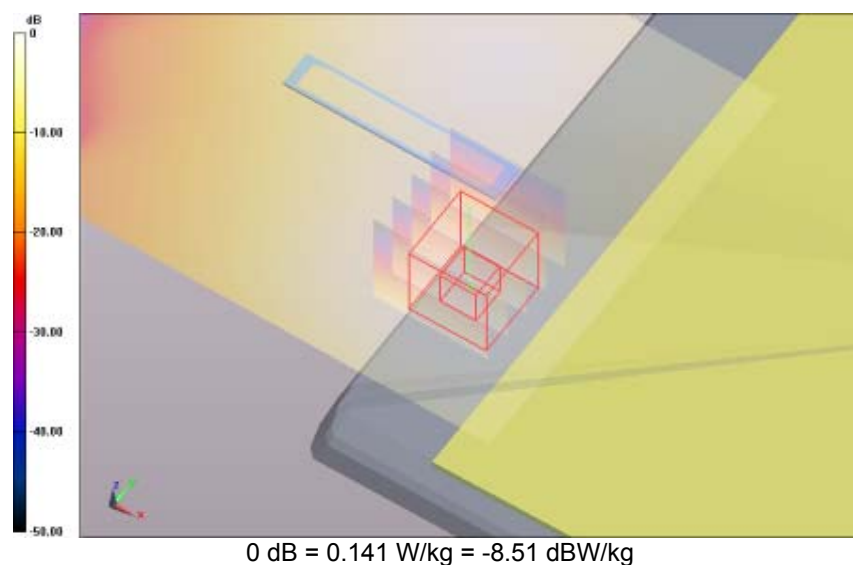


SAR Measurement Plot 139



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

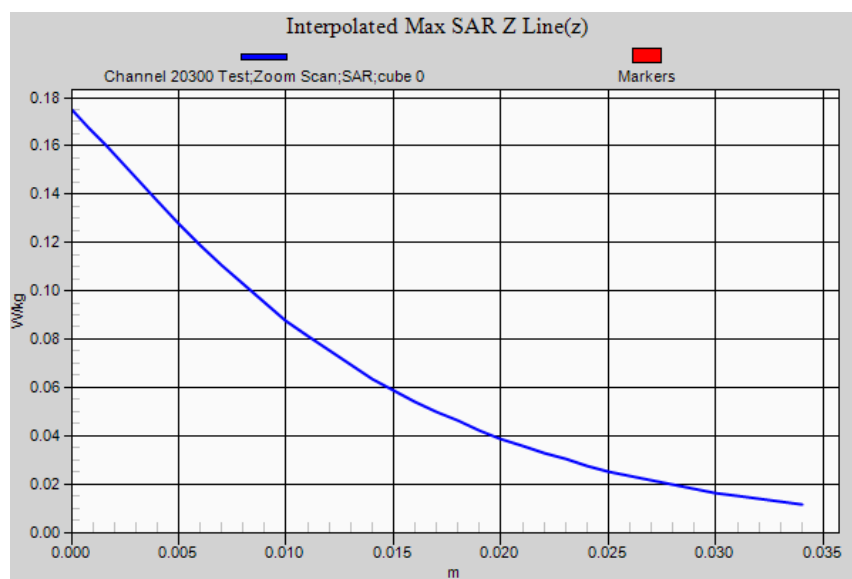

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz LTE FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 1RB 21-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (1RB High) (0); Communication System Band: Band 4 E-UTRA 1700; Frequency: 1720 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1720$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 52.8$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 1RB 21-11-14/Channel 20050 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.464 W/kg

Lap Held Antenna OUT 1RB 21-11-14/Channel 20050 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 11.812 V/m; **Power Drift = 0.13 dB**

Averaged SAR: SAR(1g) = 0.419 W/kg; SAR(10g) = 0.250 W/kg

Maximum value of SAR (interpolated) = 0.626 W/kg

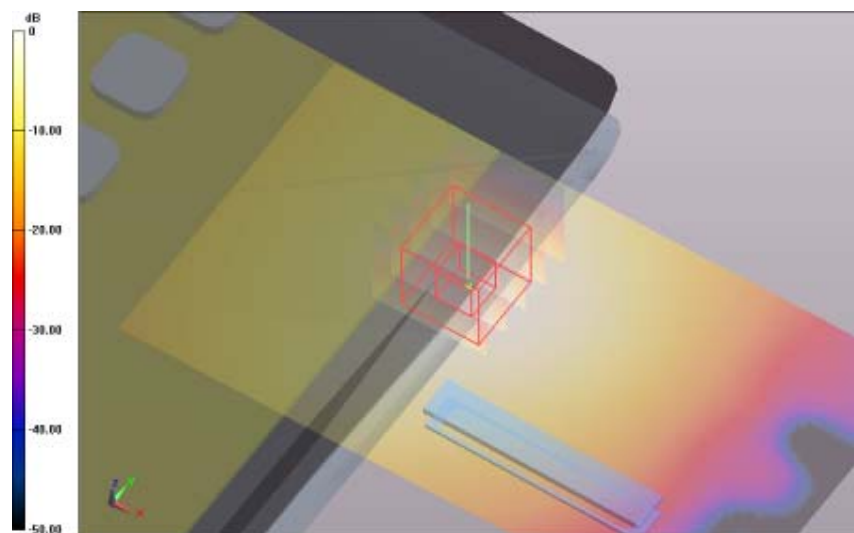


0 dB = 0.464 W/kg = -3.33 dBW/kg

SAR Measurement Plot 140



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

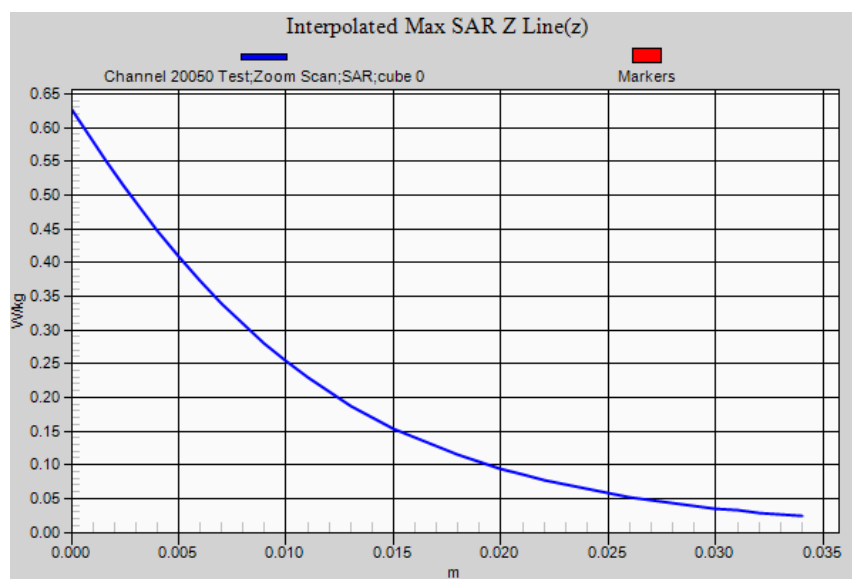

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz LTE FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 1RB 21-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (1RB High) (0); Communication System Band: Band 4 E-UTRA 1700; Frequency: 1733 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1732.5$ MHz; $\sigma = 1.52$ S/m; $\epsilon_r = 52.8$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 1RB 21-11-14/Channel 20175 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.480 W/kg

Lap Held Antenna OUT 1RB 21-11-14/Channel 20175 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 12.248 V/m; **Power Drift = -0.04 dB**

Averaged SAR: SAR(1g) = 0.448 W/kg; SAR(10g) = 0.266 W/kg

Maximum value of SAR (interpolated) = 0.681 W/kg

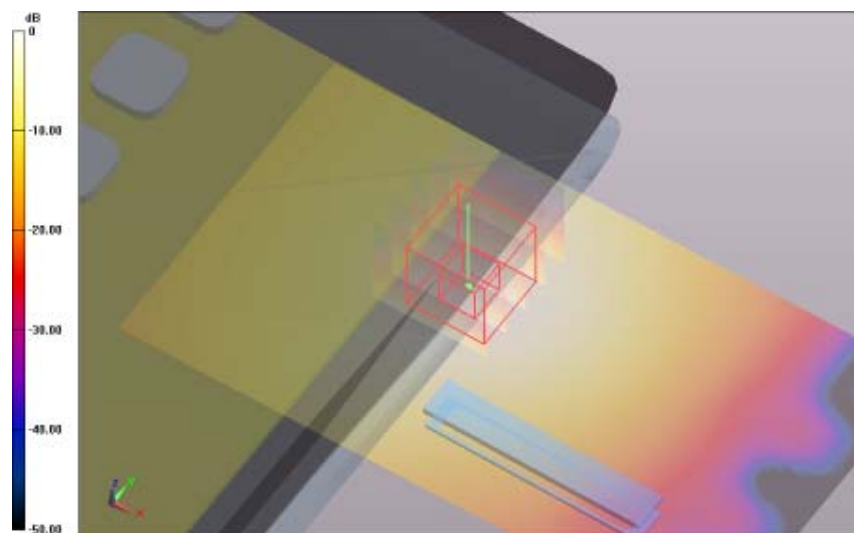


0 dB = 0.480 W/kg = -3.19 dBW/kg

SAR Measurement Plot 141



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

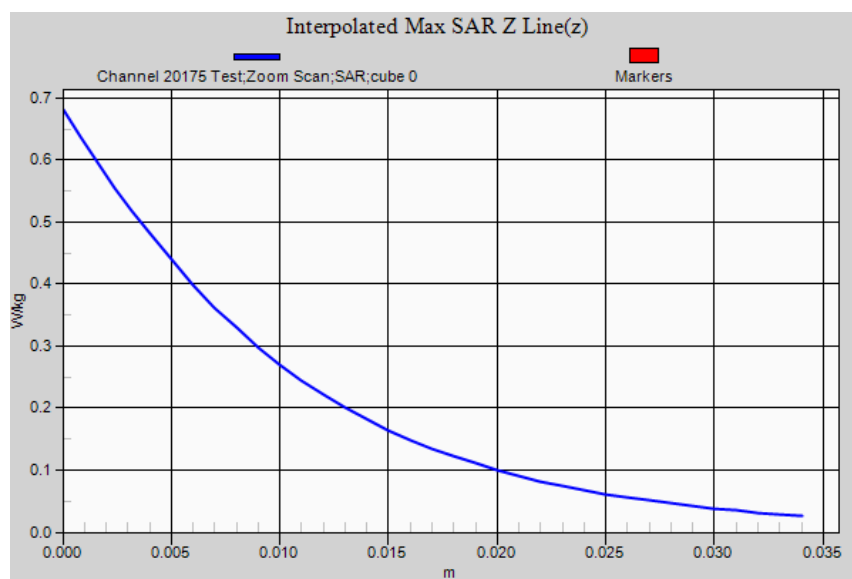

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz LTE FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 1RB 21-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (1RB High) (0); Communication System Band: Band 4 E-UTRA 1700; Frequency: 1745 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1745$ MHz; $\sigma = 1.53$ S/m; $\epsilon_r = 52.7$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 1RB 21-11-14/Channel 20300 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.451 W/kg

Lap Held Antenna OUT 1RB 21-11-14/Channel 20300 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 11.867 V/m; **Power Drift = 0.10 dB**

Averaged SAR: SAR(1g) = 0.419 W/kg; SAR(10g) = 0.249 W/kg

Maximum value of SAR (interpolated) = 0.636 W/kg

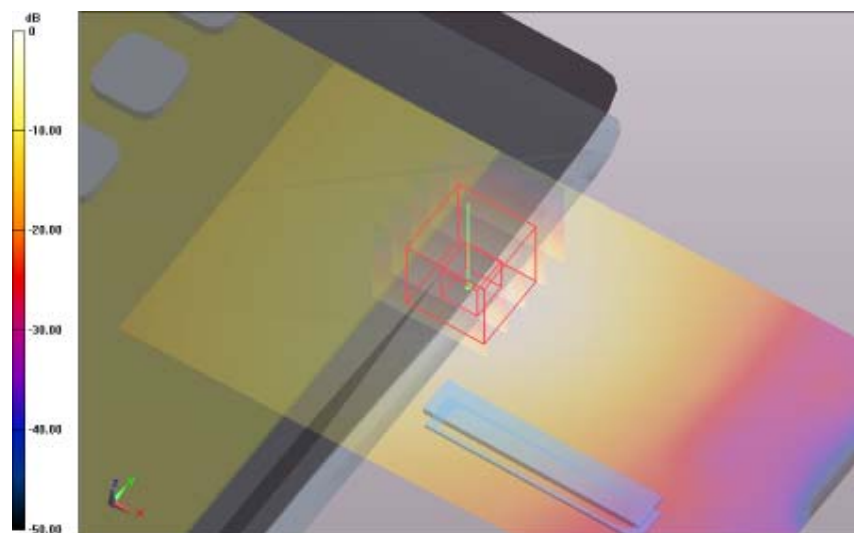


0 dB = 0.451 W/kg = -3.46 dBW/kg

SAR Measurement Plot 142



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

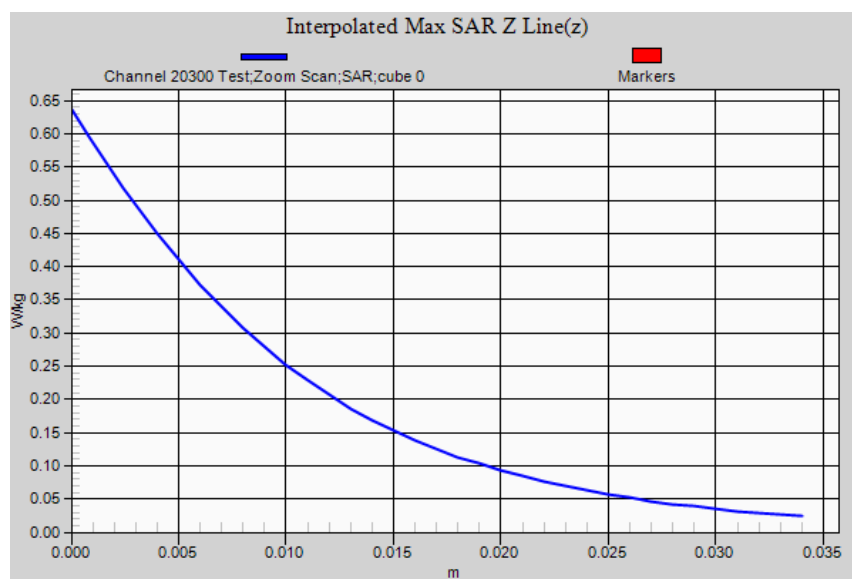

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz LTE FCC.da52:5

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 50RB 21-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (50RB Mid) (0); Communication System Band: Band 4 E-UTRA 1700; Frequency: 1720 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1720$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 52.8$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 50RB 21-11-14/Channel 20050 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.341 W/kg

Lap Held Antenna OUT 50RB 21-11-14/Channel 20050 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 10.439 V/m; **Power Drift = -0.03 dB**

Averaged SAR: SAR(1g) = 0.317 W/kg; SAR(10g) = 0.189 W/kg

Maximum value of SAR (interpolated) = 0.474 W/kg

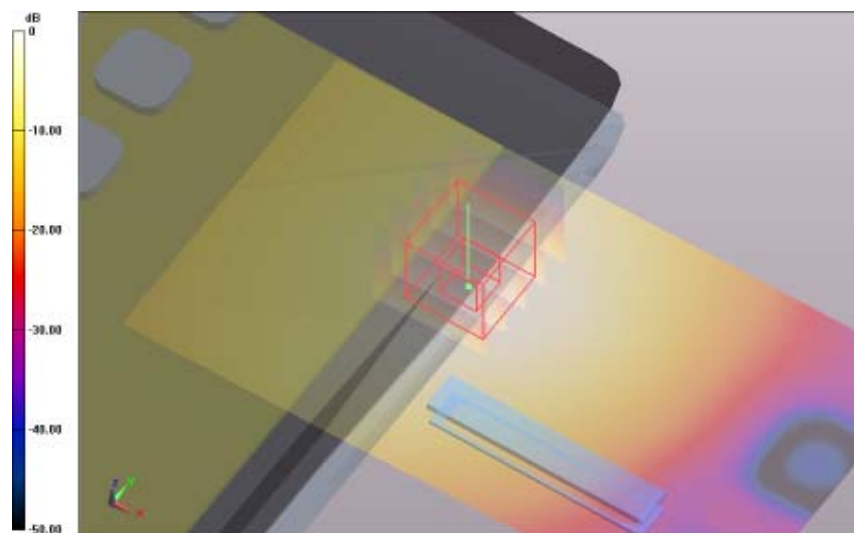


0 dB = 0.341 W/kg = -4.67 dBW/kg

SAR Measurement Plot 143



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

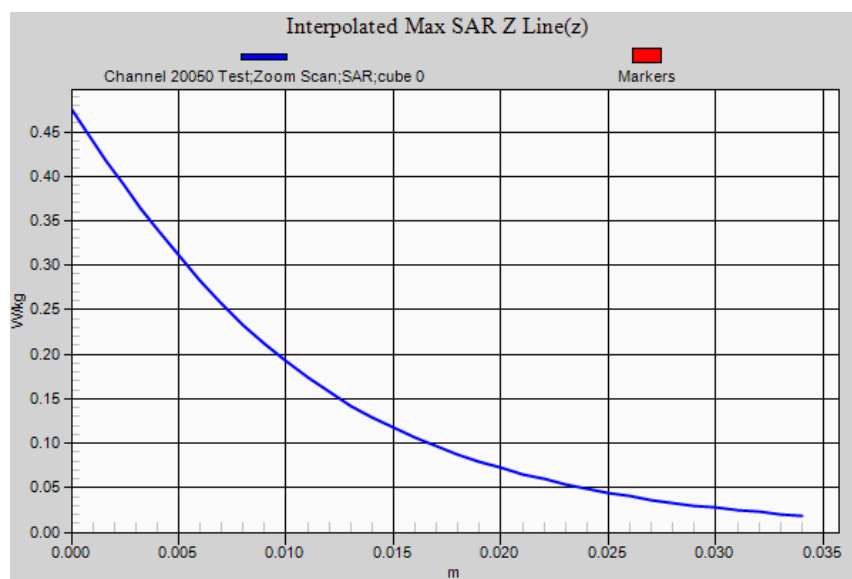

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz LTE FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 50RB 24-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (50RB Mid) (0); Communication System Band: Band 4 E-UTRA 1700; Frequency: 1733 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1732.5$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 51.1$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 50RB 24-11-14/Channel 20175 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.310 W/kg

Lap Held Antenna OUT 50RB 24-11-14/Channel 20175 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 7.648 V/m; **Power Drift = -0.08 dB**

Averaged SAR: SAR(1g) = 0.295 W/kg; SAR(10g) = 0.177 W/kg

Maximum value of SAR (interpolated) = 0.445 W/kg

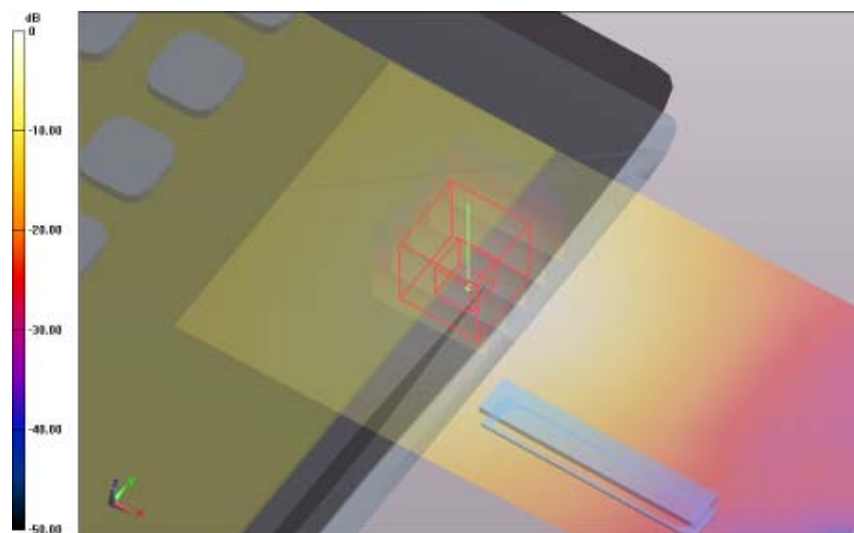


0 dB = 0.310 W/kg = -5.09 dBW/kg

SAR Measurement Plot 144



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

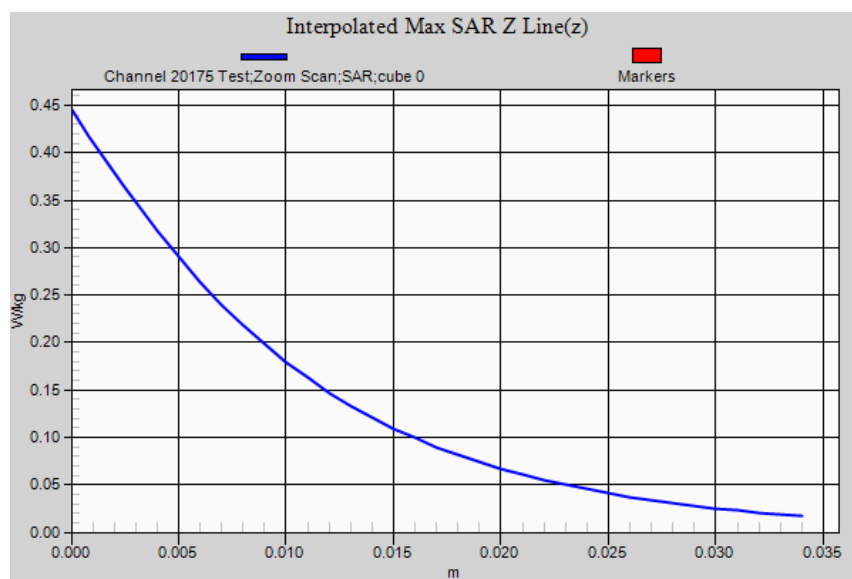

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz LTE FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 50RB 24-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (50RB Low) (0); Communication System Band: Band 4 E-UTRA 1700; Frequency: 1745 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1745$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 51.1$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 50RB 24-11-14/Channel 20300 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.311 W/kg

Lap Held Antenna OUT 50RB 24-11-14/Channel 20300 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 7.622 V/m; **Power Drift = 0.01 dB**

Averaged SAR: SAR(1g) = 0.302 W/kg; SAR(10g) = 0.180 W/kg

Maximum value of SAR (interpolated) = 0.456 W/kg

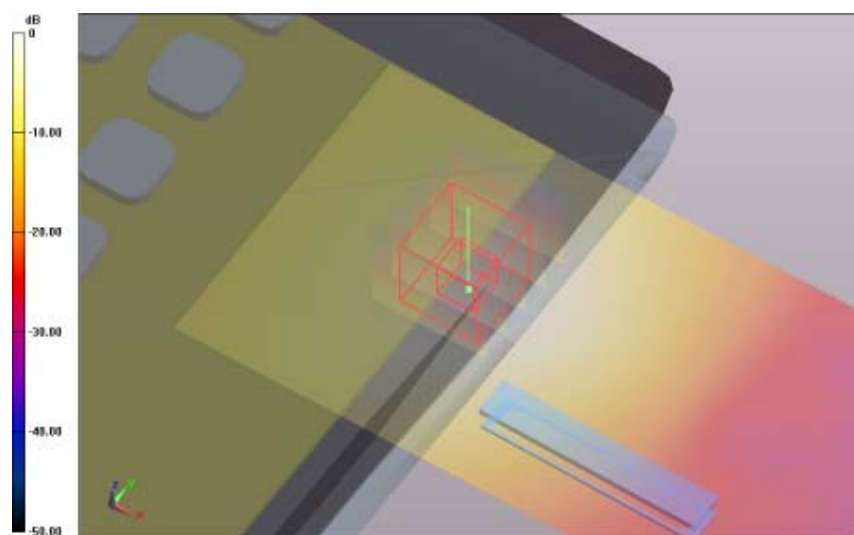


0 dB = 0.311 W/kg = -5.07 dBW/kg

SAR Measurement Plot 145



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

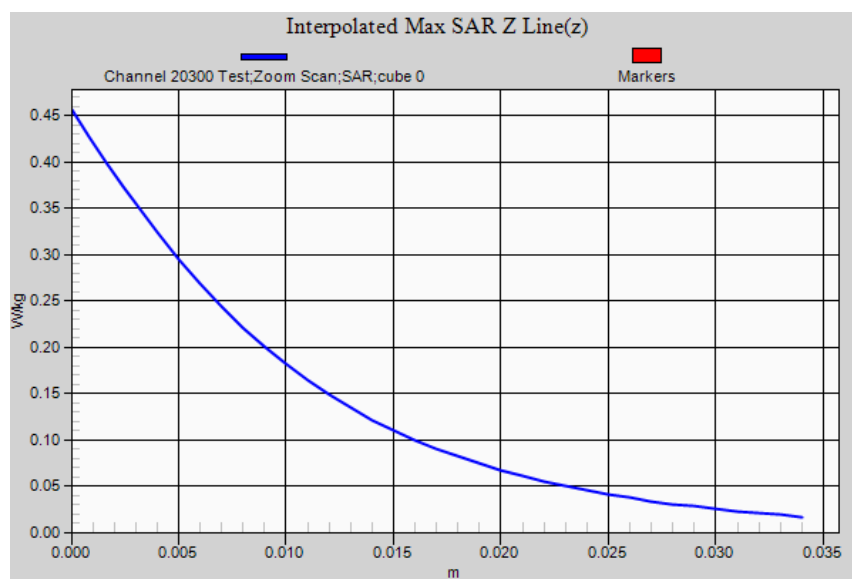

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz LTE FCC.da52:7

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 1RB 24-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (1RB High) (0); Communication System Band: Band 4 E-UTRA 1700; Frequency: 1720 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1720$ MHz; $\sigma = 1.50$ S/m; $\epsilon_r = 51.1$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 1RB 24-11-14/Channel 20050 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.633 W/kg

Edge 2 Antenna IN 1RB 24-11-14/Channel 20050 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 13.726 V/m; **Power Drift = -0.20 dB**

Averaged SAR: SAR(1g) = 0.615 W/kg; SAR(10g) = 0.249 W/kg

Maximum value of SAR (interpolated) = 1.330 W/kg

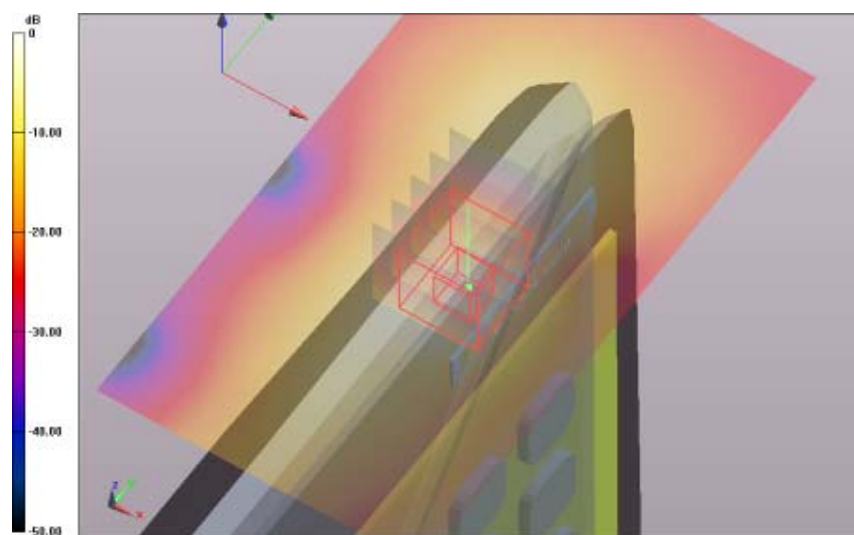


0 dB = 0.633 W/kg = -1.99 dBW/kg

SAR Measurement Plot 146



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

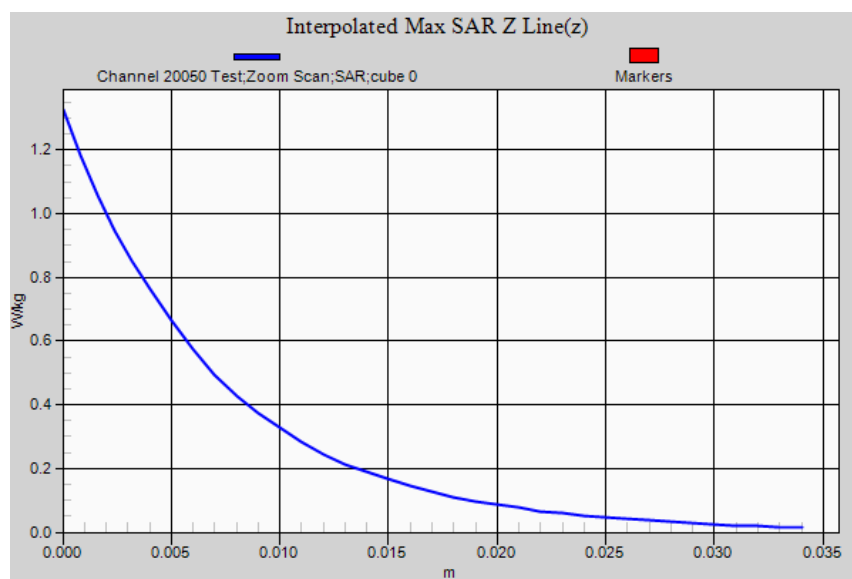

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz LTE FCC.da52:7

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 1RB 24-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (1RB High) (0); Communication System Band: Band 4 E-UTRA 1700; Frequency: 1733 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1732.5$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 51.1$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 1RB 24-11-14/Channel 20175 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.652 W/kg

Edge 2 Antenna IN 1RB 24-11-14/Channel 20175 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 13.709 V/m; **Power Drift = -0.03 dB**

Averaged SAR: SAR(1g) = 0.629 W/kg; SAR(10g) = 0.255 W/kg

Maximum value of SAR (interpolated) = 1.350 W/kg

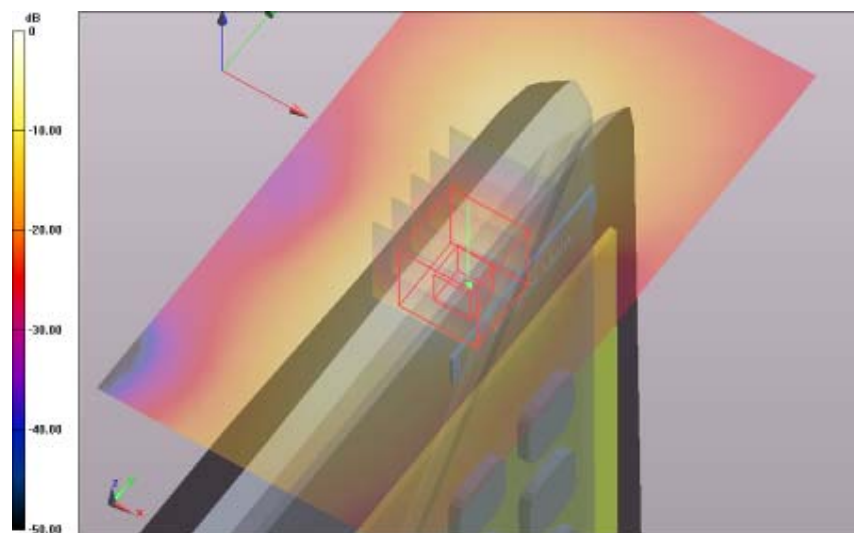


0 dB = 0.652 W/kg = -1.86 dBW/kg

SAR Measurement Plot 147



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

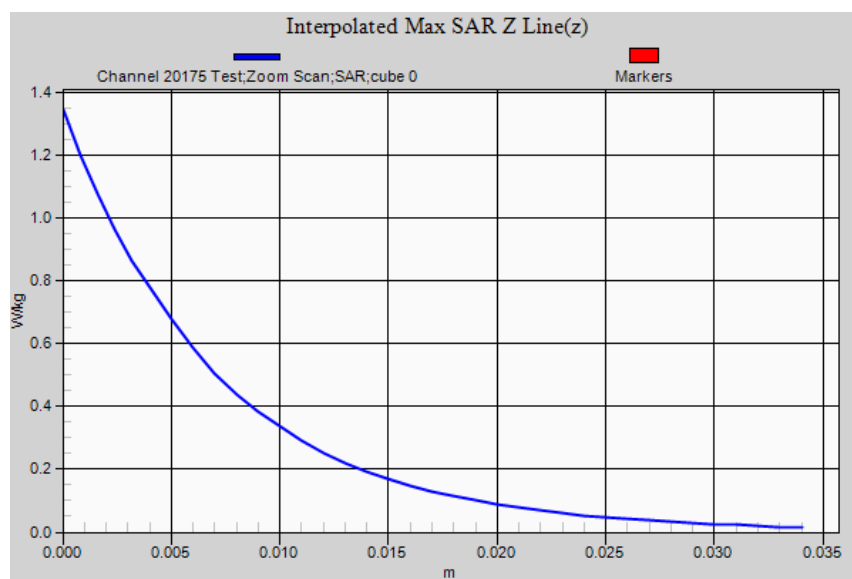

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz LTE FCC.da52:7

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 1RB 24-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (1RB High) (0); Communication System Band: Band 4 E-UTRA 1700; Frequency: 1745 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1745$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 51.1$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 1RB 24-11-14/Channel 20300 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.627 W/kg

Edge 2 Antenna IN 1RB 24-11-14/Channel 20300 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 13.491 V/m; **Power Drift = -0.09 dB**

Averaged SAR: SAR(1g) = 0.611 W/kg; SAR(10g) = 0.246 W/kg

Maximum value of SAR (interpolated) = 1.310 W/kg

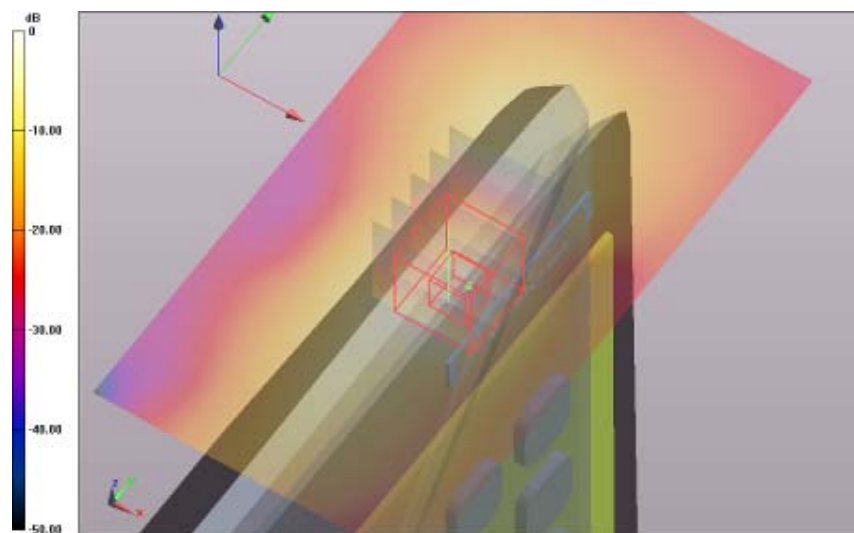


0 dB = 0.627 W/kg = -2.03 dBW/kg

SAR Measurement Plot 148



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

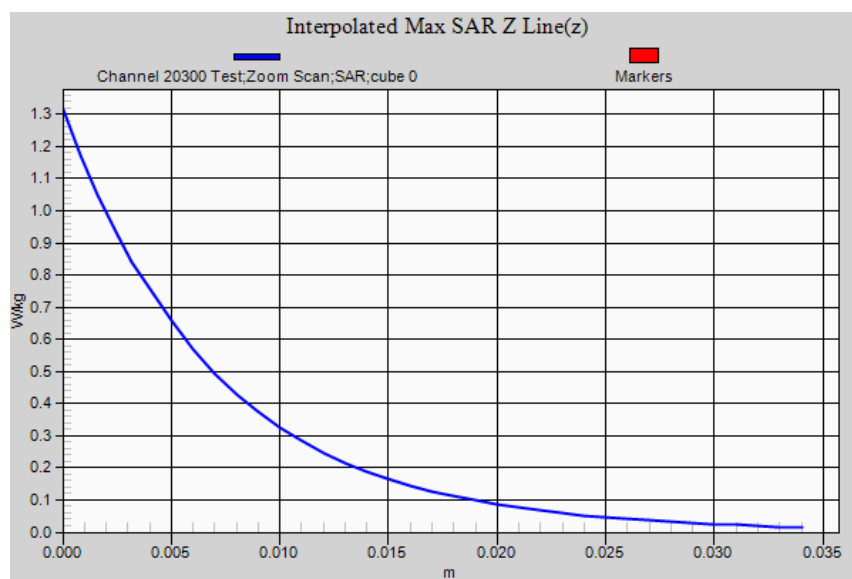

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz LTE FCC.da52:8

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 50RB 24-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (50RB Mid) (0); Communication System Band: Band 4 E-UTRA 1700; Frequency: 1720 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1720$ MHz; $\sigma = 1.50$ S/m; $\epsilon_r = 51.1$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 50RB 24-11-14/Channel 20050 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.508 W/kg

Edge 2 Antenna IN 50RB 24-11-14/Channel 20050 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 12.007 V/m; **Power Drift = 0.04 dB**

Averaged SAR: SAR(1g) = 0.494 W/kg; SAR(10g) = 0.201 W/kg

Maximum value of SAR (interpolated) = 1.060 W/kg

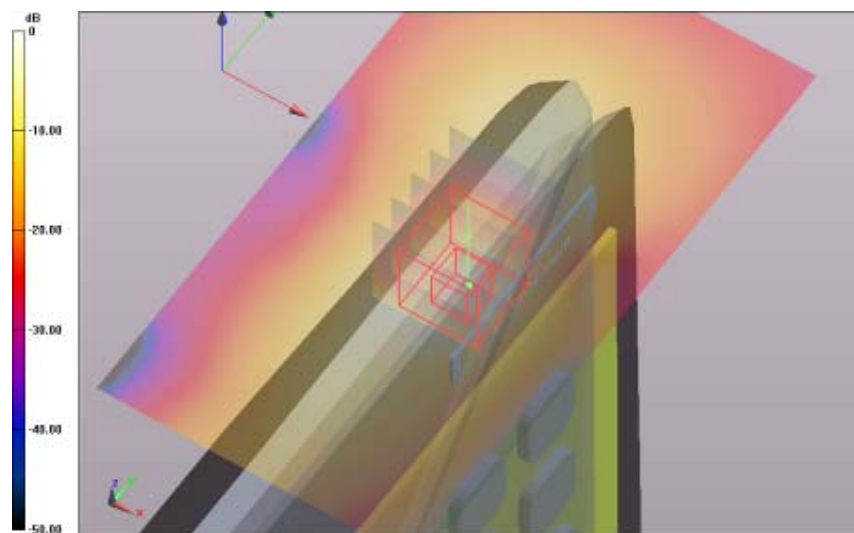


0 dB = 0.508 W/kg = -2.94 dBW/kg

SAR Measurement Plot 149



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

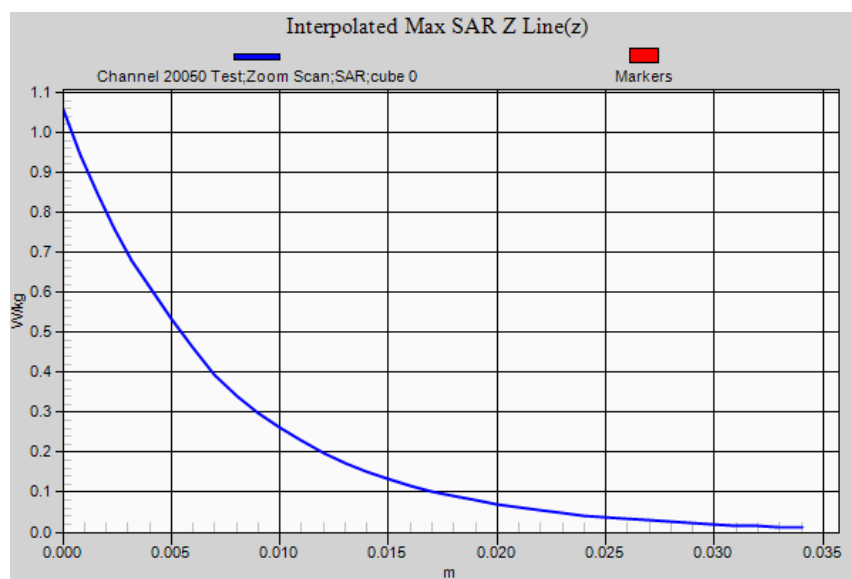

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz LTE FCC.da52:8

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 50RB 24-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (50RB Mid) (0); Communication System Band: Band 4 E-UTRA 1700; Frequency: 1733 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1732.5$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 51.1$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 50RB 24-11-14/Channel 20175 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.499 W/kg

Edge 2 Antenna IN 50RB 24-11-14/Channel 20175 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 11.972 V/m; **Power Drift = -0.08 dB**

Averaged SAR: SAR(1g) = 0.486 W/kg; SAR(10g) = 0.197 W/kg

Maximum value of SAR (interpolated) = 1.050 W/kg

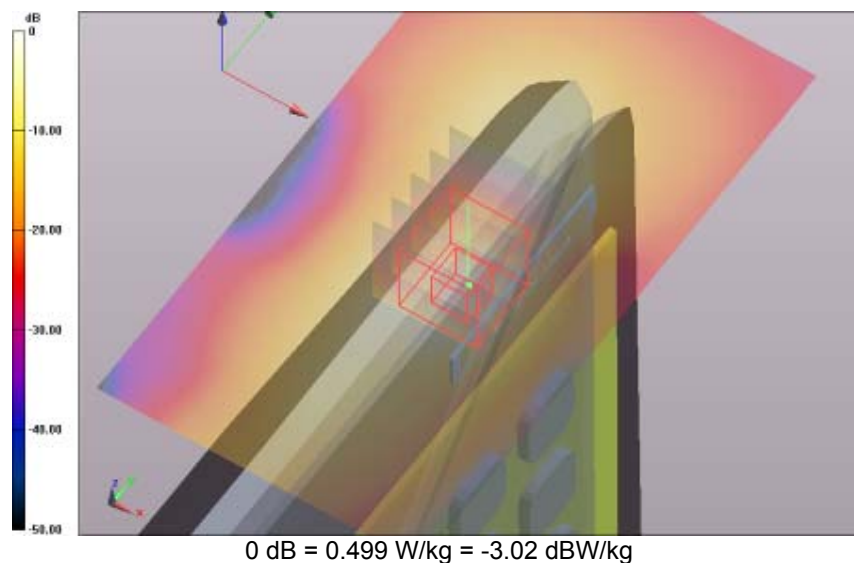


SAR Measurement Plot 150



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

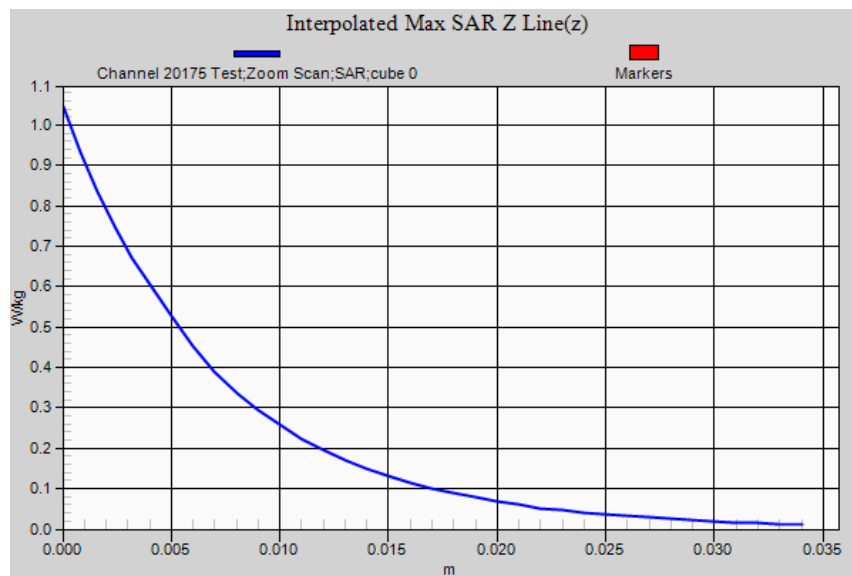

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz LTE FCC.da52:8

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 50RB 24-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (50RB Low) (0); Communication System Band: Band 4 E-UTRA 1700; Frequency: 1745 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1745$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 51.1$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 50RB 24-11-14/Channel 20300 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.502 W/kg

Edge 2 Antenna IN 50RB 24-11-14/Channel 20300 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 11.908 V/m; **Power Drift = -0.05 dB**


Averaged SAR: SAR(1g) = 0.483 W/kg; SAR(10g) = 0.195 W/kg

Maximum value of SAR (interpolated) = 1.050 W/kg

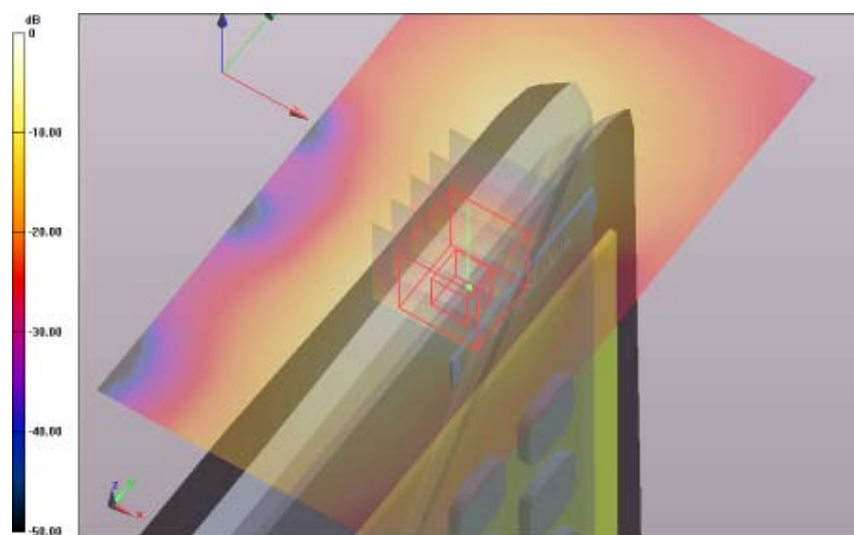

0 dB = 0.502 W/kg = -2.99 dBW/kg

SAR Measurement Plot 151

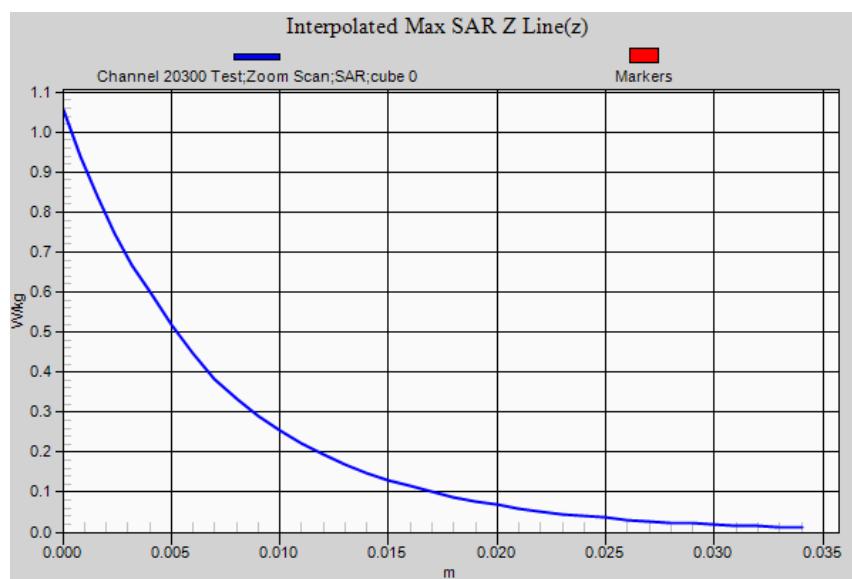

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz LTE FCC.da52:10

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 1RB 24-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (1RB High) (0); Communication System Band: Band 4 E-UTRA 1700; Frequency: 1720 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1720$ MHz; $\sigma = 1.50$ S/m; $\epsilon_r = 51.1$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 1RB 24-11-14/Channel 20050 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.347 W/kg

Edge 3 Antenna OUT 1RB 24-11-14/Channel 20050 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 8.483 V/m; **Power Drift = -0.06 dB**

Averaged SAR: SAR(1g) = 0.352 W/kg; SAR(10g) = 0.218 W/kg

Maximum value of SAR (interpolated) = 0.526 W/kg

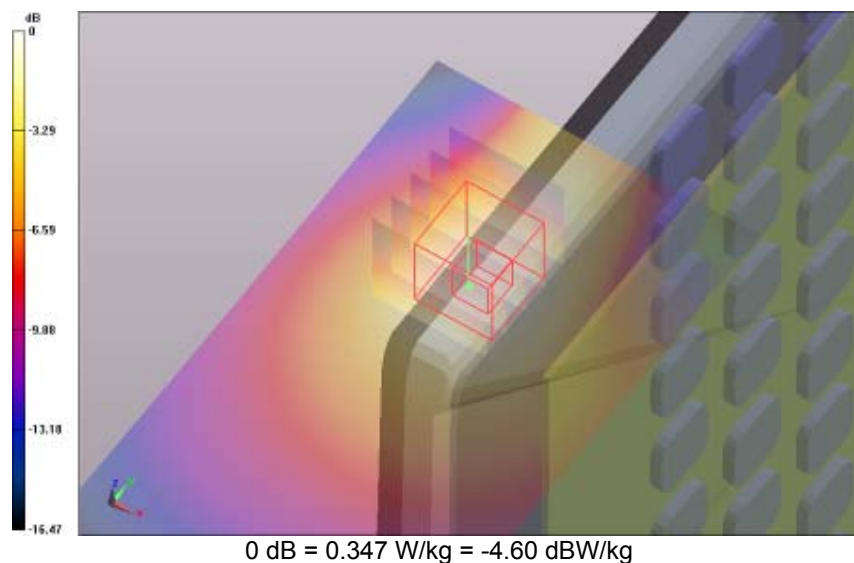


SAR Measurement Plot 152



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

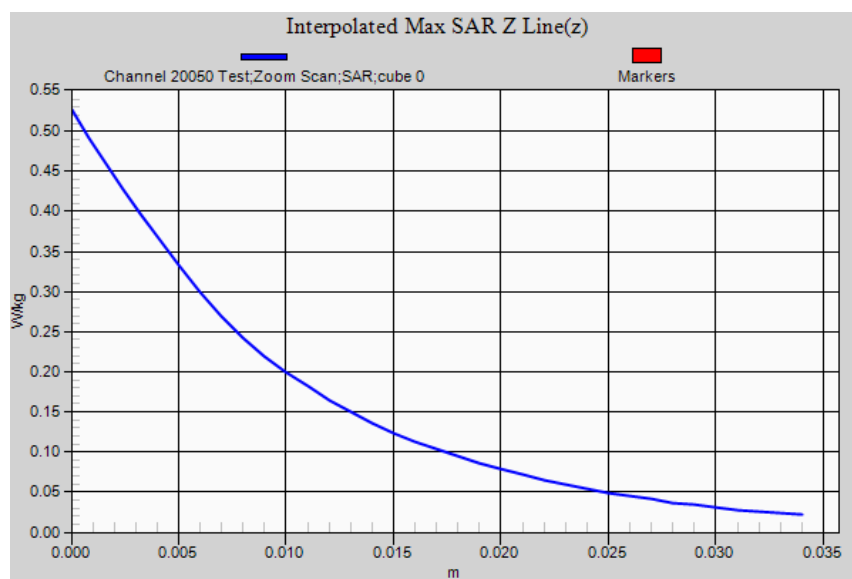

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz LTE FCC.da52:10

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 1RB 24-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (1RB High) (0); Communication System Band: Band 4 E-UTRA 1700; Frequency: 1733 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1732.5$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 51.1$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 1RB 24-11-14/Channel 20175 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.364 W/kg

Edge 3 Antenna OUT 1RB 24-11-14/Channel 20175 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 8.731 V/m; **Power Drift = -0.06 dB**

Averaged SAR: SAR(1g) = 0.379 W/kg; SAR(10g) = 0.233 W/kg

Maximum value of SAR (interpolated) = 0.583 W/kg

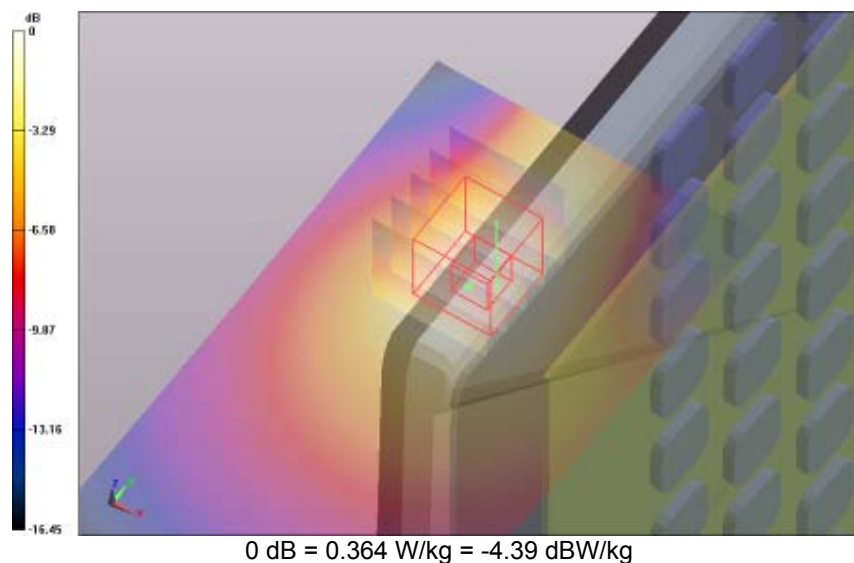


SAR Measurement Plot 153



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

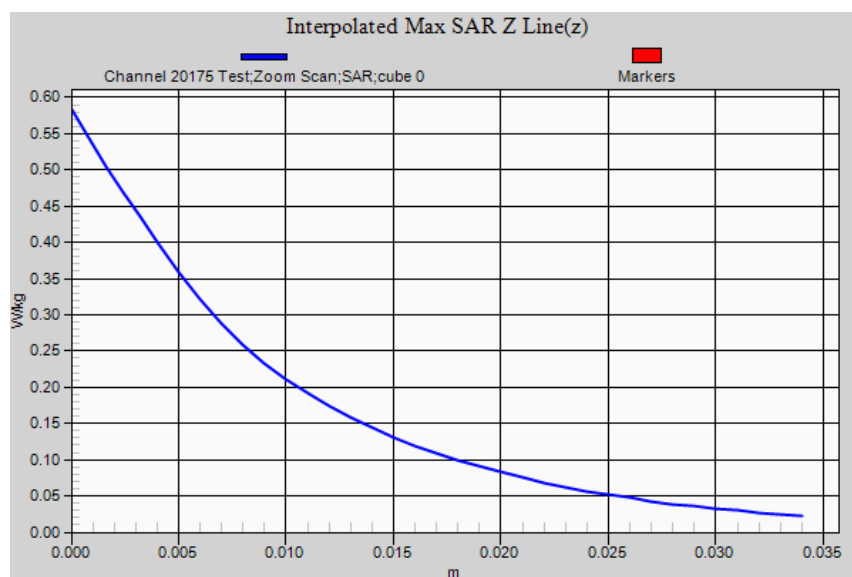

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz LTE FCC.da52:10

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 1RB 24-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (1RB High) (0); Communication System Band: Band 4 E-UTRA 1700; Frequency: 1745 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1745$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 51.1$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 1RB 24-11-14/Channel 20300 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.364 W/kg

Edge 3 Antenna OUT 1RB 24-11-14/Channel 20300 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 8.625 V/m; **Power Drift = -0.03 dB**

Averaged SAR: SAR(1g) = 0.375 W/kg; SAR(10g) = 0.231 W/kg

Maximum value of SAR (interpolated) = 0.581 W/kg

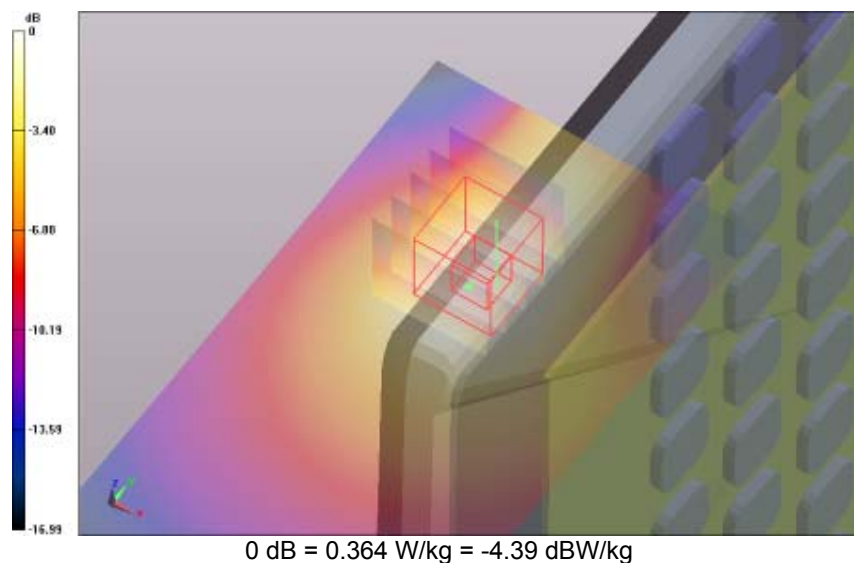


SAR Measurement Plot 154



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

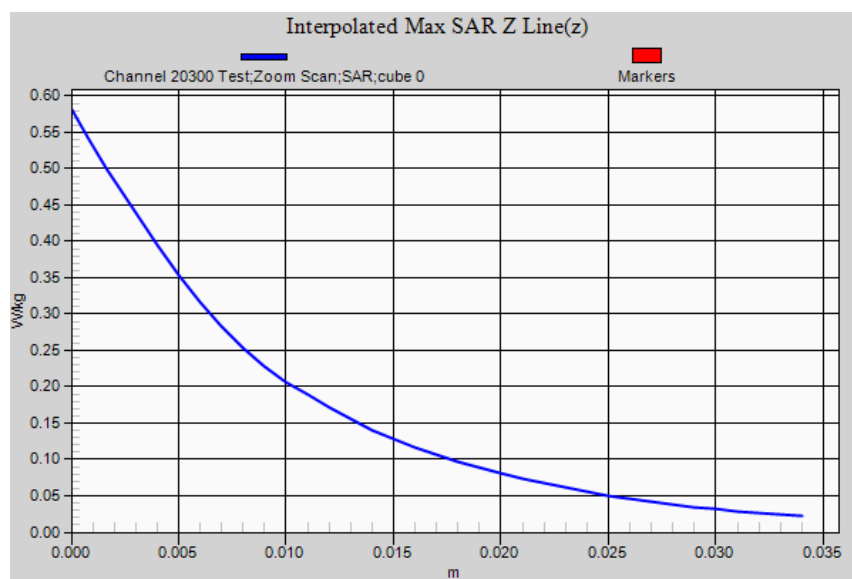

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz LTE FCC.da52:11

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 50RB 24-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (50RB Mid) (0); Communication System Band: Band 4 E-UTRA 1700; Frequency: 1720 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1720$ MHz; $\sigma = 1.50$ S/m; $\epsilon_r = 51.1$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 50RB 24-11-14/Channel 20050 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.254 W/kg


Edge 3 Antenna OUT 50RB 24-11-14/Channel 20050 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 7.169 V/m; **Power Drift = -0.01 dB**

Averaged SAR: SAR(1g) = 0.256 W/kg; SAR(10g) = 0.158 W/kg

Maximum value of SAR (interpolated) = 0.391 W/kg

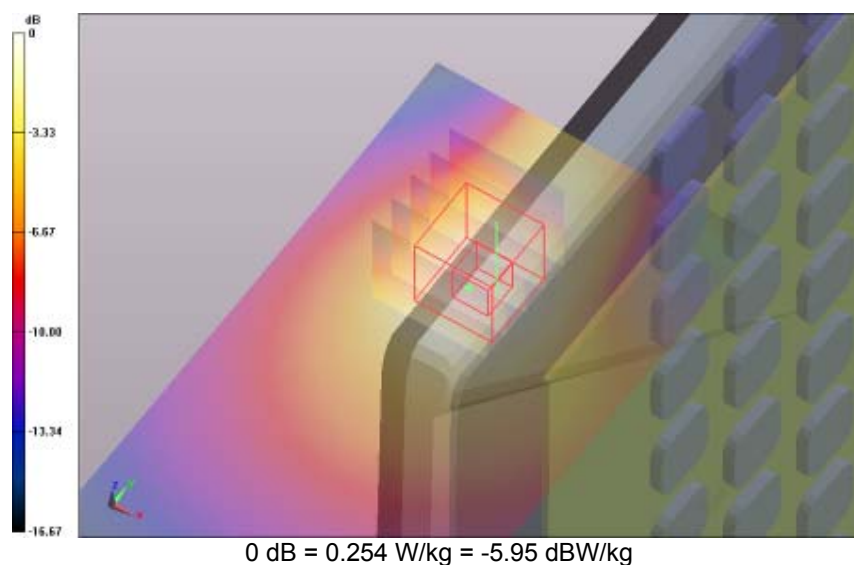

SAR Measurement Plot 155

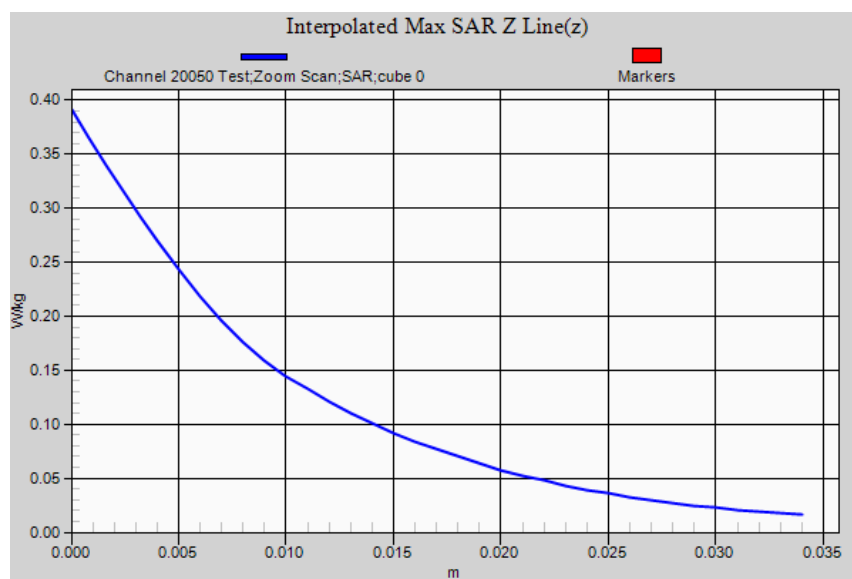

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz LTE FCC.da52:11

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 50RB 24-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (50RB Mid) (0); Communication System Band: Band 4 E-UTRA 1700; Frequency: 1733 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1732.5$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 51.1$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 50RB 24-11-14/Channel 20175 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.268 W/kg

Edge 3 Antenna OUT 50RB 24-11-14/Channel 20175 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 7.487 V/m; **Power Drift = -0.05 dB**

Averaged SAR: SAR(1g) = 0.279 W/kg; SAR(10g) = 0.172 W/kg

Maximum value of SAR (interpolated) = 0.421 W/kg

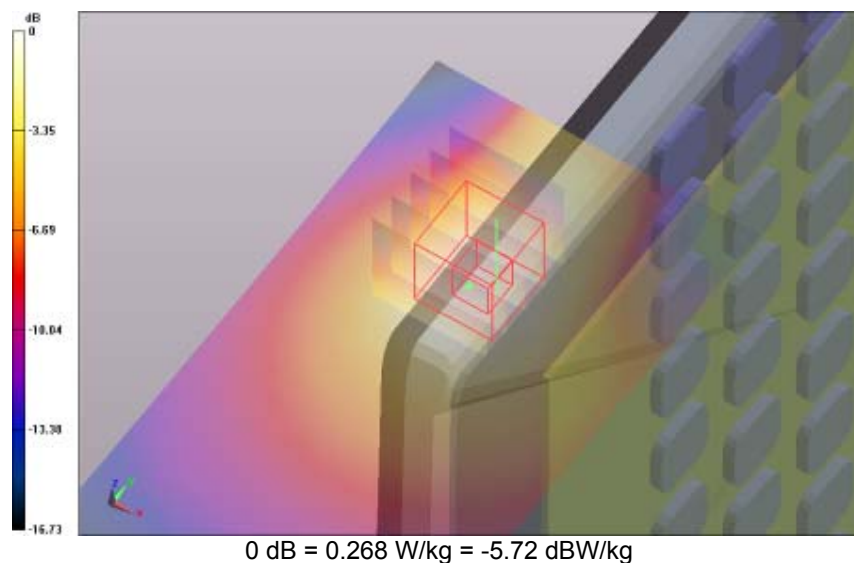


SAR Measurement Plot 156



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

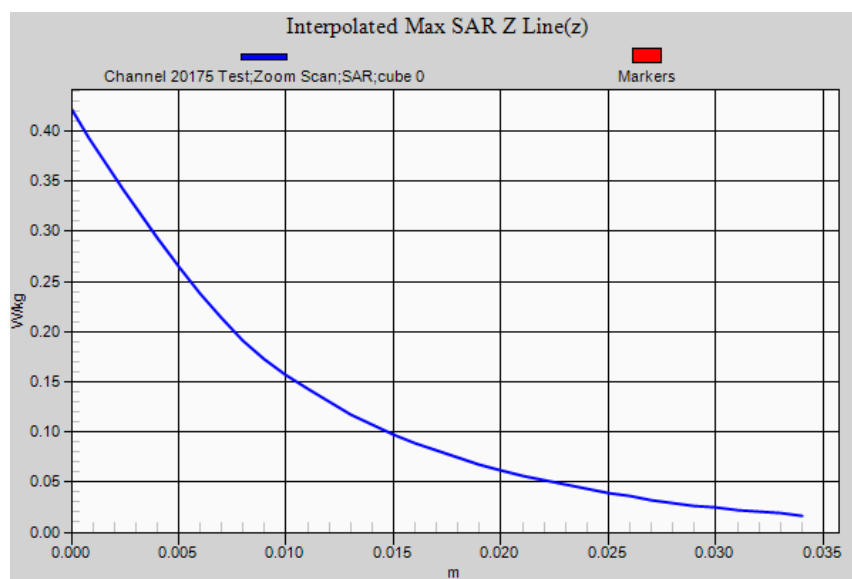

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz LTE FCC.da52:11

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 50RB 24-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (50RB Low) (0); Communication System Band: Band 4 E-UTRA 1700; Frequency: 1745 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1745$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 51.1$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 50RB 24-11-14/Channel 20300 Test 2/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.285 W/kg

Edge 3 Antenna OUT 50RB 24-11-14/Channel 20300 Test 2/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 7.568 V/m; **Power Drift = 0.04 dB**

Averaged SAR: SAR(1g) = 0.290 W/kg; SAR(10g) = 0.179 W/kg

Maximum value of SAR (interpolated) = 0.445 W/kg

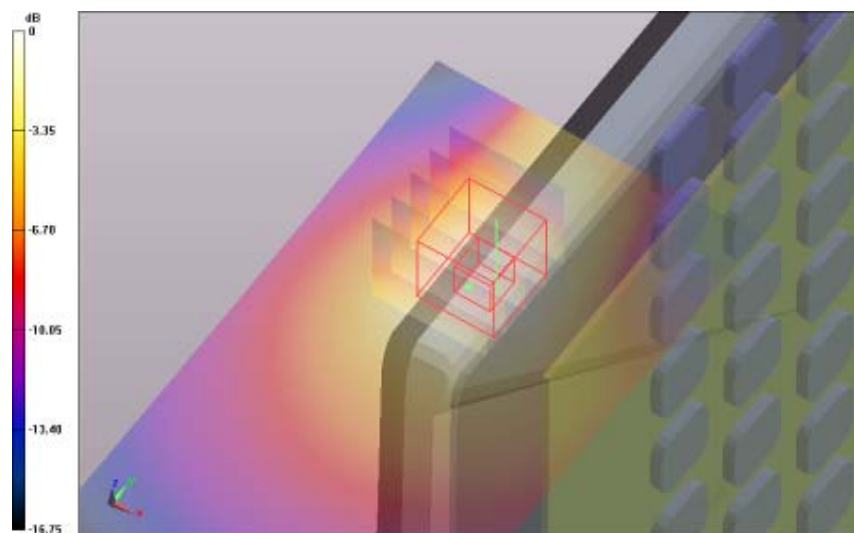


SAR Measurement Plot 157



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

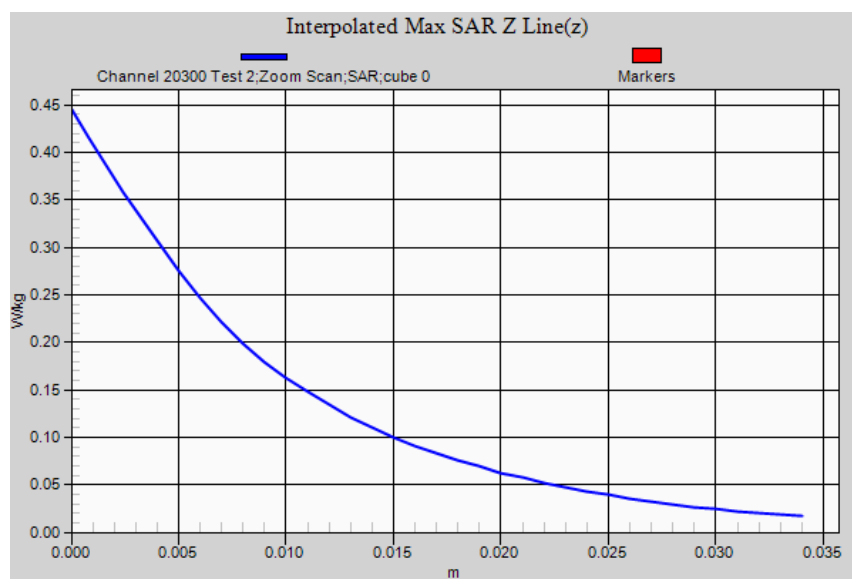

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M141025 Tablet 1700 MHz LTE FCC.da52:12

DUT Name: Dipole 1800 MHz, Type: DV1800V2, Serial: 242**Configuration: System Check 24-11-14**

Communication System: 0 - CW (0); Communication System Band: 1800 MHz; Frequency: 1800 MHz,

Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=1800$ MHz; $\sigma = 1.55$ S/m; $\epsilon_r = 50.8$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;

Sensor-Surface: 4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 10/12/2013

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

System Check 24-11-14/Channel 1 Test/Area Scan (51x51x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm;

Maximum value of SAR (interpolated) = 12.200 W/kg

System Check 24-11-14/Channel 1 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: dx=1.0 mm, dy=1.0mm, dz=1.0 mm; Reference Value = 90.895 V/m; **Power Drift = -0.03 dB****Averaged SAR: SAR(1g) = 9.520 W/kg; SAR(10g) = 5.070 W/kg**

Maximum value of SAR (interpolated) = 15.800 W/kg

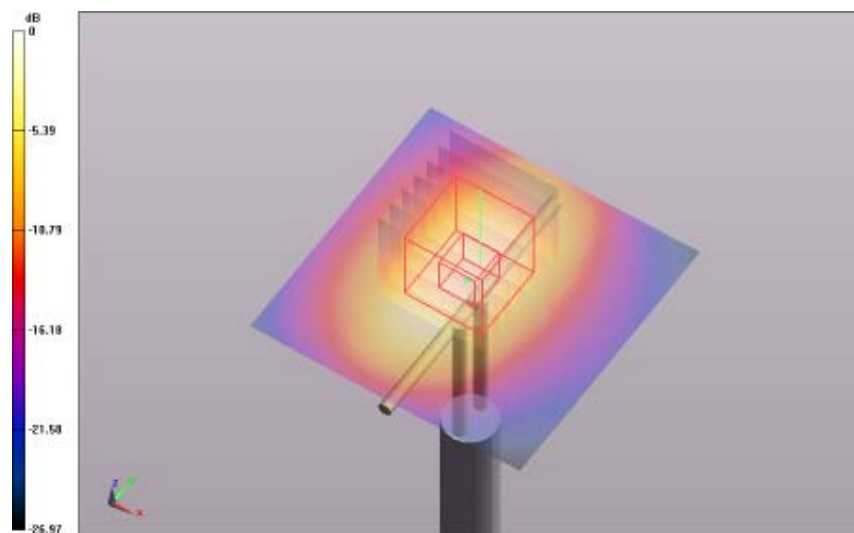


0 dB = 12.2 W/kg = 10.86 dBW/kg

SAR Measurement Plot 158



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

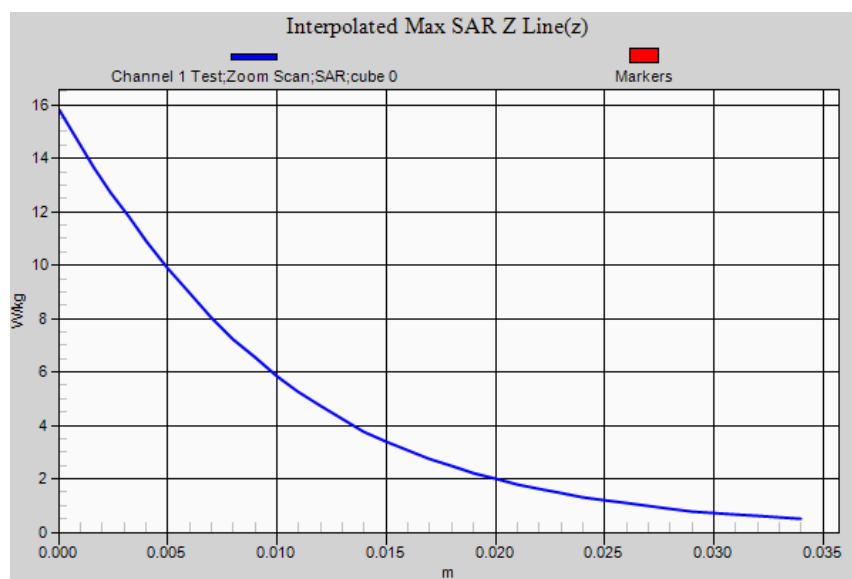

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M1421025 Tablet 1900 MHz LTE FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 1RB 26-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (1RB High) (0); Communication System Band: Band 25 E-UTRA 1900; Frequency: 1860 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=1860$ MHz; $\sigma = 1.52$ S/m; $\epsilon_r = 52.0$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 10/12/2013

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 1RB 26-11-14/Channel 26140 Test/Area Scan (61x111x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.175 W/kg**Bystander 25mm Spacing Antenna OUT 1RB 26-11-14/Channel 26140 Test/Zoom Scan (21x21x36)/Cube 0:**Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 6.377 V/m; **Power Drift = 0.11 dB****Averaged SAR: SAR(1g) = 0.168 W/kg; SAR(10g) = 0.102 W/kg**

Maximum value of SAR (interpolated) = 0.252 W/kg

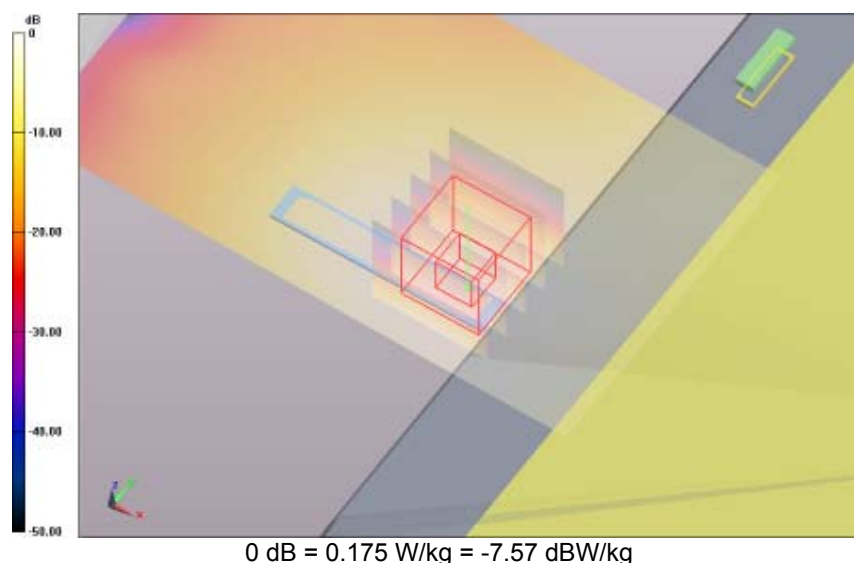

SAR Measurement Plot 159



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M1421025 Tablet 1900 MHz LTE FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 1RB 26-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (1RB Low) (0); Communication System Band: Band 25 E-UTRA 1900; Frequency: 1883 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1882.5$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 51.9$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)


Bystander 25mm Spacing Antenna OUT 1RB 26-11-14/Channel 26365 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.191 W/kg

Bystander 25mm Spacing Antenna OUT 1RB 26-11-14/Channel 26365 Test/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 6.572 V/m; **Power Drift = -0.19 dB**

Averaged SAR: SAR(1g) = 0.154 W/kg; SAR(10g) = 0.094 W/kg

Maximum value of SAR (interpolated) = 0.230 W/kg

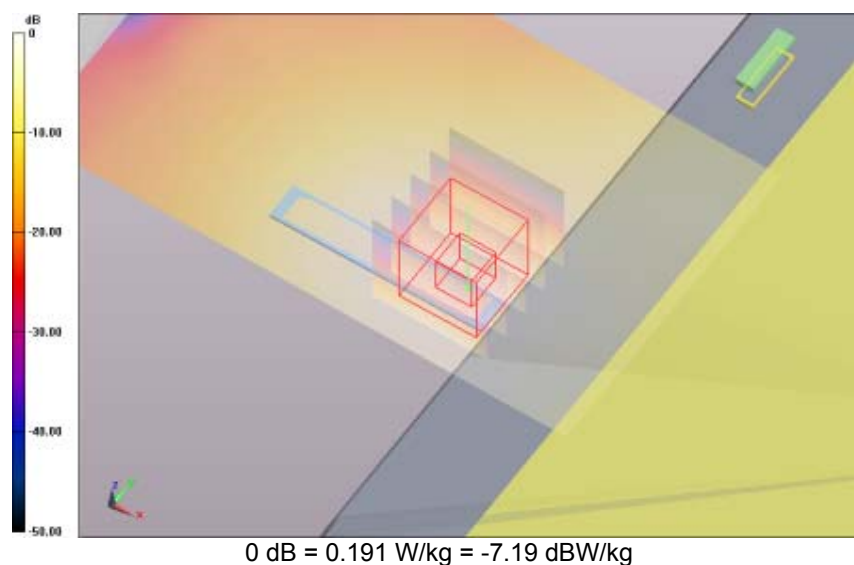


SAR Measurement Plot 160



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

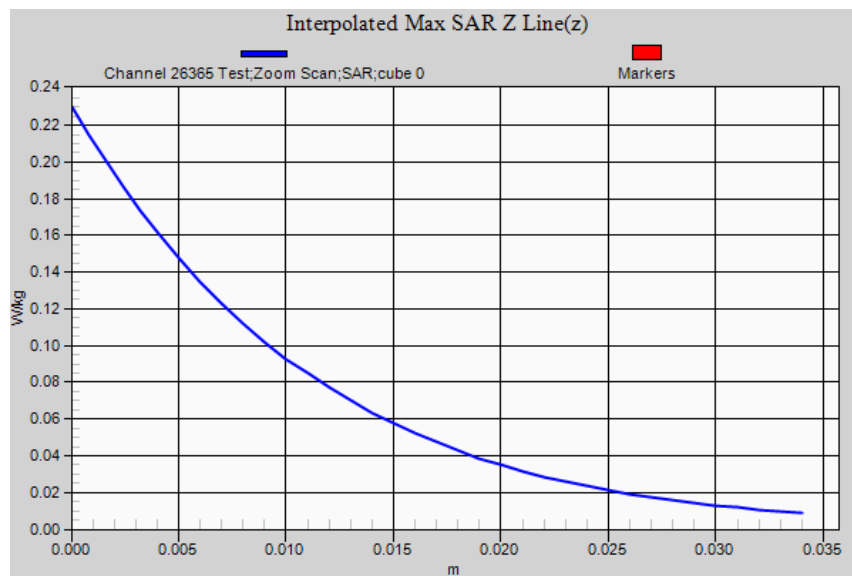

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M1421025 Tablet 1900 MHz LTE FCC.da52:1

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 1RB 26-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (1RB High) (0); Communication System Band: Band 25 E-UTRA 1900; Frequency: 1905 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1905$ MHz; $\sigma = 1.55$ S/m; $\epsilon_r = 51.8$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)


Bystander 25mm Spacing Antenna OUT 1RB 26-11-14/Channel 26590 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.199 W/kg

Bystander 25mm Spacing Antenna OUT 1RB 26-11-14/Channel 26590 Test/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 7.749 V/m; **Power Drift = -0.20 dB**

Averaged SAR: SAR(1g) = 0.188 W/kg; SAR(10g) = 0.116 W/kg

Maximum value of SAR (interpolated) = 0.286 W/kg

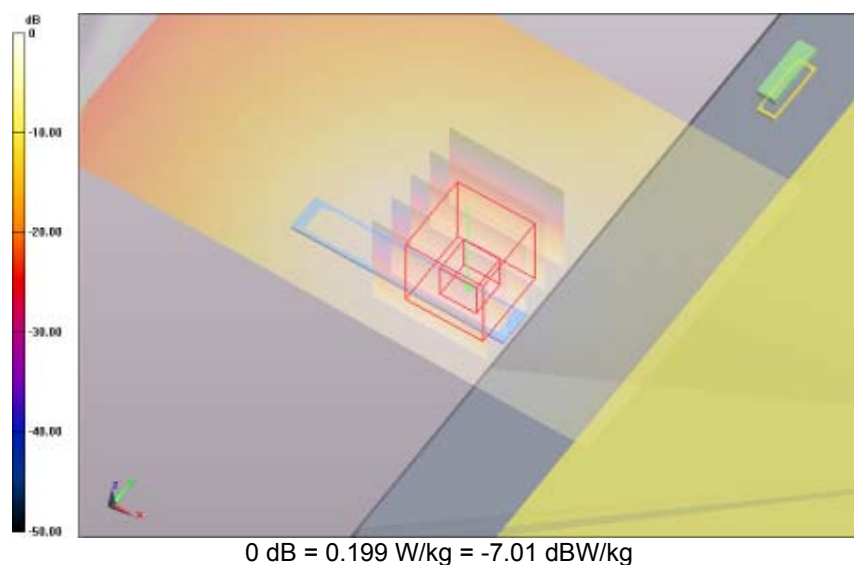


SAR Measurement Plot 161



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

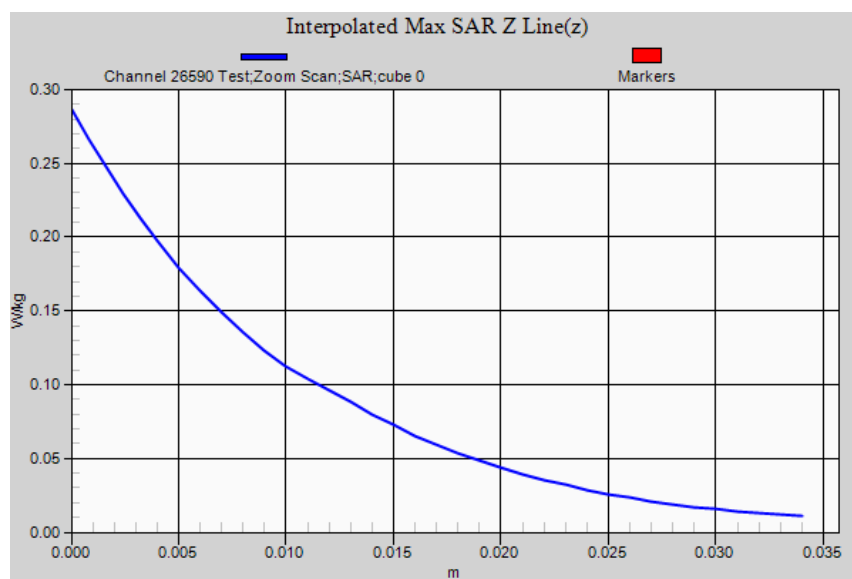

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M1421025 Tablet 1900 MHz LTE FCC.da52:2

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 50RB 26-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (50RB High) (0); Communication System Band: Band 25 E-UTRA 1900; Frequency: 1860 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1860$ MHz; $\sigma = 1.52$ S/m; $\epsilon_r = 52.0$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 50RB 26-11-14/Channel 26140 Test/Area Scan (61x111x1):


Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.137 W/kg

Bystander 25mm Spacing Antenna OUT 50RB 26-11-14/Channel 26140 Test/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 6.315 V/m; Power Drift = -0.09 dB

Averaged SAR: SAR(1g) = 0.130 W/kg; SAR(10g) = 0.080 W/kg

Maximum value of SAR (interpolated) = 0.195 W/kg

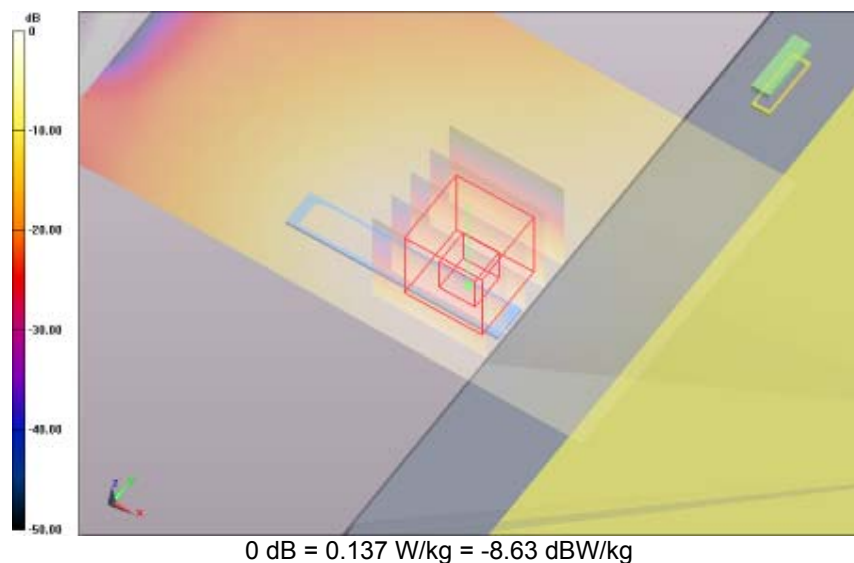


SAR Measurement Plot 162



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

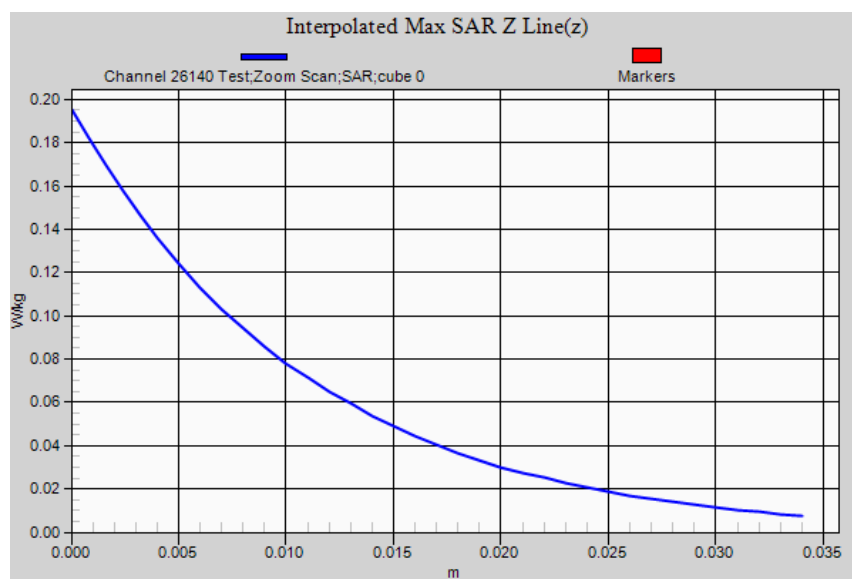

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M1421025 Tablet 1900 MHz LTE FCC.da52:2

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 50RB 26-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (50RB Mid) (0); Communication System Band: Band 25 E-UTRA 1900; Frequency: 1883 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1882.5$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 51.9$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 50RB 26-11-14/Channel 26365 Test/Area Scan (61x111x1):


Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.134 W/kg

Bystander 25mm Spacing Antenna OUT 50RB 26-11-14/Channel 26365 Test/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 6.263 V/m; Power Drift = -0.02 dB

Averaged SAR: SAR(1g) = 0.130 W/kg; SAR(10g) = 0.080 W/kg

Maximum value of SAR (interpolated) = 0.196 W/kg

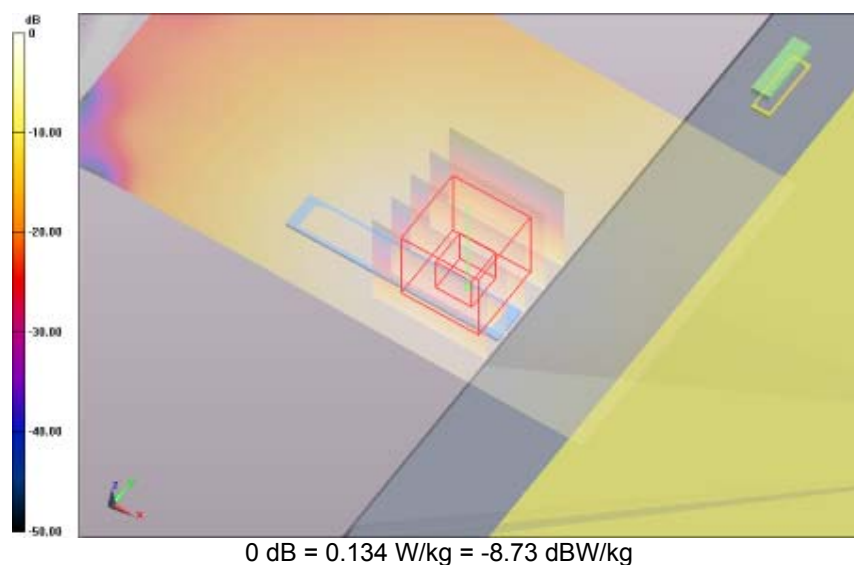


SAR Measurement Plot 163



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

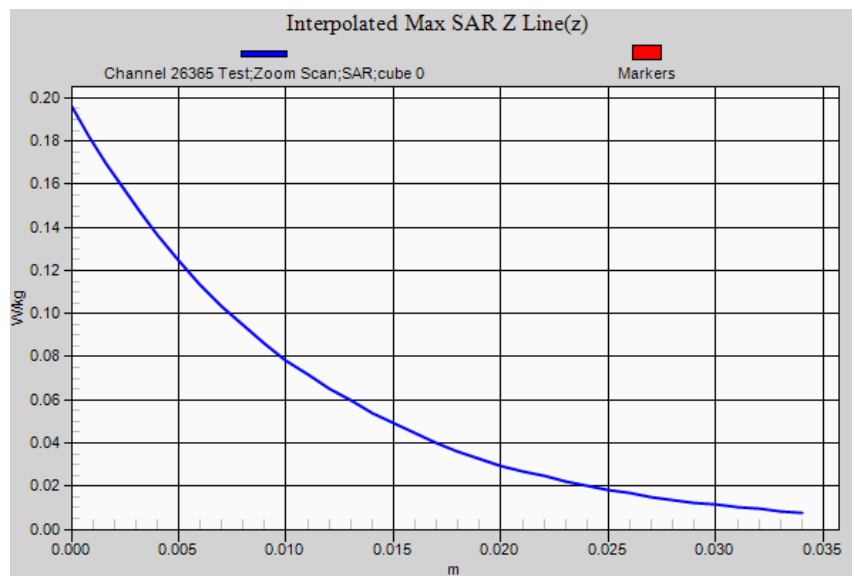

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M1421025 Tablet 1900 MHz LTE FCC.da52:2

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Bystander 25mm Spacing Antenna OUT 50RB 26-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (50RB High) (0); Communication System Band: Band 25 E-UTRA 1900; Frequency: 1905 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1905$ MHz; $\sigma = 1.55$ S/m; $\epsilon_r = 51.8$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Bystander 25mm Spacing Antenna OUT 50RB 26-11-14/Channel 26590 Test/Area Scan (61x111x1):

Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.148 W/kg

Bystander 25mm Spacing Antenna OUT 50RB 26-11-14/Channel 26590 Test/Zoom Scan (21x21x36)/Cube 0:Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 6.562 V/m; **Power Drift = 0.01 dB****Averaged SAR: SAR(1g) = 0.142 W/kg; SAR(10g) = 0.087 W/kg**

Maximum value of SAR (interpolated) = 0.218 W/kg

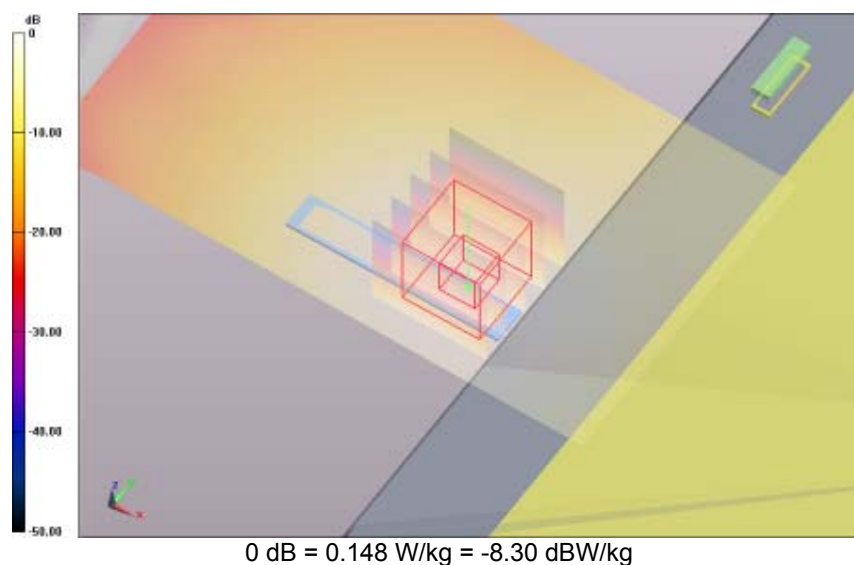


SAR Measurement Plot 164



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

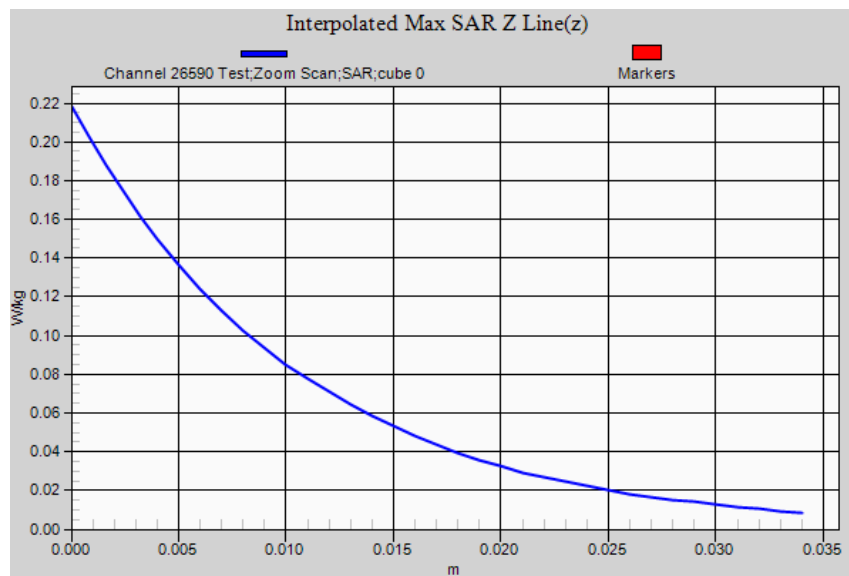

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M1421025 Tablet 1900 MHz LTE FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 1RB 26-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (1RB High) (0); Communication System Band: Band 25 E-UTRA 1900; Frequency: 1860 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1860$ MHz; $\sigma = 1.52$ S/m; $\epsilon_r = 52.0$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 1RB 26-11-14/Channel 26140 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.372 W/kg

Lap Held Antenna OUT 1RB 26-11-14/Channel 26140 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 11.284 V/m; **Power Drift = 0.16 dB**

Averaged SAR: SAR(1g) = 0.395 W/kg; SAR(10g) = 0.233 W/kg

Maximum value of SAR (interpolated) = 0.621 W/kg

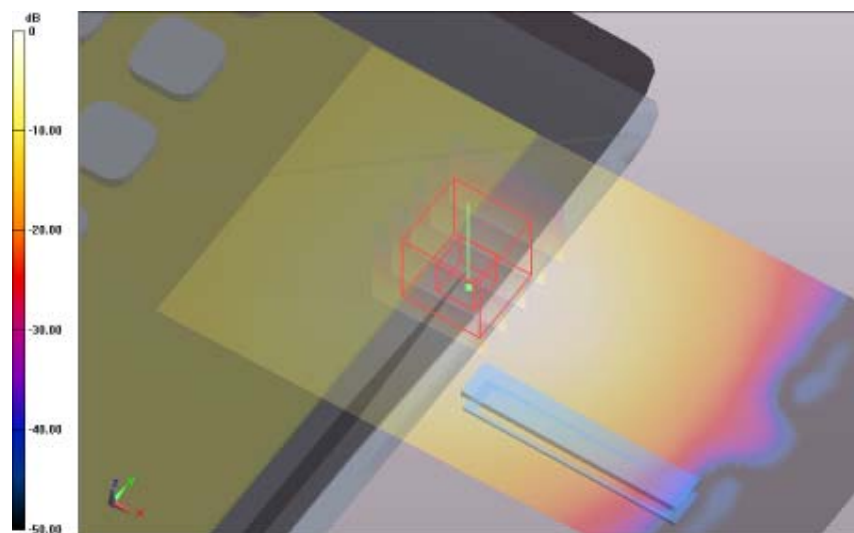


0 dB = 0.372 W/kg = -4.29 dBW/kg

SAR Measurement Plot 165



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

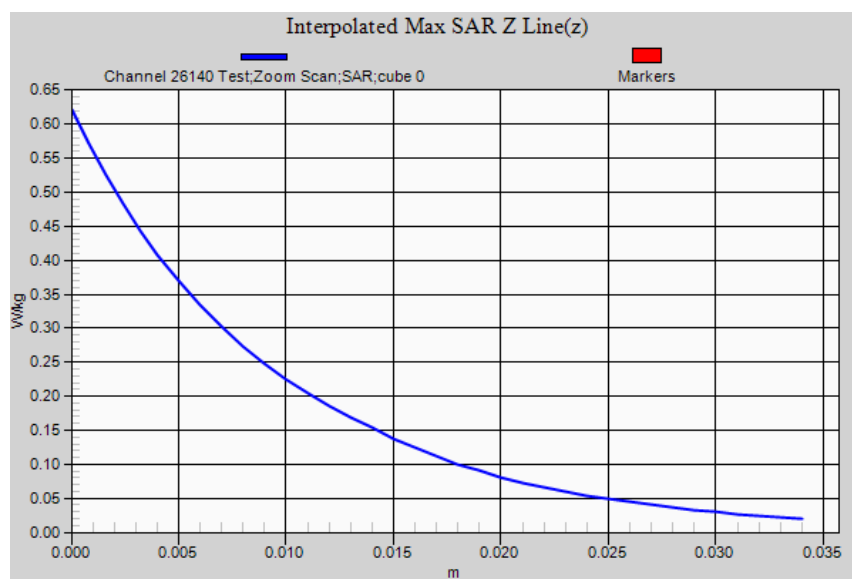

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M1421025 Tablet 1900 MHz LTE FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 1RB 26-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (1RB Low) (0); Communication System Band: Band 25 E-UTRA 1900; Frequency: 1883 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1882.5$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 51.9$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 1RB 26-11-14/Channel 26365 Test/Area Scan (61x111x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.329 W/kg

Lap Held Antenna OUT 1RB 26-11-14/Channel 26365 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 10.801 V/m; **Power Drift = -0.21 dB**

Averaged SAR: SAR(1g) = 0.317 W/kg; SAR(10g) = 0.187 W/kg

Maximum value of SAR (interpolated) = 0.494 W/kg

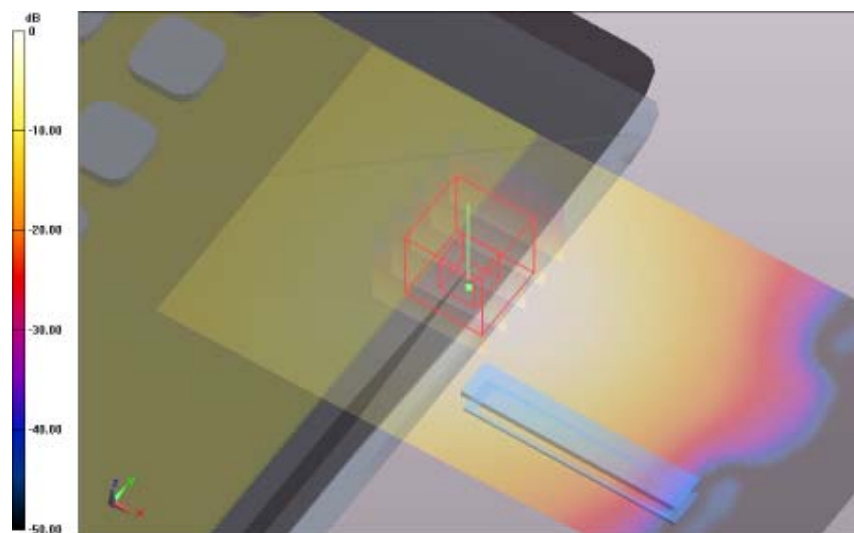


0 dB = 0.329 W/kg = -4.83 dBW/kg

SAR Measurement Plot 166



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

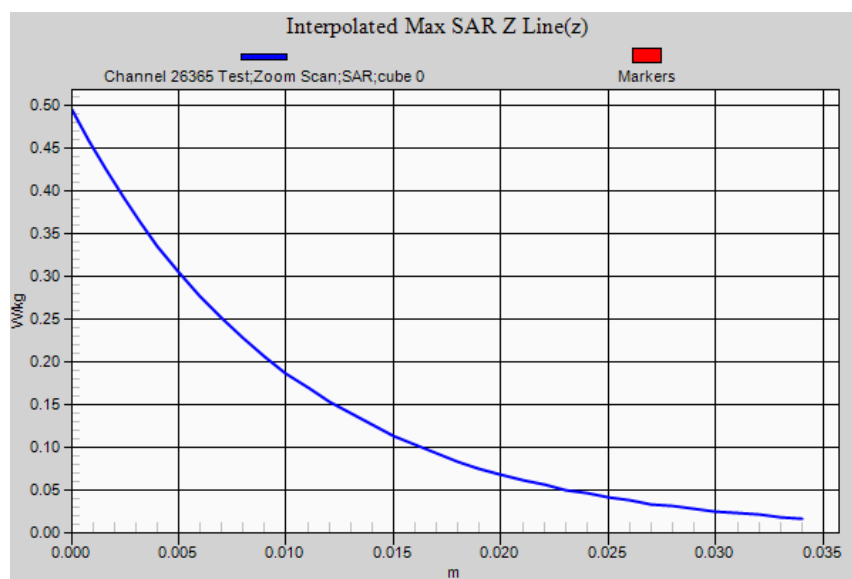

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M1421025 Tablet 1900 MHz LTE FCC.da52:4

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 1RB 26-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (1RB High) (0); Communication System Band: Band 25 E-UTRA 1900; Frequency: 1905 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1905$ MHz; $\sigma = 1.55$ S/m; $\epsilon_r = 51.8$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 1RB 26-11-14/Channel 26590 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.455 W/kg

Lap Held Antenna OUT 1RB 26-11-14/Channel 26590 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 11.463 V/m; **Power Drift = -0.05 dB**

Averaged SAR: SAR(1g) = 0.384 W/kg; SAR(10g) = 0.226 W/kg

Maximum value of SAR (interpolated) = 0.608 W/kg

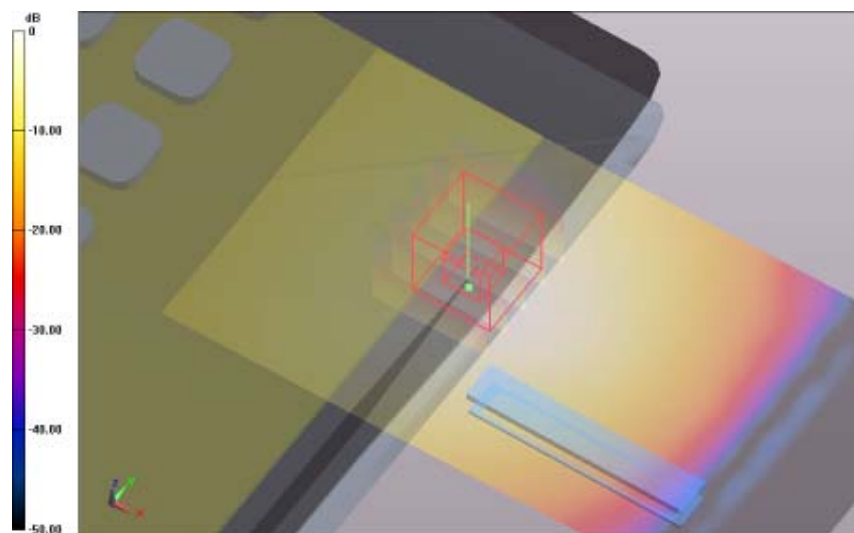


0 dB = 0.455 W/kg = -3.42 dBW/kg

SAR Measurement Plot 167



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

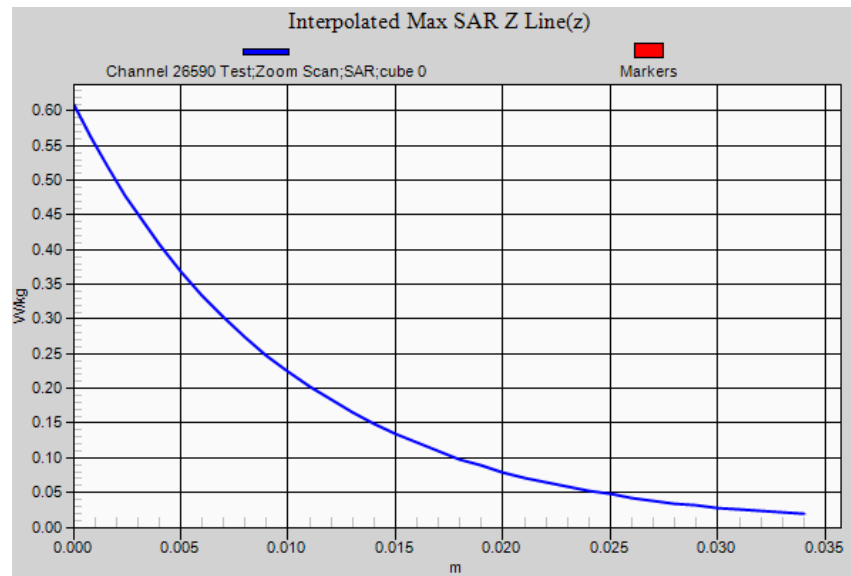

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M1421025 Tablet 1900 MHz LTE FCC.da52:5

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 50RB 26-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (50RB High) (0); Communication System Band: Band 25 E-UTRA 1900; Frequency: 1860 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1860$ MHz; $\sigma = 1.52$ S/m; $\epsilon_r = 52.0$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 50RB 26-11-14/Channel 26140 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.326 W/kg

Lap Held Antenna OUT 50RB 26-11-14/Channel 26140 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 8.483 V/m; **Power Drift = -0.04 dB**

Averaged SAR: SAR(1g) = 0.317 W/kg; SAR(10g) = 0.186 W/kg

Maximum value of SAR (interpolated) = 0.494 W/kg

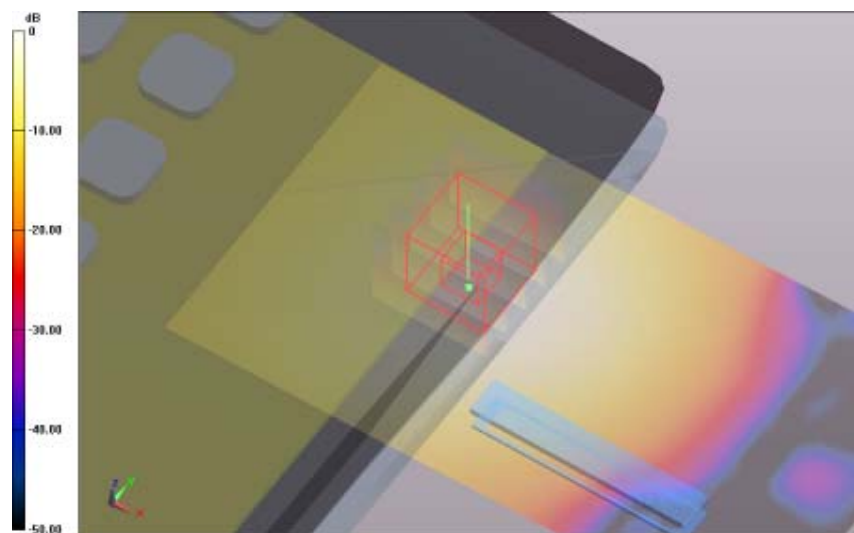


0 dB = 0.326 W/kg = -4.87 dBW/kg

SAR Measurement Plot 168



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

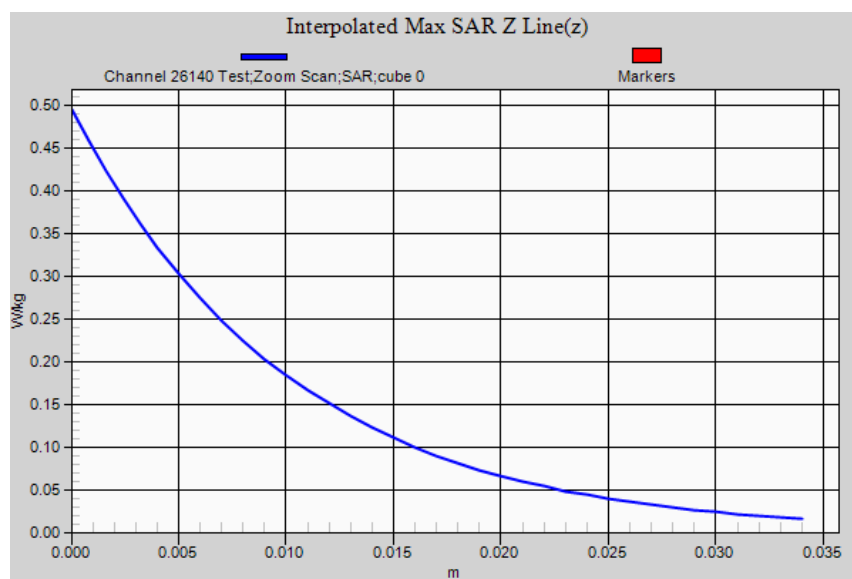

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M1421025 Tablet 1900 MHz LTE FCC.da52:5

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 50RB 26-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (50RB Mid) (0); Communication System Band: Band 25 E-UTRA 1900; Frequency: 1883 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1882.5$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 51.9$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 50RB 26-11-14/Channel 26365 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.310 W/kg

Lap Held Antenna OUT 50RB 26-11-14/Channel 26365 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 8.578 V/m; **Power Drift = -0.05 dB**

Averaged SAR: SAR(1g) = 0.307 W/kg; SAR(10g) = 0.179 W/kg

Maximum value of SAR (interpolated) = 0.485 W/kg

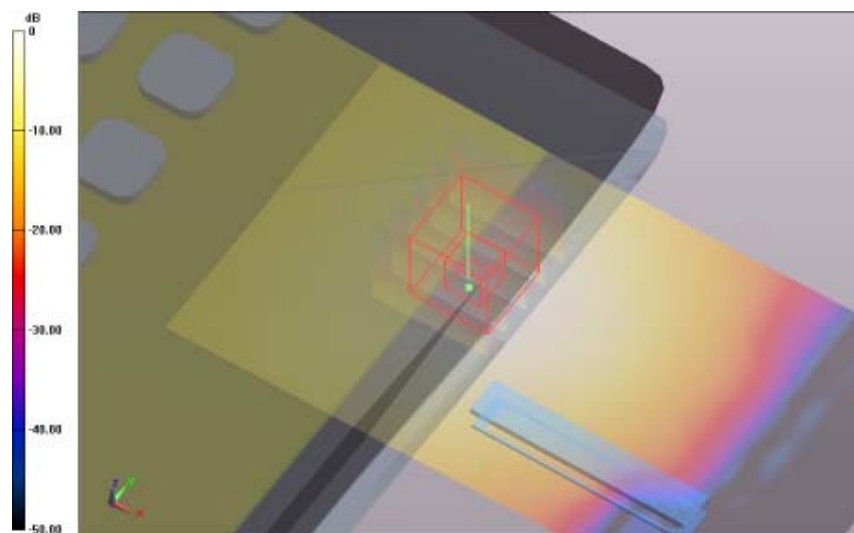


0 dB = 0.310 W/kg = -5.09 dBW/kg

SAR Measurement Plot 169



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

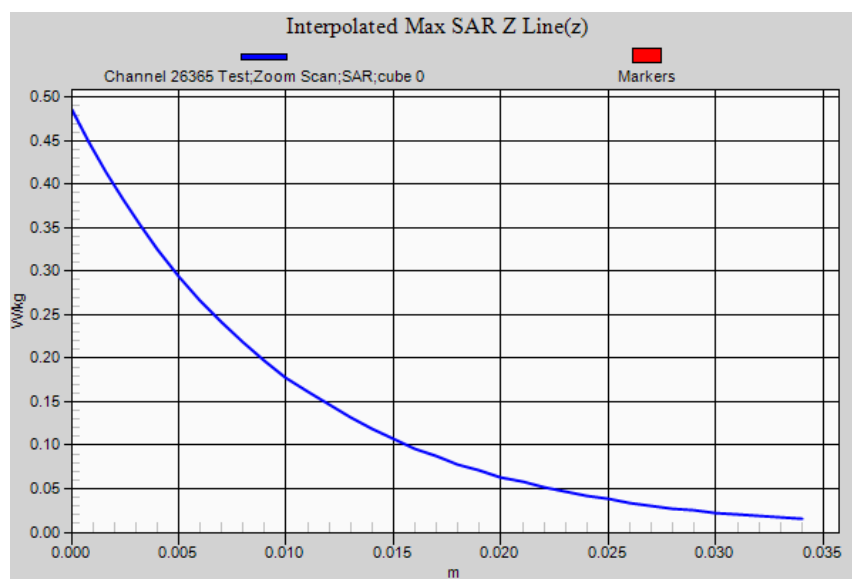

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M1421025 Tablet 1900 MHz LTE FCC.da52:5

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Lap Held Antenna OUT 50RB 26-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (50RB High) (0); Communication System Band: Band 25 E-UTRA 1900; Frequency: 1905 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1905$ MHz; $\sigma = 1.55$ S/m; $\epsilon_r = 51.8$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Lap Held Antenna OUT 50RB 26-11-14/Channel 26590 Test/Area Scan (61x111x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.330 W/kg

Lap Held Antenna OUT 50RB 26-11-14/Channel 26590 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 9.066 V/m; **Power Drift = -0.08 dB**

Averaged SAR: SAR(1g) = 0.322 W/kg; SAR(10g) = 0.189 W/kg

Maximum value of SAR (interpolated) = 0.511 W/kg

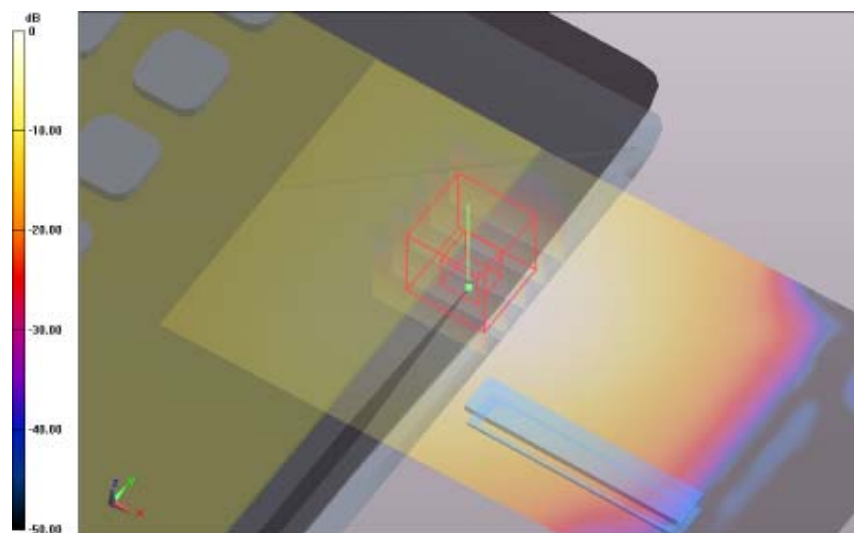


0 dB = 0.330 W/kg = -4.81 dBW/kg

SAR Measurement Plot 170



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

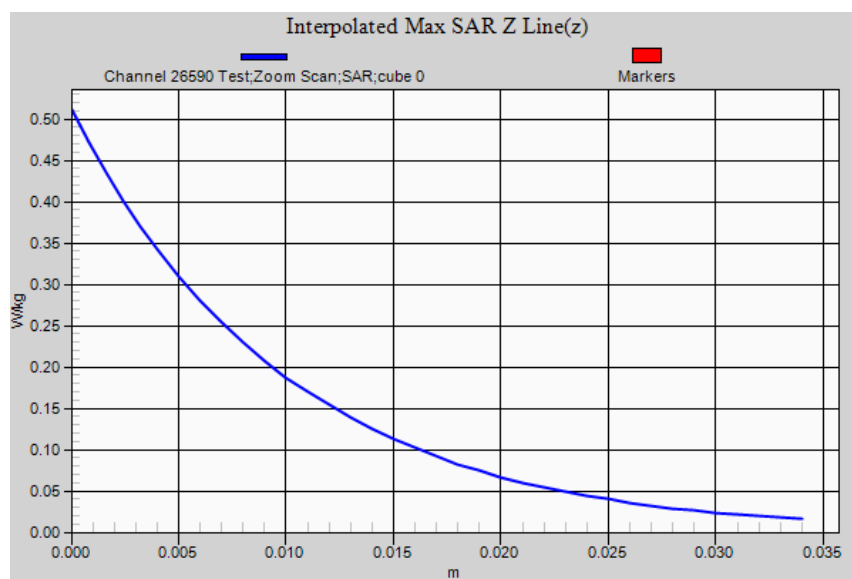

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M1421025 Tablet 1900 MHz LTE FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 1RB 26-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (1RB High) (0); Communication System Band: Band 25 E-UTRA 1900; Frequency: 1860 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1860$ MHz; $\sigma = 1.52$ S/m; $\epsilon_r = 52.0$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 1RB 26-11-14/Channel 26140 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.666 W/kg

Edge 2 Antenna IN 1RB 26-11-14/Channel 26140 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 19.030 V/m; **Power Drift = -0.06 dB**

Averaged SAR: SAR(1g) = 0.714 W/kg; SAR(10g) = 0.268 W/kg

Maximum value of SAR (interpolated) = 1.570 W/kg

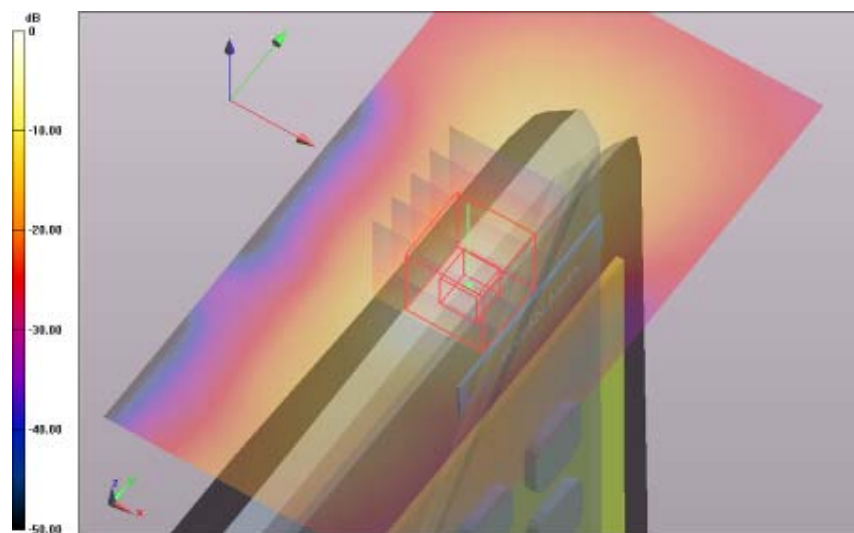


0 dB = 0.666 W/kg = -1.77 dBW/kg

SAR Measurement Plot 171



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

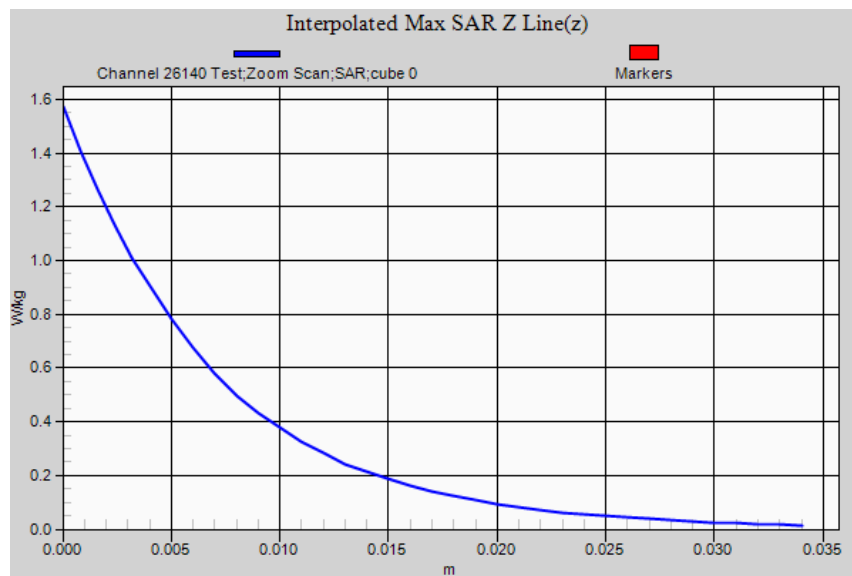

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M1421025 Tablet 1900 MHz LTE FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 1RB 26-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (1RB Low) (0); Communication System Band: Band 25 E-UTRA 1900; Frequency: 1883 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1882.5$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 51.9$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 1RB 26-11-14/Channel 26365 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.388 W/kg

Edge 2 Antenna IN 1RB 26-11-14/Channel 26365 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 12.910 V/m; **Power Drift = -0.17 dB**

Averaged SAR: SAR(1g) = 0.363 W/kg; SAR(10g) = 0.141 W/kg

Maximum value of SAR (interpolated) = 0.815 W/kg

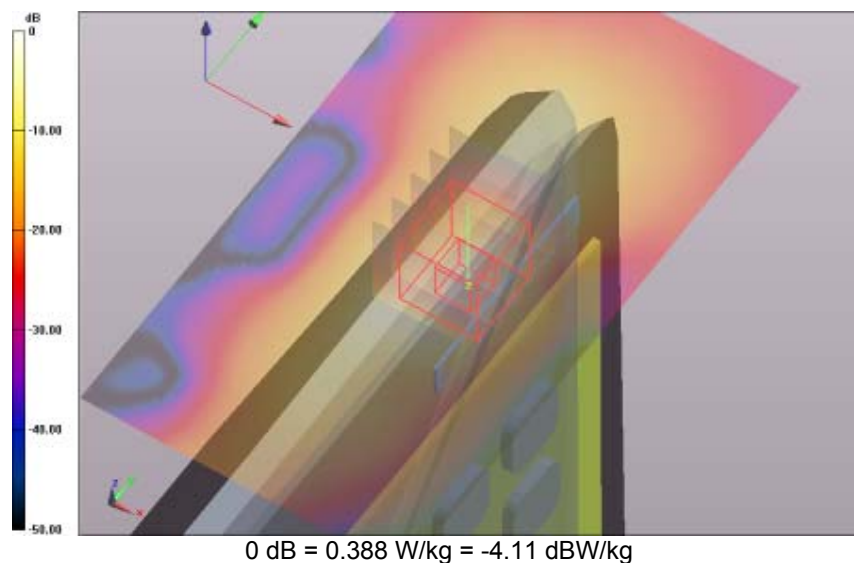


SAR Measurement Plot 172



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

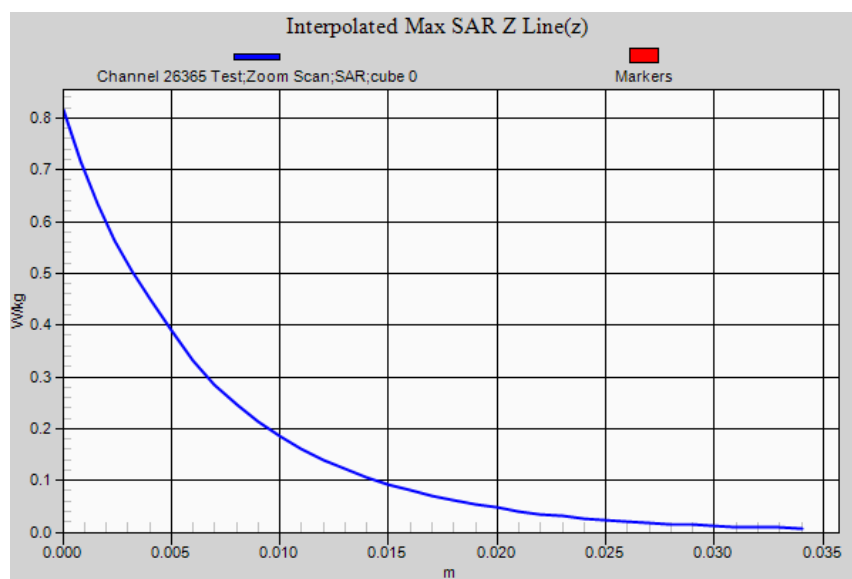

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M1421025 Tablet 1900 MHz LTE FCC.da52:6

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 1RB 26-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (1RB High) (0); Communication System Band: Band 25 E-UTRA 1900; Frequency: 1905 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1905$ MHz; $\sigma = 1.55$ S/m; $\epsilon_r = 51.8$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 1RB 26-11-14/Channel 26590 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.432 W/kg

Edge 2 Antenna IN 1RB 26-11-14/Channel 26590 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 12.886 V/m; **Power Drift = -0.12 dB**

Averaged SAR: SAR(1g) = 0.377 W/kg; SAR(10g) = 0.145 W/kg

Maximum value of SAR (interpolated) = 0.858 W/kg

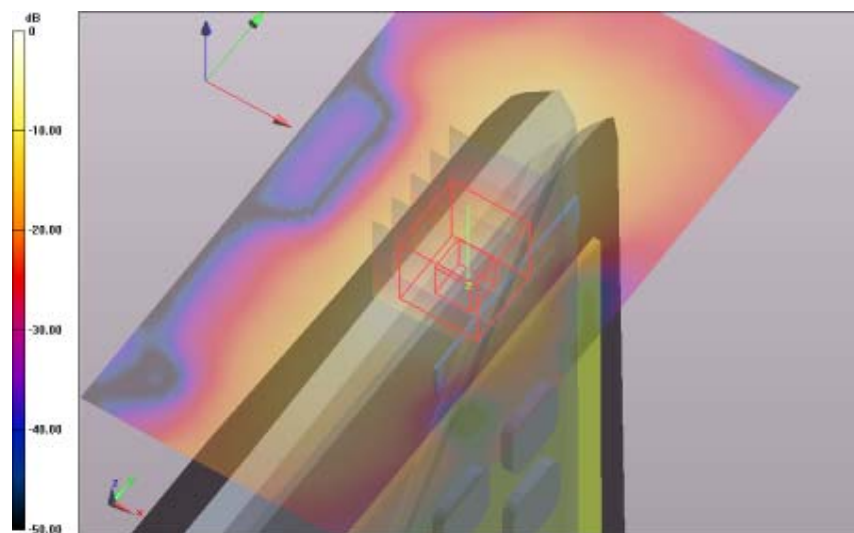


0 dB = 0.432 W/kg = -3.65 dBW/kg

SAR Measurement Plot 173



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

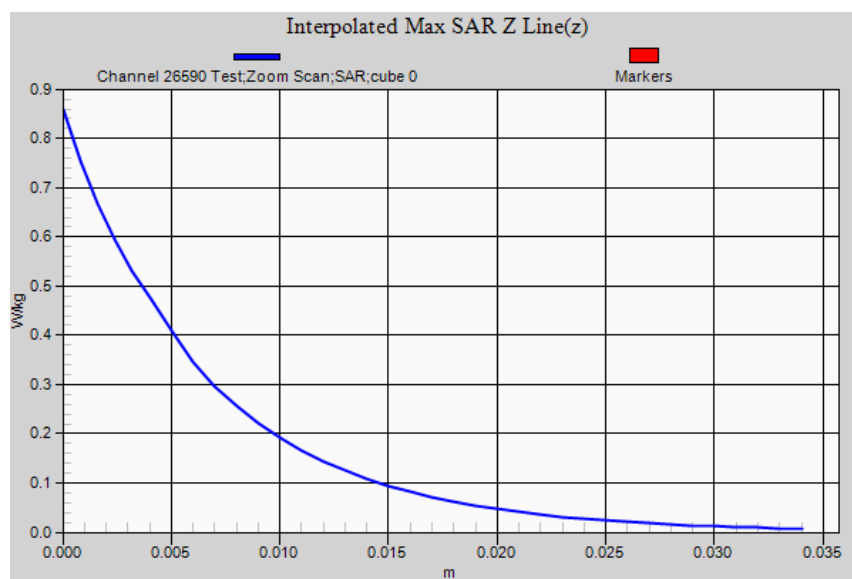

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M1421025 Tablet 1900 MHz LTE FCC.da52:7

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 50RB 26-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (50RB High) (0); Communication System Band: Band 25 E-UTRA 1900; Frequency: 1860 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1860$ MHz; $\sigma = 1.52$ S/m; $\epsilon_r = 52.0$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 50RB 26-11-14/Channel 26140 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.449 W/kg

Edge 2 Antenna IN 50RB 26-11-14/Channel 26140 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 14.038 V/m; **Power Drift = -0.15 dB**

Averaged SAR: SAR(1g) = 0.430 W/kg; SAR(10g) = 0.167 W/kg

Maximum value of SAR (interpolated) = 0.963 W/kg

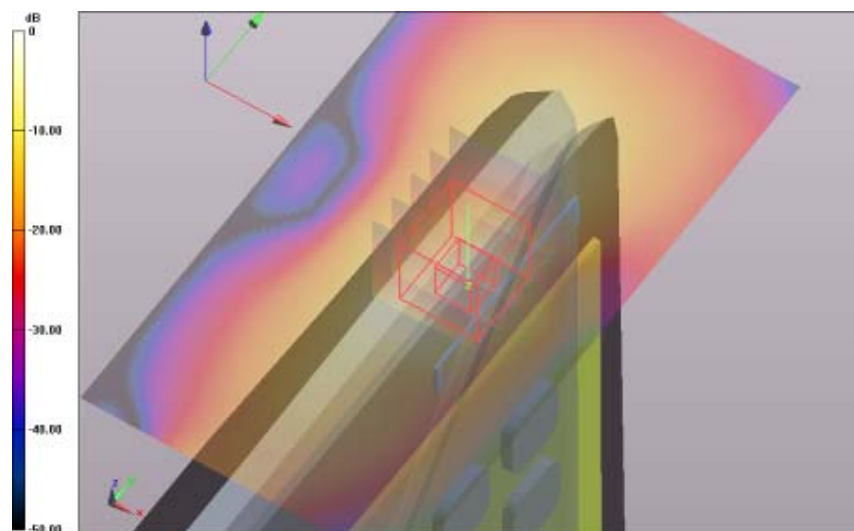


0 dB = 0.449 W/kg = -3.48 dBW/kg

SAR Measurement Plot 174



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

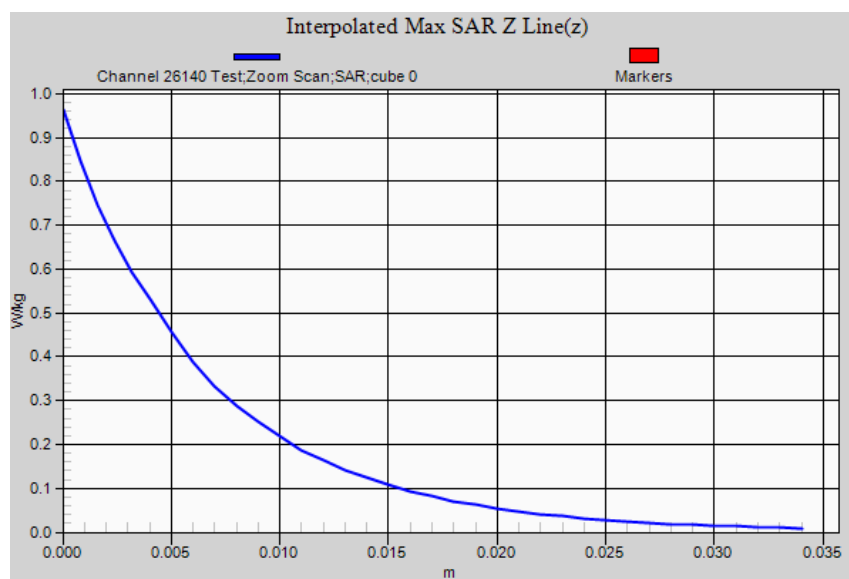

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M1421025 Tablet 1900 MHz LTE FCC.da52:7

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 50RB 26-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (50RB Mid) (0); Communication System Band: Band 25 E-UTRA 1900; Frequency: 1883 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1882.5$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 51.9$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 50RB 26-11-14/Channel 26365 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.414 W/kg

Edge 2 Antenna IN 50RB 26-11-14/Channel 26365 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 13.176 V/m; **Power Drift = -0.08 dB**

Averaged SAR: SAR(1g) = 0.387 W/kg; SAR(10g) = 0.147 W/kg

Maximum value of SAR (interpolated) = 0.879 W/kg

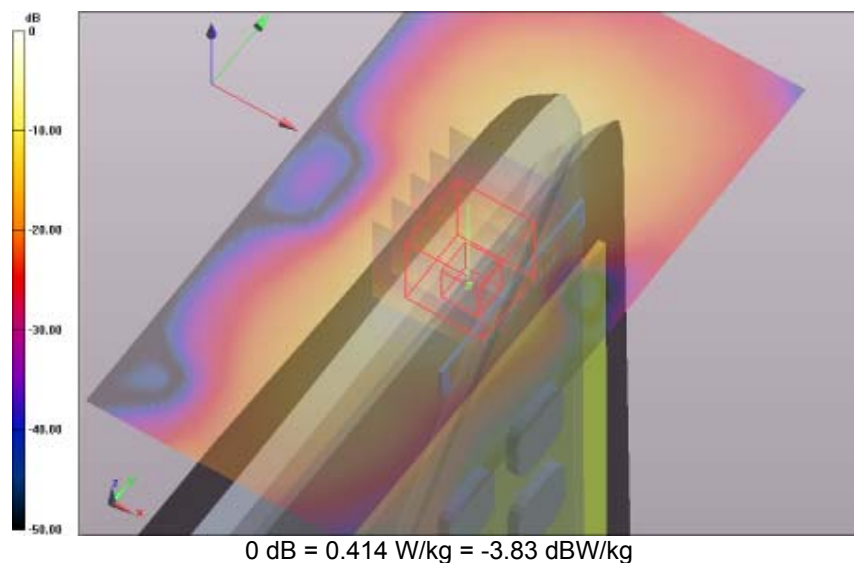


SAR Measurement Plot 175



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

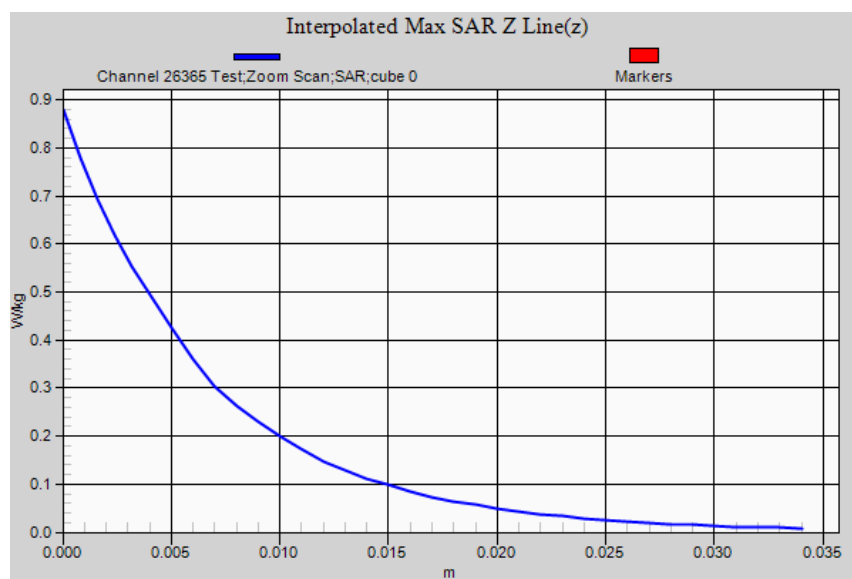

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M1421025 Tablet 1900 MHz LTE FCC.da52:7

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 2 Antenna IN 50RB 26-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (50RB High) (0); Communication System Band: Band 25 E-UTRA 1900; Frequency: 1905 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1905$ MHz; $\sigma = 1.55$ S/m; $\epsilon_r = 51.8$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 Antenna IN 50RB 26-11-14/Channel 26590 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.459 W/kg

Edge 2 Antenna IN 50RB 26-11-14/Channel 26590 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 13.480 V/m; **Power Drift = -0.02 dB**

Averaged SAR: SAR(1g) = 0.415 W/kg; SAR(10g) = 0.158 W/kg

Maximum value of SAR (interpolated) = 0.939 W/kg

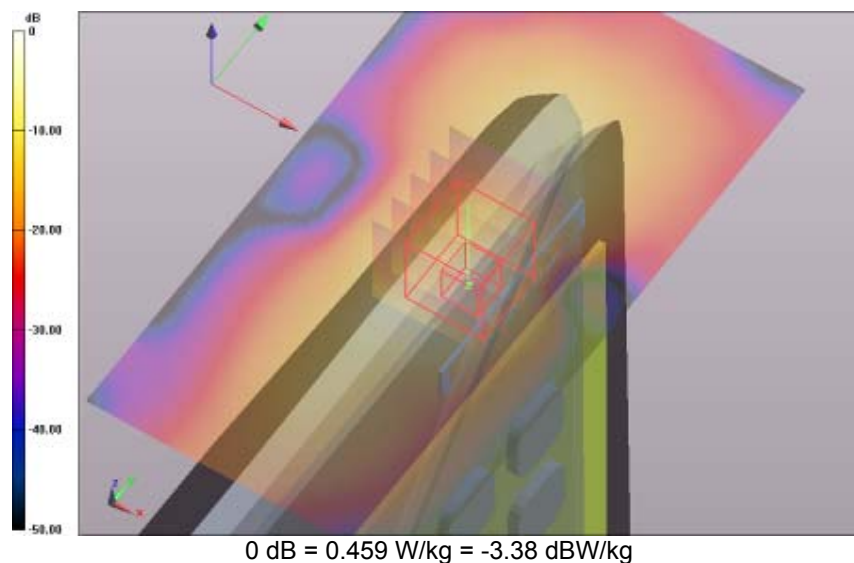


SAR Measurement Plot 176



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

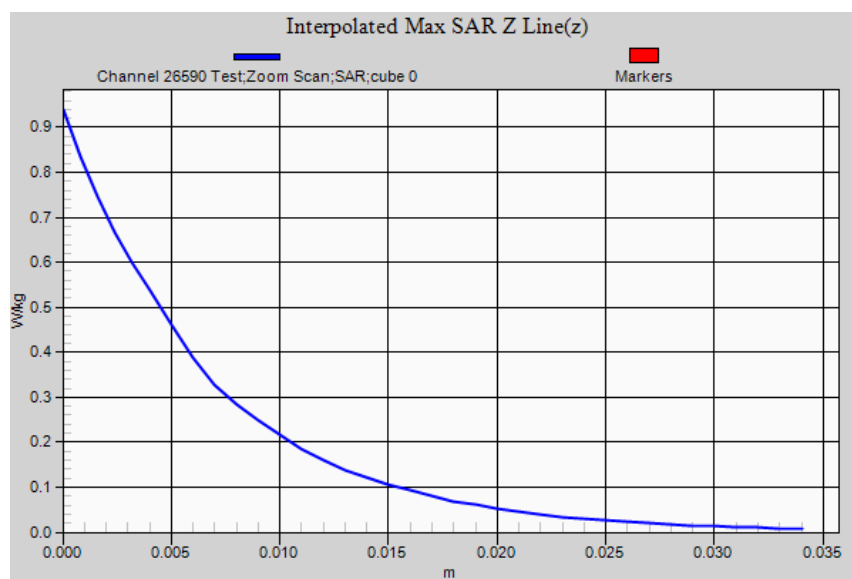

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M1421025 Tablet 1900 MHz LTE FCC.da52:9

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 1RB 26-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (1RB High) (0); Communication System Band: Band 25 E-UTRA 1900; Frequency: 1860 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1860$ MHz; $\sigma = 1.52$ S/m; $\epsilon_r = 52.0$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 1RB 26-11-14/Channel 26140 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.463 W/kg

Edge 3 Antenna OUT 1RB 26-11-14/Channel 26140 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 7.964 V/m; **Power Drift = -0.09 dB**

Averaged SAR: SAR(1g) = 0.436 W/kg; SAR(10g) = 0.254 W/kg

Maximum value of SAR (interpolated) = 0.657 W/kg

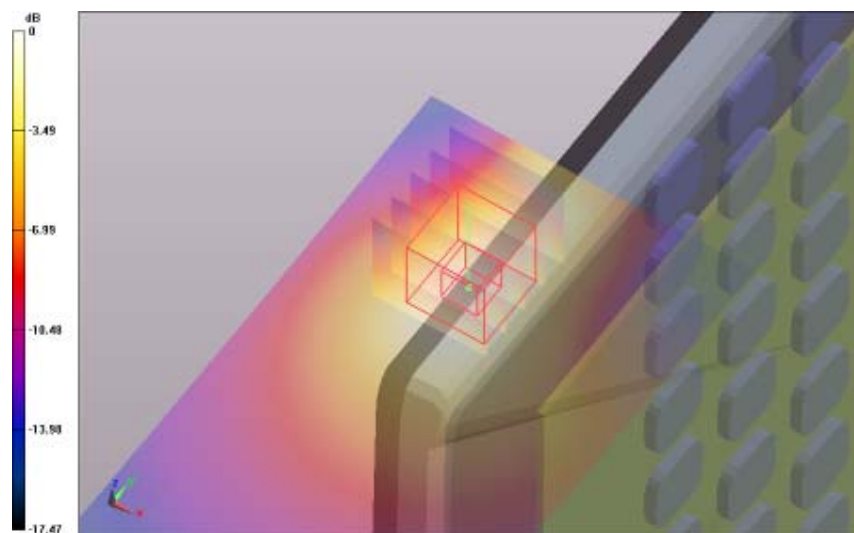


0 dB = 0.463 W/kg = -3.34 dBW/kg

SAR Measurement Plot 177



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

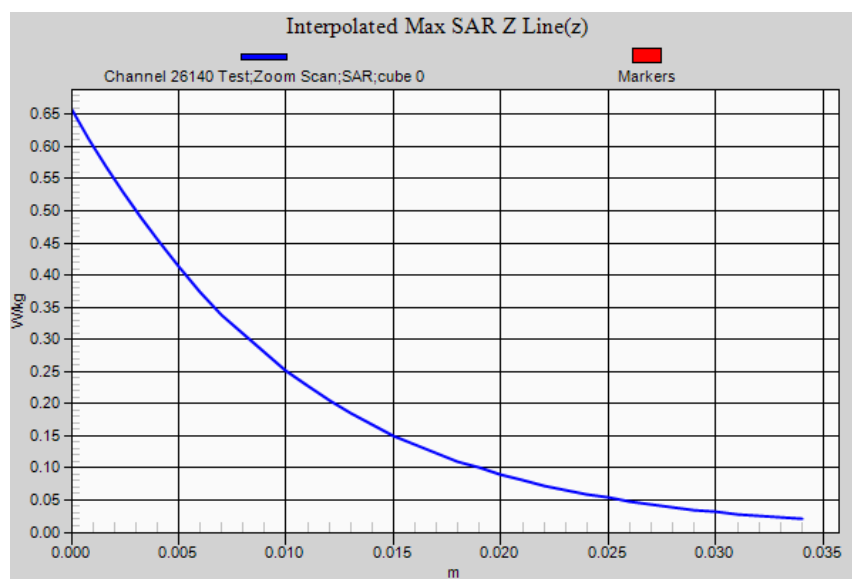

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M1421025 Tablet 1900 MHz LTE FCC.da52:9

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 1RB 26-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (1RB Low) (0); Communication System Band: Band 25 E-UTRA 1900; Frequency: 1883 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1882.5$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 51.9$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 1RB 26-11-14/Channel 26365 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.323 W/kg

Edge 3 Antenna OUT 1RB 26-11-14/Channel 26365 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 6.527 V/m; **Power Drift = -0.05 dB**

Averaged SAR: SAR(1g) = 0.305 W/kg; SAR(10g) = 0.178 W/kg

Maximum value of SAR (interpolated) = 0.467 W/kg

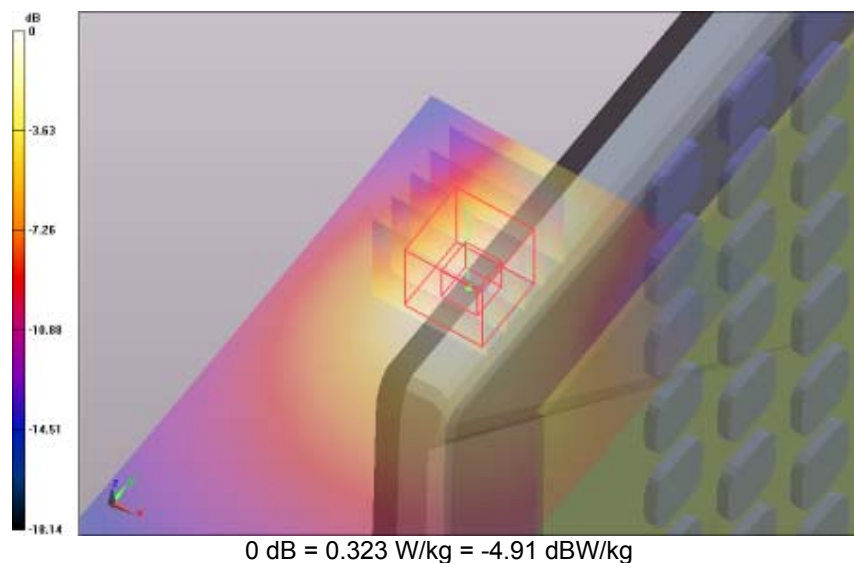


SAR Measurement Plot 178



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

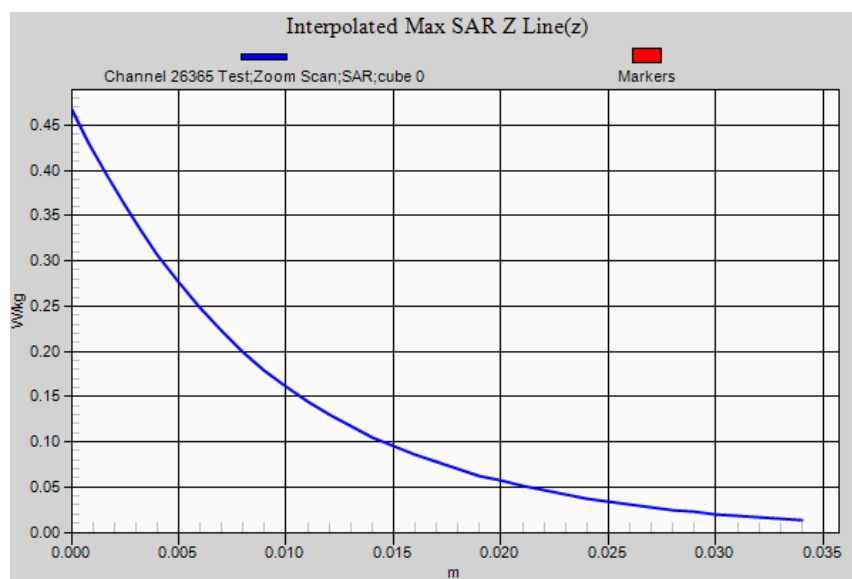

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M1421025 Tablet 1900 MHz LTE FCC.da52:9

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 1RB 26-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (1RB High) (0); Communication System Band: Band 25 E-UTRA 1900; Frequency: 1905 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1905$ MHz; $\sigma = 1.55$ S/m; $\epsilon_r = 51.8$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 1RB 26-11-14/Channel 26590 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.338 W/kg

Edge 3 Antenna OUT 1RB 26-11-14/Channel 26590 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 6.762 V/m; **Power Drift = 0.02 dB**

Averaged SAR: SAR(1g) = 0.312 W/kg; SAR(10g) = 0.182 W/kg

Maximum value of SAR (interpolated) = 0.490 W/kg

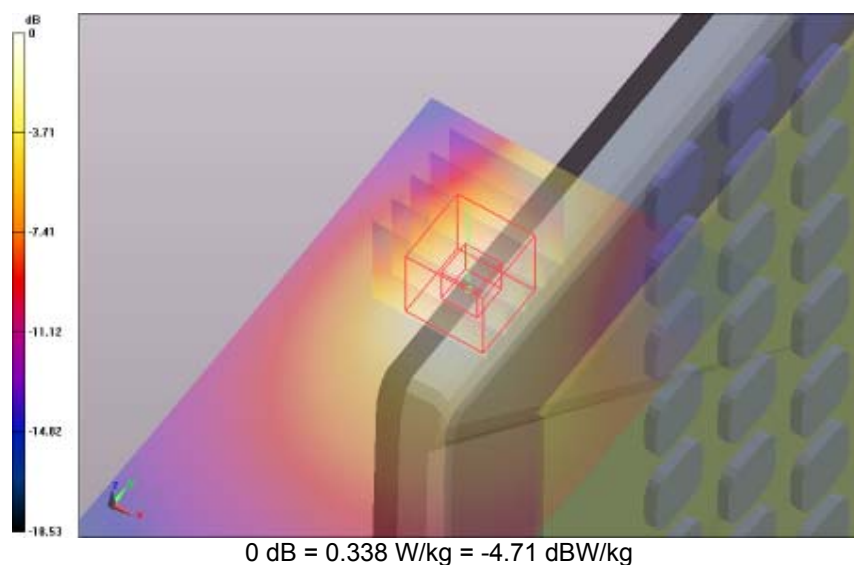


SAR Measurement Plot 179



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

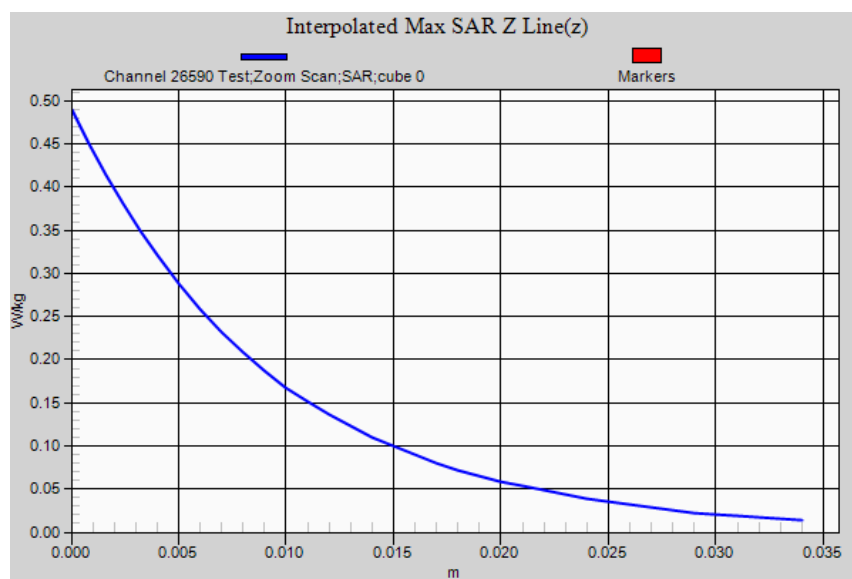

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M1421025 Tablet 1900 MHz LTE FCC.da52:10

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 50RB 26-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (50RB High) (0); Communication System Band: Band 25 E-UTRA 1900; Frequency: 1860 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1860$ MHz; $\sigma = 1.52$ S/m; $\epsilon_r = 52.0$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 50RB 26-11-14/Channel 26140 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.300 W/kg

Edge 3 Antenna OUT 50RB 26-11-14/Channel 26140 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 6.381 V/m; **Power Drift = 0.01 dB**


Averaged SAR: SAR(1g) = 0.277 W/kg; SAR(10g) = 0.162 W/kg

Maximum value of SAR (interpolated) = 0.422 W/kg

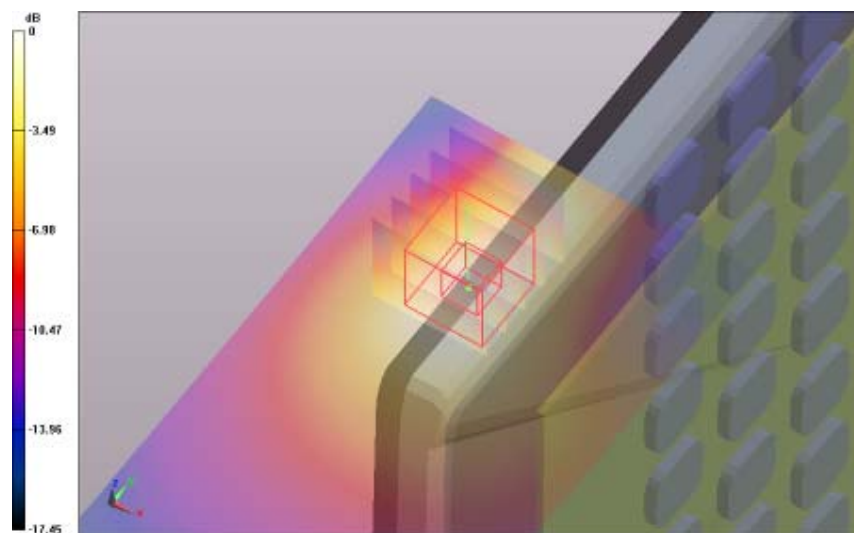

0 dB = 0.300 W/kg = -5.23 dBW/kg

SAR Measurement Plot 180

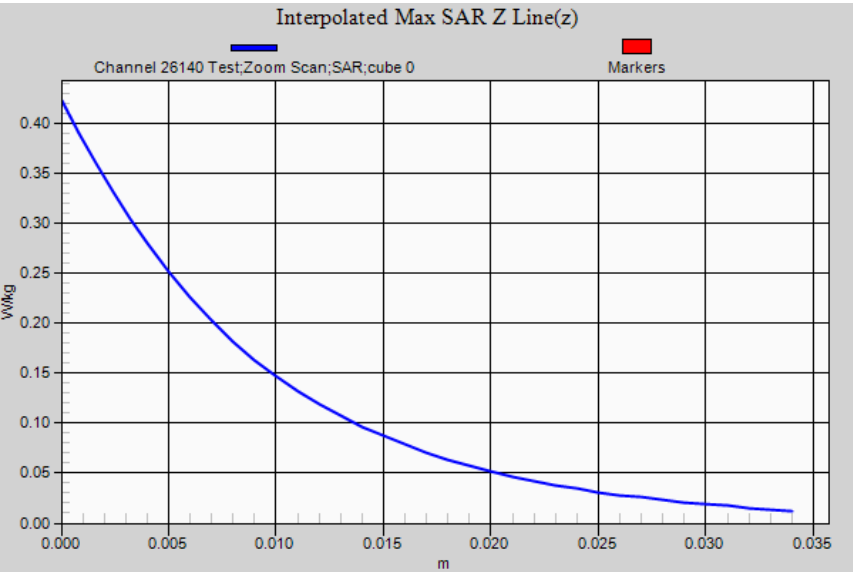

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M1421025 Tablet 1900 MHz LTE FCC.da52:10

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 50RB 26-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (50RB Mid) (0); Communication System Band: Band 25 E-UTRA 1900; Frequency: 1883 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1882.5$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 51.9$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 50RB 26-11-14/Channel 26365 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.260 W/kg

Edge 3 Antenna OUT 50RB 26-11-14/Channel 26365 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 6.077 V/m; **Power Drift = -0.11 dB**

Averaged SAR: SAR(1g) = 0.240 W/kg; SAR(10g) = 0.141 W/kg

Maximum value of SAR (interpolated) = 0.374 W/kg

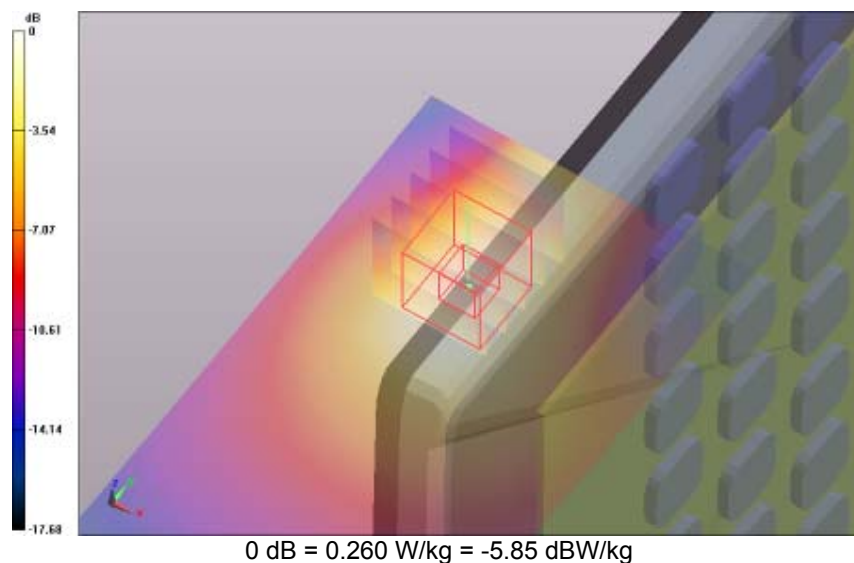


SAR Measurement Plot 181



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

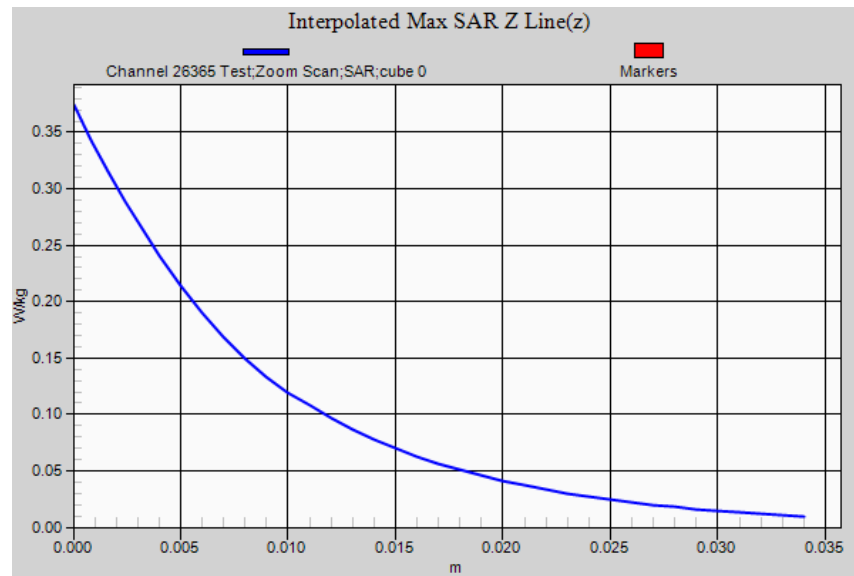

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M1421025 Tablet 1900 MHz LTE FCC.da52:10

DUT Name: Fujitsu Tablet Trust with Sierra WWAN, Type: EM7355, Serial: IMEI:356196050042429**Configuration: Edge 3 Antenna OUT 50RB 26-11-14**

Communication System: 0 - LTE FDD 20MHz QPSK (50RB High) (0); Communication System Band: Band 25 E-UTRA 1900; Frequency: 1905 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1905$ MHz; $\sigma = 1.55$ S/m; $\epsilon_r = 51.8$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.68,4.68,4.68); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 3 Antenna OUT 50RB 26-11-14/Channel 26590 Test/Area Scan (111x61x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.281 W/kg

Edge 3 Antenna OUT 50RB 26-11-14/Channel 26590 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 6.093 V/m; **Power Drift = 0.01 dB**

Averaged SAR: SAR(1g) = 0.266 W/kg; SAR(10g) = 0.154 W/kg

Maximum value of SAR (interpolated) = 0.420 W/kg

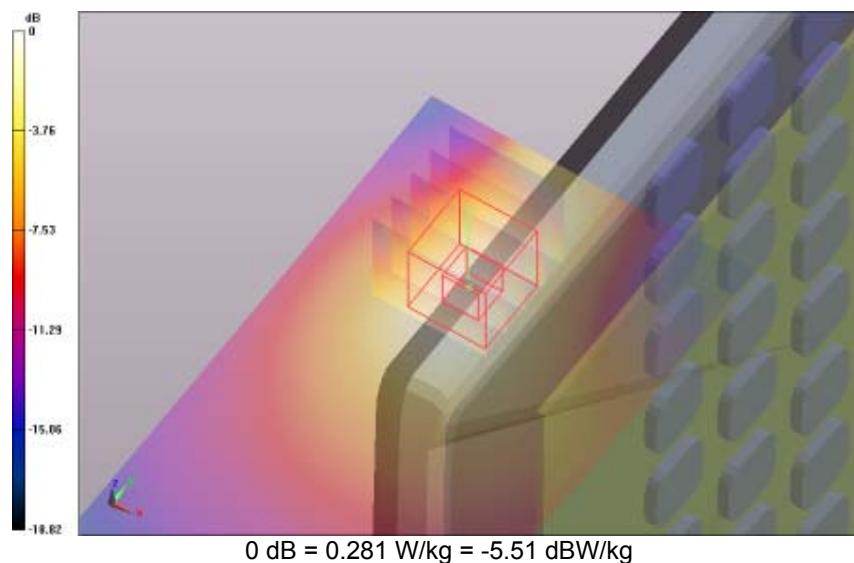


SAR Measurement Plot 182



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

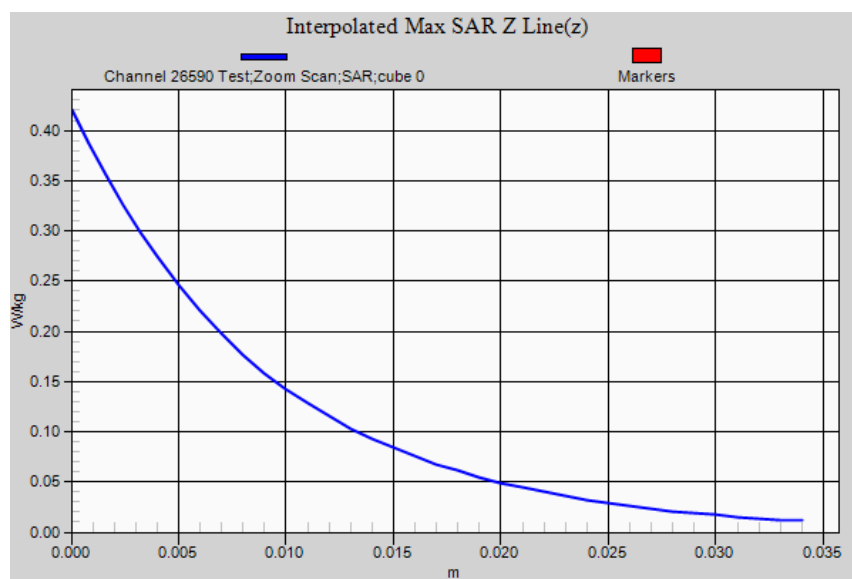

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M1421025 Tablet 1900 MHz LTE FCC.da52:11

DUT Name: Dipole 1950 MHz, Type: DV1950V3, Serial: 1113

Configuration: System Check 26-11-14

Communication System: 0 - CW (0); Communication System Band: 1950 MHz; Frequency: 1950 MHz,
Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=1950$ MHz; $\sigma = 1.57$ S/m; $\epsilon_r = 51.6$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.67,4.67,4.67); Calibrated: 13/12/2013;
Sensor-Surface: 4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 10/12/2013
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

System Check 26-11-14/Channel 1 Test/Area Scan (51x51x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm;
Maximum value of SAR (interpolated) = 12.700 W/kg

System Check 26-11-14/Channel 1 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 91.846 V/m; **Power Drift = 0.03 dB**

Averaged SAR: SAR(1g) = 10.100 W/kg; SAR(10g) = 5.220 W/kg

Maximum value of SAR (interpolated) = 17.300 W/kg

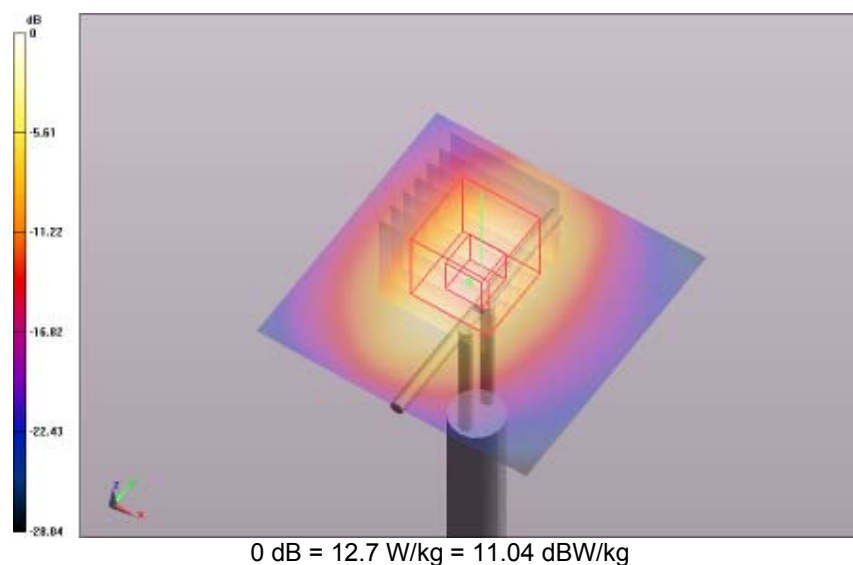


SAR Measurement Plot 183



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

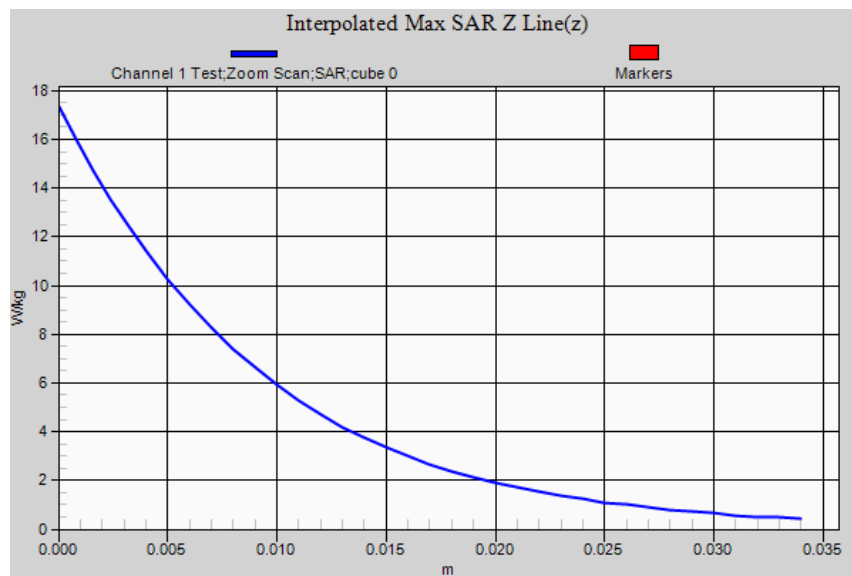

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.